



EXPLODED VIEW/PARTS LIST

Escutcheon section

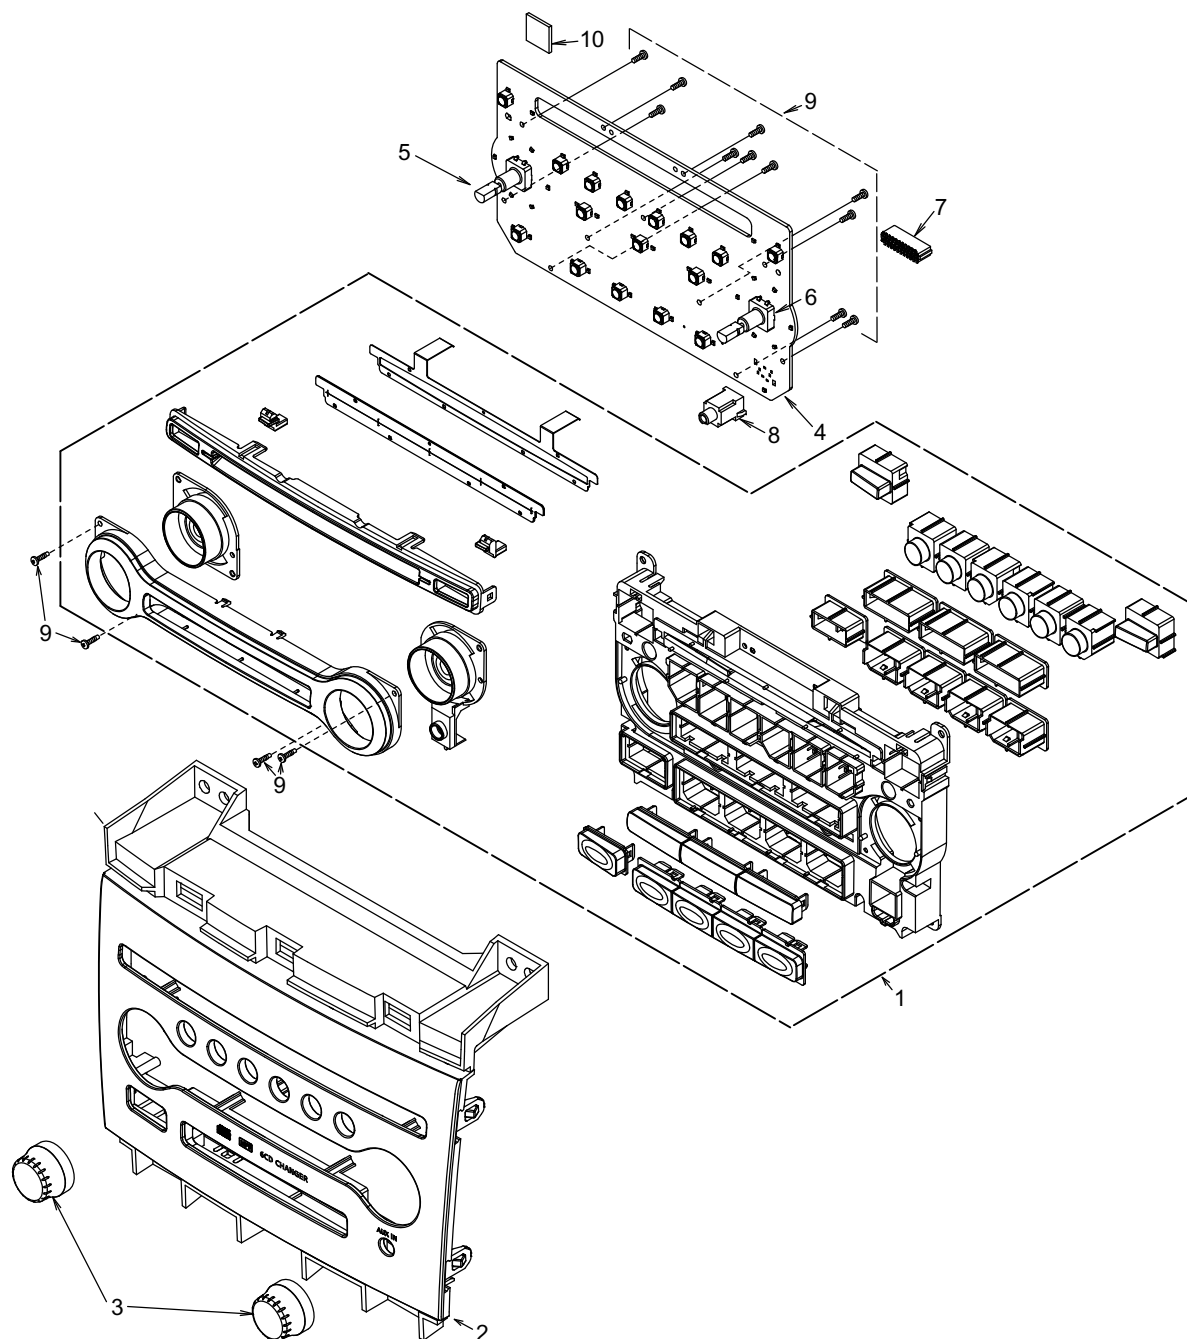

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	947-0695-31	BACK PLATE-ASSY	1	6	016-0024-07	VR W/SHAFT(TUN/FOL)	1
2	370-6299-16	ESCUTCHEON	1	7	074-3013-74	OUTLET SOCKET(24P)	1
3	380-5705-01	KNOB	2	8	075-0390-00	JACK	1
4	-----	SWITCH PWB	1	9	716-0778-52	SCREW(M2x8)	15
5	016-0018-23	VR W/SHAFT(VOL)	1	10	345-6126-00	CUSHION RUBBER	1


Main section

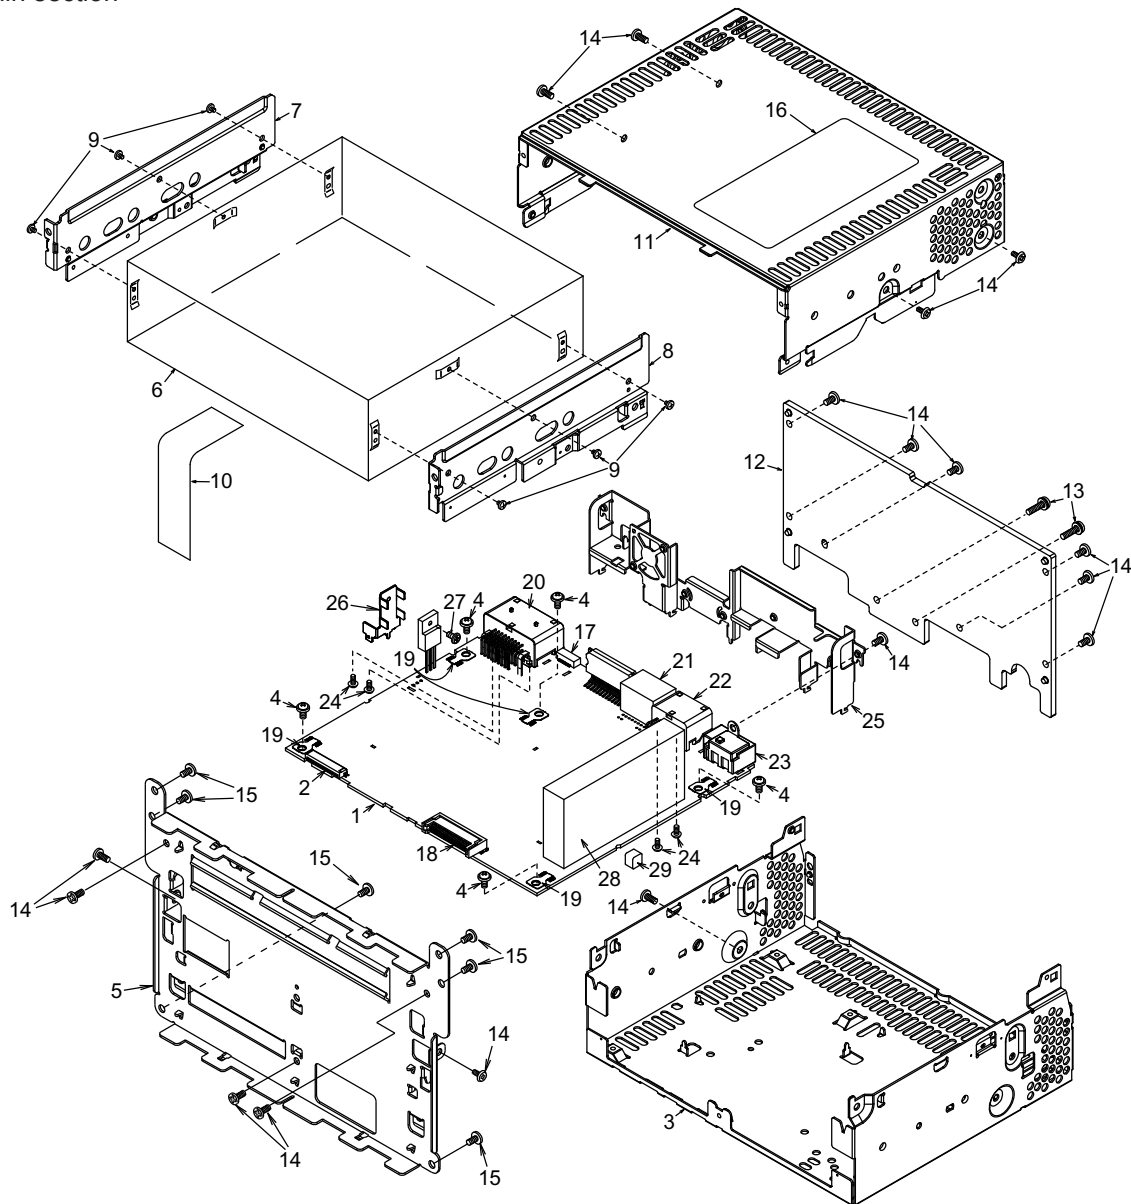


NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1
2	074-1237-69	OUTLET SOCKET(19P)	1
3	311-1914-00	LOWER CASE	1
4	716-0878-50	SCREW(M2.6x5)	5
5	309-0850-01	ES PLATE	1
6	929-0390-83	CD-CHANG-MODULE	1
7	331-4091-10	6CD BRKT(L)	1
8	331-4092-10	6CD BRKT(R)	1
9	716-3552-00	SCREW(M2.3x2.5)	6
10	816-4024-50	FLAT WIRE	1
11	310-1823-10	UPPER CASE	1
12	313-1968-00	HEAT SINK	1
13	735-2614-1B	D-SEMS SCREW(M2.6x14)	2
14	714-2606-8B	MACHINE SCREW(M2.6x6)	17
15	716-1553-50	SCREW(M3x8)	6

NO.	PART NO.	DESCRIPTION	Q'TY
16	276-0066-07	SETPLATE	1
17	076-0478-59	PLUG(9P)	1
18	076-3011-74	PLUG(24P)	1
19	073-0762-90	TERMINAL	5
20	074-4009-20	OUTLET SOCKET(20P)	1
21	074-1013-00	OUTLET SOCKET(12P)	1
22	074-1302-12	OUTLET SOCKET(12P)	1
23	092-2210-00	ANT-RECEPT	1
24	778-3006-00	TAP-SCREW(3x6)	4
25	307-0731-00	REAR PLATE	1
26	331-4454-00	TR-HOLDER	1
27	716-1494-50	IT SCREW(M2.6x6)	1
28	880-2026L	TUNER PACK	1
29	345-5805-01	GASKET	1

CONNECTIONS

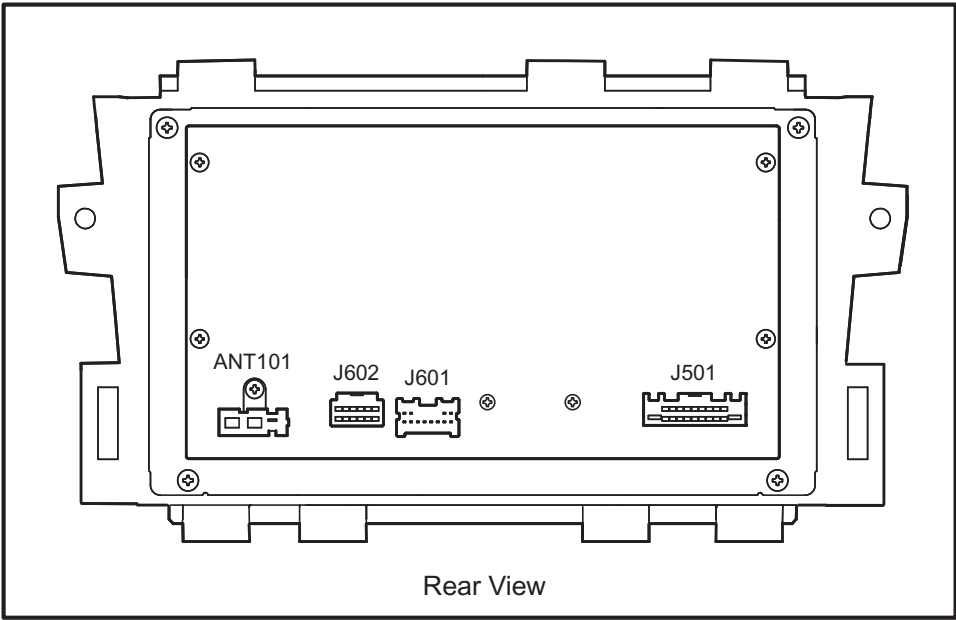


ANT101 (GT13)
ANT Connector




No.	Pin Name
A	ANT+B
B	MAIN ANT
C	SUB ANT

J602 (TH12)
M-CAN Connector
(for Display unit)




No.	Pin Name
h11	M CAN (-)
h12	M CAN (+)
h13	N.C.
h14	N.C.
h15	TEL ON.OUT
h16	TEL OFF.OUT
h17	M CAN SHIELD
h18	TEL SHIELD
h19	TEL I/F(+)
h20	TEL I/F(-)
h21	TEL-ON
h22	TEL OUT GND

J601 (A12)
N-BUS Connector
(for Satellite radio)



No.	Pin Name
V1	SAT LCH (-)
V2	SAT LCH (+)
V3	SAT RCH (-)
V4	SAT RCH (+)
V5	GND
V6	SHIELD GND
V7	N.C.
V8	REQ(SAT->COMBI)
V9	RXD(SAT->COMBI)
V10	TXD(COMBI->SAT)
V11	N.C.
V12	N.C.

J501 (TH18)
Main Connector



No.	Pin Name
1	N.C.
2	FRONT LCH (+)
3	FRONT LCH (-)
4	REAR LCH (+)
5	REAR LCH (-)
6	STRG SW A
7	ACC
8	ILL (-)
9	ILL (+)
10	GND
11	FRONT RCH (+)
12	FRONT RCH (-)
13	REAR RCH (+)
14	REAR RCH (-)
15	STRG GND
16	STRG SW B
17	N.C.
18	N.C.
19	B/U
20	GND

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-00	ANT RECEPT	C106	166-2201-50	22pF CH	C111	168-1022-55	1000pF K
BL101	80-2026-LI	TUNER PACK	C107	043-0319-51	200P	C112	168-1022-55	1000pF K
C101	168-2222-55	2200pF K	C108	168-2222-55	2200pF K	C113	163-1073-35	16V 100uF
C103	166-1511-50	150pF CH	C109	168-1022-55	1000pF K	C114	168-2222-55	2200pF K
C105	163-1063-35	16V 10uF	C110	168-1022-55	1000pF K	C115	168-1022-55	1000pF K

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C116	168-1022-55	1000pF K	C408	168-1042-78	16V 0.1uF	C551	168-1042-38	50V 0.1uF
C117	168-1022-55	1000pF K	C409	163-4763-15	6.3V 47uF	C553	168-6822-55	6800pF K
C118	163-1073-35	16V 100uF	C410	168-1042-78	16V 0.1uF	C554	168-6822-55	6800pF K
C119	163-4763-35	16V 47uF	C411	168-1042-78	16V 0.1uF	C556	168-6822-55	6800pF K
C120	168-1042-78	16V 0.1uF	C412	168-1032-55	0.01uF K	C557	168-6822-55	6800pF K
C121	168-1042-78	16V 0.1uF	C413	166-1011-50	100pF CH	C558	168-6822-55	6800pF K
C123	163-1073-35	16V 100uF	C414	166-1011-50	100pF CH	C559	168-6822-55	6800pF K
C124	163-1063-35	16V 10uF	C415	163-4763-35	16V 47uF	C560	168-1522-55	1500pF K
C202	178-1052-78	1uF	C416	043-0548-50	10V 2.2uF	C561	168-6822-55	6800pF K
C203	178-3342-78	0.33uF	C417	043-0548-50	10V 2.2uF	C562	168-6822-55	6800pF K
C205	163-2273-25	10V 220uF	C418	166-2201-50	22pF CH	C563	168-6822-55	6800pF K
C206	168-1042-78	16V 0.1uF	C419	166-2201-50	22pF CH	C564	166-2201-50	22pF CH
C207	042-0579-51	16V 10uF	C420	166-2201-50	22pF CH	C565	178-1052-78	1uF
C208	042-0579-51	16V 10uF	C421	166-2201-50	22pF CH	C566	168-1042-78	16V 0.1uF
C209	168-1042-78	16V 0.1uF	C422	166-2201-50	22pF CH	C567	163-1063-35	16V 10uF
C210	163-3373-15	6.3V 330uF	C423	166-2201-50	22pF CH	C568	168-2232-55	0.022uF K
C301	166-1811-50	180pF CH	C424	166-1801-50	18pF CH	C569	163-3373-15	6.3V 330uF
C302	168-1042-78	16V 0.1uF	C425	043-0548-50	10V 2.2uF	C570	168-1022-55	1000pF K
C303	163-4753-65	50V 4.7uF	C426	043-0548-50	10V 2.2uF	C601	163-1063-35	16V 10uF
C306	168-1042-78	16V 0.1uF	C427	043-0548-50	10V 2.2uF	C602	163-1063-35	16V 10uF
C307	168-1042-78	16V 0.1uF	C428	043-0548-50	10V 2.2uF	C603	163-1063-35	16V 10uF
C308	166-8097-50	8pF C CH	C429	168-1032-55	0.01uF K	C604	163-1063-35	16V 10uF
C309	166-8097-50	8pF C CH	C501	168-1042-78	16V 0.1uF	C605	168-3332-78	0.033uF K
C310	168-1022-55	1000pF K	C502	168-1042-78	16V 0.1uF	C606	168-3332-78	0.033uF K
C311	168-1022-55	1000pF K	C503	168-1042-78	16V 0.1uF	C607	168-2232-55	0.022uF K
C312	168-1022-55	1000pF K	C504	168-1042-78	16V 0.1uF	C608	168-1042-78	16V 0.1uF
C313	168-1022-55	1000pF K	C505	166-5611-50	560pF CH	C609	168-4722-55	4700pF K
C316	168-1022-55	1000pF K	C506	166-5611-50	560pF CH	C610	168-4722-55	4700pF K
C317	168-1022-55	1000pF K	C507	166-5611-50	560pF CH	C611	168-1022-55	1000pF K
C318	168-1042-78	16V 0.1uF	C508	178-3342-78	0.33uF	C612	168-1022-55	1000pF K
C319	163-4753-65	50V 4.7uF	C509	166-5611-50	560pF CH	C613	168-1022-55	1000pF K
C320	168-1042-78	16V 0.1uF	C510	163-1073-15	6.3V 100uF	C617	168-1022-55	1000pF K
C321	163-4753-65	50V 4.7uF	C511	166-2201-50	22pF CH	C618	168-1022-55	1000pF K
C324	168-1022-55	1000pF K	C512	166-2201-50	22pF CH	CCT401	050-0145-52	1/16W 1k ohm x4
C325	168-2222-55	2200pF K	C513	168-1042-78	16V 0.1uF	CCT402	050-0145-52	1/16W 1k ohm x4
C326	163-2273-25	10V 220uF	C514	168-1022-55	1000pF K	CCT403	050-0145-52	1/16W 1k ohm x4
C327	168-4732-78	0.047uF K	C515	166-2201-50	22pF CH	D101	001-0580-90	1SS352
C328	163-2263-35	16V 22uF	C516	166-2201-50	22pF CH	D102	001-0580-90	1SS352
C329	168-1042-78	16V 0.1uF	C517	166-5611-50	560pF CH	D103	001-0529-47	MA8091-M
C330	163-3373-15	6.3V 330uF	C518	166-5611-50	560pF CH	D201	001-2412-90	RR264M-400
C331	168-1042-78	16V 0.1uF	C519	166-5611-50	560pF CH	D502	001-0529-48	MA8091-H
C332	168-1022-55	1000pF K	C520	166-5611-50	560pF CH	D503	001-0580-90	1SS352
C333	168-1042-78	16V 0.1uF	C521	163-4763-35	16V 47uF	D504	001-0580-90	1SS352
C334	163-1063-35	16V 10uF	C522	163-1073-35	16V 100uF	D505	001-0580-90	1SS352
C335	168-1022-55	1000pF K	C523	166-2201-50	22pF CH	D506	001-2640-90	D1FJ4
C336	178-1052-78	1uF	C524	168-2212-55	220pF K	D508	001-2015-00	RL253
C337	168-3332-78	0.033uF K	C525	163-1073-35	16V 100uF	D510	001-0529-48	MA8091-H
C338	168-1022-55	1000pF K	C526	042-0592-61	16V 47uF	D511	001-4301-68	HZU18B1
C340	168-1022-55	1000pF K	C527	042-0592-61	16V 47uF	D512	001-0580-90	1SS352
C343	168-4712-55	470pF K	C528	163-4763-35	16V 47uF	D513	001-4301-68	HZU18B1
C344	168-1022-55	1000pF K	C529	178-1242-78	0.12uF	D515	001-0529-34	MA8062-L
C345	163-2263-35	16V 22uF	C530	178-1242-78	0.12uF	D517	001-0580-90	1SS352
C346	163-1073-15	6.3V 100uF	C531	178-1242-78	0.12uF	D601	001-0580-90	1SS352
C348	168-3322-55	3300pF K	C532	178-1242-78	0.12uF	D602	001-0529-44	MA8082-M
C349	168-3322-55	3300pF K	C533	178-1052-78	1uF	D605	001-4305-39	UDZSTE-17 36B
C350	168-3322-55	3300pF K	C534	178-1242-78	0.12uF	D606	001-0580-90	1SS352
C351	168-3322-55	3300pF K	C535	178-1242-78	0.12uF	D607	001-0580-90	1SS352
C352	168-1042-78	16V 0.1uF	C536	178-1242-78	0.12uF	D609	001-4305-39	UDZSTE-17 36B
C353	042-0643-58	6.3V 330uF	C537	178-1242-78	0.12uF	D610	001-4305-39	UDZSTE-17 36B
C355	168-2222-55	2200pF K	C538	042-0579-51	16V 10uF	IC101	051-3341-90	BD3931FP
C356	168-2222-55	2200pF K	C539	166-2201-50	22pF CH	IC201	051-3516-90	S-1132B33-U5T1G
C357	168-2222-55	2200pF K	C540	166-2201-50	22pF CH	IC202	051-3340-00	LD1085P
C358	168-2222-55	2200pF K	C541	166-2201-50	22pF CH	IC301	-----	SAF7730HV/N317F
C359	163-1073-15	6.3V 100uF	C542	166-2201-50	22pF CH	IC401	051-9424-90	BR24L16FVM-WTR
C401	168-1042-78	16V 0.1uF	C543	168-1042-78	16V 0.1uF	IC402	-----	M30879FLAGP
C402	168-1042-78	16V 0.1uF	C544	178-1042-78	0.1uF	IC403	051-6607-08	PCA82C250T-T
C403	166-2201-50	22pF CH	C545	043-0566-90	50V 2.2uF K	IC404	051-5417-38	R3112N271A-TR-FA
C404	166-2201-50	22pF CH	C546	043-0604-90	25V 10uF B	IC405	051-3020-90	NJM4565V
C405	168-4722-55	4700pF K	C547	189-4783-31	16V 4700uF	IC406	051-6212-08	LC72191JM-TLM
C406	166-1201-50	12pF CH	C549	043-0499-51	0.1uF	IC501	051-3396-90	NJM2386ADL3-33-TE1
C407	166-1201-50	12pF CH	C550	178-4742-78	0.47uF	IC502	051-3019-90	NJM2060V

REF No.	PART No.	DESCRIPTION
IC503	051-3034-90	NJM4558V
IC504	051-2037-00	TDA7560
IC505	051-3517-90	LT3481EMSE#TRPBF
IC506	051-5441-08	BD4828G-TR
J201	074-1237-69	19PIN
J501	074-4009-20	20PIN MAIN
J601	074-1013-00	12P N-BUS
J602	074-1302-12	12P M-CAN
L101	010-2003-04	30uH
L102	010-4011-20	2.5mH
L301	010-3104-54	600 ohm/100MHz
L302	010-3104-54	600 ohm/100MHz
L303	010-3104-54	600 ohm/100MHz
L304	010-3104-54	600 ohm/100MHz
L305	010-3104-54	600 ohm/100MHz
L306	010-3104-54	600 ohm/100MHz
L307	010-3104-54	600 ohm/100MHz
L308	010-3104-54	600 ohm/100MHz
L309	010-3104-54	600 ohm/100MHz
L310	010-3104-54	600 ohm/100MHz
L311	010-3104-54	600 ohm/100MHz
L312	010-3104-54	600 ohm/100MHz
L313	010-3104-54	600 ohm/100MHz
L402	010-3406-66	22uH J
L403	010-3406-54	2.2uH J
L404	010-3601-50	600 ohm/100MHz
L501	010-3104-54	600 ohm/100MHz
L502	010-3104-54	600 ohm/100MHz
L503	010-3414-90	6.8uH
L505	010-8048-00	240uH
P401	076-0478-59	9P
P402	076-3011-74	24P
Q101	190-2060-00	2SA2060
Q102	125-2026-95	UNR521N
Q105	192-5886-00	2SC5886
Q201	192-4081-00	2SC4081
Q202	125-0021-91	DTA114EUA
Q203	125-2027-91	DTC114EUA
Q204	198-3018-00	2SK3018
Q205	198-3018-00	2SK3018
Q206	125-9017-92	UMD3N-TR
Q301	125-7007-90	Si5441BDC-TI-E3
Q302	125-2027-91	DTC114EUA
Q305	125-2027-91	DTC114EUA
Q308	125-2027-91	DTC114EUA
Q501	190-1586-00	2SA1586 O,Y,G
Q502	125-2027-91	DTC114EUA
Q503	193-1664-00	2SD1664
Q504	192-4116-51	2SC4116 G,L
Q505	191-1204-61	2SB1204 R,S,T
Q507	125-2027-91	DTC114EUA
Q508	191-1197-50	2SB1197K Q,R
Q509	125-2027-91	DTC114EUA
Q512	192-4081-00	2SC4081
Q513	192-4081-00	2SC4081
Q515	125-2027-91	DTC114EUA
Q516	192-4081-00	2SC4081
Q601	125-0006-90	UN2110
Q602	125-2027-91	DTC114EUA
Q603	192-4081-00	2SC4081
Q604	192-4081-00	2SC4081
Q605	192-4081-00	2SC4081
Q607	125-0021-91	DTA114EUA
Q610	125-2027-91	DTC114EUA
Q611	192-4081-00	2SC4081
Q612	192-4081-00	2SC4081
Q613	125-0021-91	DTA114EUA
Q614	125-0021-91	DTA114EUA
R102	116-1091-15	1/4W 1 ohm
R104	116-1221-15	1/4W 1.2k ohm
R105	119-1031-15	1/10W 10k ohm
R106	119-0000-05	1/10W 0 ohm JW
R107	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R110	119-1011-15	1/10W 100 ohm
R111	119-1011-15	1/10W 100 ohm
R112	119-1011-15	1/10W 100 ohm
R115	119-1011-15	1/10W 100 ohm
R116	119-1011-15	1/10W 100 ohm
R117	119-1011-15	1/10W 100 ohm
R118	116-1091-15	1/4W 1 ohm
R119	116-3911-15	1/4W 390 ohm
R206	119-1021-15	1/10W 1k ohm
R207	119-3331-15	1/10W 33k ohm
R208	119-4731-15	1/10W 47k ohm
R209	119-1041-15	1/10W 100k ohm
R210	119-4721-15	1/10W 4.7k ohm
R212	119-4721-15	1/10W 4.7k ohm
R213	119-4721-15	1/10W 4.7k ohm
R214	119-4721-15	1/10W 4.7k ohm
R216	032-0140-98	1/10W 330 ohm F
R217	032-0140-93	1/10W 2k ohm F
R301	119-1031-15	1/10W 10k ohm
R302	119-2201-15	1/10W 22 ohm
R303	119-1031-15	1/10W 10k ohm
R304	119-0000-05	1/10W 0 ohm JW
R305	119-0000-05	1/10W 0 ohm JW
R306	119-0000-05	1/10W 0 ohm JW
R307	119-0000-05	1/10W 0 ohm JW
R308	032-0140-80	1/10W 18k ohm F
R309	032-0140-80	1/10W 18k ohm F
R310	032-0140-80	1/10W 18k ohm F
R311	032-0140-80	1/10W 18k ohm F
R312	119-1011-15	1/10W 100 ohm
R313	119-1031-15	1/10W 10k ohm
R314	119-1021-15	1/10W 1k ohm
R315	119-1021-15	1/10W 1k ohm
R316	119-3921-15	1/10W 3.9k ohm
R317	119-1041-15	1/10W 100k ohm
R318	119-3921-15	1/10W 3.9k ohm
R319	119-1041-15	1/10W 100k ohm
R320	119-0000-05	1/10W 0 ohm JW
R321	119-1041-15	1/10W 100k ohm
R322	119-1041-15	1/10W 100k ohm
R323	119-1041-15	1/10W 100k ohm
R324	119-1041-15	1/10W 100k ohm
R325	119-3921-15	1/10W 3.9k ohm
R326	119-1001-15	1/10W 10 ohm
R327	119-3921-15	1/10W 3.9k ohm
R328	119-1021-15	1/10W 1k ohm
R329	119-0000-05	1/10W 0 ohm JW
R330	119-0000-05	1/10W 0 ohm JW
R331	032-0140-50	1/10W 10k ohm F
R332	032-0140-50	1/10W 10k ohm F
R333	032-0140-50	1/10W 10k ohm F
R334	032-0140-50	1/10W 10k ohm F
R335	032-0140-50	1/10W 10k ohm F
R336	032-0140-50	1/10W 10k ohm F
R337	119-1041-15	1/10W 100k ohm
R338	119-1041-15	1/10W 100k ohm
R339	119-1031-15	1/10W 10k ohm
R340	119-1031-15	1/10W 10k ohm
R341	119-1011-15	1/10W 100 ohm
R342	119-1011-15	1/10W 100 ohm
R343	119-0000-05	1/10W 0 ohm JW
R344	119-0000-05	1/10W 0 ohm JW
R345	119-0000-05	1/10W 0 ohm JW
R347	119-0000-05	1/10W 0 ohm JW
R348	119-4731-15	1/10W 47k ohm
R349	119-1031-15	1/10W 10k ohm
R350	119-0000-05	1/10W 0 ohm JW
R351	119-4731-15	1/10W 47k ohm
R352	119-1021-15	1/10W 1k ohm
R353	119-1021-15	1/10W 1k ohm
R354	119-1021-15	1/10W 1k ohm
R355	119-1021-15	1/10W 1k ohm
R356	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R357	119-4731-15	1/10W 47k ohm
R358	119-1001-15	1/10W 10 ohm
R359	119-4731-15	1/10W 47k ohm
R360	119-4731-15	1/10W 47k ohm
R361	119-4731-15	1/10W 47k ohm
R362	119-4731-15	1/10W 47k ohm
R401	119-1021-15	1/10W 1k ohm
R402	119-1021-15	1/10W 1k ohm
R403	119-1021-15	1/10W 1k ohm
R404	119-1021-15	1/10W 1k ohm
R405	119-0000-05	1/10W 0 ohm JW
R406	119-1021-15	1/10W 1k ohm
R407	119-1021-15	1/10W 1k ohm
R408	119-1021-15	1/10W 1k ohm
R409	119-4731-15	1/10W 47k ohm
R410	119-4731-15	1/10W 47k ohm
R411	119-4721-15	1/10W 4.7k ohm
R412	119-4731-15	1/10W 47k ohm
R413	119-4731-15	1/10W 47k ohm
R414	119-4711-15	1/10W 470 ohm
R415	119-4711-15	1/10W 470 ohm
R416	119-4721-15	1/10W 4.7k ohm
R417	119-4721-15	1/10W 4.7k ohm
R418	119-4721-15	1/10W 4.7k ohm
R419	119-4721-15	1/10W 4.7k ohm
R420	119-1041-15	1/10W 100k ohm
R421	119-1041-15	1/10W 100k ohm
R424	119-1011-15	1/10W 100 ohm
R425	119-1011-15	1/10W 100 ohm
R426	119-1011-15	1/10W 100 ohm
R427	119-1011-15	1/10W 100 ohm
R428	119-1031-15	1/10W 10k ohm
R429	119-1031-15	1/10W 10k ohm
R430	119-4721-15	1/10W 4.7k ohm
R431	119-1021-15	1/10W 1k ohm
R432	119-1021-15	1/10W 1k ohm
R433	119-4721-15	1/10W 4.7k ohm
R434	119-1021-15	1/10W 1k ohm
R435	116-6201-15	1/4W 62 ohm
R436	119-1031-15	1/10W 10k ohm
R437	116-6201-15	1/4W 62 ohm
R438	119-4731-15	1/10W 47k ohm
R440	119-1021-15	1/10W 1k ohm
R441	119-0000-05	1/10W 0 ohm JW
R443	119-1031-15	1/10W 10k ohm
R444	119-4731-15	1/10W 47k ohm
R445	119-1031-15	1/10W 10k ohm
R446	119-4731-15	1/10W 47k ohm
R447	119-1021-15	1/10W 1k ohm
R448	119-4731-15	1/10W 47k ohm
R449	119-4731-15	1/10W 47k ohm
R450	119-4731-15	1/10W 47k ohm
R451	119-4731-15	1/10W 47k ohm
R452	119-4731-15	1/10W 47k ohm
R453	119-1011-15	1/10W 100 ohm
R454	119-1011-15	1/10W 100 ohm
R455	119-1021-15	1/10W 1k ohm
R456	119-4721-15	1/10W 4.7k ohm
R457	119-4721-15	1/10W 4.7k ohm
R458	119-1041-15	1/10W 100k ohm
R459	119-1011-15	1/10W 100 ohm
R461	119-2231-15	1/10W 22k ohm
R462	119-1041-15	1/10W 100k ohm
R466	032-0140-15	1/10W 6.8k ohm F
R467	032-0140-15	1/10W 6.8k ohm F
R468	119-4731-15	1/10W 47k ohm
R469	032-0140-15	1/10W 6.8k ohm F
R470	032-0140-15	1/10W 6.8k ohm F
R471	032-0140-50	1/10W 10k ohm F
R472	032-0140-50	1/10W 10k ohm F
R473	032-0140-50	1/10W 10k ohm F
R474	032-0140-50	1/10W 10k ohm F
R475	119-1031-15	1/10W 10k ohm


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R476	119-1031-15	1/10W 10k ohm	R533	119-1031-15	1/10W 10k ohm	R604	032-0140-89	1/10W 47k ohm F
R495	119-4731-15	1/10W 47k ohm	R534	116-1221-15	1/4W 1.2k ohm	R605	032-0140-89	1/10W 47k ohm F
R496	119-4731-15	1/10W 47k ohm	R535	119-4721-15	1/10W 4.7k ohm	R606	119-1031-15	1/10W 10k ohm
R497	119-4731-15	1/10W 47k ohm	R536	119-4731-15	1/10W 47k ohm	R607	119-1021-15	1/10W 1k ohm
R498	119-4731-15	1/10W 47k ohm	R537	116-4721-15	1/4W 4.7k ohm	R608	119-6821-15	1/10W 6.8k ohm
R499	119-1011-15	1/10W 100 ohm	R538	119-2731-15	1/10W 27k ohm	R609	119-5621-15	1/10W 5.6k ohm
R501	119-1031-15	1/10W 10k ohm	R539	119-4721-15	1/10W 4.7k ohm	R610	119-5621-15	1/10W 5.6k ohm
R502	119-1031-15	1/10W 10k ohm	R540	119-1521-15	1/10W 1.5k ohm	R612	119-5631-15	1/10W 56k ohm
R503	119-1031-15	1/10W 10k ohm	R541	119-1031-15	1/10W 10k ohm	R613	119-5631-15	1/10W 56k ohm
R504	119-1031-15	1/10W 10k ohm	R542	032-0140-03	1/10W 220k ohm F	R615	119-4731-15	1/10W 47k ohm
R505	119-1031-15	1/10W 10k ohm	R543	032-0140-19	1/10W 75k ohm F	R616	119-1031-15	1/10W 10k ohm
R506	119-1031-15	1/10W 10k ohm	R548	119-2241-15	1/10W 220k ohm	R617	119-1031-15	1/10W 10k ohm
R507	119-1031-15	1/10W 10k ohm	R551	119-1031-15	1/10W 10k ohm	R623	119-5631-15	1/10W 56k ohm
R508	119-1031-15	1/10W 10k ohm	R552	032-0140-16	1/10W 180k ohm F	R624	119-1031-15	1/10W 10k ohm
R509	119-1031-15	1/10W 10k ohm	R553	032-0148-50	1/10W 100k ohm	R625	119-2231-15	1/10W 22k ohm
R510	119-1031-15	1/10W 10k ohm	R554	032-0140-51	1/10W 15k ohm F	R626	119-4731-15	1/10W 47k ohm
R511	119-1051-15	1/10W 1M ohm	R555	116-2721-15	1/4W 2.7k ohm	R628	119-5621-15	1/10W 5.6k ohm
R512	119-1051-15	1/10W 1M ohm	R556	116-1531-15	1/4W 15k ohm	R629	119-5621-15	1/10W 5.6k ohm
R513	119-1051-15	1/10W 1M ohm	R558	119-2221-15	1/10W 2.2k ohm	R630	119-1021-15	1/10W 1k ohm
R514	119-1051-15	1/10W 1M ohm	R559	116-1531-15	1/4W 15k ohm	R631	119-1021-15	1/10W 1k ohm
R515	119-1031-15	1/10W 10k ohm	R560	116-4791-15	1/4W 4.7 ohm	SUP101	060-0122-91	DSP141N-S00B
R516	119-1031-15	1/10W 10k ohm	R561	116-4791-15	1/4W 4.7 ohm	SUP102	060-0122-91	DSP141N-S00B
R517	119-1031-15	1/10W 10k ohm	R562	119-1031-15	1/10W 10k ohm	TC401	004-1580-01	TRIMMER 30P
R518	119-1031-15	1/10W 10k ohm	R564	119-5611-15	1/10W 560 ohm	TH101	002-0229-00	THERMISTOR
R519	119-1031-15	1/10W 10k ohm	R565	119-1031-15	1/10W 10k ohm	TM101	073-0762-90	TERMINAL
R520	119-1031-15	1/10W 10k ohm	R569	119-0000-05	1/10W 0 ohm JW	TM102	073-0762-90	TERMINAL
R521	119-4721-15	1/10W 4.7k ohm	R571	119-0000-05	1/10W 0 ohm JW	TM501	073-0762-90	TERMINAL
R522	119-4721-15	1/10W 4.7k ohm	R572	119-0000-05	1/10W 0 ohm JW	TM502	073-0762-90	TERMINAL
R523	119-1031-15	1/10W 10k ohm	R573	119-0000-05	1/10W 0 ohm JW	TM601	073-0762-90	TERMINAL
R524	119-1031-15	1/10W 10k ohm	R574	119-0000-05	1/10W 0 ohm JW	X301	061-3537-90	41.6MHz
R525	119-1031-15	1/10W 10k ohm	R575	119-0000-05	1/10W 0 ohm JW	X401	061-3541-90	CRYSTAL 10MHz
R526	116-3911-15	1/4W 390 ohm	R576	119-7531-15	1/10W 75k ohm	X402	061-1066-00	CRYSTAL 7.2MHz
R527	116-1221-15	1/4W 1.2k ohm	R577	119-4731-15	1/10W 47k ohm	PWB	039-3155-00	PWB(WITHOUT CO MPONENT)
R529	116-1221-15	1/4W 1.2k ohm	R601	119-3011-15	1/10W 300 ohm			
R530	116-1221-15	1/4W 1.2k ohm	R602	119-3011-15	1/10W 300 ohm			
R531	119-1031-15	1/10W 10k ohm	R603	119-3011-15	1/10W 300 ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D701	001-9210-50	AVR-M1608C270MT AAD	D737	001-7109-90	SML-311DTT86 ORG	R714	116-1521-15	1/4W 1.5k ohm
D702	001-9210-50	AVR-M1608C270MT AAD	D738	001-7109-90	SML-311DTT86 ORG	R715	116-1521-15	1/4W 1.5k ohm
D703	001-9210-50	AVR-M1608C270MT AAD	D739	001-7109-90	SML-311DTT86 ORG	R716	116-1521-15	1/4W 1.5k ohm
D704	001-9210-50	AVR-M1608C270MT AAD	D740	001-7109-90	SML-311DTT86 ORG	R717	116-1821-15	1/4W 1.8k ohm
D705	001-0516-90	MA111	D741	001-7109-90	SML-311DTT86 ORG	R718	116-1821-15	1/4W 1.8k ohm
D706	001-0516-90	MA111	D743	001-7109-90	SML-311DTT86 ORG	R719	116-1821-15	1/4W 1.8k ohm
D707	001-0516-90	MA111	D744	001-7109-90	SML-311DTT86 ORG	R720	116-1221-15	1/4W 1.2k ohm
D708	001-0516-90	MA111	D745	001-7109-90	SML-311DTT86 ORG	R721	116-1221-15	1/4W 1.2k ohm
D709	001-0516-90	MA111	D746	001-7109-90	SML-311DTT86 ORG	R722	116-1221-15	1/4W 1.2k ohm
D710	001-0516-90	MA111	D748	001-7109-90	SML-311DTT86 ORG	R723	116-1221-15	1/4W 1.2k ohm
D711	001-0516-90	MA111	D749	001-7109-90	SML-311DTT86 ORG	R724	116-1521-15	1/4W 1.5k ohm
D712	001-0516-90	MA111	D750	001-7109-90	SML-311DTT86 ORG	S701	013-6202-52	SKPMBJE010
D713	001-7109-90	SML-311DTT86 ORG	D751	001-7109-90	SML-311DTT86 ORG	S702	013-6202-52	SKPMBJE010
D714	001-7109-90	SML-311DTT86 ORG	D753	001-7109-90	SML-311DTT86 ORG	S703	013-6202-52	SKPMBJE010
D715	001-7109-90	SML-311DTT86 ORG	D754	001-7109-90	SML-311DTT86 ORG	S704	013-6202-52	SKPMBJE010
D716	001-7109-90	SML-311DTT86 ORG	D756	001-7109-90	SML-311DTT86 ORG	S705	013-6202-52	SKPMBJE010
D717	001-7109-90	SML-311DTT86 ORG	D757	001-7109-90	SML-311DTT86 ORG	S706	013-6202-52	SKPMBJE010
D720	001-7109-90	SML-311DTT86 ORG	D758	001-7109-90	SML-311DTT86 ORG	S707	013-6202-52	SKPMBJE010
D721	001-7109-90	SML-311DTT86 ORG	D759	001-7109-90	SML-311DTT86 ORG	S708	013-6202-52	SKPMBJE010
D722	001-7109-90	SML-311DTT86 ORG	D760	001-0516-90	MA111	S709	013-6202-52	SKPMBJE010
D723	001-7109-90	SML-311DTT86 ORG	D761	001-0516-90	MA111	S710	013-6202-52	SKPMBJE010
D724	001-7109-90	SML-311DTT86 ORG	D762	001-7109-90	SML-311DTT86 ORG	S711	013-6202-52	SKPMBJE010
D725	001-7109-90	SML-311DTT86 ORG	J701	075-0390-00	JACK	S712	013-6202-52	SKPMBJE010
D728	001-7109-90	SML-311DTT86 ORG	J702	074-3013-74	24P	S713	013-6202-52	SKPMBJE010
D729	001-7109-90	SML-311DTT86 ORG	R701	116-3321-15	1/4W 3.3k ohm	S714	013-6202-52	SKPMBJE010
D730	001-7109-90	SML-311DTT86 ORG	R705	116-1021-15	1/4W 1k ohm	S715	013-6202-52	SKPMBJE010
D731	001-7109-90	SML-311DTT86 ORG	R706	116-1821-15	1/4W 1.8k ohm	S716	013-6202-52	SKPMBJE010
D736	001-7109-90	SML-311DTT86 ORG	R707	116-2221-15	1/4W 2.2k ohm	VR701	016-0018-23	VR W/SHAFT
			R709	116-2721-15	1/4W 2.7k ohm	VR702	016-0024-07	VR W/SHAFT
			R710	116-2221-15	1/4W 2.2k ohm	PWB	039-3156-01	PWB(WITHOUT CO MPONENT)
			R711	116-4711-15	1/4W 470 ohm			
			R713	116-2221-15	1/4W 2.2k ohm			

EXPLODED VIEW/PARTS LIST

Main section

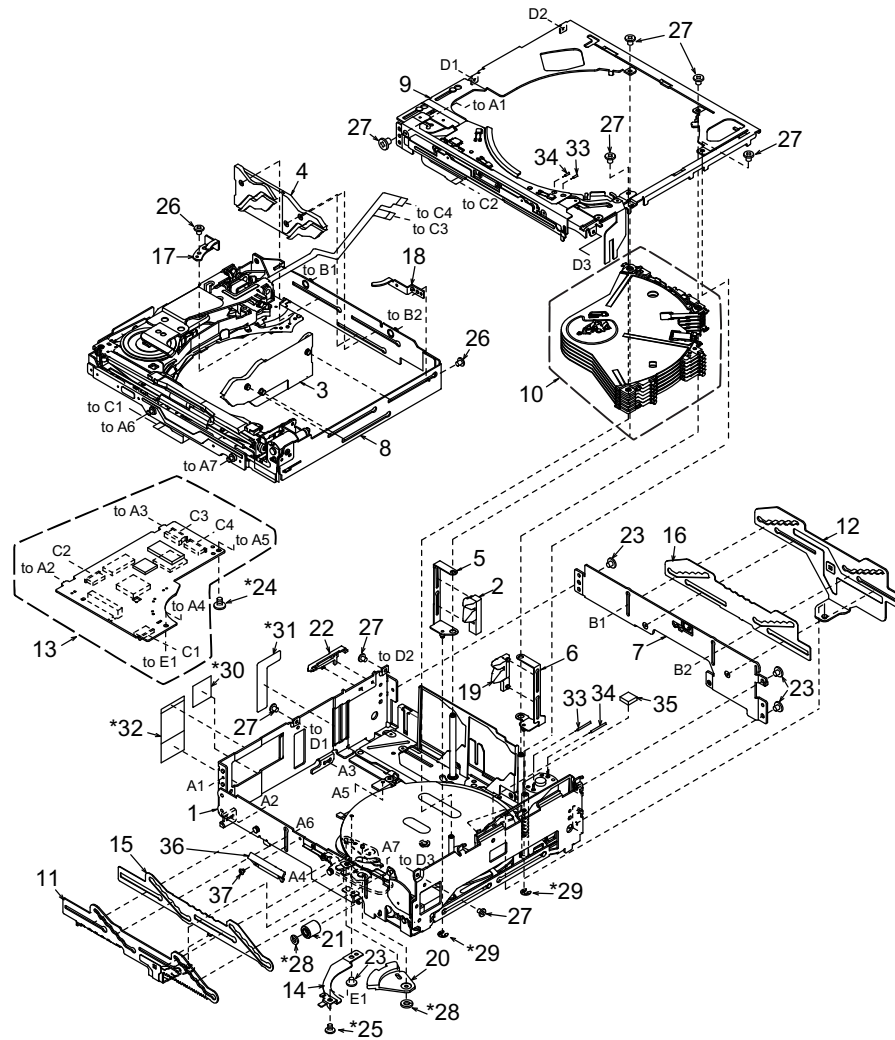


* Do not reuse the following parts.

(No.24,25,28,29,30,31,32,37)

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-610-100	LOWER UNIT ASSY	1
2	966-0667-21	DISC STP-ASSY L	1
3	HBS-584-100	DH-SEL-ASSY S	1
4	HBS-583-100	DH-SEL-ASSY R	1
5	966-0670-22	DS-SP-ASSY L	1
6	966-0671-23	DS-SP-ASSY R	1
7	966-0672-21	REAR-P-ASSY	1
8	966-1871-21	N-DRIVE-CH UNIT	1
9	966-1764-23	UPPRR UNIT ASSY	1
10	HBS-566-300	DISCHOLDER UNIT	1
11	966-1771-21	SLIDE-P-ASSY F	1
12	966-0709-21	SLIDE-P-ASSY R	1
13	HBS-605-200	CD-PWB-ASSY	1
14	620-1640-20	SW-H-PLATE	1
15	620-1778-21	GAP PLATE F	1
16	620-1662-21	GAP PLATE R	1
17	620-1685-21	DS-PLATE L	1
18	620-1686-20	DS-PLATE R	1
19	621-1634-23	DISC STOPPER R	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	621-1636-24	SW LINK	1
21	621-1765-20	UD-GEAR-D	1
22	621-1715-20	FPC-STOPPER	1
23	716-1850-01	SCREW (M2.0x2.0)	4
24	716-3629-00	SCREW (M2.0x2.5)	1
25	716-1851-02	SCREW (M2.0x3.0 Sealock)	1
26	716-3450-00	SCREW (M1.7x2.0)	2
27	716-3451-01	SCREW (M1.7x2.5)	8
28	746-0761-00	WASHER	2
29	744-0045-01	C-RING	2
30	347-7271-00	FPC SHEET	1
31	347-7275-00	PROTECT SHEET	1
32	347-7276-00	FPC-SHEET C	1
33	800-4921-60	VINYL-COAT WIRE	1
34	802-4921-60	VINYL-COAT WIRE	1
35	345-5824-00	RUBBER PART	1
36	621-1763-20	LOADING GUIDE B	1
37	716-1859-01	SCREW (M1.7x2.0 Sealock)	1


Lower unit assy section

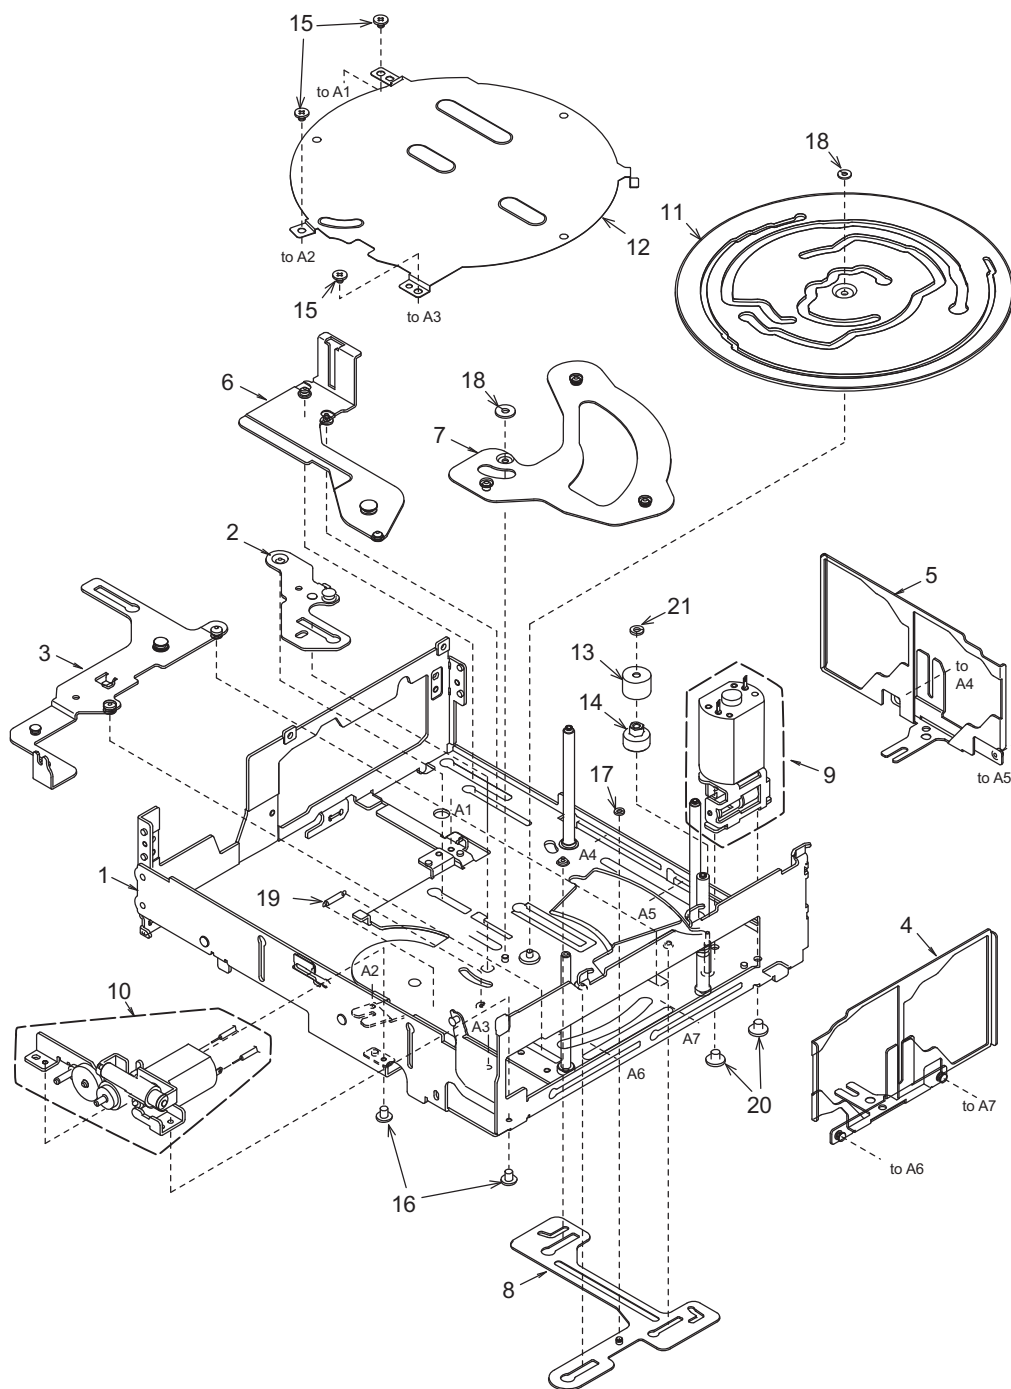

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1869-00	LOWER-C-ASSY	1
2	966-0658-22	DH-SP-ASSY A	1
3	966-1758-20	DS-SP-ASSY A	1
4	966-1808-20	DH-SP-ASSY S	1
5	966-1809-20	DH-SP-ASSY R	1
6	966-0677-24	D-SHT PL-B-ASSY	1
7	966-0659-22	DH-SP-ASSY B	1
8	966-0666-22	DS-SP-ASSY B	1
9	HBS-546-100	M-MTR SUB ASSY	1
10	HBS-568-200	UD-MOTOR-ASSY	1
11	620-1623-24	CAM GEAR	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	620-1624-24	GEAR COVER	1
13	621-0732-21	M-GEAR B	1
14	621-0733-20	M-GEAR C	1
15	716-1850-01	SCREW(M2.0x2.0)	3
16	716-3451-01	SCREW(M1.7x2.5)	2
17	746-0761-00	WASHER	1
18	746-0768-00	WASHER	2
19	750-6756-21	SW-L-SPRING	1
20	716-1851-03	SCREW(M2.0x3.0)	2
21	746-0941-00	WASHER	1


N-Drive-CH unit section

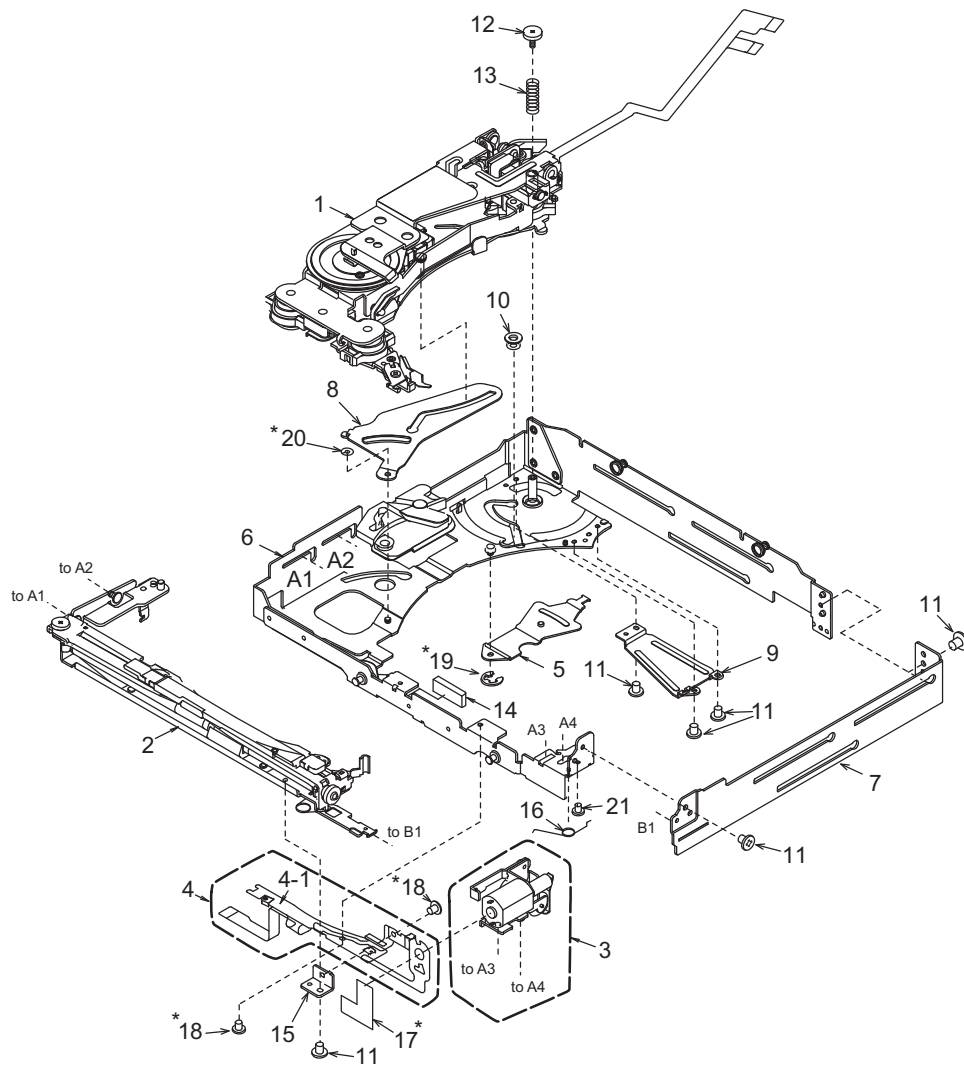

* Do not reuse the following parts.
(No. 17, 18, 19, 20)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-604-100	N-DRIVE UNIT	1	11	716-3450-00	SCREW(M1.7x2.0)	6
2	HBS-567-200	LOADING-U-ASSY	1	12	716-3459-01	SCREW(M1.7x2.0)	1
3	HBS-556-100	LO-MOTOR-S-ASSY	1	13	750-6761-20	DRIVE SPRING A	1
4	HBS-552-200	L-SENSOR-S-ASSY	1	14	345-5868-01	RUBBER PART	1
4-1	-----	SENSOR-L-FPC	1	15	620-1651-21	S-PWB-PLATE	1
5	966-0676-21	D-SHT LK-A-ASSY	1	16	750-6754-20	LO-ES-SPRING B	1
6	966-1755-23	DRIVE-CH A ASSY	1	17	345-5424-01	SEN-FPC GUIDE	1
7	620-1681-21	DRIVE CHASSIS B	1	18	716-1859-01	SCREW(M1.7x2.0 Sealock)	2
8	620-1672-21	DR-SUPPORT-PL	1	19	744-0039-00	E-RING	1
9	620-1680-20	D-SHIFT COVER	1	20	746-0870-00	WASHER	1
10	622-1743-21	D-SHIFT ROLLER B	1	21	716-3538-00	SCREW(M1.7x2.0)	1

Upper unit assy section

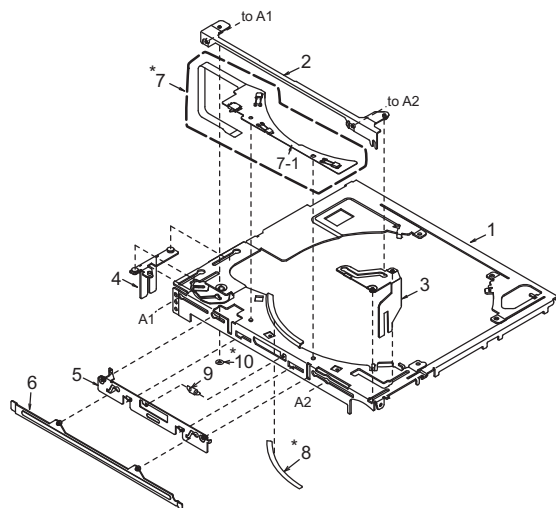



* Do not reuse the following parts.
(No.7,8,10)

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1761-22	UPPER-CHA-ASSY	1
2	966-1765-20	LO-SHIFT A ASSY	1
3	966-0700-22	LO-SHIFT B ASSY	1
4	966-0701-21	LO-SHIFT ASSY	1
5	966-1766-20	SHUTTER-PL-ASSY	1
6	966-1763-20	SHUTTER ASSY	1
7	HBS-553-200	U-SENSOR-S-ASSY	1
7-1	-----	SENSOR-U-FPC	1
8	347-7272-00	RATTLE SHEET	1
9	750-6755-21	SHUTTER SPRING	1
10	746-0870-00	WASHER	1

[Grease Point]

* Grease : SANKOL FG-87HSR

	Put grease on the surface	
	Put grease on the reverse side	
	Put grease on the both sides	
	Put grease on the edge	

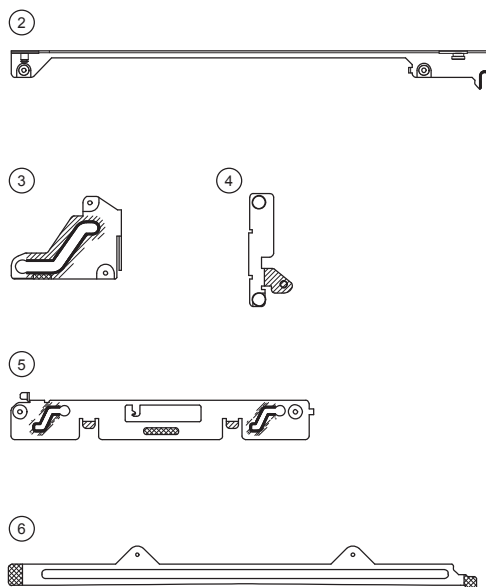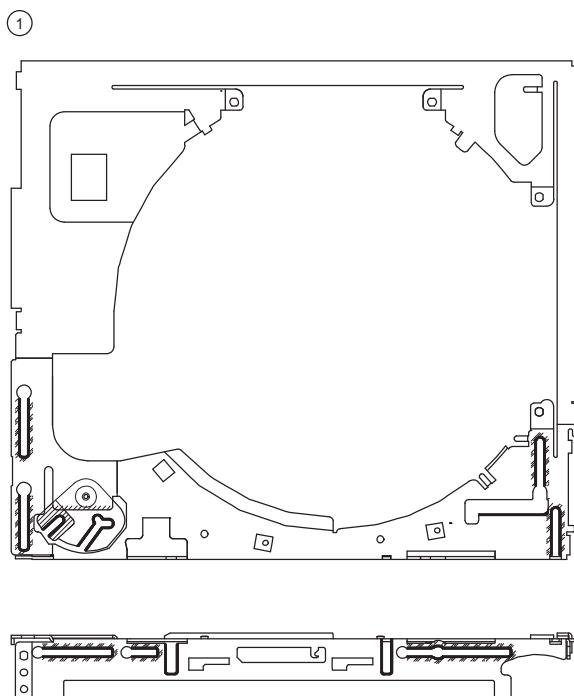

ELECTRICAL PARTS LIST

CD PWB(BM1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1052-78	1uF	C75	168-1042-78	16V 0.1uF	R17	119-1041-15	1/10W 100k ohm
C3	168-1042-78	16V 0.1uF	C76	168-5622-55	5600pF K	R18	119-1041-15	1/10W 100k ohm
C4	043-0559-90	6.3V 22uF	C77	168-1032-55	0.01uF K	R19	119-1041-15	1/10W 100k ohm
C5	168-1032-55	0.01uF K	C79	166-1501-50	15pF CH	R20	119-1041-15	1/10W 100k ohm
C6	042-1702-90	6.3V 100uF	C80	166-1501-50	15pF CH	R21	119-2221-15	1/10W 2.2k ohm
C7	168-1052-78	1uF	C101	043-0563-90	16V 47uF	R22	119-4711-15	1/10W 470 ohm
C9	168-1052-78	1uF	CCT1	050-0145-59	1/16W 22 ohm x4	R23	119-1051-15	1/10W 1M ohm
C11	168-1052-78	1uF	CCT2	050-0145-54	1/16W 47k ohm x4	R24	119-2211-15	1/10W 220 ohm
C12	042-0671-01	10V 47uF TA	CCT3	050-0145-54	1/16W 47k ohm x4	R25	119-2211-15	1/10W 220 ohm
C13	168-1052-78	1uF	CCT4	050-0145-55	1/16W 10k ohm x4	R26	119-1041-15	1/10W 100k ohm
C14	168-1042-78	16V 0.1uF	CCT5	050-0140-55	1/32W 2.2k ohmx4J	R27	119-1051-15	1/10W 1M ohm
C15	168-1052-78	1uF	D1	001-4301-14	HZU 3.0B1	R28	119-1041-15	1/10W 100k ohm
C16	043-0559-90	6.3V 22uF	D2	001-0367-91	1SS226	R29	119-1041-15	1/10W 100k ohm
C17	168-1032-55	0.01uF K	D3	001-4301-13	HZU 2.7B2	R30	119-4701-15	1/10W 47 ohm
C18	168-1052-78	1uF	D4	001-4301-18	HZU 3.6B1	R31	119-2201-15	1/10W 22 ohm
C19	043-0559-90	6.3V 22uF	D5	001-2612-90	RB520S-30	R32	119-1051-15	1/10W 1M ohm
C20	168-1042-78	16V 0.1uF	D6	001-2612-90	RB520S-30	R33	119-2211-15	1/10W 220 ohm
C21	168-1032-55	0.01uF K	D7	001-9210-50	AVR-	R35	119-1051-15	1/10W 1M ohm
C23	043-0559-90	6.3V 22uF	D8	001-9210-50	M1608C270MTAAD	R36	119-4721-15	1/10W 4.7k ohm
C24	043-0559-90	6.3V 22uF			AVR-	R37	119-4731-15	1/10W 47k ohm
C25	168-4732-78	0.047uF K	IC2	052-5071-31	M1608C270MTAAD	R38	119-2231-15	1/10W 22k ohm
C26	166-4711-50	470pF CH			TMP91CY22IFG-6VU6	R39	119-1041-15	1/10W 100k ohm
C28	168-4732-78	0.047uF K	IC3	051-6733-00	TC94A73MFG-201	R40	119-4721-15	1/10W 4.7k ohm
C29	166-4711-50	470pF CH	IC4	051-6060-08	BD7961FM-E2	R41	119-4731-15	1/10W 47k ohm
C30	166-1007-50	10pF CH	IC5	051-5445-08	BD5227G-TR	R43	119-4731-15	1/10W 47k ohm
C31	166-1007-50	10pF CH	IC8	051-9402-78	BR93L56RFVM-W	R44	119-2201-15	1/10W 22 ohm
C32	168-1042-78	16V 0.1uF	IC9	051-6072-08	BD7931FE2	R45	119-1511-15	1/10W 150 ohm
C33	168-2222-55	2200pF K	IC10	051-5833-00	GP1S093HCZ	R46	119-4721-15	1/10W 4.7k ohm
C34	168-1042-78	16V 0.1uF	IC11	051-3392-90	S-1323B15NB-N8ATFG	R48	119-1041-15	1/10W 100k ohm
C35	168-1042-78	16V 0.1uF	J1	074-1237-69	19PIN	R49	119-0000-05	1/10W 0 ohm JW
C36	168-1042-78	16V 0.1uF	J2	074-1201-65	15P	R50	119-2211-15	1/10W 220 ohm
C37	168-6822-55	6800pF K	J3	074-1138-56	6P	R51	119-0000-05	1/10W 0 ohm JW
C39	168-1042-78	16V 0.1uF	J4	074-1100-61	SOCKET 11P	R52	119-1041-15	1/10W 100k ohm
C40	168-3332-78	0.033uF K	J5	074-1201-61	11P SOCKET	R53	119-5621-15	1/10W 5.6k ohm
C41	168-1042-78	16V 0.1uF	Q1	060-0252-01	PT4850F	R55	119-3341-15	1/10W 330k ohm
C42	168-1042-78	16V 0.1uF	Q2	125-0021-91	DTA114EUA	R56	119-4731-15	1/10W 47k ohm
C43	168-1042-78	16V 0.1uF	Q3	198-3018-00	2SK3018	R57	119-2231-15	1/10W 22k ohm
C44	168-1042-78	16V 0.1uF	Q4	190-2060-00	2SA2060	R58	119-0000-05	1/10W 0 ohm JW
C45	168-1042-78	16V 0.1uF	Q8	190-2060-00	2SA2060	R59	119-1511-15	1/10W 150 ohm
C46	168-1042-78	16V 0.1uF	Q9	125-9026-90	IMF29	R60	119-4731-15	1/10W 47k ohm
C48	168-1042-78	16V 0.1uF	Q10	125-2027-91	DTC114EUA	R61	119-1041-15	1/10W 100k ohm
C49	168-1042-78	16V 0.1uF	Q11	125-0021-91	DTA114EUA	R62	119-1041-15	1/10W 100k ohm
C50	168-1042-78	16V 0.1uF	Q12	125-2027-91	DTC114EUA	R63	119-1041-15	1/10W 100k ohm
C51	168-1042-78	16V 0.1uF	Q13	125-9026-90	IMF29	R64	119-1011-15	1/10W 100 ohm
C52	168-5622-55	5600pF K	R1	119-6811-15	1/10W 680 ohm	R65	119-1041-15	1/10W 100k ohm
C53	168-1042-78	16V 0.1uF	R2	119-6811-15	1/10W 680 ohm	R66	117-5611-15	1/8W 560 ohm
C54	166-6801-50	68pF CH	R3	032-0163-91	1/2W 10 ohm	R67	117-7511-15	1/8W 750 ohm
C55	168-1532-55	0.015uF K	R4	032-0163-91	1/2W 10 ohm	R68	117-7511-15	1/8W 750 ohm
C56	168-1042-78	16V 0.1uF	R5	119-2231-15	1/10W 22k ohm	R69	119-1041-15	1/10W 100k ohm
C57	168-1032-55	0.01uF K	R6	116-1001-15	1/4W 10 ohm	R81	116-1591-15	1/4W 1.5 ohm
C58	168-1042-78	16V 0.1uF	R7	119-1021-15	1/10W 1k ohm	R201	119-0000-05	1/10W 0 ohm JW
C59	168-1042-78	16V 0.1uF	R8	116-1591-15	1/4W 1.5 ohm	R212	119-1041-15	1/10W 100k ohm
C60	168-1522-55	1500pF K	R9	119-2231-15	1/10W 22k ohm	S1	013-7416-50	SW SPVL110200
C61	168-3322-55	3300pF K	R10	119-4711-15	1/10W 470 ohm	S2	013-7416-50	SW SPVL110200
C62	168-1032-55	0.01uF K	R11	119-2211-15	1/10W 220 ohm	S3	013-7416-50	SW SPVL110200
C64	168-1042-78	16V 0.1uF	R12	119-6811-15	1/10W 680 ohm	S4	013-7415-50	SPVG110400
C65	168-1032-55	0.01uF K	R13	119-1011-15	1/10W 100 ohm	X1	061-3534-90	16.92MHz
C67	168-1032-55	0.01uF K	R14	119-2231-15	1/10W 22k ohm	X3	060-1545-90	20MHz
C69	168-1532-55	0.015uF K	R15	119-8231-15	1/10W 82k ohm	PWB	039-3083-21	PWB(WITHOUT COMPONENT)
C70	166-4701-50	47pF CH	R16	119-1041-15	1/10W 100k ohm			
C71	168-1042-78	16V 0.1uF						
C72	168-1042-78	16V 0.1uF						
C74	166-6097-50	6pF CH						

Sensor-L-PFC(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT1	060-0252-01	PT14850F	PT3	051-5833-00	GP1S093HCZ	PWB	039-2467-21	PWB(WITHOUT COMPONENTS)
PT2	060-0252-01	PT14850F						

Sensor-U-PFC(BM3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED1	001-7077-00	GL4804	LED3	001-7077-00	GL4804	PWB	039-2466-20	PWB(WITHOUT COMPONENTS)
LED2	001-7077-00	GL4804	S5	013-7417-50	ABC1122P161			