2.1 PACKING

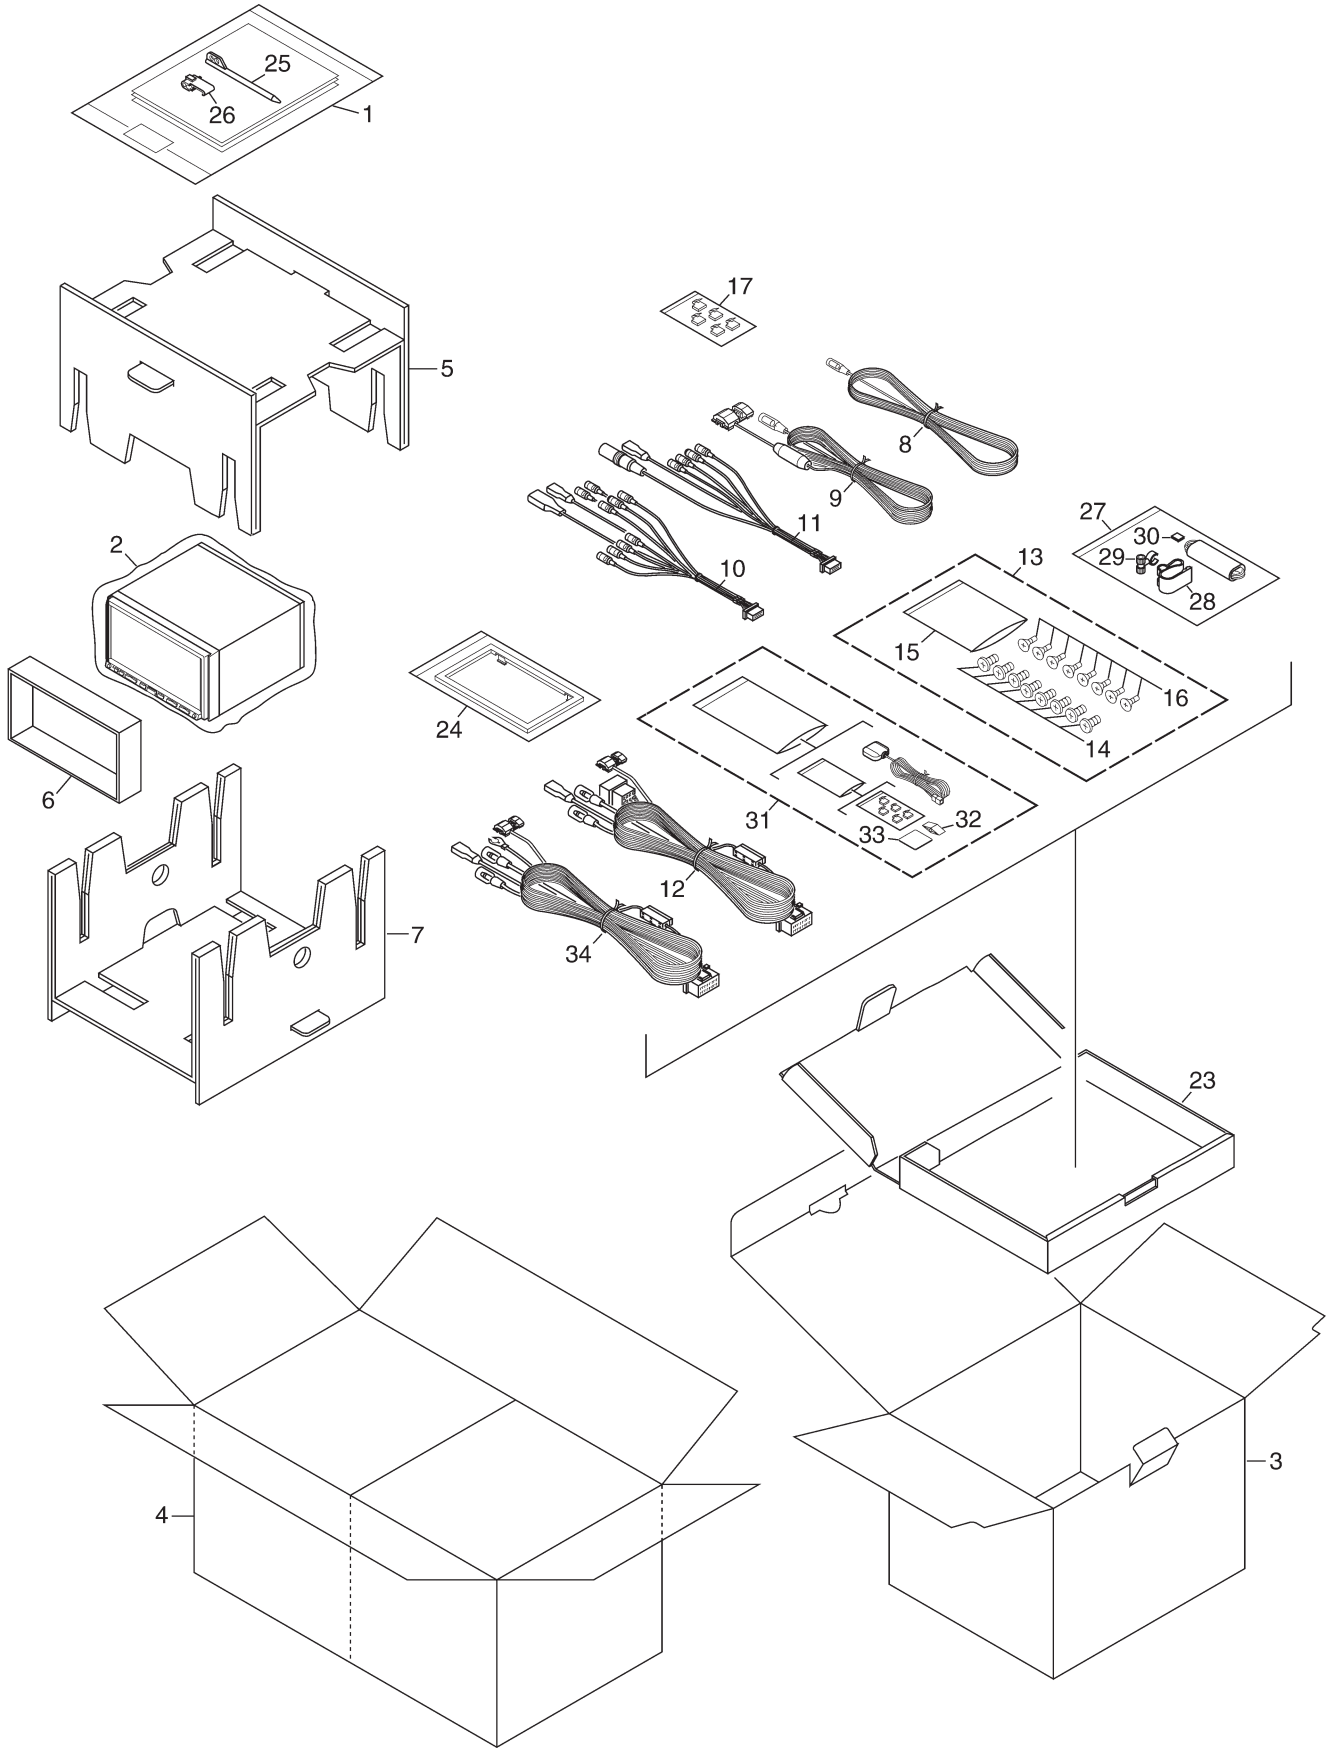

PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1-1	Owner's Manual(UC)	CRB2183
		Owner's Manual/PEE/ENG(EW)	CRB2187
	1-2	Owner's Manual(UC)	CRB2184
		Owner's Manual/PEE/ENG(EW)	CRB2188
	1-3	Owner's Manual/POC/FRE(UC)	CRB2185
		Owner's Manual/PEE/SPE(EW)	CRB2189
	1-4	Owner's Manual/POC/FRE(UC)	CRB2186
		Owner's Manual/PEE/SPE(EW)	CRB2190
	1-5	Owner's Manual/PEE/GER(EW)	CRB2191
		Owner's Manual(UC)	CRB2258
	1-6	Owner's Manual/PEE/GER(EW)	CRB2192
		Owner's Manual/POC/FRE(UC)	CRB2259
	1-7	Owner's Manual/PEE/FRE(EW)	CRB2193
	1-8	Owner's Manual/PEE/FRE(EW)	CRB2194
	1-9	Owner's Manual/PEE/ITA(EW)	CRB2195
	1-10	Owner's Manual/PEE/ITA(EW)	CRB2196
	1-11	Owner's Manual/PEE/DUT(EW)	CRB2197
	1-12	Owner's Manual/PEE/DUT(EW)	CRB2198
	1-13	Installation Manual(UC)	CRD4100
		Installation Manual(EW)	CRD4101
*	1-14	Registration Card(UC)	CRY1245
	1-15	Caution Card(UC)	CRP1310
*	1-16	Passport(EW)	CRY1013
*	1-17	Warranty Card(EW)	CRY1157
	1-18	Owner's Manual/PEE/ENG(EW)	CRB2260
	1-19	Owner's Manual/PEE/SPE(EW)	CRB2261
	1-20	Owner's Manual/PEE/GER(EW)	CRB2262
	1-21	Owner's Manual/PEE/FRE(EW)	CRB2263
	1-22	Owner's Manual/PEE/ITA(EW)	CRB2264
	1-23	Owner's Manual/PEE/DUT(EW)	CRB2265
	1-24	Polyethylene Bag	CEG1116
	2	Cover(UC)	CEG1177
		Cover(EW)	CEG1074

Mark	No.	Description	Part No.
	3	Carton(UC)	CHG5732
		Carton(EW)	CHG5899
	4	Contain Box(UC)	CHL5732
		Contain Box(EW)	CHL5899
	5	Protector(Upper)	CHP2227
	6	Protector	CHP2242
	7	Protector	CHP2272
	8	Cord	CDE5044
	9	Cord	CDE6825
	10	Cord Assy	CDE8083
	11	Cord Assy	CDE8084
	12	Cord Assy(EW)	CDE8165
	13	Screw Assy	CEA3797
	14	Screw	BMZ50P060FTC
*	15	Polyethylene Bag	CEG-127
	16	Screw	CMZ50P060FTC
	17	Cord Clamper Assy	CEA4636
	18-22	•••••	
	23	Sub Carton	CHA3298
	24	Panel	CNS8669
	25	Pen	CNV8969
	26	Connector	CKX1049
	27	Microphone Assy	CPM1064
	28	Clip Holder	CZN5471
	29	Microphone Holder	CZN5472
	30	Cushion	CZN5473
	31	GPS Antenna Assy	CXC4864
	32	Water Proof Pad	CZN5442
	33	Sheet	CZN7008
	34	Cord Assy(UC)	CDE8082

Owner's Manual,Installation Manual

Part No.	Language
CRB2183,CRB2184,CRB2187,CRB2188,CRB2258,CRB2260	English
CRB2185,CRB2186,CRB2193,CRB2194,CRB2259,CRB2263	French
CRB2189,CRB2190,CRB2261	Spanish
CRB2191,CRB2192,CRB2262	German
CRB2195,CRB2196,CRB2264	Italian
CRB2197,CRB2198,CRB2265	Dutch
CRD4100	English,French
CRD4101	English,Spanish,German,French,Italian,Dutch

2.2 EXTERIOR(1)

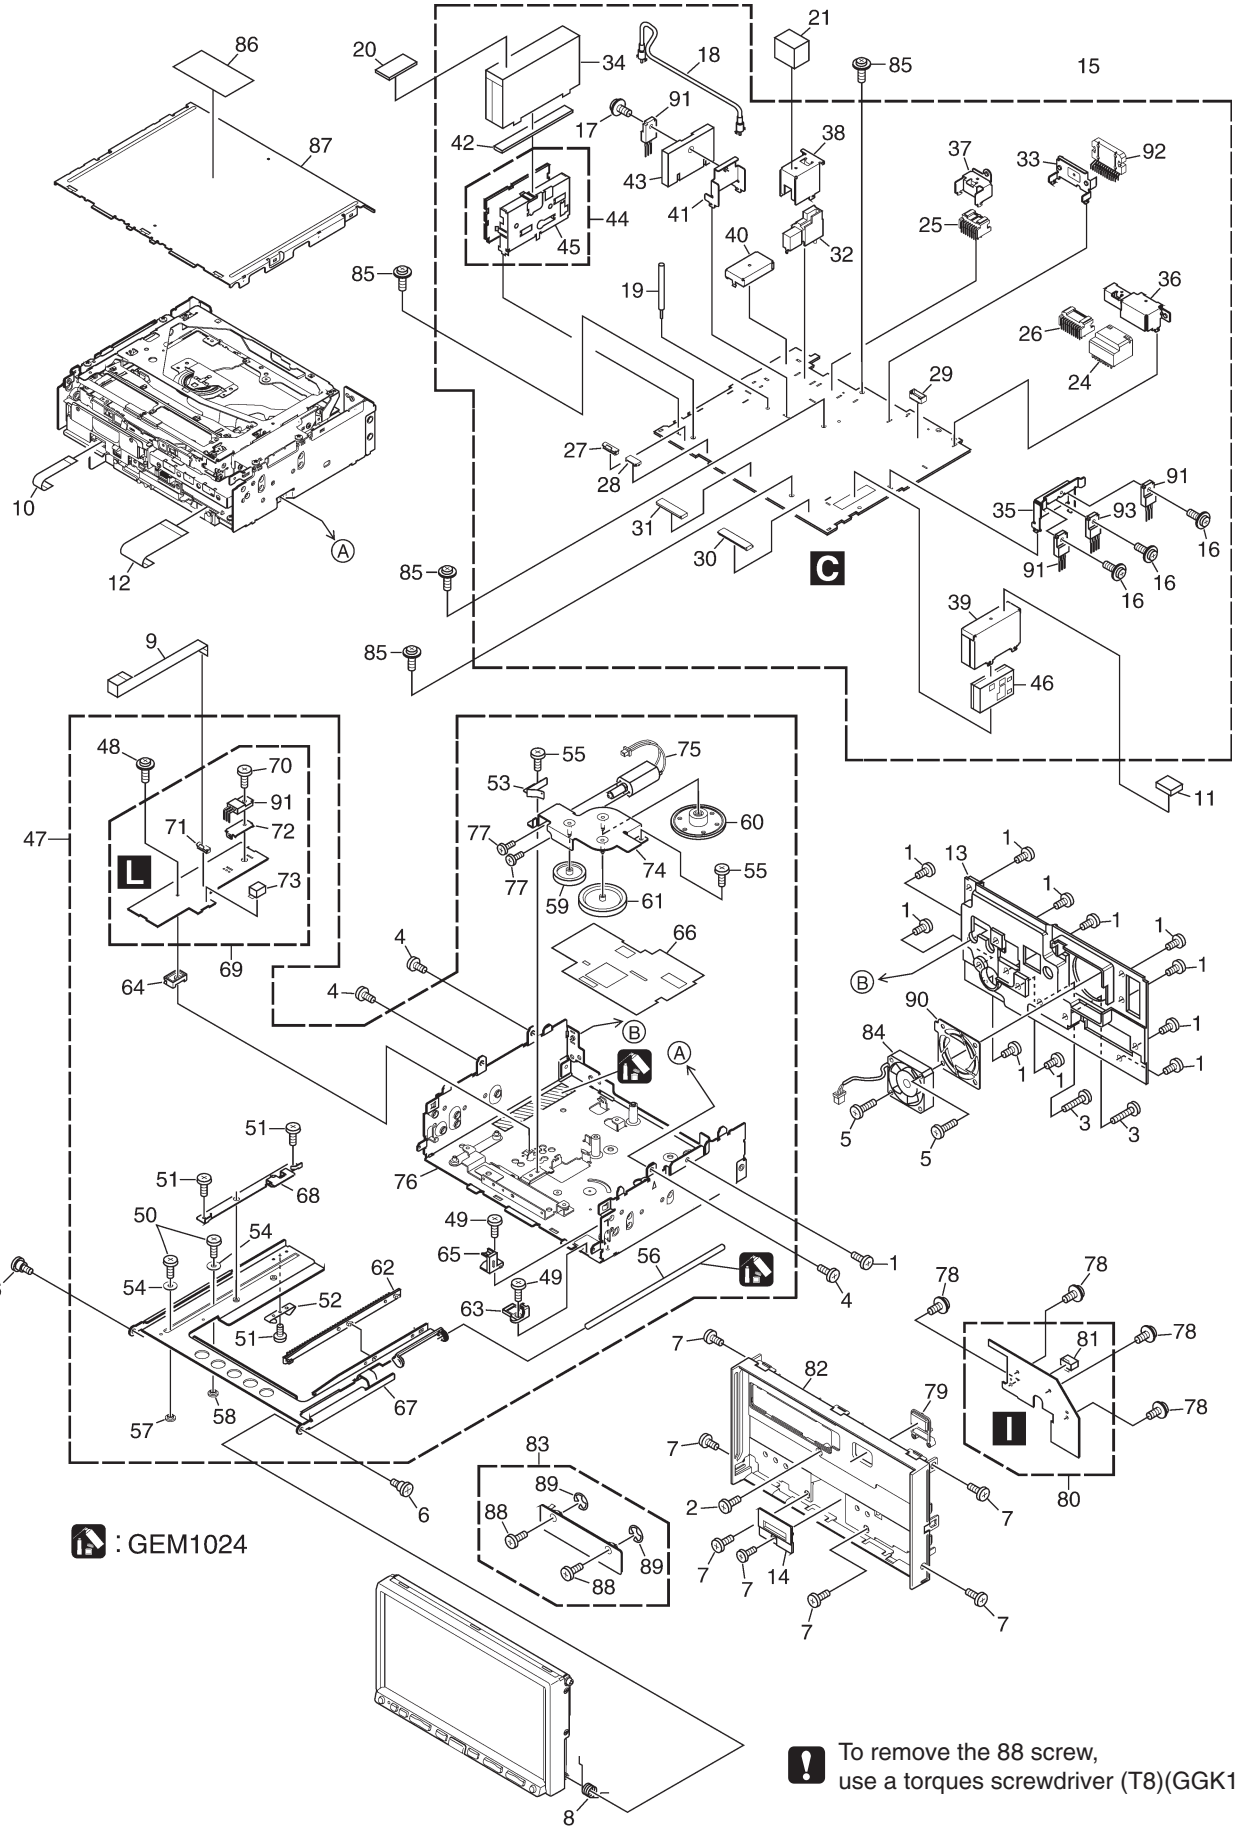

To remove the 88 screw,
use a torques screwdriver (T8)(GGK1068).

EXTERIOR(1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ26P060FTC
	2	Screw	BMZ26P120FTB
	3	Screw	BMZ26P160FTB
	4	Screw	BSZ26P050FTB
	5	Screw(M3 x 10)	CBA1637
	6	Screw	CBA1735
	7	Screw(M2 x 3)	CBA1877
	8	Spring	CBH2932
	9	FFC	CDE7998
	10	FFC	CDE8204
	11	Gasket(EW)	CNN1296
	12	Flexible PCB	CNP8272
	13	Heat Sink	CNR1849
	14	Cover	CNS8525
	15	Audio Unit(UC)	CWN1583
		Audio Unit(EW)	CWN1633
	16	Screw	BMZ26P050FTB
	17	Screw	BMZ26P120FTC
	18	Cord(EW)	CDH1354
	19	Clamper(EW)	CEF1048
	20	Gasket(EW)	CNN1379
	21	Gasket	CNN1375
	22	•••••	
	23	•••••	
	24	Plug(CN1001)	CKM1278
	25	Connector(CN1202)	CKM1502
	26	Connector(CN1201)	CKM1506
	27	Connector(CN1832)	CKS5572
	28	Connector(CN1003)	CKS5644
	29	Connector(CN1002)	CKS4674
	30	Connector(CN1831)	CKS5110
	31	Connector(CN1203)	CKS5486
	32	Antenna Jack(CN2501)	CKX1060
	33	Holder	CNC9921
	34	Shield	CND3004
	35	Holder	CND3023
	36	Holder	CND3142
	37	Holder	CND3180
	38	Holder	CND3181
	39	Shield(EW)	CND3188
	40	Shield(EW)	CND3189
	41	Holder	CND3411
	42	Sheet	CNM9805
	43	Heat Sink	CNR1873
	44	FM/AM Tuner Unit(UC)	CWE1952
		FM/AM Tuner Unit(EW)	CWE1951
	45	Holder	CND1054
	46	Tuner Unit(Y2600)(EW)	CWE2023
	47	Drive Mechanism Unit	CXC6806
	48	Screw(M2 x 6)	CBA1399
	49	Screw(M2 x 1.5)	CBA1615
	50	Screw(M2 x 2.5)	CBA1881
	51	Screw(M2 x 2)	CBA1771
	52	Spring	CZB3092
	53	Spring	CZB3093
	54	Washer	CZB5004
	55	Screw	CZB5005
	56	Shaft	CZL3010
	57	Roller	CZL3011
	58	Roller	CZL3012
	59	Gear	CZN7011
	60	Gear	CZN7012
	61	Gear	CZN7013
	62	Rack	CZN7014
	63	Holder	CZN7015
	64	Holder	CZN7042
	65	Holder	CZN7043
	66	Sheet	CZN7044
	67	Frame	CZN7063
	68	Plate	CZN7064
	69	Main PCB Unit	CZW5026
	70	Screw	BMZ26P050FTC
	71	Connector(CN2)	CZK3075
	72	Heat Sink	CND1228
	73	Connector(CN1)	CZK3071
	74	Bracket Unit	CZX5101
	75	Motor Unit(M1000)	CZX5102
	76	Chassis Unit	CZX5169
	77	Screw	JFZ20P020FTC
	78	Screw	BPZ20P060FTC
	79	Button(DISC)	CAC9626
	80	Panel Unit	CWN1586
	81	Connector(CN6901)	CKS4487
	82	Panel Unit(UC)	CXC5925
		Panel Unit(EW)	CXC5984
	83	Cover Unit	CXC5989
	84	Fan Motor	CXM1320
	85	Screw	ASZ26P050FTC
	86	Label(EW)	VRW1860
	87	Csse	CNB3219
	88	Screw	CBA1981
	89	Washer	YE20FTC
	90	Holder	CND3484
	91	Transistor(Q1207,1840,1850)	2SB1185
	92	IC(IC1401)	PAL007B
	93	IC(IC1403)	BA00CCOWT

2.3 EXTERIOR(2)

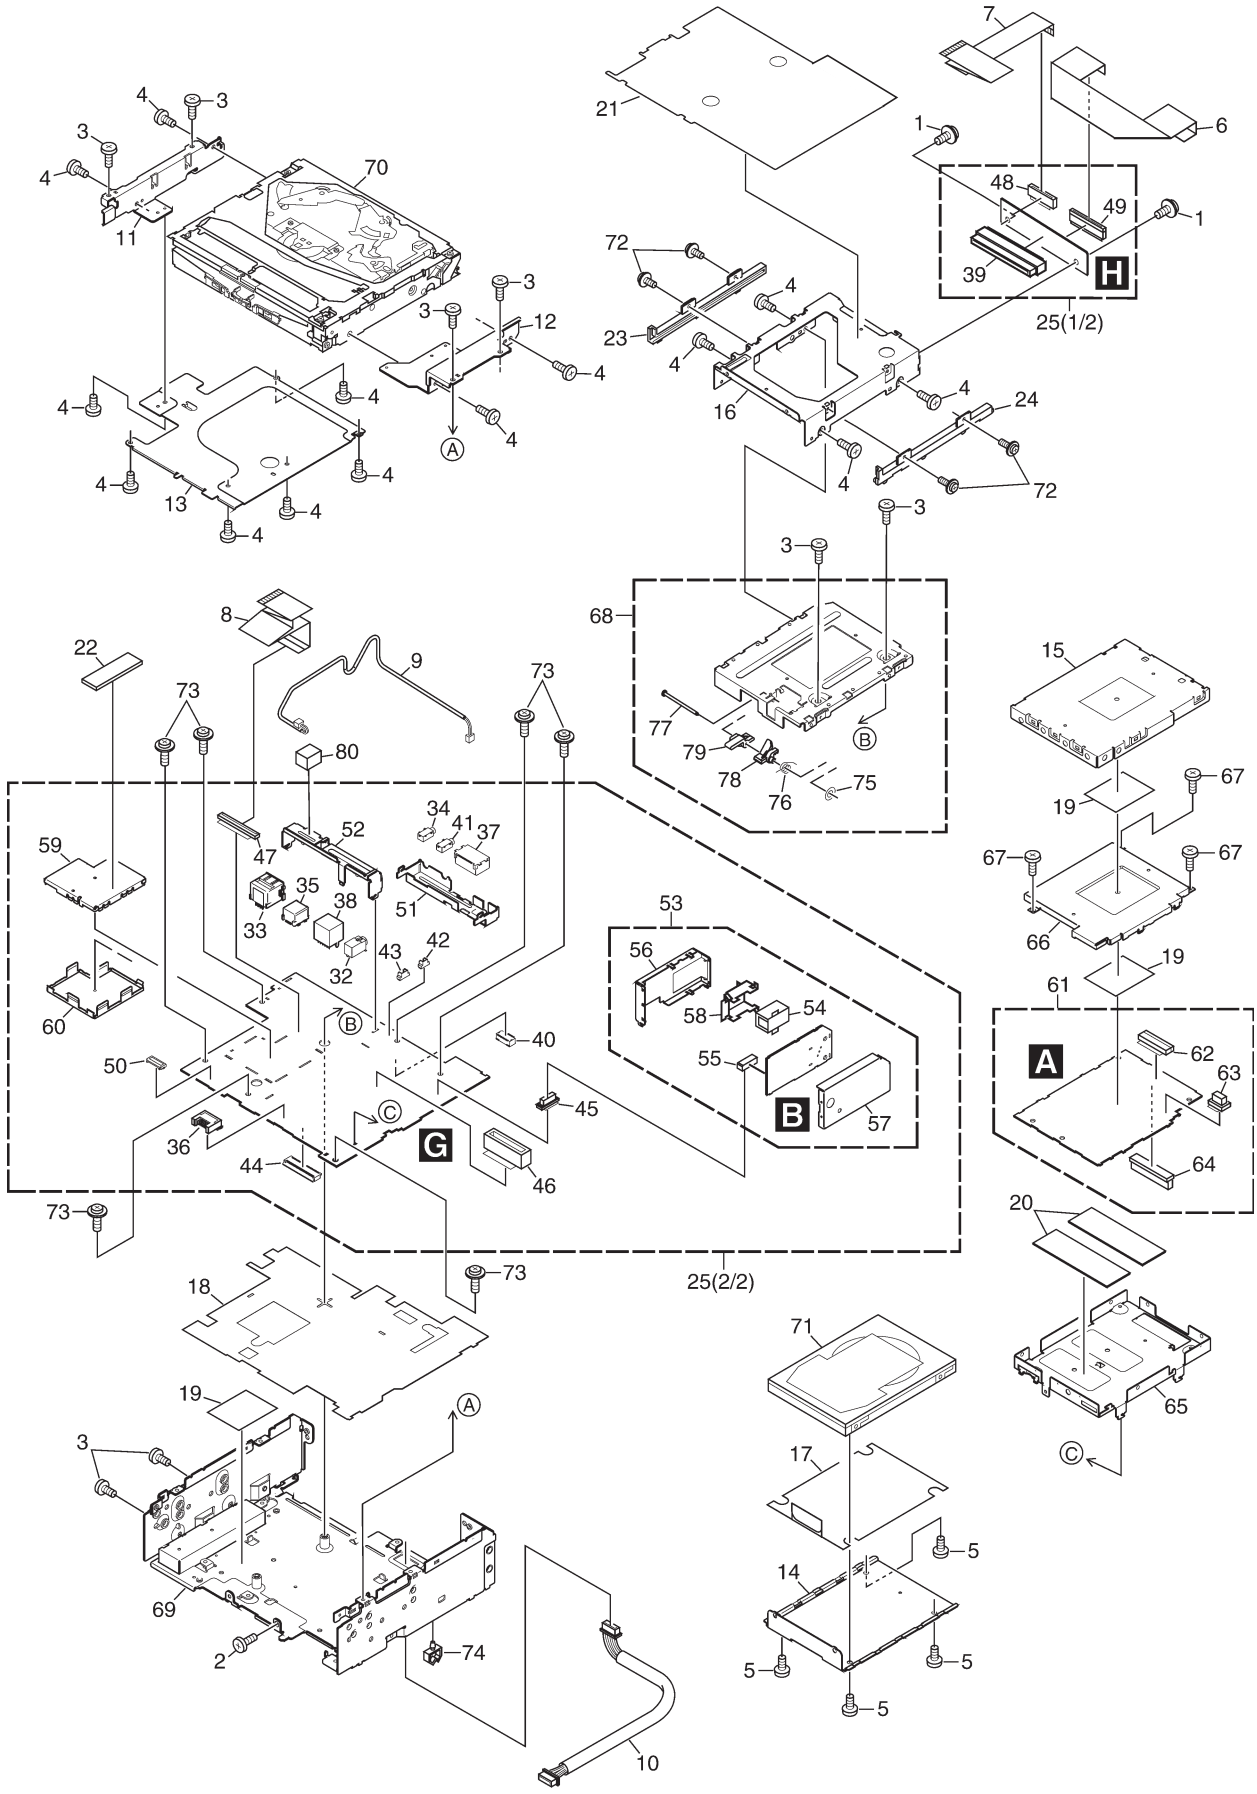

EXTERIOR(2) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	AMZ26P040FTC
	2	Screw	BMZ26P060FTC
	3	Screw	BSZ26P050FTB
	4	Screw(M2 x 3)	CBA1527
	5	Screw	CBA1805
	6	FFC	CDE8077
	7	FFC	CDE8280
	8	FFC	CDE8286
	9	Cord Assy	CDE8081
	10	Cord Assy	CDE8156
	11	Bracket	CND1507
	12	Bracket	CND1831
	13	Shield	CND3001
	14	Holder	CND3002
	15	Shield	CND3010
	16	Holder	CND3182
	17	Insulator	CNM8452
	18	Insulator	CNM9815
	19	Sheet	CNM9933
	20	Sheet	CNM9947
	21	Insulator	CNN1376
	22	Sheet	CNN1215
	23	Rail	CNV7149
	24	Rail	CNV7150
	25	Navi Mother Unit(UC)	CWN1581
		Navi Mother Unit(EW)	CWN1631
	26	•••••	
	27	•••••	
	28	•••••	
	29	•••••	
	30	•••••	
	31	•••••	
	32	Jack(CN5602)	CKN1037
	33	Connector(CN5571)	CKS3408
	34	Connector(CN5611)	CKS3759
	35	Connector(CN5671)	CKS4473
	36	Connector(CN6501)	CKS4485
	37	Connector(CN5531)	CKS4499
	38	Connector(CN5651)	CKS4590
	39	Connector(CN6801)	CKS4602
	40	Connector(CN5851)	CKS4674
	41	Connector(CN5621)	CKS4752
	42	Connector(CN6351)	CKS4822
	43	Connector(CN5601)	CKS4823
	44	Connector(CN5802)	CKS5110
	45	Connector(CN6401)	CKS5205
	46	Connector(CN5201)	CKS5277
	47	Connector(CN6101)	CKS5486
	48	Connector(CN6803)	CKS5486
	49	Connector(CN6802)	CKS5522
	50	Connector(CN5801)	CKS5543
	51	Holder	CND3007
	52	Holder	CND3183
	53	GPS Unit(UC)	CWX3304
		GPS Unit(EW)	CWX3305
	54	Connector(CN504)	CKS4432
	55	Connector(CN461)	CKS5204
	56	Shield	CNC9191
	57	Shield	CNC9192
	58	Holder	CNC9252
	59	Shield Assy	CXC5867
	60	Shield Assy	CXC5868
	61	CC Unit(UC)	CWN1582
		CC Unit(EW)	CWN1632
	62	Connector(CN4151)	CKS5645
	63	Connector(CN4001)	CKS5229
	64	Connector(CN4804)	CKS5276
	65	Shield Assy	CXC5869
	66	Shield Assy	CXC5870
	67	Screw	PMH26P050FTC
	68	Frame Assy	CXC6022
	69	Chassis Unit(UC)	CXC5401
		Chassis Unit(EW)	CXC6523
	70	DVD Mechanism Module(MS3)	CXK6341
	71	HDD Assy(Service)(UC)	CXX2121
		HDD Assy(Service)(EW)	CXX2122
	72	Screw	IMS20P030FTC
	73	Screw	ASZ26P050FTC
	74	Wire Clip(A)	VEC1355
	75	Washer	CBF1037
	76	Spring	CBH2618
*	77	Shaft	CLA4187
*	78	Lever	CNV7151
*	79	Lever	CNV7152
	80	Gasket	CNN1297

2.4 EXTERIOR(3)

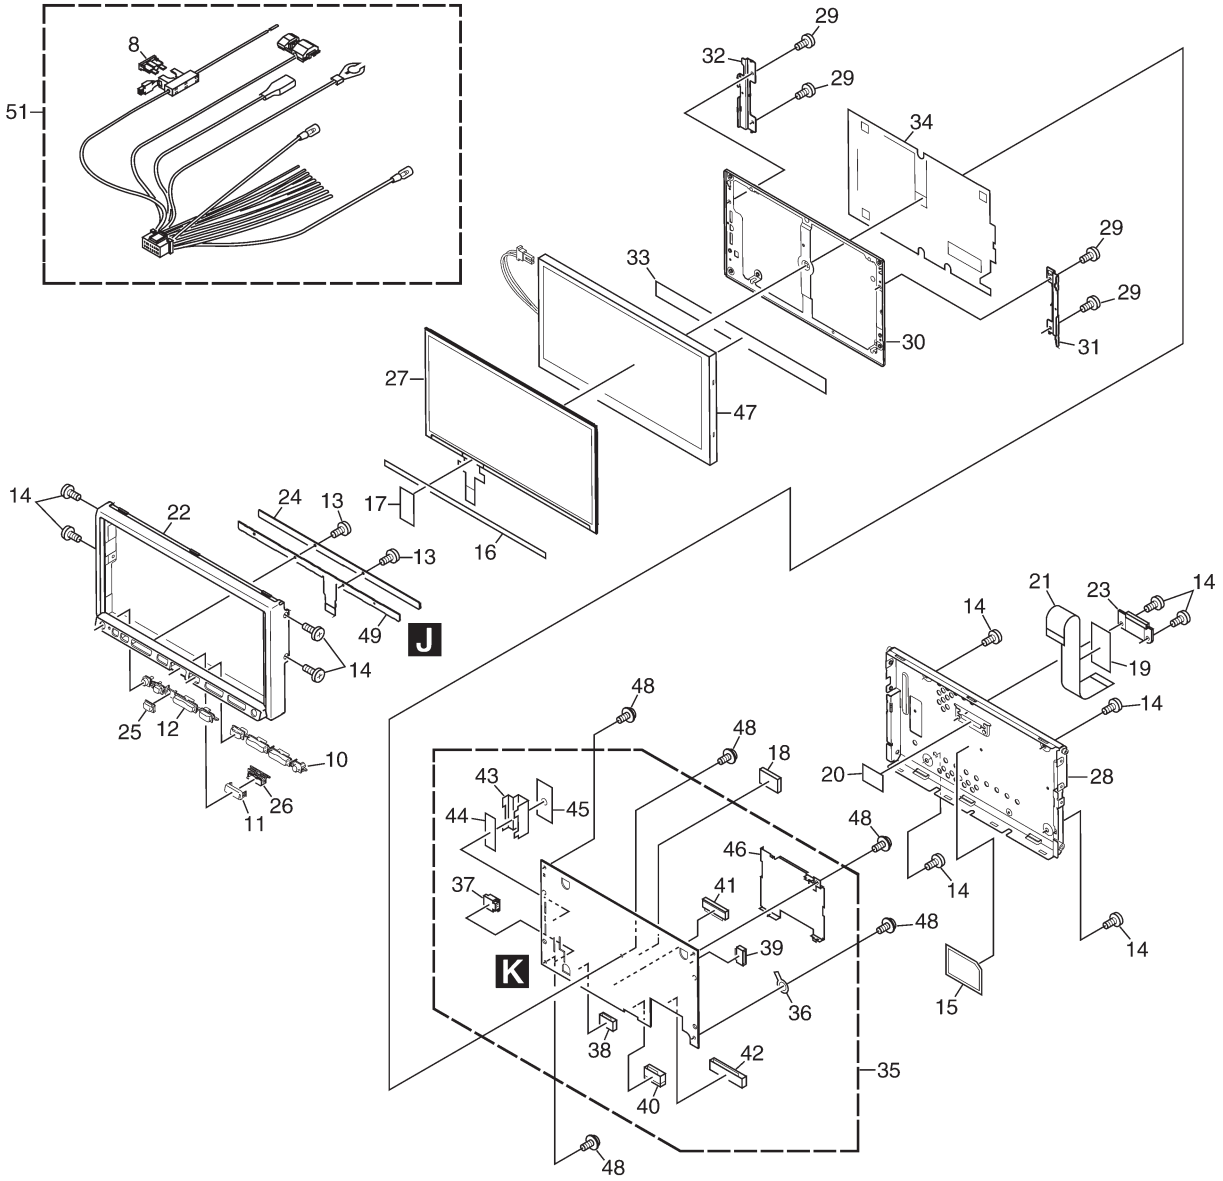

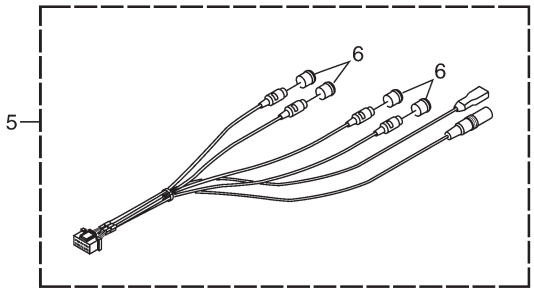

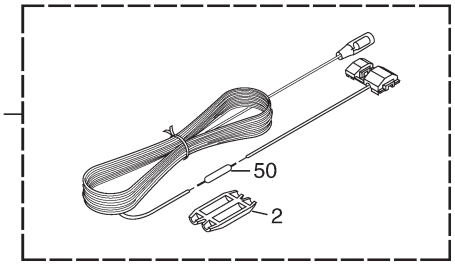

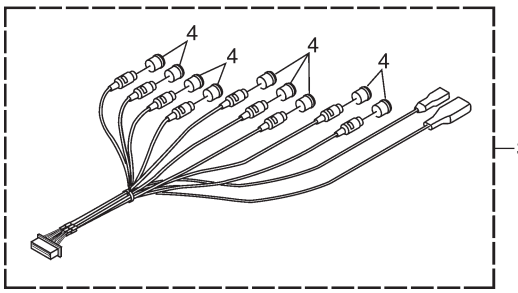

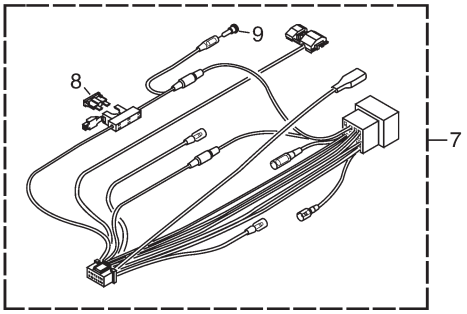

EXTERIOR(3) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord	CDE6825
	2	Cap	CNS1472
	3	Cord Assy	CDE8083
	4	Cap	CNV6727
	5	Cord Assy	CDE8084
	6	Cap	CNV6727
	7	Cord Assy(EW)	CDE8165
⚠	8	Fuse(10 A)	CEK1136
	9	Cap(EW)	CKX-003
	10	Button	CAC9622
	11	Button(MENU)	CAC9623
	12	Button	CAC9625
	13	Screw(M2 x 5)	CBA1875
	14	Screw(M2 x 3)	CBA1877
	15	Shield	CNM9656
	16	Sheet	CNN1102
	17	Sheet	CNN1103
	18	Spacer	CNN1220
	19	Cover	CNN1221
	20	Cover	CNN1223
	21	Flexible PCB	CNP8970
	22	Grille(UC)	CNS8523
		Grille(EW)	CNS8540
	23	Guide	CNV5169
	24	Spacer	CNV8730
	25	Lighting Conductor	CNV8732
	26	Holder	CNV8931
	27	Touch Panel	CSX1093
	28	Case Unit	CXC5408
	29	Screw(M2 x 2)	CBA1771
	30	Holder	CND3014
	31	Holder	CND3015
	32	Holder	CND3016
	33	Insulator	CNM9811
	34	Insulator	CNM9962
	35	Monitor Unit(UC)	CWN1584
		Monitor Unit(EW)	CWN1634
	36	Terminal(CN971)	CKF1064
	37	Connector(CN842)	CKS4428
	38	Connector(CN3)	CKS4675
	39	Connector(CN5)	CKS5037
	40	Connector(CN4)	CKS5041
	41	Connector(CN1)	CKS5095
	42	Connector(CN7)	CKS5111
	43	Shield	CND1177
	44	Insulator	CNM7876
	45	Insulator	CNM7877
	46	Shield Assy	CXC6514
	47	LCD Module	CWX3263
	48	Screw	PMB20P040FTC
	49	Keyboard Unit(UC)	CWN1585
		Keyboard Unit(EW)	CWN1635
	50	Resistor	RS1/2PMF102J
	51	Cord Assy(UC)	CDE8082

2.5 DVD MECHANISM MODULE

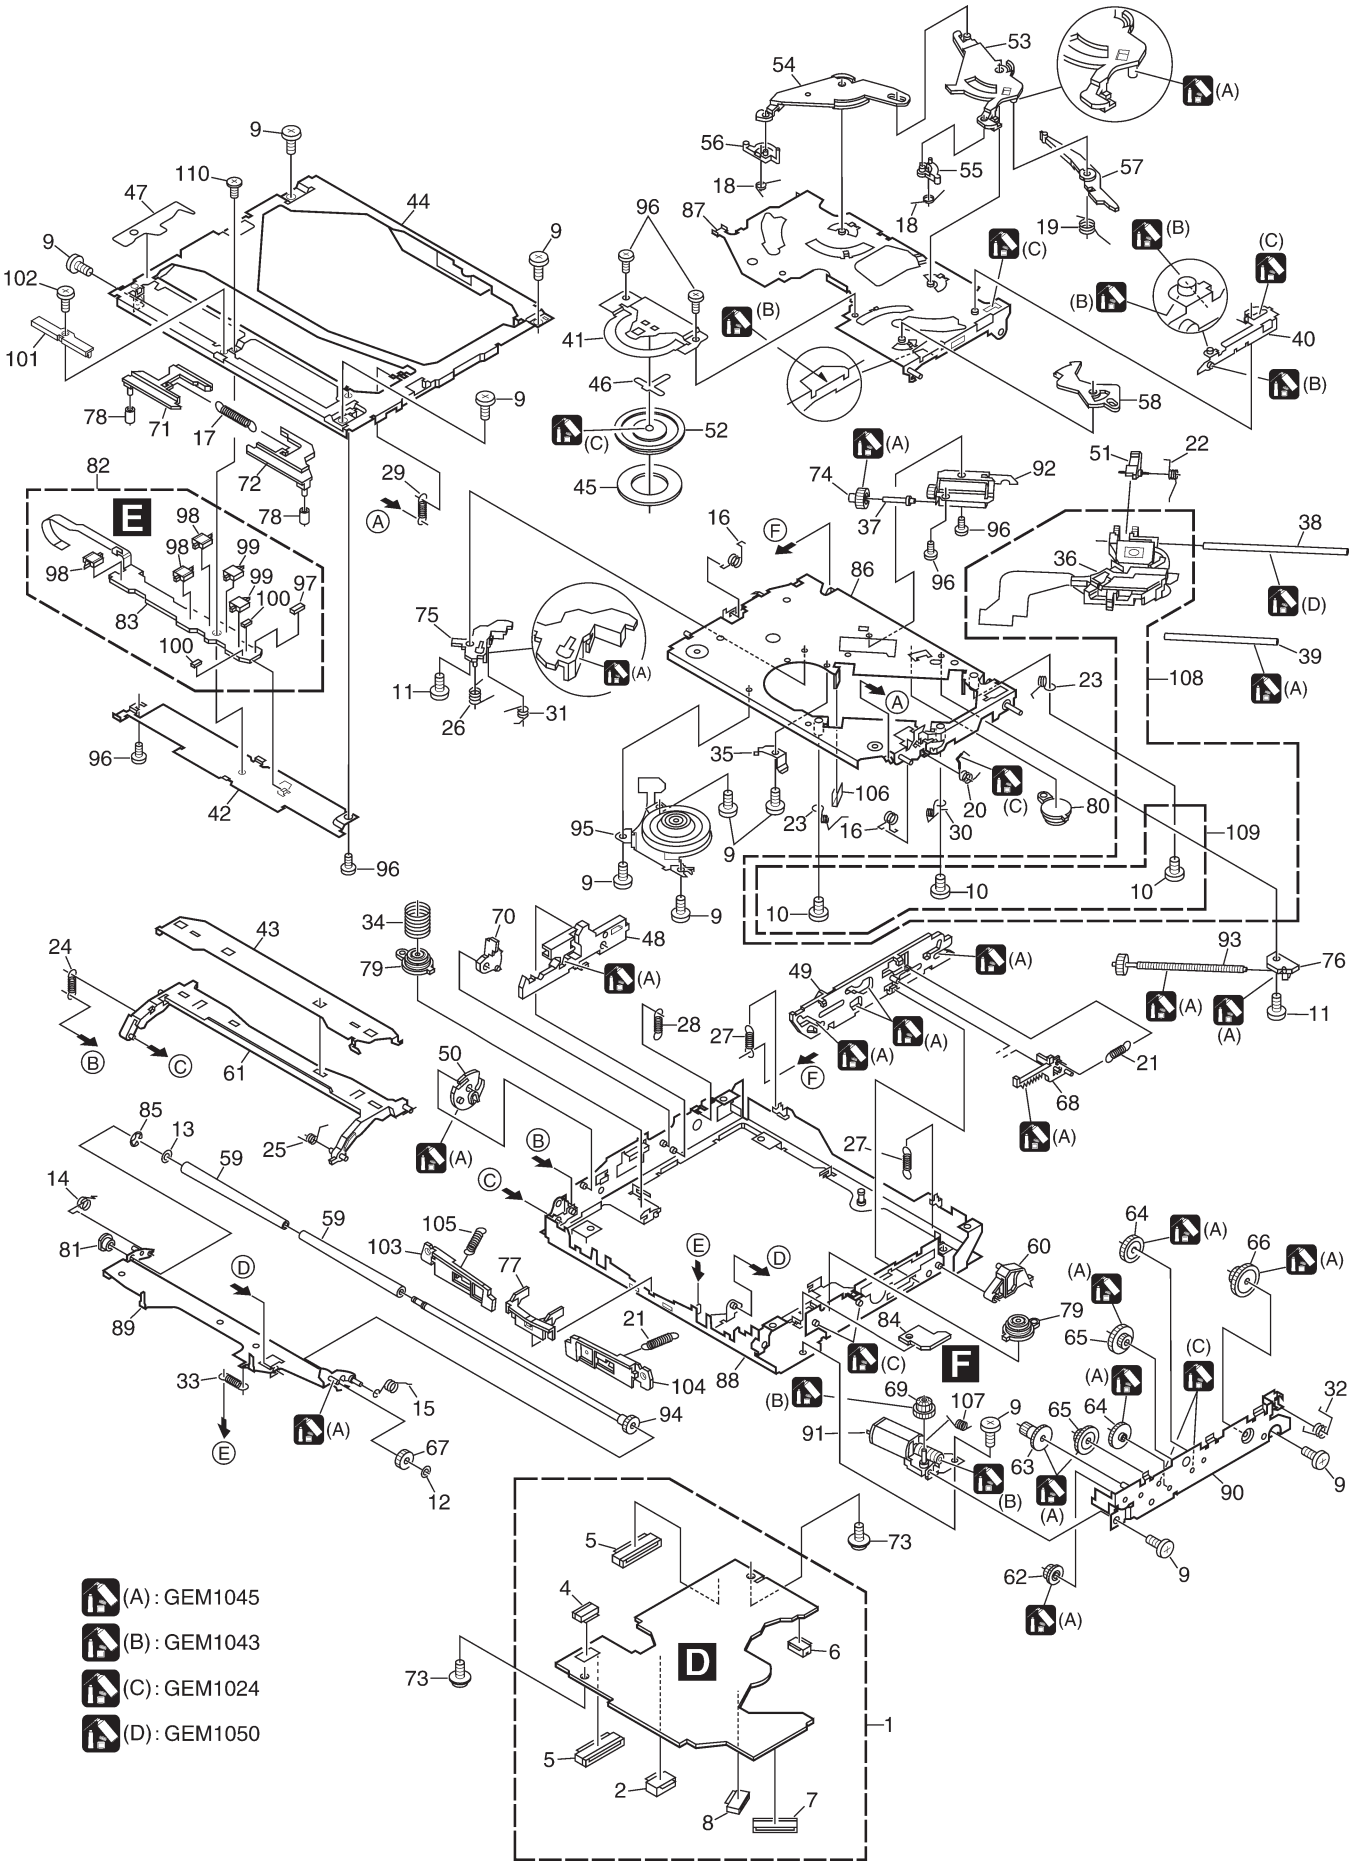

DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	DVD Core Unit	CWX3301
	2	Connector(CN1501)	CKS4282
	3	Connector(CN1401)	CKS5100
	4	Connector(CN1202)	CKS5043
	5	Connector(CN1611)	CKS5100
	6	Connector(CN1603)	CKS4374
	7	Connector(CN1101)	CKS4842
	8	Connector(CN1201)	CKS5017
	9	Screw	BMZ20P020FTC
	10	Screw(M2 x 3.5)	CBA1571
	11	Screw(M2 x 2.5)	CBA1623
	12	Washer	CBF1038
	13	Washer	CBF1064
	14	Spring	CBH2586
	15	Spring	CBH2587
	16	Spring	CBH2588
	17	Spring	CBH2589
	18	Spring	CBH2590
	19	Spring	CBH2591
	20	Spring	CBH2592
	21	Spring	CBH2593
	22	Spring	CBH2594
	23	Spring	CBH2595
	24	Spring	CBH2596
	25	Spring	CBH2597
	26	Spring	CBH2598
	27	Spring	CBH2599
	28	Spring	CBH2600
	29	Spring	CBH2601
	30	Spring	CBH2602
	31	Spring	CBH2603
	32	Spring	CBH2604
	33	Spring	CBH2605
	34	Spring	CBH2711
	35	Spring	CBL1564
	36	Pickup Unit(Service)(DP5)	CXX1945
	37	Shaft	CLA3881
	38	Shaft	CLA4206
	39	Shaft	CLA4207
	40	Lever	CNC9933
	41	Holder	CNC9939
	42	Holder	CND2251
	43	Holder	CND2642
	44	Frame	CND2250
	45	Sheet	CNM6883
	46	Sheet	CNM8283
	47	Sheet	CNM8643
	48	Lever	CNV8502
	49	Lever	CNV8420
	50	Cam	CNV7156
	51	Rack	CNV7157
	52	Clamper	CNV7158
	53	Arm	CNV7159
	54	Arm	CNV7160
	55	Arm	CNV7161
	56	Arm	CNV7162
*	57	Arm	CNV7163
	58	Arm	CNV7164
	59	Roller	CNV7165
	60	Arm	CNV7166
	61	Guide	CNV8093
	62	Gear	CNV7169
	63	Gear	CNV7170
	64	Gear	CNV7171
	65	Gear(Black)	CNV7172
	66	Gear	CNV7173
	67	Gear	CNV7174
	68	Rack	CNV7175
	69	Gear	CNV7176
	70	Arm	CNV8077
	71	Lever	CNV7178
	72	Lever	CNV7179
	73	Screw	IMS20P030FTC
	74	Gear	CNV7181
	75	Holder	CNV7183
	76	Holder	CNV7184
	77	Guide	CNV7745
	78	Roller	CNV7344
	79	Damper	CNV7470
	80	Damper	CNV7471
	81	Collar	CNV8845
	82	Compound Unit(A)	CWX3154
	83	•••••	
	84	Compound Unit(B)	CWX3394
	85	Washer	YE20FTC
	86	Chassis Unit	CXC3629
	87	Arm Unit	CXB8681
	88	Frame Unit	CXB8683
	89	Arm Unit	CXC4701
	90	Bracket Unit	CXB8685
	91	Motor Unit(LOADING)(M1)	CXC4315
	92	Motor Unit(CARRIAGE)(M2)	CXC4314
	93	Screw Unit	CXB8689
	94	Roller Unit	CXC5676
	95	Motor(SPINDLE)(M3)	CXM1308
	96	Screw	JFZ20P018FTC
	97	Photo-transistor(Q1299)	CPT231SCTD
	98	Switch(S1201)	CSN1069
	99	Spring Switch(S1204)	CSN1070
	100	Resistor(R1298)	RS1/16S0R0J
	101	Guide	CNV7615
	102	Screw(M1.7 x 1.2)	CBA1572
	103	Arm	CNV7742
	104	Arm	CNV7743
	105	Spring	CBH2710
	106	Spring	CBL1643
	107	Spring	CBH2712
	108	Pickup Unit(Service)(Screw)	GXX1259
	109	Screw Assy	CXX1750
	110	Screw(M1.4 x 1.4)	CBA1787

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V

Circuit Symbol and No. **Part No.**

Unit Number : CWX3304(UC)
Unit Number : CWX3305(EW5)
Unit Name : GPS Unit
Unit Number : CWN1583(UC)
Unit Number : CWN1633(EW5)
Unit Name : Audio Unit
Unit Number : CWX3301
Unit Name : DVD Core Unit
Unit Number : CWX3154
Unit Name : Compound Unit(A)
Unit Number : CWX3394
Unit Name : Compound Unit(B)
Unit Number : CWN1581(UC)
Unit Number : CWN1631(EW5)
Unit Name : Navi Mother Unit
Unit Number : CWN1586
Unit Name : Panel Unit
Unit Number : CWN1585(UC)
Unit Number : CWN1635(EW5)
Unit Name : Keyboard Unit
Unit Number : CWN1584(UC)
Unit Number : CWN1634(EW5)
Unit Name : Monitor Unit
Unit Number : CZW5026
Unit Name : Main PCB Unit

B

Unit Number : CWX3304(UC)
Unit Number : CWX3305(EW5)
Unit Name : GPS Unit

Circuit Symbol and No. **Part No.**

MISCELLANEOUS

IC 401	(A,24,15) IC	UPC2749T
IC 402	(B,19,26) IC	UPB1027GS
IC 441	(A,31,29) IC	NJM2100V
IC 461	(B,28,9) IC	ADC12H034CIMSAS1
IC 501	(B,49,24) IC	PD3390A
IC 502	(B,47,8) IC(UC)	PEH026A
IC 502	IC(EW5)	PEH027A
IC 503	(A,48,27) IC	M5M5V216ATP-70HI
IC 504	(A,30,13) IC	MAX6364PUT29
IC 532	(A,46,14) IC(EW5)	LC72720YVSS1
Q 441	(A,31,21) Transistor	2SB1132
D 401	(B,10,26) Diode	1SV314
D 501	(B,34,29) Diode	RB751V-40
L 401	(B,10,27) Inductor	CTF1549
L 402	(B,25,21) Inductor	CTF1486
L 403	(B,26,25) Inductor	CTF1486
L 404	(A,20,21) Inductor	LCSA3N3R1608
L 405	(B,12,23) Inductor	LCYB22NJ1608
L 406	(B,14,19) Inductor	LCYB22NJ1608
L 407	(A,18,31) Inductor	CTF1410
L 408	(B,25,30) Inductor(UC)	CTF1556
L 408	Inductor(EW5)	CTF1410
L 409	(B,17,10) Inductor	LCYC1R0K2125
L 410	(B,25,16) Inductor	CTF1547
L 412	(A,24,25) Inductor	CTF1547
L 413	(A,24,24) Inductor	CTF1547
L 414	(A,24,31) Inductor	CTF1547
L 415	(A,25,28) Inductor	CTF1547
L 416	(A,25,27) Inductor	CTF1547
L 417	(B,24,19) Inductor	CTF1547
L 418	(A,13,32) Inductor	CTF1410
L 441	(B,31,19) Inductor	CTF1410
L 442	(A,28,24) Inductor	CTF1410
L 461	(A,27,7) Inductor	CTF1410
L 462	(A,30,7) Inductor	CTF1410
L 467	(B,32,15) Inductor	CTF1547
L 468	(B,31,15) Inductor	CTF1547
L 469	(A,31,9) Inductor	CTF1410
L 501	(B,37,15) Inductor	CTF1410
L 502	(B,35,30) Inductor	CTF1410

Circuit Symbol and No.		Part No.
L 503	(B,58,5) Inductor	CTF1410
L 504	(A,37,32) Inductor	CTF1410
L 531	(A,52,16) Inductor	CTF1410
X 401	(A,13,26) TCXO 16.368 MHz	CWX2381
X 501	(A,36,25) Radiator 32.768 kHz	CSS1319
X 502	(B,35,25) Radiator 20.00 MHz	CSS1549
X 532	(A,57,14) Radiator 4.332 MHz(EW5)	CSS1550
F 401	(A,22,22) Filter	CTF1548

RESISTORS

R 401	(B,10,25)	RS1/16SS472J
R 402	(B,11,29)	RS1/16SS472J
R 403	(B,13,30)	RS1/16SS122J
R 404	(B,13,29)	RS1/16SS622J
R 405	(A,22,25)	RS1/16SS100J
R 406	(B,25,28)	RS1/16S271J
R 407	(B,24,17)	RS1/16S2R2J
R 441	(A,29,25)	RN1/16SC10R0D
R 442	(B,31,22)	RN1/16SE1501D
R 443	(B,30,22)	RN1/16SE2402D
R 444	(B,30,25)	RN1/16SE3302D
R 445	(B,30,32)	RN1/16SE4702D
R 446	(B,28,31)	RN1/16SE4702D
R 447	(A,32,24)	RS1/16S432J
R 448	(B,31,29)	RN1/16SE1002D
R 449	(B,32,31)	RN1/16SE2202D
R 450	(B,30,31)	RN1/16SE3302D
R 451	(A,27,31)	RS1/16S103J
R 452	(B,32,26)	RS1/16SS102J
R 454	(B,32,25)	RS1/16SS102J
R 460	(B,21,12)	RS1/16S0R0J
R 461	(A,36,4)	RS1/16SS102J
R 462	(A,37,8)	RS1/16SS102J
R 463	(B,34,11)	RAB4CQ102J
R 464	(A,34,11)	RAB4CQ333J
R 465	(A,37,6)	RS1/16SS102J
R 468	(A,56,7) (EW5)	RS1/16SS471J
R 469	(A,57,5) (EW5)	RAB4CQ471J
R 470	(B,34,6)	RAB4CQ471J
R 471	(B,34,2)	RAB4CQ104J
R 477	(B,30,15)	RS1/16SS222J
R 478	(B,29,15)	RS1/16SS222J
R 479	(B,27,14)	RS1/16SS222J
R 480	(B,27,15)	RS1/16SS332J
R 481	(B,29,16)	RS1/16SS332J
R 482	(A,37,5)	RS1/16SS223J
R 483	(A,37,4)	RS1/16SS473J
R 501	(B,38,26)	RS1/16SS0R0J
R 502	(B,37,27)	RS1/16SS102J
R 503	(B,37,24)	RS1/16SS154J
R 508	(B,59,13) (UC)	RS1/16SS103J
R 508	(EW5)	RS1/16SS472J
R 509	(B,33,13)	RS1/16SS473J
R 510	(A,36,6)	RS1/16SS102J
R 511	(A,33,18)	RS1/16SS103J
R 512	(B,38,29)	RS1/16SS473J
R 513	(B,59,14)	RS1/16SS103J
R 514	(B,38,27)	RS1/16SS473J
R 515	(A,29,10)	RS1/16SS473J
R 517	(B,38,21)	RS1/16SS103J
R 519	(B,38,19)	RS1/16SS473J
R 521	(B,36,27)	RS1/16SS473J
R 532	(A,42,9) (EW5)	RS1/16SS104J
R 533	(A,38,17) (UC)	RS1/16SS103J
R 533	(EW5)	RS1/16SS332J
R 534	(A,39,18)	RS1/16SS103J
R 535	(A,37,11)	RS1/16SS103J
R 536	(A,37,17)	RS1/16SS0R0J
R 537	(A,37,14) (EW5)	RS1/16S0R0J
R 538	(A,37,16) (EW5)	RS1/16SS0R0J

CAPACITORS

C 401	(A,24,12)	CCSRCH100D50
C 402	(A,23,19)	CCSSCH101J50
C 403	(A,26,14)	CKSSYB104K10
C 404	(A,19,23)	CCSSCH101J50
C 405	(B,13,26)	CCSRUJ220J50
C 406	(B,13,27)	CCSRUJ220J50
C 407	(B,12,30)	CKSSYB333K16
C 408	(B,11,30)	CKSSYB182K50
C 409	(A,20,28)	CSZS100M6R3
C 410	(B,26,31)	CKSSYB103K16
C 411	(A,20,25)	CKSSYB102K50
C 412	(A,19,26)	CKSSYB102K50
C 413	(A,19,29)	CKSSYB104K10
C 414	(A,22,30)	CKSSYB104K10
C 415	(A,23,29)	CKSSYB104K10
C 416	(A,23,26)	CKSSYB104K10
C 417	(B,23,20)	CKSSYB104K10
C 418	(A,20,31)	CKSSYB102K50
C 419	(B,38,31)	CKSSYB104K10
C 420	(A,13,31)	CKSSYB104K10
C 421	(B,24,26)	CKSSYB102K50
C 422	(B,24,25)	CKSSYB103K16
C 423	(B,24,23)	CKSSYB104K10
C 424	(B,26,21)	CCSRCH102J50
C 425	(B,27,22)	CCSRCH271J50
C 426	(B,27,25)	CCSRCH102J50
C 427	(B,24,24)	CKSSYB104K10
C 428	(B,13,23)	CKSSYB103K16
C 429	(B,11,22)	CCSRCH301J50
C 430	(B,11,20)	CCSSCH120J50
C 431	(B,12,19)	CCSRCH301J50
C 432	(B,15,20)	CKSSYB103K16
C 433	(B,18,8)	CCSRCH101J50
C 434	(B,17,13)	CKSSYB102K50
C 435	(B,18,13)	CKSSYB103K16
C 436	(B,30,20)	CKSSYB104K10
C 441	(B,30,26)	CKSRYB104K16
C 442	(A,29,27)	CCSRCH101J50
C 443	(A,29,31)	CKSRYB104K16
C 444	(B,31,20)	CKSSYB103K16
C 445	(A,28,29)	CKSSYB104K10
C 461	(A,27,3) 22 µF/6.3 V	CCH1408
C 462	(A,30,8)	CKSRYB104K16
C 463	(A,26,7)	CKSRYB104K16
C 464	(B,30,4)	CKSSYB103K16
C 465	(B,30,2)	CKSSYB103K16

Circuit Symbol and No.		Part No.
C 466	(B,31,2)	CKSSYB103K16
C 467	(B,32,2)	CKSSYB103K16
C 468	(A,29,9)	CKSSYB104K10
C 469	(B,25,3)	CSZS100M10
C 470	(B,25,14)	CKSSYB104K10
C 471	(B,35,4)	CCSSCH101J50
C 501	(B,38,18)	CKSSYB104K10
C 502	(B,35,21)	CCSRCH150J50
C 503	(B,37,21)	CCSRCH150J50
C 504	(B,39,15)	CKSSYB104K10
C 506	(B,59,18)	CKSSYB104K10
C 507	(B,59,20)	CKSSYB104K10
C 508	(B,59,24)	CKSSYB104K10
C 509	(B,59,29)	CKSSYB104K10
C 511	(B,39,33)	CKSSYB104K10
C 512	(B,37,30)	CKSSYB104K10
C 514	(A,30,15)	CSZS100M6R3
C 515	(B,38,23)	CKSSYB104K10
C 516	(B,58,10)	CKSSYB104K10
C 517	(A,49,20)	CKSSYB104K10
C 518	(A,38,30)	CKSSYB104K10
C 535	(A,53,14) (EW5)	CSZS100M6R3
C 539	(A,53,18) (EW5)	CCSRCH100D50
C 540	(A,52,11) (EW5)	CCSRCH100D50
C 541	(A,46,8) (EW5)	CCSRCH561J50
C 542	(A,43,9) (EW5)	CKSSYB104K10
C 543	(A,39,11) (EW5)	CSZS100M6R3
C 544	(A,49,9) (EW5)	CCSRCH331J50
C 545	(A,52,14) (EW5)	CKSSYB104K10

C

Unit Number : CWN1583(UC)
Unit Number : CWN1633(EW5)
Unit Name : Audio Unit

MISCELLANEOUS

IC 1200	(B,104,22) IC	NJM2235M
IC 1201	(B,93,22) IC	NJM2246M
IC 1202	(B,116,23) IC	NJM2235M
IC 1204	(B,125,103) IC	TK15405BMI
IC 1270	(B,117,110) IC	NJM2137V
IC 1401	(A,98,139) IC	PAL007B
IC 1402	(B,104,75) IC	PML009A
IC 1403	(A,172,93) IC	BA00CC0WT
IC 1486	(B,76,74) IC	BA3121F
IC 1501	(B,57,33) IC	NJM2060V
IC 1520	(B,63,59) IC	TC4052BFT
IC 1530	(B,55,59) IC	NJM2125F
IC 1621	(B,104,103) IC	NJM2060V
IC 1802	(B,138,114) IC	TPD1018F
IC 1821	(A,142,53) IC(EW5)	M5237ML
IC 1850	(B,64,93) IC	M5237ML
IC 1900	(A,111,34) IC	NJM2505F
IC 1901	(A,89,37) IC	NJM2505F
IC 1940	(A,91,46) IC	BA3121F
IC 1960	(B,58,45) IC	BA3121F
IC 2501	(A,35,60) IC	NJM2391DL1-33
Q 1001	(B,147,113) Transistor	2SC4116
Q 1004	(B,123,120) Transistor	2SC4081
Q 1006	(A,129,121) Transistor	DTC114EU
Q 1200	(A,114,14) Transistor	2SA1385-ZS1
Q 1201	(A,123,15) Transistor	DTC114EU
Q 1202	(A,73,28) Transistor	2SA1797
Q 1203	(A,85,29) Transistor	DTC114EU
Q 1204	(B,69,23) Transistor	2SC4081
Q 1205	(B,76,23) Transistor	2SA1577
Q 1206	(A,126,60) Transistor	2SD1760F5
Q 1207	(A,172,82) Transistor	2SB1185
Q 1242	(B,98,27) Transistor	IMD3A
Q 1350	(B,69,13) Transistor	IMD3A
Q 1420	(B,106,118) Transistor	FMG12
Q 1421	(B,75,106) Transistor	FMG12
Q 1422	(B,75,115) Transistor	FMG12
Q 1430	(B,92,123) Transistor	2SC4081
Q 1431	(B,98,123) Transistor	DTC114EU
Q 1432	(B,98,118) Transistor	IMD3A
Q 1470	(B,89,110) Transistor	IMD3A
Q 1521	(A,66,59) Transistor	DTC114EU
Q 1540	(B,71,59) Transistor	FMG12
Q 1541	(B,71,53) Transistor	2SC2412K
Q 1542	(B,71,64) Transistor	2SC2412K
Q 1611	(B,100,94) Transistor	DTC323TK
Q 1612	(B,108,95) Transistor	DTC323TK
Q 1613	(B,98,90) Transistor	IMD3A
Q 1614	(B,108,92) Transistor	IMD3A
Q 1821	(A,134,50) Transistor(EW5)	2SB1184F5
Q 1822	(A,123,50) Transistor(EW5)	2SB1260
Q 1823	(A,133,40) Transistor(EW5)	DTC114EU
Q 1830	(B,136,64) Transistor	IMX1
Q 1840	(A,172,104) Transistor	2SB1185
Q 1841	(B,139,100) Transistor	IMX1
Q 1850	(A,54,97) Transistor	2SB1185
Q 1851	(B,47,95) Transistor	2SB1260
Q 1852	(B,60,102) Transistor	DTC114EU
Q 2501	(B,32,33) Transistor(EW5)	DTC124EU
Q 2502	(B,27,33) Transistor(EW5)	DTC124EU
Q 2503	(B,32,36) Transistor(EW5)	DTC124EU
Q 2504	(B,26,37) Transistor(EW5)	DTC124EU
Q 2550	(A,23,124) Transistor(EW5)	2SC3357
Q 2551	(B,20,116) Transistor(EW5)	2SC3127
Q 2800	(B,148,73) Transistor(EW5)	2SC3545
Q 2801	(B,144,58) Transistor(EW5)	DTC144EK
Q 2802	(B,141,55) Transistor(EW5)	DTC144EK
D 1001	(B,157,146) Diode	PTZ18A
D 1004	(B,149,116) Diode	UDZS5R1(B)
D 1005	(B,122,113) Diode	HZU6R8(B2)
D 1006	(A,151,128) Diode	PTZ27(B)
D 1007	(A,139,102) Diode	KS926S2
D 1008	(B,156,123) Diode	UDZS18(B)
D 1009	(B,156,127) Diode	UDZS18(B)
D 1010	(B,154,123) Diode	1SS355
D 1011	(A,130,111) Diode	1SR154-400
D 1013	(A,174,136) Diode	5KP22A
D 1030	(A,53,115) Diode	1SS355
D 1031	(A,51,115) Diode	1SS355
D 1050	(B,58,138) Diode	UDZS5R6(B)
D 1051	(B,55,120) Diode	UDZS5R6(B)
D 1070	(B,133,130) Diode	DAN202U
D 1071	(B,136,133) Diode	PTZ27(B)

Circuit Symbol and No.		Part No.
D 1202	(A,135,66) Diode	UDZS5R6(B)
D 1203	(B,140,65) Diode	HZU8R2(B1)
D 1204	(B,129,129) Diode	UDZS6R8(B)
D 1205	(B,131,127) Diode	UDZS6R8(B)
D 1206	(A,67,120) Diode	UDZS6R8(B)
D 1207	(A,70,116) Diode	UDZS6R8(B)
D 1208	(B,65,119) Diode	UDZS6R8(B)
D 1209	(B,67,121) Diode	UDZS6R8(B)
D 1210	(B,125,135) Diode	UDZS6R8(B)
D 1211	(B,122,135) Diode	UDZS6R8(B)
D 1401	(A,116,96) Diode	UDZS4R7(B)
D 1405	(B,131,130) Diode	AVR-M1608C080MTAAB
D 1406	(B,131,133) Diode	AVR-M1608C080MTAAB
D 1407	(B,133,134) Diode	AVR-M1608C080MTAAB
D 1408	(B,131,135) Diode	AVR-M1608C080MTAAB
D 1410	(B,109,126) Diode	1SR154-400
D 1412	(B,139,130) Diode	PTZ27(B)
D 1420	(B,102,118) Diode	DAP202K
D 1430	(B,88,117) Diode	MA111
D 1501	(A,74,35) Diode	UDZS4R7(B)
D 1530	(B,55,64) Diode	1SS355
D 1531	(A,55,58) Diode	EDZ4R3(B)
D 1540	(A,79,61) Diode	DAP202U
D 1541	(A,82,62) Diode	DAN202U
D 1611	(B,97,86) Diode	DAN202K
D 1612	(B,107,88) Diode	DAN202K
D 1803	(B,142,122) Diode	PTZ27(B)
D 1804	(B,145,120) Diode	1SR154-400
D 1840	(B,146,101) Diode	HZU7R5(B2)
D 1841	(B,149,95) Diode	RSX201L-30
D 1905	(A,65,119) Diode	UDZS6R8(B)
D 1906	(A,64,117) Diode	UDZS6R8(B)
D 2501	(B,38,56) Diode	1SR154-400
D 2502	(B,38,59) Diode	1SR154-400
D 2503	(B,38,62) Diode	1SR154-400
D 2800	(B,144,47) Diode(EW5)	HZU3R3(B1)
ZNR2501	(B,31,108) Surge Protector	RCCA-201Q31UA-PI
L 1001	(B,159,144) Inductor	CTF1410
L 1002	(B,149,123) Inductor	CTF1410
L 1003	(B,153,125) Inductor	CTF1410
L 1004	(A,162,119) Choke Coil 600 mH	CTH1213
L 1030	(A,52,122) Inductor	CTF1556
L 1050	(B,54,138) Inductor	CTF1334
L 1051	(B,57,122) Inductor	CTF1334
L 1070	(B,139,134) Inductor	LCTC2R2K1608
L 1200	(A,103,15) Inductor	CTH1256
L 1201	(B,77,18) Inductor	CTF1306
L 1202	(A,69,27) Inductor	CTF1410
L 1203	(A,103,39) Inductor	CTF1410
L 1204	(A,98,36) Inductor	CTF1410
L 1206	(A,116,39) Inductor	CTF1410
L 1207	(A,123,97) Inductor	LCTAW100J3225
L 1270	(B,114,106) Chip Ferrite Bead	CTF1399
L 1400	(B,103,65) Inductor	LCTAW2R2J2520
L 1430	(B,88,122) Inductor	CTF1410
L 1486	(A,81,74) Inductor	LCYC2R2K2125
L 1487	(A,81,72) Inductor	LCYC2R2K2125
L 1540	(A,78,56) Inductor	LCTAW101J2520
L 1830	(A,41,10) Inductor	CTF1379
L 1940	(A,96,55) Inductor	LCYC2R2K2125

Circuit Symbol and No.		Part No.
L 1960	(B,49,51) Inductor	LCYC2R2K2125
L 2501	(B,28,85) Chip Coil	LCTAW4R7J2520
L 2502	(A,32,67) Inductor	LCTAW2R2J3225
L 2503	(B,28,45) Inductor	LCTAW2R2J2520
L 2504	(B,32,45) Chip Ferrite Bead	CTF1399
L 2505	(B,28,40) Inductor	LCTAW2R2J3225
L 2506	(B,43,60) Chip Coil	LCTAW1R0J2520
L 2550	(A,21,133) Inductor(EW5)	LCTAWR12J2520
L 2551	(A,24,130) Inductor(EW5)	LCYCR10K2125
L 2552	(B,25,118) Inductor(EW5)	LCYCR10K2125
L 2553	(A,23,116) Coil(EW5)	CTC1143
L 2554	(B,26,104) Inductor(EW5)	LCTAW101J2520
L 2555	(B,18,129) Inductor(EW5)	LCTAW101J2520
L 2556	(B,23,115) Inductor(EW5)	LCYCR18K2125
L 2557	(A,17,124) Coil(EW5)	CTC1142
L 2558	(A,16,113) Coil(EW5)	CTC1139
L 2800	(B,148,76) Inductor(EW5)	LCYCR22K2125
L 2801	(B,136,50) Chip Ferrite Bead(EW5)	CTF1557
L 2802	(B,148,65) Chip Coil(EW5)	LCTAW1R0J2520
L 2803	(B,144,43) Inductor(EW5)	LCTAW2R2J2520
L 2804	(B,146,49) Chip Coil(EW5)	LCTAW1R0J2520
VR1200	(A,68,17) Semi-fixed 1 KΩ(OB)	CCP1390
⚠FU1001	(B,134,121) Fuse 750 mA	CEK1279
⚠FU1200	(A,175,87) Fuse 2.5 A	CEK1285
⚠FU1201	(A,116,123) Fuse 3.15 A	CEK1259
⚠FU1204	(A,74,126) Fuse 3.15 A	CEK1259
⚠FU1400	(A,77,127) Fuse 3 A	CEK1286
⚠FU1820	(A,125,45) Fuse 750 mA(EW5)	CEK1279
⚠FU1840	(B,131,87) Fuse 2.5 A	CEK1258
⚠FU1850	(B,47,91) Fuse 630 mA	CEK1252
Y 2600	(A,153,60) Tuner Unit(EW5)	CWE2023
EF1201	(A,130,135) EMI Filter	CCG1067
EF1202	(A,64,124) EMI Filter	CCG1067
EF1203	(A,67,124) EMI Filter	CCG1067
EF1402	(A,132,135) EMI Filter	CCG1067
EF1404	(A,135,135) EMI Filter	CCG1067
EF1421	(A,118,128) EMI Filter	CCG1067
EF1422	(A,121,128) EMI Filter	CCG1067
EF1423	(A,120,135) EMI Filter	CCG1067
EF1424	(A,122,135) EMI Filter	CCG1067
EF1425	(A,124,135) EMI Filter	CCG1067
EF1426	(A,127,135) EMI Filter	CCG1067

RESISTORS

R 1001	(A,143,122)	RS1/4S102J
R 1002	(B,154,145)	RS1/4S103J
R 1003	(B,151,114)	RS1/16S473J
R 1004	(B,151,115)	RS1/16S104J
R 1008	(B,150,119)	RS1/16S102J
R 1009	(B,152,119)	RS1/16S472J
R 1010	(B,150,121)	RS1/4S102J
R 1012	(B,121,118)	RS1/16S223J
R 1013	(B,123,116)	RS1/16S223J
R 1014	(B,132,118)	RS1/4SA472J
R 1016	(A,130,115)	RS1/16S103J
R 1017	(A,134,118)	RS1/4SA472J
R 1018	(A,134,114)	RS1/4SA102J
R 1030	(A,53,118)	RS1/10S103J
R 1070	(B,139,135)	RS1/16S153J

Circuit Symbol and No.		Part No.
R 1200	(A,123,12)	RS1/4SA331J
R 1201	(A,127,13)	RS1/4SA331J
R 1202	(A,121,15)	RS1/16S153J
R 1203	(A,81,31)	RS1/4SA471J
R 1204	(A,84,33)	RS1/4SA471J
R 1205	(A,81,29)	RS1/16S153J
R 1206	(B,70,18)	RS1/16S391J
R 1207	(B,70,20)	RS1/16S0R0J
R 1208	(A,65,15)	RS1/16S332J
R 1209	(B,73,20)	RS1/16S362J
R 1210	(B,73,23)	RS1/16S102J
R 1211	(B,102,30)	RS1/16S105J
R 1212	(B,105,31)	RS1/16S225J
R 1213	(B,109,22)	RS1/16S225J
R 1214	(B,89,25)	RS1/16S105J
R 1215	(B,93,30)	RS1/16S105J
R 1216	(B,97,20)	RS1/16S105J
R 1217	(B,120,23)	RS1/16S105J
R 1218	(B,112,19)	RS1/16S225J
R 1219	(B,114,28)	RS1/16S225J
R 1222	(B,125,108)	RS1/16S750J
R 1223	(B,125,101)	RS1/16S104J
R 1224	(A,135,61)	RS1/16S102J
R 1225	(B,134,66)	RS1/16S222J
R 1226	(B,136,66)	RS1/16S471J
R 1227	(B,139,62)	RS1/10S271J
R 1228	(A,175,84)	RS1/16S223J
R 1229	(B,134,60)	RS1/16S332J
R 1231	(A,66,117)	RS1/16S750J
R 1235	(A,85,18)	RS1/16S153J
R 1237	(B,128,104)	RS1/16S101J
R 1238	(B,104,29)	RS1/16S101J
R 1239	(B,107,27)	RS1/16S101J
R 1240	(B,135,15)	RS1/16S0R0J
R 1241	(B,92,28)	RS1/16S101J
R 1242	(B,97,23)	RS1/16S104J
R 1243	(B,116,17)	RS1/16S101J
R 1244	(B,114,17)	RS1/16S101J
R 1245	(B,96,28)	RS1/16S102J
R 1270	(B,124,129)	RS1/16SS750J
R 1271	(B,127,126)	RS1/16SS103J
R 1272	(B,128,126)	RS1/16SS103J
R 1273	(B,119,122)	RS1/16S4701D
R 1274	(B,119,120)	RS1/16S4701D
R 1275	(B,113,108)	RS1/16SS101J
R 1276	(B,117,119)	RS1/16S4701D
R 1277	(B,115,110)	RS1/16S4701D
R 1278	(B,121,107)	RS1/16SS102J
R 1279	(B,114,109)	RS1/16SS563J
R 1280	(B,120,108)	RS1/16SS473J
R 1290	(A,45,20)	RS1/16S0R0J
R 1401	(A,114,92)	RS1/16S102J
R 1402	(A,166,97)	RS1/4S0R0J
R 1404	(A,175,95)	RN1/16SE1002D
R 1405	(A,175,98)	RN1/16SE2701D
R 1406	(A,175,90)	RN1/16SE2201D
R 1408	(B,93,120)	RS1/16S473J
R 1425	(B,109,119)	RS1/16S821J
R 1426	(B,109,116)	RS1/16S821J
R 1427	(B,110,123)	RS1/16S223J
R 1428	(B,111,116)	RS1/16S223J
R 1429	(B,107,124)	RS1/16S471J
R 1430	(B,112,116)	RS1/16S471J
R 1431	(B,94,118)	RS1/16S102J
R 1432	(B,90,120)	RS1/16S103J
R 1433	(B,101,125)	RS1/16S103J
R 1434	(B,95,127)	RS1/16S103J
R 1435	(B,85,122)	RS1/4SA102J
R 1436	(B,76,103)	RS1/16S681J
R 1437	(B,76,109)	RS1/16S681J
R 1438	(B,76,112)	RS1/16S681J
R 1439	(B,76,118)	RS1/16S681J
R 1440	(B,79,104)	RS1/16S223J
R 1441	(B,79,107)	RS1/16S223J
R 1442	(B,79,114)	RS1/16S223J
R 1443	(B,79,117)	RS1/16S223J
R 1444	(B,80,104)	RS1/16S471J
R 1445	(B,80,107)	RS1/16S471J
R 1446	(B,80,114)	RS1/16S471J
R 1447	(B,80,117)	RS1/16S471J
R 1448	(B,99,126)	RS1/16S331J
R 1449	(B,90,118)	RS1/16S391J
R 1450	(B,92,117)	RS1/16S391J
R 1451	(A,101,58)	RS1/16S181J
R 1452	(A,111,60)	RS1/16S181J
R 1453	(A,100,58)	RS1/16S223J
R 1454	(A,111,61)	RS1/16S223J
R 1455	(A,99,58)	RS1/16S102J
R 1456	(A,109,62)	RS1/16S102J
R 1459	(A,96,122)	RS1/16S101J
R 1460	(A,92,121)	RS1/16S101J
R 1461	(A,90,121)	RS1/16S101J
R 1462	(A,86,120)	RS1/16S101J
R 1463	(A,124,131)	RS1/16S103J
R 1464	(A,123,131)	RS1/16S103J
R 1465	(B,94,123)	RS1/16S103J
R 1466	(B,119,55)	RS1/16S0R0J
R 1467	(B,119,53)	RS1/16S0R0J
R 1468	(B,117,54)	RS1/16S0R0J
R 1469	(B,117,52)	RS1/16S0R0J
R 1470	(B,92,110)	RS1/16S102J
R 1480	(B,80,78)	RS1/16S220J
R 1486	(B,71,81)	RS1/16S102J
R 1487	(B,72,69)	RS1/16S102J
R 1488	(B,71,82)	RS1/16S101J
R 1489	(B,75,68)	RS1/16S101J
R 1490	(B,70,76)	RS1/16S223J
R 1491	(B,71,72)	RS1/16S223J
R 1501	(A,74,39)	RS1/16S102J
R 1506	(B,53,30)	RS1/16S103J
R 1507	(B,54,39)	RS1/16S104J
R 1508	(B,53,29)	RS1/16S103J
R 1510	(B,53,27)	RS1/16S103J
R 1511	(B,59,37)	RS1/16S0R0J
R 1512	(B,59,28)	RS1/16S103J
R 1513	(A,95,62)	RS1/16S0R0J
R 1514	(A,89,61)	RS1/16S0R0J
R 1515	(A,39,20)	RS1/16S0R0J
R 1520	(B,60,52)	RS1/16S473J
R 1521	(B,60,53)	RS1/16S473J

Circuit Symbol and No.		Part No.
R 1530	(B,55,66)	RS1/16S102J
R 1531	(B,55,56)	RS1/16S104J
R 1532	(B,55,55)	RS1/16S104J
R 1533	(B,55,62)	RS1/16S104J
R 1534	(B,55,61)	RS1/16S104J
R 1540	(B,74,55)	RS1/16S303J
R 1541	(B,70,57)	RS1/16S104J
R 1542	(A,74,56)	RS1/16S471J
R 1543	(A,74,63)	RS1/16S471J
R 1544	(A,75,53)	RS1/16S821J
R 1545	(A,75,65)	RS1/16S821J
R 1546	(A,75,56)	RS1/16S104J
R 1547	(A,75,63)	RS1/16S104J
R 1548	(B,74,63)	RS1/16S303J
R 1549	(B,70,61)	RS1/16S104J
R 1551	(A,43,34)	RS1/16S104J
R 1552	(A,51,31)	RS1/16S104J
R 1553	(A,44,36)	RS1/16S681J
R 1554	(A,53,31)	RS1/16S681J
R 1555	(A,52,38)	RS1/16S681J
R 1556	(A,52,29)	RS1/16S681J
R 1611	(B,103,89)	RS1/16S102J
R 1612	(B,111,89)	RS1/16S102J
R 1613	(B,102,98)	RS1/16S821J
R 1614	(B,106,98)	RS1/16S821J
R 1615	(B,97,98)	RS1/16S104J
R 1616	(B,111,95)	RS1/16S104J
R 1621	(A,100,102)	RS1/16S472J
R 1622	(A,107,100)	RS1/16S472J
R 1623	(B,102,99)	RS1/16S562J
R 1624	(B,107,99)	RS1/16S562J
R 1625	(B,99,102)	RS1/16S472J
R 1626	(B,109,101)	RS1/16S472J
R 1627	(B,97,103)	RS1/16S472J
R 1628	(B,111,101)	RS1/16S472J
R 1629	(B,99,105)	RS1/16S472J
R 1630	(B,109,105)	RS1/16S472J
R 1821	(A,141,49) (EW5)	RS1/16S2702D
R 1822	(A,143,49) (EW5)	RS1/16S4701D
R 1823	(A,127,45) (EW5)	RS1/16S223J
R 1824	(A,137,54) (EW5)	RS1/10S271J
R 1825	(A,127,51) (EW5)	RS1/16S221J
R 1826	(A,126,43) (EW5)	RS1/4SA331J
R 1827	(A,130,43) (EW5)	RS1/4SA331J
R 1840	(A,172,30) (UC)	RS1/16S0R0J
R 1841	(A,172,26) (EW5)	RS1/16S0R0J
R 1842	(B,143,102)	RS1/16S121J
R 1843	(B,143,101)	RS1/16S471J
R 1844	(B,144,99)	RS1/8S101J
R 1845	(B,139,103)	RS1/10S680J
R 1846	(B,135,101)	RS1/10S680J
R 1847	(A,175,104)	RS1/16S223J
R 1848	(B,131,101)	RS1/16S472J
R 1850	(B,44,97)	RS1/16S153J
R 1851	(B,47,98)	RS1/8S821J
R 1852	(B,47,100)	RS1/8S821J
R 1853	(B,62,90)	RS1/16S221J
R 1854	(B,64,90)	RS1/16S821J
R 1855	(B,64,99)	RS1/16S2202D
R 1856	(B,64,97)	RS1/16S2201D
R 1857	(B,62,97)	RS1/16S4301D

Circuit Symbol and No.		Part No.
R 1900	(A,111,38)	RS1/16S0R0J
R 1901	(A,86,38)	RS1/16S0R0J
R 1904	(A,111,40)	RS1/16S750J
R 1906	(A,53,111)	RS1/16S473J
R 1908	(A,69,115)	RS1/16S473J
R 1940	(A,96,51)	RS1/16S220J
R 1941	(A,96,49)	RS1/16S102J
R 1942	(A,96,58)	RS1/16S102J
R 1943	(A,98,47)	RS1/16S223J
R 1944	(A,86,51)	RS1/16S223J
R 1946	(A,97,56)	RS1/16S101J
R 1947	(A,98,50)	RS1/16S101J
R 1948	(A,150,28)	RS1/16S0R0J
R 1960	(B,65,48)	RS1/16S220J
R 1961	(B,50,53)	RS1/16S102J
R 1962	(B,50,48)	RS1/16S102J
R 1963	(B,49,54)	RS1/16S223J
R 1964	(B,51,45)	RS1/16S223J
R 1966	(B,47,53)	RS1/16S101J
R 1967	(B,48,48)	RS1/16S101J
R 2501	(B,25,70)	RS1/16S681J
R 2502	(B,25,67)	RS1/16S681J
R 2503	(B,25,65)	RS1/16S681J
R 2504	(B,25,63)	RS1/16S681J
R 2505	(B,25,61)	RS1/16S681J
R 2506	(B,30,48)	RS1/16S681J
R 2508	(B,28,60)	RS1/16S223J
R 2515	(B,33,38) (EW5)	RS1/16S0R0J
R 2516	(B,34,42) (EW5)	RS1/16S0R0J
R 2531	(A,40,44)	RS1/16S0R0J
R 2532	(A,39,36)	RS1/16S0R0J
R 2535	(A,43,44)	RS1/16S0R0J
R 2536	(A,41,36)	RS1/16S0R0J
R 2550	(A,21,135) (EW5)	RS1/16S105J
R 2551	(B,25,121) (EW5)	RS1/16S821J
R 2552	(B,25,120) (EW5)	RS1/16S330J
R 2553	(B,22,113) (EW5)	RS1/16S151J
R 2554	(B,20,114) (EW5)	RS1/16S681J
R 2555	(B,17,117) (EW5)	RS1/16S152J
R 2556	(B,17,118) (EW5)	RS1/16S680J
R 2557	(B,15,117) (EW5)	RS1/16S151J
R 2558	(B,14,113) (EW5)	RS1/16S151J
R 2559	(B,22,131) (EW5)	RS1/16S332J
R 2560	(B,17,121) (EW5)	RS1/16S101J
R 2561	(B,12,112) (EW5)	RS1/16S680J
R 2562	(B,35,86) (UC)	RS1/4S0R0J
R 2563	(B,25,59) (EW5)	RS1/16S681J
R 2564	(B,12,116) (EW5)	RS1/8S0R0J
R 2800	(B,147,69) (EW5)	RS1/16S152J
R 2801	(B,149,78) (EW5)	RS1/16S151J
R 2802	(B,150,69) (EW5)	RS1/16S681J
R 2806	(B,140,47) (EW5)	RS1/10S391J
R 2807	(B,149,53) (EW5)	RS1/16S221J
R 2808	(B,142,61) (EW5)	RS1/16S473J

CAPACITORS

C 1002	(B,152,147)	CKSRYB102K50
C 1003	(B,152,117)	CKSRYB102K50
C 1006	(B,151,124)	CKSRYB102K50

Circuit Symbol and No.			Part No.
C 1011	(A,121,89)	2 200 µF/16 V	CCH1659(P35)
C 1013	(A,138,89)	10 000 µF/16 V	CCH1664(P30)
C 1015	(B,124,114)		CKSRYB102K50
C 1017	(A,130,116)		CKSQYB105K16
C 1018	(A,134,112)		CKSRYB102K50
C 1019	(A,155,104)	3 300 µF/16 V	CCH1018(P30)
C 1020	(B,152,144)		CKSRYB392K50
C 1021	(B,152,128)		CKSRYB392K50
C 1022	(B,150,144)		CKSRYB392K50
C 1023	(B,150,128)		CKSRYB392K50
C 1024	(B,149,144)		CKSRYB392K50
C 1025	(B,148,128)		CKSRYB392K50
C 1026	(B,144,144)		CKSRYB392K50
C 1027	(B,146,128)		CKSRYB392K50
C 1030	(A,53,120)		CKSRYF103Z50
C 1050	(B,52,138)		CKSRYB102K50
C 1051	(B,55,122)		CKSRYB102K50
C 1071	(A,136,135)		CKSRYB102K50
C 1200	(A,92,21)		CEVW101M16
C 1201	(A,100,23)		CEVW101M16
C 1202	(A,114,24)		CKSRYB104K25
C 1203	(A,109,23)		CEVW101M16
C 1204	(A,121,29)		CKSRYB104K25
C 1205	(A,118,23)		CEVW101M16
C 1209	(A,84,20)		CKSRYB104K25
C 1210	(A,80,24)		CEVW101M16
C 1211	(A,79,35)		CEVWNP100M10
C 1212	(A,109,45)		CEVWNP100M10
C 1213	(A,106,50)		CEVWNP100M10
C 1214	(B,68,16)		CKSRYB104K25
C 1215	(B,73,21)		CCSRCH5R0C50
C 1216	(A,69,25)		CKSRYB102K50
C 1217	(B,102,18)		CCSRCH101J50
C 1218	(A,68,22)		CEVW100M16
C 1219	(A,89,32)		CEVWNP100M10
C 1220	(A,103,44)		CEVWNP100M10
C 1221	(A,103,34)		CEVW470M16
C 1222	(B,107,24)		CKSRYB104K25
C 1223	(A,125,33)		CEVWNP100M10
C 1225	(B,97,19)		CKSRYB104K25
C 1226	(A,95,31)		CEVW470M16
C 1227	(B,93,18)		CKSRYB104K25
C 1230	(A,117,34)		CEVW470M16
C 1231	(B,117,29)		CKSRYB104K25
C 1232	(A,124,111)		CEVW220M16
C 1233	(A,117,110)		CEVW101M16
C 1234	(A,134,33)		CEVWNP100M10
C 1235	(B,122,103)		CKSRYB104K25
C 1236	(A,126,103)		CEVW101M16
C 1237	(A,127,67)		CEVW101M16
C 1238	(A,132,67)		CKSRYB104K25
C 1239	(A,135,64)		CKSRYB104K25
C 1240	(A,142,61)	100 µF/16 V	CCH1565
C 1241	(A,136,61)		CKSRYB105K10
C 1242	(B,134,62)		CKSRYB153K25
C 1250	(A,105,62)		CEVWNP100M10
C 1251	(A,80,40)		CEVWNP100M10
C 1270	(B,123,127)	10 µF	CCG1171
C 1271	(B,125,127)	10 µF	CCG1171
C 1272	(B,127,125)		CKSRYB473K50

Circuit Symbol and No.			Part No.
C 1273	(B,117,118)		CCSRCH5R0C50
C 1275	(B,121,109)		CKSRYB105K10
C 1276	(A,119,118)		CEVW100M16
C 1277	(B,118,105)		CKSRYB104K16
C 1350	(B,70,17)		CKSRYB104K50
C 1401	(A,130,77)		CEVW220M16
C 1402	(A,116,94)		CKSRYB102K50
C 1403	(A,168,94)		CCSRCH102J50
C 1404	(A,162,98)		CKSQYF334Z25
C 1405	(A,117,100)		CEVW101M16
C 1419	(A,101,85)		CKSRYB104K25
C 1420	(A,110,74)		CEVW100M16
C 1421	(A,94,93)		CEVW100M16
C 1423	(A,100,98)	10 µF	CCG1138
C 1424	(A,105,96)	10 µF	CCG1138
C 1425	(A,99,78)		CEVW100M16
C 1426	(A,100,86)		CKSRYB104K25
C 1427	(B,110,124)		CKSRYB222K50
C 1428	(B,113,119)		CKSRYB222K50
C 1429	(A,107,82)		CEVW100M16
C 1430	(A,105,119)		CEVW330M10
C 1431	(B,90,122)		CKSRYB103K50
C 1432	(A,99,81)		CKSRYB104K25
C 1433	(A,102,72)		CKSRYB104K25
C 1434	(A,106,72)		CKSRYB104K25
C 1435	(A,87,111)		CEVW100M16
C 1436	(A,79,112)		CEVW100M16
C 1437	(A,86,116)		CEVW100M16
C 1438	(A,79,117)		CEVW100M16
C 1439	(B,78,103)		CKSRYB222K50
C 1440	(B,80,109)		CKSRYB222K50
C 1441	(B,80,111)		CKSRYB222K50
C 1442	(B,78,118)		CKSRYB222K50
C 1443	(A,98,115)		CEVW470M16
C 1451	(A,90,65)		CKSQYB105K10
C 1452	(A,92,63)		CKSQYB105K10
C 1453	(B,101,66)		CKSQYB475K10
C 1454	(B,105,62)		CKSQYB475K10
C 1457	(A,88,65)		CKSQYB104K16
C 1458	(A,96,64)		CKSQYB104K16
C 1459	(A,98,61)		CKSQYB475K10
C 1460	(A,109,65)		CKSQYB475K10
C 1461	(B,115,126)		CKSRYB104K25
C 1462	(A,90,129)		CKSRYB105K10
C 1463	(A,95,125)		CKSQYB105K16
C 1464	(A,91,123)		CKSQYB105K16
C 1465	(A,93,123)		CKSQYB105K16
C 1466	(A,86,122)		CKSQYB105K16
C 1467	(A,95,129)		CKSRYB105K10
C 1468	(A,91,126)		CKSRYB105K10
C 1469	(A,91,127)		CKSRYB105K10
C 1470	(A,86,123)		CKSRYB105K10
C 1471	(A,108,129)		CKSQYB225K10
C 1472	(B,102,126)		CKSRYB104K25
C 1473	(A,87,130)		CKSRYB104K25
C 1474	(A,106,127)		CKSQYB225K10
C 1475	(A,82,122)		CEVW100M16
C 1476	(A,111,65)		CKSQYB475K10
C 1477	(A,100,61)		CKSQYB475K10
C 1478	(B,113,77)		CKSQYB475K10

Circuit Symbol and No.		Part No.
C 1479	(B,94,77)	CKSQYB475K10
C 1480	(B,113,75)	CKSQYB475K10
C 1481	(B,94,75)	CKSQYB475K10
C 1482	(B,113,73)	CKSQYB475K10
C 1483	(B,94,72)	CKSQYB475K10
C 1484	(B,113,70)	CKSQYB475K10
C 1485	(B,94,70)	CKSQYB475K10
C 1486	(A,75,74)	CEVW220M16
C 1487	(B,73,76)	CKSRYB105K10
C 1488	(B,80,76)	CKSRYB104K50
C 1489	(A,80,82)	CEVW220M16
C 1490	(B,81,76)	CCSRCH471J50
C 1491	(B,80,72)	CCSRCH471J50
C 1492	(B,74,82)	CKSRYB105K10
C 1493	(B,75,69)	CKSRYB105K10
C 1494	(B,69,76)	CCSRCH471J50
C 1495	(B,70,72)	CCSRCH471J50
C 1501	(A,73,36)	CKSRYB102K50
C 1502	(A,68,33)	CEVW101M16
C 1503	(A,60,33)	CEVW101M16
C 1504	(A,60,28)	CKSRYB104K25
C 1506	(B,49,30)	CKSRYB105K10
C 1507	(B,50,27)	CKSRYB105K10
C 1508	(B,59,27)	CCSRCH101J50
C 1517	(A,96,60)	CKSRYB105K10
C 1520	(A,66,54) 10 µF	CCG1203
C 1521	(A,66,56) 10 µF	CCG1203
C 1522	(A,66,62) 10 µF	CCG1203
C 1523	(A,66,63) 10 µF	CCG1203
C 1525	(B,59,56)	CKSRYB104K50
C 1530	(A,60,59)	CEVW100M16
C 1531	(A,56,58)	CKSRYB103K50
C 1540	(A,62,52)	CKSQYB475K10
C 1541	(A,64,65)	CKSQYB475K10
C 1542	(B,75,59)	CKSRYB103K50
C 1543	(A,71,55)	CEVW100M16
C 1544	(A,71,64)	CEVW100M16
C 1551	(A,42,30)	CEVWNP100M10
C 1552	(A,47,30)	CEVWNP100M10
C 1554	(A,54,30)	CKSRYB562K50
C 1555	(A,53,37)	CKSRYB562K50
C 1556	(A,52,26)	CKSRYB272K50
C 1557	(A,55,39)	CKSRYB272K50
C 1621	(B,100,99)	CKSRYB105K10
C 1622	(B,109,97)	CKSRYB105K10
C 1623	(B,98,102)	CCSRCH221J50
C 1624	(B,110,101)	CCSRCH221J50
C 1625	(B,98,105)	CCSRCH221J50
C 1626	(B,110,105)	CCSRCH221J50
C 1627	(A,107,103)	CKSRYB104K25
C 1628	(A,105,109)	CEVW101M16
C 1809	(B,143,113)	CKSRYB104K25
C 1811	(B,141,118)	CKSRYB102K50
C 1812	(B,145,124)	CKSRYB102K50
C 1821	(A,141,47) (EW5)	CCSRCH102J50
C 1822	(A,141,50) (EW5)	CCSRCH102J50
C 1823	(A,137,43) (EW5)	CEVW101M16
C 1824	(A,117,52) (EW5)	CEVW101M16
C 1840	(B,143,105)	CKSRYB104K16
C 1841	(B,140,105)	CKSRYB103K50
C 1842	(A,119,77)	CEHVW471M16
C 1843	(A,141,110)	CEHVW331M16
C 1850	(B,44,93)	CKSRYB104K25
C 1851	(B,44,95)	CKSRYB103K50
C 1852	(A,45,92)	CEVW101M16
C 1853	(B,62,99)	CKSRYB102K50
C 1854	(B,61,99)	CKSRYB103K50
C 1855	(A,45,100)	CEVW101M16
C 1900	(A,112,38)	CKSQYB475K10
C 1901	(A,109,38)	CKSQYB475K10
C 1903	(A,67,114)	CKSQYB475K10
C 1904	(A,64,113)	CKSQYB475K10
C 1905	(A,52,111)	CKSRYB473K50
C 1906	(A,92,37)	CKSRYB104K25
C 1910	(A,113,34)	CKSRYB104K25
C 1940	(A,96,46)	CKSRYB105K10
C 1941	(A,91,53)	CEVW220M16
C 1942	(A,93,49)	CKSRYB104K50
C 1943	(A,91,42)	CKSRYB105K10
C 1944	(A,83,46)	CEVW220M16
C 1945	(A,93,58)	CKSRYB105K10
C 1946	(A,97,47)	CCSRCH471J50
C 1947	(A,85,51)	CCSRCH471J50
C 1960	(A,60,47)	CEVW220M16
C 1961	(B,62,46)	CKSRYB104K50
C 1962	(B,54,47)	CKSRYB105K10
C 1963	(B,52,52)	CKSRYB105K10
C 1964	(A,67,48)	CEVW220M16
C 1965	(B,51,50)	CKSRYB105K10
C 1966	(B,49,56)	CCSRCH471J50
C 1967	(B,51,47)	CCSRCH471J50
C 2501	(A,35,73)	CKSRYB103K50
C 2502	(A,42,69)	CEVW221M10
C 2503	(A,35,68)	CKSRYB103K50
C 2504	(B,25,44)	CKSRYB103K50
C 2506	(B,25,41) 10 µF	CCG1171
C 2507	(A,33,42)	CEVW470M16
C 2508	(B,30,57)	CKSRYB103K50
C 2509	(A,30,52)	CKSRYB103K50
C 2512	(A,35,51)	CEVW470M16
C 2514	(A,51,69)	CEVW221M10
C 2515	(B,34,40) (EW5)	CKSRYB102K50
C 2516	(B,32,41) (EW5)	CKSRYB102K50
C 2550	(A,24,133) (EW5)	CCSRCH270J50
C 2551	(A,26,132) (EW5)	CCSRCH220J50
C 2552	(A,26,127) (EW5)	CCSRCH470J50
C 2555	(B,16,114) (EW5)	CKSRYB103K50
C 2556	(B,24,111) (EW5)	CCSRCH270J50
C 2557	(B,25,115) (EW5)	CCSRCH150J50
C 2558	(A,21,131) (EW5)	CCSRCH270J50
C 2559	(A,23,127) (EW5)	CCSRCH330J50
C 2560	(B,24,129) (EW5)	CKSRYB103K50
C 2561	(A,22,110) (EW5)	CKSRYB103K50
C 2562	(B,17,115) (EW5)	CKSRYB222K50
C 2563	(B,16,113) (EW5)	CKSRYB103K50
C 2564	(B,14,119) (EW5)	CKSRYB222K50
C 2565	(A,15,119) (EW5)	CKSRYB222K50
C 2566	(A,14,129) (EW5)	CKSRYB103K50
C 2567	(B,12,120) (EW5)	CKSRYB222K50
C 2568	(B,26,112) (EW5)	CCSRCH220J50

Circuit Symbol and No.		Part No.
C 2800	(B,148,69) (EW5)	CKSRYB222K50
C 2801	(B,148,67) (EW5)	CKSRYB103K50
C 2802	(B,149,79) (EW5)	CCSRCH220J50
C 2804	(A,145,35) (EW5)	CEVW100M16
C 2805	(B,144,45) (EW5)	CKSRYB473K50
C 2806	(B,147,45) (EW5)	CKSRYB103K50
C 2807	(A,145,44) (EW5)	CEVW220M16
C 2808	(B,143,51) (EW5)	CKSRYB103K50
C 2809	(B,143,53) (EW5)	CKSRYB221K50
C 2810	(B,145,61) (EW5)	CKSRYB103K50
C 2811	(B,139,53) (EW5)	CKSRYB473K50

D

Unit Number : CWX3301
Unit Name : DVD Core Unit

MISCELLANEOUS

IC 1101	(A,37,85) IC	AN8703FH
IC 1201	(A,76,64) IC	BA5985FM
IC 1202	(A,62,64) IC	AN8471SAT1
IC 1301	(A,38,58) IC	MNZS26EDCUB
IC 1401	(B,33,41) IC	TC74LCX245FTS1
IC 1402	(B,28,25) IC	TC7SH04FUS1
IC 1403	(B,35,19) IC	TC74LCX244FTS1
IC 1405	(A,38,18) IC	TC74LCX244FTS1
IC 1501	(B,87,22) IC	K4S641632H-TC75
IC 1502	(A,94,45) IC	TC74VCX74FT
IC 1503	(A,85,25) IC	MN677531KAUB
IC 1504	(A,85,48) IC	TC74VCX74FT
IC 1505	(B,95,39) IC	TC7PA04FU
IC 1507	(A,60,54) IC	SM8707FV
IC 1602	(B,65,34) IC	NJM2100M
IC 1604	(B,58,44) IC	NJM2100V
IC 1605	(B,59,29) IC	PCM1742KE
IC 1701	(A,114,28) IC	PE5511A
IC 1702	(A,59,38) IC	M5M5V216ATP-70HI
IC 1705	(B,114,27) IC	PD6527A
IC 1706	(A,127,40) IC	TC7SH08FUS1
Q 1101	(B,59,108) Transistor	2SB1260
Q 1102	(B,59,102) Transistor	2SB1260
Q 1103	(A,45,108) Transistor	UN2211
Q 1104	(A,48,109) Transistor	2SB709A
Q 1105	(A,51,109) Transistor	2SD601A
Q 1201	(A,30,19) Transistor	DTC124EU
Q 1501	(A,87,7) Transistor	2SA1037K
D 1101	(B,55,108) Diode	1SS355
D 1102	(B,55,102) Diode	1SS355
D 1301	(A,26,43) Diode	UDZS2R7(B)
D 1302	(B,32,84) Chip LED	CL205IRXTU
L 1301	(A,25,38) Inductor	CTF1409
L 1302	(A,24,41) Inductor	CTF1394
L 1303	(B,30,72) Inductor	CTF1395
L 1305	(A,23,76) Inductor	CTF1409
L 1504	(A,76,48) Inductor	CTF1394
L 1505	(B,80,39) Inductor	CTF1409
L 1506	(A,98,44) Inductor	CTF1473
L 1507	(A,89,51) Inductor	CTF1473
L 1508	(B,98,39) Inductor	CTF1473
L 1509	(A,82,6) Chip Ferrite Bead	CTF1399

Circuit Symbol and No.		Part No.
L 1510	(B,80,9) Inductor	CTF1409
L 1518	(B,70,22) Inductor	CTF1385
L 1520	(A,65,55) Chip Ferrite Bead	CTF1399
L 1522	(B,82,36) Inductor	CTF1395
L 1605	(B,58,35) Inductor	CTF1379
L 1701	(A,105,15) Inductor	CTF1395
L 1702	(A,68,40) Inductor	CTF1409
L 1703	(B,122,39) Inductor	CTF1473
L 1704	(A,129,27) Inductor	CTF1473
X 1501	(A,55,54) Radiator 27 MHz	CSS1609
X 1701	(A,129,31) Ceramic Resonator 4.97 MHz	CSS1575
VR1502	(A,96,7) Semi-fixed 2.2 kΩ(B)	CCP1444

RESISTORS

R 1101	(B,51,106)	RS1/16SS101J
R 1102	(B,52,108)	RS1/16SS3R9J
R 1103	(B,51,110)	RS1/16SS3R9J
R 1104	(B,52,110)	RS1/16SS3R9J
R 1105	(B,53,110)	RS1/16SS3R9J
R 1106	(B,51,108)	RS1/16SS330J
R 1107	(B,48,102)	RS1/16SS3R9J
R 1108	(B,49,103)	RS1/16SS3R9J
R 1109	(B,51,103)	RS1/16SS3R9J
R 1110	(B,53,104)	RS1/16SS3R9J
R 1111	(A,44,111)	RS1/16SS272J
R 1112	(A,46,111)	RS1/16SS472J
R 1113	(A,49,111)	RS1/16SS102J
R 1124	(A,29,86)	RS1/16SS273J
R 1125	(A,29,85)	RS1/16SS273J
R 1126	(B,35,87)	RS1/16SS224J
R 1130	(A,25,84)	RS1/16SS0R0J
R 1131	(A,29,84)	RS1/16SS0R0J
R 1132	(A,25,82)	RS1/16SS0R0J
R 1133	(A,28,83)	RS1/16S2402D
R 1134	(A,28,81)	RS1/16S1002D
R 1135	(A,26,81)	RS1/16S2702D
R 1140	(A,46,84)	RS1/16SS105J
R 1141	(A,45,86)	RS1/16SS105J
R 1142	(B,41,87)	RS1/16SS105J
R 1151	(A,35,94)	RS1/16SS103J
R 1152	(A,34,93)	RS1/16SS103J
R 1201	(A,82,54)	RS1/16SS221J
R 1202	(A,81,54)	RS1/16SS393J
R 1203	(A,80,54)	RS1/16SS303J
R 1205	(A,77,53)	RS1/16SS0R0J
R 1206	(A,77,52)	RS1/16SS102J
R 1209	(A,68,71)	RS1/16SS221J
R 1210	(A,69,61)	RS1/16SS393J
R 1211	(A,69,60)	RS1/16SS393J
R 1212	(A,69,57)	RS1/16SS393J
R 1213	(A,69,56)	RS1/16SS393J
R 1214	(A,71,54)	RS1/16SS221J
R 1215	(A,67,57)	RS1/16SS1R0J
R 1216	(A,67,58)	RS1/16SS1R0J
R 1218	(A,53,69)	RS1/16SS221J
R 1219	(A,52,73)	RS1/16SS221J
R 1220	(A,68,70)	RS1/16SS221J
R 1221	(A,30,16)	RS1/16SS822J
R 1222	(A,31,16)	RS1/16SS822J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 1223	(A,32,16)	RS1/16SS822J	R 1409	(B,38,11)	RS1/16SS820J
R 1224	(A,30,14)	RS1/16SS563J	R 1410	(B,38,13)	RS1/16SS820J
R 1225	(A,31,14)	RS1/16SS243J	R 1411	(B,36,13)	RAB4CQ0R0J
R 1226	(A,32,14)	RS1/16SS473J	R 1412	(B,35,12)	RS1/16SS100J
R 1227	(A,29,17)	RS1/16SS473J	R 1413	(B,34,12)	RS1/16SS820J
R 1228	(A,67,56)	RS1/16SS1R0J	R 1414	(B,32,13)	RAB4CQ820J
R 1229	(A,67,55)	RS1/16SS1R0J	R 1415	(B,26,8)	RS1/16SS103J
R 1230	(A,64,59)	RS1/16SS1R0J	R 1418	(B,27,27)	RS1/16SS221J
R 1232	(A,33,16)	RS1/16SS822J	R 1421	(A,33,19)	RS1/16SS221J
R 1233	(A,33,14)	RS1/16SS243J	R 1423	(A,43,16)	RS1/16SS221J
R 1234	(B,30,81)	RS1/16S391J	R 1424	(A,43,19)	RS1/16SS221J
R 1235	(B,28,81)	RS1/16S471J	R 1425	(A,30,43)	RAB4CQ221J
R 1236	(A,65,70)	RS1/16SS513J	R 1426	(A,30,40)	RAB4CQ221J
R 1237	(A,60,59)	RS1/16SS513J	R 1501	(A,102,25)	RS1/16SS220J
R 1301	(A,26,40)	RS1/16SS222J	R 1502	(B,97,12)	RAB4CQ220J
R 1321	(B,41,62)	RS1/16SS104J	R 1503	(A,55,50)	RS1/16S101J
R 1322	(B,41,63)	RS1/16SS0R0J	R 1504	(B,97,15)	RAB4CQ220J
R 1323	(B,41,64)	RS1/16SS221J	R 1505	(A,59,48)	RS1/16S101J
R 1324	(B,41,65)	RS1/16SS221J	R 1508	(B,97,17)	RAB4CQ220J
R 1334	(A,48,74)	RS1/16SS221J	R 1512	(B,97,20)	RAB4CQ220J
R 1336	(B,48,74)	RS1/16SS103J	R 1518	(B,97,22)	RAB4CQ220J
R 1337	(B,47,74)	RS1/16SS103J	R 1522	(B,97,26)	RAB4CQ220J
R 1338	(B,40,67)	RS1/16SS472J	R 1523	(B,83,35)	RS1/16S0R0J
R 1339	(A,38,74)	RS1/16SS273J	R 1527	(B,96,29)	RAB4CQ220J
R 1340	(B,39,67)	RS1/16SS472J	R 1533	(A,89,45)	RS1/16SS201J
R 1341	(A,37,74)	RS1/16SS273J	R 1534	(B,97,34)	RAB4CQ220J
R 1342	(B,41,67)	RS1/16SS273J	R 1538	(B,94,34)	RAB4CQ220J
R 1344	(B,38,67)	RS1/16SS273J	R 1539	(B,91,35)	RS1/16SS221J
R 1349	(A,31,73)	RS1/16SS562J	R 1542	(A,87,44)	RS1/16SS103J
R 1350	(A,31,75)	RS1/16SS242J	R 1543	(A,89,48)	RS1/16SS680J
R 1352	(A,29,75)	RS1/16S2702D	R 1544	(A,86,44)	RS1/16SS0R0J
R 1353	(A,23,69)	RS1/16SS102J	R 1545	(A,84,44)	RS1/16SS0R0J
R 1360	(A,22,63)	RS1/16SS153J	R 1549	(A,49,37)	RS1/16SS0R0J
R 1361	(B,30,58)	RS1/16SS105J	R 1550	(A,87,41)	RS1/16SS0R0J
R 1362	(B,31,54)	RS1/16SS473J	R 1551	(A,85,41)	RS1/16SS0R0J
R 1363	(B,35,54)	RS1/16SS101J	R 1552	(A,89,6)	RS1/16SS471J
R 1364	(B,31,53)	RS1/16SS123J	R 1553	(A,92,6)	RS1/16S68R0D
R 1365	(B,35,53)	RS1/16SS101J	R 1554	(A,90,6)	RS1/16SS471J
R 1367	(B,31,52)	RS1/16SS473J	R 1555	(A,89,8)	RS1/16SS0R0J
R 1369	(B,31,51)	RS1/16SS473J	R 1556	(A,84,6)	RS1/16SS750J
R 1375	(B,27,46)	RS1/16SS103J	R 1557	(A,83,44)	RS1/16SS0R0J
R 1376	(B,30,46)	RS1/16SS103J	R 1558	(A,82,8)	RS1/16SS622J
R 1377	(B,28,46)	RS1/16SS103J	R 1559	(A,80,42)	RAB4CQ0R0J
R 1378	(B,29,46)	RS1/16SS103J	R 1560	(A,99,8)	RS1/16SS122J
R 1379	(B,32,46)	RS1/16SS103J	R 1561	(A,99,6)	RS1/16SS162J
R 1380	(B,36,50)	RS1/16SS103J	R 1562	(A,82,44)	RS1/16SS0R0J
R 1383	(B,48,49)	RS1/16SS103J	R 1563	(A,100,5)	RS1/16SS4R7J
R 1391	(B,51,44)	RS1/16SS103J	R 1564	(A,83,42)	RAB4CQ0R0J
R 1392	(B,53,44)	RS1/16SS103J	R 1565	(B,77,14)	RS1/16S101J
R 1393	(B,50,44)	RS1/16SS103J	R 1566	(B,78,15)	RS1/16S101J
R 1394	(B,52,44)	RS1/16SS471J	R 1567	(A,77,42)	RAB4CQ0R0J
R 1395	(B,30,64)	RS1/16SS0R0J	R 1568	(B,71,19)	RS1/16S101J
R 1396	(B,30,62)	RS1/16SS0R0J	R 1569	(B,71,20)	RS1/16S101J
R 1401	(B,47,7)	RS1/16SS101J	R 1570	(B,71,17)	RS1/16S101J
R 1403	(B,48,12)	RAB4CQ220J	R 1571	(B,70,23)	RS1/16S220J
R 1404	(B,46,12)	RAB4CQ220J	R 1572	(A,75,42)	RAB4CQ0R0J
R 1405	(B,43,12)	RAB4CQ220J	R 1573	(B,74,13)	RS1/16SS473J
R 1406	(B,41,12)	RAB4CQ220J	R 1574	(A,72,42)	RAB4CQ0R0J
R 1407	(B,39,13)	RS1/16SS220J	R 1575	(B,73,31)	RAB4CQ0R0J
R 1408	(B,39,11)	RS1/16SS103J	R 1576	(B,73,34)	RAB4CQ0R0J

Circuit Symbol and No.		Part No.
R 1577	(B,73,36)	RAB4CQ0R0J
R 1578	(B,70,24)	RS1/16SS472J
R 1579	(B,72,22)	RS1/16SS101J
R 1587	(B,78,16)	RS1/16SS101J
R 1595	(B,90,39)	RS1/16SS472J
R 1596	(B,91,39)	RS1/16SS472J
R 1597	(A,62,49)	RS1/16SS104J
R 1598	(A,62,58)	RS1/16SS270J
R 1601	(B,70,28)	RS1/16SS821J
R 1602	(B,70,31)	RS1/16SS821J
R 1603	(B,55,26)	RS1/16SS0R0J
R 1604	(B,58,36)	RS1/16SS0R0J
R 1605	(B,63,27)	RS1/16SS102J
R 1606	(B,61,41)	RS1/16SS102J
R 1607	(B,63,28)	RS1/16SS222J
R 1608	(B,61,40)	RS1/16SS222J
R 1609	(B,64,27)	RS1/16SS472J
R 1610	(B,63,41)	RS1/16SS472J
R 1611	(B,64,28)	RS1/16SS472J
R 1612	(B,63,40)	RS1/16SS472J
R 1613	(B,66,29)	RS1/16SS103J
R 1614	(B,65,40)	RS1/16SS103J
R 1615	(B,66,30)	RS1/16SS472J
R 1616	(B,65,39)	RS1/16SS472J
R 1626	(B,53,26)	RS1/16SS0R0J
R 1627	(B,52,26)	RS1/16SS0R0J
R 1628	(B,51,26)	RS1/16SS0R0J
R 1637	(B,107,10)	RS1/16SS104J
R 1638	(B,109,10)	RS1/16SS104J
R 1642	(B,118,10)	RS1/16SS221J
R 1643	(B,119,10)	RS1/16SS221J
R 1645	(B,114,11)	RS1/16SS0R0J
R 1647	(B,120,10)	RS1/16SS221J
R 1648	(B,121,11)	RS1/16SS221J
R 1649	(B,114,9)	RS1/16SS0R0J
R 1650	(B,113,11)	RS1/16SS0R0J
R 1651	(B,111,9)	RS1/16SS0R0J
R 1653	(B,50,26)	RS1/16SS473J
R 1656	(B,124,12)	RS1/16SS102J
R 1701	(A,110,14)	RS1/16SS473J
R 1704	(A,121,14)	RS1/16SS473J
R 1706	(A,125,17)	RS1/16SS104J
R 1707	(A,122,14)	RS1/16SS221J
R 1708	(B,121,21)	RS1/16SS221J
R 1714	(A,128,24)	RS1/16SS221J
R 1715	(A,129,24)	RS1/16SS473J
R 1716	(B,122,26)	RS1/16SS221J
R 1717	(B,121,26)	RS1/16SS104J
R 1718	(B,127,26)	RS1/16SS104J
R 1720	(B,125,27)	RS1/16SS104J
R 1721	(B,125,28)	RS1/16SS104J
R 1722	(B,121,32)	RS1/16SS104J
R 1723	(B,129,27)	RS1/16SS104J
R 1724	(B,128,31)	RS1/16SS222J
R 1725	(A,122,42)	RS1/16SS223J
R 1726	(B,54,32)	RS1/16SS104J
R 1727	(B,106,33)	RS1/16SS104J
R 1728	(B,107,33)	RS1/16SS104J
R 1730	(B,125,33)	RS1/16SS221J
R 1731	(B,121,34)	RS1/16SS104J

Circuit Symbol and No.		Part No.
R 1732	(B,114,39)	RS1/16SS0R0J
R 1733	(A,102,43)	RS1/16SS104J
R 1734	(B,122,33)	RS1/16SS221J
R 1735	(B,122,36)	RS1/16SS104J
R 1736	(B,125,35)	RS1/16SS104J
R 1737	(A,104,40)	RS1/16SS104J
R 1738	(A,104,43)	RS1/16SS104J
R 1739	(A,114,40)	RS1/16SS330J
R 1740	(A,122,43)	RS1/16SS0R0J
R 1741	(A,117,40)	RS1/16SS0R0J
R 1742	(B,107,17)	RS1/16SS473J
R 1746	(A,106,43)	RS1/16SS104J
R 1748	(A,116,40)	RS1/16SS104J
R 1749	(A,124,42)	RS1/16SS103J
R 1750	(A,124,41)	RS1/16SS473J
R 1751	(A,124,40)	RS1/16SS103J
R 1752	(B,121,18)	RS1/16SS104J
R 1753	(A,112,40)	RS1/16SS104J
R 1754	(A,112,41)	RS1/16SS104J
R 1756	(A,115,40)	RS1/16SS104J
R 1757	(A,115,42)	RS1/16SS472J
R 1758	(A,116,42)	RS1/16SS104J
R 1759	(A,117,42)	RS1/16SS104J
R 1760	(A,121,44)	RS1/16S1002D
R 1761	(B,122,48)	RS1/16SS105J
R 1762	(A,117,14)	RS1/16SS473J
R 1763	(A,106,40)	RS1/16SS104J
R 1764	(A,116,14)	RS1/16SS104J
R 1765	(A,120,14)	RS1/16SS104J
R 1767	(B,122,32)	RS1/16SS104J
R 1768	(A,124,43)	RS1/16SS473J
R 1769	(A,113,14)	RS1/16SS104J
R 1770	(B,121,22)	RS1/16SS473J
R 1771	(B,121,23)	RS1/16SS473J
R 1773	(B,124,16)	RS1/16SS103J
R 1790	(A,50,40)	RS1/16SS473J
R 1792	(A,50,41)	RS1/16SS0R0J
R 1794	(A,121,41)	RS1/16SS222J
R 1795	(A,114,14)	RS1/16SS104J
R 1796	(A,124,14)	RS1/16SS473J
R 1797	(A,115,14)	RS1/16SS104J
R 1798	(A,124,42)	RS1/16SS104J
R 1801	(A,112,44)	RS1/16SS104J
R 1802	(A,125,40)	RS1/16SS104J
R 1803	(A,125,39)	RS1/16SS104J
R 1804	(B,127,45)	RS1/16SS102J
R 1805	(B,128,42)	RS1/16SS102J

CAPACITORS

C 1101	(B,37,106)	CSZSC470M16
C 1102	(A,48,103)	CSZSR470M6R3
C 1103	(B,53,106)	CKSSYB104K10
C 1104	(B,54,108)	CKSSYB103K16
C 1105	(A,44,103)	CSZSR101M6R3
C 1106	(B,47,102)	CKSSYB104K10
C 1107	(B,54,102)	CKSSYB103K16
C 1108	(B,52,106)	CKSSYB104K10
C 1109	(A,48,107)	CKSRYB473K25
C 1110	(A,52,106)	CKSRYB473K25
C 1111	(B,62,102)	CKSSYB103K16

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
C 1112	(A,47,100)	CKSRYB105K10	C 1336	(A,24,59)	CKSSYB104K10
C 1113	(A,47,99)	CKSRYB105K10	C 1337	(B,35,56)	CKSRYB102K50
C 1114	(A,50,101)	CKSSYB103K16	C 1338	(B,31,56)	CKSRYB102K50
C 1121	(B,35,88)	CKSSYB221K50	C 1339	(A,22,56)	CKSRYB102K50
C 1122	(A,28,80)	CKSRYB393K16	C 1340	(A,24,56)	CKSSYB104K10
C 1124	(B,37,81)	CKSSYB221K50	C 1341	(A,22,55)	CCSSCH101J50
C 1125	(A,38,77)	CKSSYB104K10	C 1342	(A,22,53)	CKSRYB391K50
C 1126	(A,39,77)	CKSSYB104K10	C 1343	(A,22,51)	CKSRYB471K50
C 1127	(A,40,77)	CKSSYB104K10	C 1344	(A,22,50)	CKSRYB331K50
C 1128	(A,42,77)	CKSRYB472K50	C 1346	(A,24,50)	CKSRYB224K10
C 1129	(A,44,82)	CKSSYB104K10	C 1347	(A,33,44)	CKSSYB104K10
C 1132	(A,46,85)	CKSRYB561K50	C 1348	(A,37,44)	CKSSYB104K10
C 1133	(A,46,87)	CKSRYB561K50	C 1349	(A,39,44)	CKSSYB104K10
C 1134	(A,46,88)	CKSRYB273K16	C 1350	(A,42,44)	CKSSYB104K10
C 1135	(A,45,90)	CKSSYB473K10	C 1351	(A,46,44)	CKSSYB104K10
C 1136	(A,45,90)	CKSSYB104K10	C 1352	(A,48,44)	CKSSYB104K10
C 1137	(A,45,91)	CKSSYB104K10	C 1401	(B,46,7)	CCSSCH181J25
C 1138	(B,37,87)	CKSSYB104K10	C 1402	(B,38,39)	CKSSYB104K10
C 1139	(B,39,88)	CKSSYB104K10	C 1403	(B,28,23)	CKSSYB104K10
C 1201	(A,82,58)	CKSSYB104K10	C 1404	(B,32,23)	CKSSYB104K10
C 1204	(B,23,55)	CEVW101M16	C 1406	(A,43,21)	CKSSYB104K10
C 1205	(A,83,67)	CKSRYB104K16	C 1501	(B,79,12)	CKSRYB224K10
C 1206	(A,83,69)	CKSRYB103K50	C 1502	(B,80,14)	CKSRYB224K10
C 1207	(A,83,70)	CKSRYB103K50	C 1503	(B,80,19)	CKSRYB224K10
C 1208	(A,70,61)	CCSSCH5R0C50	C 1504	(B,80,23)	CKSRYB224K10
C 1209	(A,70,57)	CCSSCH470J50	C 1505	(B,86,35)	CKSRYB224K10
C 1213	(A,55,68)	CKSRYB104K25	C 1507	(B,95,17)	CKSRYB224K10
C 1214	(A,56,68)	CKSRYB104K25	C 1508	(B,95,22)	CKSRYB224K10
C 1215	(A,57,59)	CKSSYB104K10	C 1510	(B,79,33)	CSZSC101M10
C 1216	(A,55,61)	CSZSC470M16	C 1513	(B,100,13)	CKSRYB224K10
C 1217	(A,67,59)	CKSRYB104K25	C 1514	(B,101,20)	CKSRYB224K10
C 1218	(A,67,51)	CSZSC470M16	C 1515	(B,100,15)	CKSRYB224K10
C 1221	(A,32,21)	CKSRYB104K25	C 1516	(B,100,19)	CKSRYB224K10
C 1301	(A,53,49)	CKSSYB104K10	C 1517	(B,100,21)	CKSRYB224K10
C 1302	(B,50,57)	CKSSYB104K10	C 1518	(B,100,24)	CKSRYB224K10
C 1303	(A,53,58)	CKSSYB224K6R3	C 1519	(B,100,27)	CKSRYB224K10
C 1304	(A,53,63)	CKSSYB104K10	C 1520	(B,100,29)	CKSRYB224K10
C 1305	(A,53,65)	CKSSYB224K6R3	C 1521	(B,100,32)	CKSRYB224K10
C 1306	(A,49,74)	CKSSYB471K50	C 1522	(B,100,34)	CKSRYB224K10
C 1307	(A,44,73)	CKSSYB104K10	C 1523	(B,100,37)	CKSRYB224K10
C 1308	(A,42,73)	CKSRYB224K10	C 1524	(A,98,47)	CKSRYB224K10
C 1309	(A,39,74)	CKSSYB104K10	C 1525	(A,100,10)	CKSSYB104K10
C 1310	(A,36,74)	CKSSYB104K10	C 1526	(A,100,41)	CKSRYB224K10
C 1311	(B,42,67)	CKSSYB103K16	C 1527	(A,95,41)	CKSRYB224K10
C 1312	(B,38,65)	CKSSYB103K16	C 1528	(A,93,8)	CKSSYB104K10
C 1313	(A,33,73)	CKSSYB104K10	C 1529	(A,92,41)	CKSRYB224K10
C 1314	(B,31,68)	CKSRYB224K10	C 1530	(A,86,51)	CKSRYB224K10
C 1315	(A,30,74)	CKSRYB102K50	C 1531	(B,92,35)	CKSSYB471K50
C 1316	(A,27,75)	CKSRYB393K16	C 1532	(A,92,8)	CKSSYB104K10
C 1317	(A,26,72)	CKSSYB104K10	C 1533	(A,90,41)	CKSSYB104K10
C 1318	(A,23,70)	CKSSYB103K16	C 1534	(B,97,39)	CKSRYB224K10
C 1319	(A,22,70)	CKSSYB104K10	C 1535	(B,86,37)	CKSSYB104K10
C 1320	(A,23,68)	CKSSYB103K16	C 1538	(B,84,10)	CKSSYB104K10
C 1329	(A,24,63)	CKSSYB104K10	C 1539	(B,80,10)	CKSRYB105K10
C 1330	(A,23,66)	CKSRYB183K25	C 1540	(A,100,7)	CKSRYB105K10
C 1331	(A,22,64)	CCSSCH470J50	C 1542	(B,80,37)	CKSSYB104K10
C 1332	(A,23,62)	CKSRYB224K10	C 1543	(B,84,9)	CSZS4R7M16
C 1333	(A,23,60)	CKSRYB224K10	C 1544	(A,81,8)	CKSSYB104K10
C 1334	(B,33,57)	CKSRYB102K50	C 1547	(A,77,7)	CSZSR330M10
C 1335	(B,30,57)	CKSSYB152K50	C 1548	(B,76,12)	CKSSYB104K10

Circuit Symbol and No.		Part No.
C 1549	(A,70,38)	CKSSYB104K10
C 1550	(B,74,12)	CKSSYB104K10
C 1551	(B,72,12)	CKSSYB104K10
C 1552	(B,74,14)	CKSSYB104K10
C 1554	(B,74,15)	CKSSYB104K10
C 1555	(B,73,18)	CKSSYB104K10
C 1556	(A,69,22)	CKSSYB104K10
C 1557	(A,69,26)	CKSSYB104K10
C 1558	(A,69,29)	CKSSYB104K10
C 1559	(A,69,33)	CKSSYB104K10
C 1560	(A,69,37)	CKSSYB104K10
C 1562	(A,64,56)	CKSSYB104K10
C 1563	(A,60,50)	CKSSYB104K10
C 1564	(A,60,58)	CKSSYB104K10
C 1566	(A,57,56)	CCSSCH7R0D50
C 1567	(A,57,52)	CCSSCH7R0D50
C 1605	(B,70,29)	CKSSYB471K50
C 1606	(B,70,30)	CKSSYB471K50
C 1609	(B,60,37)	CKSRYB104K16
C 1610	(B,58,33)	CKSRYB224K10
C 1611	(B,57,38)	CSZSR100M16
C 1612	(B,70,36)	CKSQYB225K10
C 1615	(B,67,27)	CCSRCH471J50
C 1616	(B,66,41)	CCSRCH471J50
C 1617	(B,64,29)	CCSRCH471J50
C 1618	(B,63,39)	CCSRCH471J50
C 1619	(B,59,41)	CKSRYB104K16
C 1620	(B,59,24)	CKSRYB104K16
C 1641	(B,64,25)	CKSRYB104K16
C 1650	(A,104,9)	CKSYB475K16
C 1651	(A,102,10)	CKSYB475K16
C 1676	(B,67,24)	CSZSR100M10
C 1701	(A,118,15)	CKSRYB224K10
C 1702	(A,109,15)	CKSRYB224K10
C 1703	(B,122,29)	CKSRYB224K10
C 1706	(B,104,24)	CKSRYB224K10
C 1707	(A,127,24)	CKSRYB224K10
C 1708	(B,121,24)	CKSSYB471K50
C 1710	(B,104,29)	CKSRYB224K10
C 1711	(B,128,30)	CKSSYB103K16
C 1712	(B,129,28)	CKSSYB103K16
C 1713	(A,66,38)	CKSRYB224K10
C 1716	(B,105,35)	CKSRYB224K10
C 1717	(A,127,36)	CKSSYB104K10
C 1718	(B,122,37)	CKSRYB224K10
C 1719	(B,114,15)	CKSSYB104K10
C 1720	(A,128,27)	CKSRYB224K10
C 1721	(A,126,42)	CKSSYB104K10
C 1722	(A,110,40)	CKSRYB224K10
C 1723	(A,119,40)	CKSRYB224K10
C 1724	(A,119,43)	CKSSYB103K16
C 1727	(B,125,31)	CKSSYB224K6R3

E

Unit Number : CWX3154
Unit Name : Compound Unit(A)

Q 1299	Photo-taransistor	CPT231SCTD
S 1201	Spring Switch(12 cm)	CSN1069
S 1202	Spring Switch(8 cm)	CSN1069
S 1203	Spring Switch(DISC SENS)	CSN1069
S 1204	Spring Switch(DISC SENS)	CSN1070
S 1205	Spring Switch(8 cm)	CSN1070
R 1298		RS1/16S0R0J
R 1299		RS1/16S0R0J

F

Unit Number : CWX3394
Unit Name : Compound Unit(B)

S 1206	Switch(CLAMP)	CSN1067

Navi Mother Unit
Consists of
Navi Mother PCB
HDD Relay PCB

G H

Unit Number : CWN1581(UC)
Unit Number : CWN1631(EW5)
Unit Name : Navi Mother Unit

MISCELLANEOUS

IC 5001	(A,34,30)	IC	NJM2125F
IC 5002	(B,54,27)	IC	NJM2904V
IC 5003	(A,54,27)	IC	TC4052BFT
IC 5004	(B,61,17)	IC	NJM2904V
IC 5103	(B,162,34)	IC	TC7SET08FUS1
IC 5104	(B,157,48)	IC	BH7236AF
IC 5401	(A,136,61)	IC	NJM3403AV
IC 5421	(B,137,61)	IC	TC4W53FU
IC 5422	(B,143,71)	IC	NJM2125F
IC 5423	(B,132,67)	IC	NJM3403AV
IC 5424	(A,144,71)	IC	TC4W53FU
IC 5451	(A,132,38)	IC	TC4W53FU
IC 5452	(B,132,40)	IC	NJM3403AV
IC 5481	(B,22,93)	IC	TDA7052BT
IC 5531	(B,41,24)	IC	BA3121F
IC 5535	(B,57,102)	IC	TC74VHC541FTS1
IC 5537	(B,44,99)	IC	TC7W04FU
IC 5539	(B,29,99)	IC	TC7SET04FUS1
IC 5571	(A,85,55)	IC	HA12241FP
IC 5601	(B,71,114)	IC	TC7SET08FUS1
IC 5671	(B,20,105)	IC	UPD4721GSS1
IC 5901	(B,102,30)	IC	NJM2904M
IC 6201	(B,62,56)	IC	TPS5102IDBT
IC 6251	(B,45,56)	IC	TPS5103IDB
IC 6322	(A,90,88)	IC	BD3931HFP
IC 6402	(A,153,61)	IC	S-812C50AUA-C3E
IC 6601	(B,104,50)	IC	TC74VHC32FTS1
IC 6602	(A,86,45)	IC	TC74VHC32FTS1
IC 6603	(A,87,39)	IC	TC74VHCT125AFTS1
IC 6604	(B,104,56)	IC	TC7WH14FU
IC 6605	(A,125,76)	IC	TC7S04FU
IC 6606	(A,122,71)	IC	BD5335FVE
IC 6607	(A,107,54)	IC(UC)	PE5539A

Circuit Symbol and No.		Part No.
IC 6607	IC(EW5)	PE5540A
IC 6609	(B,112,53) IC	TC7WH08FU
IC 6610	(B,53,94) IC	TC74VHC125FTS1
IC 6611	(B,162,15) IC	LM56BIMM
IC 6801	(B,22,7) IC	TC7MZ245FK
IC 6802	(B,42,8) IC	TC7MBL3244AFK
Q 5001	(B,51,16) Transistor	UMD3N
Q 5002	(B,55,13) Transistor	FMG12
Q 5003	(B,55,18) Transistor	DTC114EU
Q 5004	(B,55,16) Transistor	DTC114EU
Q 5201	(B,109,85) Transistor	UMZ1N
Q 5401	(A,136,77) Transistor	UMD3N
Q 5421	(B,140,57) Transistor	UMD3N
Q 5451	(A,127,38) Transistor	UMD3N
Q 5452	(A,142,44) Transistor	UMD3N
Q 5453	(A,142,47) Transistor	UMD3N
Q 5454	(A,142,49) Transistor	UMD3N
Q 5455	(A,136,44) Transistor	DTC323TU
Q 5456	(A,136,47) Transistor	FMG12
Q 5481	(B,22,89) Transistor	UMD3N
Q 5482	(B,18,89) Transistor	DTC323TU
Q 5483	(B,23,100) Transistor	DTC114EU
Q 5531	(B,42,104) Transistor	2SC4081
Q 5532	(B,48,103) Transistor	2SC4081
Q 5533	(B,33,102) Transistor	2SC4081
Q 5611	(B,10,116) Transistor	2SC4081
Q 5651	(B,70,106) Transistor	2SA1576
Q 5652	(B,75,110) Transistor	2SC4081
Q 5671	(B,32,106) Transistor	IMD3A
Q 5672	(B,32,111) Transistor	2SD1767
Q 5901	(B,107,35) Transistor	DTC114WK
Q 5902	(B,93,33) Transistor	DTC114EU
Q 5921	(B,113,33) Transistor	2SA1576
Q 5941	(B,96,85) Transistor	2SC4081
Q 5942	(B,102,87) Transistor	2SC4081
Q 5961	(B,102,95) Transistor	2SC4081
Q 6201	(B,57,46) Transistor	DTC114EU
Q 6202	(A,62,45) FET	SP8K2
Q 6203	(A,62,65) FET	SP8K2
Q 6204	(B,53,55) Transistor	DTC114EU
Q 6251	(B,47,64) Transistor	DTC114EU
Q 6252	(A,40,49) FET	SP8K2
Q 6301	(B,75,101) Transistor	2SA1576
Q 6302	(B,72,104) Transistor	DTC114EU
Q 6311	(B,92,100) Transistor	2SA1576
Q 6312	(B,96,100) Transistor	DTC114EU
Q 6321	(B,80,52) Transistor	2SC4081
Q 6322	(B,81,70) Transistor	2SA1834F5
Q 6331	(B,90,88) Transistor	2SB1184F5
Q 6332	(B,85,79) Transistor	IMX1
Q 6341	(B,41,75) Transistor	2SA1834F5
Q 6342	(B,32,86) Transistor	2SC4081
Q 6351	(B,90,130) Transistor	DTA114EU
Q 6352	(B,95,129) Transistor	DTC114EU
Q 6353	(B,91,119) Transistor	2SA1587
Q 6354	(B,83,111) Transistor	IMX1
Q 6355	(B,81,115) Transistor	DTC114EU
Q 6356	(B,98,115) Transistor	2SD1760F5
Q 6370	(B,54,87) Transistor	2SB1260
Q 6371	(B,62,87) Transistor	2SC4081

Circuit Symbol and No.		Part No.
Q 6501	(B,93,11) Transistor	UMD3N
Q 6601	(A,99,75) Transistor	2SA1576
Q 6602	(B,119,58) Transistor	2SC4081
D 5001	(A,30,29) Diode	EDZ4R3(B)
D 5002	(A,33,34) Diode	1SS355
D 5003	(B,51,13) Diode	DAP202U
D 5403	(A,134,77) Diode	EDZ4R3(B)
D 5404	(A,131,80) Diode	1SS355
D 5531	(B,37,111) Diode	EDZ6R8(B)
D 5532	(B,37,114) Diode	EDZ6R8(B)
D 5533	(B,38,111) Diode	EDZ6R8(B)
D 5534	(B,38,114) Diode	EDZ6R8(B)
D 5536	(B,40,111) Diode	EDZ6R8(B)
D 5537	(B,48,111) Diode	EDZ6R8(B)
D 5538	(B,41,114) Diode	EDZ6R8(B)
D 5539	(B,49,114) Diode	EDZ6R8(B)
D 5541	(B,50,111) Diode	EDZ6R8(B)
D 5542	(B,43,114) Diode	EDZ6R8(B)
D 5543	(B,51,114) Diode	EDZ6R8(B)
D 5544	(B,43,111) Diode	EDZ6R8(B)
D 5545	(B,51,111) Diode	EDZ6R8(B)
D 5548	(B,52,114) Diode	EDZ6R8(B)
D 5550	(B,53,111) Diode	EDZ6R8(B)
D 5552	(B,54,114) Diode	EDZ6R8(B)
D 5554	(B,55,111) Diode	EDZ6R8(B)
D 5555	(B,45,114) Diode	AVR-M1608C080MTAAB
D 5556	(B,45,111) Diode	AVR-M1608C080MTAAB
D 5557	(B,46,114) Diode	AVR-M1608C080MTAAB
D 5558	(B,47,111) Diode	AVR-M1608C080MTAAB
D 5571	(B,17,114) Diode	AVR-M1608C080MTAAB
D 5572	(B,19,114) Diode	AVR-M1608C080MTAAB
D 5573	(B,20,114) Diode	AVR-M1608C080MTAAB
D 5574	(B,15,114) Diode	AVR-M1608C080MTAAB
D 5575	(A,26,112) Diode	UDZS18(B)
D 5576	(A,24,112) Diode	UDZS18(B)
D 5601	(B,83,124) Diode	EDZ5R6(B)
D 5602	(B,83,127) Diode	EDZ5R6(B)
D 5611	(A,9,123) Diode	EDZ6R8(B)
D 5612	(B,10,119) Diode	EDZ6R8(B)
D 5621	(B,28,95) Diode	EDZ10(B)
D 5622	(B,28,92) Diode	EDZ10(B)
D 5651	(B,66,103) Diode	1SS355
D 5652	(B,67,107) Diode	1SS355
D 5653	(B,64,113) Diode	HZU12(B2)
D 5654	(B,62,117) Diode	HZU12(B2)
D 5655	(B,68,115) Diode	HZU12(B2)
D 5656	(B,68,112) Diode	HZU12(B2)
D 5657	(A,64,114) Diode	UMZ6R8N
D 5658	(A,67,116) Diode	UMZ6R8N
D 5671	(A,32,120) Diode	UDZS6R8(B)
D 5672	(A,29,116) Diode	UDZS20(B)
D 5673	(A,29,120) Diode	UDZS20(B)
D 5674	(A,34,116) Diode	UDZS20(B)
D 5675	(A,34,120) Diode	UDZS20(B)
D 5676	(A,31,116) Diode	UDZS20(B)
D 5677	(A,31,120) Diode	UDZS20(B)
D 5678	(A,36,116) Diode	UDZS20(B)
D 5679	(A,36,120) Diode	UDZS20(B)
D 5680	(B,29,106) Diode	HZU8R2(B1)
D 5801	(B,142,24) Diode	DAN202U

Circuit Symbol and No.		Part No.
D 5901	(B,99,26) Diode	1SS355
D 5921	(B,111,31) Diode	1SS355
D 5941	(B,96,87) Diode	HZU7R5(B3)
D 5942	(B,96,89) Diode	RB500V-40
D 5943	(B,99,89) Diode	EDZ20(B)
D 5944	(B,96,91) Diode	RB500V-40
D 5961	(B,96,95) Diode	UDZS8R2(B)
D 6201	(B,70,60) Diode	RB400D
D 6202	(B,69,51) Diode	RB400D
D 6203	(A,67,45) Diode	RB060L-40
D 6204	(A,66,65) Diode	RB060L-40
D 6251	(B,42,47) Diode	RB400D
D 6252	(A,35,49) Diode	RB060L-40
D 6253	(A,47,51) Diode	1SR154-400
D 6331	(B,85,87) Diode	EDZ7R5(B)
D 6351	(B,82,108) Diode	RB500V-40
D 6352	(B,82,107) Diode	RB500V-40
D 6353	(B,81,119) Diode	HZU8R2(B1)
D 6354	(B,101,106) Diode	HZU13(B1)
D 6401	(B,161,87) Diode	EDZ5R6(B)
D 6501	(A,94,21) Diode	EDZ12(B)
D 6502	(A,100,21) Diode	EDZ5R6(B)
D 6504	(A,96,21) Diode	EDZ5R6(B)
D 6506	(A,97,21) Diode	EDZ5R6(B)
L 5102	(B,163,38) Inductor	CTF1410
L 5103	(A,155,50) Inductor	CTF1410
L 5104	(B,160,41) Inductor	LCTAW680J3225
L 5202	(A,139,109) Inductor	CTF1306
L 5203	(A,138,109) Inductor	CTF1306
L 5204	(A,138,91) Inductor	CTF1378
L 5205	(A,136,109) Inductor	CTF1306
L 5206	(A,135,109) Inductor	CTF1306
L 5207	(A,135,91) Inductor	CTF1378
L 5208	(A,134,91) Inductor	CTF1378
L 5209	(A,133,109) Inductor	CTF1306
L 5210	(A,133,91) Inductor	CTF1378
L 5211	(A,132,109) Inductor	CTF1306
L 5212	(A,131,92) Inductor	CTF1306
L 5214	(A,128,109) Inductor	CTF1306
L 5215	(A,124,90) Inductor	CTF1306
L 5217	(B,122,101) Inductor	CTF1467
L 5218	(A,124,109) Inductor	CTF1306
L 5220	(A,123,112) Inductor	CTF1306
L 5222	(A,123,109) Inductor	CTF1306
L 5223	(A,122,112) Inductor	CTF1306
L 5226	(B,121,101) Inductor	CTF1334
L 5228	(A,119,92) Inductor	CTF1334
L 5229	(A,119,109) Inductor	CTF1334
L 5231	(A,118,112) Inductor	CTF1334
L 5232	(A,119,90) Inductor	CTF1306
L 5233	(A,117,109) Inductor	CTF1334
L 5236	(A,116,109) Inductor	CTF1334
L 5238	(A,115,112) Inductor	CTF1334
L 5239	(A,117,92) Inductor	CTF1334
L 5240	(A,114,109) Inductor	CTF1334
L 5241	(B,117,101) Inductor	CTF1334
L 5242	(A,114,112) Inductor	CTF1334
L 5243	(A,116,90) Inductor	CTF1306
L 5244	(A,126,92) Inductor	CTF1306
L 5245	(A,130,109) Inductor	CTF1306

Circuit Symbol and No.		Part No.
L 5246	(A,128,112) Inductor	CTF1384
L 5247	(B,124,101) Inductor	CTF1389
L 5248	(A,126,112) Inductor	CTF1306
L 5249	(A,126,109) Inductor	CTF1306
L 5250	(A,125,112) Inductor	CTF1306
L 5251	(A,116,112) Inductor	CTF1387
L 5252	(A,115,92) Inductor	CTF1334
L 5253	(B,116,101) Inductor	CTF1379
L 5254	(A,114,90) Inductor	CTF1306
L 5256	(B,114,101) Inductor	CTF1334
L 5257	(A,113,90) Inductor	CTF1334
L 5258	(A,112,92) Inductor	CTF1334
L 5259	(A,110,109) Inductor	CTF1393
L 5260	(A,109,92) Inductor	CTF1488
L 5261	(A,108,109) Inductor	CTF1393
L 5262	(A,105,92) Inductor	CTF1306
L 5263	(A,121,109) Inductor	CTF1334
L 5264	(A,121,112) Inductor	CTF1334
L 5265	(A,120,109) Inductor	CTF1334
L 5266	(A,119,112) Inductor	CTF1334
L 5267	(A,130,112) Inductor	CTF1334
L 5268	(A,127,109) Inductor	CTF1334
L 5269	(A,129,112) Inductor	CTF1334
L 5270	(A,130,90) Inductor	CTF1306
L 5401	(A,140,77) Inductor	CTF1410
L 5402	(B,122,97) Inductor	CTF1334
L 5421	(B,139,60) Inductor	CTF1410
L 5451	(A,74,76) Inductor	CTF1306
L 5452	(A,134,35) Inductor	CTF1410
L 5531	(B,33,29) Inductor	LCYC2R2K2125
L 5532	(B,33,31) Inductor	LCYC2R2K2125
L 5534	(B,51,103) Inductor	CTF1410
L 5536	(B,40,101) Inductor	CTF1410
L 5538	(B,33,97) Inductor	CTF1410
L 5539	(A,40,112) Inductor	CTF1410
L 5540	(A,43,109) Inductor	CTF1410
L 5542	(A,44,112) Inductor	CTF1410
L 5543	(A,45,112) Inductor	CTF1410
L 5549	(A,56,112) Inductor	CTF1410
L 5550	(A,57,109) Inductor	CTF1410
L 5551	(A,59,109) Inductor	CTF1410
L 5552	(A,61,109) Inductor	CTF1410
L 5553	(A,63,109) Inductor	CTF1410
L 5554	(A,57,115) Inductor	CTF1393
L 5571	(A,85,50) Inductor	LCYC2R2K1608
L 5572	(A,16,114) Inductor	CTF1334
L 5573	(A,18,114) Inductor	CTF1334
L 5574	(A,19,114) Inductor	CTF1334
L 5575	(A,15,114) Inductor	CTF1334
L 5601	(B,71,117) Inductor	CTF1379
L 5621	(B,30,95) Inductor	CTF1558
L 5622	(B,30,92) Inductor	CTF1558
L 5671	(B,22,111) Inductor	CTF1410
L 5672	(B,13,105) Inductor	CTF1334
L 5673	(B,13,104) Inductor	CTF1334
L 5674	(B,13,103) Inductor	CTF1334
L 5675	(B,13,101) Inductor	CTF1334
L 5676	(A,32,112) Inductor	CTF1463
L 5802	(B,142,21) Inductor	CTF1334
L 5803	(B,148,20) Inductor	CTF1334

Circuit Symbol and No.		Part No.
L 5804	(A,148,13) Inductor	CTF1334
L 5805	(A,130,13) Inductor	CTF1334
L 5806	(A,151,17) Inductor	CTF1306
L 5807	(A,153,17) Inductor	CTF1306
L 5808	(B,40,8) Inductor	CTF1306
L 5809	(B,35,7) Inductor	CTF1306
L 5810	(A,41,14) Inductor	CTF1306
L 5853	(A,118,124) Inductor	CTF1306
L 5854	(A,118,118) Inductor	CTF1306
L 5901	(B,108,31) Inductor	CTF1334
L 5902	(B,100,33) Inductor	CTF1334
L 5903	(B,92,30) Inductor	CTF1334
L 5904	(B,97,35) Inductor	CTF1334
L 6102	(A,46,88) Inductor	CTF1386
L 6103	(A,44,88) Inductor	CTF1306
L 6104	(A,43,88) Inductor	CTF1306
L 6106	(B,41,93) Inductor	CTF1380
L 6107	(A,42,88) Inductor	CTF1467
L 6108	(B,41,88) Inductor	CTF1334
L 6109	(A,40,88) Inductor	CTF1306
L 6110	(B,39,88) Inductor	CTF1306
L 6111	(B,38,88) Inductor	CTF1306
L 6112	(A,39,88) Inductor	CTF1306
L 6113	(B,37,88) Inductor	CTF1306
L 6114	(A,38,88) Inductor	CTF1306
L 6115	(A,41,82) Inductor	CTF1393
L 6116	(A,39,82) Inductor	CTF1393
L 6117	(A,35,82) Inductor	CTF1661
L 6118	(A,35,87) Inductor	CTF1488
L 6119	(A,30,85) Inductor	CTF1393
L 6120	(A,49,86) Inductor	CTF1393
L 6121	(B,54,91) Inductor	CTF1410
L 6122	(B,60,95) Inductor	CTF1386
L 6123	(B,60,97) Inductor	CTF1386
L 6124	(B,60,94) Inductor	CTF1386
L 6201	(A,69,55) Inductor	CTH1255
L 6202	(A,64,75) Inductor	CTH1257
L 6203	(A,57,55) Inductor	CTH1253
L 6251	(A,48,43) Inductor	CTH1255
L 6252	(A,44,60) Inductor	CTH1257
L 6401	(A,156,93) Inductor(EW5)	CTF1334
L 6402	(A,156,91) Inductor(EW5)	CTF1334
L 6403	(A,156,90) Inductor(EW5)	CTF1334
L 6404	(A,156,87) Inductor(EW5)	CTF1334
L 6405	(B,166,85) Inductor	CTF1334
L 6406	(B,165,85) Inductor	CTF1334
L 6407	(B,167,102) Inductor	CTF1394
L 6408	(B,160,102) Inductor	CTF1394
L 6409	(B,163,102) Inductor	CTF1394
L 6410	(B,155,68) Inductor	CTF1334
L 6412	(A,155,128) Inductor	CTF1334
L 6413	(A,150,61) Inductor	CTF1334
L 6501	(B,95,17) Inductor	CTF1379
L 6502	(B,102,11) Inductor	CTF1379
L 6601	(A,91,50) Inductor	CTF1410
L 6602	(A,84,36) Inductor	CTF1410
L 6603	(B,106,46) Inductor	CTF1410
L 6604	(B,106,54) Inductor	CTF1410
L 6605	(A,122,74) Inductor	CTF1410
L 6606	(A,92,79) Inductor	CTF1393

Circuit Symbol and No.		Part No.
L 6607	(B,111,56) Inductor	CTF1410
L 6608	(A,121,57) Inductor	CTF1410
L 6609	(A,116,69) Inductor	CTF1410
L 6610	(A,102,68) Inductor	CTF1410
L 6611	(A,93,49) Inductor	CTF1410
L 6612	(A,108,36) Inductor	CTF1410
L 6613	(B,159,18) Inductor	CTF1410
L 6801	(B,12,8) Inductor	CTH1261
L 6802	(A,41,8) Inductor	CTF1410
L 6803	(A,19,6) Inductor	CTF1410
X 6601	(A,91,65) Resonator 18.874 MHz	CSS1622
S 5901	(A,60,8) Spring Switch(HDD SENSE)	CSN1055
S 5902	(A,52,19) Spring Switch(DOOR SENSE)	CSN1055
⚠FU5651	(A,72,110) Fuse 4 A	CEK1260
⚠FU5671	(A,31,112) Fuse 1 A	CEK1280
⚠FU6201	(A,79,57) Fuse 2 A	CEK1284
⚠FU6202	(A,73,71) Fuse 3 A	CEK1286
⚠FU6203	(A,52,71) Fuse 4 A	CEK1260
⚠FU6251	(A,35,78) Fuse 2 A	CEK1284
⚠FU6252	(A,49,71) Fuse 2.5 A	CEK1258
⚠FU6331	(B,84,83) Fuse 1 A	CEK1254
⚠FU6351	(A,98,120) Fuse 1 A	CEK1280
GY6402	(A,147,131) Gyro sensor	CSX1107
GY6401	(A,167,69) Gyro sensor	CSX1105
EF5101	(A,149,28) EMI Filter	CCG1082
EF5102	(A,151,28) EMI Filter	CCG1082
EF5103	(A,153,28) EMI Filter	CCG1082
EF5104	(A,156,28) EMI Filter	CCG1067
EF5531	(A,51,107) EMI Filter	CCG1067
EF5532	(A,54,107) EMI Filter	CCG1067
EF5611	(A,6,122) EMI Filter	CCG1161
EF5651	(A,68,114) EMI Filter	CCG1067
EF5800	(B,107,114) EMI Filter	CCG1172
EF5801	(B,107,118) EMI Filter	CCG1172

RESISTORS

R 5001	(A,61,31)	RS1/16S472J
R 5002	(A,45,29)	RS1/16S472J
R 5003	(A,33,32)	RS1/16S102J
R 5004	(A,61,32)	RS1/16S473J
R 5005	(A,45,27)	RS1/16S473J
R 5006	(A,53,33)	RS1/16S104J
R 5007	(A,52,33)	RS1/16S104J
R 5008	(A,51,33)	RS1/16S104J
R 5009	(A,49,33)	RS1/16S104J
R 5010	(A,45,20)	RS1/16S104J
R 5011	(A,46,20)	RS1/16S104J
R 5012	(A,47,20)	RS1/16S104J
R 5013	(A,49,20)	RS1/16S104J
R 5014	(B,50,19)	RS1/16S473J
R 5015	(B,49,19)	RS1/16S473J
R 5016	(B,51,24)	RS1/16S0R0J
R 5017	(B,54,23)	RS1/16S0R0J
R 5101	(B,155,56)	RS1/16S222J
R 5102	(A,148,53)	RS1/16S0R0J
R 5104	(B,153,59)	RS1/16S181J
R 5105	(B,152,59)	RS1/16S181J
R 5106	(B,150,59)	RS1/16S181J
R 5107	(B,162,56)	RS1/16S222J

Circuit Symbol and No.		Part No.
R 5108	(B,159,56)	RS1/16S0R0J
R 5110	(B,162,32)	RS1/16S101J
R 5111	(B,155,31)	RS1/16S101J
R 5112	(B,150,42)	RS1/10S750J
R 5113	(B,152,42)	RS1/10S750J
R 5114	(B,154,42)	RS1/10S750J
R 5115	(B,155,42)	RS1/10S750J
R 5118	(A,158,28)	RS1/10S750J
R 5119	(A,149,24)	RS1/16S750J
R 5120	(A,151,24)	RS1/16S750J
R 5121	(A,153,24)	RS1/16S750J
R 5125	(B,158,33)	RS1/16S0R0J
R 5201	(A,139,91)	RS1/16S681J
R 5202	(B,129,101)	RS1/16S241J
R 5203	(A,124,92)	RS1/16S431J
R 5204	(B,125,101)	RS1/16S0R0J
R 5205	(A,125,92)	RS1/16S0R0J
R 5206	(A,137,91)	RS1/16S0R0J
R 5207	(A,127,90)	RS1/16S0R0J
R 5208	(B,126,101)	RS1/16S0R0J
R 5209	(A,126,90)	RS1/16S0R0J
R 5210	(A,133,127)	RS1/16S681J
R 5211	(A,133,128)	RS1/16S681J
R 5213	(A,134,120)	RS1/16S222J
R 5214	(B,120,101)	RS1/16SS104J
R 5215	(B,118,101)	RS1/16S103J
R 5216	(B,106,86)	RS1/16S103J
R 5217	(B,112,84)	RS1/16S473J
R 5218	(B,112,86)	RS1/16S473J
R 5402	(A,140,67)	RS1/16S104J
R 5403	(A,139,67)	RS1/16S104J
R 5404	(A,138,67)	RS1/16S104J
R 5405	(A,139,62)	RS1/16S104J
R 5406	(A,142,62)	RS1/16S102J
R 5407	(A,142,60)	RS1/16S104J
R 5408	(A,140,60)	RS1/16S104J
R 5409	(A,140,55)	RS1/16S683J
R 5410	(A,140,57)	RS1/16S473J
R 5411	(A,139,57)	RS1/16S101J
R 5412	(A,138,55)	RS1/16S682J
R 5413	(A,137,55)	RS1/16S332J
R 5414	(A,131,58)	RS1/16S682J
R 5415	(A,131,56)	RS1/16S0R0J
R 5416	(A,133,80)	RS1/16S102J
R 5421	(B,146,73)	RS1/16S223J
R 5422	(B,147,70)	RS1/16S223J
R 5423	(B,136,78)	RS1/16S104J
R 5424	(B,134,75)	RS1/16S104J
R 5425	(B,136,73)	RS1/16S104J
R 5426	(B,133,73)	RS1/16S104J
R 5427	(B,136,69)	RS1/16S101J
R 5429	(B,136,54)	RS1/16S104J
R 5430	(B,137,54)	RS1/16S104J
R 5432	(B,133,61)	RS1/16S303J
R 5433	(B,136,66)	RS1/16S104J
R 5434	(B,138,66)	RS1/16S101J
R 5435	(B,137,69)	RS1/16S104J
R 5441	(B,128,73)	RS1/16S104J
R 5442	(B,131,73)	RS1/16S473J
R 5443	(B,128,68)	RS1/16S393J

Circuit Symbol and No.		Part No.
R 5444	(B,126,68)	RS1/16S101J
R 5445	(B,140,54)	RS1/16S104J
R 5446	(B,126,66)	RS1/16S393J
R 5447	(B,128,66)	RS1/16S683J
R 5448	(B,129,63)	RS1/16S154J
R 5449	(B,129,61)	RS1/16S101J
R 5451	(B,128,48)	RS1/16S102J
R 5452	(B,129,48)	RS1/16S102J
R 5453	(B,129,46)	RS1/16S153J
R 5454	(B,132,46)	RS1/16S683J
R 5455	(B,128,42)	RS1/16S562J
R 5456	(B,128,46)	RS1/16S0R0J
R 5457	(B,125,37)	RS1/16S104J
R 5458	(B,128,39)	RS1/16S564J
R 5459	(B,130,35)	RS1/16S101J
R 5460	(B,136,42)	RS1/16S682J
R 5461	(B,139,39)	RS1/16S183J
R 5462	(B,135,39)	RS1/16S683J
R 5463	(B,134,35)	RS1/16S101J
R 5464	(A,129,38)	RS1/16S473J
R 5465	(A,139,44)	RS1/16S0R0J
R 5466	(A,139,46)	RS1/16S0R0J
R 5467	(A,139,49)	RS1/16S0R0J
R 5468	(A,130,41)	RS1/16S473J
R 5469	(A,132,44)	RS1/16S105J
R 5470	(A,130,44)	RS1/16S102J
R 5471	(A,132,45)	RS1/16S472J
R 5472	(A,130,45)	RS1/16S152J
R 5473	(A,132,46)	RS1/16S472J
R 5474	(A,130,46)	RS1/16S472J
R 5475	(A,132,47)	RS1/16S472J
R 5476	(B,135,48)	RS1/16S333J
R 5477	(B,134,48)	RS1/16S683J
R 5478	(B,135,46)	RS1/16S154J
R 5479	(B,136,46)	RS1/16S101J
R 5481	(B,14,89)	RS1/16S821J
R 5482	(B,15,92)	RS1/16S104J
R 5483	(B,14,94)	RS1/16S1003D
R 5484	(B,15,94)	RS1/16S1202D
R 5485	(B,26,98)	RS1/16S101J
R 5486	(A,134,69)	RS1/16S102J
R 5489	(A,134,67)	RS1/16S104J
R 5490	(A,135,67)	RS1/16S104J
R 5491	(A,131,62)	RS1/16S683J
R 5492	(A,132,62)	RS1/16S473J
R 5493	(A,132,65)	RS1/16S101J
R 5494	(A,146,75)	RS1/16S104J
R 5495	(A,136,74)	RS1/16S104J
R 5531	(A,36,21)	RS1/16S220J
R 5532	(B,47,26)	RS1/16S102J
R 5533	(B,51,107)	RS1/16S103J
R 5534	(B,51,106)	RS1/16S103J
R 5535	(B,51,104)	RS1/16S103J
R 5536	(B,36,22)	RS1/16S102J
R 5537	(B,47,28)	RS1/16S223J
R 5538	(B,36,25)	RS1/16S223J
R 5539	(A,20,101)	RS1/16S153J
R 5540	(B,40,19)	RS1/16S101J
R 5541	(B,36,21)	RS1/16S101J
R 5544	(B,40,102)	RS1/16S103J

Circuit Symbol and No.		Part No.
R 5545	(B,45,104)	RS1/16S103J
R 5546	(B,44,104)	RS1/16S223J
R 5547	(B,27,98)	RS1/16S103J
R 5548	(B,47,100)	RS1/16S103J
R 5549	(B,49,100)	RS1/16S223J
R 5550	(B,29,102)	RS1/16S103J
R 5551	(B,30,102)	RS1/16S223J
R 5552	(A,40,109)	RS1/16S390J
R 5553	(A,44,109)	RS1/16S390J
R 5554	(A,45,109)	RS1/16S390J
R 5555	(A,56,109)	RS1/16S102J
R 5556	(A,65,109)	RS1/16S27R0D
R 5557	(A,69,109)	RS1/16S27R0D
R 5558	(A,68,109)	RS1/16S153J
R 5559	(A,64,109)	RS1/16S153J
R 5561	(A,41,112)	RS1/16S471J
R 5568	(A,60,112)	RS1/16S471J
R 5571	(A,93,55)	RS1/16S472J
R 5572	(A,91,53)	RS1/16S102J
R 5573	(A,91,55)	RS1/16S101J
R 5575	(A,83,52)	RS1/16S102J
R 5576	(A,84,60)	RS1/10S101J
R 5577	(A,83,60)	RS1/10S101J
R 5578	(A,84,65)	RS1/10S620J
R 5601	(A,87,114)	RS1/16S221J
R 5602	(B,75,117)	RS1/16S621J
R 5603	(B,75,114)	RS1/16S473J
R 5604	(B,71,111)	RS1/16S121J
R 5612	(B,9,112)	RS1/16S473J
R 5621	(B,27,92)	RS1/16S101J
R 5651	(B,69,102)	RS1/16S473J
R 5652	(B,69,104)	RS1/16S473J
R 5653	(B,72,106)	RS1/16S473J
R 5654	(B,75,107)	RS1/16S473J
R 5655	(B,62,110)	RS1/16S0R0J
R 5656	(B,61,110)	RS1/16S0R0J
R 5657	(B,64,110)	RS1/16S0R0J
R 5658	(B,68,109)	RS1/16S473J
R 5659	(B,71,110)	RS1/16S0R0J
R 5660	(A,71,114)	RS1/16S473J
R 5661	(A,72,116)	RS1/16S473J
R 5671	(A,32,116)	RS1/16S681J
R 5672	(B,10,106)	RS1/16S681J
R 5673	(B,10,105)	RS1/16S681J
R 5674	(B,10,103)	RS1/16S681J
R 5675	(B,10,102)	RS1/16S681J
R 5676	(B,36,108)	RS1/16S471J
R 5677	(B,36,107)	RS1/16S471J
R 5802	(A,41,16)	RS1/16S102J
R 5803	(B,144,27)	RS1/16S0R0J
R 5804	(B,141,27)	RS1/16S681J
R 5805	(A,66,102)	RS1/10S0R0J
R 5808	(B,115,126)	RS1/10S0R0J
R 5895	(A,45,7) (UC)	RS1/16S0R0J
R 5896	(A,48,7) (EW5)	RS1/16S0R0J
R 5901	(B,107,31)	RS1/16S104J
R 5902	(B,102,35)	RS1/16S473J
R 5903	(B,107,29)	RS1/16S563J
R 5904	(B,102,36)	RS1/16S513J
R 5905	(B,97,30)	RS1/16S104J
R 5906	(B,95,30)	RS1/16S513J
R 5907	(B,96,28)	RS1/16S513J
R 5908	(B,100,35)	RS1/16S102J
R 5909	(B,92,28)	RS1/16S102J
R 5910	(B,95,28)	RS1/16S564J
R 5911	(B,102,26)	RS1/16S822J
R 5912	(B,102,25)	RS1/16S202J
R 5913	(B,97,36)	RS1/16S203J
R 5914	(B,100,36)	RS1/16S333J
R 5915	(A,58,23)	RS1/16S271J
R 5916	(A,66,9)	RS1/16S271J
R 5921	(B,117,33)	RS1/16S102J
R 5922	(B,115,33)	RS1/16S103J
R 5923	(B,110,33)	RS1/16S103J
R 5941	(B,99,87)	RS1/16S473J
R 5942	(B,102,91)	RS1/16S103J
R 5943	(B,99,86)	RS1/16S104J
R 5944	(B,99,91)	RS1/16S103J
R 5961	(B,99,95)	RS1/16S473J
R 5962	(B,99,96)	RS1/16S104J
R 6001	(A,11,116)	RS1/16S0R0J
R 6101	(B,47,95)	RS1/16S0R0J
R 6102	(B,47,96)	RS1/16S0R0J
R 6103	(B,48,89)	RS1/16S0R0J
R 6104	(B,63,95)	RS1/16S151J
R 6105	(B,63,97)	RS1/16S151J
R 6106	(B,63,94)	RS1/16S151J
R 6110	(A,49,87)	RS1/16S6R8J
R 6111	(A,29,89)	RS1/16S0R0J
R 6113	(A,27,87)	RS1/16S0R0J
R 6201	(B,69,47)	RS1/16S0R0J
R 6202	(B,66,48)	RS1/16S3300D
R 6203	(B,64,48)	RS1/16S2701D
R 6204	(B,61,47)	RS1/16S1601D
R 6205	(B,61,65)	RS1/16S0R0J
R 6206	(B,59,65)	RS1/16S3300D
R 6207	(B,56,65)	RS1/16S3001D
R 6208	(B,59,62)	RS1/16S1001D
R 6209	(B,64,47)	RS1/16S101J
R 6210	(B,56,64)	RS1/16S102J
R 6211	(B,61,48)	RS1/16S332J
R 6212	(B,56,49)	RS1/16S104J
R 6213	(B,56,62)	RS1/16S152J
R 6214	(B,56,53)	RS1/16S1103D
R 6215	(B,59,61)	RS1/16S104J
R 6216	(B,56,48)	RS1/16S8203D
R 6217	(B,54,57)	RS1/16S100J
R 6218	(B,63,45)	RS1/10S150J
R 6219	(B,63,61)	RS1/10S150J
R 6220	(B,72,52)	RS1/16S224J
R 6221	(B,72,55)	RS1/16S224J
R 6222	(B,64,49)	RS1/16S473J
R 6251	(B,38,52)	RS1/16S0R0J
R 6252	(B,38,54)	RS1/16S4700D
R 6253	(B,38,57)	RS1/16S4701D
R 6254	(B,38,59)	RS1/16S1002D
R 6255	(B,40,54)	RS1/16S101J
R 6256	(B,42,61)	RS1/16S152J
R 6257	(B,42,65)	RS1/16S104J
R 6258	(B,44,62)	RS1/16S1103D

Circuit Symbol and No.		Part No.
R 6259	(B,44,64)	RS1/16S8203D
R 6260	(B,40,51)	RS1/10S100J
R 6262	(B,46,48)	RS1/16S184J
R 6263	(B,46,49)	RS1/16S100J
R 6264	(B,46,46)	RS1/16S105J
R 6265	(B,46,41)	RS1/4SA561J
R 6267	(B,50,62)	RS1/16S0R0J
R 6268	(A,31,79)	RS1/16S0R0J
R 6301	(B,72,101)	RS1/16S222J
R 6302	(B,75,105)	RS1/16S682J
R 6303	(B,75,103)	RS1/16S332J
R 6311	(B,95,98)	RS1/16S103J
R 6314	(B,92,98)	RS1/16S103J
R 6321	(B,72,76)	RS1/16S392J
R 6322	(B,81,63)	RS1/16S103J
R 6323	(B,82,59)	RS1/4SA470J
R 6324	(B,82,55)	RS1/4SA470J
R 6325	(B,70,76)	RS1/16S102J
R 6331	(B,84,90)	RS1/16S121J
R 6332	(B,84,87)	RS1/16S471J
R 6333	(B,89,80)	RS1/10S221J
R 6334	(B,90,83)	RS1/16S223J
R 6335	(B,88,77)	RS1/16S562J
R 6341	(B,38,83)	RS1/10S820J
R 6342	(B,35,84)	RS1/10S820J
R 6343	(B,41,81)	RS1/16S103J
R 6344	(B,34,88)	RS1/16S103J
R 6345	(B,28,86)	RS1/16S103J
R 6351	(B,92,129)	RS1/16S472J
R 6352	(B,84,115)	RS1/16S472J
R 6353	(B,94,123)	RS1/16S103J
R 6354	(B,94,124)	RS1/16S512J
R 6355	(B,87,117)	RS1/16S224J
R 6356	(B,87,116)	RS1/16S472J
R 6357	(B,86,114)	RS1/10S221J
R 6358	(B,85,119)	RS1/4SA471J
R 6370	(B,59,89)	RS1/10S221J
R 6371	(B,59,87)	RS1/10S221J
R 6372	(B,59,85)	RS1/16S103J
R 6373	(B,64,86)	RS1/16S103J
R 6374	(B,62,89)	RS1/16S103J
R 6401	(B,161,90)	RS1/16S104J
R 6402	(B,161,85)	RS1/16S1001D
R 6403	(B,155,73)	RS1/16S151J
R 6404	(B,155,72)	RS1/16S104J
R 6405	(B,160,85)	RS1/16S1101D
R 6406	(B,159,85)	RS1/16S1001D
R 6501	(B,95,11)	RS1/16S102J
R 6504	(B,98,11)	RS1/16S102J
R 6602	(A,102,71) (EW5)	RS1/16S223J
R 6603	(B,108,57)	RS1/16S104J
R 6604	(B,113,69)	RAB4C104J
R 6605	(A,99,68)	RS1/16S104J
R 6606	(A,107,70)	RS1/16S471J
R 6607	(A,108,70)	RS1/16S471J
R 6608	(A,106,70)	RS1/16S471J
R 6609	(B,92,53)	RS1/16S104J
R 6610	(B,94,53)	RS1/16S104J
R 6611	(B,103,68)	RS1/16S104J
R 6612	(A,88,60)	RS1/16S104J

Circuit Symbol and No.		Part No.
R 6613	(B,90,40)	RS1/16S104J
R 6614	(B,90,37)	RS1/16S104J
R 6615	(A,93,58)	RS1/16S302J
R 6616	(B,99,46)	RS1/16S104J
R 6617	(B,100,61)	RS1/16S104J
R 6619	(B,166,16)	RS1/16S4702D
R 6620	(B,166,14)	RS1/16S1302D
R 6624	(A,121,61)	RAB4C681J
R 6626	(B,121,61)	RAB4C473J
R 6627	(B,126,57) (EW5)	RAB4C223J
R 6628	(A,126,57) (EW5)	RAB4C681J
R 6629	(A,123,53)	RAB4C471J
R 6630	(A,104,36)	RS1/16S0R0J
R 6632	(B,96,47)	RS1/16S104J
R 6633	(A,123,49)	RAB4C681J
R 6634	(A,93,46)	RS1/16S220J
R 6637	(A,93,44)	RS1/16S220J
R 6638	(B,117,60)	RS1/16S473J
R 6639	(B,117,57)	RS1/16S473J
R 6640	(B,121,55)	RS1/16S104J
R 6641	(B,121,54)	RS1/16S104J
R 6642	(A,102,78)	RS1/16S472J
R 6643	(A,99,78)	RS1/16S472J
R 6644	(A,97,75)	RS1/16S473J
R 6645	(B,110,42)	RS1/16S104J
R 6646	(A,116,36)	RS1/16S104J
R 6647	(A,103,40)	RS1/16S220J
R 6648	(A,101,40)	RS1/16S220J
R 6649	(A,122,44)	RAB4C0R0J
R 6650	(A,113,36)	RS1/16S104J
R 6653	(A,110,40)	RS1/16S102J
R 6654	(A,124,41)	RS1/16S473J
R 6655	(A,117,36)	RS1/16S104J
R 6656	(A,112,30)	RAB4C104J
R 6658	(A,110,36)	RAB4C104J
R 6660	(A,106,36)	RS1/16S104J
R 6662	(B,121,49)	RS1/16S104J
R 6664	(B,121,46)	RS1/16S104J
R 6666	(B,121,44)	RS1/16S104J
R 6668	(B,121,41)	RS1/16S104J
R 6670	(B,100,58)	RS1/16S104J
R 6671	(A,119,70)	RS1/16S102J
R 6672	(A,106,40)	RS1/16S471J
R 6673	(A,104,40)	RS1/16S471J
R 6674	(B,97,42)	RS1/16S104J
R 6676	(A,100,40)	RS1/16S220J
R 6677	(A,99,40)	RS1/16S220J
R 6678	(B,88,49)	RS1/16S104J
R 6680	(A,101,36)	RS1/16S104J
R 6681	(A,51,75)	RS1/10S0R0J
R 6683	(A,110,70) (EW5)	RS1/16SS681J
R 6684	(A,105,72) (EW5)	RS1/16SS681J
R 6685	(B,134,54)	RS1/16S103J
R 6686	(A,47,53)	RS1/10S0R0J
R 6687	(A,112,40)	RS1/16S102J
R 6688	(A,124,61)	RS1/16S102J
R 6689	(B,131,59)	RS1/16S103J
R 6690	(A,101,71)	RS1/16S102J
R 6691	(B,95,49)	RS1/16S101J
R 6803	(A,20,9)	RS1/16S0R0J

Circuit Symbol and No.			Part No.
R 6804	(A,48,9)		RS1/16S0R0J
R 6810	(B,42,12)		RS1/16S473J
R 6812	(B,37,6)		RS1/16S0R0J
R 6813	(B,30,10)		RS1/16S103J

CAPACITORS

C 5001	(A,31,29)		CKSRYB103K50
C 5002	(A,27,31)		CEVW100M16
C 5003	(A,60,25)	10 µF	CCG1203
C 5004	(A,60,29)	10 µF	CCG1203
C 5005	(A,48,27)	10 µF	CCG1203
C 5006	(A,48,25)	10 µF	CCG1203
C 5008	(A,60,27)	10 µF	CCG1203
C 5009	(A,48,30)	10 µF	CCG1203
C 5011	(A,55,30)		CKSRYB104K50
C 5012	(B,54,30)		CKSRYB104K50
C 5101	(A,149,55)		CKSRYB334K10
C 5102	(B,156,56)		CCSRCH5R0C50
C 5104	(A,151,45)		CEVW470M16
C 5105	(A,146,53)		CKSRYB103K50
C 5106	(B,163,36)		CKSRYB104K50
C 5107	(B,150,56)		CKSRYB104K50
C 5108	(B,152,56)		CKSRYB104K50
C 5109	(B,153,56)		CKSRYB104K50
C 5110	(B,161,56)		CCSRCH470J50
C 5112	(A,158,55)		CEVW470M16
C 5113	(A,164,52)		CKSRYB103K50
C 5116	(B,158,42)		CCSRCH220J50
C 5117	(A,164,44)		CEVW100M16
C 5119	(A,155,49)		CKSRYB103K50
C 5120	(A,158,45)		CEVW470M16
C 5121	(A,144,35)		CEVW221M4
C 5122	(A,151,35)		CEVW221M4
C 5123	(A,158,35)		CEVW221M4
C 5124	(A,166,35)		CEVW221M4
C 5201	(A,107,92)		CKSRYB104K50
C 5202	(A,107,109)		CKSRYB104K50
C 5203	(A,110,92)		CKSRYB104K50
C 5204	(A,112,109)		CKSRYB104K50
C 5205	(B,106,83)		CKSRYB104K50
C 5402	(A,140,69)		CKSRYB105K10
C 5403	(A,138,69)		CKSRYB105K10
C 5404	(A,140,62)		CCSRCH100D50
C 5405	(A,143,62)		CKSRYB103K50
C 5406	(A,142,55)		CKSRYB104K50
C 5407	(A,142,57)		CCSRCH151J50
C 5408	(A,139,60)		CCSRCH151J50
C 5409	(A,139,55)		CKSRYB105K10
C 5410	(A,135,55)		CKSRYB105K10
C 5411	(A,132,58)		CCSRCH101J50
C 5412	(B,16,89)		CKSRYB474K10
C 5413	(A,132,77)		CKSRYB103K50
C 5414	(A,129,75)		CEVW100M16
C 5415	(A,132,69)		CKSRYB103K50
C 5416	(A,130,62)		CKSRYB104K50
C 5417	(A,136,67)		CCSRCH471J50
C 5418	(A,146,70)		CKSRYB104K50
C 5419	(A,131,65)		CCSRCH471J50
C 5421	(A,130,65)		CKSRYF104Z25

Circuit Symbol and No.		Part No.
C 5422	(A,126,65)	CEVW220M16
C 5423	(B,134,78)	CKSRYB105K10
C 5424	(B,146,70)	CKSRYB105K10
C 5425	(B,136,75)	CCSRCH391J50
C 5426	(B,134,73)	CCSRCH102J50
C 5427	(B,132,73)	CCSRCH560J50
C 5428	(B,139,62)	CKSRYB104K50
C 5429	(B,134,58)	CKSRYB105K10
C 5430	(B,137,66)	CCSRCH470J50
C 5431	(B,138,69)	CKSRYB105K10
C 5441	(B,129,73)	CKSRYB104K50
C 5442	(B,129,68)	CCSRCH101J50
C 5443	(B,128,63)	CCSRCH471J50
C 5444	(B,129,66)	CCSRCH680J50
C 5445	(B,128,61)	CKSRYB105K10
C 5451	(A,72,76)	CKSRYB104K50
C 5452	(A,131,51)	CEVW220M6R3
C 5453	(B,147,73)	CKSRYB104K50
C 5454	(B,130,48)	CKSRYB473K50
C 5455	(B,130,46)	CKSRYB473K50
C 5456	(B,126,42)	CKSRYB104K50
C 5457	(B,125,39)	CKSRYB222K50
C 5458	(B,126,39)	CCSRCH391J50
C 5459	(B,135,42)	CKSRYB104K50
C 5460	(B,138,39)	CKSRYB682K50
C 5461	(B,136,39)	CCSRCH331J50
C 5462	(A,134,38)	CKSRYB104K50
C 5463	(A,130,42)	CKSRYB105K10
C 5464	(A,130,47)	CKSRYB474K10
C 5465	(B,136,48)	CCSRCH471J50
C 5466	(B,134,46)	CCSRCH680J50
C 5467	(B,138,46)	CKSRYB105K10
C 5481	(B,14,92)	CKSRYB332K50
C 5482	(A,18,89)	CEVW101M16
C 5483	(A,23,88)	CKSRYB104K50
C 5484	(B,17,92)	CKSRYB105K10
C 5485	(B,17,94)	CKSRYB105K10
C 5531	(A,13,106)	CKSRYB103K50
C 5532	(A,40,22)	CEVW220M16
C 5533	(A,36,24)	CKSRYB104K50
C 5534	(A,40,30)	CEVW220M16
C 5535	(A,17,101)	CKSRYB103K50
C 5536	(A,18,97)	CEVW101M10
C 5537	(B,53,101)	CKSRYB104K50
C 5538	(B,36,24)	CKSRYB105K10
C 5539	(B,40,99)	CKSRYB104K50
C 5540	(B,47,25)	CKSRYB105K10
C 5541	(B,34,100)	CKSRYB104K50
C 5542	(A,41,118)	CCSRCH121J50
C 5543	(A,41,109)	CCSRCH121J50
C 5544	(B,42,28)	CKSRYB105K10
C 5545	(A,42,118)	CCSRCH121J50
C 5546	(A,45,118)	CCSRCH121J50
C 5547	(A,44,118)	CCSRCH121J50
C 5548	(A,46,118)	CCSRCH121J50
C 5549	(B,47,29)	CCSRCH471J50
C 5550	(A,48,118)	CCSRCH121J50
C 5551	(B,35,27)	CCSRCH471J50
C 5552	(A,60,109)	CCSRCH121J50
C 5553	(B,30,34)	CCSRCH471J50

Circuit Symbol and No.		Part No.
C 5554	(A,49,118)	CCSRCH121J50
C 5555	(B,32,34)	CCSRCH471J50
C 5558	(A,52,118)	CKSRYB104K50
C 5571	(A,85,52)	CKSRYB472K50
C 5572	(A,13,112)	CKSRYB104K50
C 5581	(A,10,126)	CKSRYB104K50
C 5601	(B,75,115)	CCSRCH150J50
C 5602	(B,71,115)	CKSRYB104K50
C 5612	(B,12,117)	CKSRYB103K50
C 5621	(B,27,95)	CKSRYB222K50
C 5651	(B,72,108)	CKSRYB103K50
C 5656	(A,70,116)	CKSRYB473K50
C 5671	(B,12,108)	CKSQYB475K6R3
C 5672	(B,11,108)	CKSSYB103K16
C 5673	(B,22,110)	CKSRYB105K10
C 5674	(B,26,107)	CKSRYB105K10
C 5675	(B,26,105)	CKSRYB105K10
C 5676	(B,16,110)	CKSRYB105K10
C 5677	(B,14,108)	CKSRYB105K10
C 5685	(A,39,118)	CKSQYF104Z50
C 5686	(B,27,106)	CKSRYB104K50
C 5832	(A,41,13) (EW5)	CCSRCH101J50
C 5851	(B,104,111)	CKSRYB104K50
C 5852	(B,92,117)	CKSRYB104K50
C 5901	(B,102,33)	CKSRYB104K50
C 5902	(B,96,30)	CKSRYB102K50
C 5903	(B,93,28)	CKSRYB104K50
C 5904	(B,93,36)	CKSRYB103K50
C 5905	(B,93,30)	CKSRYB823K16
C 5906	(A,64,9)	CKSRYB103K50
C 5907	(A,58,20)	CKSRYB103K50
C 6001	(A,32,19)	CKSRYB103K50
C 6002	(A,162,14)	CKSRYB103K50
C 6101	(A,49,89) 10 µF	CCG1192
C 6102	(A,43,83)	CKSRYF104Z25
C 6103	(A,38,83)	CKSRYF104Z25
C 6104	(A,36,83)	CKSRYF104Z25
C 6105	(A,27,86)	CKSRYF104Z25
C 6106	(B,31,88)	CKSRYF104Z25
C 6107	(A,30,87)	CKSRYF104Z25
C 6108	(A,26,83) 10 µF	CCG1223
C 6109	(B,51,91)	CKSRYB104K50
C 6201	(B,66,47)	CKSRYB682K50
C 6202	(B,59,64)	CKSRYB682K50
C 6203	(B,59,49)	CCSRCH101J50
C 6204	(B,59,48)	CKSRYB224K16
C 6205	(B,56,60)	CCSRCH221J50
C 6206	(B,56,61)	CKSRYB104K50
C 6207	(B,56,51)	CKSRYB223K50
C 6208	(B,56,52) 47 pF	CCG1231
C 6209	(B,56,55)	CKSRYB105K10
C 6210	(B,56,58)	CKSRYB223K50
C 6211	(B,53,59) 4.7 µF	CCG1222
C 6212	(B,67,53)	CKSRYF474Z16
C 6213	(B,67,59)	CKSRYF474Z16
C 6214	(B,70,57)	CKSQYB475K10
C 6215	(B,73,52)	CKSRYB104K50
C 6216	(B,73,55)	CKSRYF104Z25
C 6217	(A,72,45) 330 µF/6.3 V	CCH1366
C 6218	(A,71,65) 330 µF/6.3 V	CCH1366

Circuit Symbol and No.		Part No.
C 6219	(A,56,42) 10 µF	CCG1223
C 6220	(A,56,68) 10 µF	CCG1223
C 6221	(A,56,45) 10 µF	CCG1223
C 6222	(A,56,65) 10 µF	CCG1223
C 6251	(B,40,57)	CKSRYB103K50
C 6252	(B,42,64)	CCSRCH101J50
C 6253	(B,42,62)	CKSRYB104K50
C 6254	(B,40,59)	CKSRYB103K50
C 6255	(B,44,61) 47 pF	CCG1231
C 6256	(B,47,61)	CKSRYB105K10
C 6257	(B,50,48)	CKSQYB475K10
C 6258	(B,42,50)	CKSRYF474Z16
C 6259	(B,46,47)	CKSRYB104K50
C 6260	(B,48,48) 4.7 µF	CCG1222
C 6261	(A,38,41) 220 µF/10 V	CCH1409
C 6262	(A,36,61) 10 µF	CCG1223
C 6263	(A,36,58) 10 µF	CCG1223
C 6264	(A,36,55) 10 µF	CCG1223
C 6311	(B,94,100)	CKSRYB104K50
C 6321	(B,79,57)	CKSRYB104K50
C 6322	(B,69,76) 10 µF	CCG1203
C 6323	(A,95,81)	CKSQYB105K16
C 6324	(A,84,87)	CKSYB105K25
C 6325	(B,86,75) 10 µF	CCG1220
C 6329	(B,86,68)	CKSRYB103K50
C 6331	(B,85,90)	CKSRYB104K50
C 6332	(A,92,98)	CEVW101M16
C 6333	(B,88,79)	CKSRYB103K50
C 6341	(A,35,75)	CKSRYB103K50
C 6342	(A,40,74)	CEVW101M16
C 6343	(B,29,86)	CKSRYB105K10
C 6351	(B,85,117)	CKSRYB104K50
C 6352	(A,111,117)	CKSRYB103K50
C 6353	(A,107,117)	CEVW470M16
C 6354	(A,100,120)	CKSRYB103K50
C 6355	(A,100,114)	CEVW101M16
C 6356	(B,81,112)	CKSRYB472K50
C 6370	(A,57,93)	CKSRYB103K50
C 6371	(A,57,88)	CEVW101M16
C 6372	(B,62,90)	CKSRYB105K10
C 6401	(B,158,72) 10 µF	CCG1203
C 6402	(B,168,102)	CKSRYB102K50
C 6403	(B,162,102)	CKSRYB102K50
C 6404	(B,165,102)	CKSRYB102K50
C 6405	(B,155,70)	CKSRYB103K50
C 6406	(B,155,69)	CKSRYB105K10
C 6408	(A,155,130)	CKSRYB104K50
C 6409	(A,153,72)	CEVW101M16
C 6410	(A,154,66)	CKSRYB104K50
C 6411	(A,154,65)	CKSRYB105K10
C 6412	(A,154,64)	CKSRYB105K10
C 6501	(B,96,17)	CKSRYB104K50
C 6502	(B,93,17)	CCSRCH101J50
C 6504	(B,101,17)	CCSRCH101J50
C 6505	(B,99,17)	CKSRYB103K50
C 6507	(B,99,11)	CKSRYB103K50
C 6508	(B,97,11)	CKSRYB103K50
C 6601	(B,104,46)	CKSRYB104K50
C 6602	(A,88,49)	CKSRYB104K50
C 6603	(A,86,36)	CKSRYB104K50

Circuit Symbol and No.		Part No.
C 6604	(B,104,54)	CKSRYB104K50
C 6605	(A,122,69)	CKSRYB153K50
C 6606	(A,125,74)	CKSRYB104K50
C 6607	(A,116,67)	CKSRYB104K50
C 6608	(A,113,40)	CKSRYB104K50
C 6609	(A,104,68)	CKSRYB104K50
C 6610	(A,119,67)	CKSRYB105K10
C 6611	(A,94,62)	CCSRCH7R0D50
C 6612	(A,94,64)	CCSRCH6R0D50
C 6613	(A,122,73)	CKSRYB104K50
C 6614	(A,121,55)	CKSRYB104K50
C 6615	(A,94,49)	CKSRYB104K50
C 6616	(A,95,78)	CKSRYB104K50
C 6617	(A,94,75)	CSZSR100M16
C 6618	(A,95,79)	CKSRYB104K50
C 6619	(A,116,41)	CKSRYB104K50
C 6620	(A,108,41)	CKSRYB104K50
C 6622	(A,119,69)	CKSRYB104K50
C 6623	(B,113,56)	CKSRYB104K50
C 6624	(B,162,18)	CKSRYB104K50
C 6625	(B,168,16)	CKSRYB104K50
C 6626	(B,115,52)	CCSRCH101J50
C 6801	(A,65,19)	CKSRYB104K50
C 6802	(B,6,9) 330 µF/10 V	CCH1623
C 6805	(A,61,9)	CKSRYB104K50
C 6806	(A,22,7)	CKSRYB105K10
C 6807	(A,38,8)	CKSRYB105K10

I

Unit Number : CWN1586
Unit Name : Panel Unit

D 6901	LED	SDDB16001A(CA)
D 6905	LED	SDDB16001A(CA)
D 6910	LED	SDDB16001A(CA)
S 6902	Push Switch(DISC)	CSG1155
R 6901		RS1/16S241J
R 6903		RS1/16S202J

J

Unit Number : CWN1585(UC)
Unit Number : CWN1635(EW5)
Unit Name : Keyboard Unit

MISCELLANEOUS

IC 3021	IC	SBX3050-01
D 3001	LED	SDDB16001A(CA)
D 3002	LED	SDDB16001A(CA)
D 3003	LED(UC)	SDDB16001A(CA)
D 3003	LED(EW5)	CL-196HR-CD(AB)
D 3004	LED	SDDB16001A(CA)
D 3006	LED	SDDB16001A(CA)
D 3007	LED	SDDB16001A(CA)
D 3009	LED	SDDB16001A(CA)
D 3010	LED	SDDB16001A(CA)
D 3012	LED	SDDB16001A(CA)
D 3013	LED	SDDB16001A(CA)
D 3014	LED	SDDB16001A(CA)
D 3015	LED	SDDB16001A(CA)

Circuit Symbol and No.		Part No.
S 3001	Push Switch	CSG1155
S 3002	Push Switch	CSG1155
S 3003	Push Switch	CSG1155
S 3004	Push Switch	CSG1155
S 3005	Push Switch	CSG1155
S 3006	Push Switch	CSG1155
S 3007	Push Switch	CSG1155
S 3008	Push Switch	CSG1155
S 3009	Push Switch	CSG1155
S 3010	Push Switch	CSG1155
S 3011	Push Switch	CSG1155
S 3012	Push Switch	CSG1155
S 3021	Push Switch	CSG1155

RESISTORS

R 3001		RS1/16S822J
R 3002		RS1/16S302J
R 3003		RS1/16S103J
R 3004		RS1/16S303J
R 3006		RS1/16S103J
R 3007		RS1/16S303J
R 3009		RS1/16S512J
R 3010		RS1/16S103J
R 3011		RS1/16S303J
R 3016	LED(UC)	SDDB16001A
R 3016	LED(EW5)	CL-196HR-CD
R 3021		RS1/16S470J

CAPACITORS

C 3021		CKSRYB104K25

K

Unit Number : CWN1584(UC)
Unit Number : CWN1634(EW5)
Unit Name : Monitor Unit

MISCELLANEOUS

IC 1	(A,40,59) IC	TC90A96AFG-P
IC 41	(A,29,85) IC	TC7SH08FUS1
IC 101	(A,84,40) IC	NJM2100V
IC 102	(A,17,43) IC	TC7SET04FUS1
IC 103	(A,12,61) IC	TC7S66FU
IC 104	(A,9,46) IC	NJM082BV
IC 121	(A,66,34) IC	TC74VHC04FTS1
IC 122	(A,70,30) IC	TC7SET04FUS1
IC 181	(B,94,71) IC	BD6171KV
IC 182	(A,83,69) IC	S-1132B25-U5
IC 183	(A,83,57) IC	S-1132B15-U5
IC 251	(A,109,45) IC	S-80835CNNB-B8U
IC 252	(A,121,38) IC	BR93L56FJ-W
IC 301	(A,100,32) IC	PE5538A
IC 305	(A,112,25) IC	TC7SH08FUS1
IC 332	(A,64,77) IC	TC7SH08FUS1
IC 841	(B,142,74) IC	OZ964ISN
IC 845	(B,136,67) IC	TC7SH08FUS1
IC 873	(A,130,64) IC	TA78L05F
Q 1	(A,44,79) Transistor	2SC4617

Circuit Symbol and No.		Part No.
Q 101	(A,8,37) Transistor	UMX2N
Q 102	(A,10,37) Transistor	UMT2N
Q 181	(A,102,67) FET	RSQ035P03
Q 182	(A,109,67) FET	RSQ035P03
Q 251	(A,84,51) Transistor	2SC4617
Q 301	(B,103,19) Transistor	2SC4617
Q 351	(A,73,87) Transistor	2SC4081
Q 352	(A,67,87) Transistor	2SA1576
Q 602	(A,141,79) Transistor	2SC4617
Q 603	(A,140,81) Transistor	2SC4617
Q 605	(A,146,81) Transistor	UMX2N
Q 681	(A,120,26) Transistor	XN4381
Q 682	(A,126,30) Transistor	XN4381
Q 683	(A,123,26) Transistor	FMG12
Q 842	(A,149,79) Transistor	2SA1774
Q 843	(A,138,66) FET	TS8M1
Q 844	(A,145,66) FET	TS8M1
Q 871	(A,126,73) Transistor	2SC4617
Q 872	(A,127,75) Transistor	2SC4617
D 181	(A,96,64) Diode	RB160M-30
D 182	(A,111,62) Diode	RSX201L-30
D 183	(B,91,82) Diode	RB548W
D 184	(B,91,80) Diode	RB548W
D 185	(A,87,80) Diode	RB548W
D 186	(A,89,80) Diode	RB548W
D 187	(A,91,80) Diode	RB548W
D 241	(A,89,56) Diode	RB500V-40
D 242	(A,83,62) Diode	RB500V-40
D 601	(A,138,77) Diode	UDZS8R2(B)
D 681	(A,119,30) Diode	UDZS5R6(B)
D 682	(A,119,23) Diode	UDZS5R6(B)
D 683	(A,124,23) Diode	1SS355
D 840	(A,135,35) Diode	HZU6R2(B3)
D 841	(A,136,64) Diode	HZU6R2(B3)
D 842	(A,150,75) Diode	HZU6R2(B3)
D 843	(A,136,38) Diode	MA147
D 844	(A,136,29) Diode	MA147
D 851	(A,150,76) Diode	1SS355
D 871	(A,130,70) Diode	UDZS6R2(B)
D 872	(B,134,71) Diode	RB751V-40
L 1	(A,56,50) Inductor	CTF1306
L 2	(A,58,57) Inductor	CTF1306
L 3	(A,56,55) Inductor	CTF1306
L 4	(A,58,59) Inductor	CTF1306
L 5	(A,56,62) Inductor	CTF1306
L 6	(A,58,64) Inductor	CTF1306
L 7	(A,57,66) Inductor	CTF1306
L 8	(A,57,69) Inductor	CTF1306
L 9	(A,55,72) Inductor	CTF1306
L 10	(A,55,73) Inductor	CTF1306
L 11	(A,55,75) Inductor	CTF1306
L 12	(A,53,75) Inductor	CTF1306
L 13	(A,48,80) Inductor	CTF1306
L 18	(A,46,83) Inductor	CTF1306
L 25	(A,41,76) Inductor	CTF1306
L 30	(A,39,76) Inductor	CTF1306
L 34	(A,33,76) Inductor	CTF1306
L 36	(A,30,75) Inductor	CTF1306
L 38	(A,28,73) Inductor	CTF1306
L 39	(A,26,73) Inductor	CTF1306

Circuit Symbol and No.		Part No.
L 40	(A,24,72) Inductor	CTF1306
L 41	(A,23,72) Inductor	CTF1306
L 42	(A,22,72) Inductor	CTF1306
L 43	(A,20,67) Inductor	CTF1306
L 44	(A,24,67) Inductor	CTF1306
L 45	(A,22,66) Inductor	CTF1306
L 46	(A,24,65) Inductor	CTF1306
L 47	(A,20,64) Inductor	CTF1306
L 48	(A,19,63) Inductor	CTF1306
L 49	(A,23,63) Inductor	CTF1306
L 50	(A,23,61) Inductor	CTF1306
L 51	(A,23,60) Inductor	CTF1306
L 52	(A,23,59) Inductor	CTF1306
L 53	(A,24,58) Inductor	CTF1306
L 54	(A,24,56) Inductor	CTF1306
L 55	(A,24,55) Inductor	CTF1306
L 56	(A,24,54) Inductor	CTF1306
L 57	(A,23,52) Inductor	CTF1306
L 58	(A,22,51) Inductor	CTF1306
L 59	(A,24,49) Inductor	CTF1306
L 60	(A,24,48) Inductor	CTF1306
L 61	(A,27,45) Ferrite Bead	CTF1528
L 62	(A,27,44) Ferrite Bead	CTF1528
L 63	(A,29,43) Ferrite Bead	CTF1528
L 64	(A,29,44) Ferrite Bead	CTF1528
L 65	(A,30,43) Ferrite Bead	CTF1528
L 66	(A,31,44) Ferrite Bead	CTF1528
L 67	(A,32,44) Ferrite Bead	CTF1528
L 68	(A,33,42) Inductor	CTF1306
L 69	(A,35,42) Inductor	CTF1306
L 70	(A,36,43) Ferrite Bead	CTF1528
L 71	(A,36,41) Ferrite Bead	CTF1528
L 72	(A,37,43) Ferrite Bead	CTF1528
L 73	(A,38,41) Ferrite Bead	CTF1528
L 74	(A,38,42) Ferrite Bead	CTF1528
L 75	(A,39,41) Ferrite Bead	CTF1528
L 76	(A,40,42) Inductor	CTF1306
L 77	(A,41,43) Ferrite Bead	CTF1528
L 78	(A,41,41) Ferrite Bead	CTF1528
L 79	(A,42,42) Ferrite Bead	CTF1528
L 80	(A,43,41) Ferrite Bead	CTF1528
L 81	(A,43,42) Ferrite Bead	CTF1528
L 82	(A,44,40) Ferrite Bead	CTF1528
L 83	(A,45,41) Inductor	CTF1306
L 84	(A,47,39) Inductor	CTF1306
L 85	(A,47,42) Inductor	CTF1306
L 86	(A,48,42) Ferrite Bead	CTF1528
L 87	(A,49,41) Ferrite Bead	CTF1528
L 88	(A,50,41) Ferrite Bead	CTF1528
L 89	(A,51,41) Ferrite Bead	CTF1528
L 90	(A,52,42) Ferrite Bead	CTF1528
L 91	(A,53,42) Ferrite Bead	CTF1528
L 92	(A,53,44) Inductor	CTF1306
L 93	(A,54,46) Inductor	CTF1306
L 94	(A,48,84) Inductor	CTF1635
L 95	(A,25,82) Inductor	CTF1635
L 96	(A,54,84) Inductor	CTF1635
L 97	(A,21,48) Inductor	CTF1635
L 98	(A,58,53) Inductor	CTF1635
L 99	(A,59,74) Inductor	CTF1635

Circuit Symbol and No.		Part No.
L 100	(A,116,49) Choke Coil 18 µH	CTH1250
L 101	(A,11,56) Inductor	LCKAW101J2520
L 102	(A,14,55) Inductor	LCKAW101J2520
L 105	(A,14,46) Inductor	CTF1306
L 121	(A,64,41) Inductor	CTF1635
L 122	(A,65,29) Inductor	CTF1306
L 123	(A,69,35) Inductor	CTF1306
L 151	(A,26,39) Inductor	DTL1096
L 152	(A,31,38) Inductor	CTF1635
L 153	(A,23,38) Inductor	CTF1635
L 161	(B,16,35) Inductor	DTL1096
L 171	(A,26,76) Inductor	LCKAW101J2520
L 181	(B,86,77) Inductor	DTL1096
L 185	(A,123,54) Choke Coil 10 µH	CTH1249
L 186	(A,88,65) Inductor	CTF1635
L 195	(A,91,53) Inductor	CTF1635
L 203	(A,95,60) Choke Coil 68 µH	CTH1318
L 207	(B,100,83) Inductor	CTF1635
L 214	(A,115,62) Choke Coil 18 µH	CTH1250
L 251	(A,90,50) Inductor	CTF1635
L 321	(A,61,75) Inductor	CTF1635
L 351	(A,70,85) Chip Coil(UC)	LCTAW270J2520
L 351	Chip Coil(EW5)	LCTAW220J2520
L 352	(A,66,83) Chip Coil(UC)	LCTAW390J2520
L 352	Chip Coil(EW5)	LCTAW270J2520
L 353	(A,78,79) Inductor	LCKAW101J2520
L 371	(A,67,55) Inductor	CTF1630
L 372	(A,67,62) Inductor	CTF1630
L 373	(A,67,63) Inductor	CTF1630
L 380	(A,107,13) Inductor	CTF1488
T 841	(A,144,43) Transformer	CTT1119
TH301	(B,91,46) Thermistor	CCX1051
X 1	(A,53,79) Crystal Resonator 42 MHz	CSS1604
X 301	(A,101,45) Radiator 12.58 MHz	CSS1601
VR841	(A,137,73) Semi-fixed 10 kΩ(B)	CCP1423
⚠FU181	(A,108,10) Fuse 500 mA	CEK1251
⚠FU841	(A,134,52) Fuse 1.25 A	CEK1255

RESISTORS

R 1	(A,50,76)	RS1/16S105J
R 2	(A,50,78)	RS1/16S391J
R 3	(A,44,76)	RS1/16S152J
R 4	(A,46,79)	RS1/16S331J
R 5	(A,40,87)	RS1/16S0R0J
R 41	(A,29,87)	RS1/16S0R0J
R 42	(A,28,82)	RS1/16S101J
R 61	(A,21,58)	RS1/16S333J
R 62	(A,25,43)	RAB4CQ221J
R 63	(A,31,41)	RAB4CQ221J
R 64	(A,37,39)	RAB4CQ221J
R 65	(A,40,39)	RAB4CQ221J
R 67	(A,43,39)	RAB4CQ221J
R 68	(A,49,39)	RAB4CQ221J
R 69	(A,52,39)	RAB4CQ221J
R 101	(A,81,43)	RS1/16S101J
R 102	(A,89,40)	RS1/16S101J
R 103	(A,8,57)	RS1/16S472J
R 104	(A,11,45)	RS1/16S223J
R 106	(A,6,47)	RS1/16S3302F
R 107	(A,6,45)	RS1/16S5602F
R 108	(A,6,42)	RS1/16S101J
R 111	(A,6,38)	RS1/16S153J
R 112	(A,11,33)	RS1/16S153J
R 113	(A,9,34)	RS1/16S0R0J
R 114	(A,9,33)	RS1/16S0R0J
R 115	(A,8,40)	RS1/16S100J
R 116	(A,11,40)	RS1/16S100J
R 117	(A,16,45)	RS1/16S681J
R 122	(A,59,27)	RS1/16S27R0D
R 124	(A,59,29)	RS1/16S10R0D
R 125	(A,59,32)	RS1/16S6800D
R 126	(A,60,32)	RS1/16S1000D
R 128	(A,60,35)	RS1/16S82R0F
R 132	(A,60,37)	RS1/16S56R0D
R 134	(A,59,37)	RS1/16S47R0D
R 136	(A,58,40)	RS1/16S36R0D
R 138	(A,57,37)	RS1/16S33R0F
R 142	(A,57,35)	RS1/16S27R0D
R 144	(A,57,32)	RS1/16S1800D
R 146	(A,57,29)	RS1/16S82R0F
R 148	(A,57,27)	RS1/16S12R0F
R 151	(A,27,35)	RS1/16S102J
R 171	(A,11,67)	RS1/16SS104J
R 172	(A,11,66)	RS1/16SS104J
R 173	(A,11,65)	RS1/16SS104J
R 174	(B,16,72)	RS1/16SS473J
R 175	(B,14,72)	RS1/16SS473J
R 176	(B,17,72)	RS1/16SS472J
R 177	(A,11,64)	RS1/16SS473J
R 181	(B,90,77)	RS1/16S3303D
R 182	(B,94,78)	RS1/16S1802F
R 183	(B,96,80)	RS1/16S821J
R 184	(B,94,77)	RS1/16S5102D
R 185	(A,92,79)	RS1/16S2202F
R 186	(A,93,77)	RS1/16S1802F
R 187	(A,93,74)	RS1/16S1002F
R 188	(B,103,72)	RS1/16S563J
R 191	(A,98,69)	RS1/16S150J
R 192	(A,105,70)	RS1/16S150J
R 193	(B,103,67)	RS1/16S273J
R 194	(B,107,59)	RS1/16S1600D
R 195	(B,107,58)	RS1/16S1001D
R 196	(B,109,60)	RS1/16S2700D
R 201	(B,99,57)	RS1/16S682J
R 203	(B,87,68)	RS1/16S5100F
R 204	(B,88,65)	RS1/16S2001F
R 216	(B,104,62)	RS1/16S333J
R 217	(B,104,58)	RS1/16S102J
R 218	(B,99,62)	RS1/16S684J
R 219	(B,92,58)	RS1/16S6801F
R 220	(B,97,56)	RS1/16S1001D
R 221	(B,95,56)	RS1/16S201J
R 222	(B,99,61)	RS1/16S182J
R 241	(A,87,58)	RS1/16S684J
R 242	(A,81,64)	RS1/16S474J
R 251	(A,115,42)	RS1/16S103J
R 252	(A,112,42)	RS1/16SS0R0J
R 253	(A,110,40)	RS1/16S473J
R 254	(A,114,40) (EW5)	RS1/16S473J
R 256	(A,115,40)	RS1/16S473J

Circuit Symbol and No.		Part No.
R 258	(A,114,37) (UC)	RS1/16S473J
R 260	(A,111,35)	RS1/16S473J
R 261	(A,113,37)	RS1/16S473J
R 263	(A,111,32)	RS1/16S473J
R 264	(A,112,29)	RAB4CQ102J
R 268	(B,122,40)	RS1/16S0R0J
R 270	(A,117,40)	RS1/16S473J
R 271	(A,110,16)	RS1/16S102J
R 283	(B,97,23)	RAB4CQ473J
R 284	(A,88,28)	RS1/16S272J
R 285	(A,86,28)	RS1/16S272J
R 286	(A,88,25)	RS1/16S471J
R 287	(A,83,28)	RS1/16S470J
R 288	(A,83,29)	RS1/16S470J
R 291	(A,88,30)	RAB4CQ471J
R 292	(A,88,35)	RAB4CQ471J
R 294	(B,85,50)	RS1/16S0R0J
R 296	(A,84,48)	RS1/16S473J
R 297	(A,87,50)	RS1/16S473J
R 298	(A,82,51)	RS1/16S223J
R 299	(A,95,45)	RAB4CQ123J
R 300	(A,98,43)	RS1/16S473J
R 301	(B,95,48)	RS1/16SS0R0J
R 302	(A,103,21)	RS1/16S471J
R 303	(A,107,43)	RS1/16S101J
R 304	(A,109,42)	RS1/16SS0R0J
R 305	(A,90,45)	RS1/16S153J
R 306	(A,114,26)	RS1/16S473J
R 307	(A,110,25)	RS1/16S103J
R 308	(A,101,21)	RS1/16S104J
R 309	(B,105,19)	RS1/16S103J
R 335	(A,63,70)	RS1/16S0R0J
R 337	(A,61,79)	RS1/16S101J
R 351	(A,75,79)	RS1/16S0R0J
R 352	(A,73,79)	RS1/16S104J
R 353	(A,78,82)	RS1/16S153J
R 354	(A,74,84)	RS1/16S104J
R 355	(A,71,81)	RS1/16S681J
R 356	(A,71,82)	RS1/16S471J
R 357	(A,65,80)	RS1/16S272J
R 358	(A,70,88)	RS1/16S391J
R 602	(A,142,85)	RS1/16S621J
R 603	(A,143,79)	RS1/16S103J
R 604	(A,141,77)	RS1/16S104J
R 605	(A,138,79)	RS1/16S473J
R 606	(A,143,84)	RS1/16S621J
R 607	(A,146,78)	RS1/16S821J
R 608	(A,143,82)	RS1/16S101J
R 609	(A,143,81)	RS1/16S101J
R 681	(A,118,20)	RS1/16S104J
R 682	(A,122,32)	RS1/16S104J
R 683	(A,122,21)	RS1/16S102J
R 684	(A,125,27)	RS1/16S102J
R 701	(A,73,18)	RS1/16S103J
R 722	(B,92,17)	RS1/16S470J
R 751	(B,62,18)	RS1/10S152J
R 752	(B,59,17)	RS1/10S751J
R 753	(B,59,19)	RS1/10S751J
R 754	(B,59,9)	RS1/10S751J
R 755	(B,59,11)	RS1/10S751J

Circuit Symbol and No.		Part No.
R 757	(B,59,13)	RS1/10S152J
R 758	(B,59,15)	RS1/10S152J
R 759	(A,62,18) (UC)	RS1/10S751J
R 759	(EW5)	RS1/10S561J
R 760	(A,59,17)	RS1/16S0R0J
R 761	(B,70,13)	RS1/16S822J
R 842	(B,135,64)	RS1/16S103J
R 843	(A,148,77)	RS1/16S183J
R 844	(A,149,81)	RS1/16S473J
R 845	(A,151,79)	RS1/16S472J
R 846	(A,143,74)	RS1/16S513J
R 847	(B,137,73)	RS1/16S105J
R 848	(A,142,71)	RS1/16S563J
R 849	(A,150,73)	RS1/16S103J
R 850	(B,135,63)	RS1/16S105J
R 851	(A,136,68)	RS1/16S103J
R 853	(A,136,33)	RS1/16S561J
R 871	(A,128,73)	RS1/16S103J
R 872	(A,128,70)	RS1/16S104J
R 873	(A,125,70)	RS1/16S473J
R 874	(A,130,77)	RS1/16S105J
R 878	(B,132,68)	RS1/16S153J

CAPACITORS

C 1	(A,55,48)	CKSSYF104Z16
C 2	(A,55,52)	CKSSYF104Z16
C 3	(A,55,54)	CKSSYF104Z16
C 4	(A,55,59)	CKSSYF104Z16
C 5	(A,55,60)	CKSSYF104Z16
C 6	(A,55,65)	CKSSYF104Z16
C 7	(A,55,67)	CKSSYF104Z16
C 8	(A,55,70)	CKSSYF104Z16
C 9	(A,52,73)	CKSSYF104Z16
C 11	(A,50,74)	CKSSYF104Z16
C 12	(A,48,74)	CKSSYF104Z16
C 13	(A,46,74)	CKSSYF104Z16
C 14	(A,55,79)	CCSRCH9R0D50
C 15	(A,50,81)	CCSRCH9R0D50
C 16	(A,46,76)	CKSRYB103K50
C 17	(A,47,80)	CCSRCH181J50
C 18	(A,44,74)	CKSSYF104Z16
C 19	(A,43,76)	CCSRCH4R0D50
C 20	(A,45,81)	CKSRYF104Z16
C 22	(A,42,80)	CKSRYB104K25
C 23	(A,41,80)	CKSRYB104K25
C 24	(A,40,80)	CKSRYB104K25
C 25	(A,41,74)	CKSSYF104Z16
C 26	(A,38,81)	CKSRYB104K25
C 27	(A,38,87)	CKSRYB104K25
C 28	(A,38,79)	CKSRYB104K25
C 30	(A,39,74)	CKSSYF104Z16
C 31	(A,35,78)	CKSRYB104K25
C 32	(A,37,76)	CKSRYB104K25
C 33	(A,36,76)	CKSRYB104K25
C 34	(A,34,76)	CKSRYB104K25
C 35	(A,34,74)	CKSSYF104Z16
C 36	(A,34,80)	CKSSYF104Z16
C 37	(A,33,80)	CKSSYF104Z16
C 38	(A,32,80)	CKSSYF104Z16

Circuit Symbol and No.		Part No.
C 39	(A,31,77)	CKSRYB104K25
C 40	(A,30,77)	CKSRYB104K25
C 41	(A,31,74)	CKSSYF104Z16
C 42	(A,31,81)	CKSSYF104Z16
C 44	(A,30,74)	CKSSYF104Z16
C 45	(A,26,71)	CKSSYF104Z16
C 46	(A,25,68)	CKSSYF104Z16
C 47	(A,26,67)	CKSSYF104Z16
C 48	(A,28,81)	CCSRCH331J50
C 49	(A,25,62)	CKSSYF104Z16
C 53	(A,25,59)	CKSSYF104Z16
C 54	(A,26,57)	CKSSYF104Z16
C 55	(A,26,55)	CKSSYF104Z16
C 56	(A,25,53)	CKSSYF104Z16
C 57	(A,25,51)	CKSSYF104Z16
C 58	(A,24,51)	CKSSYF104Z16
C 59	(A,25,49)	CKSSYF104Z16
C 60	(A,26,47)	CKSRYF105Z10
C 62	(A,21,59)	CKSSYF104Z16
C 68	(A,33,44)	CKSSYF104Z16
C 69	(A,35,44)	CKSSYF104Z16
C 76	(A,39,44)	CKSSYF104Z16
C 83	(A,44,44)	CKSSYF104Z16
C 85	(A,46,44)	CKSSYF104Z16
C 89	(A,58,43)	CSZSR330M10
C 90	(A,46,43)	CKSSYF104Z16
C 91	(A,121,47)	CKSRYB104K25
C 92	(A,50,44)	CKSSYF104Z16
C 93	(A,53,45)	CKSSYF104Z16
C 94	(A,45,84)	CKSYF105Z16
C 95	(A,36,86)	CSZSR330M10
C 96	(A,51,85)	CSZSR330M10
C 97	(A,19,49)	CSZS100M16
C 98	(A,59,50)	CSZSR220M10
C 99	(A,59,71)	CSZSR220M10
C 100	(A,58,47)	CSZSR330M10
C 101	(A,15,43)	CKSSYF104Z16
C 102	(A,86,42)	CKSSYF104Z16
C 103	(A,8,61)	CKSRYB105K6R3
C 104	(A,12,59)	CKSRYB104K25
C 105	(A,9,53)	CKSRYB104K25
C 106	(A,15,52)	CKSRYB104K25
C 107	(A,7,54)	CSZSR220M16
C 108	(A,12,51) 4.7 µF	CCG1111
C 111	(A,6,50)	CKSRYB105K6R3
C 112	(A,9,41)	CKSRYF104Z16
C 121	(A,70,33)	CKSRYF104Z16
C 122	(A,63,37)	CKSSYF104Z16
C 123	(A,65,39)	CSZS100M16
C 151	(A,25,41)	CKSSYF104Z16
C 152	(A,31,34)	CKSSYF104Z16
C 153	(A,23,40)	CKSRYB104K25
C 154	(A,24,35)	CKSRYB104K25
C 155	(A,25,36)	CKSSYF104Z16
C 156	(A,31,36)	CSZSR330M10
C 157	(A,21,36)	CKSQYF334Z25
C 158	(A,27,39)	CSZS100M16
C 161	(A,29,41)	CKSSYF104Z16
C 162	(A,14,40)	CKSRYB104K25
C 163	(A,19,38) 4.7 µF	CCG1111

Circuit Symbol and No.		Part No.
C 164	(A,18,35)	CKSRYB104K25
C 181	(A,85,76)	CKSQYF105Z25
C 182	(A,96,81)	CKSQYF105Z25
C 183	(B,94,82)	CKSRYB104K25
C 184	(B,88,78)	CKSQYF105Z25
C 188	(A,85,81)	CKSQYF105Z25
C 190	(A,91,83)	CKSQYF225Z16
C 191	(A,89,84)	CKSQYF225Z16
C 192	(A,93,83)	CKSQYF105Z25
C 193	(A,89,78)	CKSRYF474Z16
C 194	(A,88,78)	CKSRYF474Z16
C 195	(A,95,76)	CKSYF475Z16
C 196	(B,94,80)	CKSRYB472K50
C 197	(B,94,81)	CKSRYB472K50
C 198	(A,86,53)	CKSQYF105Z25
C 199	(A,91,78)	CKSRYF474Z16
C 200	(A,87,83)	CKSQYF105Z25
C 201	(A,95,53) 33 µF/10 V	CCH1586
C 202	(A,95,55)	CKSRYB104K25
C 203	(A,102,65)	CKSRYB103K50
C 204	(A,101,59) 10 µF	CCG1223
C 205	(B,100,76)	CKSRYB103K50
C 206	(B,101,76)	CKSRYB105K6R3
C 207	(B,100,81)	CKSQYF105Z25
C 208	(B,101,71)	CKSRYB102K50
C 209	(B,101,74)	CKSRYB104K25
C 210	(A,123,47)	CKSQYF105Z25
C 211	(B,101,69)	CKSRYB105K6R3
C 212	(A,106,61) 10 µF	CCG1223
C 213	(B,103,66)	CKSRYB104K25
C 214	(A,106,57) 10 µF	CCG1223
C 215	(A,115,57)	CKSRYB104K25
C 216	(A,112,56) 68 µF/6.3 V	CCH1440
C 217	(B,104,61)	CCSRCH101J50
C 219	(B,107,61)	CKSRYB103K50
C 221	(B,104,59)	CCSRCH331J50
C 223	(B,101,61)	CKSRYB393K16
C 224	(B,99,60)	CKSRYB103K25
C 226	(B,99,58)	CKSRYB473K25
C 228	(B,91,62)	CKSRYB393K16
C 229	(B,87,70)	CKSRYB393K16
C 230	(A,89,70)	CKSRYB102K50
C 231	(B,85,68)	CKSRYB104K25
C 232	(B,86,64)	CSZS100M16
C 233	(A,92,74)	CKSRYB105K6R3
C 234	(A,88,67)	CKSRYB104K25
C 235	(A,97,77)	CKSRYB103K50
C 236	(A,88,56)	CKSRYF105Z10
C 237	(A,80,56)	CKSRYB104K25
C 238	(A,82,53)	CSZS100M10
C 239	(A,97,81)	CKSSYF104Z16
C 240	(A,105,63)	CKSRYB103K50
C 241	(A,84,64)	CKSRYF105Z10
C 242	(A,83,73)	CKSRYB104K25
C 243	(A,82,76)	CSZS100M10
C 244	(A,86,61)	CSZS100M16
C 245	(A,82,65)	CKSRYB104K25
C 248	(A,86,56)	CKSRYB104K25
C 251	(A,110,47)	CKSSYF104Z16
C 252	(A,113,44)	CKSRYB103K50

Circuit Symbol and No.		Part No.
C 253	(A,123,42)	CKSSYF104Z16
C 257	(A,90,47)	CSZSR330M10
C 258	(A,88,45)	CKSSYF104Z16
C 261	(A,102,42)	CKSSYF104Z16
C 301	(B,105,21)	CKSRYB105K6R3
C 302	(B,103,17)	CKSSYF104Z16
C 303	(B,95,17)	CKSSYF104Z16
C 304	(B,95,16)	CKSRYB104K50
C 305	(A,112,23)	CKSSYF104Z16
C 307	(A,90,44)	CKSRYB104K25
C 322	(A,64,72)	CSZS100M10
C 323	(A,64,74)	CKSRYF104Z16
C 333	(A,64,75)	CKSRYF104Z16
C 351	(A,75,81) 10 µF	CCG1171
C 352	(A,69,82) (UC)	CCSRCH680J50
C 352	(EW5)	CCSRCH470J50
C 353	(A,68,80) (UC)	CCSRCH101J50
C 353	(EW5)	CCSRCH680J50
C 354	(A,67,85) (UC)	CCSRCK2R0C50
C 354	(EW5)	CCSRCH5R0C50
C 355	(A,66,80) (UC)	CCSRCH680J50
C 355	(EW5)	CCSRCH470J50
C 356	(A,72,84)	CKSSYF104Z16
C 357	(A,75,76)	CSZSR330M10
C 385	(A,133,44) 10 µF	CCG1223
C 386	(A,133,47) 10 µF	CCG1223
C 387	(A,113,13)	CKSQYF224Z25
C 602	(A,141,83)	CKSRYB104K25
C 681	(A,128,26)	CKSRYB102K50
C 682	(A,125,20)	CKSRYB102K50
C 683	(A,119,32)	CKSRYB102K50
C 684	(A,116,20)	CKSRYB102K50
C 685	(A,120,29)	CKSSYF104Z16
C 686	(A,128,27)	CKSRYB102K50
C 687	(A,125,22)	CKSRYB102K50
C 751	(A,67,16)	AVR-M1608C080MTAAB
C 752	(A,65,16)	AVR-M1608C080MTAAB
C 753	(A,69,16)	AVR-M1608C080MTAAB
C 754	(B,87,23)	CKSSYF104Z16
C 755	(B,65,19)	CKSSYB102K50
C 843	(A,128,75)	CKSRYB104K25
C 844	(B,141,79)	CKSQYB105K10
C 845	(B,143,79)	CKSQYB474K16
C 846	(A,134,72)	CKSRYF105Z10
C 847	(B,147,77)	CKSRYF104Z50
C 848	(A,146,74)	CKSRYB562K50
C 849	(A,148,74)	CKSRYB152K50
C 852	(B,136,73)	CKSRYB103K50
C 853	(A,145,72)	CKSRYB473K50
C 854	(B,132,72)	CFHXSQ221J50
C 855	(A,135,70)	CKSRYB473K50
C 856	(A,150,70) 10 µF	CCG1223
C 857	(A,142,66) 10 µF	CCG1223
C 858	(A,135,61)	CKSQYB105K10
C 859	(A,136,24) 15 pF	CCG1194
C 861	(B,134,39)	CKSRYB153K50
C 862	(A,137,61)	CKSQYB105K10
C 871	(A,130,60)	CKSRYF104Z50
C 872	(A,126,62)	CKSRYF105Z10
C 891	(B,134,68)	CKSRYF104Z50

Circuit Symbol and No.		Part No.

L

Unit Number : CZW5026
Unit Name : Main PCB Unit

MISCELLANEOUS

IC 1	IC	BA6288FS
IC 2	IC	S-812C50AMC-C3E
IC 3	IC	TC7W14FU
IC 4	Photo-interrupter	GP2L24B
IC 5	Photo-interrupter	GP2L24B
Q 1	Transistor	2SB1185
Q 2	Transistor	IMX1
D 1	Diode	HZU6R2(B2)
L 2	Inductor	LCTAW2R2J2520
⚠FU1	Fuse 2 A	CEK1304

RESISTORS

R 1		RS1/16S223J
R 2		RS1/8S271J
R 3		RS1/16S332J
R 4		RS1/16S471J
R 5		RS1/16S222J
R 11		RS1/10S0R0J
R 12		RS1/16S222J
R 13		RS1/16S222J
R 14		RS1/16S821J
R 15		RS1/16S821J
R 19		RS1/16S102J
R 20		RS1/16S102J
R 21		RS1/16S102J
R 22		RS1/16S102J

CAPACITORS

C 1		CKSRYB153K50
C 2	39 µF/16 V	CZC5169
C 3		CKSRYB105K10
C 7		CEVW100M16
C 8		CKSRYB104K50
C 9		CKSRYB473K50
C 10		CKSRYB473K50
C 11		CEVW100M16
C 12		CEVW100M16
C 13		CKSRYB104K50
C 14		CKSRYB104K50

Miscellaneous Parts List

	Pickup Unit(Service)(DP5)	CXX1945
M 1	Motor Unit(LOADING)	CXC4315
M 2	Motor Unit(CARRIAGE)	CXC4314
M 3	Motor(SPINDLE)	CXM1308