EXPLODED VIEW / PARTS LIST

Escutcheon section

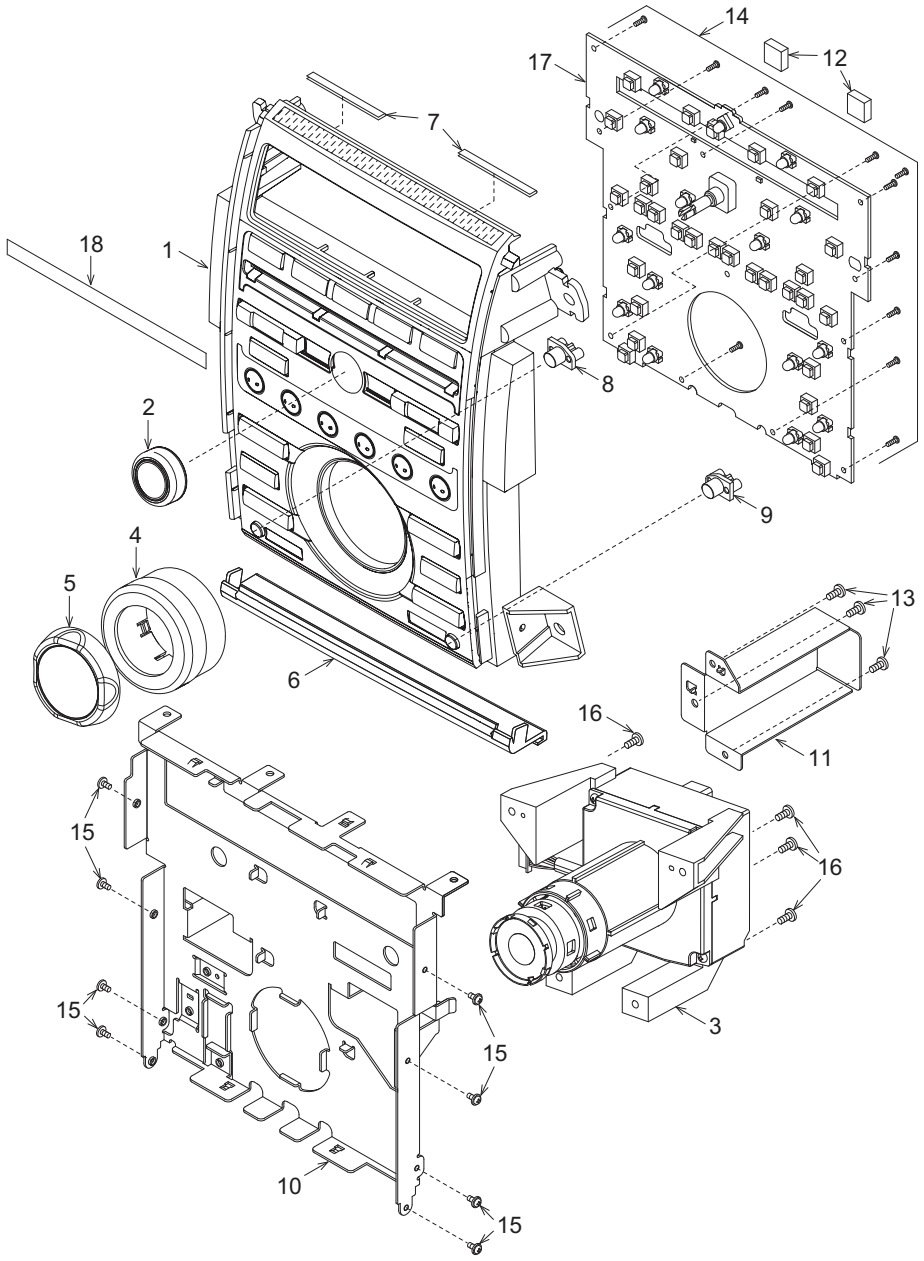

Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8047-16	ES-ASSY(PH-2644B-L) (PH-2644B-N)	1
	940-8047-17	ES-ASSY(PH-2644B-K)	
	940-8047-18	ES-ASSY(PH-2644B-M)	
2	947-0557-00	KNOB-ASSY	1
3	947-0564-01	JOG CONTROLLER	1
4	947-0559-00	KNOB(OUTER)	1
5	947-0560-00	KNOB(TOP)	1
6	335-7274-10	WOOD PANEL(PH-2644B-K) (PH-2644B-L)	1
	335-7274-20	WOOD PANEL(PH-2644B-M) (PH-2644B-N)	
7	347-7413-00	CUSHION SHEET	2
8	382-7086-01	BUTTON	1

NO.	PART NO.	DESCRIPTION	Q'TY
9	382-7087-01	BUTTON	1
10	309-0802-01	ES-PLATE	1
11	331-3862-01	JOG-CVR	1
12	345-5821-00	CUSHION RUBBER	2
13	714-2606-8B	MACHINE SCREW(M2.6 x 6)	3
14	716-0778-51	WAVE SCREW(2 x 6)	12
15	716-0878-50	IT-SCREW(M2.6 x 5)	8
16	716-1573-50	SPECIAL SCREW(2.6 x 6)	4
17	----------	SWITCH PWB	1
18	290-0175-00	LABEL(CAUTION)	1

Main section

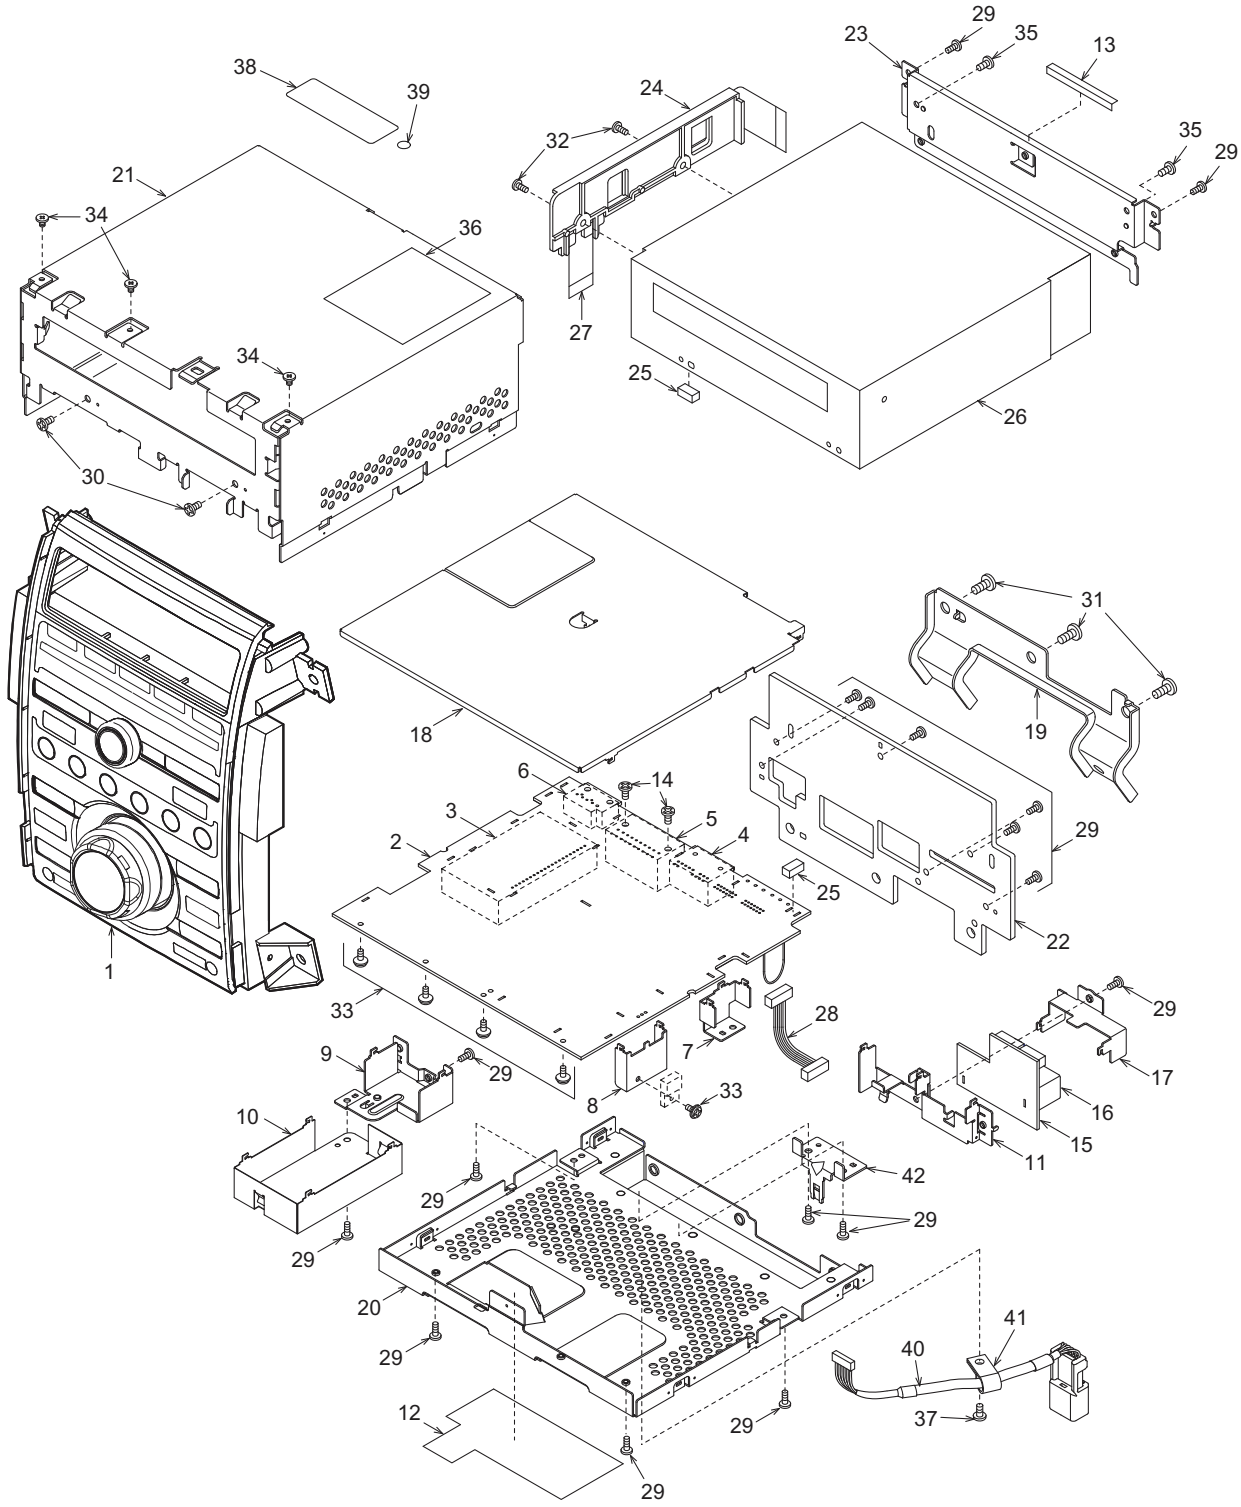

Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	ESCUTCHEON SECTION	1
2	----------	MAIN PWB	1
3	880-1920F	AM/FM TUNER	1
4	074-1166-01	OUTLET SOCKET(20P)	1
5	074-1168-14	OUTLET SOCKET(14P)	1
6	092-2210-00	ANT-RECEPT(GT13)	1
7	331-3857-00	PWB-BRKT	1
8	331-3859-00	TR-HOLDER	1
9	331-3860-00	ANT-HOLDER	1
10	331-3864-00	SHIELD CASE	1
11	331-3866-00	REAR PLATE	1
12	347-7885-00	SPACER	1
13	347-7886-00	SPACER	1
14	778-3006-00	TAP-SCREW(3 x 6)	2
15	----------	CONNECTOR PWB	1
16	074-4025-32	OUTLET SOCKET(32P)	1
17	331-3861-00	CN-HOLDER	1
18	331-3863-00	SHIELD PLATE	1
19	300-8020-01	MTG-BRKT	1
20	304-0480-04	LOWER-CVR-ASSY	1
21	310-1800-01	UPPER CASE	1
22	313-1908-01	HEAT SINK	1

NO.	PART NO.	DESCRIPTION	Q'TY
23	331-3858-02	MECH-BRKT	1
24	335-7275-01	FFC-HOLDER	1
25	345-5805-01	GASKET	2
26	929-2502-03	DVD CHANGER MECHANISM	1
27	816-2654-00	FLAT WIRE(30P)	1
28	854-4575-01	EXTENSION LEAD(6P)	1
29	714-2606-8B	MACHINE SCREW(M2.6 x 6)	17
30	714-3005-8B	MACHINE SCREW(M3 x 5)	2
31	716-0678-50	SCREW(M5 x 8)	3
32	716-0821-53	IT-SCREW(M3 x 5)	2
33	716-0878-50	IT-SCREW(M2.6 x 5)	5
34	716-3504-50	SPECIAL SCREW(M2.6 x 4)	3
35	731-3005-8B	TAPTIGHT(M3 x 5)	2
36	286-6491-04 286-6491-05 286-6491-24 286-6491-25	SETPLATE(PH-2644B-K) SETPLATE(PH-2644B-M) SETPLATE(PH-2644B-L) SETPLATE(PH-2644B-N)	1
37	737-2608-1B	SEMS SCREW	1
38	285-1960-00	GUIDE LABEL	1
39	290-8239-02	LABEL	1
40	854-8120-02	EXTENSION LEAD	1
41	321-1007-00	CLAMP	1
42	331-4135-00	CABLE HOLDER	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION
ANT101	092-2210-00	ANTENNA RECEPT
BL101	880-1920F	AM/FM TUNER
C101	168-1032-55	0.01uF K
C102	166-4701-50	47pF CH
C103	166-4701-50	47pF CH
C105	168-3332-78	0.033uF K
C106	166-6811-50	680pF
C107	168-3922-55	3900pF K
C108	168-1022-55	1000pF K
C109	168-1032-55	0.01uF K
C110	168-4732-78	0.047uF K
C111	168-1032-55	0.01uF K
C113	166-2201-50	22pF CH
C114	166-1801-50	18pF CH
C115	166-2096-50	2pF CK
C116	166-2201-50	22pF CH
C117	168-4732-78	0.047uF K
C118	168-2232-55	0.022uF K
C119	168-2232-55	0.022uF K
C120	166-8096-50	8pF D CH
C121	166-8096-50	8pF D CH
C122	168-2232-55	0.022uF K
C123	042-0643-51	16V 100uF LOW-ESR
C124	168-2232-55	0.022uF K
C125	168-2232-55	0.022uF K
C126	042-0643-51	16V 100uF LOW-ESR
C128	168-1022-55	1000pF K
C129	168-2232-55	0.022uF K
C130	166-2201-50	22pF CH
C131	166-1011-50	100pF CH
C132	042-0643-51	16V 100uF LOW-ESR
C133	166-1011-50	100pF CH
C134	168-1042-78	16V 0.1uF
C135	166-1011-50	100pF CH
C136	166-1011-50	100pF CH
C138	166-1007-50	10pF CH
C139	178-1052-78	1uF
C140	178-2232-78	0.022uF
C141	168-1022-55	1000pF K
C142	043-0563-90	16V 47uF
C143	043-0547-50	16V 3.3uF
C144	168-2245-79	0.22uF Z
C145	168-3332-78	0.033uF K
C146	168-1042-78	16V 0.1uF
C147	168-2232-55	0.022uF K
C148	168-1032-55	0.01uF K
C149	043-0563-90	16V 47uF
C150	168-1032-55	0.01uF K
C151	168-6832-78	0.068uF K
C152	168-6832-78	0.068uF K
C153	168-3332-78	0.033uF K
C154	168-3322-55	3300pF K
C155	168-3332-78	0.033uF K
C156	168-3332-78	0.033uF K
C157	178-2255-79	2.2uF
C158	168-1532-55	0.015uF K
C159	168-1532-55	0.015uF K
C160	168-1232-55	0.012uF K
C161	168-1232-55	0.012uF K
C162	168-1042-78	16V 0.1uF
C163	178-2255-79	2.2uF
C169	168-6832-78	0.068uF K
C182	178-1052-78	1uF
C186	178-1052-78	1uF
C201	163-1063-35	16V 10uF
C202	163-1063-35	16V 10uF
C203	163-1063-35	16V 10uF
C204	163-1063-35	16V 10uF
C205	168-1042-78	16V 0.1uF
C206	168-1032-55	0.01uF K
C207	163-2253-65	50V 2.2uF
C208	163-2253-65	50V 2.2uF
C209	163-2253-65	50V 2.2uF
C210	163-2253-65	50V 2.2uF
C211	166-1011-50	100pF CH
C212	166-1011-50	100pF CH
C213	168-1022-55	1000pF K
C214	168-1022-55	1000pF K
C215	166-1011-50	100pF CH
C216	166-1011-50	100pF CH
C217	166-1011-50	100pF CH
C218	166-1011-50	100pF CH
C219	168-1042-78	16V 0.1uF
C220	166-1007-50	10pF CH
C221	166-1007-50	10pF CH
C222	168-1032-55	0.01uF K
C223	042-0474-90	16V 10uF
C224	042-0474-90	16V 10uF
C225	042-0474-90	16V 10uF
C226	042-0474-90	16V 10uF
C227	042-0474-90	16V 10uF
C228	042-0474-90	16V 10uF
C229	168-1042-78	16V 0.1uF
C230	168-1042-78	16V 0.1uF
C231	166-1011-50	100pF CH
C232	178-2255-79	2.2uF
C233	178-2255-79	2.2uF
C234	166-1011-50	100pF CH
C235	163-4763-35	16V 47uF
C236	042-0643-51	16V 100uF LOW-ESR
C237	042-0654-52	16V 10uF
C238	042-0654-52	16V 10uF
C239	166-1007-50	10pF CH
C240	166-1011-50	100pF CH
C241	042-1678-00	16V 470uF
C243	166-1011-50	100pF CH
C244	166-1007-50	10pF CH
C245	166-1007-50	10pF CH
C247	166-1007-50	10pF CH
C249	166-1007-50	10pF CH
C250	166-1007-50	10pF CH
C251	166-1007-50	10pF CH
C252	166-1007-50	10pF CH
C253	166-1011-50	100pF CH
C254	166-1011-50	100pF CH
C255	166-1011-50	100pF CH
C256	168-1032-55	0.01uF K
C257	163-4753-55	35V 4.7uF
C258	163-4753-55	35V 4.7uF
C259	178-2255-79	2.2uF
C260	178-2255-79	2.2uF
C261	178-2255-79	2.2uF
C262	178-2255-79	2.2uF
C263	178-2255-79	2.2uF
C264	178-2255-79	2.2uF
C265	166-1011-50	100pF CH
C267	168-1042-78	16V 0.1uF
C268	178-2255-79	2.2uF
C269	178-2255-79	2.2uF
C270	178-2255-79	2.2uF
C271	178-2255-79	2.2uF
C301	168-1032-55	0.01uF K
C306	168-1042-78	16V 0.1uF
C307	163-2263-35	16V 22uF
C310	168-1042-78	16V 0.1uF
C311	163-2263-35	16V 22uF
C312	168-1042-78	16V 0.1uF
C314	042-0526-50	16V 10uF
C315	042-0526-50	16V 10uF
C316	042-0526-50	16V 10uF
C317	042-0526-50	16V 10uF
C318	042-0526-50	16V 10uF
C319	042-0526-50	16V 10uF
C320	042-0526-50	16V 10uF
C321	042-0526-50	16V 10uF
C322	042-0526-50	16V 10uF
C323	042-0526-50	16V 10uF
C324	042-0526-50	16V 10uF
C325	042-0526-50	16V 10uF
C331	168-1042-78	16V 0.1uF
C332	163-4763-35	16V 47uF
C333	168-1042-78	16V 0.1uF
C334	166-4711-50	470pF CH
C335	166-4711-50	470pF CH
C336	166-4711-50	470pF CH
C337	168-8212-55	820pF K
C338	168-8212-55	820pF K
C339	168-8212-55	820pF K
C340	168-8212-55	820pF K
C341	168-8212-55	820pF K
C342	168-8212-55	820pF K
C343	168-8212-55	820pF K
C344	166-4711-50	470pF CH
C345	168-8212-55	820pF K
C346	042-0654-52	16V 10uF
C347	042-0654-52	16V 10uF
C348	042-0654-52	16V 10uF
C349	042-0654-52	16V 10uF
C350	166-1011-50	100pF CH
C351	166-1011-50	100pF CH
C352	166-1011-50	100pF CH
C353	166-1011-50	100pF CH
C354	168-1042-78	16V 0.1uF
C358	166-1007-50	10pF CH
C359	166-1007-50	10pF CH
C360	166-1007-50	10pF CH
C361	166-1007-50	10pF CH
C362	166-1007-50	10pF CH
C363	166-1007-50	10pF CH
C364	168-1042-78	16V 0.1uF
C365	168-1042-78	16V 0.1uF
C368	168-3322-55	3300pF K
C369	168-3322-55	3300pF K
C370	168-2722-55	2700pF K
C371	168-2722-55	2700pF K
C372	168-2722-55	2700pF K
C373	168-2722-55	2700pF K
C374	166-7097-50	7pF CH
C375	166-7097-50	7pF CH
C376	166-7097-50	7pF CH
C401	168-1022-55	1000pF K
C402	178-2255-79	2.2uF
C403	163-1063-35	16V 10uF
C404	168-1032-55	0.01uF K
C405	168-1042-78	16V 0.1uF
C406	168-1022-55	1000pF K
C407	168-1042-78	16V 0.1uF
C408	168-1042-78	16V 0.1uF
C409	168-1042-78	16V 0.1uF
C410	168-1042-78	16V 0.1uF
C411	166-2211-50	220pF CH
C412	166-1011-50	100pF CH
C413	178-1052-78	1uF
C414	166-6097-50	6pF CH
C415	166-6097-50	6pF CH
C416	168-1042-78	16V 0.1uF
C417	163-2253-65	50V 2.2uF
C418	168-2245-79	0.22uF Z
C419	168-1022-55	1000pF K

REF No.	PART No.	DESCRIPTION
C420	166-1011-50	100pF CH
C421	168-1042-78	16V 0.1uF
C422	163-1063-35	16V 10uF
C423	166-1011-50	100pF CH
C424	166-5601-50	56pF CH
C425	168-1032-55	0.01uF K
C426	168-1022-55	1000pF K
C428	166-1011-50	100pF CH
C430	166-1511-50	150pF CH
C431	166-1011-50	100pF CH
C432	166-2201-50	22pF CH
C433	166-2201-50	22pF CH
C501	042-1674-00	10V 220uF
C502	163-4763-35	16V 47uF
C504	042-0654-52	16V 10uF
C505	042-0654-52	16V 10uF
C506	042-0654-52	16V 10uF
C507	042-0654-52	16V 10uF
C508	042-0654-52	16V 10uF
C509	042-0654-52	16V 10uF
C513	042-1674-00	10V 220uF
C514	042-1674-00	10V 220uF
C515	042-1674-00	10V 220uF
C516	166-2201-50	22pF CH
C517	166-2201-50	22pF CH
C518	166-2201-50	22pF CH
C519	166-2201-50	22pF CH
C520	166-2201-50	22pF CH
C521	166-2201-50	22pF CH
C522	166-2201-50	22pF CH
C523	166-2201-50	22pF CH
C524	166-2201-50	22pF CH
C525	166-2201-50	22pF CH
C526	166-2201-50	22pF CH
C527	166-2201-50	22pF CH
C528	042-1674-00	10V 220uF
C529	042-1674-00	10V 220uF
C530	042-1674-00	10V 220uF
C531	042-1674-00	10V 220uF
C532	042-1674-00	10V 220uF
C533	042-1674-00	10V 220uF
C534	166-2201-50	22pF CH
C535	166-2201-50	22pF CH
C536	166-2201-50	22pF CH
C537	166-2201-50	22pF CH
C538	166-2201-50	22pF CH
C539	166-2201-50	22pF CH
C540	166-2201-50	22pF CH
C541	166-2201-50	22pF CH
C542	166-2201-50	22pF CH
C543	166-2201-50	22pF CH
C544	166-2201-50	22pF CH
C545	166-2201-50	22pF CH
C546	042-1674-00	10V 220uF
C547	042-1674-00	10V 220uF
C548	042-1674-00	10V 220uF
C550	042-1674-00	10V 220uF
C551	043-0499-51	0.1uF
C552	163-1063-35	16V 10uF
C553	168-1032-55	0.01uF K
C554	168-1032-55	0.01uF K
C555	168-1032-55	0.01uF K
C556	168-1032-55	0.01uF K
C557	168-1032-55	0.01uF K
C558	168-1032-55	0.01uF K
C559	168-2222-55	2200pF K
C560	168-2222-55	2200pF K
C561	168-2222-55	2200pF K
C562	168-2222-55	2200pF K
C563	168-2222-55	2200pF K
C564	168-2222-55	2200pF K
C565	168-2222-55	2200pF K
C567	168-2222-55	2200pF K
C568	168-2222-55	2200pF K

REF No.	PART No.	DESCRIPTION
C577	043-0499-51	0.1uF
C578	166-1007-50	10pF CH
C579	166-1007-50	10pF CH
C580	043-0506-50	0.1uF
C581	043-0506-50	0.1uF
C582	178-2255-79	2.2uF
C583	178-2255-79	2.2uF
C601	163-2263-35	16V 22uF
C602	168-1032-55	0.01uF K
C603	042-0643-50	35V 22uF LOW-ESR
C604	168-1042-78	16V 0.1uF
C606	163-1063-35	16V 10uF
C607	168-1042-78	16V 0.1uF
C608	042-0579-50	16V 47uF
C609	042-0643-50	35V 22uF LOW-ESR
C611	178-3342-78	0.33uF
C612	042-0643-51	16V 100uF LOW-ESR
C613	042-0643-50	35V 22uF LOW-ESR
C614	168-1042-78	16V 0.1uF
C616	042-0643-50	35V 22uF LOW-ESR
C617	178-3342-78	0.33uF
C618	042-0643-51	16V 100uF LOW-ESR
C619	042-0579-50	16V 47uF
C620	168-1042-78	16V 0.1uF
C621	163-4743-65	50V 0.47uF
C622	042-1675-00	16V 3300uF
C623	042-0643-51	16V 100uF LOW-ESR
C625	168-1042-78	16V 0.1uF
C626	043-0506-50	0.1uF
C627	043-0506-50	0.1uF
C628	042-0579-50	16V 47uF
C629	178-3342-78	0.33uF
C630	042-0579-51	16V 10uF
C632	042-0643-52	6.3V 1000uF
C633	166-1011-50	100pF CH
C634	163-2253-65	50V 2.2uF
C637	168-1032-55	0.01uF K
C638	168-1032-55	0.01uF K
C639	168-1042-78	16V 0.1uF
CCT101	050-0145-52	1/16W 1k ohm x4
CCT201	050-0145-52	1/16W 1k ohm x4
CCT202	050-0145-55	1/16W 10k ohm x4
CCT203	050-0145-55	1/16W 10k ohm x4
CCT403	050-0145-55	1/16W 10k ohm x4
CCT404	050-0146-53	1/16W 100k ohm x2J
CCT405	050-0146-54	1/16W 47k ohm x2J
D101	001-3205-90	1SV251
D102	001-3205-90	1SV251
D103	001-2403-90	M1F60
D104	001-0354-91	MA151WK
D201	001-0516-90	MA111
D202	001-0529-69	MA8180-M
D203	001-0516-90	MA111
D204	001-0529-32	MA8056-M
D205	001-0529-32	MA8056-M
D401	001-0529-36	MA8062-H
D402	001-0529-57	MA8120-H
D403	001-0529-32	MA8056-M
D404	001-0529-32	MA8056-M
D405	001-0529-43	MA8082-L
D407	001-0516-90	MA111
D408	001-0516-90	MA111
D409	001-0516-90	MA111
D410	001-0529-32	MA8056-M
D411	001-0529-57	MA8120-H
D412	001-0516-90	MA111
D420	001-4101-95	U1ZB27-TE12R
D423	001-0529-38	MA8068-M
D424	001-0354-91	MA151WK
D503	001-2403-90	M1F60
D504	001-2403-90	M1F60

REF No.	PART No.	DESCRIPTION
D505	001-2403-90	M1F60
D507	001-2403-90	M1F60
D508	001-2403-90	M1F60
D601	001-2403-90	M1F60
D602	001-4309-01	HZK11C
D603	001-4309-00	HZK11A
D604	001-0529-32	MA8056-M
D607	001-0516-90	MA111
D608	001-0377-57	MA4120H
D609	001-0516-90	MA111
D610	001-0516-90	MA111
D611	001-0504-39	HZS7 B2L
D612	001-2015-00	RL253
D616	001-0354-91	MA151WK
D619	001-0529-45	MA8082-H
D620	001-2403-90	M1F60
D621	001-0529-46	MA8091-L
D623	001-0516-90	MA111
D624	001-0535-90	MA729
D627	001-0516-90	MA111
IC101	051-4603-90	TA2083FN
IC102	051-6201-90	LC72146M
IC103	051-4618-90	HA12181FP-EL-E
IC201	051-3019-90	NJM2060V
IC202	051-3020-90	NJM4565V
IC203	051-6600-38	CA0008AM
IC204	051-7709-90	TC9273F-004EL
IC205	051-3020-90	NJM4565V
IC206	051-3019-90	NJM2060V
IC301	051-7511-38	TC74LCX07FTEL
IC303	051-6707-90	AK4355VF
IC305	051-1292-90	NJM4565M-D
IC306	051-3050-90	OPA2277UA
IC307	051-3051-90	OPA4277UA
IC401	051-6644-90	ADM483EAR
IC402	051-7100-08	TC4W66F-TE12L
IC403	----------	BR93L66F-WTR
IC404	052-3190-40	uPD70F3035BYGC-8EU-A
IC405	051-5438-38	BD4830G-TR
IC406	051-7232-38	CD74HC4066M96
IC501	051-1292-90	NJM4565M-D
IC502	051-3026-90	NJM4580V
IC503	051-3026-90	NJM4580V
IC504	051-3026-90	NJM4580V
IC505	051-3026-90	NJM4580V
IC506	051-3026-90	NJM4580V
IC507	051-3026-90	NJM4580V
IC602	051-3342-90	BA05CC0WFP-004EL
IC603	051-3335-90	AN77L04M
IC604	051-3339-90	AN77L08M-E1
IC605	051-3317-90	LM1086IS-ADJ
J201	074-1168-14	OUTLET SOCKET
J301	074-1287-80	30P
J501	074-1166-01	OUTLET SOCKET
L101	010-2174-83	560uH
L102	010-3406-38	0.1uH J
L103	010-3407-59	5.6uH J
L104	010-2003-04	30uH
L105	010-3407-75	120uH J
L106	010-3052-78	220uH
L107	010-2312-52	0.27uH
L108	010-3104-54	600 ohm/100MHz
L109	010-3104-54	600 ohm/100MHz
L201	010-3052-74	100uH
L302	010-3052-66	22uH
L303	010-3052-66	22uH
L401	010-3406-50	1uH J
L402	010-3407-54	2.2uH J
L403	010-3407-67	27uH J
L601	010-3104-50	30 ohm/100MHz
P501	076-0368-14	14P
P502	076-0368-14	14P

REF No.	PART No.	DESCRIPTION
P801	076-6001-56	6P
P901	076-0662-70	20P
Q101	192-2712-00	2SC2712
Q102	125-2004-92	RN1402
Q103	192-2712-00	2SC2712
Q104	125-2004-93	RN1403
Q105	190-1298-00	2SA1298
Q106	190-1162-00	2SA1162
Q107	125-2004-93	RN1403
Q201	192-2712-00	2SC2712
Q402	192-2712-00	2SC2712
Q404	125-9003-93	IMD2
Q405	192-2712-00	2SC2712
Q407	125-2025-92	IMH11
Q408	125-9003-93	IMD2
Q409	190-1162-00	2SA1162
Q412	190-1162-00	2SA1162
Q413	125-2004-92	RN1402
Q414	125-2004-93	RN1403
Q415	125-2004-93	RN1403
Q419	192-2712-00	2SC2712
Q420	190-1162-00	2SA1162
Q601	125-2004-93	RN1403
Q602	131-1132-00	2SB1132
Q603	193-1664-00	2SD1664 P,Q,R
Q604	125-9003-92	IMD3
Q605	125-9003-92	IMD3
Q607	193-1664-00	2SD1664 P,Q,R
Q608	103-1705-00	2SD1705
Q610	192-2712-50	2SC2712 Y,G,L
Q611	125-2004-96	RN1406
Q612	190-1736-00	2SA1736
Q613	125-2004-93	RN1403
Q614	190-1298-00	2SA1298
Q615	193-1664-00	2SD1664 P,Q,R
Q616	193-1802-61	2SD1802FA R,S,T
Q617	125-2004-93	RN1403
Q618	125-0002-93	RN2403
Q620	193-1802-61	2SD1802FA R,S,T
Q622	103-1705-00	2SD1705
Q623	125-2004-93	RN1403
Q624	190-1736-00	2SA1736
Q625	103-2012-00	2SD2012
Q626	125-9003-92	IMD3
Q627	125-2004-93	RN1403
Q628	190-1298-00	2SA1298
Q629	193-1626-00	2SD1626
Q630	192-2712-50	2SC2712 Y,G,L
Q631	125-0002-95	RN2405
Q632	192-2712-50	2SC2712 Y,G,L
Q633	193-1664-00	2SD1664 P,Q,R
Q634	193-1664-00	2SD1664 P,Q,R
Q635	125-9003-92	IMD3
Q636	190-1162-00	2SA1162
Q637	125-9003-92	IMD3
Q638	131-1132-00	2SB1132
Q639	192-2712-50	2SC2712 Y,G,L
R101	119-8201-15	1/10W 82 ohm
R102	119-1031-15	1/10W 10k ohm
R103	119-1021-15	1/10W 1k ohm
R104	119-1021-15	1/10W 1k ohm
R105	119-4741-15	1/10W 470k ohm
R106	119-4741-15	1/10W 470k ohm
R107	119-4741-15	1/10W 470k ohm
R108	119-1031-15	1/10W 10k ohm
R109	119-1031-15	1/10W 10k ohm
R110	119-0000-05	1/10W 0 ohm JW
R111	119-1031-15	1/10W 10k ohm
R112	119-2231-15	1/10W 22k ohm
R114	119-0000-05	1/10W 0 ohm JW
R116	119-2221-15	1/10W 2.2k ohm
R117	119-2221-15	1/10W 2.2k ohm
R118	010-3104-54	600 ohm/100MHz
R119	010-3104-54	600 ohm/100MHz

REF No.	PART No.	DESCRIPTION
R120	119-0000-05	1/10W 0 ohm JW
R122	119-4721-15	1/10W 4.7k ohm
R124	119-3321-15	1/10W 3.3k ohm
R125	119-0000-05	1/10W 0 ohm JW
R127	119-2211-15	1/10W 220 ohm
R128	119-2221-15	1/10W 2.2k ohm
R129	119-2231-15	1/10W 22k ohm
R130	119-4731-15	1/10W 47k ohm
R131	119-1031-15	1/10W 10k ohm
R132	116-0000-05	1/4W 0 ohm
R133	119-1221-15	1/10W 1.2k ohm
R134	119-1221-15	1/10W 1.2k ohm
R135	119-1031-15	1/10W 10k ohm
R136	119-1831-15	1/10W 18k ohm
R137	119-1021-15	1/10W 1k ohm
R138	119-1021-15	1/10W 1k ohm
R140	119-1041-15	1/10W 100k ohm
R141	119-4731-15	1/10W 47k ohm
R142	119-1231-15	1/10W 12k ohm
R143	119-2731-15	1/10W 27k ohm
R146	119-5621-15	1/10W 5.6k ohm
R147	119-2421-15	1/10W 2.4k ohm
R148	119-2421-15	1/10W 2.4k ohm
R151	119-3921-15	1/10W 3.9k ohm
R152	119-3921-15	1/10W 3.9k ohm
R154	119-1841-15	1/10W 180k ohm
R155	119-0000-05	1/10W 0 ohm JW
R156	116-2291-15	1/4W 2.2 ohm
R157	119-0000-05	1/10W 0 ohm JW
R158	116-4711-15	1/4W 470 ohm
R159	116-8211-15	1/4W 820 ohm
R201	119-1031-15	1/10W 10k ohm
R202	119-1021-15	1/10W 1k ohm
R203	119-1031-15	1/10W 10k ohm
R204	119-1031-15	1/10W 10k ohm
R205	119-1031-15	1/10W 10k ohm
R206	119-1031-15	1/10W 10k ohm
R207	119-1031-15	1/10W 10k ohm
R208	116-1211-15	1/4W 120 ohm
R209	116-6801-15	1/4W 68 ohm
R210	116-1011-15	1/4W 100 ohm
R211	116-1011-15	1/4W 100 ohm
R212	119-1831-15	1/10W 18k ohm
R213	119-1831-15	1/10W 18k ohm
R214	119-1031-15	1/10W 10k ohm
R215	119-2231-15	1/10W 22k ohm
R216	119-2711-15	1/10W 270 ohm
R217	119-2711-15	1/10W 270 ohm
R218	119-1031-15	1/10W 10k ohm
R219	119-1031-15	1/10W 10k ohm
R220	119-1031-15	1/10W 10k ohm
R221	119-1031-15	1/10W 10k ohm
R222	119-1031-15	1/10W 10k ohm
R223	119-1031-15	1/10W 10k ohm
R224	119-2231-15	1/10W 22k ohm
R225	119-5621-15	1/10W 5.6k ohm
R226	119-5621-15	1/10W 5.6k ohm
R227	119-1031-15	1/10W 10k ohm
R228	119-1031-15	1/10W 10k ohm
R229	119-1031-15	1/10W 10k ohm
R230	119-1031-15	1/10W 10k ohm
R233	119-1031-15	1/10W 10k ohm
R234	119-1031-15	1/10W 10k ohm
R237	119-0000-05	1/10W 0 ohm JW
R238	119-0000-05	1/10W 0 ohm JW
R239	119-3921-15	1/10W 3.9k ohm
R240	119-1831-15	1/10W 18k ohm
R241	119-1831-15	1/10W 18k ohm
R242	119-3921-15	1/10W 3.9k ohm
R243	119-2731-15	1/10W 27k ohm
R244	119-1031-15	1/10W 10k ohm
R245	119-1031-15	1/10W 10k ohm
R246	119-1041-15	1/10W 100k ohm
R247	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R248	119-1041-15	1/10W 100k ohm
R249	119-1041-15	1/10W 100k ohm
R250	119-1041-15	1/10W 100k ohm
R251	119-1041-15	1/10W 100k ohm
R252	119-1041-15	1/10W 100k ohm
R253	119-1041-15	1/10W 100k ohm
R254	119-1041-15	1/10W 100k ohm
R255	119-1041-15	1/10W 100k ohm
R256	119-1041-15	1/10W 100k ohm
R257	119-1041-15	1/10W 100k ohm
R258	119-1031-15	1/10W 10k ohm
R259	119-1031-15	1/10W 10k ohm
R261	119-1041-15	1/10W 100k ohm
R262	119-1041-15	1/10W 100k ohm
R263	119-3901-15	1/10W 39 ohm
R264	119-3901-15	1/10W 39 ohm
R265	119-5621-15	1/10W 5.6k ohm
R266	119-5621-15	1/10W 5.6k ohm
R267	119-1031-15	1/10W 10k ohm
R268	119-1031-15	1/10W 10k ohm
R269	116-2221-15	1/4W 2.2k ohm
R270	119-2221-15	1/10W 2.2k ohm
R272	119-1031-15	1/10W 10k ohm
R274	119-1031-15	1/10W 10k ohm
R275	119-2431-15	1/10W 24k ohm
R276	119-8221-15	1/10W 8.2k ohm
R277	119-8221-15	1/10W 8.2k ohm
R303	119-3321-15	1/10W 3.3k ohm
R304	119-3321-15	1/10W 3.3k ohm
R305	119-0000-05	1/10W 0 ohm JW
R307	119-0000-05	1/10W 0 ohm JW
R309	119-0000-05	1/10W 0 ohm JW
R311	119-4711-15	1/10W 470 ohm
R312	119-4711-15	1/10W 470 ohm
R313	119-4711-15	1/10W 470 ohm
R314	119-1011-15	1/10W 100 ohm
R317	119-4721-15	1/10W 4.7k ohm
R318	119-4721-15	1/10W 4.7k ohm
R319	119-4721-15	1/10W 4.7k ohm
R320	119-4721-15	1/10W 4.7k ohm
R321	119-4721-15	1/10W 4.7k ohm
R322	119-4721-15	1/10W 4.7k ohm
R323	119-4721-15	1/10W 4.7k ohm
R324	119-4721-15	1/10W 4.7k ohm
R325	119-4721-15	1/10W 4.7k ohm
R326	119-4721-15	1/10W 4.7k ohm
R327	119-4721-15	1/10W 4.7k ohm
R328	119-4721-15	1/10W 4.7k ohm
R329	119-1031-15	1/10W 10k ohm
R330	119-1031-15	1/10W 10k ohm
R338	119-4721-15	1/10W 4.7k ohm
R339	119-4721-15	1/10W 4.7k ohm
R340	119-4721-15	1/10W 4.7k ohm
R341	119-4721-15	1/10W 4.7k ohm
R342	119-4721-15	1/10W 4.7k ohm
R343	119-4721-15	1/10W 4.7k ohm
R344	119-4721-15	1/10W 4.7k ohm
R345	119-4721-15	1/10W 4.7k ohm
R346	119-4721-15	1/10W 4.7k ohm
R347	119-4721-15	1/10W 4.7k ohm
R348	119-4721-15	1/10W 4.7k ohm
R349	119-4721-15	1/10W 4.7k ohm
R350	119-3901-15	1/10W 39 ohm
R351	119-3901-15	1/10W 39 ohm
R352	119-3901-15	1/10W 39 ohm
R353	119-3901-15	1/10W 39 ohm
R354	119-1811-15	1/10W 180 ohm
R355	119-1811-15	1/10W 180 ohm
R356	119-1811-15	1/10W 180 ohm
R357	119-1811-15	1/10W 180 ohm
R358	119-5611-15	1/10W 560 ohm
R359	119-5611-15	1/10W 560 ohm
R360	119-5611-15	1/10W 560 ohm
R361	119-5611-15	1/10W 560 ohm

REF No.	PART No.	DESCRIPTION
R362	119-5611-15	1/10W 560 ohm
R363	119-5611-15	1/10W 560 ohm
R364	119-5611-15	1/10W 560 ohm
R365	119-5611-15	1/10W 560 ohm
R366	119-9121-15	1/10W 9.1k ohm
R367	119-9121-15	1/10W 9.1k ohm
R368	119-9121-15	1/10W 9.1k ohm
R369	119-9121-15	1/10W 9.1k ohm
R370	119-1041-15	1/10W 100k ohm
R371	119-1041-15	1/10W 100k ohm
R372	119-1041-15	1/10W 100k ohm
R373	119-1041-15	1/10W 100k ohm
R402	119-2231-15	1/10W 22k ohm
R403	119-2731-15	1/10W 27k ohm
R404	119-3331-15	1/10W 33k ohm
R406	119-1041-15	1/10W 100k ohm
R407	119-2231-15	1/10W 22k ohm
R409	119-4731-15	1/10W 47k ohm
R411	116-1011-15	1/4W 100 ohm
R413	119-1031-15	1/10W 10k ohm
R417	166-1011-50	100pF CH
R418	119-2241-15	1/10W 220k ohm
R419	119-4731-15	1/10W 47k ohm
R420	119-1041-15	1/10W 100k ohm
R421	119-1041-15	1/10W 100k ohm
R424	119-1041-15	1/10W 100k ohm
R425	119-4731-15	1/10W 47k ohm
R426	119-1041-15	1/10W 100k ohm
R427	119-4741-15	1/10W 470k ohm
R428	119-4731-15	1/10W 47k ohm
R429	119-0000-05	1/10W 0 ohm JW
R430	119-0000-05	1/10W 0 ohm JW
R431	119-1041-15	1/10W 100k ohm
R432	119-1031-15	1/10W 10k ohm
R433	119-1021-15	1/10W 1k ohm
R434	119-1021-15	1/10W 1k ohm
R435	119-4731-15	1/10W 47k ohm
R439	119-1041-15	1/10W 100k ohm
R440	119-4721-15	1/10W 4.7k ohm
R442	119-1021-15	1/10W 1k ohm
R443	119-0000-05	1/10W 0 ohm JW
R444	119-1021-15	1/10W 1k ohm
R445	119-1021-15	1/10W 1k ohm
R446	119-1021-15	1/10W 1k ohm
R447	119-1021-15	1/10W 1k ohm
R449	119-1051-15	1/10W 1M ohm
R450	119-1021-15	1/10W 1k ohm
R451	119-1021-15	1/10W 1k ohm
R452	119-1041-15	1/10W 100k ohm
R455	116-1811-15	1/4W 180 ohm
R456	116-1021-15	1/4W 1k ohm
R457	119-1021-15	1/10W 1k ohm
R458	119-0000-05	1/10W 0 ohm JW
R459	119-1041-15	1/10W 100k ohm
R460	119-1021-15	1/10W 1k ohm
R461	116-2231-15	1/4W 22k ohm
R462	116-2231-15	1/4W 22k ohm
R463	119-4721-15	1/10W 4.7k ohm
R464	119-4721-15	1/10W 4.7k ohm
R465	116-8201-15	1/4W 82 ohm
R467	119-0000-05	1/10W 0 ohm JW
R468	116-2731-15	1/4W 27k ohm
R471	119-1021-15	1/10W 1k ohm
R473	119-1041-15	1/10W 100k ohm
R474	119-1031-15	1/10W 10k ohm
R475	116-0000-05	1/4W 0 ohm
R478	119-2721-15	1/10W 2.7k ohm
R479	119-3321-15	1/10W 3.3k ohm
R480	119-1031-15	1/10W 10k ohm
R482	116-1521-15	1/4W 1.5k ohm

REF No.	PART No.	DESCRIPTION
R484	119-0000-05	1/10W 0 ohm JW
R485	119-0000-05	1/10W 0 ohm JW
R486	119-0000-05	1/10W 0 ohm JW
R487	119-1041-15	1/10W 100k ohm
R490	119-1041-15	1/10W 100k ohm
R491	119-4721-15	1/10W 4.7k ohm
R493	119-0000-05	1/10W 0 ohm JW
R497	119-0000-05	1/10W 0 ohm JW
R499	119-6821-15	1/10W 6.8k ohm
R502	119-1031-15	1/10W 10k ohm
R503	119-1031-15	1/10W 10k ohm
R505	119-5621-15	1/10W 5.6k ohm
R507	119-5621-15	1/10W 5.6k ohm
R508	119-5621-15	1/10W 5.6k ohm
R510	119-5621-15	1/10W 5.6k ohm
R511	119-5621-15	1/10W 5.6k ohm
R513	119-5621-15	1/10W 5.6k ohm
R518	119-3321-15	1/10W 3.3k ohm
R519	119-3321-15	1/10W 3.3k ohm
R520	119-3321-15	1/10W 3.3k ohm
R521	119-3321-15	1/10W 3.3k ohm
R522	119-3321-15	1/10W 3.3k ohm
R523	119-3321-15	1/10W 3.3k ohm
R533	119-2231-15	1/10W 22k ohm
R534	119-3931-15	1/10W 39k ohm
R535	119-1001-15	1/10W 10 ohm
R536	119-2231-15	1/10W 22k ohm
R537	119-3931-15	1/10W 39k ohm
R538	119-1001-15	1/10W 10 ohm
R539	119-2231-15	1/10W 22k ohm
R540	119-3931-15	1/10W 39k ohm
R541	119-1001-15	1/10W 10 ohm
R542	119-1531-15	1/10W 15k ohm
R543	119-1531-15	1/10W 15k ohm
R544	119-1531-15	1/10W 15k ohm
R545	119-1031-15	1/10W 10k ohm
R546	119-1031-15	1/10W 10k ohm
R547	119-1031-15	1/10W 10k ohm
R548	119-2231-15	1/10W 22k ohm
R549	119-1001-15	1/10W 10 ohm
R550	119-2231-15	1/10W 22k ohm
R551	119-1001-15	1/10W 10 ohm
R552	119-2231-15	1/10W 22k ohm
R553	119-1001-15	1/10W 10 ohm
R554	119-1001-15	1/10W 10 ohm
R555	119-2231-15	1/10W 22k ohm
R556	119-3931-15	1/10W 39k ohm
R557	119-2231-15	1/10W 22k ohm
R558	119-3931-15	1/10W 39k ohm
R559	119-1001-15	1/10W 10 ohm
R560	119-2231-15	1/10W 22k ohm
R561	119-3931-15	1/10W 39k ohm
R562	119-1001-15	1/10W 10 ohm
R563	119-1531-15	1/10W 15k ohm
R564	119-1531-15	1/10W 15k ohm
R565	119-1531-15	1/10W 15k ohm
R566	119-1031-15	1/10W 10k ohm
R567	119-1031-15	1/10W 10k ohm
R568	119-1031-15	1/10W 10k ohm
R569	119-2231-15	1/10W 22k ohm
R570	119-1001-15	1/10W 10 ohm
R571	119-2231-15	1/10W 22k ohm
R572	119-1001-15	1/10W 10 ohm
R573	119-2231-15	1/10W 22k ohm
R574	119-1001-15	1/10W 10 ohm
R575	032-0145-71	1/4W 2.2k ohm
R576	119-0000-05	1/10W 0 ohm JW
R578	116-3901-15	1/4W 39 ohm
R579	116-1011-15	1/4W 100 ohm
R580	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R581	116-3901-15	1/4W 39 ohm
R583	119-0000-05	1/10W 0 ohm JW (PH-2644B-L, B-N)
R584	119-0000-05	1/10W 0 ohm JW (PH-2644B-K, B-M)
R586	119-0000-05	1/10W 0 ohm JW
R601	116-1521-15	1/4W 1.5k ohm
R602	119-4731-15	1/10W 47k ohm
R603	116-1021-15	1/4W 1k ohm
R604	032-0140-06	1/10W 100 ohm F
R605	116-3321-15	1/4W 3.3k ohm
R606	116-3311-15	1/4W 330 ohm
R607	119-4731-15	1/10W 47k ohm
R608	116-3321-15	1/4W 3.3k ohm
R609	116-6811-15	1/4W 680 ohm
R610	119-1031-15	1/10W 10k ohm
R611	119-1221-15	1/10W 1.2k ohm
R612	032-0145-71	1/4W 2.2k ohm
R613	119-1031-15	1/10W 10k ohm
R614	119-4731-15	1/10W 47k ohm
R615	032-0145-63	1/4W 390ohm
R616	119-1221-15	1/10W 1.2k ohm
R617	116-1821-15	1/4W 1.8k ohm
R618	116-1821-15	1/4W 1.8k ohm
R619	116-1821-15	1/4W 1.8k ohm
R620	116-2221-15	1/4W 2.2k ohm
R621	032-0145-60	1/2W 220 ohm J
R622	119-3931-15	1/10W 39k ohm
R623	116-0000-05	1/4W 0 ohm
R625	114-1511-11	1W 150 ohm
R627	116-2221-15	1/4W 2.2k ohm
R628	119-4731-15	1/10W 47k ohm
R629	119-1531-15	1/10W 15k ohm
R630	116-4731-15	1/4W 47k ohm
R631	032-0140-66	1/10W 220 ohm F
R632	116-4721-15	1/4W 4.7k ohm
R633	119-1031-15	1/10W 10k ohm
R635	119-1031-15	1/10W 10k ohm
R636	116-1021-15	1/4W 1k ohm
R637	119-2221-15	1/10W 2.2k ohm
R639	116-8211-15	1/4W 820 ohm
R640	116-3911-15	1/4W 390 ohm
R641	116-2221-15	1/4W 2.2k ohm
R642	116-1821-15	1/4W 1.8k ohm
R643	116-1821-15	1/4W 1.8k ohm
R646	116-6811-15	1/4W 680 ohm
R647	116-6811-15	1/4W 680 ohm
R648	116-6811-15	1/4W 680 ohm
R649	119-1031-15	1/10W 10k ohm
R650	116-6811-15	1/4W 680 ohm
R651	116-6811-15	1/4W 680 ohm
R652	116-1821-15	1/4W 1.8k ohm
R653	119-2231-15	1/10W 22k ohm
R654	116-2221-15	1/4W 2.2k ohm
R655	119-1031-15	1/10W 10k ohm
R656	119-1031-15	1/10W 10k ohm
SUP101	060-0122-20	DSP-141N-S00B
SUP102	060-0122-20	DSP-141N-S00B
T601	009-0670-80	180uH
TH602	002-0318-01	1206L035YRT
TH604	002-0318-00	1206L020YRT
TM401	073-0762-90	TERMINAL
TM501	073-0762-90	TERMINAL
VR101	012-6009-65	470k ohm B VR
X101	061-3543-90	7.2MHz
X501	061-3539-90	12.5MHz
Z201	854-8120-02	EX-LEAD(6P)
PWB	039-2918-00	PWB(WITHOUT COMPONENT)

Connector PWB(B2) section

REF No.	PART No.	DESCRIPTION
C801	168-2222-55	2200pF K
C802	168-2222-55	2200pF K
C803	168-2222-55	2200pF K
C804	168-2222-55	2200pF K
C805	168-2222-55	2200pF K
C806	168-2222-55	2200pF K
C807	166-5601-50	56pF CH
D801	001-2403-90	M1F60
D804	001-2403-90	M1F60
D805	001-0529-57	MA8120-H

REF No.	PART No.	DESCRIPTION
D806	001-0529-57	MA8120-H
D807	001-0529-57	MA8120-H
D808	001-0529-57	MA8120-H
D809	001-0529-57	MA8120-H
J801	074-4025-32	32P
J802	074-0898-14	14P
J803	074-0898-14	14P
Q801	125-2024-95	RN1605
Q802	125-2004-91	RN1401
Q803	125-2024-95	RN1605

REF No.	PART No.	DESCRIPTION
R801	116-1011-15	1/4W 100 ohm
R802	116-1011-15	1/4W 100 ohm
R803	116-1011-15	1/4W 100 ohm
R804	116-1011-15	1/4W 100 ohm
R805	116-1011-15	1/4W 100 ohm
TH601	002-0318-00	1203L020YRT
PWB	039-2887-00	PWB(WITHOUT COMPONENT)

Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION
C701	168-1042-78	16V 0.1uF
C703	168-1042-78	16V 0.1uF
CCT1	050-0145-55	1/16W 10k ohm x4
D701	001-7043-91	CL-170UR U-RED
D702	001-0516-90	MA111
D703	001-0516-90	MA111
D704	001-0516-90	MA111
D705	001-0516-90	MA111
D706	001-0516-90	MA111
D707	001-0516-90	MA111
D708	001-0516-90	MA111
D709	001-0516-90	MA111
D710	001-0516-90	MA111
D711	001-0516-90	MA111
D712	001-0516-90	MA111
D713	001-0516-90	MA111
D714	001-7079-90	BRBG1204W-TR
IC701	051-6618-18	M6606FP-42A
J701	074-1279-70	20P
P702	076-6000-63	13P
PL901	017-0433-94	14V 40mA BLUE
PL902	017-0433-94	14V 40mA BLUE
PL903	017-0433-94	14V 40mA BLUE
PL904	017-0433-94	14V 40mA BLUE
PL905	017-0433-94	14V 40mA BLUE
PL906	017-0433-94	14V 40mA BLUE
PL907	017-0433-94	14V 40mA BLUE
PL908	017-0433-94	14V 40mA BLUE
PL909	017-0433-94	14V 40mA BLUE
PL910	017-0433-94	14V 40mA BLUE
PL911	017-0433-94	14V 40mA BLUE
PL912	017-0433-94	14V 40mA BLUE

REF No.	PART No.	DESCRIPTION
PL913	017-0433-94	14V 40mA BLUE
PL914	017-0433-94	14V 40mA BLUE
PL915	017-0433-94	14V 40mA BLUE
Q701	125-0002-92	RN2402
Q702	125-0002-92	RN2402
R701	119-4721-15	1/10W 4.7k ohm
R702	119-4721-15	1/10W 4.7k ohm
R703	119-4721-15	1/10W 4.7k ohm
R709	116-1811-15	1/4W 180 ohm
R710	119-1041-15	1/10W 100k ohm
R711	119-1041-15	1/10W 100k ohm
R712	116-1811-15	1/4W 180 ohm
R713	119-1041-15	1/10W 100k ohm
R714	119-1041-15	1/10W 100k ohm
R715	119-1041-15	1/10W 100k ohm
R716	119-0000-05	1/10W 0 ohm JW
R717	119-0000-05	1/10W 0 ohm JW
R718	119-0000-05	1/10W 0 ohm JW
R719	119-0000-05	1/10W 0 ohm JW
R720	119-0000-05	1/10W 0 ohm JW
R721	119-0000-05	1/10W 0 ohm JW
R722	119-0000-05	1/10W 0 ohm JW
R723	119-0000-05	1/10W 0 ohm JW
R724	119-0000-05	1/10W 0 ohm JW
R727	119-0000-05	1/10W 0 ohm JW
R728	119-0000-05	1/10W 0 ohm JW
R735	119-0000-05	1/10W 0 ohm JW
R736	119-0000-05	1/10W 0 ohm JW
R737	119-0000-05	1/10W 0 ohm JW
R738	119-0000-05	1/10W 0 ohm JW
S701	013-6202-52	SKPMBJE010
S702	013-6202-52	SKPMBJE010

REF No.	PART No.	DESCRIPTION
S703	013-6202-52	SKPMBJE010
S704	013-6203-51	TACT SWITCH
S705	013-6203-51	TACT SWITCH
S706	013-6202-52	SKPMBJE010
S707	013-6203-51	TACT SWITCH
S708	013-6203-51	TACT SWITCH
S709	013-6203-51	TACT SWITCH
S710	013-6201-52	SKPMAP010
S711	013-6202-52	SKPMBJE010
S712	013-6201-52	SKPMAP010
S713	013-6202-52	SKPMBJE010
S714	013-6203-51	TACT SWITCH
S715	013-6201-52	SKPMAP010
S716	013-6201-52	SKPMAP010
S717	013-6201-52	SKPMAP010
S718	013-6201-52	SKPMAP010
S719	013-6201-52	SKPMAP010
S720	013-6202-52	SKPMBJE010
S721	013-6201-52	SKPMAP010
S722	013-6202-52	SKPMBJE010
S723	013-6202-52	SKPMBJE010
S724	013-6201-52	SKPMAP010
S725	013-6201-52	SKPMAP010
S726	013-6203-51	TACT SWITCH
S727	013-6203-51	TACT SWITCH
S728	013-6203-51	TACT SWITCH
S729	013-6203-51	TACT SWITCH
S730	013-6203-51	TACT SWITCH
S731	013-6203-51	TACT SWITCH
VR701	016-0025-03	VR W/SHAFT
PWB	039-2581-01	PWB(WITHOUT COMPONENT)

EXPLODED VIEW / PARTS LIST

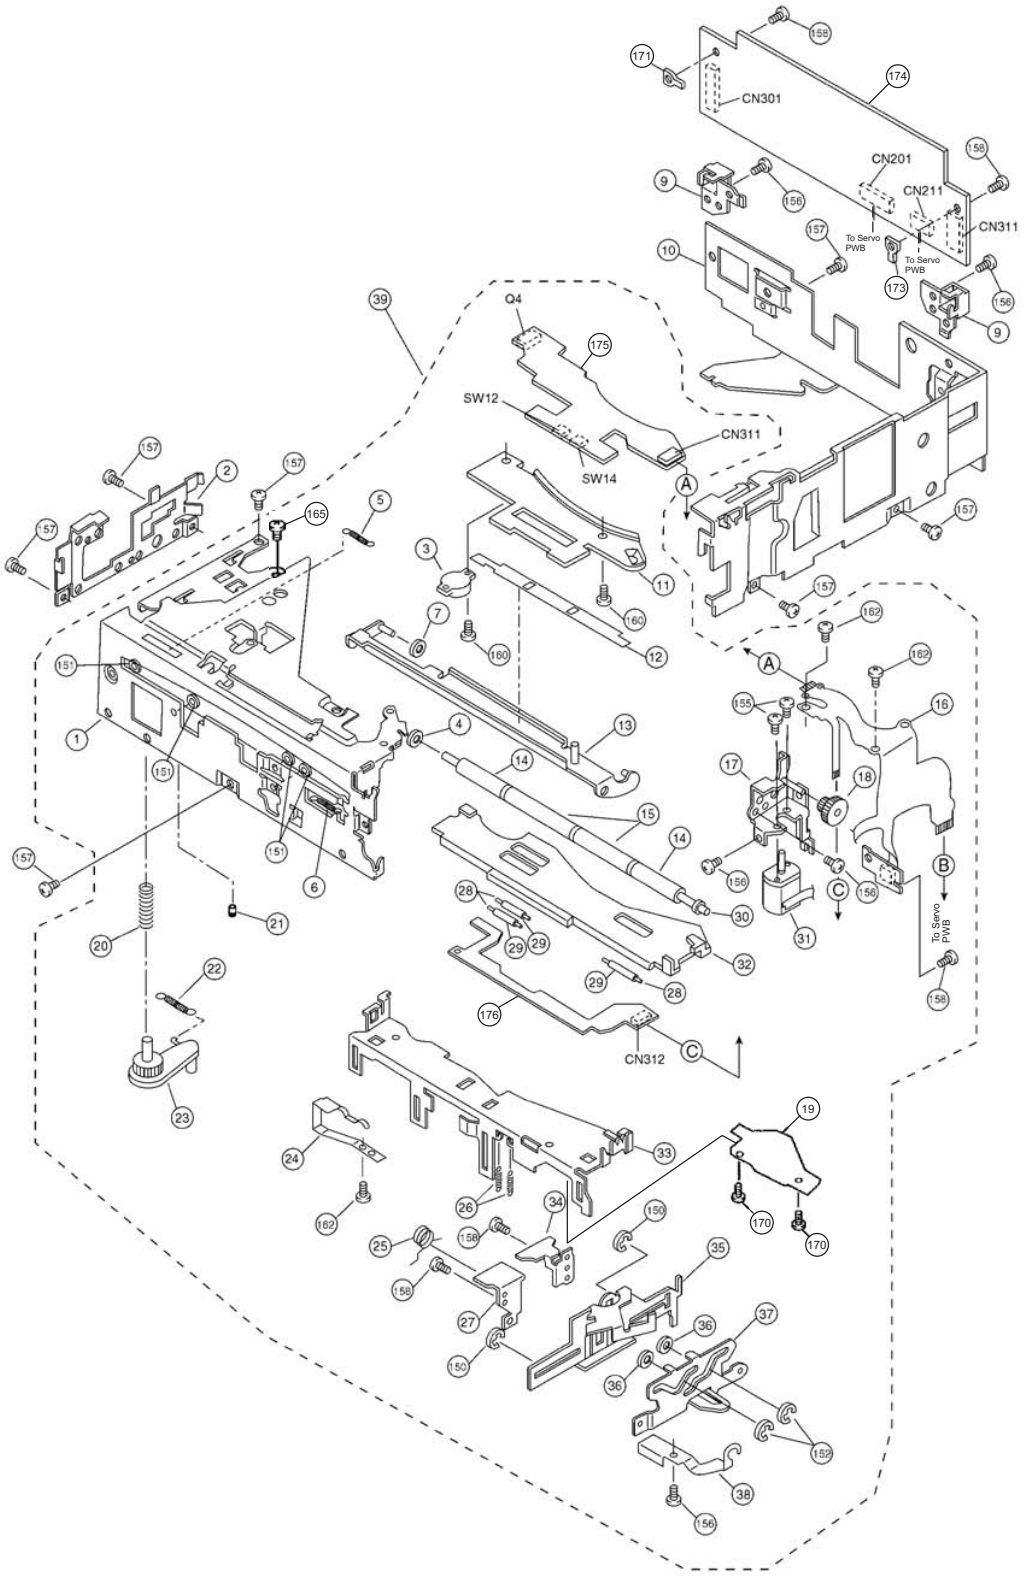

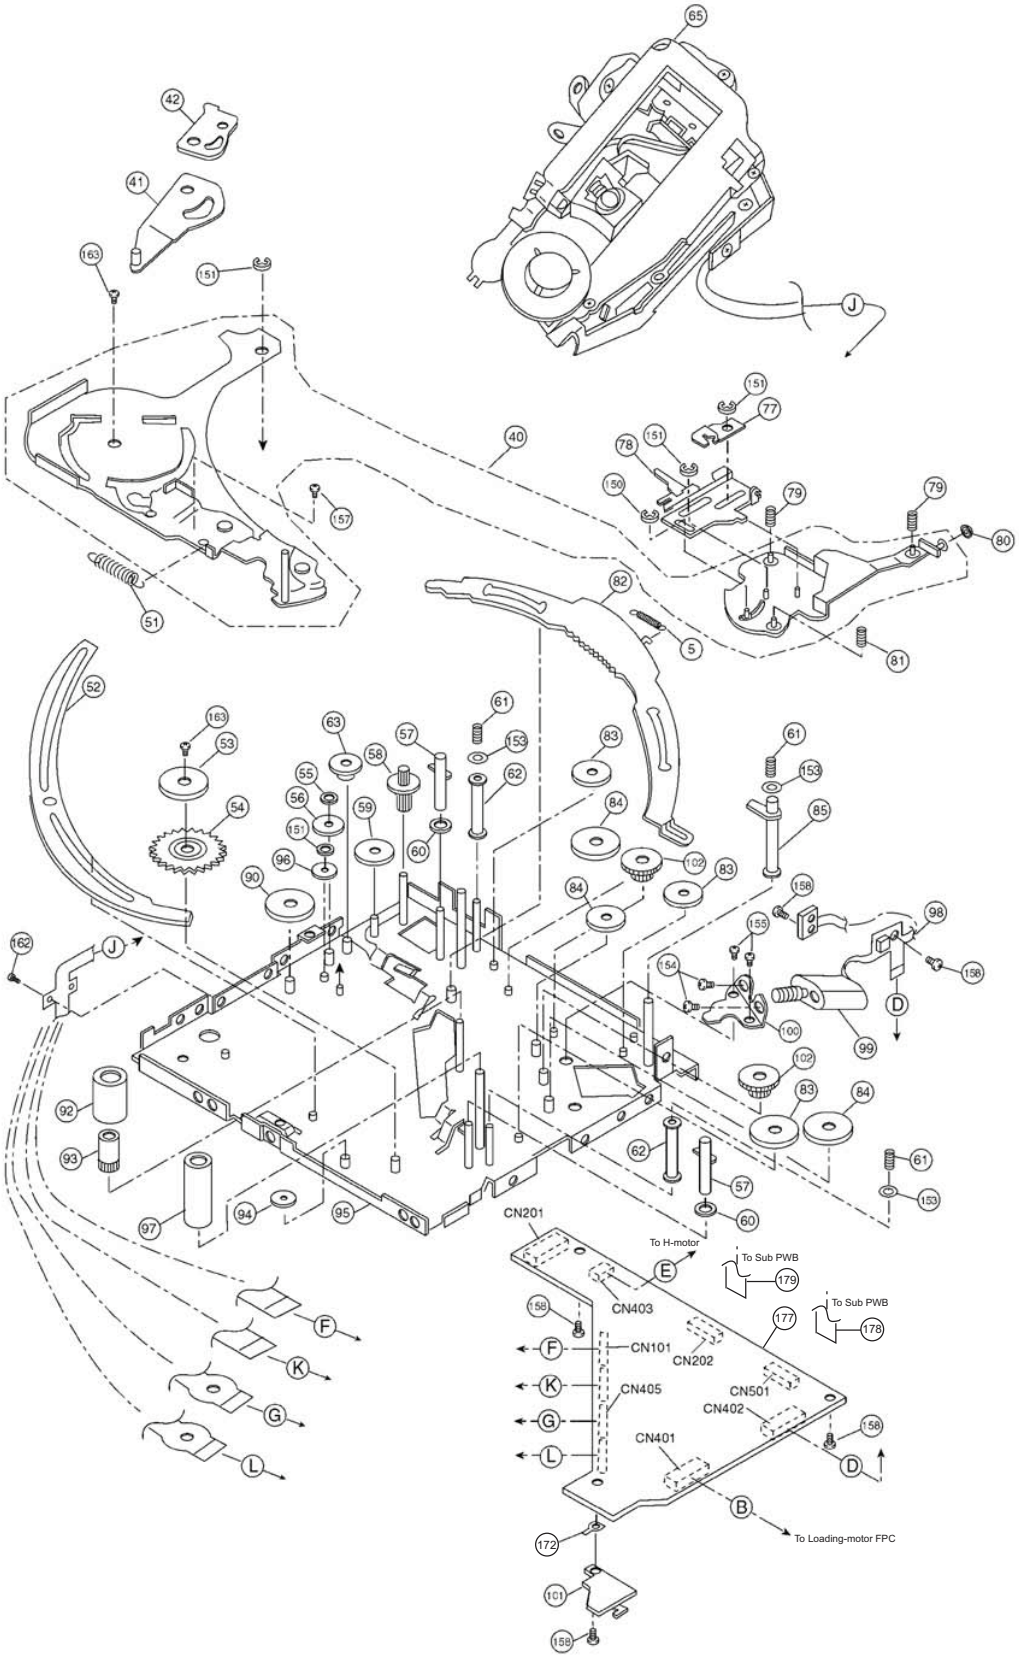
CN201
To H-motor
To Sub PWB
To Sub PWB
CN403
CN101
CN202
CN405
CN501
CN402
CN401
To Loading-motor FPC

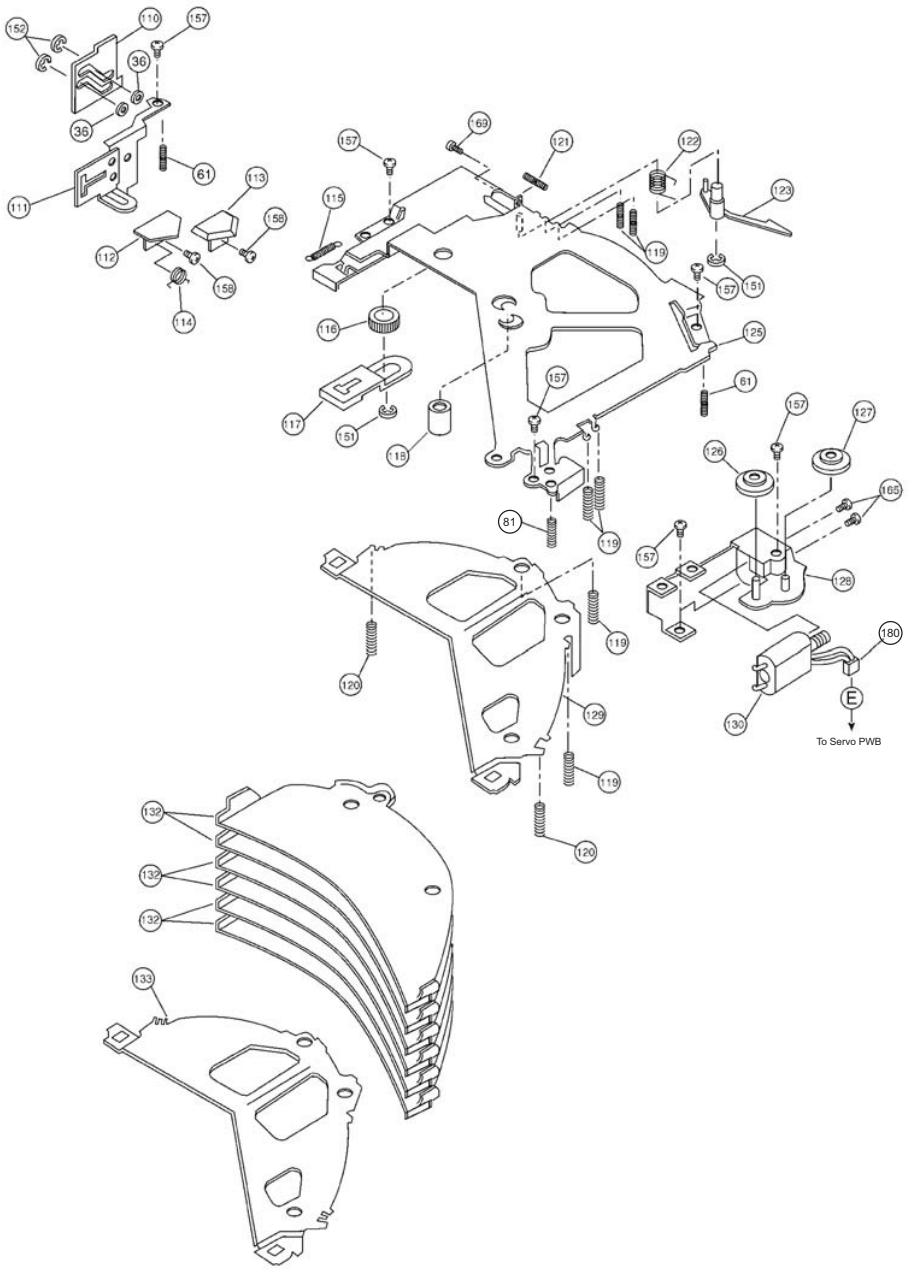

* The missing reference numbers are omitting.

NO.	PART NO.	DESCRIPTION	Q'TY
1	658-0249-07	Upper Chassis Assy	1
2	658-0240-65	Side Bracket L	1
3	658-0240-70	Rotary Damoer Assy	1
4	658-0249-08	Roller Shaft Collar	1
5	658-0240-72	Outline Detection Spring	2
6	658-0240-73	Feeder lock Lever Spring	1
7	658-0240-74	Off Backlash Spring	1
9	658-0240-66	Sub P.C.B bracket	2
10	658-0240-67	Side chassis DR	1
11	658-0249-09	Disc Guide U	1
12	658-0240-76	Feeder Piece	1
13	658-0240-77	Feeder Arm Assy	1
14	658-0240-78	Disc Collar	2
15	658-0240-79	Rubber Roller	2

NO.	PART NO.	DESCRIPTION	Q'TY
16	658-0240-80	Loading Motor FPC ASSY (With Switch)	1
17	658-0240-81	Loading Motor Bracket Assy	1
18	658-0240-82	Loading Gear	1
19	658-0249-10	Feeder Rabel Cover	1
20	658-0240-83	Push Lever Thrust Spring	1
21	658-0240-84	Roller	1
22	658-0249-11	Push Spring	1
23	658-0249-12	Push Lever	1
24	658-0240-87	Spring	1
25	658-0240-88	Guide Spring F	1
26	658-0240-89	Feeder Spring	2
27	658-0248-14	Guide FU	1
28	658-0240-91	Shaft	3
29	658-0249-13	Disc Roller	3

NO.	PART NO.	DESCRIPTION	Q'TY
30	658-0240-93	Collar Shaft Assy	1
31	658-0240-94	Loading Motor Assy	1
32	658-0249-14	Slide Plate	1
33	658-0249-15	Feeder Plate	1
34	658-0249-16	Guide (FL)	1
35	658-0240-98	Guide F Base	1
36	658-0240-99	Guide Plate Collar	4
37	658-0241-01	Guide Cam F Plate Assy	1
38	658-0241-02	Roller Plate Spring	1
39	658-0248-10	Upper Chassis Unit	1
40	658-0248-17	Swing chassis Ass y	1
41	658-0241-04	Guide Lever Assy B	1
42	658-0249-17	Lever	1
51	658-0241-06	Clamping Drive Spring	1
52	658-0241-07	Horizontal Rack	1
53	658-0248-18	Horizontal Cam	1
54	658-0249-18	Horizontal Cam Gear	1
55	658-0241-10	Snap Ring	1
56	658-0241-11	Horizontal Gear -4	1
57	658-0241-12	Stocker Cam -3	2
58	658-0241-13	Horizontal Gear -1	1
59	658-0248-20	Gear	1
60	658-0241-15	ELV Gear -4	2
61	658-0248-21	Stocker Thrust Spring	5
62	658-0241-17	Stocker Cam -2	2
63	658-0241-18	Horizontal Gear -3	1
65	658-0241-19	Optical Deck Unit	1
77	658-0248-22	Lever	1
78	658-0241-21	Suspension Lock Plate	1
79	658-0241-22	Damper Spring	2
80	658-0241-23	O-Ring	1
81	658-0241-24	Damper Spring R	1
82	658-0241-25	Stocker Rack	1
83	658-0241-26	Elevator Gear 2	3
84	658-0241-27	Elevator Gear 3	3
85	658-0241-28	Stocker Cam 1	1
90	658-0241-29	Horizontal Cam Gear	1
92	658-0248-23	Disc Holder L	1
93	658-0241-31	Disc Hold Gear	1
94	658-0241-32	Clamp Cam Gear	1
95	658-0248-24	Main Chassis Assy	1
96	658-0241-34	Horizontal Cam Gear 5	1
97	658-0248-25	Stocker Roller	1
98	658-0241-35	Elevator Motor FPC	1
99	658-0241-36	Elevator Motor Assy	1
100	658-0241-37	Elevator Motor Bracket	1
101	658-0241-38	SW Cover	1
102	658-0241-39	Elevator Gear 1	2

NO.	PART NO.	DESCRIPTION	Q'TY
110	658-0241-40	Guide Cam B Plate Assy	1
111	658-0241-41	Guide B Base Assy	1
112	658-0241-42	Guide BL	1
113	658-0249-19	Guide BU	1
114	658-0249-20	Guide Spring B	1
115	658-0241-45	Avoidance Lever Spring	1
116	658-0241-46	Pushout Cam Gear	1
117	658-0249-21	Avoidance Lever 1 Assy	1
118	658-0243-01	Disc Holder L	1
119	658-0248-28	Stocker Spring	6
120	658-0248-29	Stocker Spring	2
121	658-0241-50	Pushout Plate Spring	1
122	658-0241-51	Push Lever Spring	1
123	658-0248-30	Pushout Lever	1
125	658-0248-31	Stocker Top Coner Assy	1
126	658-0248-32	Pushout Gear 2	1
127	658-0248-33	Pushout Gear 1	1
128	658-0241-57	Horizontal Motor Bracket Assy	1
129	658-0249-22	Stocker Tray Support	1
130	658-0241-59	Horizontal Motor Assy	1
132	658-0248-35	Stocker Tray	6
133	658-0248-36	Stocker Tray Housing L	1
150	658-0241-62	Retanning Ring	3
151	658-0241-63	E-Ring	10
152	658-0241-64	Retanning Ring	4
153	658-0241-65	Stocker Cam Ring	3
154	658-0241-66	Screw M2x2mm	2
155	658-0241-67	Screw M2x2mm	4
156	658-0248-37	Bind Screw M2x3mm	5
157	658-0241-69	Bind Screw M2x4mm	14
158	658-0241-70	Screw w/Washer M2x4mm	12
160	658-0241-71	Screw w/Washer M2x6mm	2
162	658-0249-23	Spring	4
163	658-0241-73	Thin Head Screw w/Washer	2
165	658-0241-74	Screw	3
169	658-0241-76	Screw M1.7x3mm	1
170	658-0249-24	Screw M2x16mm	2
171	658-0248-08	Terminal	1
172	658-0248-09	Terminal	1
173	658-0248-08	Terminal	1
174	----------	Sub PWB Assy	1
175	----------	Load-1 PWB Assy	1
176	----------	Load-2 PWB Assy	1
177	----------	Servo PWB Assy	1
178	658-0241-81	Connect-Wire(CNP1)	1
179	658-0241-82	Connect-Wire(CNP2)	1
180	658-0240-62	Power Cord With Plug 12v	1

ELECTRICAL PARTS LIST

Servo PWB(B1) section

REF No.	PART No.	DESCRIPTION
C101	658-0246-12	50WV 560PF
C102	658-0240-12	0.1uF 10WV
C113	658-0240-12	0.1uF 10WV
C114	658-0240-13	10uF 6.3WV
C115	658-0240-13	10uF 6.3WV
C116	658-0248-04	50V 1000pF
C117	658-0240-13	10uF 6.3WV
C121	658-0246-14	50WV 6PF
C122	658-0240-13	10uF 6.3WV
C123	658-0240-14	47uF 6.3WV
C124	658-0249-03	10WV 0.1uF
C125	658-0249-03	10WV 0.1uF
C126	658-0237-28	25V 0.027uF
C127	658-0237-27	16V 0.047uF
C128	658-0249-03	10WV 0.1uF
C129	658-0246-22	50WV 100PF
C131	658-0246-12	50WV 560PF
C132	658-0246-12	50WV 560PF
C133	658-0249-03	10WV 0.1uF
C134	658-0249-03	10WV 0.1uF
C135	658-0240-14	47uF 6.3WV
C136	658-0249-03	10WV 0.1uF
C137	658-0240-13	10uF 6.3WV
C141	658-0247-06	16WV 0.01uF
C142	658-0249-03	10WV 0.1uF
C143	658-0249-03	10WV 0.1uF
C144	658-0249-03	10WV 0.1uF
C145	658-0249-03	10WV 0.1uF
C151	658-0249-03	10WV 0.1uF
C152	658-0249-04	6.3WV 47uF Tan
C153	658-0249-03	10WV 0.1uF
C154	658-0249-04	6.3WV 47uF Tan
C201	658-0249-03	10WV 0.1uF
C202	658-0249-03	10WV 0.1uF
C203	658-0249-03	10WV 0.1uF
C204	658-0249-03	10WV 0.1uF
C205	658-0249-03	10WV 0.1uF
C206	658-0248-04	50V 1000pF
C207	658-0249-03	10WV 0.1uF
C211	658-0246-22	50WV 100PF
C212	658-0246-22	50WV 100PF
C213	658-0247-06	16WV 0.01uF
C214	658-0247-06	16WV 0.01uF
C215	658-0249-03	10WV 0.1uF
C216	658-0249-03	10WV 0.1uF
C217	658-0248-05	50V 15pF
C218	658-0248-05	50V 15pF
C219	658-0249-03	10WV 0.1uF
C220	658-0249-03	10WV 0.1uF
C221	658-0240-13	10uF 6.3WV
C222	658-0247-06	16WV 0.01uF
C223	658-0249-03	10WV 0.1uF
C224	658-0247-06	16WV 0.01uF
C225	658-0249-03	10WV 0.1uF
C227	658-0246-18	16WV 0.022uF
C228	658-0246-19	50WV 47PF
C229	658-0249-03	10WV 0.1uF
C230	658-0249-03	10WV 0.1uF
C231	658-0248-04	50V 1000pF
C232	658-0249-03	10WV 0.1uF
C233	658-0237-34	50V 0.0056uF
C234	658-0248-04	50V 1000pF
C235	658-0248-04	50V 1000pF
C236	658-0248-04	50V 1000pF
C237	658-0249-03	10WV 0.1uF
C238	658-0246-12	50WV 560PF
C239	658-0246-12	50WV 560PF
C240	658-0246-20	50WV 2200PF
C241	658-0246-21	50WV 470PF
C242	658-0249-03	10WV 0.1uF
C245	658-0248-06	50V 56pF
C246	658-0246-12	50WV 560PF
C247	658-0246-22	50WV 100PF
C248	658-0246-21	50WV 470PF
C249	658-0246-21	50WV 470PF
C251	658-0249-03	10WV 0.1uF
C252	658-0249-03	10WV 0.1uF
C253	658-0249-03	10WV 0.1uF
C254	658-0249-03	10WV 0.1uF
C255	658-0249-03	10WV 0.1uF
C256	658-0249-03	10WV 0.1uF
C271	658-0249-03	10WV 0.1uF
C272	658-0249-03	10WV 0.1uF
C273	658-0249-03	10WV 0.1uF
C274	658-0249-03	10WV 0.1uF
C275	658-0249-03	10WV 0.1uF
C291	658-0248-07	50V 10pF
C292	658-0249-03	10WV 0.1uF
C293	658-0246-22	50WV 100PF
C294	658-0248-05	50V 15pF
C295	658-0246-22	50WV 100PF
C296	658-0246-22	50WV 100pF
C297	658-0249-03	10WV 0.1uF
C298	658-0248-04	50V 1000pF
C301	658-0249-03	10WV 0.1uF
C302	658-0249-03	10WV 0.1uF
C305	658-0249-03	10WV 0.1uF
C306	658-0249-03	10WV 0.1uF
C307	658-0249-03	10WV 0.1uF
C311	658-0249-03	10WV 0.1uF
C321	658-0249-03	10WV 0.1uF
C322	658-0249-03	10WV 0.1uF
C331	658-0249-03	10WV 0.1uF
C332	658-0249-03	10WV 0.1uF
C341	658-0249-03	10WV 0.1uF
C351	658-0249-03	10WV 0.1uF
C352	658-0249-03	10WV 0.1uF
C353	658-0246-22	50WV 100PF
C401	658-0246-22	50WV 100PF
C404	658-0246-22	50WV 100pF
C405	658-0249-03	10WV 0.1uF
C411	658-0249-03	10WV 0.1uF
C413	658-0249-03	10WV 0.1uF
C414	658-0249-03	10WV 0.1uF
C415	658-0249-03	10WV 0.1uF
C421	658-0249-03	10WV 0.1uF
C422	658-0249-03	10WV 0.1uF
C423	658-0249-03	10WV 0.1uF
C424	658-0249-03	10WV 0.1uF
C425	658-0249-03	10WV 0.1uF
C431	658-0247-06	16WV 0.01uF
C432	658-0247-06	16WV 0.01uF
C433	658-0249-03	10WV 0.1uF
C434	658-0249-03	10WV 0.1uF
C435	658-0249-03	10WV 0.1uF
C436	658-0249-03	10WV 0.1uF
C437	658-0249-03	10WV 0.1uF
C438	658-0249-03	10WV 0.1uF
C502	658-0240-13	10uF 6.3WV
C503	658-0240-13	10uF 6.3WV
C504	658-0240-13	10uF 6.3WV
C511	658-0249-03	10WV 0.1uF
C521	658-0249-03	10WV 0.1uF
C522	658-0240-14	47uF 6.3WV
C523	658-0249-03	10WV 0.1uF
CN101	658-0240-24	Connector 14P
CN102	658-0240-25	Connector 16P
CN201	658-0237-46	Connector 40P
CN202	658-0240-26	Connector 22P
CN401	658-0240-27	Connector 19P
CN402	658-0240-28	Connector 6P
CN403	658-0246-27	Connector 2P
CN404	658-0240-29	Connector 10P
CN405	658-0240-29	Connector 10P
CN501	658-0240-28	Connector 6P
IC101	658-0237-01	AN8703FH-V
IC201	658-0240-01	MNZS26EDCUB
IC271	658-0246-03	C0JBAA000372
IC272	658-0246-06	C0JBAA000356
IC291	658-0249-02	C0ABBB000220
IC292	658-0248-01	C0JBAR000513
IC301	658-0240-05	MN102H60KAA
IC341	658-0248-02	C3EBGG000019
IC351	658-0248-03	C3FBKD000336
IC401	658-0240-08	C0GBY0000014
IC421	658-0237-09	C0GBH0000006
IC511	658-0246-07	MN13821SJP
IC521	658-0240-09	C0CBADG00005
L111	658-0240-30	J0JCC0000152
L121	658-0240-30	J0JCC0000152
L201	658-0240-31	J0JCC0000151
L212	033-0000-05	1/16W 0 ohm
L501	658-0240-32	YELTBMHS800T
L502	658-0231-27	1/8W 0 ohm
L503	658-0240-32	YELTBMHS800T
L504	658-0240-32	YELTBMHS800T
L505	658-0240-32	YELTBMHS800T
Q151	658-0237-14	TR 2SB766ATX
Q152	658-0237-14	TR 2SB766ATX
Q153	658-0240-10	B1GDCFNN0007
Q154	658-0240-11	B1GBCFNN0009
Q211	658-0237-15	TR B1GBCFNN0001
R101	033-1231-15	1/16W 12k ohm
R102	033-1231-15	1/16W 12k ohm
R105	658-0237-41	1/16W 24k ohm
R106	658-0237-42	1/16W 3.9k ohm Metal
R107	658-0237-43	1/16W 18k ohm Metal
R108	033-4721-15	1/16W 4.7k ohm
R121	033-1221-15	1/16W 1.2k ohm
R122	033-1051-15	1/16W 1M ohm
R123	033-2021-15	1/16W 2k ohm
R131	033-1051-15	1/16W 1M ohm
R132	033-1051-15	1/16W 1M ohm
R141	033-1031-15	1/16W 10k ohm
R142	033-1031-15	1/16W 10k ohm
R151	033-2291-15	1/16W 2.2 ohm
R152	658-0237-40	1/2W 20 ohm
R153	033-2291-15	1/16W 2.2 ohm
R154	658-0237-40	1/2W 20 ohm
R155	033-1021-15	1/16W 1k ohm
R156	033-3331-15	1/16W 33k ohm
R157	033-2231-15	1/16W 22k ohm
R201	033-1031-15	1/16W 10k ohm
R202	658-0240-18	1/16W 150 ohm
R211	033-1031-15	1/16W 10k ohm
R212	033-2731-15	1/16W 27k ohm
R213	033-2731-15	1/16W 27k ohm
R214	033-4721-15	1/16W 4.7k ohm
R215	033-4721-15	1/16W 4.7k ohm
R216	033-1051-15	1/16W 1M ohm
R217	033-4711-15	1/16W 470 ohm
R218	033-3931-15	1/16W 39k ohm
R221	033-1021-15	1/16W 1k ohm
R222	033-1531-15	1/16W 15k ohm
R224	033-1051-15	1/16W 1M ohm
R225	033-5621-15	1/16W 5.6k ohm
R226	033-5621-15	1/16W 5.6k ohm
R227	033-1031-15	1/16W 10k ohm
R228	033-4731-15	1/16W 47k ohm
R229	658-0237-56	Resistor Network
R230	033-4731-15	1/16W 47k ohm

REF No.	PART No.	DESCRIPTION
R231	033-3931-15	1/16W 39k ohm
R232	033-3931-15	1/16W 39k ohm
R245	033-3321-15	1/16W 3.3k ohm
R246	033-3321-15	1/16W 3.3k ohm
R247	033-3321-15	1/16W 3.3k ohm
R248	033-4731-15	1/16W 47k ohm
R249	658-0240-19	1/16W 2.7k ohm
R251	658-0237-58	Resistor Network
R252	033-8201-15	1/16W 82 ohm
R253	033-2201-15	1/16W 22 ohm
R254	033-8201-15	1/16W 82 ohm
R255	033-1031-15	1/16W 10k ohm
R256	033-1031-15	1/16W 10k ohm
R257	033-0000-05	1/16W 0 ohm
R258	033-8201-15	1/16W 82 ohm
R259	033-8201-15	1/16W 82 ohm
R260	033-2201-15	1/16W 22 ohm
R261	658-0237-57	Resistor Network
R262	033-1031-15	1/16W 10k ohm
R263	033-0000-05	1/16W 0 ohm
R264	658-0237-57	Resistor Network
R265	658-0237-57	Resistor Network
R266	658-0237-57	Resistor Network
R267	033-1021-15	1/16W 1k ohm
R268	033-1031-15	1/16W 10k ohm
R271	033-1031-15	1/16W 10k ohm
R281	033-0000-05	1/16W 0 ohm
R282	033-0000-05	1/16W 0 ohm
R283	033-0000-05	1/16W 0 ohm
R284	033-0000-05	1/16W 0 ohm
R285	033-0000-05	1/16W 0 ohm
R286	033-0000-05	1/16W 0 ohm
R287	658-0240-18	1/16W 150 ohm

REF No.	PART No.	DESCRIPTION
R291	033-3321-15	1/16W 3.3k ohm
R292	033-4721-15	1/16W 4.7k ohm
R293	033-3321-15	1/16W 3.3k ohm
R294	033-4721-15	1/16W 4.7k ohm
R295	033-4731-15	1/16W 47k ohm
R296	033-3321-15	1/16W 3.3k ohm
R297	033-6821-15	1/16W 6.8k ohm
R298	033-1031-15	1/16W 10k ohm
R301	033-4711-15	1/16W 470 ohm
R302	658-0237-56	Resistor Network
R303	033-3321-15	1/16W 3.3k ohm
R304	033-3321-15	1/16W 3.3k ohm
R305	033-3321-15	1/16W 3.3k ohm
R306	033-3321-15	1/16W 3.3k ohm
R307	033-3321-15	1/16W 3.3k ohm
R309	033-1021-15	1/16W 1k ohm
R311	033-3321-15	1/16W 3.3k ohm
R312	033-3321-15	1/16W 3.3k ohm
R313	033-3321-15	1/16W 3.3k ohm
R314	033-3321-15	1/16W 3.3k ohm
R321	033-4731-15	1/16W 47k ohm
R322	033-4731-15	1/16W 47k ohm
R331	658-0237-56	Resistor Network
R332	033-1031-15	1/16W 10k ohm
R333	658-0240-18	1/16W 150 ohm
R341	033-4731-15	1/16W 47k ohm
R351	658-0240-18	1/16W 150 ohm
R401	033-1531-15	1/16W 15k ohm
R402	033-1031-15	1/16W 10k ohm
R403	033-1031-15	1/16W 10k ohm
R404	033-1031-15	1/16W 10k ohm
R412	033-4721-15	1/16W 4.7k ohm
R413	033-1031-15	1/16W 10k ohm

REF No.	PART No.	DESCRIPTION
R414	033-1031-15	1/16W 10k ohm
R415	033-1231-15	1/16W 12k ohm
R416	033-1031-15	1/16W 10k ohm
R417	033-4731-15	1/16W 47k ohm
R418	033-1531-15	1/16W 15k ohm
R419	658-0240-20	1/16W 56k ohm
R421	658-0240-20	1/16W 56k ohm
R422	658-0240-21	1/10W 1 ohm
R423	658-0240-21	1/10W 1 ohm
R424	033-4731-15	1/16W 47k ohm
R425	033-1011-15	1/16W 100 ohm
R426	033-1011-15	1/16W 100 ohm
R431	033-2211-15	1/16W 220 ohm
R432	033-2211-15	1/16W 220 ohm
R433	033-2211-15	1/16W 220 ohm
R434	033-2211-15	1/16W 220 ohm
R435	658-0240-22	1/16W 68k ohm
R436	658-0240-22	1/16W 68k ohm
R437	658-0240-22	1/16W 68k ohm
R438	658-0240-22	1/16W 68k ohm
R439	658-0240-20	1/16W 56k ohm
R440	033-2211-15	1/16W 220 ohm
R441	658-0240-20	1/16W 56k ohm
R442	033-2211-15	1/16W 220 ohm
R511	658-0240-23	1/16W 100k ohm
SW8	658-0244-13	K0L1BA000104
SW9	658-0240-33	K0L1BA000022
SW10	658-0240-33	K0L1BA000022
SW11	658-0240-33	K0L1BA000022
XL201	658-0237-52	H0J168500003
PWB	----------	PWB

Sub PWB(B2) section

REF No.	PART No.	DESCRIPTION
C101	658-0246-22	50WV 100PF
C102	658-0246-22	50WV 100PF
C103	658-0246-22	50WV 100PF
C104	658-0246-22	50WV 100PF
C105	658-0246-22	50WV 100PF
C106	658-0246-22	50WV 100PF
C107	658-0246-22	50WV 100PF
C108	658-0246-22	50WV 100PF
C109	658-0246-22	50WV 100PF
C121	658-0240-13	10uF 6.3WV
C122	658-0240-13	10uF 6.3WV
C123	658-0246-22	50WV 100PF
C124	658-0249-03	10WV 0.1uF
C125	658-0246-22	50WV 100PF
C126	658-0249-03	10WV 0.1uF
C127	658-0246-22	50WV 100PF
C128	658-0249-03	10WV 0.1uF
C129	658-0240-13	10uF 6.3WV
C130	658-0249-03	10WV 0.1uF
C131	658-0249-03	10WV 0.1uF
C132	658-0240-13	10uF 6.3WV
C133	658-0249-03	10WV 0.1uF
C134	658-0249-03	10WV 0.1uF
C135	658-0249-03	10WV 0.1uF
C136	658-0240-13	10uF 6.3WV
C137	658-0240-13	10uF 6.3WV
C138	658-0249-03	10WV 0.1uF
C139	658-0249-03	10WV 0.1uF
C141	658-0240-13	10uF 6.3WV
C142	658-0249-03	10WV 0.1uF
C151	658-0240-13	10uF 6.3WV
C152	658-0240-13	10uF 6.3WV
C153	658-0249-03	10WV 0.1uF
C154	658-0249-03	10WV 0.1uF
C155	658-0249-03	10WV 0.1uF
C156	658-0249-03	10WV 0.1uF
C157	658-0249-03	10WV 0.1uF

REF No.	PART No.	DESCRIPTION
C158	658-0249-03	10WV 0.1uF
C161	658-0249-03	10WV 0.1uF
C162	658-0249-03	10WV 0.1uF
C163	658-0249-03	10WV 0.1uF
C164	658-0249-03	10WV 0.1uF
C165	658-0249-03	10WV 0.1uF
C166	658-0249-03	10WV 0.1uF
C167	658-0246-22	50WV 100PF
C201	658-0240-42	1uF 6.3WV
C202	658-0246-22	50WV 100PF
C203	658-0246-22	50WV 100PF
C204	658-0246-22	50WV 100PF
C205	658-0246-22	50WV 100PF
C206	658-0246-22	50WV 100PF
C207	658-0246-22	50WV 100PF
C208	658-0246-22	50WV 100PF
C209	658-0246-22	50WV 100PF
C211	658-0240-42	1uF 6.3WV
C212	658-0246-22	50WV 100PF
C213	658-0246-22	50WV 100PF
C214	658-0246-22	50WV 100PF
C215	658-0246-22	50WV 100PF
C221	658-0249-03	10WV 0.1uF
C222	658-0246-22	50WV 100PF
C223	658-0249-03	10WV 0.1uF
C231	658-0249-03	10WV 0.1uF
C241	658-0249-03	10WV 0.1uF
C251	658-0249-03	10WV 0.1uF
C252	658-0240-13	10uF 6.3WV
C253	658-0240-12	0.1uF 10WV
C261	658-0249-03	10WV 0.1uF
C262	658-0249-03	10WV 0.1uF
C321	658-0240-14	47uF 6.3WV
C322	658-0240-13	10uF 6.3WV
C323	658-0249-03	10WV 0.1uF
C331	658-0249-03	10WV 0.1uF
C332	658-0240-43	10uF 16WV

REF No.	PART No.	DESCRIPTION
C333	658-0237-23	6.3V 1uF
C341	658-0248-04	50V 1000pF
C342	658-0248-04	50V 1000pF
C343	658-0248-04	50V 1000pF
C344	658-0248-04	50V 1000pF
C346	658-0249-03	10WV 0.1uF
C347	658-0240-14	47uF 6.3WV
C351	658-0240-44	330pF 50WV
C352	658-0240-44	330pF 50WV
C353	658-0240-45	120PF 50WV
CN201	658-0240-26	Connector 22P
CN211	658-0240-28	Connector 6P
CN301	658-0237-47	Connector 30P
CN311	658-0240-51	Connector 6P
IC101	658-0246-08	C1AB00002286
IC201	658-0246-09	C3ABPJ000074
IC221	658-0246-10	C3FBMD000282
IC231	658-0249-05	C0JBAH000127
IC241	658-0249-05	C0JBAH000127
IC251	658-0246-11	C3GBCA000001
IC252	658-0249-06	C0JBAB000890
IC261	658-0246-06	C0JBAA000356
IC262	658-0246-06	C0JBAA000356
IC321	658-0240-40	C0FBBK000029
IC331	658-0246-05	C0CBADC00084
J1	117-0000-10	1/8W 0ohm
J2	117-0000-10	1/8W 0ohm
L121	658-0240-56	J0MAB0000134
L122	658-0240-52	J0JCC0000042
L123	658-0240-30	J0JCC0000152
L124	658-0240-30	J0JCC0000152
L125	658-0240-30	J0JCC0000152
L126	658-0240-30	J0JCC0000152
L127	658-0240-30	J0JCC0000152
L301	658-0240-57	J0MAB0000015
L302	658-0240-57	J0MAB0000015
L303	658-0240-46	470pF 50WV

REF No.	PART No.	DESCRIPTION
L304	658-0240-46	470pF 50WV
L321	658-0231-27	1/8W 0 ohm
L322	658-0231-27	1/8W 0 ohm
L323	658-0246-32	J0JCC0000159
L324	658-0246-32	J0JCC0000159
L325	658-0246-32	J0JCC0000159
L326	658-0246-32	J0JCC0000159
L341	658-0240-32	YELTBMHS800T
L342	658-0240-32	YELTBMHS800T
L343	658-0240-32	YELTBMHS800T
L344	658-0231-27	1/8W 0 ohm
L345	658-0240-32	YELTBMHS800T
L351	658-0246-31	G1C2R2K00013
R101	033-1011-15	1/16W 100 ohm
R121	658-0240-47	1/16W 33 ohm
R122	033-1011-15	1/16W 100 ohm
R123	033-1011-15	1/16W 100 ohm
R124	033-3931-15	1/16W 39k ohm
R125	033-4731-15	1/16W 47k ohm
R126	033-4731-15	1/16W 47k ohm
R127	033-2201-15	1/16W 22 ohm
R128	033-2201-15	1/16W 22 ohm
R129	033-1011-15	1/16W 100 ohm

REF No.	PART No.	DESCRIPTION
R130	658-0240-47	1/16W 33 ohm
R131	116-1001-10	1/8W 10 ohm
R132	658-0240-47	1/16W 33 ohm
R133	658-0240-47	1/16W 33 ohm
R134	658-0240-48	1/10W 75 ohm
R135	658-0240-49	1/16W 1k ohm
R136	658-0240-18	1/16W 150 ohm
R137	658-0240-18	1/16W 150 ohm
R153	033-3321-15	1/16W 3.3k ohm
R162	033-3931-15	1/16W 39k ohm
R163	033-3931-15	1/16W 39k ohm
R164	033-1031-15	1/16W 10k ohm
R165	033-1031-15	1/16W 10k ohm
R166	033-2021-15	1/16W 2k ohm
R167	033-3931-15	1/16W 39k ohm
R171	033-4711-15	1/16W 470 ohm
R172	033-4711-15	1/16W 470 ohm
R173	033-4711-15	1/16W 470 ohm
R174	033-4711-15	1/16W 470 ohm
R175	033-4711-15	1/16W 470 ohm
R176	033-4711-15	1/16W 470 ohm
R177	033-4711-15	1/16W 470 ohm
R178	033-4711-15	1/16W 470 ohm

REF No.	PART No.	DESCRIPTION
R221	658-0240-18	1/16W 150 ohm
R222	033-1031-15	1/16W 10k ohm
R231	658-0240-50	1/16W 75 ohm
R251	033-2021-15	1/16W 2k ohm
R252	033-1221-15	1/16W 1.2k ohm
R253	033-4711-15	1/16W 470 ohm
R261	033-1031-15	1/16W 10k ohm
R311	033-1011-15	1/16W 100 ohm
R312	033-1011-15	1/16W 100 ohm
R313	033-1011-15	1/16W 100 ohm
R314	033-1011-15	1/16W 100 ohm
R315	033-1011-15	1/16W 100 ohm
R316	658-0240-23	1/16W 100k ohm
R317	658-0240-23	1/16W 100k ohm
R318	033-0000-05	1/16W 0 ohm
R321	033-1011-15	1/16W 100 ohm
R322	033-1011-15	1/16W 100 ohm
R323	033-1011-15	1/16W 100 ohm
R324	033-1011-15	1/16W 100 ohm
R325	033-1011-15	1/16W 100 ohm
XL101	658-0240-55	H1A2705B0013
PWB	----------	PWB

Load-1 PWB(B3) section

REF No.	PART No.	DESCRIPTION
CN311	658-0240-59	Connector 9P
Q13	658-0237-17	TR B3HB00000012
Q4	658-0240-58	B3NAA0000065

REF No.	PART No.	DESCRIPTION
Q5	658-0237-17	TR B3HB00000012
Q6	658-0237-17	TR B3HB00000012
Q7	658-0237-17	TR B3HB00000012

REF No.	PART No.	DESCRIPTION
SW12	658-0244-13	K0L1BA000104
SW14	658-0244-13	K0L1BA000104
PWB	----------	PWB

Load-2 PWB(B4) section

REF No.	PART No.	DESCRIPTION
CN312	658-0240-61	Connector 6P
D13	658-0240-60	B3EB00000013

REF No.	PART No.	DESCRIPTION
D5	658-0240-60	B3EB00000013
D6	658-0240-60	B3EB00000013

REF No.	PART No.	DESCRIPTION
D7	658-0240-60	B3EB00000013
PWB	----------	PWB

Elevator-Motor FPC(B5) section

REF No.	PART No.	DESCRIPTION
D1	658-0240-58	B3NAA0000065

REF No.	PART No.	DESCRIPTION
SW2	658-0244-13	K0L1BA000104

REF No.	PART No.	DESCRIPTION
PWB	----------	PWB
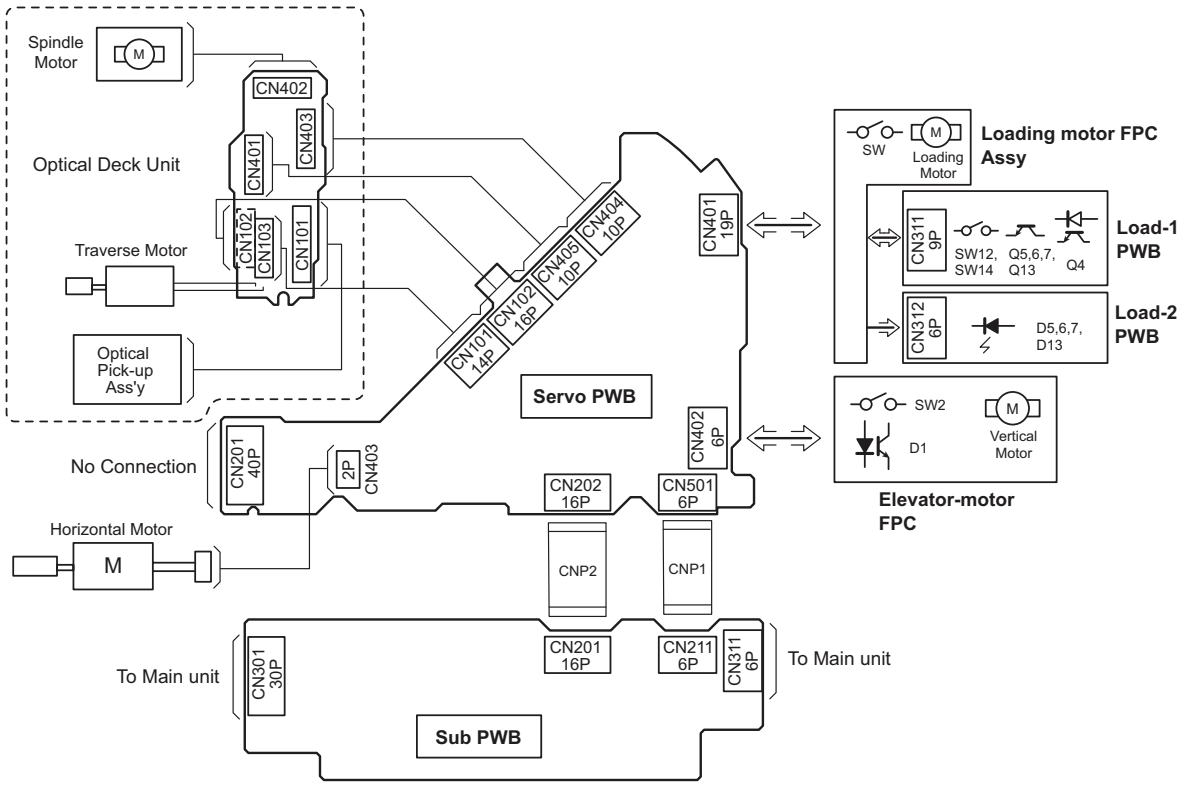
WIRE CONNECTION