


9. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 • The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 • Screw adjacent to ∇ mark on the product are used for disassembly.
 • For the applying amount of lubricants or glue, follow the instructions in this manual.
 (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

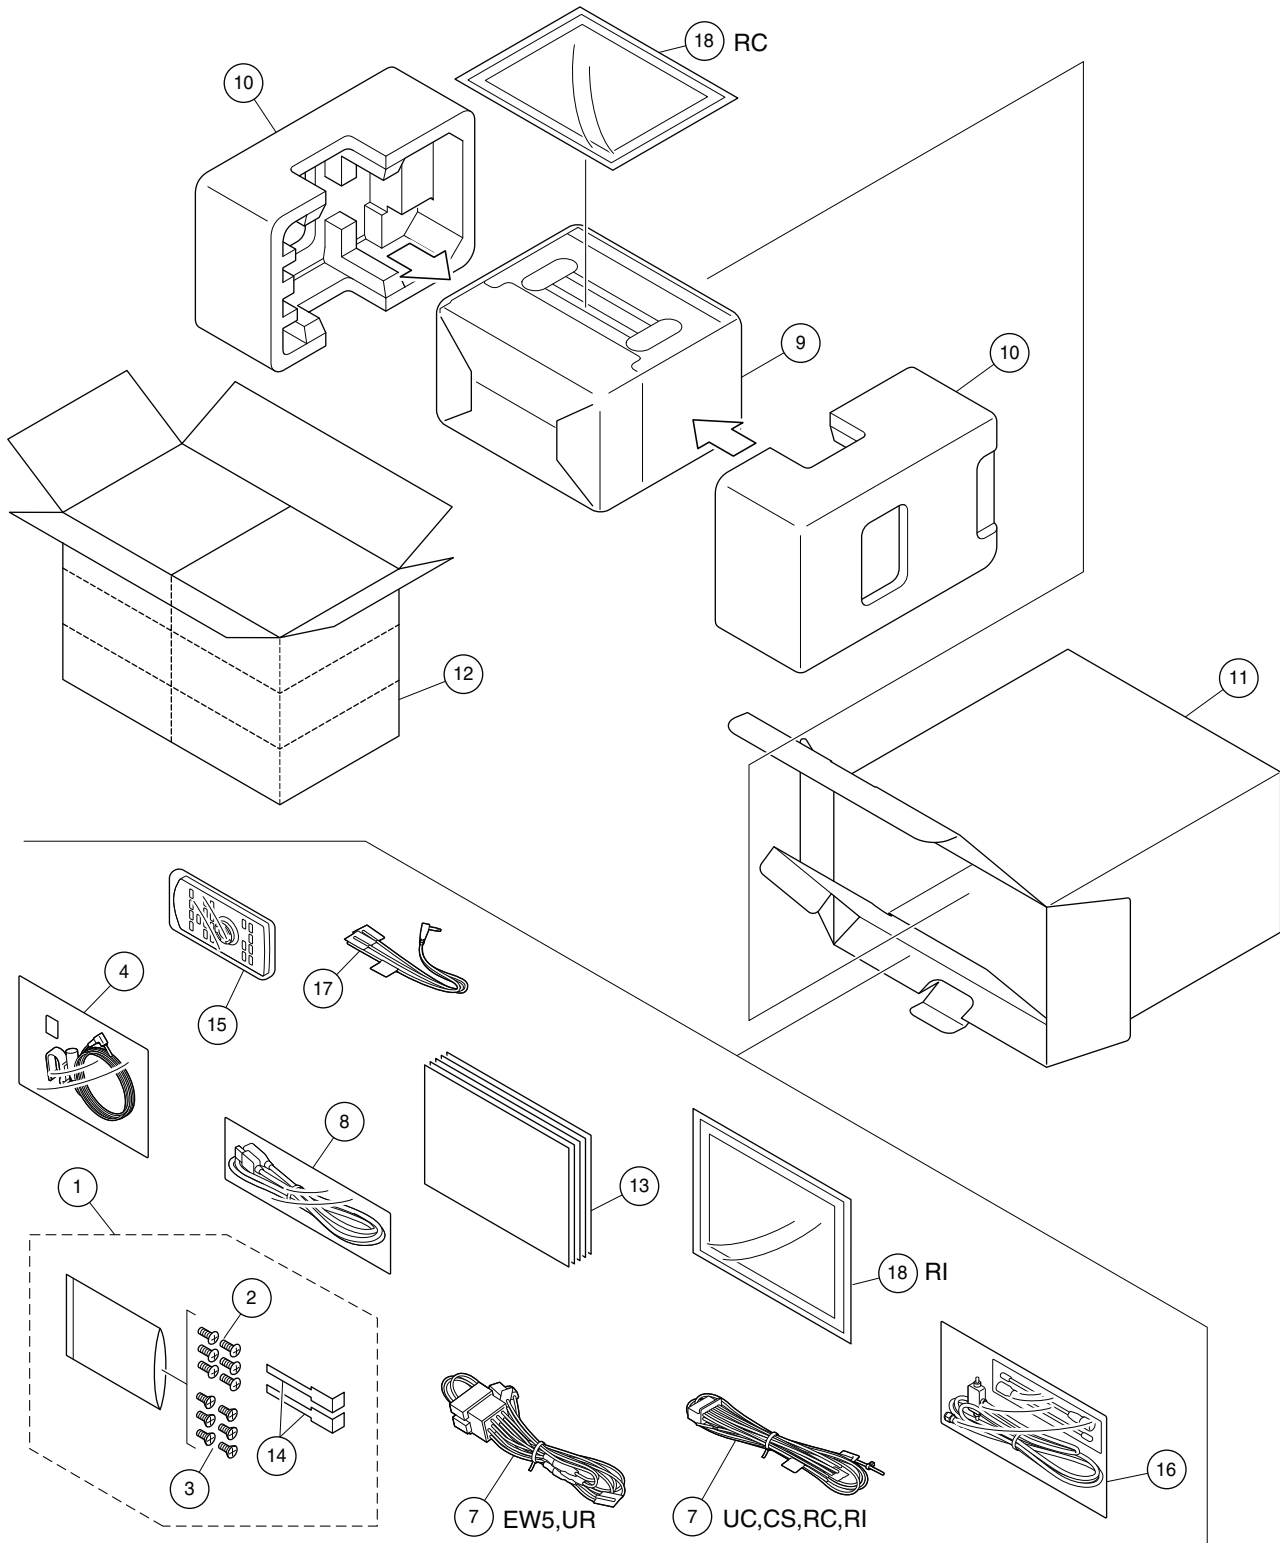

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1 Accessory Assy	See Contrast table (2)
	2 Screw (M5 x 9)	CBA2384
	3 Screw (M5 x 9)	See Contrast table (2)
	4 Microphone Assy (3 m)	CPM1113
	5	
	6	
	7 Cord Assy	See Contrast table (2)
	8 USB Extended Cable	CDP1587
	9 Cover	See Contrast table (2)
	10 Protector	See Contrast table (2)
B	11 Unit Box	See Contrast table (2)
	12 Contain Box	See Contrast table (2)
	13-1 Quick Start Guide	See Contrast table (2)
	13-2 Installation Manual	See Contrast table (2)
	* 13-3 Warranty Card	See Contrast table (2)
	13-4 Owner's Manual	See Contrast table (2)
	* 13-5 Caution Card	See Contrast table (2)
	* 13-6 Owner's Manual	See Contrast table (2)
	* 13-7 Caution Card	See Contrast table (2)
	14 Handle	See Contrast table (2)
C	15 Card Remote Control Unit	See Contrast table (2)
	16 Rod Antenna	See Contrast table (2)
	17 Cord Assy	See Contrast table (2)
	18 Panel	See Contrast table (2)

D

E

F

(2) CONTRAST TABLE

DMH-2660NEX/XNUC, DMH-2600NEX/XNUC, SPH-DA250DAB/XNEW5, DMH-Z5350BT/XNUR, DMH-Z5350TV/XNCS, DMH-Z5350BT/XNCS, DMH-Z5350BT/XNRC and DMH-Z5350BT/XNRI are constructed the same except for the following:

Mark	No.	Description	DMH-2660NEX/ XNUC	DMH-2600NEX/ XNUC	SPH-DA250DAB/ XNEW5	DMH-Z5350BT/ XNUR
A	1	Accessory Assy	*CEC7756	*CEC7756	CEW3026	CEW3027
	3	Screw (M5 x 9)	CBA2383	CBA2383	CBA2383	Not used
	7	Cord Assy	CDP1837	CDP1837	CDP1697	CDP1697
	9	Cover	CEG1359	CEG1359	CEG1356	CEG1356
	10	Protector	QHP3077	QHP3077	QHP3078	QHP3078
	11	Unit Box	CHA4679	CHA4682	CHA4681	CHA4685
	12	Contain Box	CHD4679	CHD4682	CHD4681	CHD4685
	13-1	Quick Start Guide	CRD5170	CRD5170	CRD5171	CRB5251
	13-2	Installation Manual	CRD5172	CRD5172	CRD5173	Not used
	13-3	Warranty Card	QRY3001	QRY3001	CRY1376	CRY1376
	13-4	Owner's Manual	Not used	Not used	Not used	Not used
	13-5	Caution Card	Not used	Not used	CRP1481	Not used
	13-6	Owner's Manual	See Contents of Web IM (3)	See Contents of Web IM (3)	See Contents of Web IM (3)	See Contents of Web IM (3)
	13-7	Caution Card	CRP1544	CRP1544	Not used	Not used
	14	Handle	Not used	Not used	CND7909	CND7909
	15	Card Remote Control Unit	CXE5116	Not used	Not used	Not used
	16	Rod Antenna	Not used	Not used	Not used	Not used
	17	Cord Assy	Not used	Not used	Not used	Not used
	18	Panel	Not used	Not used	Not used	Not used

Mark	No.	Description	DMH-Z5350TV/ XNCS	DMH-Z5350BT/ XNCS	DMH-Z5350BT/ XNRC	DMH-Z5350BT/ XNRI
C	1	Accessory Assy	*CEC7757	*CEC7757	*CEC7757	CEW3027
	3	Screw (M5 x 9)	Not used	Not used	Not used	Not used
	7	Cord Assy	CDP1837	CDP1837	CDP1837	CDP1837
	9	Cover	CEG1356	CEG1356	CEG1356	CEG1356
	10	Protector	QHP3077	QHP3077	QHP3077	QHP3078
	11	Unit Box	CHA4680	CHA4683	CHA4684	CHA4686
	12	Contain Box	CHD4680	CHD4683	CHD4684	CHD4686
	13-1	Quick Start Guide	Not used	Not used	CRD5175	Not used
	13-2	Installation Manual	Not used	Not used	Not used	Not used
	13-3	Warranty Card	Not used	Not used	Not used	Not used
	13-4	Owner's Manual	CRD5174	CRD5174	Not used	CRD5177
	13-5	Caution Card	Not used	Not used	Not used	Not used
	13-6	Owner's Manual	See Contents of Web IM (3)	See Contents of Web IM (3)	See Contents of Web IM (3)	Not used
	13-7	Caution Card	Not used	Not used	Not used	Not used
	14	Handle	Not used	Not used	Not used	CND7909
	15	Card Remote Control Unit	CXE5116	CXE5116	CXE5116	CXE5116
	16	Rod Antenna	CXE9491	Not used	Not used	Not used
	17	Cord Assy	Not used	Not used	CDP1894	CDP1894
	18	Panel	Not used	Not used	CNS9475	CNS9475

Owner's Manual, Quick Start Guide, Installation Manual

Part No.	Language
CRB5251	Russian
CRD5170	English, French, Spanish (Espanol)
CRD5171	English, French, Italian, Spanish (Espanol), German, Dutch
CRD5172	English, French, Spanish (Espanol)
CRD5173	English, French, Italian, Spanish (Espanol), German, Dutch
CRD5174	English, Spanish (Espanol), Portuguese (B)
CRD5175	English, Traditional Chinese, Indonesian, Thai
CRD5177	English, Arabic, Persian


(3) CONTENTS OF Web IM

Part No.	Language
*OPM_DMH2660NEXUC_EN_A	(UC model) English
*OPM_DMH2660NEXUC_FC_A	(UC model) French
*OPM_DMH2660NEXUC_EM_A	(UC model) Spanish (Espanol)
*OPM_SPHDA250DABEW5_EG_A	(EW5 model) English
*OPM_SPHDA250DABEW5_FR_A	(EW5 model) French
*OPM_SPHDA250DABEW5_IT_A	(EW5 model) Italian
*OPM_SPHDA250DABEW5_ES_A	(EW5 model) Spanish (Espanol)
*OPM_SPHDA250DABEW5_DE_A	(EW5 model) German
*OPM_SPHDA250DABEW5_NL_A	(EW5 model) Dutch
*OPM_SPHDA250DABEW5_SV_A	(EW5 model) Swedish
*OPM_SPHDA250DABEW5_NO_A	(EW5 model) Norwegian
*OPM_SPHDA250DABEW5_FI_A	(EW5 model) Finnish
*OPM_SPHDA250DABEW5_DA_A	(EW5 model) Danish
*OPM_SPHDA250DABEW5_PT_A	(EW5 model) Portuguese
*OPM_SPHDA250DABEW5_EL_A	(EW5 model) Greek
*OPM_SPHDA250DABEW5_TR_A	(EW5 model) Turkish
*OPM_DMHZ5350BTUR_RU_A	(UR model) Russian
*OPM_DMHZ5350TVCS_EG_A	(CS model) English
*OPM_DMHZ5350TVCS_EM_A	(CS model) Spanish (Espanol)
*OPM_DMHZ5350TVCS_PB_A	(CS model) Portuguese (B)
*OPM_DMHZ5350BTRC_EG_A	(RC model) English
*OPM_DMHZ5350BTRC_ZT_A	(RC model) Traditional Chinese
*OPM_DMHZ5350BTRC_ID_A	(RC model) Indonesian
*OPM_DMHZ5350BTRC_TH_A	(RC model) Thai

Above operation manuals are supplied in PDF files by the WEB.

Regarding the availability of paper manual, contact Pioneer Service representative in your region.

9.2 EXTERIOR (1)

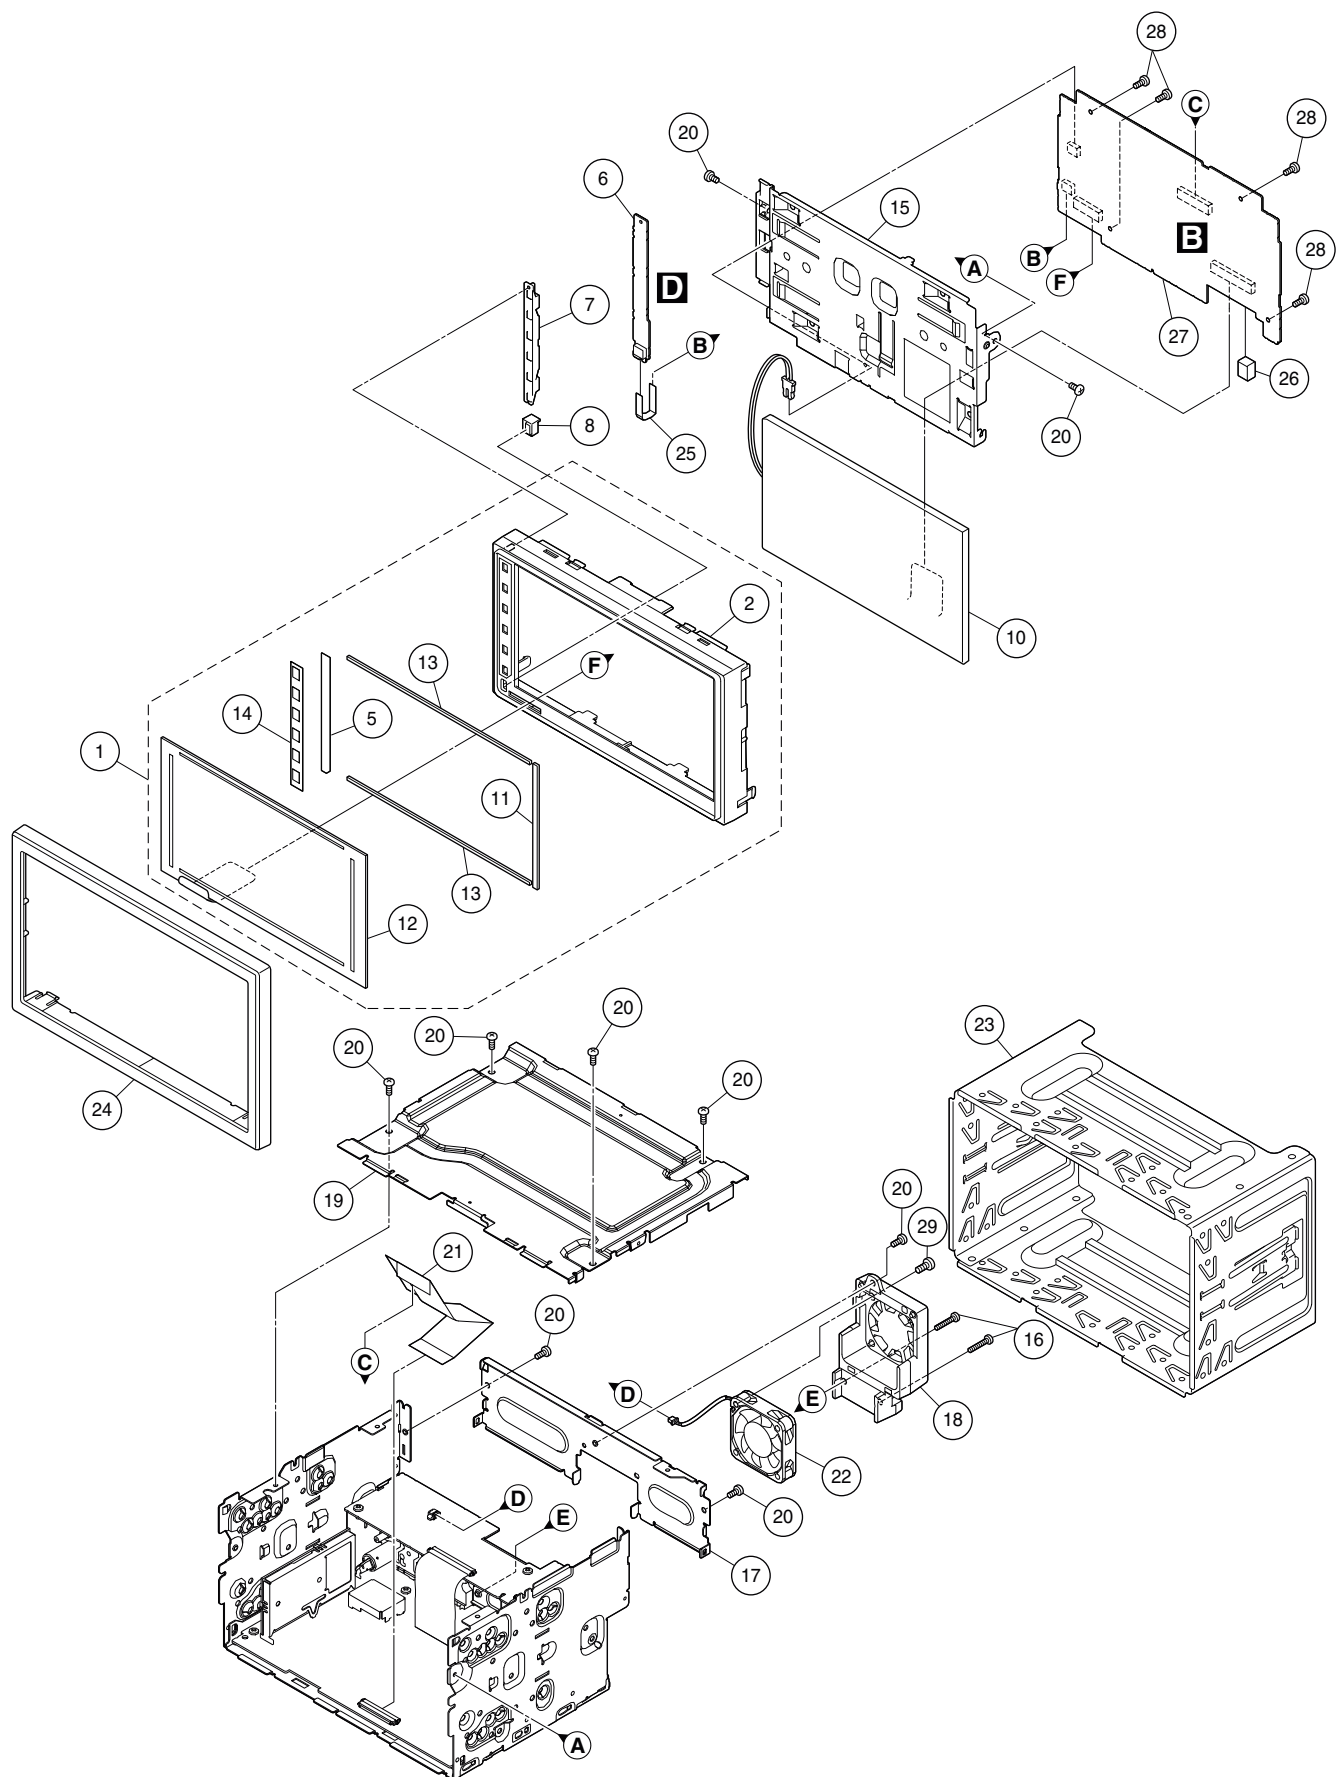


	1		2		3		4	
	(1) EXTERIOR (1) SECTION PARTS LIST							
	Mark No.	Description	Part No.		Mark No.	Description	Part No.	
A	1	Grille Assy	CXF3128		16	Screw	BSZ26P160FTC	
	* 2	Grille	CNU4516		17	Holder	CND8063	
	3				18	Heat Sink	CNR2254	
	4				19	Case	CNB3945	
	* 5	Light-D Sheet	CNN5821		20	Screw	BSZ26P060FTC	
	6	Service Unit (Keyboard)	CXY4840					
	7	Lighting Conductor	CNW4090		21	FFC	CDD1239	
	8	Lighting Conductor	CNW4091		22	Fan Motor	CXM1476	
	9				23	Holder	See Contrast table (2)	
	10	TFT LCD	CWX5008		24	Panel	See Contrast table (2)	
B					25	FFC	CDD1312	
	* 11	DS Tape	CNN5749					
	* 12	Touch Panel	CSX1422		26	Gasket	CNN5829	
	* 13	DS Tape	CNN5750		27	Service Unit (Monitor)	See Contrast table (2)	
	* 14	DS Tape	CNN5748		28	Screw	BSZ26P060FTC	
	15	Holder	CND8198		29	Screw	BPZ30P080FTC	

(2) CONTRAST TABLE
DMH-2660NEX/XNUC, DMH-2600NEX/XNUC, SPH-DA250DAB/XNEW5, DMH-Z5350BT/XNUR, DMH-Z5350TV/XNCS, DMH-Z5350BT/XNCS, DMH-Z5350BT/XNRC and DMH-Z5350BT/XNRI are constructed the same except for the following:

	Mark	No.	Description	DMH-2660NEX/ XNUC	DMH-2600NEX/ XNUC	SPH-DA250DAB/ XNEW5	DMH-Z5350BT/ XNUR
C		23	Holder	Not used	Not used	CND7859	CND7859
		24	Panel	Not used	Not used	CNU2645	CNU2645
		27	Service Unit (Monitor)	CXY4838	CXY4838	CXY4839	CXY4838
	Mark	No.	Description	DMH-Z5350TV/ XNCS	DMH-Z5350BT/ XNCS	DMH-Z5350BT/ XNRC	DMH-Z5350BT/ XNRI
D		23	Holder	Not used	Not used	Not used	CND7859
		24	Panel	Not used	Not used	Not used	CNU2645
		27	Service Unit (Monitor)	CXY4838	CXY4838	CXY4838	CXY4838

9.3 EXTERIOR (2)

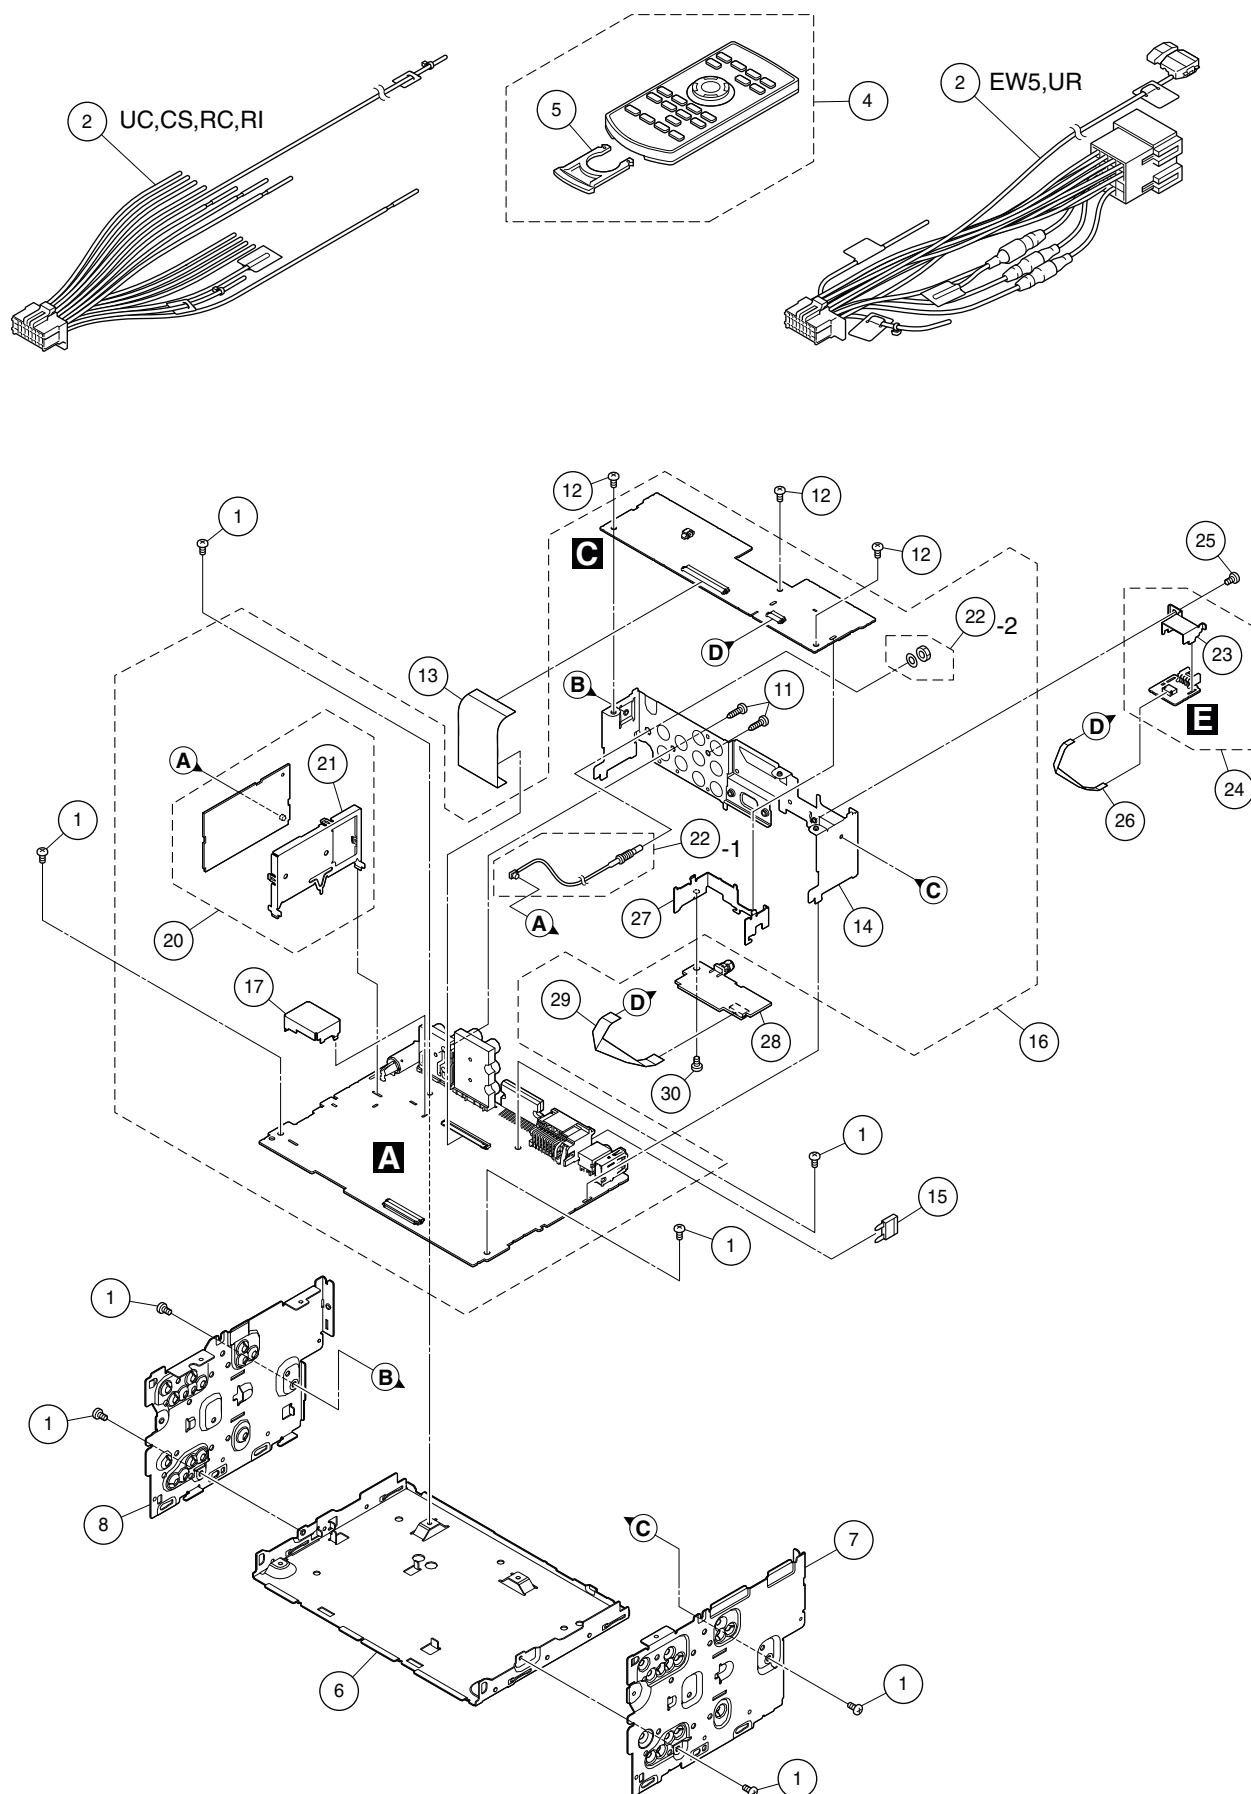

(1) EXTERIOR (2) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1 Screw	BSZ26P060FTC
	2 Cord Assy	See Contrast table (2)
	3	
	4 Card Remote Control Unit	See Contrast table (2)
	5 Battery Cover	See Contrast table (2)
	6 Chassis	CNA3468
	7 Bracket	CND8061
	8 Bracket	CND8062
	9	
	10	
B	11 Screw	BPZ26P080FTC
	12 Screw	BSZ26P060FTC
	13 FFC	See Contrast table (2)
	14 Holder	See Contrast table (2)
	⚠ 15 Fuse (10 A)	YEK5001
	16 Service Unit (Mother I/F)	See Contrast table (2)
	17 Shield Case	See Contrast table (2)
	18	
	19	
	20 BE Core Unit (U1801)	See Contrast table (2)
C	21 Holder	See Contrast table (2)
	22 Antenna Cable Assy	See Contrast table (2)
	23 Holder	See Contrast table (2)
	24 Service Unit (I-Data)	See Contrast table (2)
	25 Screw	See Contrast table (2)
	26 FFC	See Contrast table (2)
	27 Holder	See Contrast table (2)
	28 TV Tuner	See Contrast table (2)
	29 FFC	See Contrast table (2)
	30 Screw	See Contrast table (2)
D		
E		
F		

(2) CONTRAST TABLE

DMH-2660NEX/XNUC, DMH-2600NEX/XNUC, SPH-DA250DAB/XNEW5, DMH-Z5350BT/XNUR, DMH-Z5350TV/XNCS, DMH-Z5350BT/XNCS, DMH-Z5350BT/XNRC and DMH-Z5350BT/XNRI are constructed the same except for the following:

Mark	No.	Description	DMH-2660NEX/ XNUC	DMH-2600NEX/ XNUC	SPH-DA250DAB/ XNEW5	DMH-Z5350BT/ XNUR
	2	Cord Assy	CDP1837	CDP1837	CDP1697	CDP1697
	4	Card Remote Control Unit	CXE5116	Not used	Not used	Not used
	5	Battery Cover	CNU1624	Not used	Not used	Not used
	13	FFC	CDD1220	CDD1220	CDD1219	CDD1219
	14	Holder	CND8220	CND8221	CND8222	CND8222
	16	Service Unit (Mother I/F)	CXY4830	CXY4833	CXY4831	CXY4834
	17	Shield Case	CND7762	Not used	CND7762	Not used
	20	BE Core Unit (U1801)	CWE2518	Not used	CWE2571 (WWR Tuner Unit)	Not used
	21	Holder	CND7288	Not used	CND7288	Not used
	22	Antenna Cable Assy	Not used	Not used	CXE7975	Not used
	23	Holder	CND7760	CND7760	Not used	Not used
	24	Service Unit (I-Data)	CXY4842	CXY4842	Not used	Not used
	25	Screw	BSZ26P060FTC	BSZ26P060FTC	Not used	Not used
	26	FFC	CDD1222	CDD1222	Not used	Not used
	27	Holder	Not used	Not used	Not used	Not used
	28	TV Tuner	Not used	Not used	Not used	Not used
	29	FFC	Not used	Not used	Not used	Not used
	30	Screw	Not used	Not used	Not used	Not used

Mark	No.	Description	DMH-Z5350TV/ XNCS	DMH-Z5350BT/ XNCS	DMH-Z5350BT/ XNRC	DMH-Z5350BT/ XNRI
	2	Cord Assy	CDP1837	CDP1837	CDP1837	CDP1837
	4	Card Remote Control Unit	CXE5116	CXE5116	CXE5116	CXE5116
	5	Battery Cover	CNU1624	CNU1624	CNU1624	CNU1624
	13	FFC	CDD1220	CDD1219	CDD1219	CDD1219
	14	Holder	CND8223	CND8222	CND8222	CND8222
	16	Service Unit (Mother I/F)	CXY4832	CXY4836	CXY4835	CXY4837
	17	Shield Case	Not used	Not used	Not used	Not used
	20	BE Core Unit (U1801)	Not used	Not used	Not used	Not used
	21	Holder	Not used	Not used	Not used	Not used
	22	Antenna Cable Assy	Not used	Not used	Not used	Not used
	23	Holder	Not used	Not used	Not used	Not used
	24	Service Unit (I-Data)	Not used	Not used	Not used	Not used
	25	Screw	Not used	Not used	Not used	Not used
	26	FFC	Not used	Not used	Not used	Not used
	27	Holder	CND7761	Not used	Not used	Not used
	28	TV Tuner	CWE2519	Not used	Not used	Not used
	29	FFC	CDD1221	Not used	Not used	Not used
	30	Screw	BSZ26P060FTC	Not used	Not used	Not used

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J, RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

Circuit Symbol and No.
A: DMH-2660NEX/XNUC
B: DMH-2600NEX/XNUC
C: SPH-DA250DAB/XNEW5
D: DMH-Z5350BT/XNUR
E: DMH-Z5350TV/XNCS
F: DMH-Z5350BT/XNCS
G: DMH-Z5350BT/XNRC
H: DMH-Z5350BT/XNRI

Service Unit (Mother I/F)

Consists of
Mother PCB
Interface PCB

A C

Unit Number : CXY4830 (A)
Unit Number : CXY4833 (B)
Unit Number : CXY4831 (C)
Unit Number : CXY4834 (D)
Unit Number : CXY4832 (E)
Unit Number : CXY4836 (F)
Unit Number : CXY4835 (G)
Unit Number : CXY4837 (H)
Unit Name : Service Unit (Mother I/F)

MISCELLANEOUS

IC 101	Regulator IC	NJW4181U3-33B
IC 111	Regulator IC	NJW4184DL3-08A
IC 141	Regulator IC	MM3411A33N
IC 161	Regulator IC	RP108J081D-AE
IC 231	Regulator IC	MM1856A50N
IC 271	Regulator IC	MM1856A58N
IC 301	Regulator IC (A,C)	MM3479A33P
IC 302	Regulator IC (A,C)	MM3479A12P
IC 303	Regulator IC (C)	MM3479A33P
IC 304	Regulator IC	MM3479A33P

Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
IC 351	DC/DC CONV IC	KBD9876EFJ	
IC 401	IC	AN33012UA	
IC 451	DC/DC CONV IC	MM3630BR	
IC 501	DC/DC CONV IC	TLV62065TDSGQ1	
*IC 601	Flash Blank UC IC	MN103LFA5RXW	
IC 901	U-PRO IC	MN2KSC100M	
IC 1101	CONV IC	AK5720VT	
IC 1191	IC	337S3959	
IC 1301	Software Unit (A,B)	CVQ1288	
IC 1301	Software Unit (C, D, E, F, G, H)	CVQ1289	
IC 1321	Flash Memory IC (A, B)	W25Q64JVSSIQ	
IC 1321	Flash Memory IC (C, D, E, F, G, H)	W25Q16JVSSIQ	
IC 1341	Software Unit	CVQ1290	
IC 1401	RAM IC	W631GG6MB-12	
IC 1402	RAM IC	W631GG6MB-12	
IC 1501	IC	AK4223VQ	
IC 1601	OP AMP IC	NJW1240V	
IC 1721	Logic IC	TC7SH32FUS2	
IC 1901	Logic IC	TC7SZU04FUS2	
IC 2451	Interface IC	STCC2540IQ	
IC 4011	Variable Regulator	BA00CC0WFP	
IC 4131	Buffer Logic IC (A, B)	TC7SH126FUS1	
IC 4132	AND Logic IC (A, B)	MC74VHC1GT08DFG	
IC 4171	AND Logic IC (A, B)	MC74VHC1GT08DFG	
IC 4172	AND Logic IC (A, B)	MC74VHC1GT08DFG	
IC 4201	OP AMP IC	NJU7043V	
IC 8401	Tuner IC (A)	TEF6688AHN	
IC 8401	Tuner IC (B, C, D, E, F, G, H)	TEF6686AHN	
IC 9001	E-VOL SYS LSI	PM9015A	
IC 9201	Power AMP IC	TCB501HQ	
Q 3	Bipolar TR	HN1C01FUS1	
Q 5	Resistor Built-IN TR	LTC014EEB	
Q 6	Bipolar TR	LSCR523UB	
Q 7	Bipolar TR	LSAR523UB	
Q 190	Resistor Built-IN TR	LTC014EEB	
Q 191	Bipolar TR	LSAR523UB	
Q 301	Transistor (C)	2SD2153	
Q 302	Transistor (C)	2SAR293PGZE	
Q 303	Resistor Built-IN TR (C)	LTC014EEB	
Q 401	Power MOS FET	SFT1342	
Q 402	Power MOS FET	SFT1342	
Q 602	Resistor Built-IN TR (E, F, G, H)	RN4982S1	
Q 603	Resistor Built-IN TR (E, F, G, H)	RN4982S1	
Q 604	Resistor Built-IN TR (E, F, G, H)	RN4982S1	

	1		2	3		4
	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
	Q	605 Resistor Built-IN TR (E, F, G, H)	RN4982S1	L	401 SMD SPL Inductor	CTH1542
A	Q	1131 Bipolar TR	LSCR523UB	L	402 Choke Coil 7.0 uH	CTH1381
	Q	1191 Bipolar TR	LSAR523UB	L	451 SMD SPL Inductor	CTH1584
	Q	1601 Resistor Built-IN TR	LTC044EEB	L	501 Inductor	CTH1629
	Q	1721 Resistor Built-IN TR	LTC043ZEB	L	801 Inductor	CTF1645
	Q	1901 Transistor	2SAR502UB	L	802 Inductor	CTF1740
	Q	1902 Resistor Built-IN TR	LTC023YEB	L	803 Inductor	CTF1645
	Q	2301 Transistor	2SD2114K	L	804 SMD Ferrite Beads	CTF1869
	Q	2302 Resistor Built-IN TR	RN4984S1	L	1801 Inductor (C)	CTF1786
	Q	2303 Resistor Built-IN TR	RN4984S1	L	1802 Inductor (A, C)	CTF1872
	Q	4011 Resistor Built-IN TR	LTC014EEB	L	1803 Inductor (A, C)	CTF1872
B	Q	4201 Bipolar TR	LSCR523UB	L	1901 SMD Ferrite Beads	CTF1869
	Q	8401 Bipolar TR (A)	MMBT2369L	L	2301 Chip Beads	VTL1126
	Q	8402 Bipolar TR (A)	MMBT2369L	L	2302 Chip Beads	VTL1126
	Q	8403 Bipolar TR (A)	MMBT2369L	L	2303 Chip Beads	VTL1126
	Q	8404 Bipolar TR (A)	MMBT2369L	L	2304 Chip Beads	VTL1126
	D	4 Diode	D1F60-5053	L	2351 Chip Beads	VTL1126
	D	5 Diode	D1F60-5053	L	2352 Chip Beads	VTL1126
	D	7 Zener Diode	UDZV6R2(B)	L	2353 Chip Beads	VTL1126
	D	8 Zener Diode	UDZV6R8(B)	L	2354 Chip Beads	VTL1126
	D	9 Switching Diode	1SS355VM	L	2355 Chip Beads	VTL1126
C	D	10 Zener Diode	UDZV5R6(B)	L	2356 Chip Beads	VTL1126
	D	12 Switching Diode	1SS355VM	L	2357 Chip Beads	VTL1126
	D	14 Schottky Diode	RB080LAM-30TF	L	2401 Chip Beads	VTL1126
	D	163 Schottky Diode	RB056LAM-40TF	L	2402 Chip Beads	VTL1126
	D	164 Schottky Diode	RB056LAM-40TF	L	2403 Chip Beads	VTL1126
	D	303 Zener Diode (C)	UDZV16(B)	L	2404 Chip Beads	VTL1126
	D	351 Schottky Diode	RB056LAM-40TF	L	2405 Chip Beads	VTL1126
	D	401 Schottky Diode	RB056LAM-40TF	L	2406 Chip Beads	VTL1126
	D	402 Schottky Diode	RB056LAM-40TF	L	2407 SMD Ferrite Beads	CTF1869
	D	451 Schottky Diode	RB080LAM-30TF	L	2451 Noise Filter	CTF1887
D	D	601 Schottky Diode	RB751SM-40	L	4083 Chip Beads	VTL1126
	D	602 Schottky Diode	RB751SM-40	L	4084 Chip Beads	VTL1126
	D	801 Zener Diode	RSB6R8SM	L	4104 Chip Beads	VTL1126
	D	871 Zener Diode	RSB6R8SM	L	4105 Chip Beads	VTL1126
	D	872 Zener Diode	RSB6R8SM	L	4122 Chip Beads	VTL1126
	D	873 Zener Diode	RSB6R8SM	L	4123 Chip Beads	VTL1126
	D	874 Zener Diode	RSB6R8SM	L	4201 Ferrite Bead	CTF1528
	D	1901 Zener Diode	RSB6R8SM	L	8401 SMD Ferrite Beads	CTF1893
	D	1904 Zener Diode	RSB6R8SM	L	8403 Inductor	LCTC150K1608
	D	1905 Zener Diode	RSB6R8SM	L	8405 Inductor	LCMAR27J1608
E	D	2211 Zener Diode	RSB6R8SM	L	8409 Inductor	CTF1787
	D	2301 Diode	RSB18V	X	601 Crystal Resonator 12.500 MHz	CSS1839
	D	2302 Diode	RSB18V	X	801 Resonator 24 MHz	CSS1773
	D	2303 Diode	RSB18V	X	1901 Resonator 32.768 kHz	CSS1807
	D	2304 Diode	RSB18V	X	8401 Crystal Resonator 9.216 MHz	CSS1888
	D	2305 Zener Diode	UDZV3R9(B)	⚠ P301	Poly Switch (A, B)	FSMD110-24R
	D	2352 Diode	RSB18V	⚠ P301	Poly Switch (C)	FSMD050-R
	D	2353 Diode	RSB18V	⚠ P301	Poly Switch (D, E, F, G, H)	FSMD020-R
	D	2354 Diode	RSB18V	⚠ P2201	Fuse 0.75 A	CEK1398
	D	2451 Diode	EZAEG2A50AX	⚠ P2352	Poly Switch	FSMD075-24R
	D	2452 Diode	EZAEG2A50AX	⚠ P2401	Poly Switch	FSMD075-24R
	D	4171 Switching Diode (A, B)	1SS355VM	⚠ P4081	Poly Switch	FSMD075-24R
	D	8451 Diode	EZAEG2A50AX	P	8451 Surge Absorber	IMSA-6803-01Y900
	D	8452 Diode	EZAEG2A50AX	TH	801 Thermistor	CCX1084
	D	8453 Zener Diode	RSB6R8SM	F	9001 EMI Filter	CCG1142
F	L	3 Choke Coil 120 uH	CTH1636	F	9002 EMI Filter	CCG1142
	L	51 Choke Coil 3.6 uH (C, G)	CTH1479	F	9201 EMI Filter	CCG1142
	L	101 Chip Beads	VTL1127			
	L	351 SMD SPL Inductor	CTH1678			

5			6		7			8	
Circuit Symbol and No.			Part No.		Circuit Symbol and No.			Part No.	
F	9202	EMI Filter	CCG1142		R	352		RS1/16SS4702D	
VL	8401	Variable Coil	CTC1215		R	353		RS1/16SS1202D	
CN	1801	FFC/FPC Connector (C)	CKS6635						
CN	2201	FFC/FPC Connector	CKS6645		R	354		RS1/16SS822J	
CN	2251	FFC/FPC Connector (C, D, F, G, H)	CKS6710		R	357		RS1/8SQ331J	
CN	2252	FFC/FPC Connector (A, B, E)	CKS6703		R	401		RS1/16SS561J	
CN	4001	FFC/FPC Connector (C, D, F, G, H)	CKS6645		R	402		RS1/16SS1502D	
CN	4002	FFC/FPC Connector (A, B, E)	CKS6646		R	403		RS1/16SS1301D	
CN	4011	Connector	CKS4977		R	404		RS1/16SS5101D	
CN	4051	FFC/FPC Connector (E)	CKS6638		R	405		RS1/16SS222J	
CN	4171	FFC/FPC Connector (A, B)	CKS6634		R	406		RS1/16SS103J	
JA	1	Connector	CKM1613		R	408	11 mohm	CCN1341	
JA	2301	3.5 DIA Jack	CKN1106		R	409		RS1/16SS204J	
JA	2351	RCA Jack	CKB1110		R	410		RS1/16SS394J	
JA	2401	RCA Jack	CKB1113		R	411	15 mohm	CCN1328	
JA	2451	USB Jack	CKN1136		R	412		RS1/16SS224J	
JA	4081	3.5 DIA Jack	CKS6437		R	413		RS1/16SS272J	
JA	4101	Jack	CKN1101		R	414		RS1/16SS1101D	
JA	4121	RCA Jack	CKB1106		R	415		RS1/16SS1001D	
JA	4131	Connector (A, B)	CKS6495		R	416		RS1/16SS1502D	
JA	8451	Antenna Jack	CKX1104		R	417		RS1/16SS101J	
U	1801	BE Core Unit (A)	CWE2518		R	422		RS1/16SS473J	
U	1801	WWR Unit (C)	CWE2571		R	423		RS1/16SS473J	
U	1901	BT Module	CWX4751		R	432	15 mohm	CCN1328	
					R	437		RS1/4SA331J	
					R	451		RS1/16SS123J	
					R	452		RS1/16SS3001D	
					R	453		RS1/16SS1602D	
RESISTORS									
R	51	(A, B, D, E, F, H)	RS1/4SA0R0J		R	455		RS1/16SS2001D	
R	53		RS1/16SS103J		R	456		RS1/16SS473J	
R	55		RS1/16SS473J		R	457		RS1/16SS304J	
R	56		RS1/16SS472J		R	458	100 mohm	CCN1339	
R	57		RS1/16SS104J		R	461		RS1/4SA331J	
R	58		RS1/16SS473J		R	502		RS1/16SS473J	
R	59		RS1/4SA102J		R	505		RS1/16SS1803D	
R	60		RS1/16SS103J		R	507		RS1/16SS2703D	
R	61		RS1/16SS472J		R	603		RS1/16SS472J	
R	62		RS1/4SA102J		R	604		RS1/16SS104J	
R	63		RS1/16SS473J		R	605		RS1/16SS473J	
R	64		RS1/16SS104J		R	607		RS1/16SS221J	
R	65		RS1/16SS472J		R	608		RS1/16SS221J	
R	66		RS1/4SA102J		R	609		RS1/16SS472J	
R	67		RS1/16SS102J		R	610		RS1/16SS102J	
R	68		RS1/16SS473J		R	611		RS1/16SS103J	
R	69		RS1/16SS223J		R	612		RS1/16SS471J	
R	70		RS1/16SS103J		R	613		RS1/16SS473J	
R	161		RS1/16SS5601D		R	614		RS1/16SS471J	
R	162		RS1/16SS1202D		R	618		RS1/16SS472J	
R	190		RS1/16SS222J		R	619		RS1/16SS472J	
R	191		RS1/16SS222J		R	625		RS1/16SS102J	
R	304	(A, C)	RS1/16SS102J		R	626		RS1/16SS0R0J	
R	307	(C)	RS1/16SS102J		R	627		RS1/16SS102J	
R	308		RS1/16SS102J		R	628		RS1/16SS104J	
R	315	(C)	RS1/16SS911J		R	629		RS1/16SS473J	
R	316	(C)	RS1/16SS103J		R	631		RS1/16SS121J	
R	317	(C)	RS1/4SA471J		R	632		RS1/16SS104J	
R	318	(C)	RS1/4SA471J		R	633		RS1/16SS121J	
R	319	(C)	RS1/16SS104J		R	634	(C)	RS1/16SS0R0J	
R	320	(C)	RS1/16SS183J		R	635		RS1/16SS102J	
R	321	(A, C)	RS1/16SS102J		R	636		RS1/16SS473J	
R	351		RS1/16SS302J		R	638	(E)	RS1/16SS104J	

1			2		3			4	
<u>Circuit Symbol and No.</u>			<u>Part No.</u>		<u>Circuit Symbol and No.</u>			<u>Part No.</u>	
	R	640	RS1/16SS682J		R	810	(E)	RS1/16SS473J	
	R	643 (A, C)	RS1/16SS102J		R	811	(E)	RS1/16SS0R0J	
A	R	644 (A, C)	RS1/16SS104J		R	812	(A, B)	RS1/16SS0R0J	
	R	646 (E)	RS1/16SS471J		R	813	(A)	RS1/16SS473J	
	R	648 (E)	RS1/16SS473J		R	814	(A)	RS1/16SS0R0J	
	R	649 (C)	RS1/16SS0R0J		R	815	(A, B)	RS1/16SS0R0J	
	R	650	RS1/16SS101J		R	825		RS1/16SS103J	
■	R	651 (A, B, C, D)	RS1/16SS102J		R	830		RS1/16SS121J	
	R	651 (E, F, G, H)	RS1/16SS1001D		R	831	(A, B)	RS1/16SS0R0J	
	R	652 (E, F, G, H)	RS1/16SS6800D		R	834		RS1/16SS473J	
	R	656	RS1/16SS822J		R	835		RS1/16SS473J	
	R	657	RS1/16SS471J		R	836	(A, B)	RS1/16SS473J	
B	R	659	RS1/16SS473J		R	837		RS1/16SS473J	
	R	660	RS1/16SS473J		R	840		RS1/16SS473J	
	R	661	RS1/16SS222J		R	841		RS1/16SS473J	
	R	665	RS1/16SS221J		R	842		RS1/16SS473J	
	R	666	RS1/16SS221J		R	843		RS1/16SS473J	
■	R	668	RS1/16SS221J		R	844		RS1/16SS473J	
	R	669	RS1/16SS104J		R	845		RS1/16SS103J	
	R	670 (E)	RS1/16SS104J		R	848	(A)	RS1/16SS473J	
	R	671 (D, F, G, H)	RS1/16SS104J		R	852		RS1/16SS104J	
	R	672 (E, F, G)	RS1/16SS104J		R	853	(A)	RS1/16SS105J	
C	R	673 (D, H)	RS1/16SS104J		R	855		RS1/16SS473J	
	R	674 (D, E, F)	RS1/16SS104J		R	861		RAB4CQ390J	
	R	675 (G, H)	RS1/16SS104J		R	862		RAB4CQ390J	
	R	676 (E, F, G)	RS1/16SS104J		R	863		RAB4CQ390J	
	R	677 (D, H)	RS1/16SS104J		R	864		RAB4CQ390J	
■	R	678 (D, E, F, G, H)	RS1/16SS104J		R	865		RAB4CQ390J	
	R	683	RS1/16SS103J		R	866		RAB4CQ390J	
	R	684	RS1/16SS221J		R	869		RS1/16SS390J	
	R	685	RS1/16SS104J		R	870		RS1/16SS101J	
	R	686	RS1/16SS103J		R	871		RS1/16SS101J	
D	R	687	RS1/16SS221J		R	882		RAB4CQ390J	
	R	688	RS1/16SS104J		R	884		RS1/16SS680J	
	R	689	RS1/16SS104J		R	885		RS1/16SS271J	
	R	690	RS1/16SS101J		R	886		RS1/16SS101J	
	R	691	RS1/16SS221J		R	887		RS1/16SS101J	
■	R	692	RS1/16SS221J		R	888		RS1/16SS101J	
	R	693	RS1/16SS221J		R	889		RS1/16SS101J	
	R	694	RS1/16SS104J		R	890		RAB4CQ390J	
	R	695	RS1/16SS471J		R	891		RS1/16SS473J	
	R	696	RS1/16SS103J		R	892		RS1/16SS473J	
E	R	698	RS1/16SS473J		R	893		RS1/16SS332J	
	R	701	RS1/16SS221J		R	894		RS1/16SS332J	
	R	703	RS1/16SS221J		R	896		RAB4CQ103J	
	R	706 (E, F, G, H)	RS1/16SS6800D		R	899		RAB4CQ103J	
	R	708	RS1/16SS473J		R	900		RS1/16SS104J	
■	R	709 (E, F, G, H)	RS1/16SS8201D		R	901		RS1/16SS104J	
	R	710 (E, F, G, H)	RS1/16SS8201D		R	902		RS1/16SS104J	
	R	711 (A, B, C, D)	RS1/16SS102J		R	903		RS1/16SS104J	
	R	711 (E, F, G, H)	RS1/16SS1001D		R	904		RS1/16SS105J	
	R	716	RS1/16SS103J		R	905		RS1/16SS102J	
F	R	717	RS1/16SS101J		R	906		RS1/16SS2202D	
	R	720	RS1/16SS0R0J		R	907		RS1/16SS5601D	
	R	800	RS1/16SS473J		R	908		RS1/16SS3301D	
	R	802	RS1/16SS183J		R	911		RS1/16SS104J	
	R	804	RS1/16SS101J		R	912		RS1/16SS104J	
	R	807 (A, B)	RS1/16SS473J		R	913		RS1/16SS1R0J	
	R	808 (A, B)	RS1/16SS0R0J		R	924		RS1/16SS390J	
	R	809 (A, B)	RS1/16SS0R0J		R	925		RS1/16SS104J	

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R	926	RS1/16SS473J		R	1402	RS1/16SS4700D	
R	929	RS1/16SS104J		R	1403	RS1/16SS4700D	
R	930	RS1/16SS390J		R	1404	RS1/16SS4700D	A
R	931	RS1/16SS390J		R	1405	RS1/16SS103J	
R	932	RS1/16SS390J		R	1406	RS1/16SS103J	
R	933	RS1/16SS2402D		R	1409	RS1/16SS103J	
R	935	RS1/16SS103J		R	1411	RS1/16SS2200D	
R	936	RS1/16SS1802D		R	1412	RS1/16SS2200D	
R	937	RS1/16SS6201D		R	1413	RS1/16SS2400F	
R	938	RS1/10SR2400D		R	1414	RS1/16SS2400F	
R	940	RAB4CQ200J		R	1501 (E)	RS1/16SS0R0J	
R	941	RAB4CQ200J		R	1502 (E)	RS1/16SS0R0J	
R	942	RAB4CQ200J		R	1503 (E)	RS1/16SS0R0J	
R	943	RAB4CQ200J		R	1507 (E)	RS1/16SS75R0D	B
R	944	RAB4CQ200J		R	1509	RS1/16SS75R0D	
R	945	RS1/16SS200J		R	1511	RS1/16SS75R0D	
R	946	RS1/16SS200J		R	1512	RS1/16SS2200D	
R	947	RS1/16SS200J		R	1514	RS1/16SS750J	
R	948	RS1/16SS200J		R	1515 (E)	RS1/16SS0R0J	
R	949	RS1/16SS200J		R	1516 (E)	RS1/16SS0R0J	
R	950	RS1/16SS200J		R	1517	RS1/16SS101J	
R	953	RS1/16SS101J		R	1518	RS1/16SS101J	
R	955	RS1/16SS680J		R	1519	RS1/16SS101J	
R	956	RS1/16SS101J		R	1520	RS1/16SS101J	
R	957	RS1/16SS101J		R	1521	RS1/16SS101J	C
R	958	RS1/16SS680J		R	1522	RS1/16SS101J	
R	959	RS1/16SS680J		R	1526	RS1/16SS0R0J	
R	960	RS1/16SS680J		R	1527 (A, B, C, D, F, G, H)	RS1/16SS0R0J	
R	961	RS1/16SS680J		R	1528 (A, B, C, D, F, G, H)	RS1/16SS0R0J	
R	962	RS1/16SS101J		R	1529	RS1/16SS0R0J	
R	963	RS1/16SS101J		R	1538	RS1/16SS470J	
R	964	RS1/16SS101J		R	1601	RS1/16SS103J	
R	1102	RS1/16SS472J		R	1602	RS1/16SS684J	
R	1109	RS1/16SS222J		R	1604	RS1/16SS100J	
R	1110	RS1/16SS103J		R	1605	RS1/16SS102J	
R	1116	RS1/10SR0R0J		R	1701	RS1/16SS0R0J	D
R	1117	RS1/16SS820J		R	1702	RS1/16SS103J	
R	1118	RS1/16SS0R0J		R	1723	RS1/16SS683J	
R	1119	RS1/16SS820J		R	1724	RS1/16SS683J	
R	1120	RS1/16SS820J		R	1725	RS1/16SS221J	
R	1122	RS1/16SS103J		R	1801 (A, C)	RS1/16SS0R0J	
R	1123	RS1/16SS103J		R	1802 (A, C)	RS1/16SS0R0J	
R	1124	RS1/16SS0R0J		R	1803 (A, C)	RS1/16SS0R0J	
R	1125	RS1/16SS0R0J		R	1804 (A)	RS1/16SS103J	
R	1132	RS1/16SS103J		R	1805 (C)	RS1/16SS221J	
R	1134	RS1/16SS104J		R	1806 (C)	RS1/16SS221J	
R	1135	RS1/16SS153J		R	1807 (C)	RS1/16SS221J	E
R	1136	RS1/16SS471J		R	1808 (C)	RS1/16SS221J	
R	1139	RS1/16SS0R0J		R	1809 (A)	RS1/16SS221J	
R	1172	RS1/16SS102J		R	1810 (A)	RS1/16SS221J	
R	1173	RS1/16SS103J		R	1811 (A)	RS1/16SS221J	
R	1174	RAB4CQ103J		R	1812 (A)	RS1/16SS221J	
R	1191	RS1/16SS472J		R	1813 (A)	RS1/16SS0R0J	
R	1192	RS1/16SS473J		R	1814 (A)	RS1/16SS0R0J	
R	1193	RS1/16SS183J		R	1815 (A)	RS1/16SS0R0J	
R	1195	RS1/16SS222J		R	1816 (A)	RS1/16SS0R0J	
R	1196	RS1/16SS222J		R	1817 (A)	RS1/16SS221J	F
R	1197	RS1/16SS220J		R	1818 (A)	RS1/16SS0R0J	
R	1198	RS1/16SS222J		R	1819 (A)	RS1/16SS0R0J	
R	1401	RS1/16SS4700D		R	1820 (A)	RS1/16SS0R0J	

1			2		3			4	
<u>Circuit Symbol and No.</u>			<u>Part No.</u>		<u>Circuit Symbol and No.</u>			<u>Part No.</u>	
	R	1821 (C)	RS1/16SS0R0J			R	4012	RS1/16SS3601D	
	R	1901	RS1/16SS0R0J			R	4013	RS1/16SS7501D	
A	R	1902	RS1/16SS121J			R	4014	RS1/16SS1601D	
	R	1903	RS1/16SS121J			R	4053 (E)	RS1/16SS101J	
	R	1904	RS1/16SS121J			R	4054 (E)	RS1/16SS471J	
	R	1918	RS1/16SS106J			R	4055 (E)	RS1/16SS471J	
	R	1919	RS1/16SS105J			R	4058 (E)	RS1/16SS473J	
■	R	1920	RS1/16SS103J			R	4059 (E)	RS1/16SS473J	
	R	1921	RS1/16SS103J			R	4060 (E)	RS1/16SS471J	
	R	1923	RS1/16SS103J			R	4121	RS1/16SS750J	
	R	1926	RS1/16SS0R0J			R	4142 (A, B)	RS1/16SS471J	
	R	1927	RS1/16SS103J			R	4143 (A, B)	RS1/16SS223J	
B	R	1928	RS1/16SS103J			R	4144 (A, B)	RS1/16SS223J	
	R	1932	RS1/16SS103J			R	4145 (A, B)	RS1/16SS181J	
	R	1933	RS1/10SR221J			R	4146 (A, B)	RS1/16SS181J	
	R	1936	RS1/16SS121J			R	4147 (A, B)	RS1/10SR822J	
	R	1939	RS1/16SS473J			R	4148 (A, B)	RS1/10SR471J	
■	R	2251 (A, B)	RS1/16SS0R0J			R	4149 (A, B)	RS1/16SS104J	
	R	2252 (A, B)	RS1/16SS0R0J			R	4151 (A, B)	RS1/16SS471J	
	R	2257 (E)	RS1/16SS0R0J			R	4172 (A, B)	RS1/16SS101J	
	R	2258	RS1/16SS103J			R	4174 (A, B)	RS1/16SS103J	
	R	2262 (E)	RS1/16SS0R0J			R	4176 (A, B)	RS1/16SS104J	
C	R	2264 (E)	RS1/16SS0R0J			R	4178 (A, B)	RS1/16SS102J	
	R	2265 (E)	RS1/16SS0R0J			R	4201	RS1/16SS0R0J	
	R	2305	RS1/16SS223J			R	4202	RS1/16SS0R0J	
	R	2306	RS1/16SS223J			R	4203	RS1/16SS102J	
	R	2308	RS1/16SS103J			R	4204	RS1/16SS222J	
■	R	2309	RS1/16SS122J			R	4205	RS1/16SS332J	
	R	2310	RS1/16SS152J			R	4206	RS1/16SS472J	
	R	2311	RS1/16SS0R0J			R	4207	RS1/16SS103J	
	R	2359	RS1/16SS223J			R	4208	RS1/16SS824J	
	R	2360	RS1/16SS223J			R	4209	RS1/16SS563J	
D	R	2408	RS1/16SS223J			R	4210	RS1/16SS0R0J	
	R	2410	RS1/16SS223J			R	4211	RS1/16SS0R0J	
	R	2414	RS1/16SS223J			R	4212	RS1/16SS472J	
	R	2417	RS1/16SS223J			R	4213	RS1/16SS102J	
	R	2420	RS1/16SS223J			R	4214	RS1/16SS102J	
■	R	2423	RS1/16SS223J			R	4215	RS1/16SS0R0J	
	R	2451	RS1/16SS103J			R	8401	RS1/16SS0R0J	
	R	2452	RS1/16SS183J			R	8404	RS1/16SS103J	
	R	2453	RS1/16SS102J			R	8406	RS1/16SS103J	
	R	2454	RS1/16SS103J			R	8407	RS1/16SS472J	
E	R	2455	RS1/16SS103J			R	8408	RS1/16SS472J	
	R	2551	RS1/16SS0R0J			R	8409	RS1/16SS101J	
	R	2552	RS1/10SR0R0J			R	8410	RS1/16SS101J	
	R	2553	RS1/10SR0R0J			R	8412	RS1/16SS391J	
	R	2554	RS1/16SS0R0J			R	8413	RS1/16SS105J	
■	R	2555	RS1/16SS0R0J			R	8414	RS1/16SS105J	
	R	2556	RS1/16SS0R0J			R	8421 (A)	RS1/16SS182J	
	R	2557	RS1/16SS0R0J			R	8422 (A)	RS1/16SS332J	
	R	2558	RS1/10SR0R0J			R	8423 (A)	RS1/16SS121J	
	R	2559	RS1/10SR0R0J			R	8424 (A)	RS1/16SS102J	
F	R	2560	RS1/10SR0R0J			R	8425 (A)	RS1/16SS182J	
	R	2561	RS1/10SR0R0J			R	8426 (A)	RS1/16SS332J	
	R	2562	RS1/10SR0R0J			R	8427 (A)	RS1/16SS121J	
	R	2563	RS1/10SR0R0J			R	8428 (A)	RS1/16SS102J	
	R	2564	RS1/16SS0R0J			R	8432	RS1/10SR0R0J	
	R	2565	RS1/16SS0R0J			R	8433	RS1/10SR0R0J	
	R	2570	RS1/16SS0R0J			R	9053	RS1/16SS0R0J	
	R	4011	RS1/16SS473J			R	9058	RS1/16SS0R0J	

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R	9208	RS1/10SR0R0J		C	410	CKSYX226M16	
<u>CAPACITORS</u>				C	413	CKSRYB473K50	
C	46	CKSRYX105K16		C	414	CKSSYB102K50	
C	48	CKSSYB102K50		C	416	CKSSYB104K10	
C	50 (C, G)	CKSYX106K35		C	419	CKSSYB104K16	
C	51	CEAT472M16		C	420	CKSSYB103K16	
C	52 (C, G)	CKSYX106K35		C	421	CKSSYB104K10	
C	53 (C, G)	CKSSYB102K50		C	422	CKSRYX105K16	
C	102	CKSRYX104K50		C	425	CKSYX226M16	
C	103	CKSSYB104K10		C	426	CKSYX226M16	
C	104	CKSRYX475K6R3		C	427	CKSSYB104K16	
C	111	CKSRYX105K25		C	428	CKSSYB102K50	
C	112	CKSSYB104K16		C	433	CKSYX106K35	
C	114	CKSRYX104K50		C	436	CKSYX106K35	
C	115	CKSQYX475K25		C	451	CKSSYB153K16	
C	140	CKSRYB474K16		C	452	CKSSYB222K50	
C	141	CKSQYX106K10		C	454	CKSSYB331K50	
C	143	CKSRYB474K16		C	455	CKSSYX105K10	
C	161	CKSQYX106K10		C	456	CKSRYX104K50	
C	162	CKSQYX106K10		C	457	CKSYX226M16	
C	190	CKSSYB104K10		C	458	CKSRYX225K10	
C	231	CKSRYX105K16		C	459	CEVW101M16	
C	232	CKSSYX105K10		C	460	CKSRYB224K16	
C	271	CKSRYX105K16		C	461	CEVW470M16	
C	272	CKSRYX105K16		C	462	CKSYX106K35	
C	302 (A, C)	CKSSYX105K10		C	465	CKSSYX105K10	
C	303 (A, C)	CKSSYX105K10		C	502	CKSQYX106K10	
C	304 (A, C)	CKSSYX105K10		C	503	CCSSCH220J50	
C	305 (A, C)	CKSSYX105K10		C	504	CKSQYX106K10	
C	306 (C)	CKSSYX105K10		C	505	CKSSYB103K16	
C	307 (C)	CKSSYX105K10		C	601 (C)	CKSSYB104K10	
C	308 (C)	CKSSYB104K10		C	602	CCSSCH100D50	
C	309	CKSSYX105K10		C	603	CCSSCH120J50	
C	310	CKSSYX105K10		C	604	CKSSYX105K10	
C	312 (A, C)	CKSSYB104K10		C	605	CKSSYB104K10	
C	313 (C)	CKSSYB104K16		C	606	CKSRYX105K16	
C	314 (C)	CKSRYX104K50		C	607	CKSSYB104K10	
C	315	CKSSYB104K10		C	608	CKSSYB104K10	
C	316 (A, C)	CKSSYB104K10		C	609	CKSSYB104K10	
C	317 (C)	CKSSYB104K10		C	610	CKSSYB104K10	
C	318	CKSSYB102K50		C	611	CKSSYX105K10	
C	347	CKSQYX106K10		C	615	CKSSYB104K10	
C	352	CKSSYB103K16		C	616	CKSSYX105K10	
C	353	CKSQYX106K10		C	620	CKSSYB104K10	
C	356	CKSSYB473K16		C	621	CKSSYB103K16	
C	357	CKSSYB103K16		C	622	CCSSCH102J50	
C	358	CKSYX106K35		C	623	CKSSYB104K10	
C	359	CKSSYB103K50		C	624	CKSSYX105K10	
C	362 47 uF	CCG1256		C	625	CKSSYB104K10	
C	401	CKSSYB102K50		C	626	CKSSYB104K10	
C	402	CKSSYB223K16		C	627	CKSQYX226M6R3	
C	403	CCSSCH8R0D50		C	630	CKSSYB104K10	
C	404	CCSSCH8R0D50		C	632	CCSSCH471J50	
C	405	CKSSYB223K16		C	635	CKSQYX106K10	
C	406	CKSSYB152K50		C	801	CKSQYX476M6R3	
C	407	CKSSYB102K50		C	802	CKSQYX106K10	
C	408	CKSSYB104K16		C	803	CKSSYB104K10	
C	409	CKSYX226M16		C	807	CKSQYX106K10	
				C	810		
				C	811	CKSSYB104K10	

1		2		3		4	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
A	C 817	CKSSYB104K10		C 1302		CKSSYB104K10	
	C 818	CKSSYX105K10		C 1321		CKSSYB104K10	
	C 840	CCSSCH120J50		C 1342		CKSSYB104K10	
	C 841	CCSSCH100D50		C 1352		CKSRYX225K10	
	C 860	CKSSYX105K10		C 1353		CKSQYX106K10	
	C 901	CKSSYB104K10		C 1401		CKSRYX106M6R3	
	C 902	CKSSYB104K10		C 1402		CKSRYX106M6R3	
	C 903	CKSSYB104K10		C 1403		CKSRYX106M6R3	
	C 904	CKSSYB104K10		C 1404		CKSRYX106M6R3	
	C 905	CKSSYB104K10		C 1405		CKSSYB104K10	
	C 906	CKSSYB104K10		C 1406		CKSSYB104K10	
	C 907	CKSSYB104K10		C 1407		CKSSYB104K10	
	C 908	CKSSYB104K10		C 1408		CKSSYB104K10	
	C 909	CKSSYB104K10		C 1409		CKSSYB104K10	
B	C 910	CKSSYB104K10		C 1410		CKSSYB104K10	
	C 911	CKSSYB104K10		C 1411		CKSSYB104K10	
	C 912	CKSSYB104K10		C 1412		CKSSYB104K10	
	C 913	CKSSYB104K10		C 1413		CKSSYB104K10	
	C 914	CKSSYB104K10		C 1414		CKSSYB104K10	
	C 915	CKSSYB104K10		C 1415		CKSSYB104K10	
	C 916	CKSSYB104K10		C 1416		CKSSYB104K10	
	C 917	CKSSYB104K10		C 1417		CKSSYB104K10	
	C 918	CKSSYB104K10		C 1418		CKSSYB104K10	
	C 919	CKSSYB104K10		C 1419		CKSSYB104K10	
C	C 920	CKSSYB104K10		C 1420		CKSSYB104K10	
	C 921	CKSSYB104K10		C 1421		CKSSYB104K10	
	C 922	CKSSYB104K10		C 1422		CKSSYB104K10	
	C 923	CKSSYB104K10		C 1423		CKSSYB104K10	
	C 924	CKSSYB104K10		C 1424		CKSSYB104K10	
	C 925	CKSSYB104K10		C 1425		CKSSYB104K10	
	C 926	CKSSYB104K10		C 1426		CKSSYB104K10	
	C 927	CKSSYB104K10		C 1427		CKSSYB104K10	
	C 928	CKSSYB104K10		C 1428		CKSSYB104K10	
	C 929	CKSSYB104K10		C 1431		CKSSYB104K10	
D	C 930	CKSSYB104K10		C 1501		CKSSYX105K10	
	C 931	CCSSCH100D50		C 1502		CKSSYX105K10	
	C 932	CKSSYB104K10		C 1503		CKSSYX105K10	
	C 933	CKSSYX105K10		C 1504		CKSSYX105K10	
	C 940	CKSSYX105K10		C 1506 (E)		CKSSYB104K10	
	C 941	CKSSYB103K16		C 1507		CKSSYB104K10	
	C 942	CKSSYB102K50		C 1508		CKSSYB104K10	
	C 943	CKSSYB104K10		C 1510		CKSSYB104K10	
	C 944	CKSSYB104K10		C 1512		CKSSYB104K10	
	C 945	CKSSYB104K10		C 1516		CKSSYB104K10	
E	C 946	CKSSYB104K10		C 1517		CKSSYB104K10	
	C 947	CKSSYB104K10		C 1518 (E)		CKSSYX105K10	
	C 948	CKSSYB104K10		C 1519		CKSSYB104K10	
	C 949	CKSSYB104K10		C 1520 (E)		CKSSYX105K10	
	C 1102	CKSSYX105K10		C 1521		CKSSYB104K10	
	C 1104	CKSSYX474K6R3		C 1522 (E)		CKSSYX105K10	
	C 1105	CKSQYX106K10		C 1523		CKSSYB104K10	
	C 1106	CKSQYX106K10		C 1524		CKSQYX106K10	
	C 1107	CKSSYB104K10		C 1525		CKSSYB104K10	
	C 1108	CKSSYB104K10		C 1529		CKSQYX106K10	
F	C 1109	CKSRYX225K10		C 1530		CKSQYX106K10	
	C 1131	CKSQYX106K10		C 1531 (E)		CKSSYB104K10	
	C 1148	CKSSYB104K10		C 1532		CCSSCH181J50	
	C 1191	CKSSYB104K10		C 1601		CKSRYX105K25	
	C 1192	CKSSYB104K10		C 1602		CKSRYX105K25	
	C 1193	CKSSYB103K16		C 1603		CKSRYX105K25	

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
C 1604	CKSRYX105K25	C 2410	CKSQYX475K10	A
C 1605	CKSRYX105K25	C 2411	CKSQYX475K10	
C 1606	CKSRYX105K25	C 2412	CKSQYX475K10	
C 1607	CKSRYX105K25	C 2414	CKSRYX225K16	
C 1608	CKSRYX105K25	C 2415	CKSSYB102K50	
C 1609	CKSRYX105K25	C 2416	CKSSYB102K50	
C 1610	CKSRYX105K25	C 2451	CKSQYX106K10	
C 1612	CKSRYX105K25	C 2452	CKSSYB104K10	
C 1613	CKSRYX105K25	C 4011	CKSQYB334K50	
C 1721	CKSSYB104K10	C 4014	CEVW220M16	
C 1722	CKSQYX475K10	C 4081	CKSSYB102K50	
C 1801 (C)	CKSSYB104K10	C 4082	CKSSYB102K50	
C 1803 (A, C)	CKSQYX106K10	C 4101	CKSSYB102K50	B
C 1804 (A, C)	CKSSYB104K10	C 4102	CKSSYB102K50	
C 1805 (A, C)	CKSQYX106K10	C 4121	CKSSYB221K50	
C 1806 (A, C)	CKSSYB104K10	C 4122	CKSSYB102K50	
C 1808 (A, C)	CKSSYB104K10	C 4135 (A, B)	CKSSYB104K10	
C 1809 (C)	CCSSCH101J50	C 4136 (A, B)	CKSSYB104K10	
C 1810 (C)	CCSSCH101J50	C 4137 (A, B)	CKSRYX104K50	
C 1811 (C)	CCSSCH101J50	C 4172 (A, B)	CKSSYB104K10	
C 1812 (C)	CCSSCH101J50	C 4174 (A, B)	CKSSYB104K10	
C 1901	CCSSCH100D50	C 4202	CKSRYX106M6R3	
C 1902	CCSSCH120J50	C 4203	CKSSYB104K10	
C 1903	CKSSYB104K10	C 4204	CKSSYX105K10	C
C 1904	CKSRYX106M6R3	C 4205	CKSSYB104K10	
C 1905	CKSRYX106M6R3	C 4206	CCSSCH101J50	
C 1906	CKSSYB104K10	C 4207	CKSRYB224K16	
C 1907	CKSSYB104K10	C 4208	CKSSYX105K10	
C 1910	CKSQYX106K10	C 4209	CCSSCH6R0D50	
C 1912	CKSQYX106K10	C 4210	CCSSCH220J50	
C 1913	CKSSYX105K6R3	C 4211	CKSSYB104K10	
C 1914	CKSQYX476M6R3	C 4212	CKSQYX226M6R3	
C 1915	CKSQYX476M6R3	C 4214	CCSSCH6R0D50	
C 2202	CKSQYX106K10	C 4215	CKSSYB102K50	
C 2203	CEVW101M16	C 8401	CKSSYB104K16	D
C 2303	CKSSYB102K50	C 8402	CKSSYB104K16	
C 2304	CKSSYB471K50	C 8403	CKSQYX106K10	
C 2305	CKSRYX225K10	C 8404	CKSQYX106K10	
C 2306	CKSSYB102K50	C 8405	CKSSYB104K16	
C 2307	CKSSYB102K50	C 8406	CKSRYX106M6R3	
C 2308	CCSSCH101J50	C 8407	CKSSYB224K6R3	
C 2351	CKSSYB472K50	C 8408	CKSSYB102K50	
C 2352	CKSRYX105K16	C 8409	CKSSYB104K16	
C 2353	CKSRYX104K50	C 8410	CKSRYX106M6R3	
C 2354	CKSSYB103K25	C 8411	CCSSCH220J50	
C 2355	CKSRYX225K10	C 8412	CCSSCH331J50	
C 2357	CKSSYB102K50	C 8415	CKSSYB104K16	E
C 2358	CCSSCH101J50	C 8416	CKSRYX106M6R3	
C 2359	CKSSYB102K50	C 8418	CCSSCH102J50	
C 2360	CKSSYB102K50	C 8419	CCSSCH471J50	
C 2361	CKSSYB102K50	C 8423	CKSSYB152K50	
C 2401	CKSSYB102K50	C 8427	CCSSCH100D50	
C 2402	CKSSYB102K50	C 9002 (A, B)	CKSRYX105K16	
C 2403	CKSSYB102K50	C 9003 (A, B)	CKSRYX105K16	
C 2404	CKSSYB102K50	C 9004	CKSRYX105K16	F
C 2405	CKSSYB102K50	C 9005	CKSRYX105K16	
C 2406	CKSSYB102K50	C 9006	CKSSYX105K10	
C 2407	CKSQYX475K10	C 9007	CKSSYX105K10	
C 2408	CKSQYX475K10	C 9010	CKSRYX105K16	
C 2409	CKSQYX475K10	C 9011	CKSRYX105K16	

	1			2			3			4	
	<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>	
A	C	9015		CKSSYX105K10		IC	5402	Interface IC		TC90207FG	
	C	9016		CKSRYX105K16							
	C	9017		CKSRYX105K16		IC	5501	IC		ATMXT449TD-AT	
	C	9018	(A, B)	CKSRYX105K16		Q	5001	Bipolar TR		HN1C01FUS1	
						Q	5002	Bipolar TR		LSCR523UB	
	C	9019	(A, B)	CKSRYX105K16		Q	5201	Resistor Built-IN TR		LTC024EEB	
	C	9020		CKSSYB104K16		Q	5202	Transistor		2SAR502UB	
	C	9021	100 uF/16 V	CCH1962							
	C	9022		CKSSYB104K16		Q	5301	Bipolar TR		LSAR523UB	
	C	9023		CEVW470M16		Q	5302	Bipolar TR		LSCR523UB	
	C	9024		CEVW470M16		D	5101	Schottky Diode		RB162MM-40TF	
	C	9025		CKSSYB104K10		D	5201	Schottky Diode		RB551VM-30	
	C	9026	10 uF	CCG1332		D	5202	Diode		RB548W	
	C	9027		CKSSYB104K10							
	C	9029		CEVW470M16		D	5204	Diode		RB548W	
B						L	5101	Inductor		BTH1112	
	C	9032		CKSSYB104K16		L	5102	SMD Ferrite Beads (C)		CTF1869	
	C	9033		CKSSYB104K16		L	5201	SMD SPL Inductor		CTH1650	
	C	9034		CKSSYB472K50		L	5202	Chip Beads (C)		VTL1128	
	C	9035		CKSSYB103K16							
	C	9036		CKSSYB103K16		L	5301	Inductor		CTF1765	
						L	5302	Ferrite Bead		CTF1528	
	C	9039		CCSSCH151J50		L	5303	Chip Beads		VTL1126	
	C	9040		CCSSCH151J50		L	5401	Inductor		CTF1740	
	C	9043		CKSRYB102K50		L	5402	Inductor		CTF1740	
	C	9044		CKSRYB102K50		L	5403	Inductor		CTF1740	
	C	9201	0.68 uF	CCE1064		L	5404	Inductor		CTF1740	
						L	5405	Inductor		CTF1740	
	C	9202		CKSRYB684K10		L	5406	Inductor		CTF1740	
	C	9203		CKSRYB684K10		L	5407	Inductor		CTF1740	
C	C	9204	0.68 uF	CCE1064							
	C	9206	10 uF/25 V	CCH2108		L	5408	Inductor		CTF1740	
	C	9207	0.47 uF	CCG1328		L	5409	Inductor		CTF1740	
						L	5410	Inductor		CTF1740	
	C	9208	2.2 uF	CCG1322		L	5411	Inductor		CTF1740	
	C	9209	4700 uF/16 V	CCH2085		L	5412	Chip Beads		VTL1126	
	C	9210	0.1 uF	CCG1425							
	C	9212		CKSRYX104K50		L	5413	Inductor		CTF1740	
	C	9213		CKSSYB102K50		L	5414	Inductor		CTF1740	
						L	5415	Inductor		CTF1740	
D	C	9214		CKSSYB102K50		L	5416	Inductor		CTF1740	
	C	9215		CKSSYB102K50		L	5417	Inductor		CTF1740	
	C	9216		CKSSYB102K50							
	C	9217		CKSSYB102K50		L	5418	Inductor		CTF1740	
	C	9218		CKSSYB102K50		L	5419	Inductor		CTF1740	
						L	5420	Inductor		CTF1740	
	C	9219		CKSSYB102K50		L	5421	Inductor		CTF1740	
	C	9220		CKSSYB102K50		L	5422	Inductor		CTF1740	
	C	9223		CKSRYX105K16							
	C	9224		CKSRYX105K16		L	5423	Inductor		CTF1740	
	C	9225		CKSRYX105K16		L	5424	Inductor		CTF1740	
						L	5425	Inductor		CTF1740	
	C	9226		CKSRYX105K16		L	5426	Inductor		CTF1740	
	C	9228	0.1 uF	CCG1321		L	5427	SMD Ferrite Beads		CTF1869	
	C	9229		CCSRCH101J50							
E						TH	5001	Thermistor		CCX1084	
						CN	5001	Connector (2P)		DKN1361	
						CN	5002	FFC/FPC Connector		CKS6645	
						CN	5003	FFC/FPC Connector		CKS6648	
						CN	5301	FFC/FPC Connector		CKS6646	
						CN	5501	FFC/FPC Connector		CKS6644	

B

Unit Number : CXY4838 (A, B, D, E, F, G, H)

Unit Number : CXY4839 (C)

Unit Name : Service Unit (Monitor)

MISCELLANEOUS

F	IC	5101	Display IC	OZ527ILN
	IC	5201	DC/DC CONV IC	R1294L103A
	IC	5301	Logic IC	TC7SH08FUS2
	IC	5401	Regulator IC	MM3411A15N

RESISTORS

R	5001	RS1/16SS680J
R	5002	RS1/16SS121J
R	5004	RS1/16SS680J
R	5005	RS1/16SS680J
R	5007	RS1/16SS680J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R	5008		RS1/16SS680J	R	5408		RS1/16SS101J
R	5010		RS1/16SS332J	R	5409		RS1/16SS101J
R	5011		RS1/16SS272J	R	5410		RS1/16SS101J
R	5012		RS1/16SS332J	R	5411		RS1/16SS101J
R	5013		RS1/16SS183J	R	5412		RS1/16SS101J
R	5101		RS1/16SS104J	R	5413		RS1/16SS330J
R	5102		RS1/8SQ2R2J	R	5414		RS1/16SS101J
R	5103	(A, B, D, E, F, G, H)	RS1/4S0R0J	R	5415		RS1/16SS101J
R	5105		RS1/16SS104J	R	5416		RS1/16SS101J
R	5106		RS1/16SS104J	R	5417		RS1/16SS101J
R	5107		RS1/16SS102J	R	5418		RS1/16SS101J
R	5109		RS1/16SS563J	R	5419		RS1/16SS101J
R	5110		RS1/16SS104J	R	5420		RS1/16SS101J
R	5111		RS1/16SS101J	R	5421		RS1/16SS101J
R	5112		RS1/16SS102J	R	5422		RS1/16SS101J
R	5113		RS1/16SS3302D	R	5423		RS1/16SS101J
R	5114		RS1/16SS5601D	R	5424		RS1/16SS1000D
R	5115		RS1/16SS683J	R	5425		RS1/16SS1000D
R	5117		RS1/16SS682J	R	5426		RS1/16SS1000D
R	5201		RS1/16SS1002D	R	5427		RS1/16SS1000D
R	5202		RS1/16SS1002D	R	5428		RS1/16SS1000D
R	5203		RS1/16SS8201D	R	5429		RS1/16SS101J
R	5206		RS1/16SS9102D	R	5430		RS1/16SS101J
R	5207		RS1/16SS1802D	R	5431		RS1/16SS101J
R	5208		RS1/16SS203J	R	5432		RS1/16SS101J
R	5209		RS1/16SS104J	R	5433		RS1/16SS101J
R	5210		RS1/16SS103J	R	5434		RS1/16SS103J
R	5211		RS1/16SS332J	R	5435		RS1/16SS103J
R	5212		RS1/16SS1003D	R	5436		RS1/16SS103J
R	5213		RS1/16SS9101D	R	5437		RS1/16SS103J
R	5214		RS1/8SQ2R2J	R	5438		RS1/16SS103J
R	5216		RS1/16SS8202D	R	5439		RS1/16SS103J
R	5217		RS1/16SS6202D	R	5440		RS1/16SS221J
R	5218		RS1/16SS1502D	R	5534		RS1/16SS104J
R	5219		RS1/16SS472J	R	5535		RS1/16SS104J
R	5220		RS1/16SS103J	R	5536		RS1/16SS104J
R	5221		RS1/16SS272J	R	5540		RS1/16SS121J
R	5222	(A, B, D, E, F, G, H)	RS1/16SS0R0J	R	5541		RS1/16SS121J
R	5224		RS1/16SS473J	R	5551		RS1/16SS104J
R	5225		RS1/16SS272J				
<u>CAPACITORS</u>							
R	5226		RS1/16SS0R0J				
R	5327		RS1/16SS153J	C	5001		CKSSYB104K10
R	5329		RS1/16SS105J	C	5004		CKSSYB104K10
R	5331		RS1/16SS103J	C	5005		CKSSYB104K10
R	5332		RS1/16SS472J	C	5101		CKSSYB332K50
				C	5103		CKSQYX106K16
R	5333		RS1/16SS101J				
R	5334		RS1/16SS123J	C	5106		CKSSYX105K16
R	5335		RS1/16SS183J	C	5107		CKSSYX105K16
R	5336		RS1/16SS472J	C	5108		CKSSYB104K16
R	5337		RS1/16SS473J	C	5109		CKSSYX105K10
				C	5110		CCSSCH101J50
R	5338		RS1/16SS473J				
R	5339		RS1/16SS473J	C	5111	(C)	CCSSCH471J50
R	5340		RS1/16SS473J	C	5112		CKSYX106K35
R	5341		RS1/16SS473J	C	5114		CKSRYB224K16
R	5343		RS1/16SS121J	C	5117	(C)	CCSSCH471J50
				C	5201		CKSSYB224K6R3
R	5403		RS1/16SS101J				
R	5404		RS1/16SS101J	C	5203		CKSSYX105K10
R	5405		RS1/16SS101J	C	5204		CKSSYB224K6R3
R	5406		RS1/16SS101J	C	5205		CKSRYB224K16
R	5407		RS1/16SS101J				

Circuit Symbol and No.

C 5206
C 5207 (A, B, D, E, F, G, H)

A C 5207 (C)
C 5208
C 5209
C 5210
C 5213

C 5214
C 5217
C 5218
C 5219
C 5220

B C 5221
C 5222
C 5224
C 5301
C 5302

C 5303
C 5309
C 5310 (C)
C 5311
C 5312

C 5313 (C)
C 5314
C 5315
C 5317
C 5318

C 5319
C 5321
C 5322
C 5323
C 5326

C 5327
C 5329
C 5330
D C 5331
C 5333

C 5404
C 5408
C 5412
C 5413
C 5414

C 5415
C 5416
C 5417
C 5418
E C 5420

C 5421
C 5422
C 5423
C 5424
C 5425

C 5426
C 5427
C 5428
C 5429
F C 5430

C 5431
C 5432
C 5433

Part No.

CKSSYB682K25
CKSSYB102K50

CKSSYB104K10
CKSSYX105K16
CKSSYX105K10
CKSRYX105K25
CKSRYX104K50

CKSRYX104K50
CKSQYX475K25
CKSSYB682K25
CKSRYX475K6R3
CCSSCH101J50

CKSSYB561K50
CKSQYX475K25
CKSSYB102K50
CKSSYB102K50
CKSSYB102K50

CKSSYB102K50
CKSSYB104K16
CKSYX106K35
CKSYX106K35
CKSSYB102K50

CKSYX106K35
CKSSYB104K10
CKSQYX106K10
CKSSYB102K50
CKSRYX104K50

CKSQYB334K50
CKSSYB102K50
CKSSYB104K16
CKSQYX475K25
CKSSYB104K10

CKSYX106K35
CKSSYB102K50
CKSSYB102K50
CKSSYX105K10
CKSSYB104K10

CKSSYB103K16
CKSSYB103K16
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYX105K10

CKSSYX105K10
CCSSCH820J50
CKSSYB103K16
CKSSYB103K16
CKSSYB104K10

CKSSYB103K16
CKSSYB103K16
CKSRYX106M6R3
CKSSYB103K16
CKSSYB103K16

CKSQYX225K16
CKSSYB104K10
CKSSYB103K16

Circuit Symbol and No.

C 5434
C 5435

C 5436
C 5437
C 5438
C 5439
C 5501

C 5502
C 5503
C 5504
C 5505
C 5506

C 5507
C 5508
C 5509
C 5510
C 5511

C 5512
C 5513

D

Unit Number : CXY4840

Unit Name : Service Unit (Keyboard)

MISCELLANEOUS

D 2001	LED	NSSM124-6717
U 2001	Remote Receiver Unit	RS-470
CN 2001	FFC/FPC Connector	CKS6648

RESISTORS

R 2001	RS1/16SS470J
--------	--------------

CAPACITORS

C 2001	CKSSYB104K16
C 2005	CKSSYB104K10

E

Unit Number : CXY4842 (A, B)

Unit Name : Service Unit (I-Data)

MISCELLANEOUS

CN 3201	Connector (A, B)	CKS6603
CN 3202	FFC/FPC Connector (A, B)	CKS6634

RESISTORS

R 3202 (A, B)	RS1/16SS102J
---------------	--------------