

2. EXPLODED VIEWS AND PARTS LIST

NOTES: ● Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

● The  mark found on some component parts indicates the importance of the safety factor of the part.


Therefore, when replacing, be sure to use parts of identical designation.

● Screws adjacent to ▼ mark on product are used for disassembly.

● For the applying amount of lubricants or glue, follow the instructions in this manual.

(In the case of no amount instructions, apply as you think it appropriate.)

2.1 PACKING

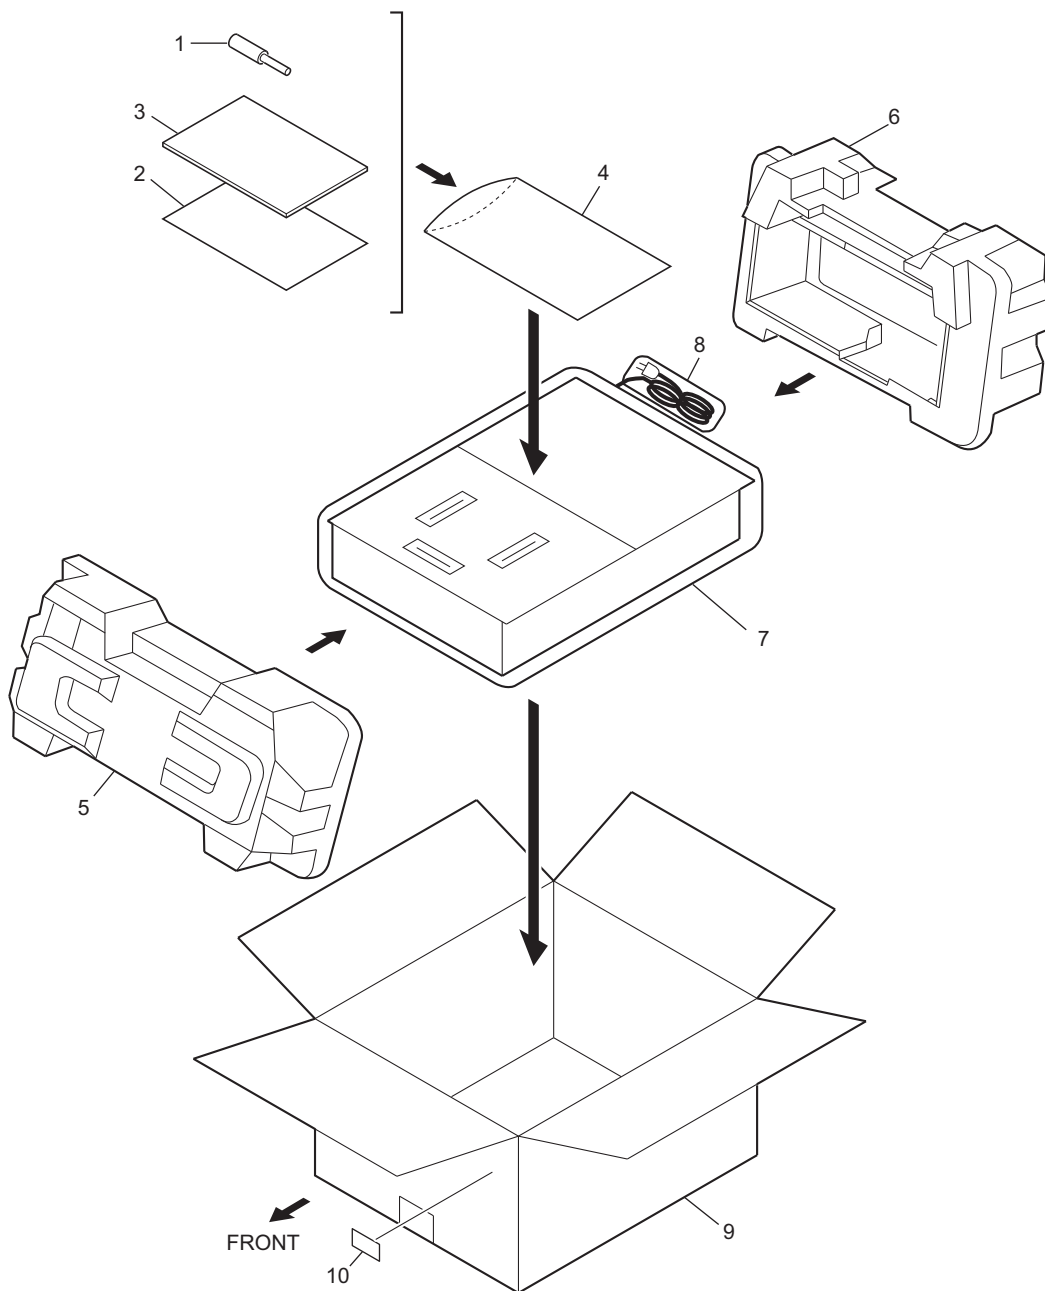

PACKING parts List

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Hexagon Screwdriver	DEX1018	6	Pad (B)	DHA1587
NSP 2	Warranty Card	See Contrast table(2)	7	Sheet	RHX1006
3	Operating Instructions	See Contrast table(2)	8	Polyethylene Bag	VHL1051
4	Polyethylene Bag (0.03 x 230 x 340)	Z21-038	9	Packing Case	See Contrast table(2)
			NSP 10	Label	VRW1629
5	Pad (A)	DHA1586			

(2) CONTRAST TABLE

DJM-909/ KUCXJ, DJM-909/ WYXJ and DJM-909/ TLTXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-909 KUCXJ	DJM-909 WYXJ	DJM-909 TLTXJ
NSP	2	Warranty Card	ARY7043	Not used	Not used
	3	Operating Instructions (English)	DRB1349	Not used	Not used
	3	Operating Instructions (English/ French/ German/ Italian/ Dutch/ Spanish)	Not used	DRB1350	Not used
	3	Operating Instructions (English/ Spanish/ Chinese)	Not used	Not used	DRB1351
	9	Packing Case	DHG2441	DHG2440	DHG2442


2.2 EXTERIOR SECTION

A

Refer to "2.3 CONTROL PANEL (LOWER) SECTION".

Refer to "2.4 CONTROL PANEL (UPPER) SECTION".

B




C

D

E

F

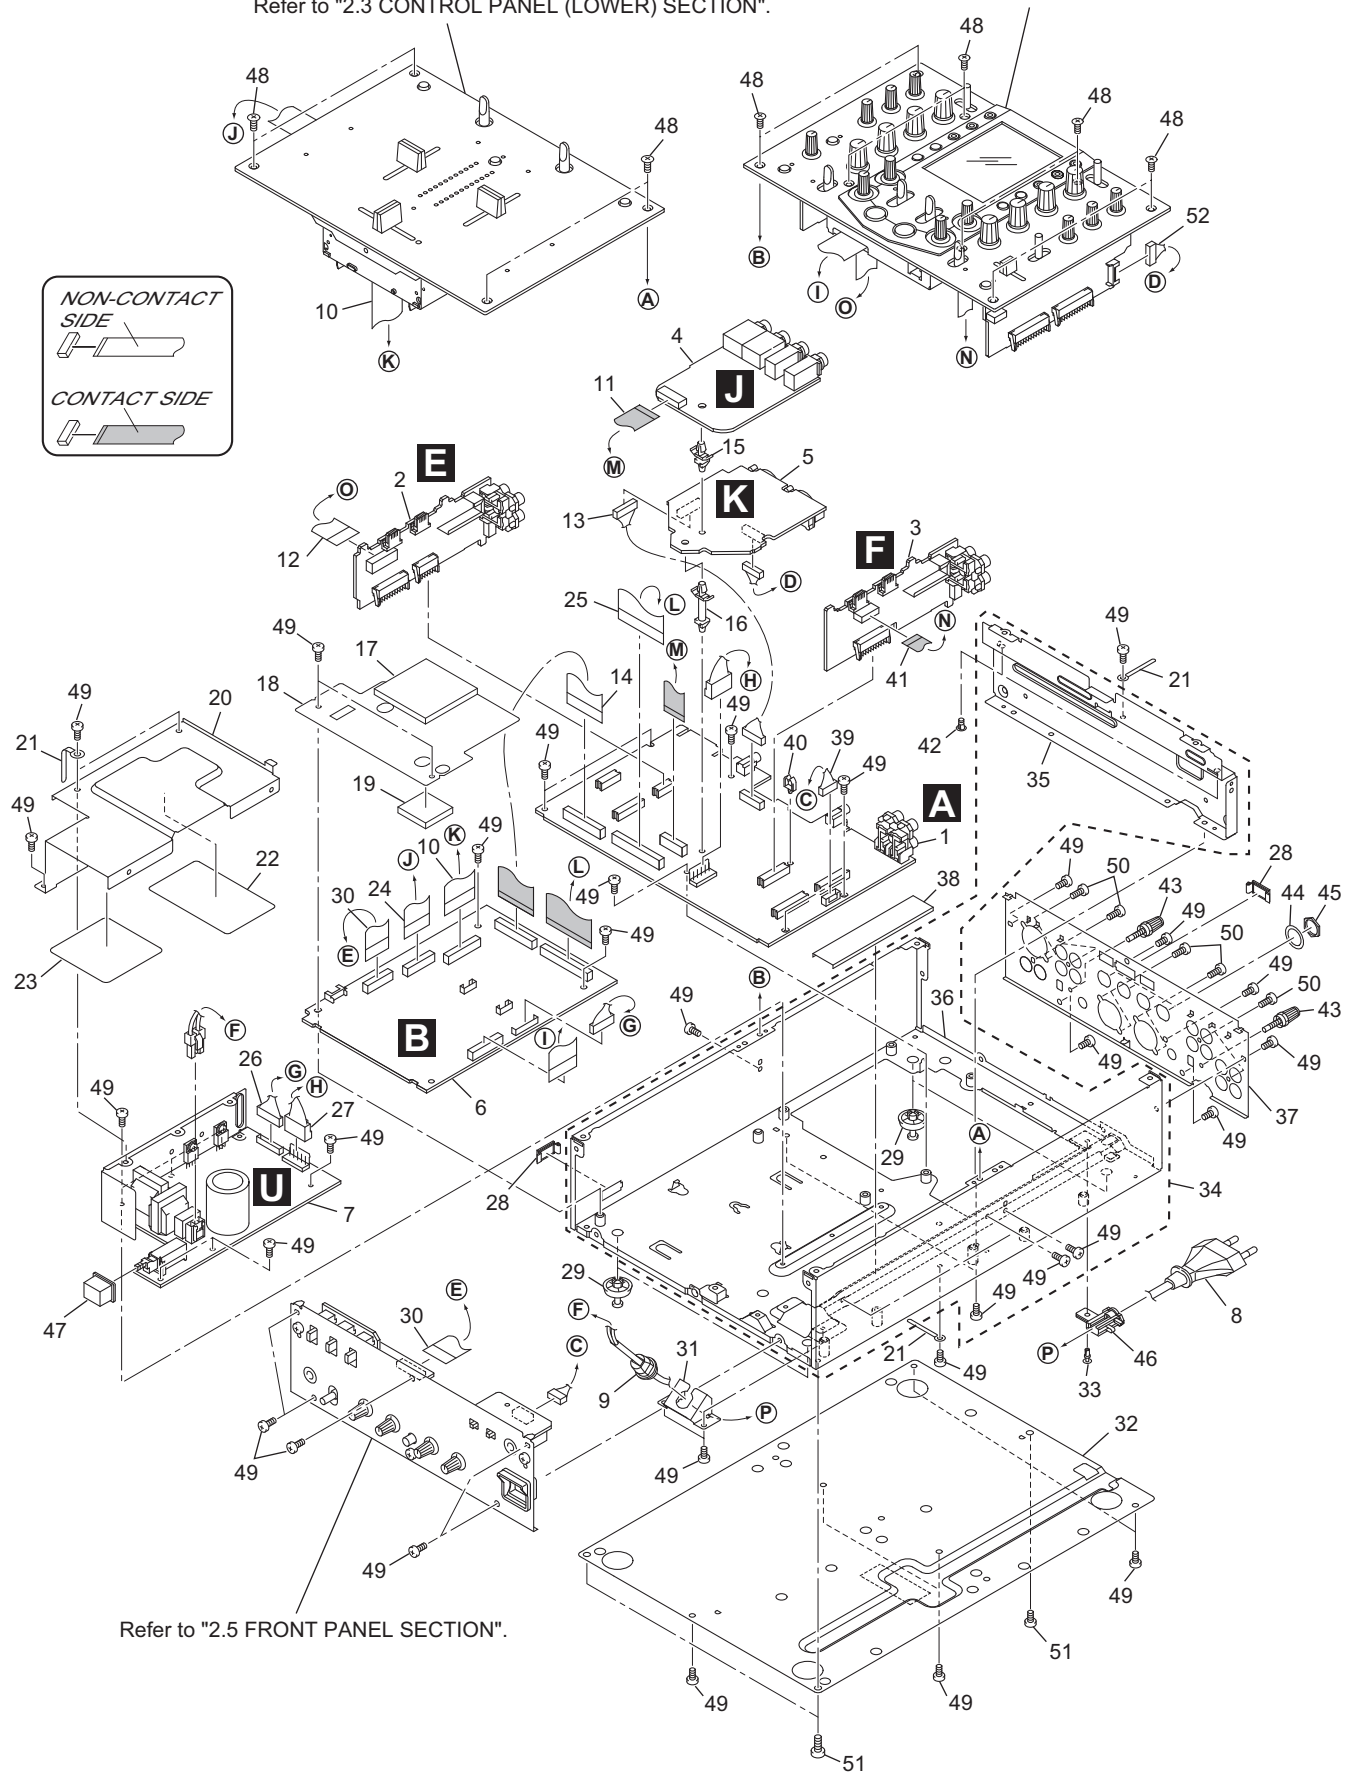

EXTERIOR SECTION Parts List


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	MAIN Assy	DWX2337	28	Blind Cap	DNK4218
2	C1BF Assy	DWS1328	29	Foot	REC-434
3	C2BF Assy	DWS1329	30	Flexible Cable (17P)	DDD1246
4	SDRT Assy	DWX2321			
5	XLR Assy	DWX2322	31	Cord Stopper Stay	DNH2576
6	DSP Assy	DWX2316	NSP 32	Bottom Plate	DNH2570
 7	SW POWER SUPPLY	DWR1377	33	Rivet	RBM-003
 8	AC Power Cord	See Contrast table(2)	NSP 34	Chassis (9) Assy	DXB1815
 9	Strain Relief	See Contrast table(2)	NSP 35	Partition Plate	DNH2573
10	Flexible Cable (23P)	DDD1239	NSP 36	Chassis (9)	DNA1296
			NSP 37	Rear Panel	See Contrast table(2)
11	Flexible Cable (15P)	DDD1243	38	Shield Sheet A	DEC2569
12	Flexible Cable (17P)	DDD1234	39	Connector Assy (6P)	DKP3661
13	Connector Assy (9P)	DKP3662	40	Mini Clamp	DEC2588
14	Flexible Cable (27P)	DDD1242			
15	Locking Card Spacer	PNW2917	41	Flexible Cable (11P)	DDD1245
			42	Card Spacer	DNK2769
NSP 16	PC Support	VEC1584	43	Terminal Screw	AKE-031
17	Spacer B	DEC2622	44	Washer	DBE1010
18	Shield Sheet G	DEC2610	45	Nut	NKX2FUC
19	Spacer A	DEC2617			
NSP 20	Shield Case	DNH2572	46	Cord Cover	DNK4197
			47	Power Knob	DAC2133
NSP 21	Cord Stopper	ZCB-069Z	48	Screw	CMZ30P100FZK
22	Shield Sheet B	DEC2570	49	Screw	BBZ30P060FZK
23	Shield Sheet C	DEC2584	50	Screw	BPZ30P080FMC
24	Flexible Cable (19P)	DDD1238			
25	Flexible Cable (35P)	DDD1241	51	Screw	BBZ40P120FMC
			52	Connector Assy (8P)	DKP3660
26	Connector Assy	PF08EE-D15			
27	Connector Assy	DKP3659			

(2) CONTRAST TABLE

DJM-909/ KUCXJ, DJM-909/ WYXJ and DJM-909/ TLTXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-909 KUCXJ	DJM-909 WYXJ	DJM-909 TLTXJ
	8	AC Power Cord	VDG1075	VDG1077	VDG1077
	9	Strain Relief	CM-22C	CM-22B	CM-22B
NSP	37	Rear Panel	DNC1656	DNC1655	DNC1657

2.3 CONTROL PANEL (LOWER) SECTION

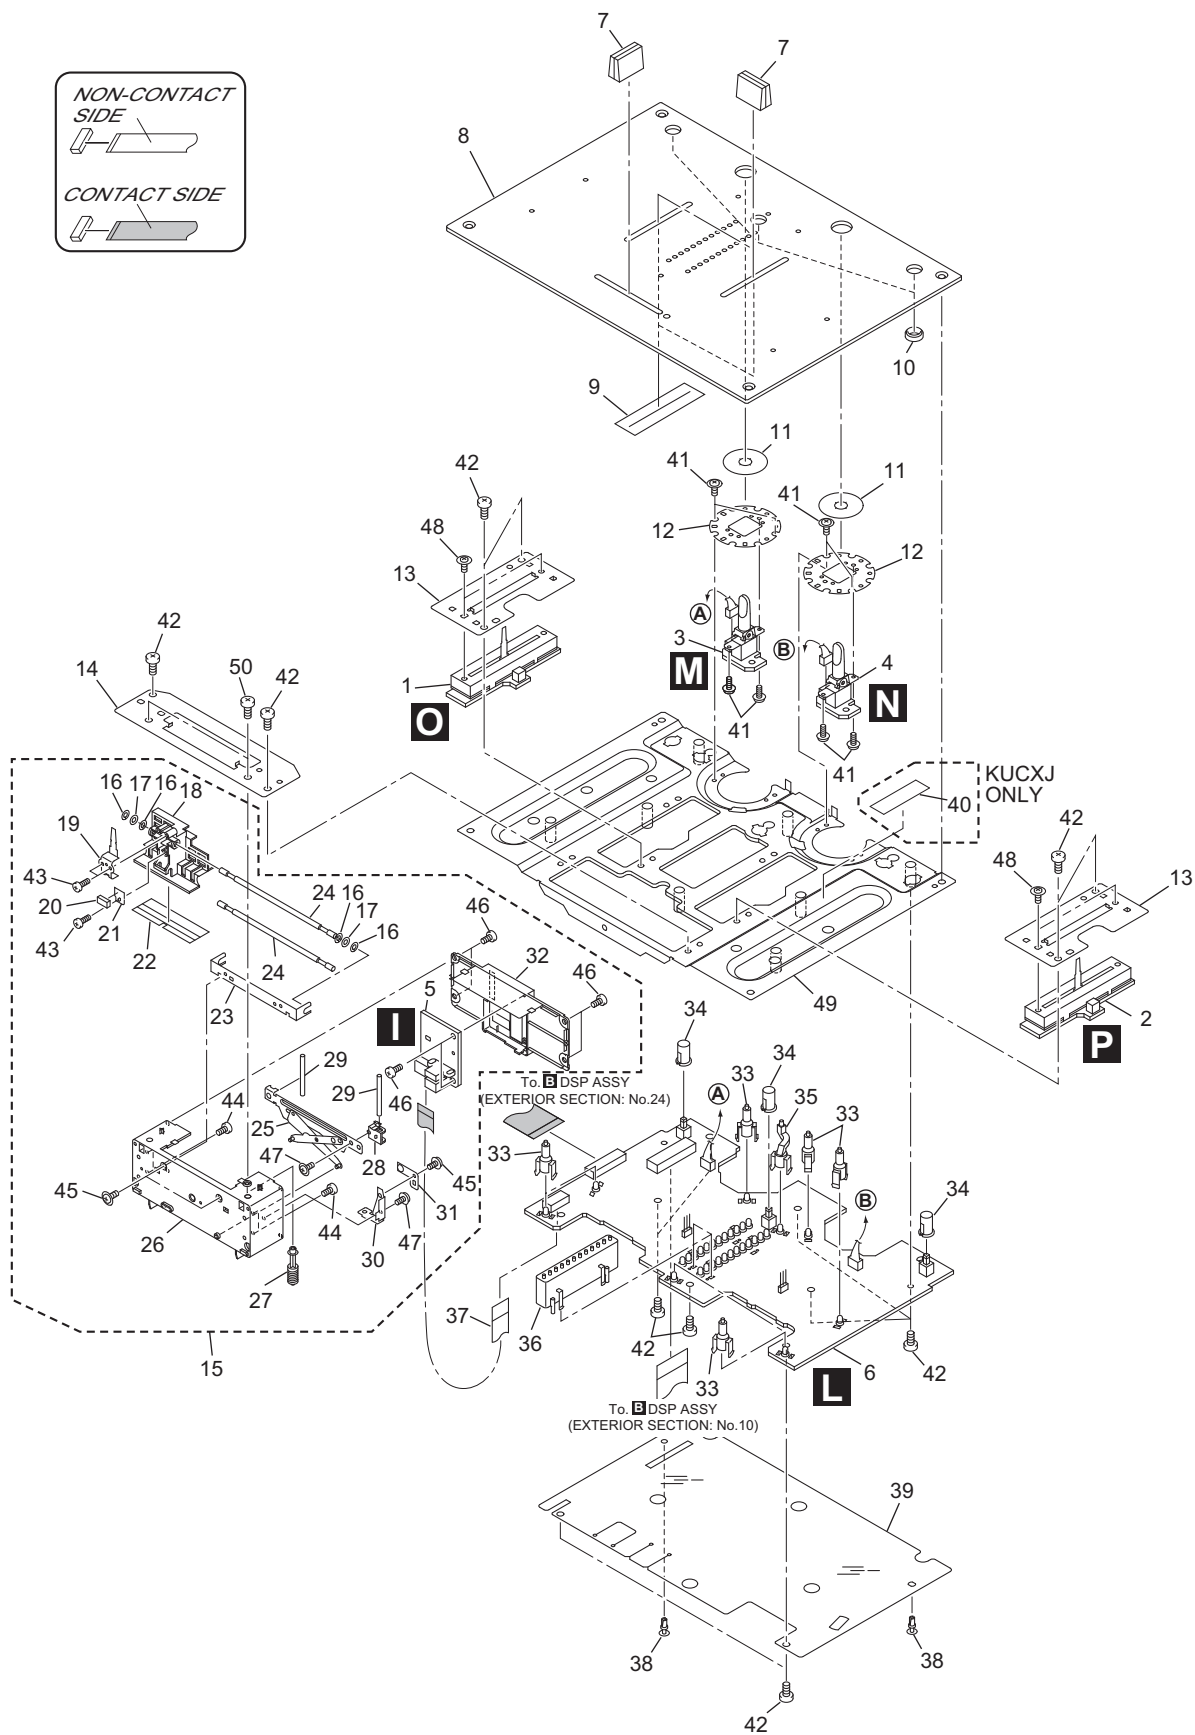

CONTROL PANEL (LOWER) SECTION Parts List

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	FVA1 Assy	DWX2323	26	Case A	DNK4193
2	FVA2 Assy	DWX2324	27	Worm gear S	DNK4195
3	C1TR Assy	DWS1334	28	Rack gear S	DNK4196
4	C2TR Assy	DWS1335	29	MG Shaft	DLA1947
5	FDVR Assy	DWX2320	30	WG Holder	DNF1681
6	LVMR Assy	DWS1330	31	WG Spring	DBK1245
7	Slider Knob (L)	DNK4210	32	Case B	DNK4194
8	Control Panel (D9)	DNB1121	33	LED Lens (C)	DNK4217
9	Fader Packing (A)	DEC2571	34	Push SW Knob (B)	DNK4207
10	Push SW Guide	DNK4208	35	LED Lens (B)	DNK4216
11	SW Packing (A)	DEC2573	36	Level Meter Holder	DNK4214
12	Transform Panel	DNF1682	37	Flexible Cable (9P)	DDD1240
13	CH Fader Bracket	DNF1683	38	Rivet	RBM-003
14	CR Fader Bracket	DNF1684	39	Shield Sheet (F)	DEC2591
15	Cross Fader Assy-S	DXX2535	40	65 Label (S)	See Contrast table(2)
16	Washer	WT28D060D025	41	Screw	AMZ26P040FMC
17	O Ring (2.8)	DEB1618	42	Screw	BBZ30P060FZK
18	Slider Base	DNK4192	43	Screw	BPZ20P060FMC
19	Lever Plate	DNH2564	44	Screw	CPZ26P100FZK
20	Fader Magnet	DMG1010	45	Screw	AMZ20P040FMC
21	Yoke	DNH2569	46	Screw	BPZ20P050FMC
22	Encoder Plate S	DEC2568	47	Screw	PBA1062
23	Stopper S	DNH2578	48	Thin Head Screw	DBA1198
24	Guide Shaft	DLA1966	NSP 49	Panel Stay (D) Assy	DXB1787
25	MG Plate Assy	DXA1968	50	Screw	BPZ30P080FMC


(2) CONTRAST TABLE

DJM-909/ KUCXJ, DJM-909/ WYXJ and DJM-909/ TLTXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-909 KUCXJ	DJM-909 WYXJ	DJM-909 TLTXJ
	40	65 Label (S)	DRW2164	Not used	Not used

2.4 CONTROL PANEL (UPPER) SECTION

A



Types of the rotary Knobs (by color)

No.6



Gray

No.7



Gray

No.8



Red

No.9



Red

No.10



Gray

(No indicating line)


B

C

D

E

F

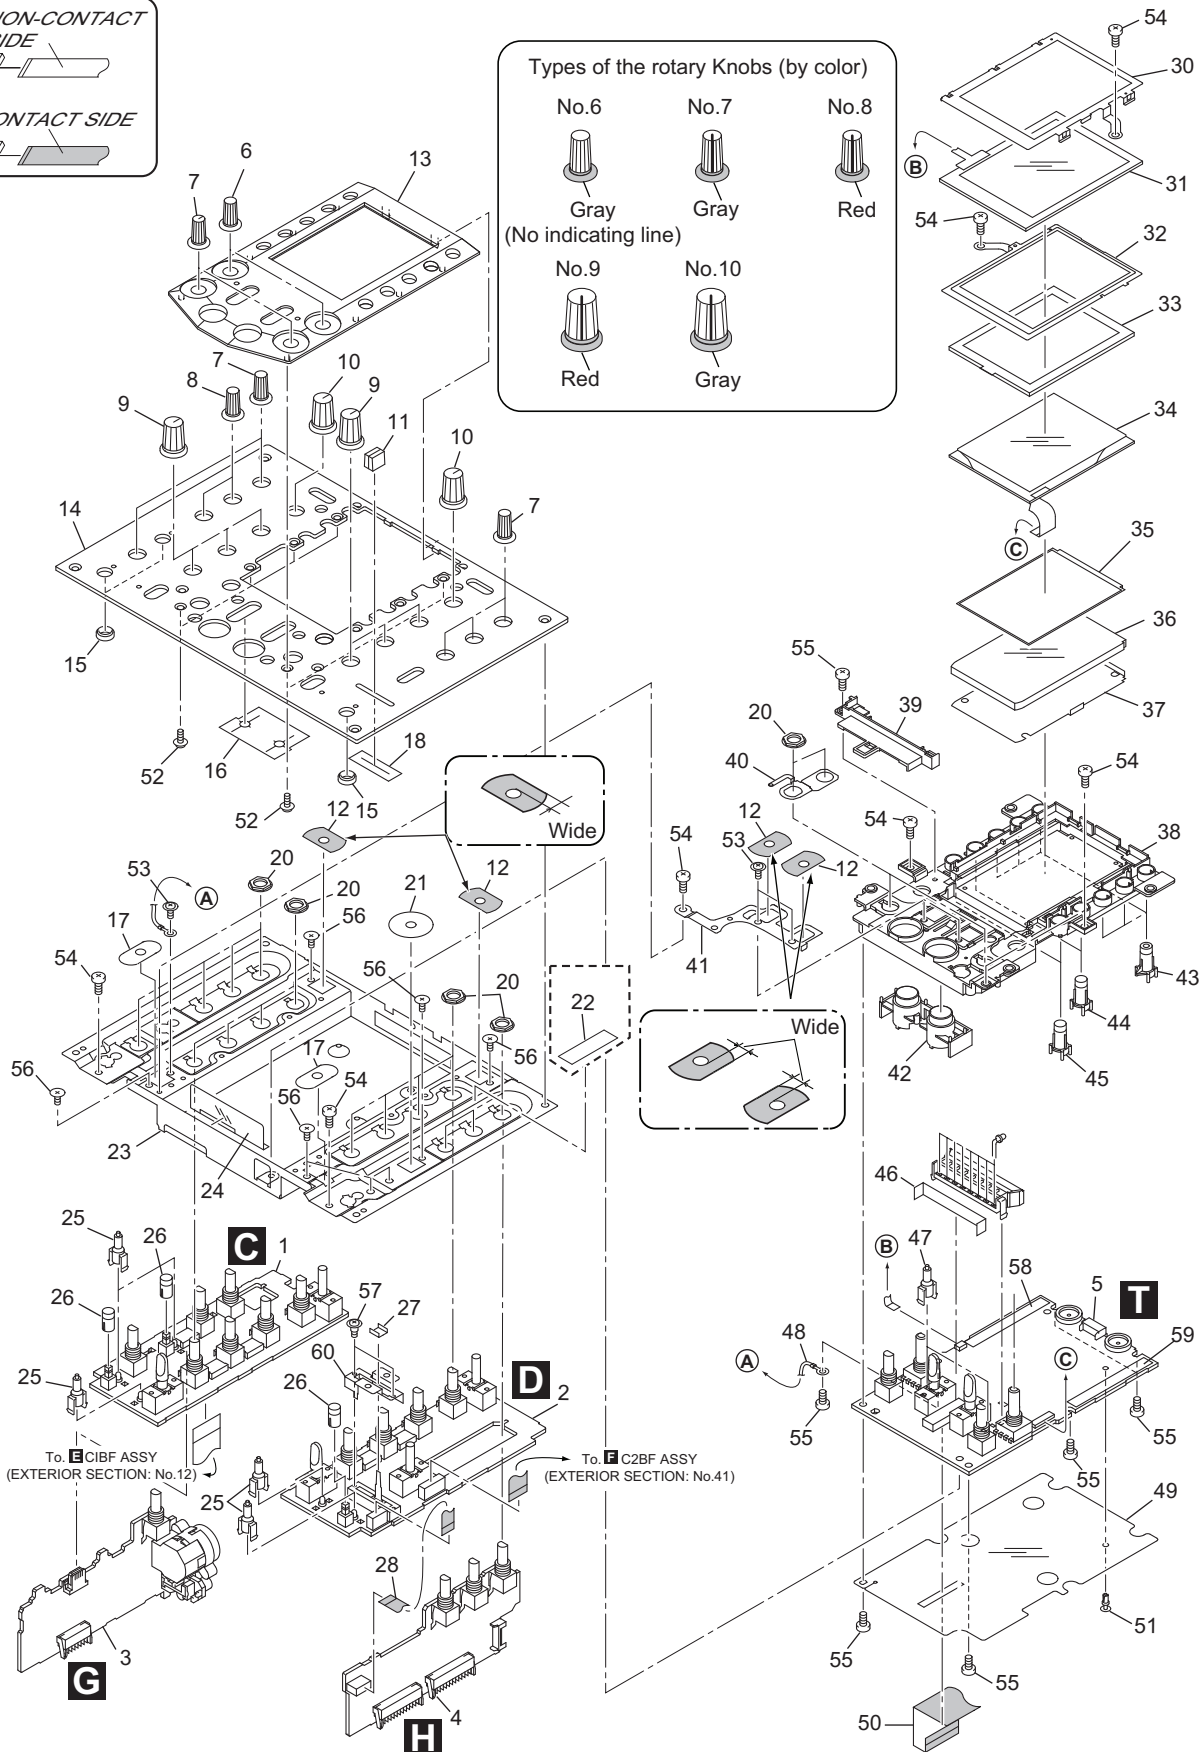

CONTROL PANEL (UPPER) SECTION Parts List


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	C1EQ Assy	DWS1326	31	Touch Panel	DSX1062
2	C2EQ Assy	DWS1327	32	Bracket	DNH2574
3	MICB Assy	DWX2318	33	Gasket	DEC2632
4	HPBO Assy	DWX2319	34	LCD Module	DAV1002
5	LCD Assy	DWX2317	35	Diffusion Sheet	DEC2619
6	Rotary Knob (Small: Gray)	DNK4205	36	Lighting Conductor	DNK4200
7	Rotary Knob (Small: Gray)	DNK4203	37	Reflection Sheet	DEC2620
8	Rotary Knob (Small: Red)	DNK4204	38	LCD Holder	DNK4199
9	Rotary Knob (Large: Red)	DNK4202	39	LCD Holder (M)	DNK4225
10	Rotary Knob (Large: Gray)	DNK4201	40	Earth Spring	DBK1248
11	Slider Knob (S)	DNK4211	41	Earth Bracket	DNH2575
12	SW Packing (D)	DEC2580	42	Tap Knob	DNK4209
13	Escutcheon	DNK4222	43	Preset Knob	DNK4306
14	Control Panel (U9)	DNB1120	44	Tact Knob (E)	DNK4265
15	Push SW Guide	DNK4208	45	Tact Knob	DNK4213
16	SW Packing (C)	DEC2621	46	Shade Sheet	DEC2631
17	SW Packing (B)	DEC2574	47	LED Lens (C)	DNK4217
18	Fader Packing (B)	DEC2572	48	Earth Lug Assy	DDX1191
19			49	Shield Sheet D	DEC2579
20	Flange Nut	DBN1004	50	Flexible Cable (21P)	DDD1237
21	SW Packing (A)	DEC2573	51	Rivet	RBM-003
22	65 Label (S)	See Contrast table(2)	52	Screw	PBA1062
NSP 23	Panel Stay (U9)	DND1250	53	Screw	AMZ26P040FMC
24	Shield Sheet E	DEC2581	54	Screw	BBZ30P060FZK
25	LED Lens (A)	DNK4215	55	Screw	BPZ30P080FMC
26	Push SW Knob (A)	DNK4206	56	Screw	CMZ26P050FZK
27	Cue Earth Plate	DBK1252	57	Screw	DBA1141
28	Flexible Cable (7P)	DDD1244	58	Knob Cushion L	DEC2656
29			59	Knob Cushion R	DEC2657
30	Earth Plate	DNH2577	60	Cue Fader Bracket	DNF1690

(2) CONTRAST TABLE

DJM-909/ KUCXJ, DJM-909/ WYXJ and DJM-909/ TLTXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-909 KUCXJ	DJM-909 WYXJ	DJM-909 TLTXJ
	22	65 Label (S)	DRW2164	Not used	Not used

2.5 FRONT PANEL SECTION

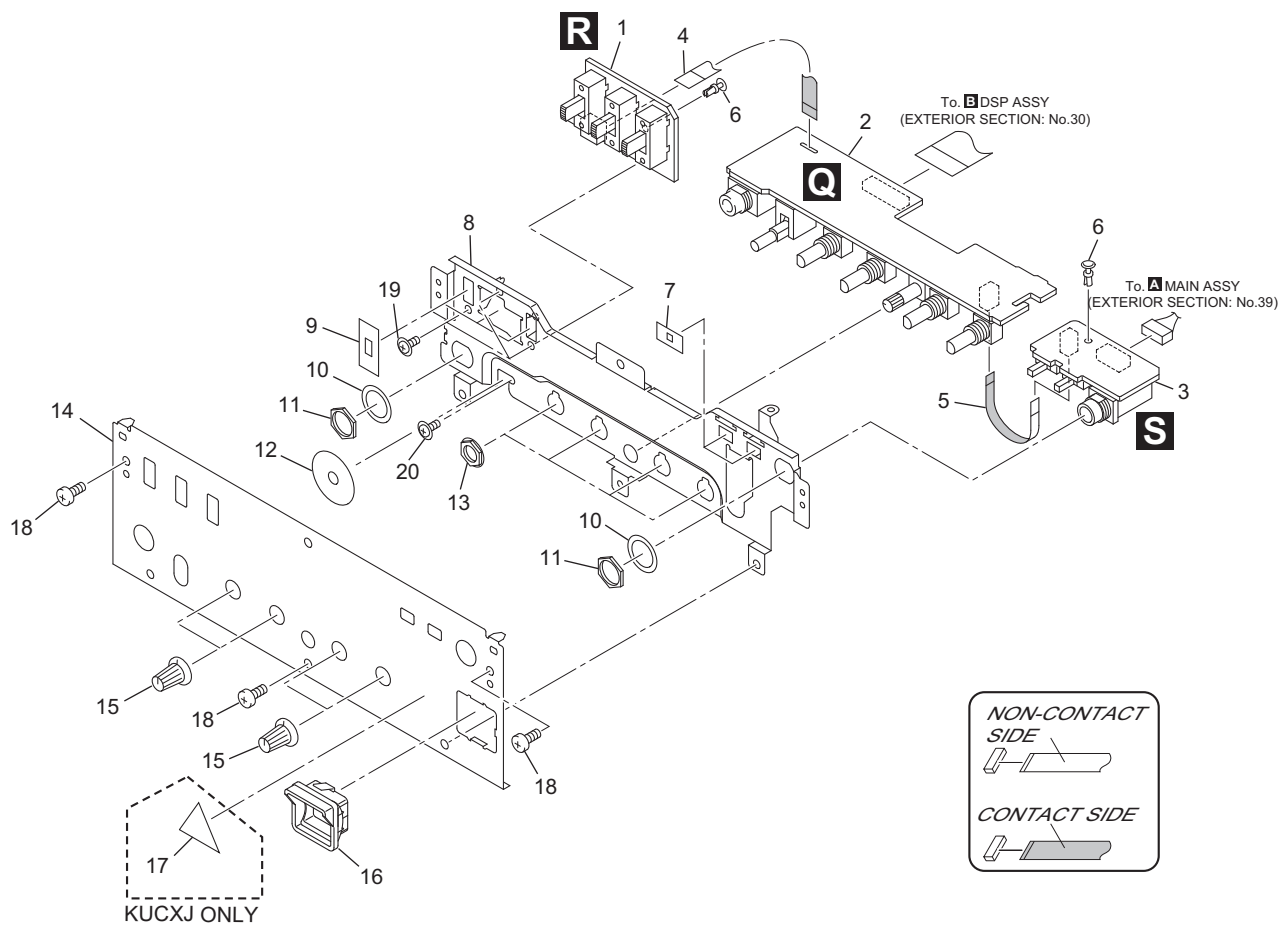

FRONT PANEL SECTION Parts List

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	RVSW Assy	DWS1332	11	Nut	NKX2FUC
2	CFVR Assy	DWS1331	12	SW Packing (A)	DEC2573
3	FSSW Assy	DWS1333	13	Flange Nut	DBN1004
4	Flexible Cable (6P)	DDD1235	14	Front Panel (9)	DNB1119
5	Flexible Cable (3P)	DDD1236	15	Rotary Knob (SS)	DAA1162
6	Rivet	RBM-003	16	Power Knob Guide	DNK4198
7	Slide Packing (B)	DEC2590	NSP 17	Caution Label	See Contrast table(2)
NSP 8	Front Panel Stay	DNH2571	18	Screw	BBZ30P060FZK
9	Slide SW Packing (A)	DEC2589	19	Screw	AMZ26P040FMC
10	Washer	DBE1010	20	Screw	PMA30P060FMC

(2) CONTRAST TABLE

DJM-909/ KUCXJ, DJM-909/ WYXJ and DJM-909/ TLTXJ are constructed the same except for the following :

Mark	No.	Symbol and Description	DJM-909 KUCXJ	DJM-909 WYXJ	DJM-909 TLTXJ
NSP	17	Caution Label	DRW1975	Not used	Not used

5. PCB PARTS LIST

NOTES: ● Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

● The  mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

● When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω $\rightarrow$ 56 x 10¹ $\rightarrow$ 561 RD1/4PU  J

47k Ω $\rightarrow$ 47 x 10³ $\rightarrow$ 473 RD1/4PU  J

0.5 Ω $\rightarrow$ R50 RN2H  K

1 Ω $\rightarrow$ 1R0 RS1P  K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω $\rightarrow$ 562 x 10¹ $\rightarrow$ 5621 RN1/4PC  F

Mark No. Description Part No.

LIST OF ASSEMBLIES

NSP 1..MOTHER ASSY DWM2173
2..DSP ASSY DWX2316
2..MAIN ASSY DWX2337

NSP 1..EQ ASSY DWM2167
2..C1EQ ASSY DWS1326
2..C2EQ ASSY DWS1327
2..LCD ASSY DWX2317

NSP 1..JACK ASSY DWM2168
2..C1BF ASSY DWS1328
2..C2BF ASSY DWS1329
2..MICB ASSY DWX2318
2..HPBO ASSY DWX2319
2..FDVR ASSY DWX2320
2..SDRT ASSY DWX2321
2..XLR ASSY DWX2322

NSP 1..SUB ASSY DWM2169
2..LVMR ASSY DWS1330
2..CFVR ASSY DWS1331
2..RVSW ASSY DWS1332
2..FSSW ASSY DWS1333
2..C1TR ASSY DWS1334
2..C2TR ASSY DWS1335
2..FVA1 ASSY DWX2323
2..FVA2 ASSY DWX2324

 1..SW POWER SUPPLY ASSY DWR1377

Mark No. Description Part No.

MAIN ASSY SEMICONDUCTORS

 IC136,IC140,IC142,IC143 (400mA) AEK7004

 IC135 ICP-N15

 IC134 ICP-N20

IC104,IC109,IC118,IC131-IC133 NJM4558MD
IC112 NJM4580DD

IC124,IC126 NJM4580MD
IC101 NJM5532MD
IC114-IC117 SSM2018TP
IC105,IC106,IC119 TC9215AF
Q128-Q130,Q132,Q133 2SA1037K

Q136,Q137,Q140,Q145,Q150 2SA1037K
Q101-Q118,Q141-Q144 2SC3326
Q153,Q154,Q157,Q158 2SC3326
Q160 DTA124EK
Q131,Q135,Q139,Q149,Q152 DTC124EK

Mark No. Description Part No.

Q155,Q159,Q161-Q163 DTC124EK
D109-D115,D117,D119-D121 1SS355
D123,D125-D128,D133-D135 1SS355
D137,D138 NNCD6.2MF

COILS AND FILTERS

 L105-L114 ATL7002
 L101-L104 VTL1105

CAPACITORS

C163,C164,C237,C238 CCSRCH101J50
C250,C251,C304,C305 CCSRCH220J50
C335-C342,C353,C354 CCSRCH220J50
C113,C114 CCSRCH270J50
C176-C179,C188,C189 CCSRCH470J50

C312,C313 CCSRCH470J50
C159-C162,C182,C183 CEAL100M35
C194,C195,C220,C221 CEAL100M35
C224,C225,C228,C229 CEAL100M35
C284-C293,C300-C303 CEAL100M35

C331,C332 CEAL100M35
C186,C187,C196,C197 CEALNP100M35
C200,C201,C216,C217 CEAT100M50
C235,C236,C298,C299 CEAT100M50
C306-C309,C329,C330 CEAT100M50

C269,C271,C273,C274 CEAT101M25
C276,C277 CEAT101M25
C327,C328 CEAT102M25
C167,C241 CFTLA103J50
C294,C295,C321-C324 CKSQYB105K16

C105-C108,C111,C112 CKSRYB103K50
C135,C136,C157,C158 CKSRYB103K50
C172-C175,C184,C185 CKSRYB103K50
C190,C191,C198,C199,C202 CKSRYB103K50
C204,C214,C215,C222,C223 CKSRYB103K50

C242,C243,C245,C246 CKSRYB103K50
C248,C249,C316-C319 CKSRYB103K50
C325,C326 CKSRYB103K50
C314,C315 CKSRYB104K25
C101-C104,C254-C263 CKSRYB473K50

C351,C352 CKSRYB473K50
C165,C166,C239,C240 CQMA152J50
C244,C247 CQMA473J50

RESISTORS

R215,R216,R275,R276 RN1/16SE1000D
R259,R260,R265,R266 RN1/16SE1001D
R205-R208,R213,R214 RN1/16SE1003D

Mark No.	Description	Part No.
R225,R226,R239,R240 R261-R264,R267,R268		RN1/16SE1003D RN1/16SE1003D
R277,R278,R358-R361 R389-R398 R119,R120,R221-R224 R235-R238 R433-R436		RN1/16SE1003D RN1/16SE1003D RN1/16SE1802D RN1/16SE1802D RN1/16SE2202D
R151,R152 R306,R307,R509,R510 R121,R122 R209-R212,R279-R282 R101-R110,R112,R115		RN1/16SE2702D RN1/16SE3302D RN1/16SE3901D RN1/16SE4300D RN1/16SE5602D
R117,R118,R159-R162 R167-R170 R157,R158 R441,R442 R443,R444		RN1/16SE5602D RN1/16SE5602D RN1/16SE6800D RS1/16S2002F RS1/16S8201F
Other Resistors		RS1/16S####J

OTHERS

CN116 15P FFC CONNECTOR	52045-1545
CN118 27P FFC CONNECTOR	52045-2745
CN117 35P FFC CONNECTOR	52045-3545
CN121 5P CONNECTOR	B5P-VH
CN125 KR CONNECTOR	B6B-PH-K
CN123 KR CONNECTOR	B9B-PH-K
J101 EARTH LEAD UNIT	DDF1031
JA101 4P PIN JACK	DKB1057
JA104,JA105 REMOTE CON. JACK	RKN1004
CN102 B TO B CONNECTOR 10P	VKN1398
CN115 B TO B CONNECTOR 12P	VKN1399
CN101,CN127	VKN1402
B TO B CONNECTOR 18P	
CN119 B TO B CONNECTOR 20P	VKN1403
CN120 B TO B CONNECTOR 22P	VKN1404
KN102 WRAPPING TERMINAL	VNF1084

B DSP ASSY

SEMICONDUCTORS

⚠ IC734,IC740 (400mA)	AEK7004
⚠ IC738,IC739 (500mA)	AEK7005
IC700,IC701	AK5380VT
IC706,IC707	DSPA56367PV150
⚠ IC731	ICP-N15
⚠ IC732	ICP-N20
IC713	K4S641632F-TC75
⚠ IC712	NJM2374AM
IC708,IC709	NJM2870F18
⚠ IC730	NJM2870F25
IC726,IC729	NJM4558MD
IC724,IC725,IC727,IC728,IC736	NJM4580MD
⚠ IC716	NJM78L05UA
⚠ IC717	NJM79L05UA
IC702-IC705	PCM1742KE
IC718	PD3451B8
IC722	TC74VHC08FT
IC719	TC74VHC125FT
IC720,IC735	TC74VHC14FT
IC737	TC7SU04FU

Mark No.	Description	Part No.
IC710 IC714 Q710 Q709 Q702,Q711		TC7WU04FU XC2S50-5PQ208C 2SC1740S 2SC2458 DTA124EUA
Q703-Q707 D708 D701-D706,D709,D710		DTC124EUA EC10QS04 RB501V-40

COILS AND FILTERS

L701 L700 L703 FERRITE BEAD	LRCA101J LRCA180J VTH1020
-----------------------------------	---------------------------------

CAPACITORS

C703,C704,C717,C718 C991-C997 C872,C873 C821 C707,C708,C715,C716	CCSRCH101J50 CCSRCH121J50 CCSRCH180J50 CCSRCH181J50 CCSRCH390J50
C723,C724,C727,C728 C709,C710,C713,C714,C721 C722,C725,C726 C805,C820,C943,C947 C701,C702,C705,C706	CCSRCH390J50 CCSRCH681J50 CCSRCH681J50 CEAL100M35 CEAT100M50
C719,C720,C731,C732 C832,C833,C905,C906,C928 C930,C933-C936,C952-C954 C961 C850,C868,C925,C926,C929	CEAT100M50 CEAT100M50 CEAT100M50 CEAT100M50 CEAT101M10
C931,C932 C758,C759 C825,C927 C816,C822,C919,C990 C815,C899	CEAT101M25 CEAT221M10 CEAT330M35 CEJQ101M10 CEJQ220M35
C846,C861 C700,C711,C712,C729,C730 C733-C737,C760,C761,C804 C806-C810,C812-C814 C827,C828,C831,C837	CKSRYB102K50 CKSRYB103K50 CKSRYB103K50 CKSRYB103K50 CKSRYB103K50

C839-C845,C851-C859 C862-C867,C869,C870 C878-C885,C887-C893 C896-C898,C900-C904,C907 C909-C918,C920-C924,C939	CKSRYB103K50 CKSRYB103K50 CKSRYB103K50 CKSRYB103K50 CKSRYB103K50
---	--

C944,C946 C738-C757,C817,C823,C829 C834,C838,C847,C860 C762-C789,C792-C803,C824 C848,C874-C877	CKSRYB103K50 CKSRYB104K25 CKSRYB104K25 CKSRYB105K6R3 CKSRYB105K6R3
--	--

C811,C830 C818,C835 C790,C791,C819,C836	CKSRYB153K50 CKSRYB222K50 CKSRYB682K50
---	--

RESISTORS

R841-R845,R851-R855 R734-R739 R697,R698,R849,R850 R875,R876,R907,R908 R707,R708,R723,R724	RAB4C0R0J RAB4C223J RN1/16SE1003D RN1/16SE1003D RN1/16SE7501D
---	---

Mark No. Description**Part No.**

R701,R702,R717,R718
R703,R704,R719,R720
R709,R710,R715,R716
R725,R726,R731,R732
R705,R706,R721,R722

RN1/16SE2702D
RN1/16SE3001D
RN1/16SE6202D
RN1/16SE6202D
RN1/16SE7501D

R770
R763
VR700-VR703
Other Resistors

RS1/16S2201F
RS1/16S4702F
CCP1402
RS1/16S###J

OTHERS

CN709 17P FFC CONNECTOR
CN707 19P FFC CONNECTOR
CN704 21P FFC CONNECTOR
CN708 23P FFC CONNECTOR
CN706 27P FFC CONNECTOR

52045-1745
52045-1945
52045-2145
52045-2345
52045-2745

CN705 35P FFC CONNECTOR
X700 CRYSTAL RESONATOR
(24MHz)
CN700,CN701 KR CONNECTOR
CN703 8P TOP POST

52045-3545
ASS7025
B5B-PH-K
B8B-EH

CN702 KR CONNECTOR

S6B-PH-K

**C C1EQ ASSY
SEMICONDUCTORS**

IC1610
IC1602-IC1605,IC1607
IC1601
IC1609,IC1611
Q1603-Q1606

NJM4558MD
NJM4580MD
NJM5532MD
TC7S14F
2SC3326

Q1602
Q1600
Q1601
D1601-D1604,D1609
D1606

DTA124EUA
DTC114EUA
DTC124EUA
1SS355
SLI-343URCW(RST)

D1607,D1608

SLI-343YCW(RST)

SWITCHES AND RELAYS

S1602
S1601
S1603,S1604

DSK1026
DSK1035
RSG1032

CAPACITORS

C1663,C1664
C1631
C1673,C1674
C1683,C1684
C1679,C1680

C1675,C1676
C1603,C1604,C1661,C1665
C1627,C1628,C1685,C1686
C1630
C1671,C1672

C1681,C1682
C1607,C1637,C1638,C1641,C1642
C1648-C1654,C1656-C1660
C1688,C1689
C1635,C1636

CCSRCH101J50
CCSRCH270J50
CCSRCH271J50
CCSRCH330J50
CEHAR100M35

CEHARR47M50
CEJQ100M35
CEJQ100M50
CFTLA104J50
CFTNA473J50

CFTNA563J50
CKSRYB103K50
CKSRYB103K50
CKSRYB103K50
CKSRYB104K25

C1687
C1601,C1602,C1605,C1606
C1677,C1678 (5600pF/50V)

CKSRYB272K50
CKSRYB473K50
DCE1009

Mark No. Description**Part No.****RESISTORS**

R1617,R1618
R1601,R1602,R1651,R1652
R1689,R1690
R1603,R1604,R1637,R1638
R1633,R1634,R1641,R1642

RN1/10SE1300D
RN1/16SE1001D
RN1/16SE1002D
RN1/16SE1003D
RN1/16SE1502D

R1611,R1612,R1623,R1624
R1609,R1610,R1615,R1616
R1621,R1622
R1635,R1636,R1639,R1640
R1691,R1692

RN1/16SE1800D
RN1/16SE1801D
RN1/16SE1801D
RN1/16SE1802D
RN1/16SE1802D

R1625,R1626
R1607,R1608,R1627,R1628
R1658
R1613,R1614
R1619,R1620

RN1/16SE4702D
RN1/16SE5101D
RN1/16SE5601D
RN1/16SE6202D
RN1/16SE7502D

VR1602-VR1604
VR1601,VR1605
VR1606,VR1607
VR1608-VR1613 (22kohm)
Other Resistors

DCS1065
DCS1073
DCS1074
VCP1133
RS1/16S###J

OTHERS

CN1603 FFC CONNECTOR 17P
CN1601,CN1602,CN1604
B TO B CONNECTOR 6P

52492-1720
DKN1278

**D C2EQ ASSY
SEMICONDUCTORS**

IC1748-IC1750
IC1752-IC1755
IC1751
IC1758,IC1759
Q1701-Q1704

NJM4558MD
NJM4580MD
NJM5532MD
TC7S14F
2SC3326

Q1705
D1701-D1704
D1751
D1754

DTA124EUA
1SS355
SLI-343URCW(RST)
SLI-343YCW(RST)

SWITCHES AND RELAYS

S1751,S1752
S1754
S1753

DSK1026
DSK1035
RSG1032

CAPACITORS

C1799,C1800
C1805-C1808
C1759,C1760
C1767,C1768
C1771,C1772

C1775,C1776
C1769,C1770,C1797,C1798
C1757,C1758
C1765,C1766
C1752-C1756,C1781-C1784,C1790

C1801-C1804,C1809-C1816
C1779,C1780
C1761,C1762,C1777,C1778
C1773,C1774 (5600pF/50V)

CCSRCH101J50
CCSRCH220J50
CCSRCH271J50
CCSRCH330J50
CEHAR100M35

CEHARR47M50
CEJQ100M50
CFTNA473J50
CFTNA563J50
CKSRYB103K50

CKSRYB103K50
CKSRYB104K25
CKSRYB473K50
DCE1009

Mark No. Description Part No.**RESISTORS**

R1795,R1796	RN1/10SE1300D
R1751,R1752	RN1/16SE1001D
R1815,R1816	RN1/16SE1002D
R1753,R1754,R1787,R1788	RN1/16SE1003D
R1779,R1780,R1783,R1784	RN1/16SE1502D

R1820,R1821,R1824,R1826	RN1/16SE1502D
R1761,R1762,R1789,R1790	RN1/16SE1800D
R1759,R1760,R1765,R1766	RN1/16SE1801D
R1793,R1794	RN1/16SE1801D
R1777,R1778,R1781,R1782	RN1/16SE1802D

R1817,R1818	RN1/16SE1802D
R1763,R1764	RN1/16SE4702D
R1757,R1758,R1771,R1772	RN1/16SE5101D
R1791,R1792	RN1/16SE6202D
R1797,R1798	RN1/16SE7502D

VR1752-VR1754	DCS1065
VR1751	DCS1073
VR1755	DCV1014
VR1756-VR1761	VCP1133
Other Resistors	RS1/16S####J

OTHERS

CN1754 7P FFC CONNECTOR	52045-0745
CN1753 11P FFC CONNECTOR	52045-1145
CN1751,CN1752	DKN1278
B TO B CONNECTOR 6P	
0 CUE FADER BRACKET	DNF1690

E C1BF ASSY SEMICONDUCTORS

IC1255	NJM4580DD
IC1254	NJM4580MD
IC1251-IC1253	NJM5532MD
Q1251,Q1252	2SC3326
Q1257	DTA124EUA

Q1253-Q1256	DTC124EUA
D1251-D1258	1SS355

SWITCHES AND RELAYS

S1251	VSH1009
RY1251-RY1253	VSR1008

CAPACITORS

C1251-C1254,C1259-C1262	CCSRCH101J50
C1297,C1298	CCSRCH220J50
C1292,C1293	CEAT221M6R3
C1269,C1270	CEAT470M35
C1255-C1258,C1263-C1268	CEJQ100M35

C1275-C1278	CEJQ100M35
C1285,C1290	CFTLA103J50
C1279-C1284,C1286,C1288,C1294	CKSRYB103K50
C1301	CKSRYB103K50
C1271,C1272	CQMA222J50

C1273,C1274	CQMA681J50
-------------	------------

RESISTORS

R1269,R1270	RN1/10SE4703D
R1273-R1276	RN1/10SE7503D
R1251,R1252,R1259,R1260	RN1/16SE1000D
R1267,R1268,R1293-R1298	RN1/16SE1001D
R1255-R1258,R1263-R1266	RN1/16SE1003D

Mark No. Description Part No.

R1279-R1282,R1299-R1304	RN1/16SE1003D
R1261,R1262,R1277,R1278	RN1/16SE1203D
R1271,R1272	RN1/16SE1601D
R1290	RN1/16SE2202D
R1286,R1287	RN1/16SE3301D

R1253,R1254,R1309,R1310	RN1/16SE3302D
Other Resistors	RS1/16S####J

OTHERS

CN1255 FFC CONNECTOR 17P	52492-1720
JA1251 4P PIN JACK	AKB7048
CN1253,CN1254	DKN1279
B TO B CONNECTOR 6P	
0 SHIELD CASE S	DNH2589
CN1252 B TO B CONNECTOR 10P	VKN1385
CN1251 B TO B CONNECTOR 18P	VKN1389

F C2BF ASSY SEMICONDUCTORS

IC1355	NJM4580DD
IC1351-IC1353	NJM5532MD
Q1351,Q1352	2SC3326
Q1357	DTA124EUA
Q1353-Q1356	DTC124EUA

D1351-D1358	1SS355
-------------	--------

SWITCHES AND RELAYS

S1351	VSH1009
RY1351-RY1353	VSR1008

CAPACITORS

C1351-C1354,C1359-C1362	CCSRCH101J50
C1397,C1398	CCSRCH220J50
C1392,C1393	CEAT221M6R3
C1369,C1370	CEAT470M35
C1355-C1358,C1363-C1368	CEJQ100M35

C1375,C1376	CEJQ100M35
C1385,C1390	CFTLA103J50
C1379-C1384,C1394,C1401	CKSRYB103K50
C1371,C1372	CQMA222J50
C1373,C1374	CQMA681J50

RESISTORS

R1369,R1370	RN1/10SE4703D
R1373-R1376	RN1/10SE7503D
R1351,R1352,R1359,R1360	RN1/16SE1000D
R1367,R1368,R1393-R1396	RN1/16SE1001D
R1355-R1358,R1363-R1366	RN1/16SE1003D

R1379-R1382,R1399-R1404	RN1/16SE1003D
R1361,R1362,R1377,R1378	RN1/16SE1203D
R1371,R1372	RN1/16SE1601D
R1390	RN1/16SE2202D
R1386,R1387	RN1/16SE3301D

R1353,R1354,R1409,R1410	RN1/16SE3302D
Other Resistors	RS1/16S####J

OTHERS

CN1355 11P FFC CONNECTOR	52045-1145
JA1351 4P PIN JACK	AKB7048
CN1353,CN1354	DKN1279
B TO B CONNECTOR 6P	
0 SHIELD CASE S	DNH2589

Mark No.	Description	Part No.
CN1351	B TO B CONNECTOR 18P	VKN1389

G MICB ASSY SEMICONDUCTORS

IC1201,IC1203,IC1204	NJM2068M
IC1202	NJM4580MD
D1201-D1204	1SS355
D1205	NNCD6.2MF

COILS AND FILTERS

⚠ L1201-L1206	CHIP FERRITE BEAD	ATL7002
---------------	-------------------	---------

CAPACITORS

C1201-C1204,C1244,C1245	CCSRCH101J50
C1213,C1231,C1243	CCSRCH221J50
C1207,C1208,C1227,C1234,C1246	CCSRCH270J50
C1217,C1247	CEAT470M25
C1205,C1206,C1209,C1210,C1216	CEJQ100M35
C1218,C1228,C1230,C1233,C1237	CEJQ100M35
C1241,C1242,C1248	CEJQ100M35
C1226,C1239,C1240,C1249	CFTLA103J50
C1211,C1212,C1214,C1215,C1229	CKSRYB103K50
C1235,C1236,C1238	CKSRYB103K50

RESISTORS

R1205,R1206	RN1/10SE4703D
R1226	RN1/16SC22R0D
R1203,R1204	RN1/16SE1000D
R1237	RN1/16SE1001D
R1214,R1219	RN1/16SE1002D
R1201,R1202	RN1/16SE1003D
R1209,R1210	RN1/16SE1802D
R1207,R1208	RN1/16SE3302D
R1213,R1230	RN1/16SE6202D
R1211,R1212	RN1/16SE9102D

VR1201	DCS1071
Other Resistors	RS1/16S###J

OTHERS

JA1202	2P PIN JACK	AKB7046
JA1201	CANNON CONNECTOR	DKB1058
CN1202	B TO B CONNECTOR 6P	DKN1279
CN1201	B TO B CONNECTOR 12P	VKN1386

H HPBO ASSY SEMICONDUCTORS

IC1454	NJM2068M
IC1453	NJM4558MD
IC1452	NJM4580MD
IC1451	NJM5532MD
IC1457	TC7S14F
IC1455,IC1456	TC9215AF
Q1453,Q1454	2SB1238X
Q1455,Q1456	2SC3326
Q1451,Q1452	2SD1859X
Q1457,Q1458	DTC124EUA

D1451-D1461	1SS355
-------------	--------

SWITCHES AND RELAYS

RY1451	VSR1008
--------	---------

Mark No.	Description	Part No.
----------	-------------	----------

CAPACITORS

C1457,C1458	CCSRCH220J50
C1463,C1464,C1467,C1468	CCSRCH820J50
C1459,C1460	CEAL100M35
C1451,C1452,C1455,C1456	CEAT100M50
C1461,C1462,C1465,C1466	CEAT100M50

C1497,C1498	CEAT100M50
C1469,C1470	CEAT2R2M50
C1471,C1472	CEAT470M25
C1478-C1487,C1489,C1491,C1492	CKSRYB103K50
C1503,C1504	CKSRYB473K50

C1475,C1476	DCH1194
-------------	---------

RESISTORS

R1487-R1490	RD1/2VM122J
R1499,R1500	RD1/2VM221J
R1451,R1452,R1457,R1458	RN1/16SE1001D
R1473,R1474	RN1/16SE1002D
R1459-R1462	RN1/16SE2202D

R1479,R1480	RN1/16SE5102D
R1491-R1494	RS2LMF270J
VR1451-VR1453	DCS1064
Other Resistors	RS1/16S###J

OTHERS

CN1453	7P FFC CONNECTOR	52045-0745
CN1452	B TO B CONNECTOR 20P	VKN1390
CN1451	B TO B CONNECTOR 22P	VKN1391

I FDVR ASSY SEMICONDUCTORS

IC301	TC74VHC14FT
Q301-Q305	2SC4081
D307-D313	DA221
D301	GP1A038RBK
D302-D306	GP1S94

CAPACITORS

C905-C909	CCSRCH221J50
C901-C904	CKSRYB104K25

RESISTORS

All Resistors	RS1/16S###J
---------------	-------------

OTHERS

CN301	9P FFC CONNECTOR	52044-0945
-------	------------------	------------

J SDRT ASSY SEMICONDUCTORS

IC1901,IC1902	NJM4558MD
IC1903	TC9215AF
Q1901-Q1904	2SC3326
Q1905	DTA124EK
D1901-D1904	NNCD6.2MF

COILS AND FILTERS

⚠ L1907-L1909	CHIP FERRITE BEAD	ATL7002
⚠ L1901-L1906	FERRITE BEAD	VTH1020

Mark No. Description**Part No.****CAPACITORS**

C1901-C1904,C1915-C1918
C1907,C1908
C1905,C1906,C1909,C1910
C1913,C1914,C1931,C1932
C1921,C1924-C1929

CCSRCH101J50
CCSRCH270J50
CEAT100M50
CEAT100M50
CKSRYB103K50

C1933-C1935

CKSRYB104K25

RESISTORS

R1911,R1912,R1949,R1950
Other Resistors

RN1/16SE4702D
RS1/16S###J

OTHERS

CN1901 15P FFC CONNECTOR
JA1903,JA1904 MIC. JACK
JA1901,JA1902 HEADPHONE JACK

52044-1545
DKN1248
RKB1014

**XLR ASSY
SEMICONDUCTORS**

IC102,IC137
IC108
IC110,IC111
Q119-Q126
D101-D108

NJM4580MD
NJM5532DD
NJM5532L
2SC3326
1SS355

COILS AND FILTERS

⚠ L101-L104 FERRITE BEAD

VTH1020

CAPACITORS

C333,C334
C141-C148,C335,C336
C131,C132
C149-C152
C161-C164

CCSRCH151J50
CCSRCH330J50
CEAL100M50
CEAT101M25
CEHAT101M25

C115-C118,C337,C338
C119,C120,C125,C126
C133,C134,C137-C140
C153-C156

CFTNA334J50
CKSRYB103K50
CKSRYB103K50
CQMA103J50

RESISTORS

R196
R193-R195
R189-R192
R163,R164
R123,R124,R165-R172

RD1/2PM101J
RD1/2VM101J
RN1/16SC68R0D
RN1/16SE1001D
RN1/16SE1002D

R447,R448
R387,R388
R125,R126
R129,R130
R185-R188

RN1/16SE1002D
RN1/16SE1003D
RN1/16SE1503D
RN1/16SE2002D
RN1/16SE2201D

R173-R180,R451,R452
R435,R436,R441,R442
R429,R430
R431,R432
Other Resistors

RN1/16SE2202D
RN1/16SE2700D
RN1/16SE2701D
RN1/16SE4301D
RS1/16S###J

OTHERS

CN122 KR CONNECTOR
CN124 KR CONNECTOR
JA102,JA103
CANNON CONNECTOR
0 SCREW PLATE

B8B-PH-K
B9B-PH-K
DKB1059
VNE1948

Mark No. Description**Part No.****LVMR ASSY
SEMICONDUCTORS**

IC417,IC418
IC401-IC404
IC413,IC416
IC407-IC412
Q401,Q402

NJM072BM-E
NJM4558MD
TC4W53F
TS339CDT
2SA1577

Q415-Q420
Q404
Q405
Q403,Q408-Q414
D401-D406,D409,D410

2SB1132
2SC3326
DTA124EUA
DTC124EUA
1SS355

D413,D414,D439-D454
D473,D474,D481,D482
D437,D438,D458-D460
D429-D436,D455
D415-D428,D461-D464

1SS355
1SS355
SLI-343URCW(RST)
SLI-343YCW(RST)
TLGE68TG(NP)

D467
D407,D408,D411,D412

UDZS10B
UDZS12B

SWITCHES AND RELAYS

S404,S405
S401

DSG1077
RSG1032

CAPACITORS

C403,C404,C407,C408
C401,C402,C405,C406,C439
C458
C415-C418
C433,C434

CCSRCH470J50
CEAT100M50
CEAT100M50
CEAT2R2M50
CEJQ100M35

C419,C420,C422-C426
C428-C432,C435-C438,C440
C447,C449,C451,C453,C455
C457,C461-C464
C409,C410

CKSRYB103K50
CKSRYB103K50
CKSRYB103K50
CKSRYB103K50
CKSRYB473K50

RESISTORS

R461,R462
R463,R464
R407,R408,R417,R418
R473,R474
R475,R476

RS1/10S27R0F
RS1/16S1000F
RS1/16S1302F
RS1/16S2000F
RS1/16S2400F

R481,R482
R465,R466
R467,R468
R483,R484
R471,R472

RS1/16S2401F
RS1/16S3000F
RS1/16S3300F
RS1/16S3301F
RS1/16S4300F

R469,R470
R485,R486
R477,R478
R403,R404,R413,R414
R479,R480

RS1/16S4700F
RS1/16S5100F
RS1/16S7500F
RS1/16S7501F
RS1/16S9100F

Other Resistors

RS1/16S###J

OTHERS

CN402 19P FFC CONNECTOR
CN405 FFC CONNECTOR 9P
CN401 FFC CONNECTOR 23P
CN403,CN404
B TO B CONNECTOR 3P
J406,J407 CONNECTOR ASSY

52044-1945
52492-0920
52492-2320
DKN1334
PG03KA-E07

Mark No. **Description** **Part No.**

M C1TR ASSY
SWITCHES AND RELAYS

S591 DSK1031

OTHERS

CN591 KR CONNECTOR 3P B3B-PH-K

N C2TR ASSY
SWITCHES AND RELAYS

S592 DSK1031

OTHERS

CN592 KR CONNECTOR 3P B3B-PH-K

O FVA1 ASSY
RESISTORS

VR593 DCV1016

OTHERS

CN593 B TO B CONNECTOR 3P VKN1355

P FVA2 ASSY
RESISTORS

VR594 DCV1016

OTHERS

CN594 B TO B CONNECTOR 3P VKN1355

Q CFVR ASSY
SEMICONDUCTORS

D551,D552 NNCD6.2MF

COILS AND FILTERS

⚠ L553-L571,L573-L575,L579

CHIP FERRITE BEAD

ATL7002

⚠ L551,L552,L572 FERRITE BEAD

VTH1020

SWITCHES AND RELAYS

S551 DSK1030

CAPACITORS

C582-C591,C597

C592-C596

C551

CKSRYB104K25

CKSRYB105K6R3

CQMA103J50

RESISTORS

VR552,VR554

VR551,VR555

VR553

Other Resistors

DCS1076

DCS1077

DCS1079

RS1/16S###J

OTHERS

CN551 17P FFC CONNECTOR

CN553 3P FFC CONNECTOR

CN552 6P FFC CONNECTOR

JA551 JACK

52044-1745

52045-0345

52492-0620

VKN1802

Mark No. **Description** **Part No.**

R RVSW ASSY
SWITCHES AND RELAYS

S571-S573 DSH1036

OTHERS

CN571 FFC CONNECTOR 6P 52492-0620

S FSSW ASSY
SEMICONDUCTORS

D581,D582 NNCD6.2MF

COILS AND FILTERS

⚠ L576-L578 FERRITE BEAD

VTH1020

SWITCHES AND RELAYS

S581,S582 DSH1052

CAPACITORS

C581 CQMA102J50

OTHERS

CN581 3P FFC CONNECTOR

JA581 HEADPHONE JACK

CN582 KR CONNECTOR

52045-0345

DKN1281

S6B-PH-K

T LCD ASSY
SEMICONDUCTORS

IC1005

IC1000

IC1004

IC1001

IC1002,IC1009

DYW1730

NJM2902V

PD3452A8

S1D13704F00A

TC74VHC125FT

IC1006,IC1007

IC1008

IC1003

Q1000,Q1010,Q1015-Q1019

Q1022,Q1025

TC74VHC175FT

TC74VHC74FT

TC7WU04FU

2SC2412K

DTA124EUA

Q1001-Q1005,Q1011-Q1014

Q1020,Q1021,Q1023,Q1024

Q1026,Q1027

D1024-D1033

D1036,D1037

DTC124EUA

DTC124EUA

DTC124EUA

1SS355

NNCD6.2MF

D1003,D1016

D1000-D1002,D1004,D1005

D1013-D1015,D1034,D1035

D1012,D1017-D1019

D1020

SLI-343URCW(RST)

SLI-343YCW(RST)

SLI-343YCW(RST)

UDZS5.6B

UDZS9.1B

D1007-D1011,D1021-D1023

UY5365S

SWITCHES AND RELAYS

S1005,S1015

S1007,S1008

S1006,S1009

S1000-S1004,S1010-S1014

DSG1079

DSK1034

DSX1054

VSG1024

CAPACITORS

C1024

C1045,C1046,C1048-C1050,C1052

C1072-C1074

C1023

C1003-C1005,C1007,C1013

CCSRCH120J50

CCSRCH121J50

CCSRCH121J50

CCSRCH150J50

CEAL4R7M50

Mark No.	Description	Part No.
C1027,C1028		CEJQ101M10
C1055		CEJQ220M25
C1033		CEJQ330M35
C1056		CEJQ470M16
C1026		CEJQ470M25
C1001,C1017,C1020-C1022		CKSRYB102K50
C1041-C1043,C1054,C1062-C1064		CKSRYB102K50
C1067,C1070		CKSRYB102K50
C1000,C1012,C1034-C1040,C1051		CKSRYB103K50
C1053,C1059-C1061,C1078-C1082		CKSRYB103K50
C1002,C1006,C1008-C1011		CKSRYB104K25
C1014-C1016,C1018,C1019,C1025		CKSRYB104K25
C1029-C1032,C1044,C1047		CKSRYB104K25
C1057,C1058,C1065,C1066		CKSRYB104K25
C1068,C1069,C1071,C1075		CKSRYB104K25

RESISTORS

R1011-R1014,R1040,R1041	RAB4C0R0J
R1023	RAB4C103J
R1021,R1025,R1029,R1031	RS1/16S1001F
R1027	RS1/16S1002F
R1059	RS1/16S1502F
R1000	RS1/16S2201F
R1009	RS1/16S3302F
VR1001,VR1003	DCS1078
VR1000,VR1002	DCS1080
Other Resistors	RS1/16S###J

OTHERS

CN1002	FFC CONNECTOR 21P	52492-2120
CN1000	CONNECTOR	52976-2492
CN1003	04P FFC CONNECTOR	9610S-04B
X1000	CRYSTAL RESONATOR (24MHz)	ASS7025
0	LCD HOLDER	DNK4221
CN1001	KR CONNECTOR	S6B-PH-K