9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

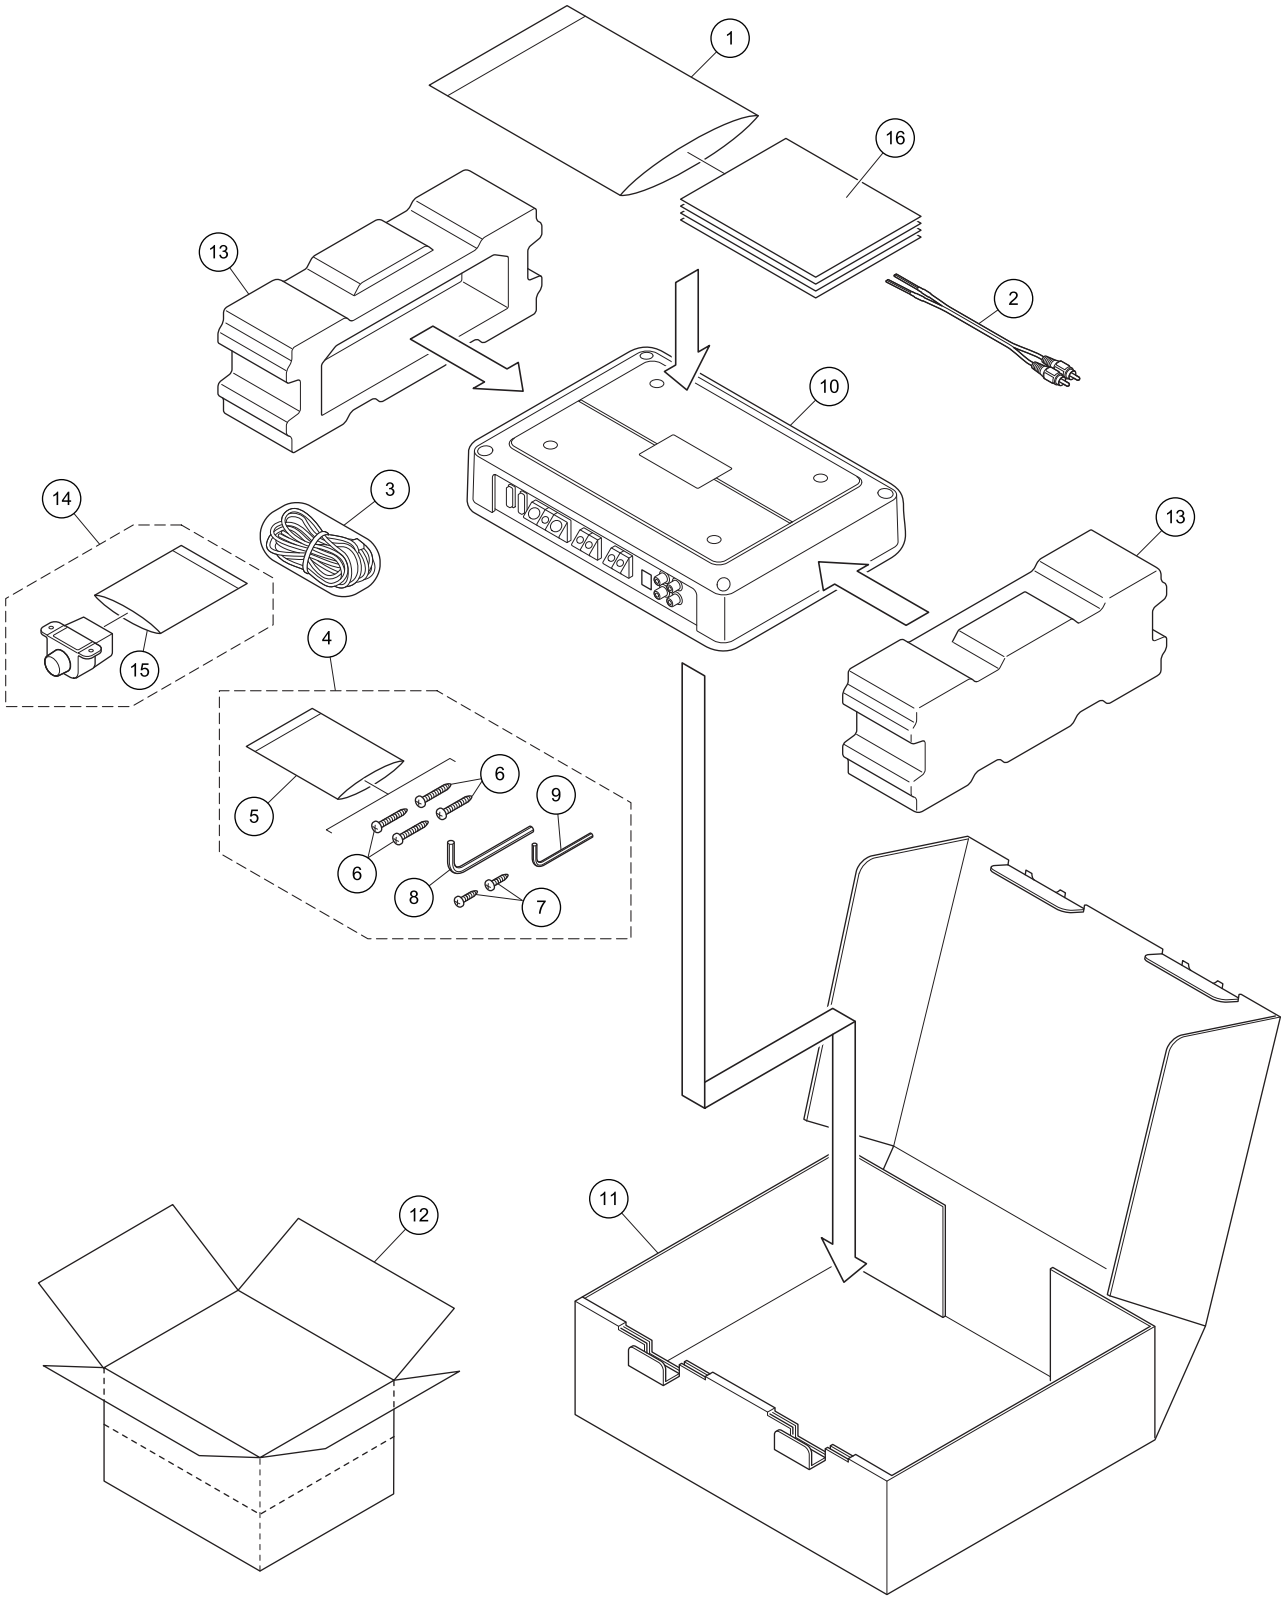

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Polyethylene Bag	CEG1116
	2	Cord Assy	YDE5010
	3	Cord Assy	YDP5015
	4	Screw Assy	YEA5034
*	5	Polyethylene Sheet	CNM4338
	6	Screw	YBA5003
	7	Screw	YBA5004
	8	Shaft	YLP5003
	9	Shaft	YLP5004
	10-1	Polyethylene Bag	See Contrast table(2)
	10-2	Packing Sheet	YEG5007
	11	Unit Box	See Contrast table(2)
	12	Contain Box	See Contrast table(2)
	13	Protector	YHP5045
	14	Remote Control Assy	See Contrast table(2)
*	15	Polyethylene Bag	CEG1171
*	16-1	Warranty Card	See Contrast table(2)
	16-2	Owner's Manual	See Contrast table(2)

(2) CONTRAST TABLE

PRS-D1200M/XS/UC, PRS-D1200M/XS/EW5, PRS-D1200M/XS/ES and PRS-D1200M/XS/CN5 are constructed the same except for the following:

Mark	No.	Description	PRS-D1200M/XS/UC	PRS-D1200M/XS/EW5	PRS-D1200M/XS/ES	PRS-D1200M/XS/CN5
	10-1	Polyethylene Bag	YEG5004	YEG5003	YEG5003	YEG5003
	11	Unit Box	YHG5416	YHG5417	YHG5418	YHG5419
	12	Contain Box	YHL5416	YHL5417	YHL5418	YHL5419
	14	Remote Control Assy	CXC4064	CXC4064	CXC4064	YXC5056
*	16-1	Warranty Card	CRY1070	CRY1265	Not used	ARY7046
	16-2	Owner's Manual	YRD5194	YRD5195	YRD5196	YRB5080

Owner's Manual,Installation Manual

Part No.	Language
YRD5194	English, French, Spanish
YRD5195	English, Spanish, German, French, Italian, Dutch, Russian
YRD5196	English, Spanish, Portuguese(B), Arabic
YRB5080	Simplified Chinese

9.2 EXTERIOR

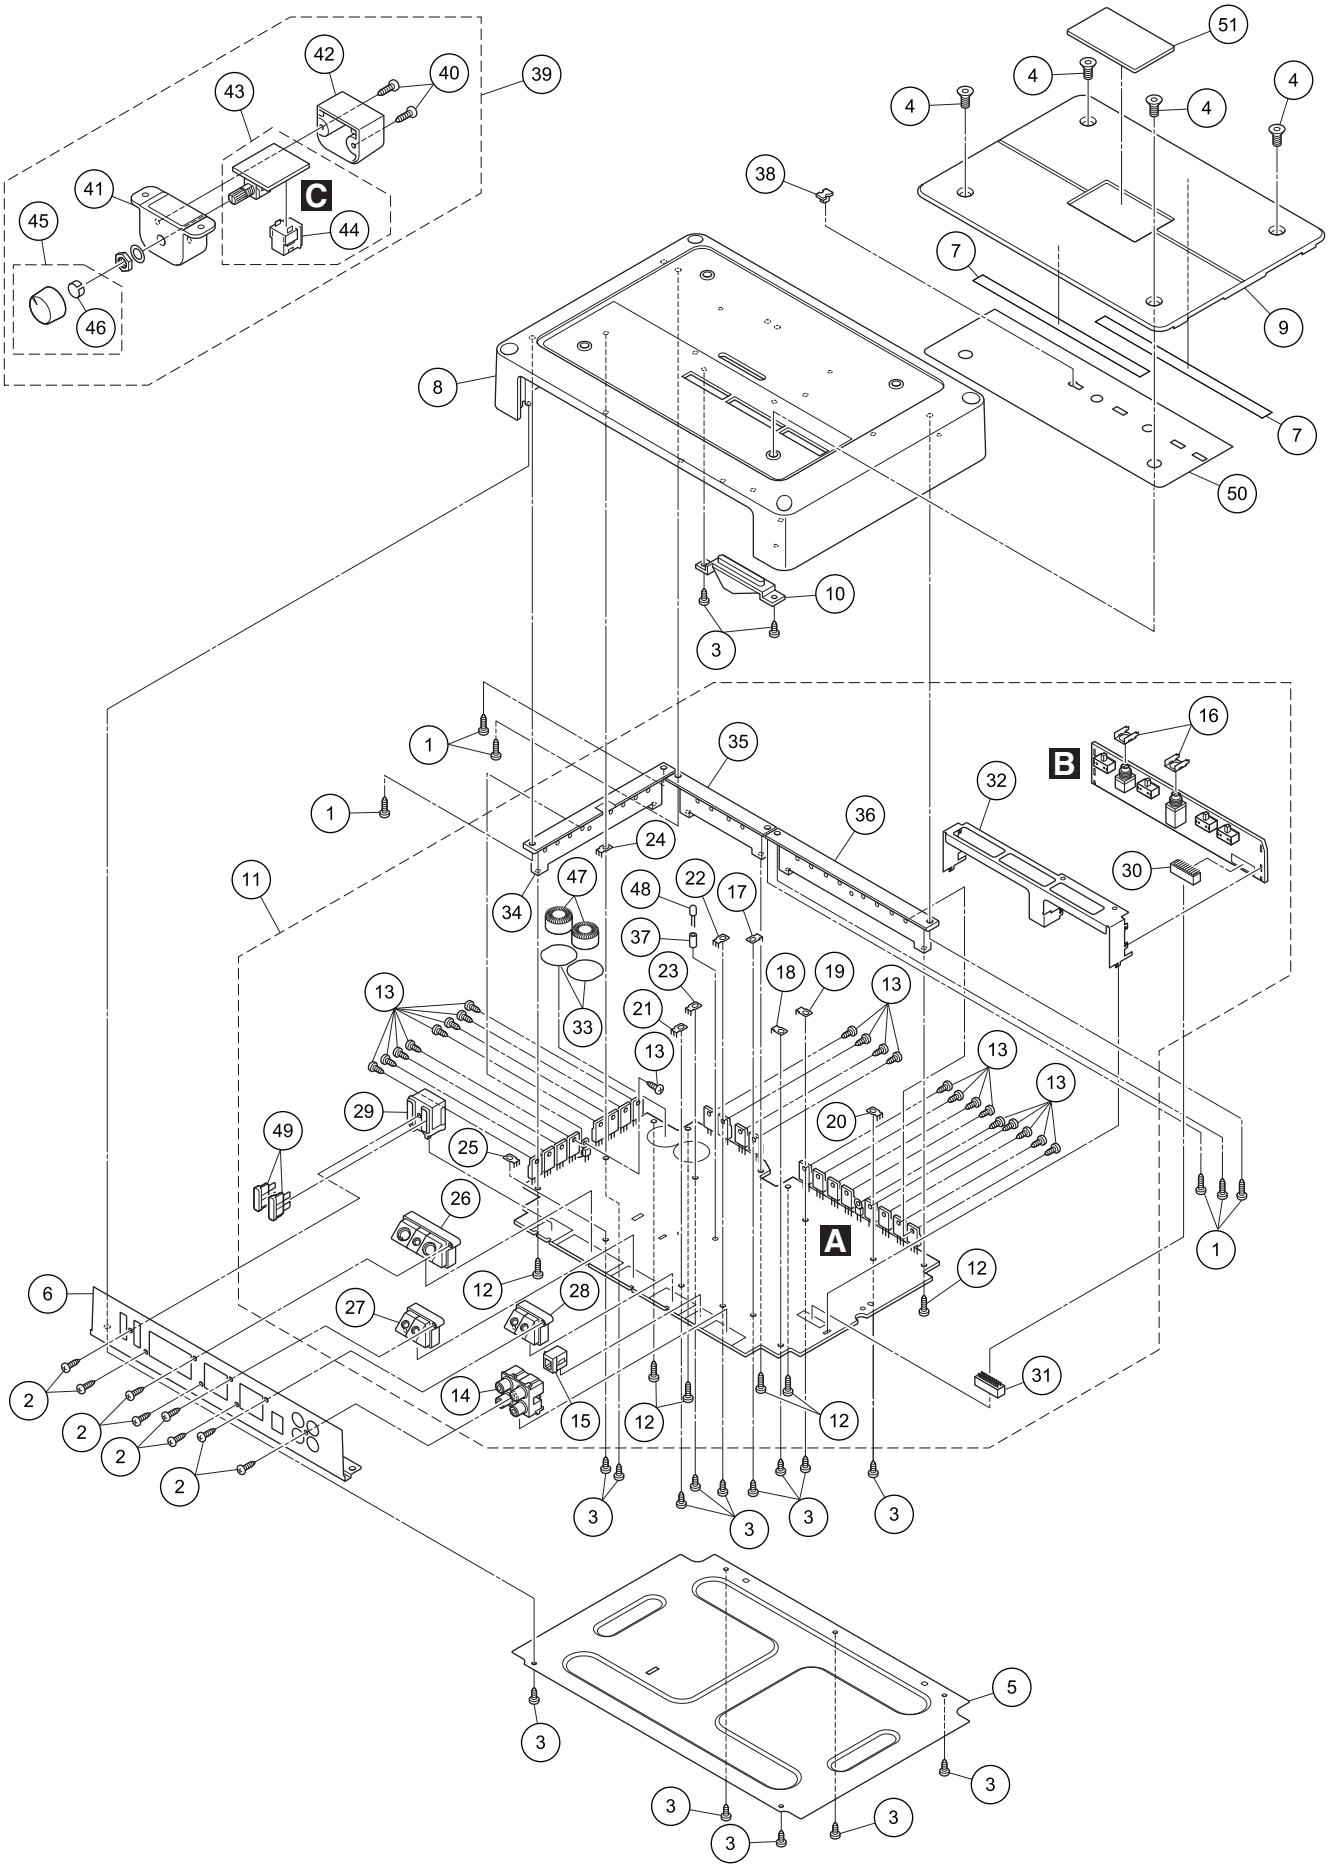
A
B
C
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BBZ30P100FTB
	2	Screw	BPZ30P100FTB
	3	Screw(M3 x 8)	CBA2011
	4	Screw	YBA5002
	5	Case	YNB5042
	6	Panel	YNB5043
	7	Spacer	YNN5009
	8	Heat Sink	YNR5108
	9	Cover	YNR5113
	10	Lighting Conductor	YNV5164
	11	Amp Unit	YWH5029
	12	Screw	BBZ30P080FSN
	13	Screw(M3 x 8)	CBA2011
	14	Pin Jack(CN201)	CKB1079
	15	Connector(CN241)	CKS4962
	16	Holder	CND2466
	17	Terminal(CN105)	VNF1084
	18	Terminal(CN202)	VNF1084
	19	Terminal(CN301)	VNF1084
	20	Terminal(CN302)	VNF1084
	21	Terminal(CN303)	VNF1084
	22	Terminal(CN304)	VNF1084
	23	Terminal(CN601)	VNF1084
	24	Terminal(CN901)	VNF1084
	25	Terminal(CN905)	VNF1084
	26	Terminal(CN906)	YKE5020
	27	Terminal(CN305)	YKE5021
	28	Terminal(CN306)	YKE5021
	29	Fuse Holder	YKR5002
	30	Connector(CN101)	YKS5008
	31	Connector(CN103)	YKS5009
	32	Holder	YND5020
	33	Insulator	YNM5045
	34	Sub Heatsink	YNR5064
	35	Sub Heatsink	YNR5065
	36	Sub Heatsink	YNR5066
	37	Spacer	YNS5118
	38	Plate Unit	YXA5258
	39	Remote Control Assy	See Contrast table(2)
	40	Screw	BPZ20P100FTB
	41	Grille	CNS8140
	42	Cover	CNS8141
	43	Remote Control Unit	CWM9848
	44	Connector(CN1351)	CKS4962
	45	Knob Unit	CXC4335
	46	Spring	CBL1692
	47	Choke Coil(L601, L602)	YTH5007
	48	LED(D906)	NSPB346BS-5859
⚠	49	Fuse(FU901, FU902) (40 A)	CEK1332
	50	Plate	YAH5048
*	51	Badge	See Contrast table(2)

(2) CONTRAST TABLE

PRS-D1200M/XS/UC, PRS-D1200M/XS/EW5, PRS-D1200M/XS/ES and PRS-D1200M/XS/CN5 are constructed the same except for the following:

Mark	No.	Description	PRS-D1200M/XS/UC	PRS-D1200M/XS/EW5	PRS-D1200M/XS/ES	PRS-D1200M/XS/CN5
	39	Remote Control Assy	CXC4064	CXC4064	CXC4064	YXC5056
*	51	Badge	YAH5057	YAH5058	YAH5058	YAH5058

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V
- *The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.*

Unit Number : YWH5029
Unit Name : Amp Unit
Unit Number : CWM9848
Unit Name : Remote Control Unit

Amp Unit
Consists of
Amp PCB
Switch PCB

A B
Unit Number : YWH5029
Unit Name : Amp Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 111	(A,28,127) IC	NJM2068MD
IC 112	(A,28,142) IC	NJM2068MD
IC 131	(A,30,95) IC	NJM2068MD
IC 141	(A,19,65) IC	NJM2068MD
IC 151	(A,28,54) IC	NJM2068MD
IC 161	(A,20,26) IC	NJM2068MD
IC 162	(A,28,33) IC	NJM2068MD
IC 201	(A,252,58) IC	NJM2068MD
IC 221	(A,261,58) IC	NJM2068MD
IC 241	(A,222,58) IC	MAX309ESE
IC 301	(A,250,107) IC	TDA7570
IC 431	(A,143,90) IC	NJM2903M
IC 451	(A,154,90) IC	NJM2068MD
IC 901	(B,108,93) IC	UPC494GS
IC 902	(A,107,58) IC	PA2027A
Q 301	(A,202,119) Transistor	2SC4730
Q 302	(A,278,120) Transistor	2SA1826
Q 303	(A,189,127) Transistor	DTC124EK
Q 304	(A,265,129) Chip Digital Transistor	DTA124EKA
Q 305	(A,202,125) Transistor	2SC4730
Q 306	(A,202,131) Transistor	2SA1826
Q 307	(A,278,132) Transistor	2SC4730
Q 308	(A,278,126) Transistor	2SA1826
Q 309	(A,202,137) Transistor	2SA1826
Q 310	(A,278,138) Transistor	2SC4730
Q 311	(A,263,147) Transistor	2SC1845
Q 312	(A,263,138) Transistor	2SC1845
Q 313	(A,176,142) Transistor	2SA992
Q 314	(A,176,151) Transistor	2SA992
Q 315	(A,154,185) FET	IRFI9640G
Q 316	(A,167,185) FET	IRFI9640G
Q 317	(A,183,185) FET	IRFI9640G
Q 318	(A,197,185) FET	IRFI9640G
Q 319	(A,222,185) FET	IRFI9640G
Q 320	(A,235,185) FET	IRFI640G
Q 321	(A,251,185) FET	IRFI640G
Q 322	(A,265,185) FET	IRFI640G
Q 401	(A,189,85) Chip Digital Transistor	DTA124EKA
Q 402	(A,174,104) Transistor	2SA1576A
Q 404	(A,174,100) Transistor	2SC4081
Q 405	(A,174,96) Transistor	2SC4081
Q 406	(A,171,96) Transistor	2SC4081
Q 407	(A,163,96) Transistor	2SA1576A
Q 408	(A,268,91) Digital Transistor	DTC144EUA
Q 441	(A,274,88) Transistor	DTC114EK
Q 442	(A,274,92) Transistor	2SA1037K
Q 443	(A,274,96) Transistor	DTC143EK
Q 499	(B,131,76) Chip Transistor	DTC114TUA
Q 601	(A,76,186) Transistor	2SD2395
Q 602	(A,90,185) Transistor	2SB1566
Q 901	(A,7,80) Transistor	FKV550N
Q 902	(A,7,67) Transistor	FKV550N
Q 903	(A,7,54) Transistor	FKV550N
Q 904	(A,7,148) Transistor	FKV550N
Q 905	(A,7,135) Transistor	FKV550N
Q 906	(A,7,122) Transistor	FKV550N
Q 907	(B,91,90) Transistor	2SD1766
Q 908	(B,91,100) Transistor	2SB1188
Q 909	(B,98,100) Transistor	2SB1188
Q 910	(B,98,90) Transistor	2SD1766

Circuit Symbol and No.		Part No.
Q 912	(B,127,92) Transistor	DTC124EK
Q 914	(B,103,71) Transistor	2SA1576A
Q 915	(B,112,67) Chip Transistor	DTC114TUA
Q 916	(B,119,65) Transistor	2SC4081
Q 917	(A,101,66) Chip Transistor	DTA114EUA
Q 918	(A,86,65) Transistor	2SB1243
Q 919	(A,104,66) Chip Transistor	DTC114TUA
Q 920	(B,119,48) Transistor	2SC4081
Q 921	(B,132,48) Chip Transistor	DTC124EUA
Q 922	(B,124,48) Transistor	2SA1576A
Q 923	(B,128,48) Transistor	2SC4081
Q 924	(A,7,92) Transistor	FKV550N
Q 925	(A,7,161) Transistor	FKV550N
D 100	Diode	UDZS16(B)
D 203	(A,236,32) Diode	ERA15-02VH
D 204	(A,240,32) Diode	ERA15-02VH
D 242	(A,226,50) Diode	UDZS16(B)
D 301	(A,227,111) Diode	MA111
D 302	(A,227,107) Diode	MA111
D 303	(A,191,123) Diode	MTZJ8R2(B)
D 304	(A,268,125) Diode	MTZJ8R2(B)
D 305	(A,263,142) Diode	MTZJ33(B)
D 306	(A,176,146) Diode	MTZJ33(B)
D 307	(A,174,170) Diode	FML22S
D 308	(A,195,170) Diode	FML22S
D 309	(A,224,171) Diode	FML22S
D 401	(A,187,93) Diode	MTZJ24(B)
D 402	(A,190,101) Diode	MTZJ30(B)
D 403	(A,167,88) Diode	MA111
D 404	(A,160,102) Diode	MTZJ24(B)
D 431	(A,144,85) Diode	MA111
D 441	(A,277,96) Diode	MA111
D 442	(A,274,103) Diode	MTZJ3R9(B)
D 443	(B,280,83) Diode	MA111
D 451	(B,155,87) Diode	1SS355
D 452	(A,155,85) Diode	1SS355
D 453	(A,153,85) Diode	1SS355
D 454	(B,152,87) Diode	1SS355
D 499	(B,157,101) Diode	MA111
D 601	(B,77,173) Diode	UDZS16(B)
D 602	(B,86,175) Diode	UDZS16(B)
D 603	(A,46,186) Diode	FML22S
D 604	(A,59,186) Diode	FML22R
D 698	(B,34,129) Diode	RR274EA-400
D 699	(B,39,127) Diode	RR274EA-400
D 903	(A,102,74) Diode	DAN202U
D 904	(A,99,74) Diode	DAN202U
D 905	(B,112,72) Diode	MA111
D 906	(A,148,99) LED	NSPB346BS-5859
D 907	(A,123,50) Diode	MA111
D 908	(B,90,56) Diode	UDZS18(B)
D 909	(A,85,56) Diode	ERA15-02VH
D 910	(B,281,63) Diode	DAN202U
D 911	(A,89,56) Diode	ERA15-02VH
D 912	(A,54,57) Diode	RM4Z-LFJ4
D 913	(B,128,39) Diode	UDZS7R5(B)
ZNR201	(B,242,17) Surge Protector	CSA30-201N
ZNR202	(B,248,17) Surge Protector	CSA30-201N
ZNR203	(B,239,17) Surge Protector	CSA30-201N
ZNR204	(B,227,17) Surge Protector	CSA30-201N

Circuit Symbol and No.		Part No.
L 201	(A,257,35) Ferri-Inductor	CTF1007
L 202	(A,261,35) Ferri-Inductor	CTF1007
L 211	(A,245,59) Ferri-Inductor	CTF1007
L 301	(A,229,138) Choke Coil 18.25 uH	YTH5005
L 601	(A,35,157) Choke Coil 220 uH	YTH5007
L 602	(A,65,158) Choke Coil 220 uH	YTH5007
L 901	(A,36,61) Choke Coil 50 uH	CTH1341
T 901	(A,57,104) Transformer	YTT5005
TH901	(A,210,184) Thermistor	CCX1013
TH902	(A,18,100) Thermistor	CCX1013
TH903	(A,81,83) Thermistor	CCX1064
TH904	(A,210,134) Thermistor	CCX1064
S 101	(A,11,147) Switch(POWER MODE)	CSH1021
S 111	(A,11,124) Slide Switch(INPUT)	CSH1042
S 141	(A,11,65) Switch(SUBSONIC)	CSH1021
S 161	(A,11,20) Switch(MODE SELECT)	CSH1029
S 901	(A,93,77) Switch(BFC)	HSH-156
VR131	(A,15,93) Potentiometer 20 kohm(E)	CCS1266
VR161	(A,15,41) Potentiometer 10 kohm(A)	CCS1265
VR301	(A,223,110) Semi-fixed 10 kohm(B)	CCP1448
⚠FU221	(A,243,67) Fuse 3 A	CEK1286
⚠FU901	Fuse 40 A	CEK1332
⚠FU902	Fuse 40 A	CEK1332

RESISTORS

R 101	(A,12,170)	RS1/16S104J
R 111	(A,11,111)	RD1/4PU683J
R 112	(A,11,137)	RD1/4PU683J
R 113	(A,13,108)	RS1/16S471J
R 114	(B,16,150)	RS1/16S471J
R 115	(B,22,122)	RS1/16S223J
R 116	(B,22,139)	RS1/16S223J
R 117	(A,31,133)	RS1/16S1002D
R 118	(A,32,146)	RS1/16S1002D
R 119	(A,32,129)	RS1/16S1002D
R 120	(A,32,140)	RS1/16S1002D
R 121	(A,28,121)	RS1/16S1002D
R 122	(A,28,136)	RS1/16S1002D
R 123	(B,24,122)	RS1/16S1002D
R 124	(B,24,138)	RS1/16S1002D
R 125	(A,28,118)	RS1/16S222J
R 126	(A,28,133)	RS1/16S222J
R 131	(B,16,98)	RS1/16S222J
R 132	(B,16,100)	RS1/16S222J
R 133	(B,12,80)	RS1/16S222J
R 141	(A,21,71)	RS1/16S153J
R 142	(A,18,71)	RS1/16S223J
R 143	(A,20,59)	RS1/16S682J
R 144	(A,17,59)	RS1/16S473J
R 151	(A,22,50)	RS1/16S331J
R 152	(A,32,57)	RS1/16S273J
R 153	(A,22,48)	RS1/16S222J
R 154	(A,26,48)	RS1/16S473J
R 155	(A,28,48)	RS1/16S182J
R 156	(A,32,53)	RS1/16S101J
R 161	(B,25,32)	RS1/16S222J
R 162	(B,23,32)	RS1/16S391J
R 163	(A,22,32)	RS1/16S682J
R 164	(A,20,35)	RS1/16S202J

Circuit Symbol and No.		Part No.
R 165	(A,25,28)	RS1/16S472J
R 166	(A,25,25)	RS1/16S472J
R 167	(B,29,40)	RS1/16S222J
R 168	(B,27,40)	RS1/16S101J
R 169	(A,29,39)	RS1/16S822J
R 170	(A,27,40)	RS1/16S153J
R 171	(B,21,32)	RS1/16S152J
R 211	(B,248,41)	RS1/16S471J
R 212	(B,250,53)	RS1/16S223J
R 213	(A,256,58)	RS1/16S1002D
R 214	(A,255,64)	RS1/16S1002D
R 215	(A,252,64)	RS1/16S1002D
R 216	(A,249,62)	RS1/16S1002D
R 221	(B,254,41)	RS1/16S471J
R 222	(A,265,61)	RS1/16S472J
R 241	(B,224,47)	RS1/16S472J
R 242	(A,222,49)	RS1/16S102J
R 243	(A,224,49)	RS1/16S102J
R 244	(A,217,51)	RS1/16S473J
R 245	(B,224,52)	RS1/16S473J
R 246	(A,213,68)	RS1/16S473J
R 247	(A,218,67)	RS1/16S104J
R 248	(A,219,67)	RS1/16S122J
R 249	(A,225,65)	RS1/16S471J
R 250	(A,227,65)	RS1/16S101J
R 301	(A,226,105)	RS1/16S472J
R 302	(A,222,114)	RS1/16S472J
R 303	(A,226,112)	RS1/16S153J
R 304	(A,226,108)	RS1/16S203J
R 305	(A,238,95)	RS1/16S101J
R 306	(A,238,98)	RS1/16S103J
R 307	(A,261,125)	RS1/2PMF123J
R 309	(A,277,113)	RD1/4PU102J
R 310	(A,277,110)	RD1/4PU561J
R 311	(A,240,121)	RS1/16S101J
R 312	(B,265,114)	RS1/16S101J
R 313	(A,189,133)	RD1/4PU183J
R 314	(A,263,133)	RD1/4PU183J
R 315	(B,190,116)	RS1/16S103J
R 316	(B,265,118)	RS1/16S103J
R 317	(A,193,132)	RS1/2PMF241J
R 318	(A,210,123)	RS1/2PMF221J
R 319	(A,287,123)	RS1/2PMF221J
R 320	(A,270,133)	RS1/2PMF241J
R 321	(B,269,141)	RS1/16S393J
R 322	(B,180,145)	RS1/16S393J
R 323	(A,194,148)	RS2LMF151J
R 324	(A,212,157)	RD1/4PU0R0J
R 325	(A,216,157)	RD1/4PU100J
R 326	(A,287,167)	RD1/4PU100J
R 327	(A,283,167)	RD1/4PU0R0J
R 328	(A,283,153)	RS2LMF121J
R 329	(A,275,143)	RS1/2PMF223J
R 330	(A,208,157)	RS1/2PMF4R7J
R 331	(A,287,136)	RS1/2PMF4R7J
R 332	(A,188,143)	RS1/2PMF223J
R 333	(A,212,166)	RD1/4PU104J
R 334	(A,272,169)	RD1/4PU104J
R 335	(B,203,158)	RS1/16S121J
R 336	(A,208,169)	RD1/4PU272J

Circuit Symbol and No.			Part No.
R 337	(A,164,176)		RS1/2PMF100J
R 338	(A,182,176)		RS1/2PMF100J
R 339	(A,187,176)		RS1/2PMF100J
R 340	(A,203,176)		RS1/2PMF100J
R 341	(A,216,176)		RS1/2PMF100J
R 342	(A,241,176)		RS1/2PMF100J
R 343	(A,254,176)		RS1/2PMF100J
R 344	(A,258,176)		RS1/2PMF100J
R 345	(A,262,169)		RD1/4PU272J
R 346	(B,280,151)		RS1/16S121J
R 347	(A,203,159)	10 mohm	YCN5005
R 348	(A,277,157)	10 mohm	YCN5005
R 349	(A,246,167)		RS2PMF220J
R 350	(A,137,38)		RD1/4PU473J
R 351	(A,149,53)		RS2LMF100J
R 352	(A,169,53)		RS2LMF100J
R 353	(A,149,58)		RS2LMF100J
R 354	(A,169,58)		RS2LMF100J
R 355	(B,251,83)		RS1/16S222J
R 357	(A,203,143)		RS2LMF151J
R 358	(A,288,153)		RS2LMF121J
R 401	(A,146,85)		RS1/16S473J
R 402	(A,190,93)		RD1/4PU473J
R 403	(A,187,101)		RD1/4PU393J
R 404	(A,180,102)		RD1/4PU122J
R 405	(A,177,102)		RD1/4PU223J
R 406	(A,167,101)		RS1/2PMF822J
R 407	(A,171,102)		RD1/4PU103J
R 408	(A,171,88)		RD1/4PU472J
R 409	(A,163,102)		RD1/4PU103J
R 410	(A,174,88)		RD1/4PU822J
R 411	(A,266,90)		RS1/16S101J
R 431	(B,146,108)		RS1/16S113J
R 432	(B,141,108)		RS1/16S184J
R 433	(B,137,108)		RS1/16S163J
R 434	(B,144,85)		RS1/16S473J
R 435	(B,146,85)		RS1/16S222J
R 436	(B,146,93)		RS1/16S222J
R 437	(B,142,85)		RS1/16S473J
R 438	(B,140,85)		RS1/16S163J
R 439	(B,126,108)		RS1/16S152J
R 440	(B,131,108)		RS1/16S204J
R 441	(A,281,95)		RD1/4PU102J
R 442	(A,284,103)		RD1/4PU223J
R 443	(A,284,95)		RD1/4PU202J
R 444	(A,282,89)		RD1/4PU222J
R 445	(A,282,86)		RD1/4PU333J
R 451	(B,160,94)		RS1/16S563J
R 452	(B,158,94)		RS1/16S103J
R 453	(B,157,86)		RS1/16S563J
R 454	(B,152,81)		RS1/16S333J
R 455	(B,155,94)		RS1/16S153J
R 456	(B,152,94)		RS1/16S563J
R 457	(B,150,86)		RS1/16S563J
R 458	(B,150,94)		RS1/16S103J
R 459	(A,151,84)		RS1/16S103J
R 498	(B,136,79)		RS1/16S101J
R 601	(A,79,180)		RD1/4PU222J
R 602	(A,92,180)		RD1/4PU222J
R 603	(A,163,159)		RS2PMF220J

Circuit Symbol and No.		Part No.
R 604	(A,158,166)	RS2PMF220J
R 605	(A,76,134)	RD1/2PM220J
R 606	(A,56,138)	RD1/2PM220J
R 607	(A,67,134)	RD1/2PM220J
R 608	(A,178,111)	RD1/2PM102J
R 901	(A,24,68)	RD1/2PM220J
R 902	(A,29,122)	RD1/2PM220J
R 903	(A,16,82)	RD1/2PM121J
R 904	(A,16,70)	RD1/2PM121J
R 905	(A,16,63)	RD1/2PM121J
R 906	(A,13,148)	RD1/2PM121J
R 907	(A,16,138)	RD1/2PM121J
R 908	(A,16,129)	RD1/2PM121J
R 909	(B,91,105)	RS1/16S472J
R 910	(B,99,105)	RS1/16S472J
R 911	(B,103,103)	RS1/8S472J
R 912	(B,105,103)	RS1/8S472J
R 914	(B,114,107)	RS1/16S154J
R 915	(B,121,98)	RS1/16S273J
R 916	(B,115,102)	RS1/16S134J
R 917	(B,111,102)	RS1/16S103J
R 918	(B,120,89)	RS1/16S472J
R 919	(B,124,89)	RS1/16S472J
R 920	(B,122,89)	RS1/16S472J
R 921	(B,101,74)	RS1/16S272J
R 922	(B,99,74)	RS1/16S272J
R 923	(B,95,72)	RS1/16S272J
R 924	(B,104,75)	RS1/16S272J
R 925	(B,97,85)	RS1/16S105J
R 926	(B,114,85)	RS1/16S242J
R 927	(B,117,83)	RS1/16S0R0J
R 928	(B,116,79)	RS1/16S273J
R 929	(B,105,79)	RS1/16S153J
R 930	(B,114,83)	RS1/16S182J
R 931	(B,112,78)	RS1/16S101J
R 932	(B,111,75)	RS1/16S362J
R 933	(B,105,68)	RS1/16S223J
R 934	(B,106,65)	RS1/16S103J
R 935	(B,114,73)	RS1/16S392J
R 936	(B,102,65)	RS1/16S223J
R 937	(B,97,65)	RS1/16S223J
R 938	(A,138,72)	RD1/4PU271J
R 939	(A,141,72)	RD1/4PU271J
R 940	(A,122,56)	RD1/4PU101J
R 943	(A,125,56)	RD1/4PU472J
R 944	(A,90,65)	RD1/4PU221J
R 945	(A,93,65)	RD1/4PU152J
R 946	(A,97,65)	RS1/16S223J
R 947	(A,140,85)	RS1/16S151J
R 948	(B,114,48)	RS1/16S472J
R 949	(B,116,48)	RS1/16S0R0J
R 950	(B,119,44)	RS1/16S104J
R 951	(B,108,48)	RS1/16S682J
R 952	(B,97,50)	RS1/16S682J
R 953	(B,106,56)	RS1/16S103J
R 954	(B,135,48)	RS1/16S683J
R 955	(B,92,50)	RS1/16S0R0J
R 956	(B,124,44)	RS1/16S222J
R 957	(B,122,45)	RS1/16S472J
R 958	(B,129,42)	RS1/16S103J
R 959	(B,128,42)	RS1/16S103J
R 960	(B,122,41)	RS1/16S473J
R 961	(A,109,36)	RD1/4PU222J
R 962	(A,16,95)	RD1/2PM121J
R 963	(A,17,148)	RD1/2PM121J
R 996	(B,121,100)	RS1/16S124J
R 997	(B,121,102)	RS1/16S203J
R 998	(B,110,108)	RS1/16S472J
R 999	(B,111,106)	RS1/16S473J

CAPACITORS

C 101	(A,19,168)	CEAT100M50
C 102	(A,19,161)	CEAT100M50
C 111	(A,20,130)	CEAT100M50
C 112	(A,20,139)	CEAT100M50
C 113	(B,18,123)	CCSRCH471J50
C 114	(B,18,150)	CCSRCH471J50
C 115	(A,20,122)	CEAT100M50
C 116	(A,20,150)	CEAT100M50
C 117	(A,25,132)	CKSRYB103K50
C 118	(A,25,147)	CKSRYB103K50
C 119	(A,32,126)	CCSRCH271J50
C 120	(A,32,143)	CCSRCH271J50
C 121	(A,28,120)	CCSRCH271J50
C 122	(A,28,135)	CCSRCH271J50
C 123	(B,24,127)	CKSRYB472K50
C 124	(B,24,142)	CKSRYB472K50
C 125	(A,31,121)	CKSRYB103K50
C 126	(A,31,136)	CKSRYB103K50
C 131	(A,10,103)	CFTLA154J50
C 132	(A,20,102)	CFTLA154J50
C 133	(A,28,101)	CKSRYB103K50
C 134	(A,32,86)	CKSRYB103K50
C 135	(A,20,83)	CFTLA154J50
C 136	(A,11,83)	CFTLA474J50
C 141	(A,21,76)	CFTLA474J50
C 142	(A,11,76)	CFTLA474J50
C 143	(A,29,75)	CFTLA474J50
C 144	(A,28,66)	CFTLA474J50
C 145	(A,17,71)	CKSRYB103K50
C 146	(A,23,61)	CKSRYB103K50
C 151	(A,10,52)	CEAT4R7M50
C 152	(A,19,53)	CFTLA224J50
C 153	(A,27,60)	CKSRYB103K50
C 154	(A,30,48)	CKSRYB103K50
C 155	(A,28,44)	CFTLA273J50
C 161	(A,22,33)	CKSRYB272K50
C 162	(A,18,32)	CKSRYB103K50
C 163	(A,22,20)	CKSRYB103K50
C 164	(A,26,25)	CKSRYB272K50
C 165	(A,29,40)	CKSRYB272K50
C 166	(A,26,40)	CKSRYB103K50
C 167	(A,30,27)	CKSRYB103K50
C 168	(A,11,32)	CFTLA223J50
C 201	(B,260,24)	CKSQYB102K50
C 202	(B,264,42)	CKSQYB102K50
C 203	(B,260,22)	CKSQYB103K50
C 204	(B,264,45)	CKSQYB103K50
C 205	(B,271,59)	CKSQYB103K50

Circuit Symbol and No.		Part No.
C 206	(B,269,59)	CKSQYB102K50
C 211	(B,250,48)	CCSRCH471J50
C 212	(A,253,48)	CEAT100M50
C 213	(A,256,54)	CKSRYB103K50
C 214	(A,255,66)	CKSRYB272K50
C 215	(A,252,66)	CKSRYB272K50
C 216	(A,250,64)	CKSRYB103K50
C 217	(A,245,67)	CKSRYB104K50
C 219	(B,242,58)	CKSQYB103K50
C 221	(A,259,48)	CEAT100M50
C 222	(A,265,58)	CKSRYB272K50
C 223	(A,265,54)	CKSRYB103K50
C 224	(A,261,64)	CKSRYB103K50
C 225	(B,242,48)	CKSQYB102K50
C 226	(B,242,46)	CKSQYB103K50
C 227	(B,238,62)	CKSQYB103K50
C 228	(B,238,60)	CKSQYB102K50
C 229	(B,214,57)	CKSQYB105K16
C 230	(B,241,44)	CKSQYB103K50
C 241	(A,221,46)	CKSQYB102K50
C 242	(A,225,46)	CKSQYB102K50
C 243	(A,217,53)	CKSRYB473K50
C 244	(A,221,53)	CKSRYB103K50
C 245	(A,216,68)	CKSRYB103K50
C 246	(A,213,66)	CKSRYB473K50
C 301	(A,234,92)	CEAT1R0M50
C 302	(A,249,88)	CFTLA104J50
C 303	(A,243,91)	CEAT100M50
C 304	(A,228,88)	CEAT100M50
C 305	(A,238,88)	CEAT100M50
C 306	(A,255,93)	CEAT100M50
C 307	(A,234,100)	CEATR22M50
C 308	(A,262,93)	CEAT1R0M50
C 309	(A,268,96)	CEAT1R0M50
C 310	(A,267,102)	CEAT100M50
C 311	(A,267,109)	CEATR47M50
C 312	(A,261,106)	CKSRYB332K50
C 313	(A,239,108)	CKSRYB103K50
C 314	(A,233,107)	CEAT101M25
C 315	(B,272,111)	CKSRYB223K50
C 316	(A,261,108)	CKSRYB332K50
C 317	(A,262,110)	CKSRYB104K50
C 318	(A,248,118)	CKSRYB332K50
C 319	(A,233,116)	CEAT101M50
C 320	(A,248,120)	CKSRYB224K16
C 321	(A,245,120)	CKSRYB332K50
C 322	(A,241,121)	CKSRYB473K50
C 323	(B,265,116)	CKSRYB473K50
C 324	(B,204,116)	CCSRCH101J50
C 325	(B,275,118)	CCSRCH101J50
C 326	(A,191,118)	CFTLA223J50
C 327	(A,268,121)	CFTLA223J50
C 328	(B,203,160)	CKSRYB224K16
C 329	(A,216,166)	CFTNA104J2A
C 330	(A,268,169)	CFTNA104J2A
C 331	(B,280,156)	CKSRYB224K16
C 332	(B,210,166)	CKSRYB682K50
C 333	(B,264,168)	CKSRYB103K50
C 334	(A,227,157) 1 uF	CCE1035
C 335	(A,227,164) 1 uF	CCE1035

Circuit Symbol and No.		Part No.
C 336	(A,262,156)	CEHAZL101M2A(P45)
C 337	(A,197,157)	CFTNA104J2A
C 338	(A,270,156)	CFTNA104J2A
C 339	(A,189,157)	CEHAZL101M2A(P45)
C 340	(A,237,158)	CQMBA561J2A
C 341	(A,252,134) 4.7 uF	CCE1036
C 342	(A,188,51)	CEAT100M2A
C 343	(A,188,39)	CEAT100M2A
C 344	(A,169,27)	CFTLA103J50
C 345	(A,158,35)	CFTLA103J50
C 346	(B,209,33)	CKSQYB103K50
C 347	(A,158,29)	CFTLA103J50
C 348	(B,207,31)	CKSQYB102K50
C 401	(A,180,93)	CEANP221M10
C 402	(A,138,104)	CEAT220M50
C 403	(A,221,88)	CEAT100M50
C 404	(A,194,94)	CFTNA104J2A
C 405	(A,195,103)	CEANP100M50
C 431	(A,138,98)	CEAT220M50
C 432	(B,148,85)	CKSRYB103K50
C 433	(A,138,89)	CKSRYB103K50
C 434	(A,128,104)	CEANP1R0M50
C 435	(A,128,98)	CEAT470M35
C 441	(A,279,103)	CEAT1R0M50
C 451	(A,159,95)	CKSRYB103K50
C 452	(A,149,89)	CKSRYB103K50
C 453	(A,162,88)	CEAT100M50
C 511	(B,242,60)	CKSQYB102K50
C 601	(A,153,169)	CFTLA104J50
C 602	(A,148,169)	CFTLA104J50
C 603	(B,88,159)	CKSRYB103K50
C 604	(B,91,167)	CKSRYB103K50
C 605	(A,84,158)	CEAT470M35
C 606	(A,94,168)	CEAT470M35
C 607	(B,75,172)	CKSRYB103K50
C 608	(B,83,176)	CKSRYB103K50
C 609	(A,81,169)	CEAT470M35
C 610	(A,88,166)	CEAT470M35
C 611	(A,175,124)	CFTNA104J2A
C 612	(A,158,151)	CFTNA104J2A
C 613	(A,123,124) 3 300 uF/71 V	CCH1703
C 614	(A,107,151) 3 300 uF/71 V	CCH1703
C 615	(A,155,124) 3 300 uF/71 V	CCH1703
C 616	(A,139,151) 3 300 uF/71 V	CCH1703
C 617	(A,71,142)	CQMA102K2E
C 618	(A,61,139)	CQMA102K2E
C 619	(A,69,138)	CQMA102K2E
C 695	(A,32,135)	CEAT470M50
C 696	(A,46,138)	CEAT470M50
C 901	(A,68,68) 6 800 uF/16 V	CCH1468
C 902	(A,68,51) 6 800 uF/16 V	CCH1468
C 903	(A,22,58)	CQMA472J50
C 904	(A,22,125)	CQMA472J50
C 906	(A,117,102)	CFTNA103J2A
C 907	(B,111,104)	CKSRYB104K50
C 908	(A,102,81)	CEAT101M16
C 909	(B,103,87)	CKSRYB103K50
C 910	(A,116,91)	CFTLA474J50
C 911	(A,111,83)	CEANP221M10
C 912	(B,107,83)	CKSRYB102K50

Circuit Symbol and No.		Part No.
C 913	(B,108,84)	CKSRYB472K50
C 914	(A,107,75)	CEAT100M50
C 915	(B,104,65)	CKSRYB103K50
C 916	(B,99,65)	CKSRYB103K50
C 917	(A,147,95)	CKSQYB104K50
C 918	(A,133,56)	CEAT471M25
C 919	(A,109,67)	CEAT220M50
C 920	(A,98,65)	CKSRYB103K50
C 921	(A,115,67)	CEAT220M50
C 922	(B,96,55)	CKSRYB103K50
C 923	(A,94,56)	CEAT101M16
C 924	(B,101,56)	CKSRYB103K50
C 925	(B,103,49)	CKSRYB223K50
C 926	(A,106,48)	CEAT100M50
C 927	(B,110,48)	CKSRYB223K50
C 928	(A,112,48)	CEAT100M50
C 929	(B,132,44)	CKSRYB105K10
C 930	(B,60,49)	CKSQYB103K50
C 931	(B,124,41)	CKSRYB103K50
C 932	(A,100,29)	CKSQYB102K50
C 933	(B,106,26)	CKSQYB102K50
C 934	(A,100,34)	CKSQYB103K50
C 935	(B,103,26)	CKSQYB103K50
C 936	(A,100,32)	CKSQYB104K50
C 937	(B,101,26)	CKSQYB104K50

C

Unit Number : CWM9848
Unit Name : Remote Control Unit

MISCELLANEOUS

Q 1351	(B,22,24) Chip Transistor	DTC114EUA
Q 1352	(B,23,7) Chip Transistor	DTC114EUA
D 1351	(B,13,26) Diode	DAN202U
D 1352	(B,17,7) Diode	DAN202U
D 1366	(B,22,13) Diode	UDZS16(B)
D 1367	(B,29,17) Diode	UDZS16(B)
S 1351	(A,7,12) Rotary Switch (BASS BOOST CONTROL)	CSD1128

RESISTORS

R 1351	(B,16,17)	RS1/16S103J
R 1352	(B,19,19)	RS1/16S102J
R 1353	(B,32,23)	RS1/16S103J
R 1354	(B,32,17)	RS1/16S102J
R 1359	(B,17,10)	RS1/16S102J