

EXPLODED VIEW / PARTS LIST

Main section

Note) Some parts depend on each model. The model name is specified in the description.


NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8076-01	ESCUTCHEON ASSY	1
1-1	716-0778-00	WAVE SCREW(2 x 6)	2
2	331-3461-00	LCD COVER	1
3	379-1248-30	INDICATOR(LCD)	1
4	335-6876-00	COLOR FILTER	1
5	335-6875-00	LCD ILLUMI	1
6	335-6824-00	LCD HOLDER	1
7	-----	SWITCH PWB	1
8	016-0014-09	VR W/SHAFT	2
9	017-0420-43	PILOT LAMP(14V40mA)	7
10	017-0429-22	PILOT LAMP(8V105mA)	2
11	345-5259-00	PROTECTOR	1
12	346-0149-00	LEATHER SHEET	1
13	335-6805-00	DISC GUIDE	1
14	373-1046-10	DIAL COVER	1
15	716-0778-00	WAVE SCREW(2 x 6)	20
16	380-5549-00	KNOB	2
17	320-0588-05	DUSTPROOF COVER	1
18	750-2626-00	SPRING	1
19	345-5196-00	RUBBER SWITCH	1
20	345-5197-00	RUBBER SWITCH	1
21	345-5198-00	RUBBER SWITCH	1
22	-----	MAIN PWB	1


NO.	PART NO.	DESCRIPTION	Q'TY
23	074-1166-01	OUTLET SOCKET	1
24	076-0540-12	PLUG(12P)	2
25	331-3444-10	ANT HOLDER	1
26	331-3458-00	TR HOLDER	1
27	331-3459-00	IC HOLDER	1
28	331-3460-00	CONNECT HOLDER	1
29	941-0213-63	TUNER PACK	1
30	331-3462-00	CASSETTE MECH BRACKET	1
31	930-0792-86	TAPE MECHANISM	1
32	313-1856-00	HEATSINK	1
33	331-3463-01	CD MECH BRACKET	1
34	929-0220-84	CD MECHANISM	1
35	816-2564-02	FLAT WIRE	1
36	335-7120-00	WIRE SUPPORT	1
37	310-1762-00	UPPER CASE	1
38	714-2606-81	MACHINE SCREW(M2.6 x 6)	24
39	716-0878-00	IT SCREW(M2.6 x 5)	7
40	714-2612-81	MACHINE SCREW(M2.6 x 1.2)	2
41	714-2603-81	MACHINE SCREW(M2.6 x 3)	4
42	778-3006-00	TAP SCREW(3 x 6)	2
43	311-1861-01	LOWER CASE	1
44	286-6224-11 286-6225-35	SETPLATE(PS-2680H) SETPLATE(PS-2683H)	1

PS-2680H
PS-2683H


NO.	PART NO.	DESCRIPTION	Q'TY
45	345-5251-00	PROTECTOR	1
46	309-0787-00	ES PLATE	1
47	345-5541-01	CUSHION	1
48	345-5384-00	CUSHION	1
49	074-1194-00	OUTLET SOCKET	1

NO.	PART NO.	DESCRIPTION	Q'TY
50	074-1151-12	OUTLET SOCKET(12P)	2
51	092-0702-00	ANT RECEPT	1
52	074-1192-26	OUTLET SOCKET(26P)	1
53	076-0461-20	PLUG(20P)	1

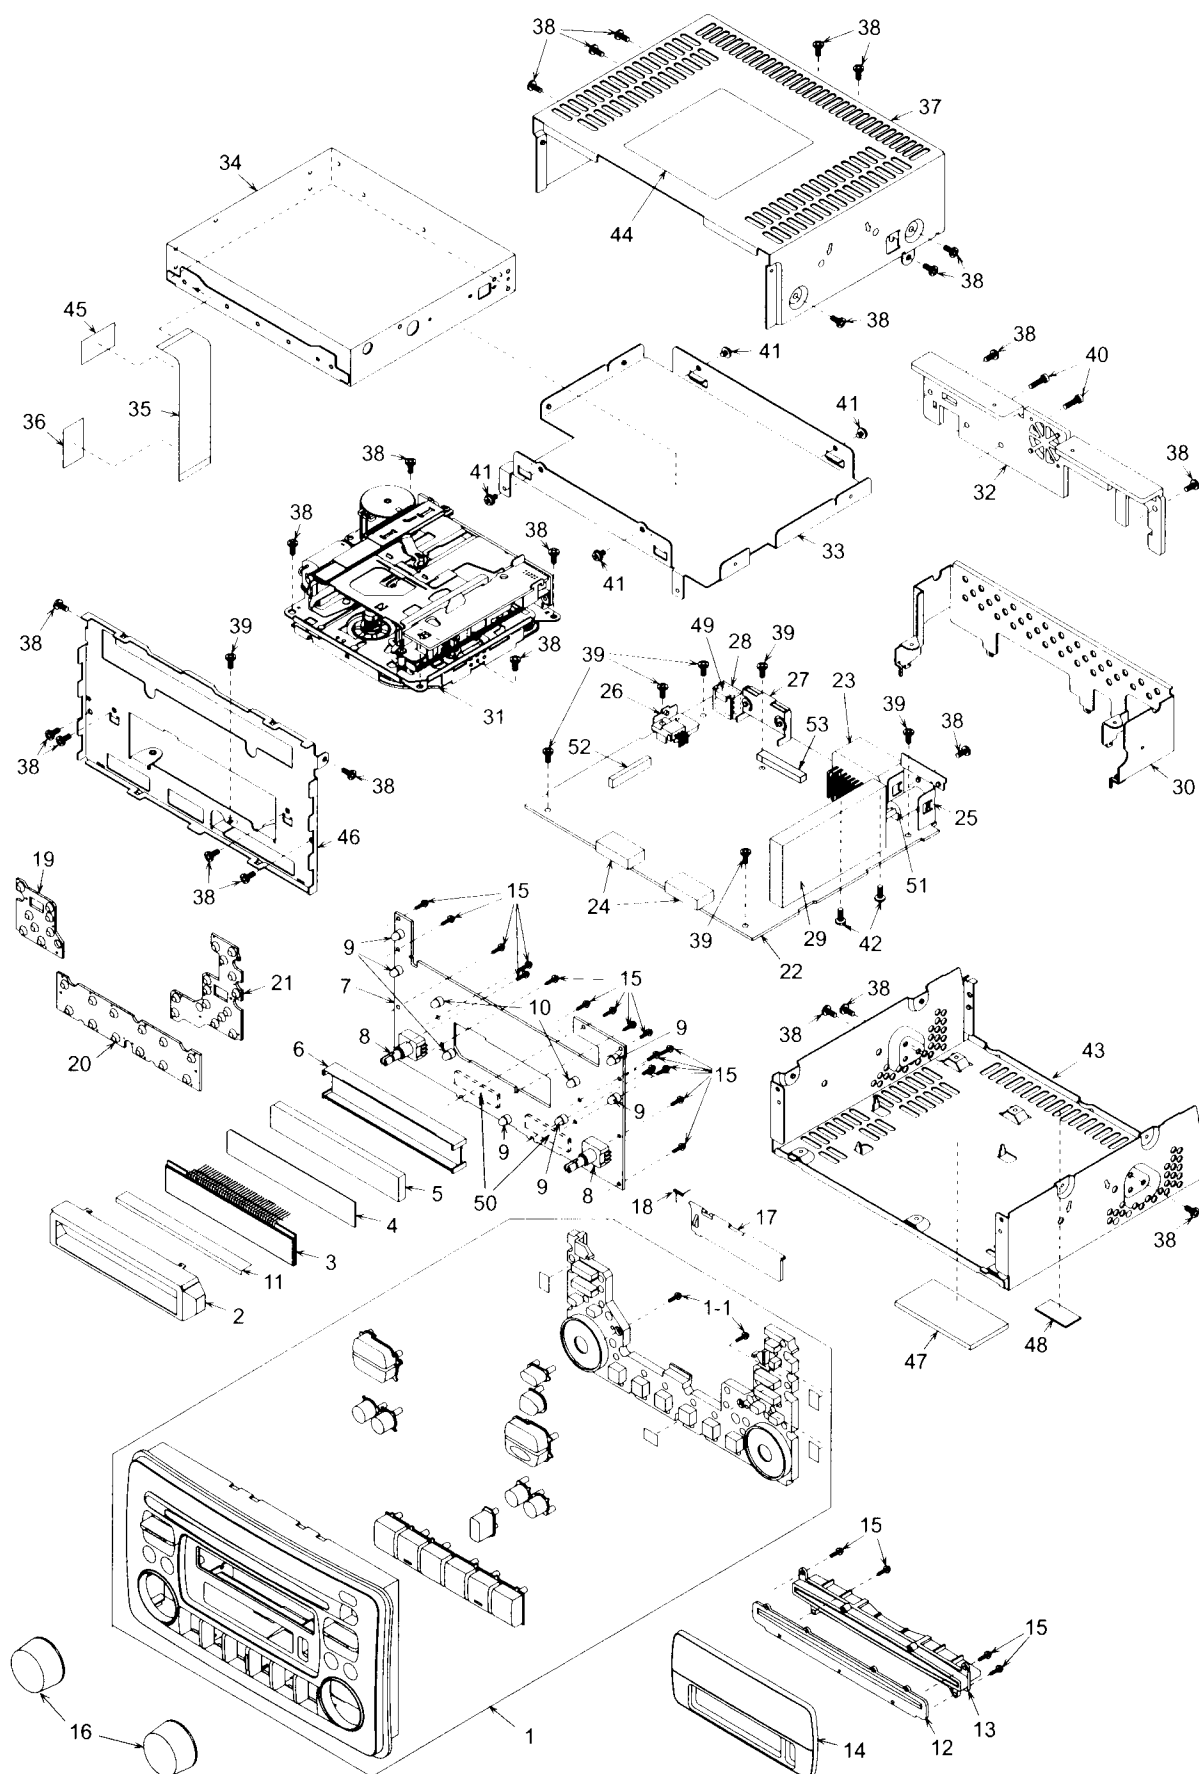

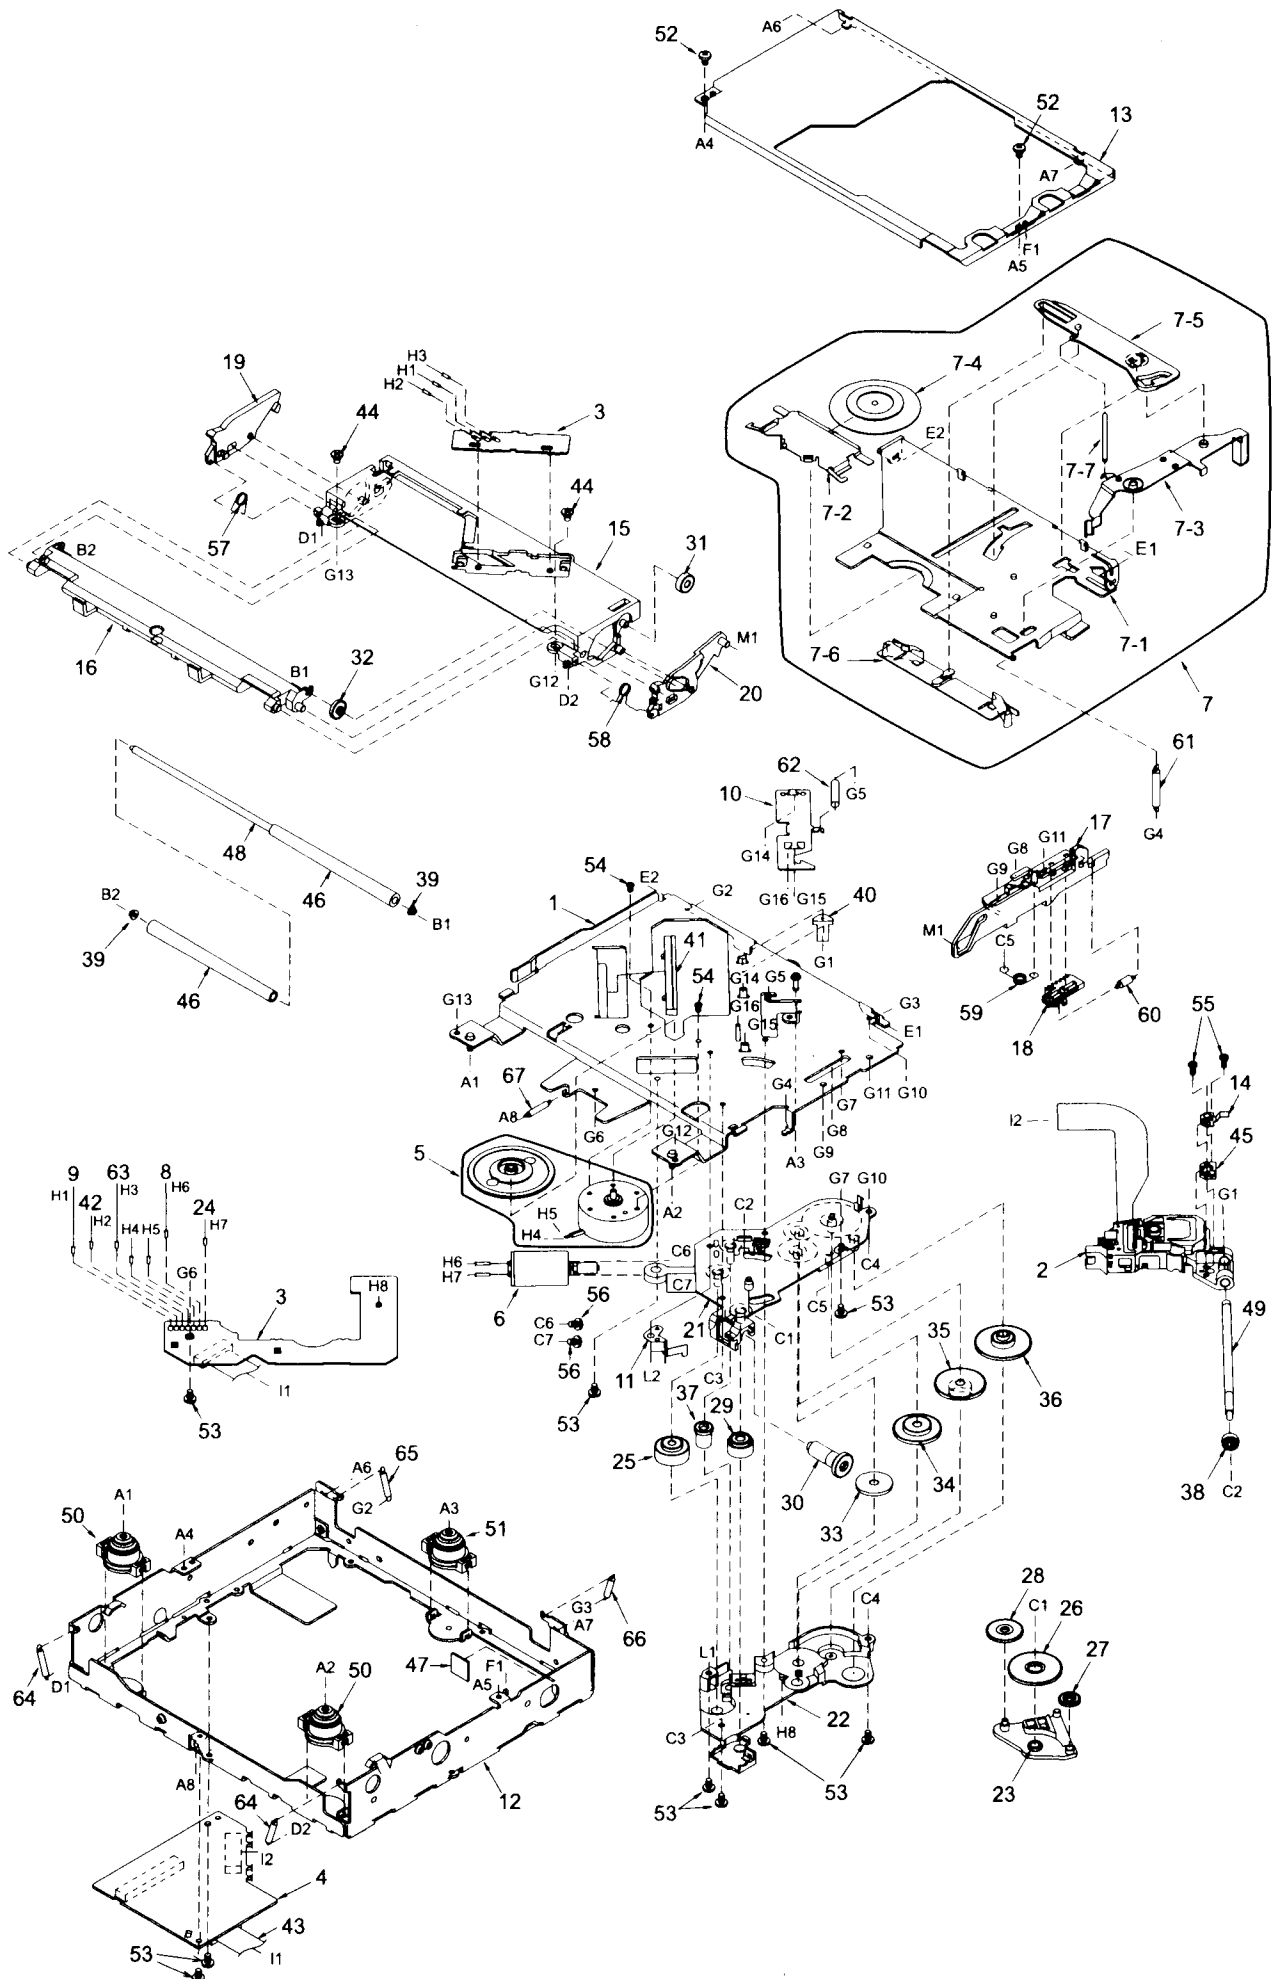

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-26	DRIVE PLATE ASSY	1	31	621-0614-20	ROLLER GEAR C	1
2	969-0060-30	PICK UP UNIT	1	32	621-0615-21	ROLLER GEAR D	1
3	-----	LED PWB	1	33	621-0616-20	POWER GEAR A	1
4	-----	CD PWB	1	34	621-0617-20	POWER GEAR B	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1	35	621-0618-20	POWER GEAR C	1
6	SMA-183-100	MOTOR ASSY(SLED)	1	36	621-0619-20	POWER GEAR D	1
7	HBS-524-100	CLAMPER SUB ASSY	1	37	621-0620-20	THREAD GEAR A	1
7-1	620-1022-26	CLAMPER LINK	1	38	621-0621-20	THREAD GEAR B	1
7-2	620-1023-23	CLAMPER PLATE	1	39	621-1726-20	ROLLER SLEEVE	2
7-3	620-1024-23	SENSOR ARM	1	40	621-0623-23	LS-HOLDER	1
7-4	621-0708-20	CLAMPER RING	1	41	621-0624-22	GUIDE RAIL	1
7-5	621-0626-21	STOPPER LINK	1	42	816-2593-00	LEAD WIRE(PUR)	1
7-6	621-0627-21	DISC STOPPER	1	43	816-2542-01	FLAT WIRE(10P)	1
7-7	750-3471-20	SENSOR SPRING	1	44	716-3473-00	SCREW(M2 x 3)	2
8	803-4906-60	VINYL COAT WIRE(ORG)	1	45	621-1729-20	SH-BASE	1
9	816-2591-00	LEAD WIRE(YEL)	1	46	621-0629-20	LOADING ROLLER	2
10	620-1025-22	ID-LOCK PLATE	1	47	345-8704-20	CUSHION RUBBER	1
11	620-1026-21	SPRING PLATE	1	48	622-1571-21	ROLLER SHAFT	1
12	620-1027-27	LOWER CHASSIS	1	49	624-0018-01	LEAD SCREW	1
13	620-1028-24	UPPER CHASSIS	1	50	629-0081-21	DAMPER F	2
14	966-1722-20	SH-RACK ASSY	1	51	629-0082-21	DAMPER R	1
15	621-0598-27	UPPER GUIDE	1	52	714-2003-81	MACHINE SCREW(M2 x 3)	2
16	621-0718-21	ROLLER GUIDE	1	53	716-1507-00	SCREW(M2 x 3)	9
17	621-0600-26	SHIFT LEVER	1	54	716-1733-00	SCREW(M1.7 x 2.3)	2
18	621-1716-20	RACK	1	55	716-3469-00	SCREW(3 x 4)	2
19	621-0602-22	LOCK ARM L	1	56	716-3446-00	SCREW(M1.4 x 2.5)	2
20	621-1718-20	LOCK ARM R	1	57	750-3465-21	ROLLER SPRING L	1
21	621-0724-21	GEAR BASE	1	58	750-3466-20	ROLLER SPRING R	1
22	621-0605-22	GEAR COVER	1	59	750-3467-21	SHIFT SPRING	1
23	621-1731-20	IDLE CASE	1	60	750-3468-20	RACK SPRING	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1	61	750-3469-20	CLAMPER SPRING	1
25	621-0608-21	SECOND GEAR	1	62	750-3470-20	ID-LOCK SPRING	1
26	621-0609-20	BASE GEAR	1	63	816-2592-00	LEAD WIRE(BLU)	1
27	621-0610-20	IDLE GEAR A	1	64	750-3472-21	DR-SPRING F	2
28	621-0611-20	IDLE GEAR B	1	65	750-3473-20	DR-SPRING RA	1
29	621-0612-21	ROLLER GEAR A	1	66	750-3474-20	DR-SPRING RB	1
30	621-0613-21	ROLLER GEAR B	1	67	750-3475-21	DR-SPRING C	1

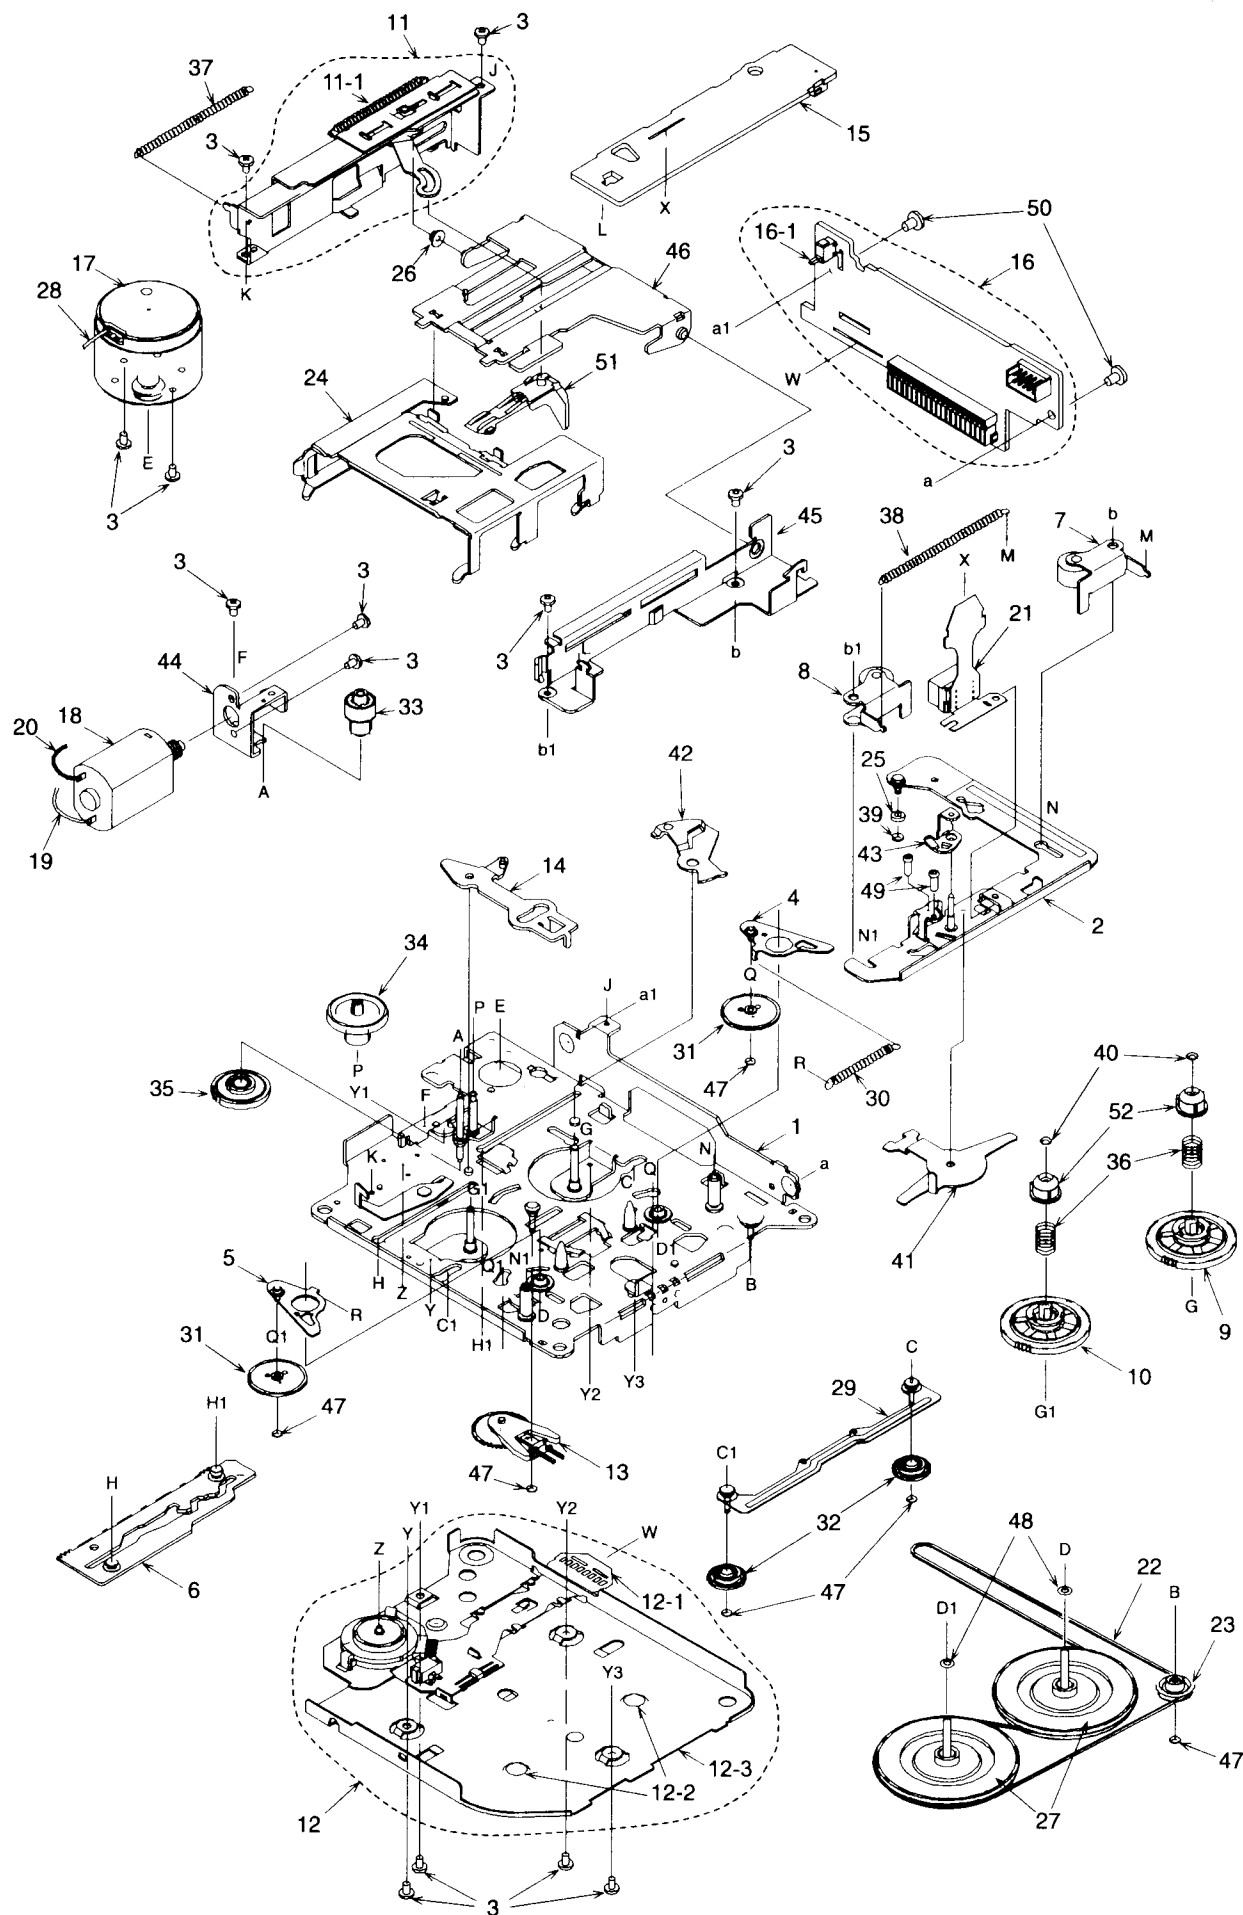

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1	24	606-0093-07	PACK GUIDE	1
2	960-4261-20	HEAD PLATE ASSY	1	25	610-0342-01	HEAD-P-ROLLER	1
3	716-0484-00	SCREW (M2 x 2.5)	13	26	610-0343-00	GUIDE-A-ROLLER	1
4	960-4263-03	IDLER-P-ASSY F	1	27	611-0091-03	FLYWHEEL	2
5	960-4264-03	IDLER-P-ASSY R	1	28	802-4909-60	VINYL COAT WIRE (RED)	1
6	960-4266-20	MODE PLATE ASSY	1	29	960-4262-03	FF/REW-P-ASSY	1
7	960-4269-05	ROLLER ASSY F	1	30	750-3017-02	IDLER-P-SPRING	1
8	960-4270-05	ROLLER ASSY R	1	31	613-0662-00	IDLER GEAR	2
9	960-4348-03	REEL ASSY F	1	32	613-0286-03	FF/REW GEAR	2
10	960-4349-03	REEL ASSY R	1	33	613-0288-01	HELICAL GEAR	1
11	960-4389-03	EJECT SUB ASSY	1	34	613-0289-01	GEAR A	1
11-1	750-3020-01	SW-PLATE SPRING	1	35	613-0337-20	POWER GEAR	1
12	960-4338-09	BOTTOM SUB ASSY	1	36	750-2949-00	SLIDE SPRING	2
12-1	-----	BOTTOM PWB	1	37	750-2947-04	EJECT-P-SPRING	1
12-2	746-0767-00	WASHER	2	38	750-2946-02	PINCH SPRING	1
12-3	960-4295-02	BOTTOM P-ASSY	1	39	746-0762-00	WASHER	1
13	960-4282-06	DETECT SUB ASSY	1	40	746-0761-00	WASHER	2
14	960-4301-02	PLAY LINK ASSY	1	41	630-2597-01	CHANGE LINK	1
15	-----	SIDE PWB	1	42	630-2598-05	EJECT LINK	1
16	990-0713-00	REAR PWB ASSY (WITH COMPONENT)	1	43	630-2600-01	ADJUST LINK	1
16-1	013-3906-00	SWITCH (TAPE IN)	1	44	630-2601-02	MOTOR PLATE	1
17	SMA-168-100	MAIN MOTOR ASSY	1	45	630-2626-06	PWB FRAME	1
18	SMA-169-100	POWER MOTOR ASSY	1	46	630-2642-01	GUIDE ARM	1
19	816-2349-00	LEAD (WHT)	1	47	746-0724-00	WASHER	6
20	806-4914-60	VINYL COAT WIRE (BLU)	1	48	746-0624-00	WASHER	2
21	011-0328-01	HEAD	1	49	716-0833-10	AZIMUTH SCREW(M2 x 5.6)	2
22	602-0118-00	BELT	1	50	716-1676-00	SCREW(M2.6 x 6)	2
23	604-0046-00	TENSION PULLEY	1	51	631-1992-02	PACK STOPPER	1
				52	631-1993-01	SLIDE BUSH	2

ELECTRICAL PARTS LIST

Switch PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF	PL908	017-0420-43	14V40mA	S907	345-5196-00	RUBBER SWITCH
C902	168-4732-78	0.047uF K	PL909	017-0420-43	14V40mA	S908	345-5198-00	RUBBER SWITCH
C903	168-4732-78	0.047uF K	R904	119-0000-05	1/10W 0 ohm JW	S909	345-5198-00	RUBBER SWITCH
C904	168-8212-55	820pF K	R905	119-0000-05	1/10W 0 ohm JW	S910	345-5198-00	RUBBER SWITCH
IC901	051-6000-20	LC75853NW	R906	119-0000-05	1/10W 0 ohm JW	S911	345-5198-00	RUBBER SWITCH
J901	074-1151-12	12P	R907	119-0000-05	1/10W 0 ohm JW	S912	345-5197-00	RUBBER SWITCH
J902	074-1151-12	12P	R910	119-6831-15	1/10W 68k ohm	S913	345-5197-00	RUBBER SWITCH
L901	010-3406-66	22uH	R911	119-0000-05	1/10W 0 ohm JW	S914	345-5197-00	RUBBER SWITCH
LCD901	379-1248-30	INDICATOR(LCD)	R912	119-1021-15	1/10W 1k ohm	S915	345-5197-00	RUBBER SWITCH
PL901	017-0429-22	8V105mA	R913	119-0000-05	1/10W 0 ohm JW	S916	345-5197-00	RUBBER SWITCH
PL902	017-0420-43	14V40mA	R915	119-0000-05	1/10W 0 ohm JW	S917	345-5197-00	RUBBER SWITCH
PL903	017-0429-22	8V105mA	S902	345-5198-00	RUBBER SWITCH	S918	345-5198-00	RUBBER SWITCH
PL904	017-0420-43	14V40mA	S903	345-5198-00	RUBBER SWITCH	VR901	016-0014-09	VR W/SHAFT
PL905	017-0420-43	14V40mA	S904	345-5196-00	RUBBER SWITCH	VR902	016-0014-09	VR W/SHAFT
PL906	017-0420-43	14V40mA	S905	345-5196-00	RUBBER SWITCH	PWB	039-2197-00	PWB(WITHOUT COMPONENT)
PL907	017-0420-43	14V40mA	S906	345-5196-00	RUBBER SWITCH			

Main PWB(B2) section

(Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT	C632	168-1042-78	16V 0.1uF	D304	001-0347-69	MA4180M
BL101	941-0213-63	AM/FM TUNER	C633	168-1042-78	16V 0.1uF	D306	001-0529-25	MA8047-L
C107	168-2232-55	0.022uF K	C634	168-1042-78	16V 0.1uF	D308	001-0347-69	MA4180M
C109	178-4742-78	0.47uF	C635	168-1042-78	16V 0.1uF	D310	001-0516-90	MA111
C113	189-1073-29	10V100uF	C640	168-1022-55	1000pF K	D312	001-0516-90	MA111
C114	168-1042-78	16V 0.1uF	C641	168-1022-55	1000pF K	D314	001-0466-90	S5688B
C115	168-1042-78	16V 0.1uF	C642	168-1022-55	1000pF K	D316	001-0504-36	HZS7 A1L
C116	168-1042-78	16V 0.1uF	C643	168-1022-55	1000pF K	D402	001-0347-40	MA4075L
C117	166-1801-50	18pF CH	C644	188-1066-38	16V 10uF NP	D403	001-0347-43	MA4082L
C118	166-1801-50	18pF CH	C645	188-1066-38	16V 10uF NP	D701	001-0529-25	MA8047-L
C119	188-1073-28	10V 100uF	C646	168-3332-78	0.033uF K	D702	001-0516-90	MA111
C120	168-2232-55	0.022uF K	C647	168-4732-78	0.047uF K(2680H)	D803	001-0347-46	MA4091L
C121	166-1011-50	100pF CH	C647	168-3332-78	0.033uF (2683H)	D804	001-0516-90	MA111
C122	166-1011-50	100pF CH	C648	168-4732-78	0.047uF K(2680H)	D805	001-0466-90	S5688B
C123	042-1458-90	50V 1uF LN	C648	168-3332-78	0.033uF (2683H)	D806	001-0466-90	S5688B
C124	168-2232-55	0.022uF K	C653	168-4732-78	0.047uF K	D807	001-0466-90	S5688B
C125	188-4763-38	16V 47uF	C654	168-4732-78	0.047uF K	D808	001-2015-00	RL253
C126	168-1022-55	1000pF K	C655	178-1052-78	1uF	IC102	051-6212-08	LC72191JM-TLM
C127	188-4763-38	16V 47uF	C656	188-1066-38	16V 10uF NP	IC201	051-1014-08	TA7291F
C128	166-1011-50	100pF CH	C657	178-1052-78	1uF	IC301	051-6600-38	CA0008AM
C129	166-1011-50	100pF CH	C658	178-1052-78	1uF	IC302	052-3176-02	M30620MCA-1K3GP
C131	168-2232-55	0.022uF K	C659	188-1066-38	16V 10uF NP	IC303	051-0869-58	NJM2103M
C132	166-1011-50	100pF CH	C660	178-1052-78	1uF	IC601	051-5027-00	LC75412WH
C133	166-1011-50	100pF CH	C661	168-4732-78	0.047uF K	IC602	051-5819-00	LC75281E
C134	178-4742-78	0.47uF	C662	168-4732-78	0.047uF K	IC702	051-2040-00	TA8276H
C204	168-2232-55	0.022uF K	C663	188-1063-38	16V 10uF	J202	074-1192-26	26P
C205	168-1042-78	16V 0.1uF	C664	188-1063-38	16V 10uF	J301	074-1194-00	13P CE-NET
C206	189-2273-28	10V220uF	C665	168-1032-55	0.01uF K	J801	074-1166-01	OUTLET SOCKET
C209	168-1042-78	16V 0.1uF	C666	168-1032-55	0.01uF K	L101	010-2003-04	30uH
C210	188-1063-38	16V 10uF	C667	168-1032-55	0.01uF K	L103	010-6009-76	22uH
C211	188-1063-38	16V 10uF	C668	168-1032-55	0.01uF K	L104	010-6009-76	22uH
C212	188-1063-38	16V 10uF	C669	188-1063-38	16V 10uF	L301	010-6009-76	22uH
C213	188-1063-38	16V 10uF	C670	188-1063-38	16V 10uF	L302	010-6009-76	22uH
C214	188-1073-28	10V 100uF	C671	168-2222-55	2200pF K	P201	076-0461-20	20P
C301	168-1032-55	0.01uF K	C672	168-2222-55	2200pF K	P401	076-0540-12	12P
C302	168-1042-78	16V 0.1uF	C673	168-2222-55	2200pF K	P402	076-0540-12	12P
C303	188-4763-18	6.3V 47uF	C674	168-2222-55	2200pF K	Q105	192-2712-51	2SC2712 G,L
C304	168-1032-55	0.01uF K	C675	188-1063-38	16V 10uF	Q106	192-2712-51	2SC2712 G,L
C305	168-1032-55	0.01uF K	C676	188-1063-38	16V 10uF	Q108	191-1240-00	2SB1240
C306	168-1032-55	0.01uF K	C677	168-1022-55	1000pF K	Q109	191-1240-00	2SB1240
C309	188-1053-68	50V 1uF	C678	168-1022-55	1000pF K	Q110	191-1240-00	2SB1240
C311	168-1022-55	1000pF K	C679	168-1022-55	1000pF K	Q201	190-1428-00	2SA1428
C312	168-1022-55	1000pF K	C680	188-1063-38	16V 10uF	Q202	125-2004-92	RN1402
C313	168-1042-78	16V 0.1uF	C681	188-1063-38	16V 10uF	Q204	193-1858-00	2SD1858
C316	042-0559-00	5.5V 0.1F	C682	168-1022-55	1000pF K	Q205	193-1858-00	2SD1858
C318	188-1073-28	10V 100uF	C683	188-1063-38	16V 10uF	Q208	190-1428-00	2SA1428
C319	168-1042-78	16V 0.1uF	C684	188-4763-38	16V 47uF	Q209	192-2712-00	2SC2712
C320	188-4763-38	16V 47uF	C685	168-1032-55	0.01uF K	Q210	190-1428-00	2SA1428
C403	188-1063-38	16V 10uF	C730	168-1042-78	16V 0.1uF	Q211	125-2004-92	RN1402
C404	188-1073-28	10V 100uF	C731	168-1042-78	16V 0.1uF	Q212	190-1428-00	2SA1428
C601	163-1063-35	16V10uF	C732	168-1042-78	16V 0.1uF	Q213	192-2712-00	2SC2712
C602	163-1063-35	16V10uF	C733	168-1042-78	16V 0.1uF	Q214	103-2012-00	2SD2012
C603	188-2253-67	50V2.2uF	C734	188-1053-68	50V 1uF	Q219	125-0002-92	RN2402
C604	168-2732-55	16V 0.027uF K (2680H)	C735	188-1063-38	16V 10uF	Q220	125-2004-92	RN1402
C604	168-3332-78	0.033uF (2683H)	C737	188-1063-38	16V 10uF	Q301	192-2712-00	2SC2712
C605	168-2732-55	16V 0.027uF K (2680H)	C738	188-1053-68	50V 1uF	Q304	192-2712-00	2SC2712
C605	168-3332-78	0.033uF (2683H)	C806	188-4763-38	16V 47uF	Q308	192-2712-00	2SC2712
C606	188-2253-67	50V2.2uF	C807	188-1073-28	10V 100uF	Q311	191-1240-00	2SB1240
C607	163-1063-35	16V10uF	C809	172-1041-15	0.1uF	Q312	192-2712-00	2SC2712
C608	163-1063-35	16V10uF	C810	188-1053-68	50V 1uF	Q320	193-2118-50	2SD2118F5 R,S
C610	168-4712-55	470pF K	C813	042-1586-00	16V 4700uF	Q404	125-0002-92	RN2402
C611	168-4712-55	470pF K	C814	172-1041-15	0.1uF	Q405	125-2004-92	RN1402
C614	188-2253-68	50V 2.2uF	C816	188-4763-38	16V 47uF	Q407	192-2712-00	2SC2712
C615	188-2253-68	50V 2.2uF	C817	172-1041-15	0.1uF	Q409	193-2118-00	2SD2118F5 Q,R,S
C619	188-4763-37	16V 47uF	C851	168-1032-55	0.01uF K	Q701	125-2004-92	RN1402
C620	188-4763-17	6.3V 47uF	CCT301	050-0140-54	1/32W 1k ohm x4J	Q702	125-2004-92	RN1402
C622	178-5642-78	0.56uF	D202	001-0347-38	MA4068M	Q703	125-2004-92	RN1402
C623	178-5642-78	0.56uF	D203	001-0529-33	MA8056-H	Q705	192-2712-00	2SC2712
C626	188-1053-68	50V 1uF	D205	001-0347-48	MA4091H	Q804	193-2118-00	2SD2118F5 Q,R,S
C627	188-1053-68	50V 1uF	D301	001-0347-69	MA4180M	Q807	125-0002-92	RN2402
			D302	060-0108-00	1/6ZP 0 ohm JW	Q808	125-2004-92	RN1402
			D303	060-0108-00	1/6ZP 0 ohm JW	Q809	191-1240-00	2SB1240

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q810	192-2712-00	2SC2712	R308	119-4721-15	1/10W 4.7k ohm	R604	119-0000-05	1/10W 0 ohm JW
R107	119-0000-05	1/10W 0 ohm JW	R309	119-4721-15	1/10W 4.7k ohm	R605	119-4721-15	1/10W 4.7k ohm
R108	119-5621-15	1/10W 5.6k ohm	R310	119-4731-15	1/10W 47k ohm	R606	119-1031-15	1/10W 10k ohm (2680H)
R112	119-2221-15	1/10W 2.2k ohm	R311	119-4731-15	1/10W 47k ohm	R606	119-1531-15	1/10W 15k ohm (2683H)
R115	119-2221-15	1/10W 2.2k ohm	R312	119-4731-15	1/10W 47k ohm	R607	119-1031-15	1/10W 10k ohm (2680H)
R116	119-2231-15	1/10W 22k ohm	R313	119-4731-15	1/10W 47k ohm	R607	119-1531-15	1/10W 15k ohm (2683H)
R117	111-1001-94	1/4W 10 ohm	R314	119-4721-15	1/10W 4.7k ohm	R608	119-4721-15	1/10W 4.7k ohm
R119	119-5631-15	1/10W 56k ohm	R316	119-1021-15	1/10W 1k ohm	R609	119-0000-05	1/10W 0 ohm JW
R120	119-3321-15	1/10W 3.3k ohm	R317	119-0000-05	1/10W 0 ohm JW	R611	119-3331-15	1/10W 33k ohm
R121	119-2221-15	1/10W 2.2k ohm	R318	119-1021-15	1/10W 1k ohm	R612	119-3331-15	1/10W 33k ohm
R122	119-4721-15	1/10W 4.7k ohm	R319	119-4721-15	1/10W 4.7k ohm	R613	119-1031-15	1/10W 10k ohm
R123	119-1021-15	1/10W 1k ohm	R320	119-4721-15	1/10W 4.7k ohm	R614	119-1031-15	1/10W 10k ohm
R124	119-5121-15	1/10W 5.1k ohm	R321	119-0000-05	1/10W 0 ohm JW (2683H)	R615	119-1221-15	1/10W 1.2k ohm
R125	119-1041-15	1/10W 100k ohm	R322	119-0000-05	1/10W 0 ohm JW (2680H)	R616	119-1221-15	1/10W 1.2k ohm
R126	119-2221-15	1/10W 2.2k ohm	R323	119-0000-05	1/10W 0 ohm JW (2680H)	R620	119-1051-15	1/10W 1M ohm
R128	119-1021-15	1/10W 1k ohm	R324	119-0000-05	1/10W 0 ohm JW (2683H)	R729	119-1031-15	1/10W 10k ohm
R129	119-1021-15	1/10W 1k ohm	R325	119-0000-05	1/10W 0 ohm JW	R730	117-1021-15	1/8W 1k ohm
R131	119-1031-15	1/10W 10k ohm	R328	119-0000-05	1/10W 0 ohm JW	R731	116-4721-15	1/4W 4.7k ohm
R132	119-1031-15	1/10W 10k ohm	R330	119-0000-05	1/10W 0 ohm JW	R732	119-2231-15	1/10W 22k ohm
R133	119-2221-15	1/10W 2.2k ohm	R332	119-0000-05	1/10W 0 ohm JW	R733	119-8221-15	1/10W 8.2k ohm
R134	119-2221-15	1/10W 2.2k ohm	R334	119-1031-15	1/10W 10k ohm	R734	119-2221-15	1/10W 2.2k ohm
R135	119-1031-15	1/10W 10k ohm	R335	119-4731-15	1/10W 47k ohm	R735	119-2221-15	1/10W 2.2k ohm
R136	119-0000-05	1/10W 0 ohm JW	R336	119-4731-15	1/10W 47k ohm	R736	119-2221-15	1/10W 2.2k ohm
R137	119-3311-15	1/10W 330 ohm (2680H)	R337	119-4731-15	1/10W 47k ohm	R737	119-2221-15	1/10W 2.2k ohm
R137	119-0000-05	1/10W 0 ohm JW (2683H)	R338	119-4731-15	1/10W 47k ohm	R738	119-2221-15	1/10W 2.2k ohm
R140	119-1041-15	1/10W 100k ohm	R339	117-2231-15	1/8W 22k ohm	R739	119-4731-15	1/10W 47k ohm
R201	119-4731-15	1/10W 47k ohm	R340	111-6801-94	1/4W 68 ohm	R740	119-4731-15	1/10W 47k ohm
R202	119-5611-15	1/10W 560 ohm	R341	117-2231-15	1/8W 22k ohm	R801	119-1031-15	1/10W 10k ohm
R203	119-2221-15	1/10W 2.2k ohm	R342	119-1031-15	1/10W 10k ohm	R802	119-1041-15	1/10W 100k ohm
R206	116-2291-15	1/4W 2.2 ohm	R343	119-1041-15	1/10W 100k ohm	R804	119-1031-15	1/10W 10k ohm
R207	116-2291-15	1/4W 2.2 ohm	R344	117-5621-15	1/8W 5.6k ohm	R807	119-8231-15	1/10W 82k ohm
R208	114-2291-11	1W 2.2 ohm	R345	119-2231-15	1/10W 22k ohm	R808	119-1231-15	1/10W 12k ohm
R209	119-2221-15	1/10W 2.2k ohm	R346	117-1021-15	1/8W 1k ohm	R809	119-1031-15	1/10W 10k ohm
R210	119-3611-15	1/10W 360 ohm	R348	119-2231-15	1/10W 22k ohm	R810	119-1041-15	1/10W 100k ohm
R212	119-3311-15	1/10W 330 ohm	R352	119-6831-15	1/10W 68k ohm	R811	119-1031-15	1/10W 10k ohm
R213	119-1031-15	1/10W 10k ohm	R354	119-3341-15	1/10W 330k ohm	R813	119-8231-15	1/10W 82k ohm
R214	119-1031-15	1/10W 10k ohm	R355	119-6831-15	1/10W 68k ohm	R814	119-1231-15	1/10W 12k ohm
R215	119-1031-15	1/10W 10k ohm	R356	119-5631-15	1/10W 56k ohm	R815	116-4711-15	1/4W 470 ohm
R216	119-1031-15	1/10W 10k ohm	R357	111-1211-94	1/4W 120 ohm	R816	111-5621-94	1/4W 5.6k ohm
R217	119-1031-15	1/10W 10k ohm	R361	119-1021-15	1/10W 1k ohm	R817	116-2221-15	1/4W 2.2k ohm
R218	119-1031-15	1/10W 10k ohm	R363	119-1031-15	1/10W 10k ohm	R818	117-1031-15	1/8W 10k ohm
R223	116-4711-15	1/4W 470 ohm	R364	119-1021-15	1/10W 1k ohm	R819	116-2221-15	1/4W 2.2k ohm
R224	116-1221-15	1/4W 1.2k ohm	R365	119-1031-15	1/10W 10k ohm	R820	119-3321-15	1/10W 3.3k ohm
R225	119-4721-15	1/10W 4.7k ohm	R366	119-2221-15	1/10W 2.2k ohm	R821	119-1031-15	1/10W 10k ohm
R226	116-4711-15	1/4W 470 ohm	R370	116-1001-15	1/4W 10 ohm	R831	114-2291-11	1W 2.2 ohm
R227	119-2231-15	1/10W 22k ohm	R371	119-4721-15	1/10W 4.7k ohm	R851	119-5631-15	1/10W 56k ohm
R228	117-1031-15	1/8W 10k ohm	R372	119-4721-15	1/10W 4.7k ohm	R852	119-1221-15	1/10W 1.2k ohm
R229	116-1221-15	1/4W 1.2k ohm	R379	117-6821-15	1/8W 6.8k ohm	SUP101	060-0122-20	DSP-141N-S00B
R230	119-3321-15	1/10W 3.3k ohm	R405	116-1021-15	1/4W 1k ohm	T801	009-0670-00	180uH
R231	116-0000-05	1/4W 0 ohm	R406	119-2231-15	1/10W 22k ohm	TH801	002-0222-90	PTH61G30BD
R233	116-1221-15	1/4W 1.2k ohm	R407	119-2231-15	1/10W 22k ohm	TM101	073-0762-90	TERMINAL
R234	117-1031-15	1/8W 10k ohm	R408	116-1591-15	1/4W 1.5 ohm	TM102	073-0762-90	TERMINAL
R235	119-4721-15	1/10W 4.7k ohm	R411	060-0108-00	1/6ZP 0 ohm JW	TM103	073-0762-90	TERMINAL
R237	111-1511-81	1/2W 150 ohm	R412	119-0000-05	1/10W 0 ohm JW	TM104	073-0762-90	TERMINAL
R239	119-1031-15	1/10W 10k ohm	R413	119-0000-05	1/10W 0 ohm JW	X101	061-1066-80	7.2MHz
R247	116-1221-15	1/4W 1.2k ohm	R414	119-4721-15	1/10W 4.7k ohm	X301	060-1533-90	CSTCE10M0G52-RO
R301	119-4731-15	1/10W 47k ohm	R416	119-4721-15	1/10W 4.7k ohm	PWB	039-2334-01	PWB(WITHOUT COMPONENT)
R302	119-4731-15	1/10W 47k ohm	R417	119-4721-15	1/10W 4.7k ohm			
R303	119-1041-15	1/10W 100k ohm	R601	119-3331-15	1/10W 33k ohm			
R304	119-1041-15	1/10W 100k ohm	R602	119-3331-15	1/10W 33k ohm			
R306	119-1031-15	1/10W 10k ohm						
R307	119-4721-15	1/10W 4.7k ohm						

CD PWB(B3) section : CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1042-78	0.1uF	C208	046-6822-58	6800pF	R110	033-1051-15	1/10W 1M ohm
C102	045-4701-50	47pF	C209	168-1042-78	0.1uF	R111	033-3321-15	1/10W 3.3k ohm
C103	046-4722-58	4700pF	C210	043-0533-50	0.047uF	R114	033-2211-15	1/10W 220 ohm
C104	168-1042-78	0.1uF	C211	168-1042-78	0.1uF	R115	033-2211-15	1/10W 220 ohm
C105	046-1532-78	0.015uF	C212	168-1042-78	0.1uF	R116	033-1031-15	1/10W 10k ohm
C106	046-1032-78	0.01uF	C213	045-5096-50	5pF	R117	033-1021-15	1/10W 1k ohm
C107	046-1032-78	0.01uF	C214	045-5601-50	56pF	R131	033-4711-15	1/10W 470 ohm
C108	046-4722-58	4700pF	C215	043-0533-50	0.047uF	R132	033-2211-15	1/10W 220 ohm
C109	046-1522-58	1500pF	C216	178-1052-78	1uF	R201	117-2201-15	1/8W 22 ohm
C110	046-3332-78	0.033uF	C217	045-1011-50	100pF	R202	117-2201-15	1/8W 22 ohm
C111	168-1042-78	0.1uF	C301	163-1073-35	16V100uF	R203	033-1041-15	1/10W 100k ohm
C112	046-3332-78	0.033uF	C302	168-1042-78	0.1uF	R204	033-1041-15	1/10W 100k ohm
C113	168-1042-78	0.1uF	C303	043-0533-50	0.047uF	R205	033-1041-15	1/10W 100k ohm
C114	168-1042-78	0.1uF	CCT1	050-0140-54	1k ohm x 4	R206	033-1041-15	1/10W 100k ohm
C115	046-4712-58	470pF	D201	001-0516-90	MA111	R207	033-1041-15	1/10W 100k ohm
C116	046-4712-58	470pF	IC101	051-6376-00	TC94A14FA	R208	033-8231-15	1/10W 82k ohm
C117	043-0533-50	0.047uF	IC102	051-3279-90	BA033LBSG	R209	033-6811-15	1/10W 680 ohm
C118	043-0533-50	0.047uF	IC201	051-5710-90	TA2157F	R210	033-6831-15	1/10W 68k ohm
C119	045-2701-50	27pF	IC301	051-6049-08	BA5983FP-E2	R211	033-1831-15	1/10W 18k ohm
C120	045-1801-50	18pF	J101	074-1228-76	26P	R212	033-2721-15	1/10W 2.7k ohm
C121	163-1063-35	16V100uF	J201	074-1138-65	15P	R213	033-1011-15	1/10W 100 ohm
C122	178-1052-78	1uF	J301	074-1138-60	10P	R214	033-1021-15	1/10W 1k ohm
C123	046-1032-78	0.01uF	L101	010-2285-57	BLM21B102SPT	R215	033-1031-15	1/10W 10k ohm
C124	163-1073-05	4V100uF	L102	010-2285-57	BLM21B102SPT	R217	033-1041-15	1/10W 100k ohm
C125	168-1042-78	0.1uF	L103	010-2285-57	BLM21B102SPT	R218	033-2211-15	1/10W 220 ohm
C126	168-1042-78	0.1uF	L104	010-2285-57	BLM21B102SPT	R301	117-6811-15	1/10W 680 ohm
C129	178-1052-78	1uF	L105	010-2285-57	BLM21B102SPT	R304	033-3921-15	1/10W 3.9k ohm
C201	163-3363-05	4V33uF	L401	010-3050-93	10uH	R305	033-3921-15	1/10W 3.9k ohm
C202	168-1042-78	0.1uF	Q201	131-1188-50	2SB1188	R306	033-1041-15	1/10W 100k ohm
C203	178-1052-78	1uF	R102	033-5621-15	1/10W 5.6k ohm	R307	033-2211-15	1/10W 220 ohm
C204	163-1073-05	4V100uF	R104	033-4731-15	1/10W 47k ohm	X102	060-1528-90	16.934M
C205	163-3363-05	4V33uF	R105	033-1041-15	1/10W 100k ohm	PWB	039-1945-20	PWB(WITHOUT COMPONENT)
C206	168-1042-78	0.1uF	R108	033-1531-15	1/10W 15k ohm			
C207	043-0533-50	0.047uF	R109	033-1031-15	1/10W 10k ohm			

LED PWB(B4) section : CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-90	PS1192H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			

Side PWB(B5) section : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-5612-05	560pF	C16	168-1032-05	0.01uF	R8	119-3341-10	1/10W 330k ohm
C2	168-5612-05	560pF	C17	178-4745-79	0.47uF	R9	119-1131-15	1/10W 11k ohm
C3	168-5612-05	560pF	C18	168-1042-78	0.1uF	R10	119-1131-15	1/10W 11k ohm
C4	168-5612-05	560pF	C19	163-2263-30	16V22uF	R11	119-1531-10	1/10W 15k ohm
C5	178-1055-79	1uF	IC1	051-5204-00	HA12216F	R12	119-1531-10	1/10W 15k ohm
C6	168-1232-05	0.012uF	J1	074-0898-10	10P	R13	032-0140-80	1/10W 18k ohm F
C7	168-1232-05	0.012uF	L1	010-2198-26	0.047uH	R14	119-1531-10	1/10W 15k ohm
C8	168-4732-78	0.047uF	L2	010-2198-26	0.047uH	R15	119-1031-10	1/10W 10k ohm
C9	168-4732-78	0.047uF	R1	119-2731-10	1/10W 27k ohm	R16	119-3921-10	1/10W 3.9k ohm
C10	168-5612-05	560pF	R2	119-2731-10	1/10W 27k ohm	R17	119-1241-10	1/10W 120k ohm
C11	168-5612-05	560pF	R3	119-2731-10	1/10W 27k ohm	R18	119-2231-10	1/10W 22k ohm
C12	168-1042-78	0.1uF	R4	119-2731-10	1/10W 27k ohm	VR1	012-6014-56	10k ohm
C13	168-1042-78	0.1uF	R5	119-1811-10	1/10W 180 ohm	VR2	012-6014-56	10k ohm
C14	168-1032-05	0.01uF	R6	119-1811-10	1/10W 180 ohm	PWB	039-1912-01	PWB(WITHOUT COMPONENT)
C15	163-4753-50	35V4.7uF	R7	119-3341-10	1/10W 330k ohm			

Rear PWB Assy(B6) section : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J3	076-0368-10	10P	R24	111-5611-91	1/4W 560 ohm	SW3	013-3906-00	3PPB51
J2	074-1104-20	20P						

Bottom PWB(B7) section : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K	SW2	013-3951-32	MODE SWITCH	PWB	099-9926-01	PWB(WITHOUT COMPONENT)
SW1	013-3953-01	METAL SWITCH						