JVC

# PARTS LIST

## CD RECEIVER

KD-A65J KD-R50E KD-R50EN
KD-R50EY KD-R60J KD-R80BTJ
KD-R80BTU KD-R80BTUN

# ■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

# ■ PRECAUTIONS ON PARTS LIST

- The parts identified by the ⚠ symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.

# ■ PRECAUTIONS ON SERVICE

Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND (⏚) and the ISOLATED (NEUTRAL) GND (⊥).

1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.
   Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

# ■ DEVIATION TOLERANCE RANGE

| DEVIATION TOLERANCE RANGE | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| F | G | J | K | M | N | R | H | Z | P |
| ± 1% | ± 2% | ± 5% | ±10% | ±20% | ±30% | +30%<br>-10% | +50%<br>-10% | +80%<br>-20% | +100%<br>-0% |

# EXPLODED VIEW (UNIT)

Block No.M1MM

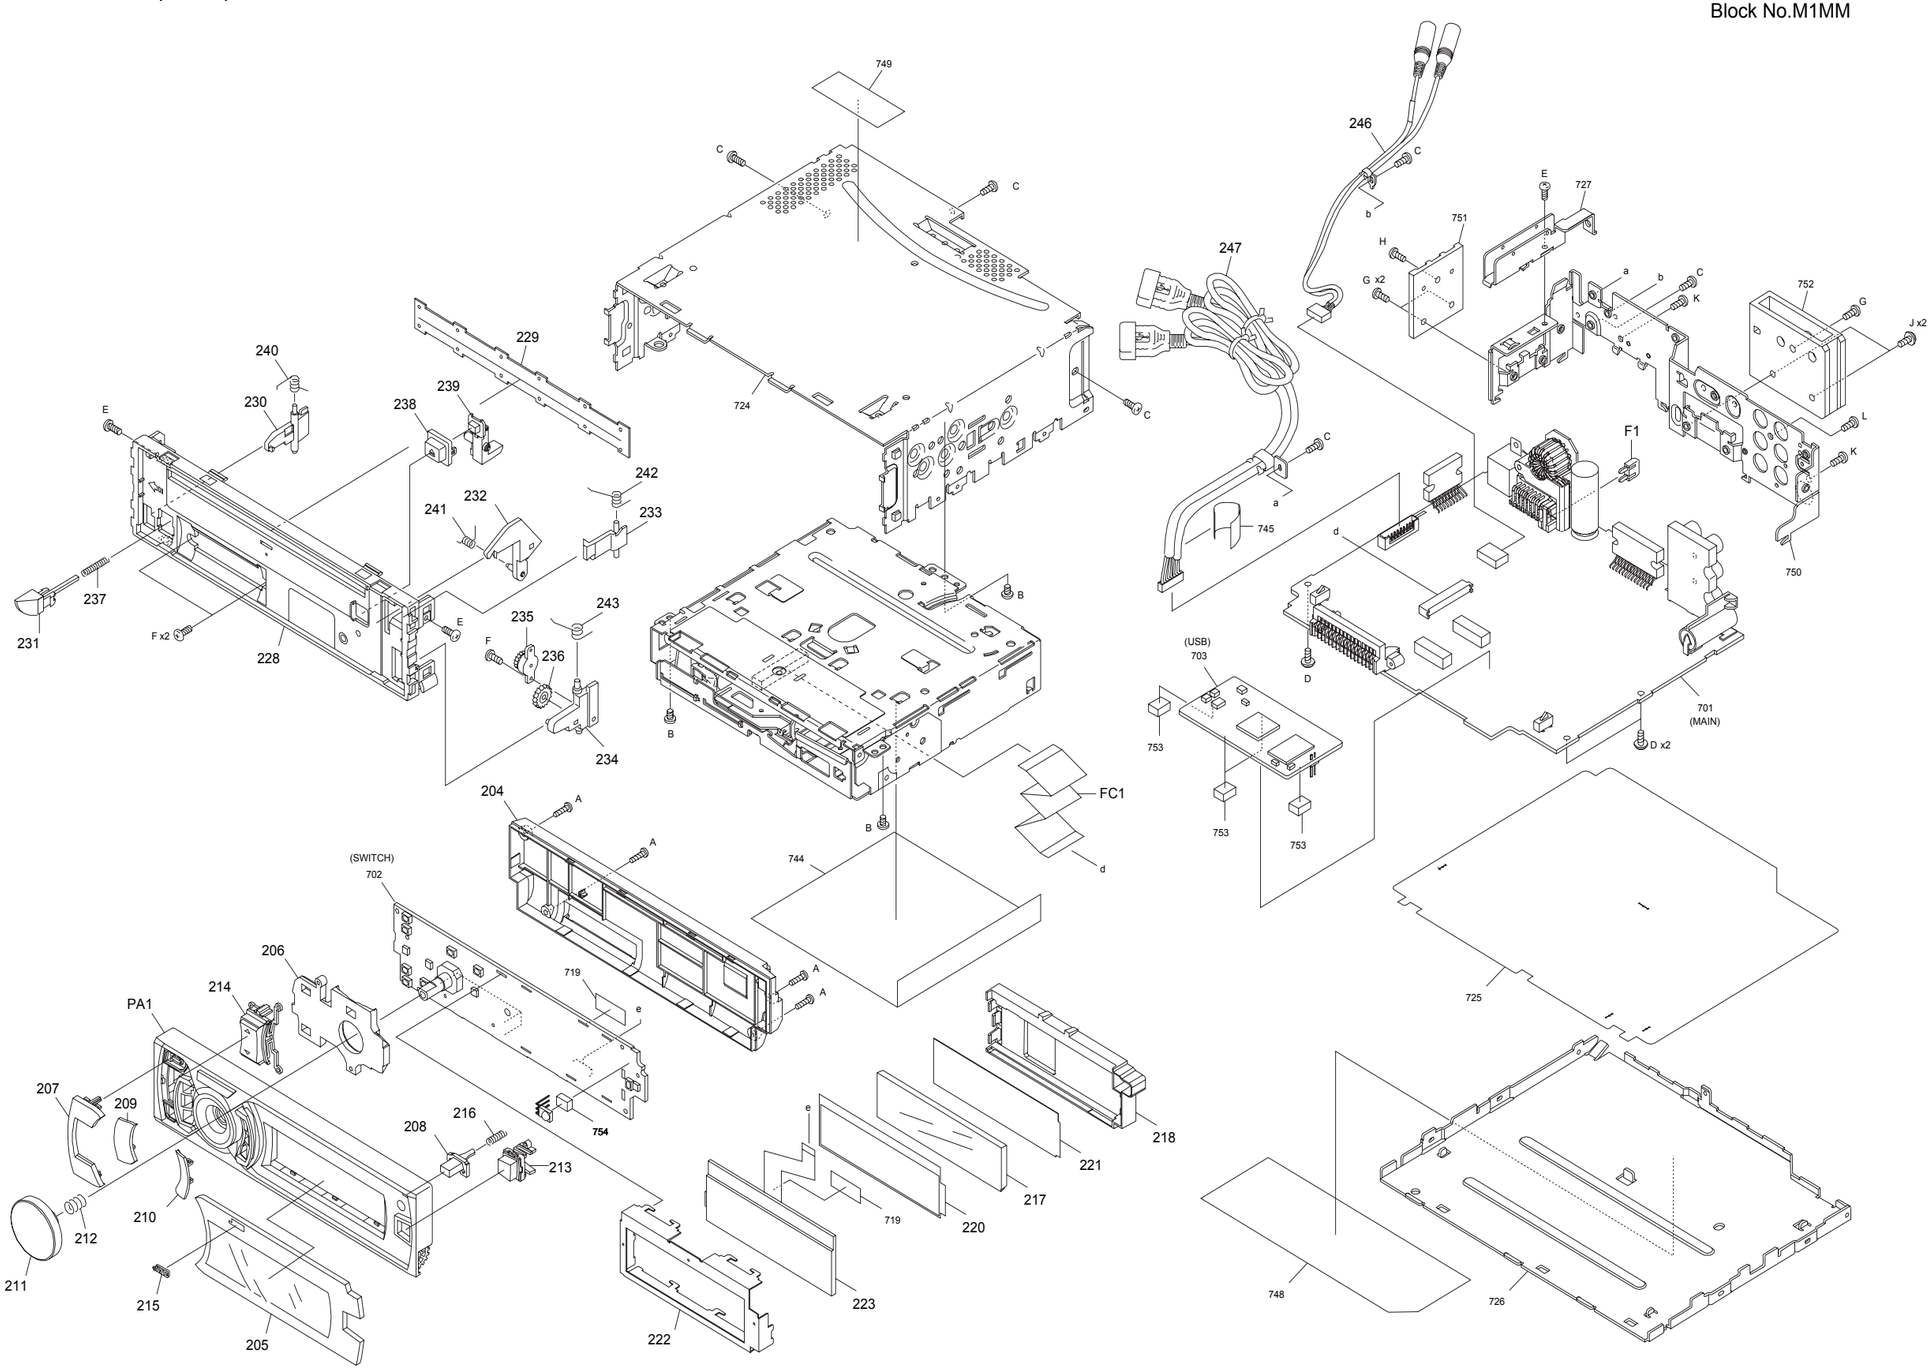


Parts with the exploded numbers lager than 700 are not supplied.

No.MA525

created date:2012-03-14

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

## EXPLODED VIEW (UNIT) <M1MM>

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| ⚠ | F1 | QMFZ064-100-J1 | FUSE | 10A | 1 | |
| | FC1 | WJT0294-001A-E | E-CARD WIRE | | 1 | |
| | PA1 | GE34912-002A | FRONT PANEL ASSY | | 1 | A |
| | PA1 | GE34912-004A | FRONT PANEL ASSY | | 1 | B,C,D |
| | PA1 | GE34912-001A | FRONT PANEL ASSY | | 1 | E,F,G,H |
| | A | QYSDSF2008ZA | TAP SCREW | M2 x 8mm | 4 | |
| | B | QYSDST2604ZA | TAP SCREW | M2.6 x 4mm | 3 | |
| | C | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | 6 | |
| | D | GE40377-002A | SCREW | | 3 | |
| | E | QYSDST2004ZA | TAP SCREW | M2 x 4mm | 3 | |
| | F | QYSDSF2006ZA | TAP SCREW | M2 x 6mm | 3 | |
| | G | QYSDST2610ZA | TAP SCREW | M2.6 x 10mm | 3 | |
| | H | QYSDST2608ZA | TAP SCREW | M2.6 x 8mm | 1 | |
| | J | GE40377-005A | SPECIAL SCREW | | 2 | |
| | K | QYSDSG3006ZA | TAP SCREW | M3 x 6mm | 2 | |
| | L | QYSDSF2608ZA | TAP SCREW | M2.6 x 8mm | 1 | |
| | 204 | GE10337-001A | REAR COVER | | 1 | |
| | 205 | GE20308-009A | FINDER | | 1 | A |
| | 205 | GE20308-002A | FINDER | | 1 | B,C,D |
| | 205 | GE20308-004A | FINDER | | 1 | E |
| | 205 | GE20308-001A | FINDER | | 1 | F |
| | 205 | GE20308-005A | FINDER | | 1 | G,H |
| | 206 | GE20310-001A | LIGHT GUIDE | | 1 | |
| | 207 | GE34901-001A | MENU BTN | | 1 | A,E,F,G,H |
| | 207 | GE34901-002A | MENU BTN | | 1 | B,C,D |
| | 208 | GE34793-001A | OPEN BUTTON | | 1 | |
| | 209 | GE34904-002A | SEARCH BTN TOP | | 1 | A |
| | 209 | GE34904-001A | SEARCH BTN TOP | | 1 | B,C,D,E,F,G,H |
| | 210 | GE34907-002A | DISP BTN TOP | | 1 | A |
| | 210 | GE34907-001A | DISP BTN TOP | | 1 | B,C,D,E,F,G,H |
| | 211 | GE34911-002A | VOL KNOB | | 1 | A |
| | 211 | GE34911-003A | VOL KNOB | | 1 | B,C,D,E,F,G,H |
| | 212 | GE40127-005A | KNOB SPRING | | 1 | |
| | 213 | GE40600-001A | PHONE BTN ASSY | | 1 | A,B,C,D,E |
| | 213 | GE40600-002A | PHONE BTN ASSY | | 1 | F,G,H |
| | 214 | GE40599-001A | UP/DWN BTN ASSY | | 1 | |
| | 215 | GE40463-001A | JVC BADGE | | 1 | |
| | 216 | GE40202-016A | COMP.SPRING | | 1 | |
| | 217 | GE34914-001A | LCD LENS | | 1 | |
| | 218 | GE34915-001A | LENS CASE | | 1 | |
| | 220 | GE40594-002A | LIGHTING SHEET | | 1 | |
| | 221 | GE40595-001A | REFLECTION SHT | | 1 | |
| | 222 | GE34916-001A | LCD CASE | | 1 | |
| | 223 | QLD0706-001 | LCD MODULE | | 1 | |
| | 228 | GE34918-001A | F.CHASSIS ASSY | | 1 | |
| | 229 | GE40454-001A | BLIND | | 1 | |
| | 230 | GE33084-001A | LOCK LEVER(L) | | 1 | |
| | 231 | GE33493-001A | DETACH LEVER | | 1 | |
| | 232 | GE33491-001A | OPEN LEVER | | 1 | |
| | 233 | GE33492-001A | LOCK LEVER TOP | | 1 | |
| | 234 | GE33083-001A | LOCK LEVER(R) | | 1 | |
| | 235 | QZW0108-002 | DAMPER | | 1 | |
| | 236 | GE40154-001A | GEAR | | 1 | |
| | 237 | GE40202-023A | T. SPRING | | 1 | |
| | 238 | GE34646-001A | EJECT BUTTON | | 1 | |
| | 239 | GE34920-002A | EJECT LENS | | 1 | |
| | 240 | GE40456-002A | SPRING LOCK | | 1 | |
| | 241 | GE40461-001A | SPRING | | 1 | |
| | 242 | GE40455-003A | SPRING LOCK | | 1 | |
| | 243 | GE40472-001A | TORSION SPRING | | 1 | |
| | 246 | QAM1433-001 | CAR CABLE (MIC/AUX) | | 1 | |
| | 247 | QAM1432-001 | CAR CABLE (USB) | | 1 | |

# EXPLODED VIEW (CD MECHANISM : FLM-HC3-1D)

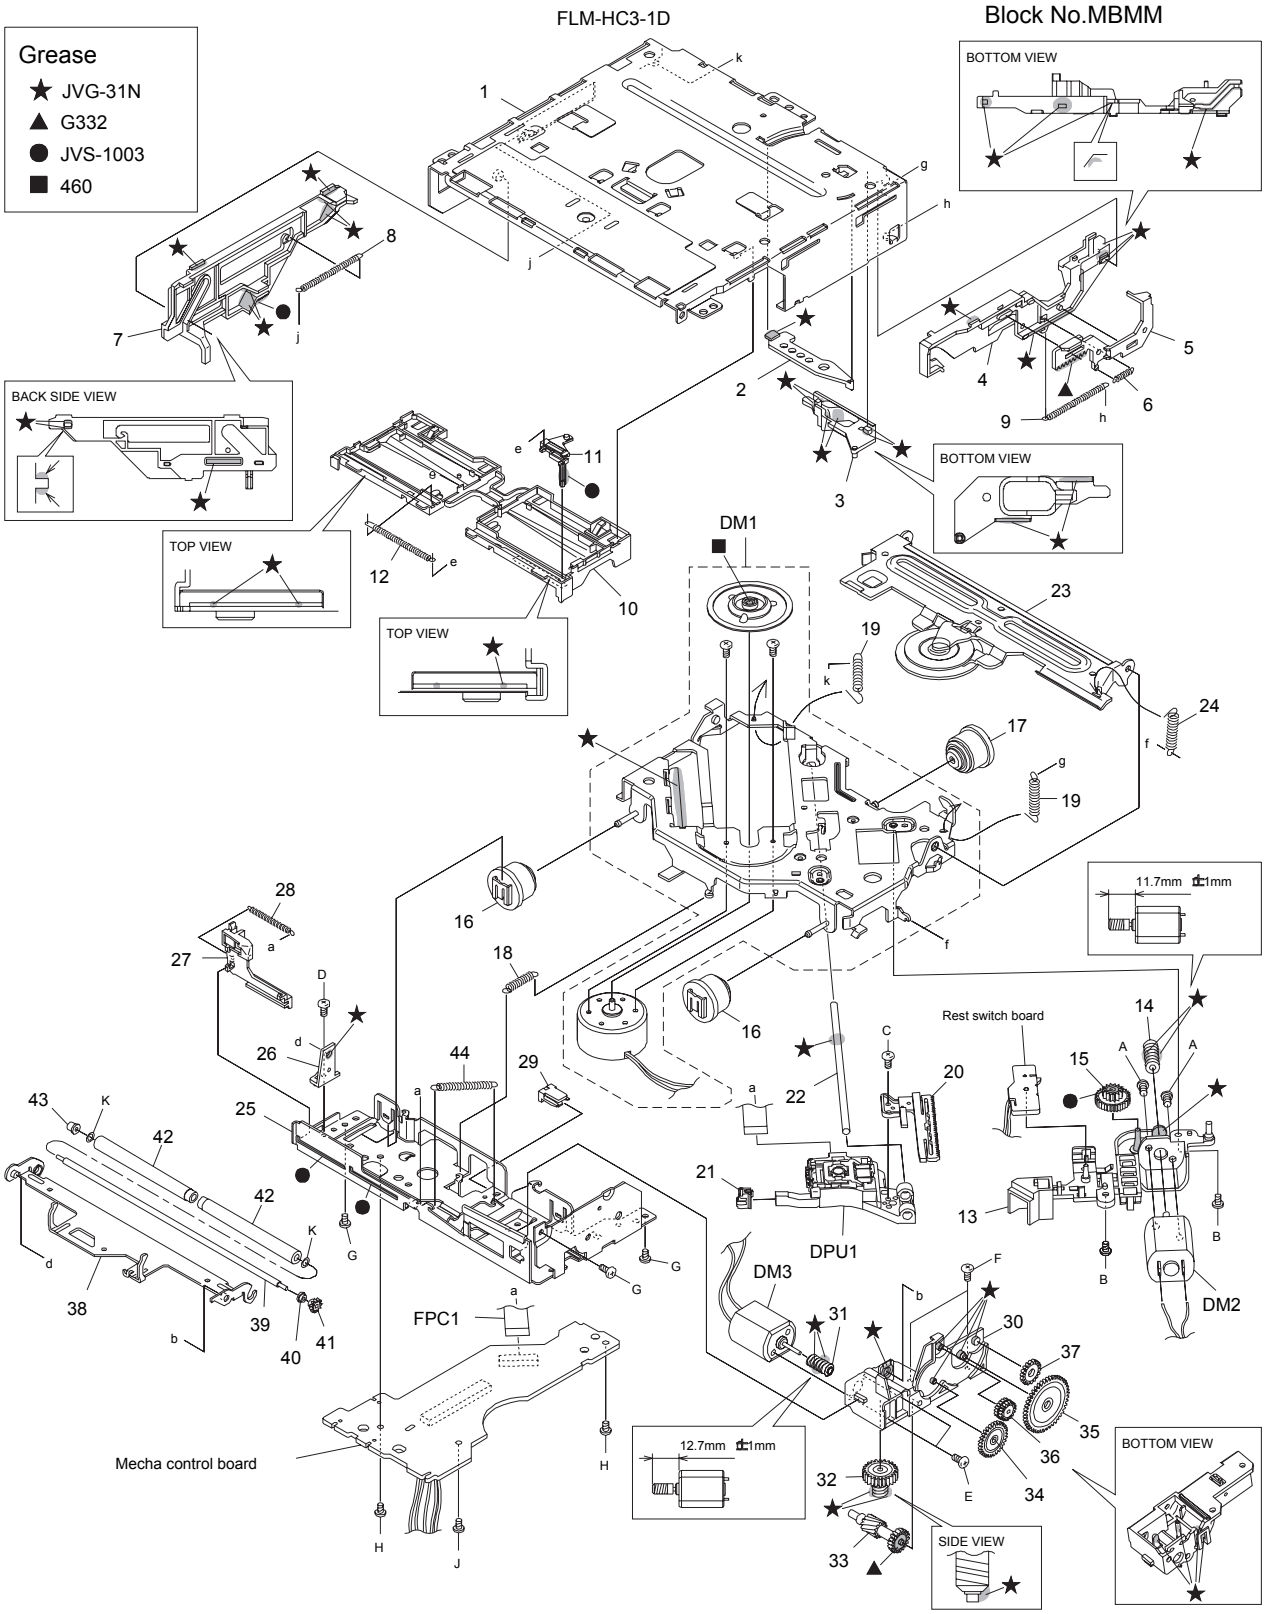


The parts without symbol number are not service.

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|---|
| EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D) <MBMM> | | | | | | | |
| | DM1 | | CM-FLMHC1D | SPINDLE MOTOR ASSY | | 1 | |
| | DM2 | | QAR0144-003 | MOTOR | 2.0V DC | 1 | |
| | DM3 | | QAR0144-003 | MOTOR | 2.0V DC | 1 | |
| ⚠ | DPU1 | | QAL1226-001 | PICK UP | | 1 | |
| | FPC1 | | QAL0817-003 | FPC | | 1 | |
| | A | | QYSPSPT2025MA | SCREW | M2 x 2.5mm | 2 | |
| | B | | VKZ4539-054 | MINI SCREW | | 2 | |
| | C | | QYSPSGT1745ZA | TAP SCREW | M1.7 x 4.5mm | 1 | |
| | D | | VKZ4539-054 | MINI SCREW | | 1 | |
| | E | | QYSPSPT2025MA | SCREW | M2 x 2.5mm | 2 | |
| | F | | VKZ4539-054 | MINI SCREW | | 2 | |
| | G | | VKZ4539-054 | MINI SCREW | | 3 | |
| | H | | VKZ4539-054 | MINI SCREW | | 2 | |
| | J | | VKZ4539-054 | MINI SCREW | | 1 | |
| | K | | LV45449-001A | WASHER | | 2 | |
| | 1 | | LV11685-004A | TOP FRAME | | 1 | |
| | 2 | | LV38953-002A | TRIGGER PLATE | | 1 | |
| | 3 | | LV38952-001A | FL SLIDER(B) | | 1 | |
| | 4 | | LV22826-003A | LOAD CAM | | 1 | |
| | 5 | | LV38951-001A | TRIGGER RACK | | 1 | |
| | 6 | | LV45415-001A | TRIGGER SPRING | | 1 | |
| | 7 | | LV22827-001A | FL SLIDER(L) | | 1 | |
| | 8 | | LV45416-001A | LOAD CAM SPRING | | 1 | |
| | 9 | | LV45417-001A | FL SLIDERSPRING | | 1 | |
| | 10 | | LV11689-001A | DISC GUIDE | | 1 | |
| | 11 | | LV38957-001A | SW SLIDER(R) | | 1 | |
| | 12 | | LV45505-001A | SW ACT SPRING | | 1 | |
| | 13 | | LV22828-001A | FEED BRACKET | | 1 | |
| | 13 | or | LV22828-002A | FEED BRACKET | | 1 | |
| | 14 | | LV36814-201A | F WORM GEAR | | 1 | |
| | 15 | | LV36815-002A | F WHEEL GEAR | | 1 | |
| | 16 | | LV36904-001A | DAMPER | | 2 | |
| | 17 | | LV37061-001A | DAMPER | | 1 | |
| | 18 | | LV45422-001A | SUS SPRING(F) | | 1 | |
| | 19 | | LV45423-001A | SUS SPRING(B) | | 2 | |
| | 20 | | LV38960-001A | FEED RACK | | 1 | |
| | 21 | | LV36813-201A | SUB GUIDE CAP | | 1 | |
| | 22 | | LV44555-001A | MAIN SHAFT | | 1 | |
| | 23 | | LV38950-002A | HC CL.BASE ASSY | | 1 | |
| | 24 | | LV45421-001A | HC CL.SPRING | | 1 | |
| | 25 | | LV11686-003A | BOTTOM FRAME | | 1 | |
| | 26 | | LV38954-003A | R.ARM GUIDE | | 1 | |
| | 27 | | LV39496-001A | SW ACTUATOR (2) | | 1 | |
| | 28 | | LV45505-001A | SW ACT SPRING | | 1 | |
| | 29 | | LV38962-001A | WIRE GUIDE | | 1 | |
| | 30 | | LV11688-001A | LOADING BASE | | 1 | |
| | 31 | | LV38963-001A | D.WORM GEAR | | 1 | |
| | 32 | | LV38964-001A | D.WHEEL GEAR | | 1 | |
| | 33 | | LV38965-002A | ACT GEAR(1) | | 1 | |
| | 34 | | LV38966-001A | ACT GEAR(2) | | 1 | |
| | 35 | | LV38967-001A | ACT GEAR(3) | | 1 | |
| | 36 | | LV38968-001A | ROLLER ACT GEAR | | 1 | |
| | 37 | | LV38969-001A | DRIVE GEAR | | 1 | |
| | 38 | | LV11690-001A | ROLLER ARM | | 1 | |
| | 39 | | LV45654-002A | ROLLER SHAFT 2 | | 1 | |
| | 40 | | LV45412-001A | RA COLLAR(R) | | 1 | |
| | 41 | | LV38970-001A | HC ROLLER GEAR | | 1 | |
| | 42 | | LV45424-001A | HC ROLLER | | 2 | |
| | 43 | | LV45648-001A | RA COLLAR(L) 2 | | 1 | |
| | 44 | | LV45418-001A | R.ARM SPRING | | 1 | |
| ELECTRIC UNIT <01> | | | | | | | |
| ⚠ | IC1 | | TEF6614TV1S4-X | IC | | 1 | |
| | IC90 | | NJM4565E-X | IC | | 1 | |
| | IC161 | | TDA7720-X | IC | | 1 | A,F,G,H |
| | IC161 | | TDA7718B-X | IC | | 1 | B,C,D,E |
| ⚠ | IC301 | | TDA7851A | IC | | 1 | |
| ⚠ | IC501 | | LA6565-X | IC | | 1 | |
| ⚠ | IC541 | | MN6627553PA | IC | | 1 | |
| | IC581 | | NJM4565E-X | IC | | 1 | |
| ⚠ | IC701 | | JES233B | IC(MCU) | | 1 | A,E,F,G,H |
| ⚠ | IC701 | | JES234B | IC(MCU) | | 1 | B,C,D |
| | IC771 | | BR24T02FJ-W-X | IC | | 1 | |
| | IC771 | or | R1EX24002ASAA-X | IC | | 1 | |
| | IC801 | | 74AHCT126PW-X | IC | | 1 | A,F |
| ⚠ | IC901 | | LV5680P | IC | | 1 | |
| | IC902 | | XC6213B332NG-X | IC | | 1 | |
| ⚠ | IC921 | | BD00GA3WEFJ-X | IC | | 1 | |
| ⚠ | IC931 | | BD9673EFJ-X | IC | | 1 | |
| ⚠ | IC943 | | BD9673EFJ-X | IC | | 1 | |
| ⚠ | IC953 | | RT9715EGB-X | IC | | 1 | |
| | Q271 | | IMX9-W | PAIR TRANSISTOR | | 1 | |
| | Q301 | | DRC2114E-X | DIGI TRANSISTOR | | 1 | |
| | Q301 | or | RT1N141C-X | DIGI TRANSISTOR | | 1 | |
| | Q322 | | IMX9-W | PAIR TRANSISTOR | | 1 | |
| | Q332 | | IMX9-W | PAIR TRANSISTOR | | 1 | |
| | Q501 | | 2SB1424/R/-W | TRANSISTOR | | 1 | |
| | Q540 | | 2SA2188/F/-X | TRANSISTOR | | 1 | |
| | Q701 | | 2SA812A/5-6/-X | TRANSISTOR | | 1 | |
| | Q701 | or | ISA1530AC1/QR/X | TRANSISTOR | | 1 | |
| | Q702 | | 2SC1623A/5-6/-X | TRANSISTOR | | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|---|
| | Q702 | or | 2SC3928A/QR/-X | TRANSISTOR | | 1 | |
| | Q782 | | DRA2114E-X | DIGI TRANSISTOR | | 1 | |
| | Q782 | or | RT1P141C-X | DIGI TRANSISTOR | | 1 | |
| | Q785 | | DRC2124E-X | DIGI TRANSISTOR | | 1 | |
| | Q785 | or | RT1N241C-X | DIGI TRANSISTOR | | 1 | |
| | Q786 | | DRA2124E-X | DIGI TRANSISTOR | | 1 | |
| | Q786 | or | RT1P241C-X | TRANSISTOR | | 1 | |
| | Q881 | | DRC2114E-X | DIGI TRANSISTOR | | 1 | |
| | Q881 | or | RT1N141C-X | DIGI TRANSISTOR | | 1 | |
| | Q970 | | 2SC1623A/5-6/-X | TRANSISTOR | | 1 | |
| | Q970 | or | 2SC3928A/QR/-X | TRANSISTOR | | 1 | |
| | Q971 | | 2SC1623A/5-6/-X | TRANSISTOR | | 1 | |
| | Q971 | or | 2SC3928A/QR/-X | TRANSISTOR | | 1 | |
| | D271 | | BAW56-TP-X | SI DIODE | | 1 | |
| | D271 | or | MC2836-X | DIODE | | 1 | |
| | D321 | | BAW56-TP-X | SI DIODE | | 1 | |
| | D321 | or | MC2836-X | DIODE | | 1 | |
| | D331 | | BAW56-TP-X | SI DIODE | | 1 | |
| | D331 | or | MC2836-X | DIODE | | 1 | |
| | D501 | | GS1J-LTP-X | DIODE | | 1 | |
| | D501 | or | 1SR154-400-X | SI DIODE | | 1 | |
| | D502 | | GS1J-LTP-X | DIODE | | 1 | |
| | D502 | or | 1SR154-400-X | SI DIODE | | 1 | |
| | D702 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D702 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D703 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D703 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D704 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D704 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D705 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D705 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D706 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D706 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D710 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D710 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D711 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D711 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D712 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D712 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D713 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D713 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D714 | | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D714 | or | DZ2J062/M/-X | Z DIODE | | 1 | |
| | D721 | | MC2838-X | DIODE | | 1 | |
| | D722 | | BAW56-TP-X | SI DIODE | | 1 | |
| | D722 | or | MC2836-X | DIODE | | 1 | |
| | D730 | | RKZ5.6B2KG-X | Z DIODE | | 1 | |
| | D730 | or | DZ2J056/M/-X | Z DIODE | | 1 | |
| | D733 | | SML-D12V8W-X | LED | | 1 | |
| | D734 | | SML-D12V8W-X | LED | | 1 | |
| | D735 | | SML-D12V8W-X | LED | | 1 | |
| | D782 | | BAW56-TP-X | SI DIODE | | 1 | |
| | D782 | or | MC2836-X | DIODE | | 1 | |
| | D783 | | RKS801KF-X | SI DIODE | | 1 | |
| | D783 | or | DA2J101-X | SI DIODE | | 1 | |
| | D785 | | BAW56-TP-X | SI DIODE | | 1 | |
| | D785 | or | MC2836-X | DIODE | | 1 | |
| | D786 | | RKS801KF-X | SI DIODE | | 1 | |
| | D786 | or | DA2J101-X | SI DIODE | | 1 | |
| | D851 | | MBRX130-TP-X | SB DIODE | | 1 | G,H |
| | D852 | | MBRX130-TP-X | SB DIODE | | 1 | G,H |
| ⚠ | D901 | | 1N5401-BPC04 | SI DIODE | | 1 | |
| | D931 | | RB051L-40-X | SB DIODE | | 1 | |
| | D932 | | RB051L-40-X | SB DIODE | | 1 | |
| | D970 | | RKZ6.8B2KG-X | Z DIODE | | 1 | |
| | D970 | or | DZ2J068/M/-X | Z DIODE | | 1 | |
| | D971 | | RKZ6.8B2KG-X | Z DIODE | | 1 | |
| | D971 | or | DZ2J068/M/-X | Z DIODE | | 1 | |
| | D981 | | MBRX130-TP-X | SB DIODE | | 1 | |
| | D982 | | MBRX130-TP-X | SB DIODE | | 1 | |
| | C1 | | NDC31HJ-102X | C CAPACITOR | 1000pF 50V J | 1 | |
| | C2 | | NDC31HJ-7R0X | C CAPACITOR | 7pF 50V J | 1 | |
| | C3 | | NDC31HJ-102X | C CAPACITOR | 1000pF 50V J | 1 | |
| | C4 | | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C5 | | NDC31HJ-150X | C CAPACITOR | 15pF 50V J | 1 | |
| | C6 | | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C7 | | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C8 | | NDC31HJ-2R0X | C CAPACITOR | 2pF 50V J | 1 | |
| | C9 | | NDC31HJ-5R6X | C CAPACITOR | 5.6pF 50V J | 1 | |
| | C10 | | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C11 | | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C12 | | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C13 | | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C14 | | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C15 | | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C16 | | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C17 | | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C18 | | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C19 | | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C22 | | NDC31HJ-120X | C CAPACITOR | 12pF 50V J | 1 | |
| | C23 | | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C24 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C25 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C26 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C36 | NAF0029-001X | DIODE | | 1 | |
| | C92 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C93 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C94 | NDC31HJ-331X | C CAPACITOR | 330pF 50V J | 1 | |
| | C95 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C96 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | 1 | |
| | C97 | NDC31HJ-331X | C CAPACITOR | 330pF 50V J | 1 | |
| | C98 | NCB31HK-333X | C CAPACITOR | 0.033uF 50V K | 1 | |
| | C99 | NCB31HK-273X | C CAPACITOR | 0.027uF 50V K | 1 | |
| | C100 | NCB31HK-273X | C CAPACITOR | 0.027uF 50V K | 1 | |
| | C101 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C102 | NCB31HK-333X | C CAPACITOR | 0.033uF 50V K | 1 | |
| | C103 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | 1 | |
| | C104 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C114 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C115 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C161 | QEKJ1HM-105Z-S | E CAPACITOR | 1uF 50V M | 1 | |
| | C162 | QTE1V67-475Z | E CAPACITOR | 4.7uF 35V | 1 | |
| | C163 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C165 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C166 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C167 | NDC31HJ-681X | C CAPACITOR | 680pF 50V J | 1 | |
| | C168 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C169 | QEKJ1CM-106Z-S | E CAPACITOR | 10uF 16V M | 1 | |
| | C171 | QEKJ1HM-105Z-S | E CAPACITOR | 1uF 50V M | 1 | |
| | C172 | QTE1V67-475Z | E CAPACITOR | 4.7uF 35V | 1 | |
| | C173 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C175 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C176 | NCB31AK-474X | C CAPACITOR | 0.47uF 10V K | 1 | |
| | C177 | NDC31HJ-681X | C CAPACITOR | 680pF 50V J | 1 | |
| | C178 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C179 | QEKJ1CM-107Z-S | E CAPACITOR | 100uF 16V M | 1 | |
| | C180 | NCB31HK-472X | C CAPACITOR | 4700pF 50V K | 1 | |
| | C181 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C182 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C183 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C191 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C192 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C276 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C278 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C301 | QTE1C66-474Z | E CAPACITOR | 0.47uF 16V | 1 | |
| | C302 | QTE1C66-474Z | E CAPACITOR | 0.47uF 16V | 1 | |
| | C303 | NDC31HJ-560X | C CAPACITOR | 56pF 50V J | 1 | |
| | C304 | NDC31HJ-560X | C CAPACITOR | 56pF 50V J | 1 | |
| | C305 | NDC31HJ-820X | C CAPACITOR | 82pF 50V J | 1 | |
| | C306 | QERF1CM-106Z-E | E CAPACITOR | 10uF 16V M | 1 | |
| | C310 | NDC31HJ-820X | C CAPACITOR | 82pF 50V J | 1 | |
| | C311 | QTE1C66-474Z | E CAPACITOR | 0.47uF 16V | 1 | |
| | C312 | QTE1C66-474Z | E CAPACITOR | 0.47uF 16V | 1 | |
| | C313 | NDC31HJ-560X | C CAPACITOR | 56pF 50V J | 1 | |
| | C314 | NDC31HJ-560X | C CAPACITOR | 56pF 50V J | 1 | |
| | C315 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C316 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C317 | QEKJ1CM-476Z-S | E CAPACITOR | 47uF 16V M | 1 | |
| | C318 | NCB21AK-105X-A | C CAPACITOR | 1uF 10V K | 1 | |
| | C319 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C320 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C326 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C327 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C335 | NCB21CK-474X-A | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C336 | NCB21CK-474X-A | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C337 | NCB21CK-474X-A | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C338 | NCB21CK-474X-A | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C365 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C366 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C385 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C386 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C475 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C476 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C501 | NCB31HK-222X | C CAPACITOR | 2200pF 50V K | 1 | |
| | C503 | NCB31HK-562X | C CAPACITOR | 5600pF 50V K | 1 | |
| | C505 | NCB31HK-222X | C CAPACITOR | 2200pF 50V K | 1 | |
| | C507 | NCB31HK-682X | C CAPACITOR | 6800pF 50V K | 1 | |
| | C509 | NDC31HJ-680X | C CAPACITOR | 68pF 50V J | 1 | |
| | C511 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C512 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C513 | QEKJ1CM-476Z | E CAPACITOR | 47uF 16V M | 1 | |
| | C515 | QEKJ0JM-107Z | E CAPACITOR | 100uF 6.3V M | 1 | |
| | C516 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C517 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C519 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C520 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C521 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C538 | NDC31HJ-820X | C CAPACITOR | 82pF 50V J | 1 | |
| | C541 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C542 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C543 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C544 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C545 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | 1 | |
| | C546 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C547 | NCB31CK-154X | C CAPACITOR | 0.15uF 16V K | 1 | |
| | C548 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C549 | NCB31HK-272X | C CAPACITOR | 2700pF 50V K | 1 | |
| | C550 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | 1 | |
| | C551 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C552 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C553 | NCB31HK-332X | C CAPACITOR | 3300pF 50V K | 1 | |
| | C554 | NCB31AK-334X | C CAPACITOR | 0.33uF 10V K | 1 | |
| | C555 | NCB21CK-475X | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C556 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C557 | NDC31HJ-681X | C CAPACITOR | 680pF 50V J | 1 | |
| | C558 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | 1 | |
| | C559 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | 1 | |
| | C561 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C562 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C563 | NCB31HK-153X | C CAPACITOR | 0.015uF 50V K | 1 | |
| | C564 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C565 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C566 | NCB31CK-823X | C CAPACITOR | 0.082uF 16V K | 1 | |
| | C568 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C569 | NCB31AK-334X | C CAPACITOR | 0.33uF 10V K | 1 | |
| | C570 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C571 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C573 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C574 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C575 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C576 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C577 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C578 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C579 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C583 | NDC31HJ-821X | C CAPACITOR | 820pF 50V J | 1 | |
| | C584 | NDC31HJ-821X | C CAPACITOR | 820pF 50V J | 1 | |
| | C585 | QEKJ1HM-475Z-E | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C586 | QEKJ1HM-475Z-E | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C587 | NDC31HJ-151X | C CAPACITOR | 150pF 50V J | 1 | |
| | C588 | NDC31HJ-151X | C CAPACITOR | 150pF 50V J | 1 | |
| | C589 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C590 | QEKJ0JM-476Z-S | E CAPACITOR | 47uF 6.3V M | 1 | |
| | C591 | QEKJ1AM-107Z-S | E CAPACITOR | 100uF 10V M | 1 | |
| | C592 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C701 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C702 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C708 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | 1 | |
| | C709 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C711 | NDC31HJ-470X | C CAPACITOR | 47pF 50V J | 1 | |
| | C713 | NDC31HJ-470X | C CAPACITOR | 47pF 50V J | 1 | |
| | C714 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C715 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C716 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C717 | NCB31CK-473X | C CAPACITOR | 0.047uF 16V K | 1 | |
| | C718 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C721 | NCB31CK-473X | C CAPACITOR | 0.047uF 16V K | 1 | |
| | C722 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C723 | QEKJ0JM-337Z | E CAPACITOR | 330uF 6.3V M | 1 | |
| | C725 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C726 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C727 | NCB31CK-473X | C CAPACITOR | 0.047uF 16V K | 1 | |
| | C731 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C732 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C733 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | 1 | |
| | C771 | NCB31CK-473X | C CAPACITOR | 0.047uF 16V K | 1 | |
| | C784 | NCB30JK-225X | C CAPACITOR | 2.2uF 6.3V K | 1 | |
| | C785 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C881 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | 1 | |
| | C901 | QEZ0937-278 | E CAPACITOR | 2700uF | 1 | |
| | C902 | QEKJ1HM-225Z | E CAPACITOR | 2.2uF 50V M | 1 | |
| | C903 | QEKJ1CM-476Z | E CAPACITOR | 47uF 16V M | 1 | |
| | C904 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C905 | QEKJ1CM-476Z | E CAPACITOR | 47uF 16V M | 1 | |
| | C906 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C907 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C908 | QERF1AM-227Z | E CAPACITOR | 220uF 10V M | 1 | |
| | C909 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | 1 | |
| | C910 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C911 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C915 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C916 | NCB31HK-332X | C CAPACITOR | 3300pF 50V K | 1 | |
| | C917 | QEKJ0JM-227Z | E CAPACITOR | 220uF 6.3V M | 1 | |
| | C918 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C920 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C921 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C922 | QEKJ0JM-107Z | E CAPACITOR | 100uF 6.3V M | 1 | |
| | C925 | NCJ30JM-106X-A | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C928 | QERF1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C929 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | C930 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C931 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C932 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C933 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C934 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C935 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C937 | NCB31HK-682X | C CAPACITOR | 6800pF 50V K | 1 | |
| | C938 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C942 | QEZ0850-157Z | E CAPACITOR | 150uF | 1 | |
| | C944 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C946 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C952 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C953 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C955 | QEZ0850-157Z | E CAPACITOR | 150uF | 1 | |
| | C961 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C962 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C963 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C964 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C965 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C966 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C967 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C968 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C973 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C974 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C975 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C976 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C977 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C979 | NCB31HK-682X | C CAPACITOR | 6800pF 50V K | 1 | |
| | C982 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C983 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C984 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C991 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C992 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C994 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C995 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | C996 | NCB31CK-474X | C CAPACITOR | 0.47uF 16V K | 1 | |
| | R1 | NRSA63J-684X | MG RESISTOR | 680kΩ 1/16W J | 1 | |
| | R2 | NRSA63J-684X | MG RESISTOR | 680kΩ 1/16W J | 1 | |
| | R4 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R5 | NRSA02J-470X | MG RESISTOR | 47Ω 1/10W J | 1 | |
| | R6 | NRSA63J-221X | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R7 | NRSA63J-221X | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R8 | NRSA02J-470X | MG RESISTOR | 47Ω 1/10W J | 1 | |
| | R11 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R14 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R15 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R90 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R92 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R93 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R94 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R95 | NRSA63J-124X | MG RESISTOR | 120kΩ 1/16W J | 1 | |
| | R96 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R97 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R98 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R99 | NRSA63J-124X | MG RESISTOR | 120kΩ 1/16W J | 1 | |
| | R100 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R101 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R102 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R103 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R104 | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R108 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R109 | NRSA02J-122X | MG RESISTOR | 1.2kΩ 1/10W J | 1 | |
| | R110 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R111 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R112 | NRSA02J-561X | MG RESISTOR | 560Ω 1/10W J | 1 | |
| | R160 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R161 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R162 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R163 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,E |
| | R164 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R166 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R167 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R168 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R170 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | A,F,G,H |
| | R173 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | A,F,G,H |
| | R174 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R176 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R178 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R189 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R195 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R272 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R273 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R274 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R275 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R276 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R277 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F,G,H |
| | R277 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R278 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R279 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F,G,H |
| | R279 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R301 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R302 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R303 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R304 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R305 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R307 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R309 | NRSA02J-751X | MG RESISTOR | 750Ω 1/10W J | 1 | A,F,G,H |
| | R309 | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J | 1 | B,C,D,E |
| | R310 | NRSA63J-364X | MG RESISTOR | 360kΩ 1/16W J | 1 | A,F,G,H |
| | R310 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R311 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R312 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R313 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R314 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R321 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F,G,H |
| | R321 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R322 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R323 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R324 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R325 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | A,F,G,H |
| | R326 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | A,F,G,H |
| | R327 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | A,F,G,H |
| | R328 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | A,F,G,H |
| | R331 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F,G,H |
| | R331 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R332 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R333 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R334 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R335 | NRSA63J-512X | MG RESISTOR | 5.1kΩ 1/16W J | 1 | A,F,G,H |
| | R335 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,E |
| | R336 | NRSA63J-512X | MG RESISTOR | 5.1kΩ 1/16W J | 1 | A,F,G,H |
| | R336 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,E |
| | R337 | NRSA63J-512X | MG RESISTOR | 5.1kΩ 1/16W J | 1 | A,F,G,H |
| | R337 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,E |
| | R338 | NRSA63J-512X | MG RESISTOR | 5.1kΩ 1/16W J | 1 | A,F,G,H |
| | R338 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,E |
| | R341 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F,G,H |
| | R341 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R342 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R343 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R344 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R351 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F,G,H |
| | R351 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | B,C,D,E |
| | R352 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R353 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R354 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R391 | NRZ0084-0R0X | MG RESISTOR | 0Ω | 1 | |
| | R392 | NRZ0084-0R0X | MG RESISTOR | 0Ω | 1 | |
| | R471 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R472 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R473 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R474 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R502 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | |
| | R503 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R504 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R505 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R507 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R508 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R509 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R510 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R511 | NRSA63J-562X | MG RESISTOR | 5.6kΩ 1/16W J | 1 | |
| | R512 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | R513 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | R514 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R515 | NRSA63J-562X | MG RESISTOR | 5.6kΩ 1/16W J | 1 | |
| | R516 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R517 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | |
| | R518 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R519 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R520 | NRS124J-100X | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R521 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R522 | NRSA63J-512X | MG RESISTOR | 5.1kΩ 1/16W J | 1 | |
| | R523 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R524 | NRSA63J-683X | MG RESISTOR | 68kΩ 1/16W J | 1 | |
| | R540 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R541 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R542 | NRSA63J-823X | MG RESISTOR | 82kΩ 1/16W J | 1 | |
| | R544 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R546 | NRSA63J-220X | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R547 | NRSA63J-220X | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R548 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R549 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R550 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R551 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R552 | NRSA63J-221X | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R553 | NRSA63J-105X | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R554 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R556 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R557 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R558 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R559 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R560 | NQR0360-004X | FERRITE BEADS | | 1 | |
| | R561 | NQR0360-004X | FERRITE BEADS | | 1 | |
| | R562 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R563 | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R564 | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R565 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R566 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R571 | NRSA63J-330X | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R572 | NRSA63J-330X | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R573 | NRSA63J-330X | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R574 | NRSA63J-330X | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R575 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | R576 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | R577 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | R583 | NRSA63J-243X | MG RESISTOR | 24kΩ 1/16W J | 1 | |
| | R584 | NRSA63J-243X | MG RESISTOR | 24kΩ 1/16W J | 1 | |
| | R585 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R586 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R587 | NRSA63J-273X | MG RESISTOR | 27kΩ 1/16W J | 1 | |
| | R588 | NRSA63J-273X | MG RESISTOR | 27kΩ 1/16W J | 1 | |
| | R591 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R592 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R593 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R594 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R603 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R701 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R702 | NRSA63J-106X | MG RESISTOR | 10MΩ 1/16W J | 1 | |
| | R703 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R709 | NRSA63J-151X | MG RESISTOR | 150Ω 1/16W J | 1 | |
| | R710 | NRSA63J-151X | MG RESISTOR | 150Ω 1/16W J | 1 | |
| | R711 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R712 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R713 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R714 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R715 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R719 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R721 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R722 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R723 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R724 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R725 | NRSA63J-393X | MG RESISTOR | 39kΩ 1/16W J | 1 | |
| | R726 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R727 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R728 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R729 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R731 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R734 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R735 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | 1 | |
| | R736 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | 1 | |
| | R742 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R746 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R747 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R748 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R749 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R750 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | A,B,C,D,E,G,H |
| | R751 | NRSA63J-512X | MG RESISTOR | 5.1kΩ 1/16W J | 1 | A |
| | R751 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | F,G,H |
| | R752 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R753 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R754 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R755 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R756 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R757 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R758 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R759 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F |
| | R760 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R761 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | 1 | |
| | R762 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | A,F |
| | R763 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | A,F |
| | R764 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | A,F |
| | R765 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | A,F |
| | R766 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R767 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R768 | NRSA63J-123X | MG RESISTOR | 12kΩ 1/16W J | 1 | |
| | R769 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R770 | NRSA63J-474X | MG RESISTOR | 470kΩ 1/16W J | 1 | |
| | R771 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R772 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R774 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R776 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R777 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R781 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R782 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R783 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R785 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R786 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R790 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R791 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R801 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | 1 | A,F |
| | R803 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | A,F |
| | R804 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | A,F |
| | R805 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | A,F |
| | R806 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | A,F |
| | R807 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | A,F |
| | R808 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | A,F |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R809 | NRSA63J-682X | MG RESISTOR | 6.8kΩ 1/16W J | 1 | A,F |
| | R810 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | A,F |
| | R811 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | A,F |
| | R812 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | 1 | A,F |
| | R814 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | A,F |
| | R851 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | G,H |
| | R881 | NRSA63J-273X | MG RESISTOR | 27kΩ 1/16W J | 1 | |
| | R882 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R901 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R902 | NRSA63J-562X | MG RESISTOR | 5.6kΩ 1/16W J | 1 | |
| | R904 | NRSA63J-155X | MG RESISTOR | 1.5MΩ 1/16W J | 1 | A,F,G,H |
| | R904 | NRSA63D-274X | MG RESISTOR | 270kΩ 1/16W D | 1 | B,C,D,E |
| | R905 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R906 | NRSA63D-273X | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R907 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R913 | NRS181J-682X | MG RESISTOR | 6.8kΩ 1/8W J | 1 | |
| | R914 | NRS181J-682X | MG RESISTOR | 6.8kΩ 1/8W J | 1 | |
| | R921 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R922 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R923 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R924 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R925 | NRSA63D-472X | MG RESISTOR | 4.7kΩ 1/16W D | 1 | |
| | R926 | NRSA63D-152X | MG RESISTOR | 1.5kΩ 1/16W D | 1 | |
| | R927 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R928 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R931 | NRSA63D-913X | MG RESISTOR | 91kΩ 1/16W D | 1 | |
| | R932 | NRSA63D-243X | MG RESISTOR | 24kΩ 1/16W D | 1 | |
| | R933 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R934 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R935 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R936 | NRSA63D-204X | MG RESISTOR | 200kΩ 1/16W D | 1 | |
| | R937 | NRSA63D-204X | MG RESISTOR | 200kΩ 1/16W D | 1 | |
| | R950 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R952 | NRSA63D-243X | MG RESISTOR | 24kΩ 1/16W D | 1 | |
| | R953 | NRSA63D-913X | MG RESISTOR | 91kΩ 1/16W D | 1 | |
| | R954 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R955 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R956 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R958 | NRS181J-271X | MG RESISTOR | 270Ω 1/8W J | 1 | |
| | R959 | NRS181J-271X | MG RESISTOR | 270Ω 1/8W J | 1 | |
| | R965 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R971 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R972 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R973 | NRSA63J-203X | MG RESISTOR | 20kΩ 1/16W J | 1 | |
| | R974 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R975 | NRSA02J-473X | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R976 | NRSA02J-683X | MG RESISTOR | 68kΩ 1/10W J | 1 | |
| | R977 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R979 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R981 | NRS181J-332X | MG RESISTOR | 3.3kΩ 1/8W J | 1 | |
| | R984 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R988 | NRSA63J-184X | MG RESISTOR | 180kΩ 1/16W J | 1 | |
| | R993 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R994 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | L3 | QQL232K-R27Z | COIL | 0.27uH K | 1 | |
| | L4 | QQR1872-001 | RF COIL | | 1 | |
| | L5 | QQL244J-561Z | COIL | 560uH J | 1 | |
| | L6 | QQL244J-561Z | COIL | 560uH J | 1 | |
| | L7 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L8 | NQL093K-4R7X | P COIL | 4.7uH K | 1 | |
| | L9 | NQL093K-R47X | P COIL | 0.47uH K | 1 | |
| | L10 | NQR0269-026X | FERRITE BEADS | 10.500mA | 1 | A,E,F |
| | L10 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,G,H |
| | L11 | NQL093K-R47X | P COIL | 0.47uH K | 1 | |
| | L12 | NQL093K-1R8X | P COIL | 1.8uH K | 1 | |
| | L181 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | A,F,G,H |
| | L191 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L521 | NQL093K-1R8X | P COIL | 1.8uH K | 1 | |
| | L701 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L702 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L703 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L901 | QQR1884-001 | CHOKE COIL | | 1 | |
| | L902 | NQL79GM-101X | COIL | 100uH M | 1 | |
| | L931 | QQLA1AM-220 | COIL | 22uH M | 1 | |
| | L941 | QQLA1AM-220 | COIL | 22uH M | 1 | |
| | B906 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | B907 | NRZ0084-0R0X | MG RESISTOR | 0Ω | 1 | |
| | CN102 | QNZ0605-002 | CAR CONNECTOR | | 1 | |
| | CN103 | QGA2001C1-10 | CONNECTOR | W-B (1-10) | 1 | |
| | CN472 | QGA2001F1-05 | CONNECTOR | W-B (1-5) | 1 | |
| | CN502 | QGF1049F1-26X | CONNECTOR | FFC/FPC (1-26) | 1 | |
| | CN901 | QNZ0607-001 | CAR CONNECTOR | | 1 | |
| | J1 | QNB0190-001 | ANT TERMINAL | | 1 | |
| | J1 or | QNB0348-001 | ANT TERMINAL | | 1 | |
| | J2 | QNN0866-001 | PIN JACK | | 1 | |
| | J801 | QNZ0095-001 | CONNECTOR | | 1 | A,F |
| | K581 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | K706 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | K707 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | K708 | NQR0022-005X | FERRITE BEADS | | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|---|
| | K932 | | NQLH25M-4R7X | COIL | 4.7uH M | 1 | |
| | K941 | | NQLH25M-4R7X | COIL | 4.7uH M | 1 | |
| | LF472 | | NQR0682-001X | CHOKE COIL | | 1 | |
| | LF473 | | NQR0682-001X | CHOKE COIL | | 1 | |
| | PP2 | | QZW0010-001 | STYLE PIN | | 1 | |
| | PP3 | | QZW0010-001 | STYLE PIN | | 1 | |
| | S701 | | QSW0451-001 | PUSH SWITCH | | 1 | |
| | S702 | | QSW0451-001 | PUSH SWITCH | | 1 | |
| | S703 | | QSW0648-001Z | TACT SWITCH | | 1 | |
| | S704 | | NSW0246-001X | TACT SWITCH | | 1 | |
| | X11 | | QAX0952-001Z | CRYSTAL | | 1 | |
| | X521 | | QAX0714-001Z | C RESONATOR | 16.000MHz | 1 | |
| | X701 | | NAX0647-001X | C RESONATOR | 20.000MHz | 1 | |
| | X702 | | QAX0401-001 | CRYSTAL | 32.768KHz | 1 | |
| SWITCH UNIT <02> | | | | | | | |
| | IC601 | | PCA9624PW-X | IC | | 1 | |
| | IC602 | | XC6120N242NG-X | IC | | 1 | |
| | IC610 | | XC6216B902MR-X | IC | | 1 | A,F,G,H |
| | IC661 | | JES237G | IC(MCU) | | 1 | |
| | IC681 | | KSM-2003TN5B | IR DETECT UNIT | | 1 | |
| | Q601 | | 2SC1623A/5-6/-X | TRANSISTOR | | 1 | |
| | Q601 | or | 2SC3928A/QR/-X | TRANSISTOR | | 1 | |
| | Q602 | | 2SA812A/5-6/-X | TRANSISTOR | | 1 | |
| | Q602 | or | ISA1530AC1/QR/X | TRANSISTOR | | 1 | |
| | Q603 | | 2SA812A/5-6/-X | TRANSISTOR | | 1 | |
| | Q603 | or | ISA1530AC1/QR/X | TRANSISTOR | | 1 | |
| | D601 | | NSSM065T-X | LED | | 1 | |
| | D602 | | NSSM065T-X | LED | | 1 | |
| | D604 | | NSSM065T-X | LED | | 1 | |
| | D605 | | NSSM065T-X | LED | | 1 | |
| | D609 | | NSSM065T-X | LED | | 1 | |
| | D610 | | NSSM065T-X | LED | | 1 | |
| | D618 | | RKZ5.6B2KG-X | Z DIODE | | 1 | |
| | D618 | or | DZ2J056/M/-X | Z DIODE | | 1 | |
| | D620 | | SML-D12V8W-X | LED | | 1 | |
| | D630 | | MC2838-X | DIODE | | 1 | |
| | D651 | | RKS801KF-X | SI DIODE | | 1 | |
| | D651 | or | DA2J101-X | SI DIODE | | 1 | |
| | D682 | | RKZ3.3B2KG-X | Z DIODE | | 1 | |
| | D682 | or | DZ2J033/M/-X | Z DIODE | | 1 | |
| | C601 | | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C602 | | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C604 | | NBE21CM-106X | TA E CAPACITOR | 10uF 16V M | 1 | |
| | C605 | | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C606 | | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C607 | | NCB11EK-475X | C CAPACITOR | 4.7uF 25V K | 1 | |
| | C608 | | NCB11EK-475X | C CAPACITOR | 4.7uF 25V K | 1 | |
| | C612 | | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | A,F,G,H |
| | C613 | | NCB21CK-105X | C CAPACITOR | 1uF 16V K | 1 | A,F,G,H |
| | C614 | | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C641 | | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C642 | | NCB20JK-475X | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C650 | | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C661 | | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C662 | | NCB20JK-106X | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C663 | | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C667 | | NBE20JM-106X | TA E CAPACITOR | 10uF 6.3V M | 1 | |
| | C669 | | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C671 | | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C682 | | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | R601 | | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R602 | | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R603 | | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R604 | | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R605 | | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R607 | | NRS181J-431X | MG RESISTOR | 430Ω 1/8W J | 1 | A,F,G,H |
| | R607 | | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | 1 | B,C,D,E |
| | R608 | | NRS181J-431X | MG RESISTOR | 430Ω 1/8W J | 1 | A,F,G,H |
| | R608 | | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | 1 | B,C,D,E |
| | R609 | | NRS181J-821X | MG RESISTOR | 820Ω 1/8W J | 1 | A,F,G,H |
| | R609 | | NRS181J-681X | MG RESISTOR | 680Ω 1/8W J | 1 | B,C,D,E |
| | R610 | | NRS181J-122X | MG RESISTOR | 1.2kΩ 1/8W J | 1 | A,F,G,H |
| | R610 | | NRS181J-102X | MG RESISTOR | 1kΩ 1/8W J | 1 | B,C,D,E |
| | R611 | | NRS181J-122X | MG RESISTOR | 1.2kΩ 1/8W J | 1 | A,F,G,H |
| | R611 | | NRS181J-102X | MG RESISTOR | 1kΩ 1/8W J | 1 | B,C,D,E |
| | R612 | | NRS181J-152X | MG RESISTOR | 1.5kΩ 1/8W J | 1 | |
| | R613 | | NRS181J-102X | MG RESISTOR | 1kΩ 1/8W J | 1 | A,F,G,H |
| | R613 | | NRS181J-821X | MG RESISTOR | 820Ω 1/8W J | 1 | B,C,D,E |
| | R614 | | NRS181J-102X | MG RESISTOR | 1kΩ 1/8W J | 1 | A,F,G,H |
| | R614 | | NRS181J-821X | MG RESISTOR | 820Ω 1/8W J | 1 | B,C,D,E |
| | R615 | | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R618 | | NRS181J-271X | MG RESISTOR | 270Ω 1/8W J | 1 | A,F,G,H |
| | R618 | | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | 1 | B,C,D,E |
| | R619 | | NRS181J-271X | MG RESISTOR | 270Ω 1/8W J | 1 | A,F,G,H |
| | R619 | | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | 1 | B,C,D,E |
| | R620 | | NRS181J-561X | MG RESISTOR | 560Ω 1/8W J | 1 | A,F,G,H |
| | R620 | | NRS181J-681X | MG RESISTOR | 680Ω 1/8W J | 1 | B,C,D,E |
| | R621 | | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R622 | | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R623 | | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R624 | | NRSA63J-182X | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R625 | | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R626 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R627 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R628 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R629 | NRSA63J-182X | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R630 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R631 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | B,C,D,E |
| | R634 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | A,F,G,H |
| | R634 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | B,C,D,E |
| | R637 | NRSA63J-106X | MG RESISTOR | 10MΩ 1/16W J | 1 | |
| | R641 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R642 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R644 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R645 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R646 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R647 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R648 | NRS181J-103X | MG RESISTOR | 10kΩ 1/8W J | 1 | B,C,D,E |
| | R649 | NRS181J-152X | MG RESISTOR | 1.5kΩ 1/8W J | 1 | |
| | R650 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R651 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R652 | NRSA63J-681X | MG RESISTOR | 680Ω 1/16W J | 1 | |
| | R653 | NRSA63J-681X | MG RESISTOR | 680Ω 1/16W J | 1 | |
| | R654 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R655 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R656 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R657 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R658 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R660 | NRSA63J-154X | MG RESISTOR | 150kΩ 1/16W J | 1 | |
| | R661 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R662 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R663 | NRSA63J-105X | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R664 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R665 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R666 | NRS181J-103X | MG RESISTOR | 10kΩ 1/8W J | 1 | |
| | R667 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R668 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | R669 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R670 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R671 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R674 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R675 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R679 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R680 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R681 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R683 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R685 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R687 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R689 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R690 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R691 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R692 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R693 | NRS181J-103X | MG RESISTOR | 10kΩ 1/8W J | 1 | |
| | R695 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R696 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R697 | NRSA63J-474X | MG RESISTOR | 470kΩ 1/16W J | 1 | |
| | R698 | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | 1 | |
| | L603 | NQL79GM-470X | COIL | 47uH M | 1 | |
| | L604 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | L661 | NQL79GM-470X | COIL | 47uH M | 1 | |
| | B606 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | B610 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | B,C,D,E |
| | CN601 | NNZ0085-001 | CAR CONNECTOR | | 1 | |
| | CN602 | QGF0534F5-15X | CONNECTOR | FFC/FPC (1-15) | 1 | |
| | EN601 | QSW1231-002 | ROTARY ENCODER | | 1 | |
| | S661 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S662 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S663 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S664 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S665 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S667 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S668 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S669 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S670 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S671 | NSW0246-001X | TACT SWITCH | | 1 | |
| | TH601 | NAD0028-103X | N THERMISTOR | 10kΩ | 1 | |
| | X661 | NAX0613-001X | C RESONATOR | 16.000MHz | 1 | |

USB UNIT <03>

| | | | | | | |
|---|---|---|---|---|---|---|
| ⚠ | IC401 | TCC8600 | IC | | 1 | |
| | IC402 | R1EX24512ASAS-X | IC | | 1 | |
| | IC402 or | M24512-WMN6-X | IC | | 1 | |
| ⚠ | IC441 | JVM546K | PROGRAMMED IC | | 1 | |
| ⚠ | IC442 | A3V28S40FTP-G6 | IC | | 1 | |
| | IC471 | 74LVC1G3157GW-X | IC | | 1 | |
| | IC481 | MFI341S2162-X | IC | | 1 | |
| | IC491 | NJM2878F4-18-X | IC | | 1 | |
| | IC601 | PCM1780-X | IC | | 1 | |
| | Q401 | LTC044EUB-X | DIGI TRANSISTOR | | 1 | |
| | Q401 or | DRC5144E-X | DIGI TRANSISTOR | | 1 | |
| | D601 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D601 or | DZ2J051/M/-X | Z DIODE | | 1 | |
| | C401 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C402 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C403 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C404 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C405 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C406 | NDCA1HJ-471W | C CAPACITOR | 470pF 50V J | 1 | |
| | C407 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C408 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C409 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C410 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C414 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C415 | NCBA1HK-122W | C CAPACITOR | 1200pF 50V K | 1 | |
| | C416 | NCJ30JM-106X-A | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C417 | NDCA1HJ-331W | C CAPACITOR | 330pF 50V J | 1 | |
| | C418 | NCB31CK-154X | C CAPACITOR | 0.15uF 16V K | 1 | |
| | C419 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C420 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C421 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C422 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C423 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C424 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C425 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C426 | NDCA1HJ-200W | C CAPACITOR | 20pF 50V J | 1 | |
| | C430 | NQR0450-001X | EMI FILTER | 0.022uF 50V M | 1 | |
| | C441 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C442 | NBE20JM-226X | TA E CAPACITOR | 22uF 6.3V M | 1 | |
| | C443 | NBE20JM-226X | TA E CAPACITOR | 22uF 6.3V M | 1 | |
| | C444 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C445 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C446 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C447 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C448 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C449 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C450 | NDC31HJ-561X | C CAPACITOR | 560pF 50V J | 1 | |
| | C451 | NDCA1HJ-471W | C CAPACITOR | 470pF 50V J | 1 | |
| | C452 | NDCA1HJ-471W | C CAPACITOR | 470pF 50V J | 1 | |
| | C453 | NDCA1HJ-471W | C CAPACITOR | 470pF 50V J | 1 | |
| | C454 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | C455 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | C456 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | C457 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | C471 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C481 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C482 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C491 | NBE41AM-476X | TA E CAPACITOR | 47uF 10V M | 1 | |
| | C492 | NCB20JK-106X | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C493 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C494 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C495 | NBE20JM-226X | TA E CAPACITOR | 22uF 6.3V M | 1 | |
| | C497 | NDC31HJ-331X | C CAPACITOR | 330pF 50V J | 1 | |
| | C601 | NBE41AM-476X | TA E CAPACITOR | 47uF 10V M | 1 | |
| | C602 | NCBA1CK-123W | C CAPACITOR | 0.012uF 16V K | 1 | |
| | C603 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C604 | NBE41AM-476X | TA E CAPACITOR | 47uF 10V M | 1 | |
| | C605 | NDCA1HJ-101W | C CAPACITOR | 100pF 50V J | 1 | |
| | C606 | NDCA1HJ-101W | C CAPACITOR | 100pF 50V J | 1 | |
| | R401 | NRSA6AJ-470W | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R402 | NRSA6AJ-470W | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R403 | NRSA6AJ-470W | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R404 | NRSA6AJ-151W | MG RESISTOR | 150Ω 1/16W J | 1 | |
| | R405 | NRSA6AJ-105W | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R406 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | R407 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R408 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R409 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R410 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R411 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R412 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R413 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R414 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R415 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R416 | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R417 | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R418 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R419 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R420 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R421 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R422 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R423 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R425 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R426 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R427 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R428 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R429 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R430 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R431 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R432 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R435 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R436 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R441 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R443 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R444 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R445 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R446 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R451 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R452 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R453 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R454 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R455 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R456 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R457 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R458 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R462 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R463 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R469 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R481 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R521 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R601 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R602 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R603 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | R604 | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R605 | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R606 | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R607 | NRSA63J-220X | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R608 | NRS181J-181X | MG RESISTOR | 180Ω 1/8W J | 1 | |
| | R609 | NRS181J-181X | MG RESISTOR | 180Ω 1/8W J | 1 | |
| | L401 | NQL093K-R12X | P COIL | 0.12uH K | 1 | |
| | L402 | NQL093K-R12X | P COIL | 0.12uH K | 1 | |
| | L403 | NRSA02J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | L404 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | L405 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | L406 | NRSA63J-151X | MG RESISTOR | 150Ω 1/16W J | 1 | |
| | L407 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | L491 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L601 | NQL79GM-470X | COIL | 47uH M | 1 | |
| | CN441 | QGG2011M1-18X | CONNECTOR | (1-18) | 1 | |
| | CN442 | QGG2011M1-18X | CONNECTOR | (1-18) | 1 | |
| | CN444 | QGG2504M5-02 | CONNECTOR | (1-2) | 1 | |
| | K441 | NQR0502-001X | FERRITE BEADS | | 1 | |
| | K442 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K443 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K444 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K445 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K446 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K447 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K448 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K451 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | K452 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | K453 | NQR0286-007X | FERRITE BEADS | | 1 | |
| | LF409 | NQR0682-001X | CHOKE COIL | | 1 | |
| | LF410 | NQR0682-001X | CHOKE COIL | | 1 | |
| | X401 | NAX1168-001X | CRYSTAL | | 1 | |

CD PLAYER UNIT (FLM-HC3-1D) IN CD MECHA <04>

| | | | | | | |
|---|---|---|---|---|---|---|
| | R1 | NRSA63J-131X | MG RESISTOR | 130Ω 1/16W J | 1 | |
| | CN101 | QGF1044F2-26X | CONNECTOR | FFC/FPC (1-26) | 1 | |
| | CN102 | QGF0522F3-15W | CONNECTOR | FFC/FPC (1-15) | 1 | |
| | SW1 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW1 or | NSW0233-001X | DETECT SWITCH | | 1 | |
| | SW2 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW2 or | NSW0233-001X | DETECT SWITCH | | 1 | |
| | SW3 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW3 or | NSW0233-001X | DETECT SWITCH | | 1 | |
| | SW4 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW4 or | NSW0233-001X | DETECT SWITCH | | 1 | |

# PACKING AND ACCESSORIES

Block No.M3MM

No additional / supplemental order of WARRANTY CARDs are available.

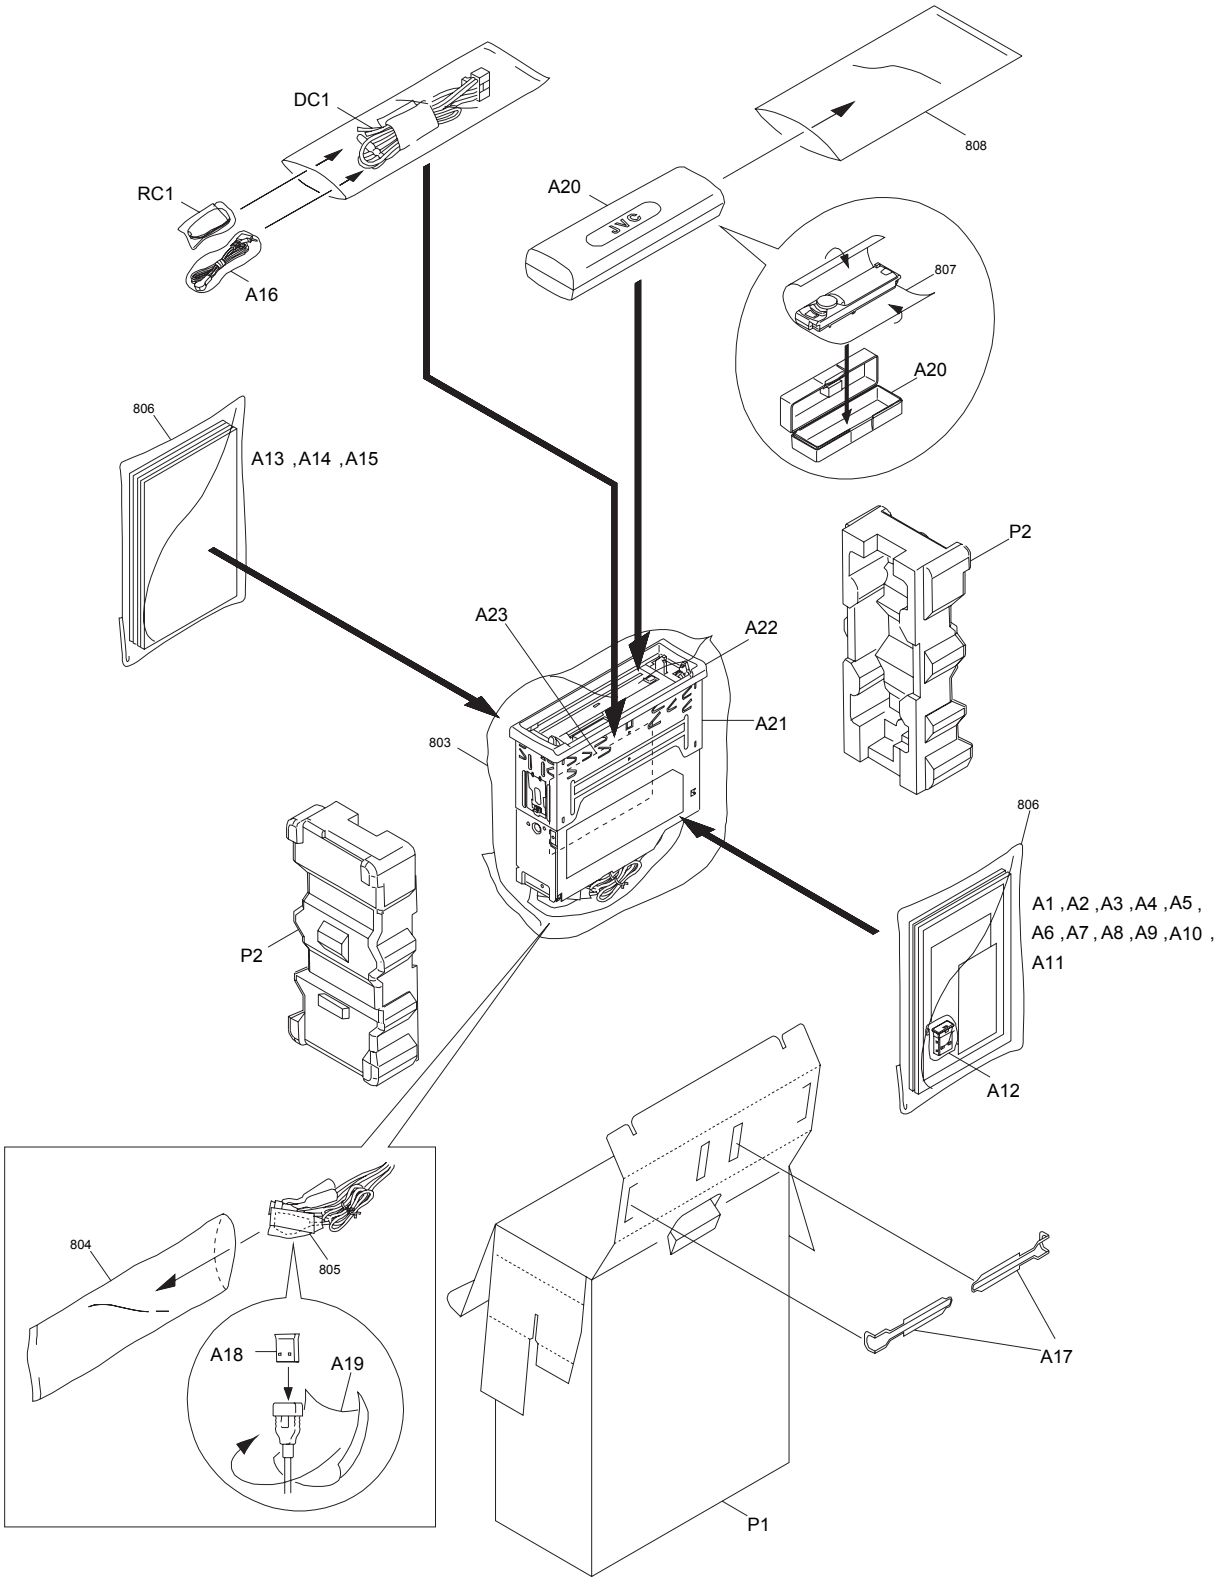


Parts with the exploded numbers lager than 700 are not supplied.

| MODEL | MARK | MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|---|---|
| KD-A65J | A | KD-R50E | B | KD-R50EN | C | KD-R50EY | D |
| KD-R60J | E | KD-R80BTJ | F | KD-R80BTU | G | KD-R80BTUN | H |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| PACKING AND ACCESSORIES <M3MM> | | | | | | |
| ⚠ | DC1 | QAM1331-001 | DC CORD | | 1 | A,E,F |
| ⚠ | DC1 | QAM1343-001 | DC CORD | | 1 | B,C,D |
| ⚠ | DC1 | QAM1332-001 | DC CORD | | 1 | G,H |
| | RC1 | RM-RK52M | REMOCON UNIT | | 1 | |
| | A1 | GET0798-001A | INST BOOK | ENG SPA FRE | 1 | A,E,F |
| | A1 | GET0799-003A | INST BOOK | ENG FRE | 1 | B,C |
| | A1 | GET0799-005A | INST BOOK | POL RUS GRE UKR | 1 | D |
| | A1 | GET0800-001A | INST BOOK | ENG RUS THA ARA PER | 1 | G |
| | A1 | GET0800-004A | INST BOOK | ENG INA | 1 | H |
| | A2 | GET0799-004A | INST BOOK | SWE DAN FIN | 1 | C |
| | A3 | GET0798-002A | INSTALL MANUAL | ENG SPA FRE | 1 | A,E,F |
| | A3 | GET0799-007A | INSTALL MANUAL | GER | 1 | B,C,D |
| | A3 | GET0800-005A | INSTALL MANUAL | ENG RUS THA ARA PER | 1 | G |
| | A3 | GET0800-008A | INSTALL MANUAL | ENG INA | 1 | H |
| | A4 | GET0799-008A | INSTALL MANUAL | DUT SPA ITA POR | 1 | B |
| | A4 | GET0799-010A | INSTALL MANUAL | SWE DAN FIN | 1 | C |
| | A4 | GET0799-011A | INSTALL MANUAL | POL RUS GRE UKR | 1 | D |
| | A5 | GET0799-009A | INSTALL MANUAL | ENG FRE | 1 | B,C |
| | A5 | GET0799-012A | INSTALL MANUAL | ROM BUL CZE HUN | 1 | D |
| | A6 | ---------- | WARRANTY CARD | BT-52008-1 | 1 | A,E,F |
| | A6 | ---------- | WARRANTY CARD | BT-54047-1 | 1 | B,C,D |
| | A7 | ---------- | WARRANTY CARD | BT-51029-3 | 1 | A |
| | A7 | ---------- | WARRANTY CARD | BT-51018-6 | 1 | E,F |
| | A8 | ---------- | REGISTRATION CARD | BT-51044-1 | 1 | A,E,F |
| | A9 | LVT2328-001B | RUSSIAN SHEET | | 1 | D |
| | A10 | GET0820-001A | BT COUNTRY LIST | | 1 | F,G,H |
| | A11 | GET0617-001H | USB/BT ADP SHT | | 1 | F,G,H |
| | A12 | QAU0526-002 | RF MODULE | | 1 | G,H |
| | A13 | GET0799-001A | INST BOOK | GER | 1 | B,C,D |
| | A13 | GET0799-006A | INST BOOK | ROM BUL CZE HUN | 1 | D |
| | A13 | GET0800-002A | INST BOOK | CHI(TAIWAN) | 1 | G |
| | A14 | GET0799-002A | INST BOOK | DUT SPA ITA POR | 1 | B |
| | A15 | GET0800-006A | INSTALL MANUAL | CHI(TAIWAN) | 1 | G |
| | A16 | QAN0109-001 | MICROPHONE | | 1 | F,G,H |
| | A17 | GE40508-001A | HOOK | | 2 | |
| | A18 | QAU0526-002 | RF MODULE | | 1 | F |
| | A19 | GET0725-001A | BT DONGLE SHEET | | 1 | F |
| | A20 | GE32320-001A | HARD CASE ASSY | | 1 | |
| | A21 | GE20279-001A | MOUNTING SLEEVE | | 1 | |
| | A22 | GE20311-002A | TRIM PLATE | | 1 | A,B,C,D |
| | A22 | GE20311-001A | TRIM PLATE | | 1 | E,F,G,H |
| | A23 | GET0713-001A | CAUTION SHEET | | 1 | G,H |
| | P1 | GE35050-001A | INNER CARTON | | 1 | A |
| | P1 | GE34984-001A | INNER CARTON | | 1 | B,C,D |
| | P1 | GE34981-001A | INNER CARTON | | 1 | E |
| | P1 | GE34987-001A | INNER CARTON | | 1 | F |
| | P1 | GE34990-001A | INNER CARTON | | 1 | G,H |
| | P2 | GE10338-001A | CUSHION | | 1 | |