JVC

PARTS LIST

CD RECEIVER

KW-R500E
KW-R500EN
KW-R500EY
KW-R500J
KW-R500U
KW-R500UN
KW-R500UP

■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

■ PRECAUTIONS ON PARTS LIST

- The parts identified by the ⚠ symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.

■ PRECAUTIONS ON SERVICE

Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND (⏚) and the ISOLATED (NEUTRAL) GND (⊥).

1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.
   Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

■ DEVIATION TOLERANCE RANGE

DEVIATION TOLERANCE RANGE									
F	G	J	K	M	N	R	H	Z	P
± 1%	± 2%	± 5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

EXPLODED VIEW (UNIT)

Block No. M1MM

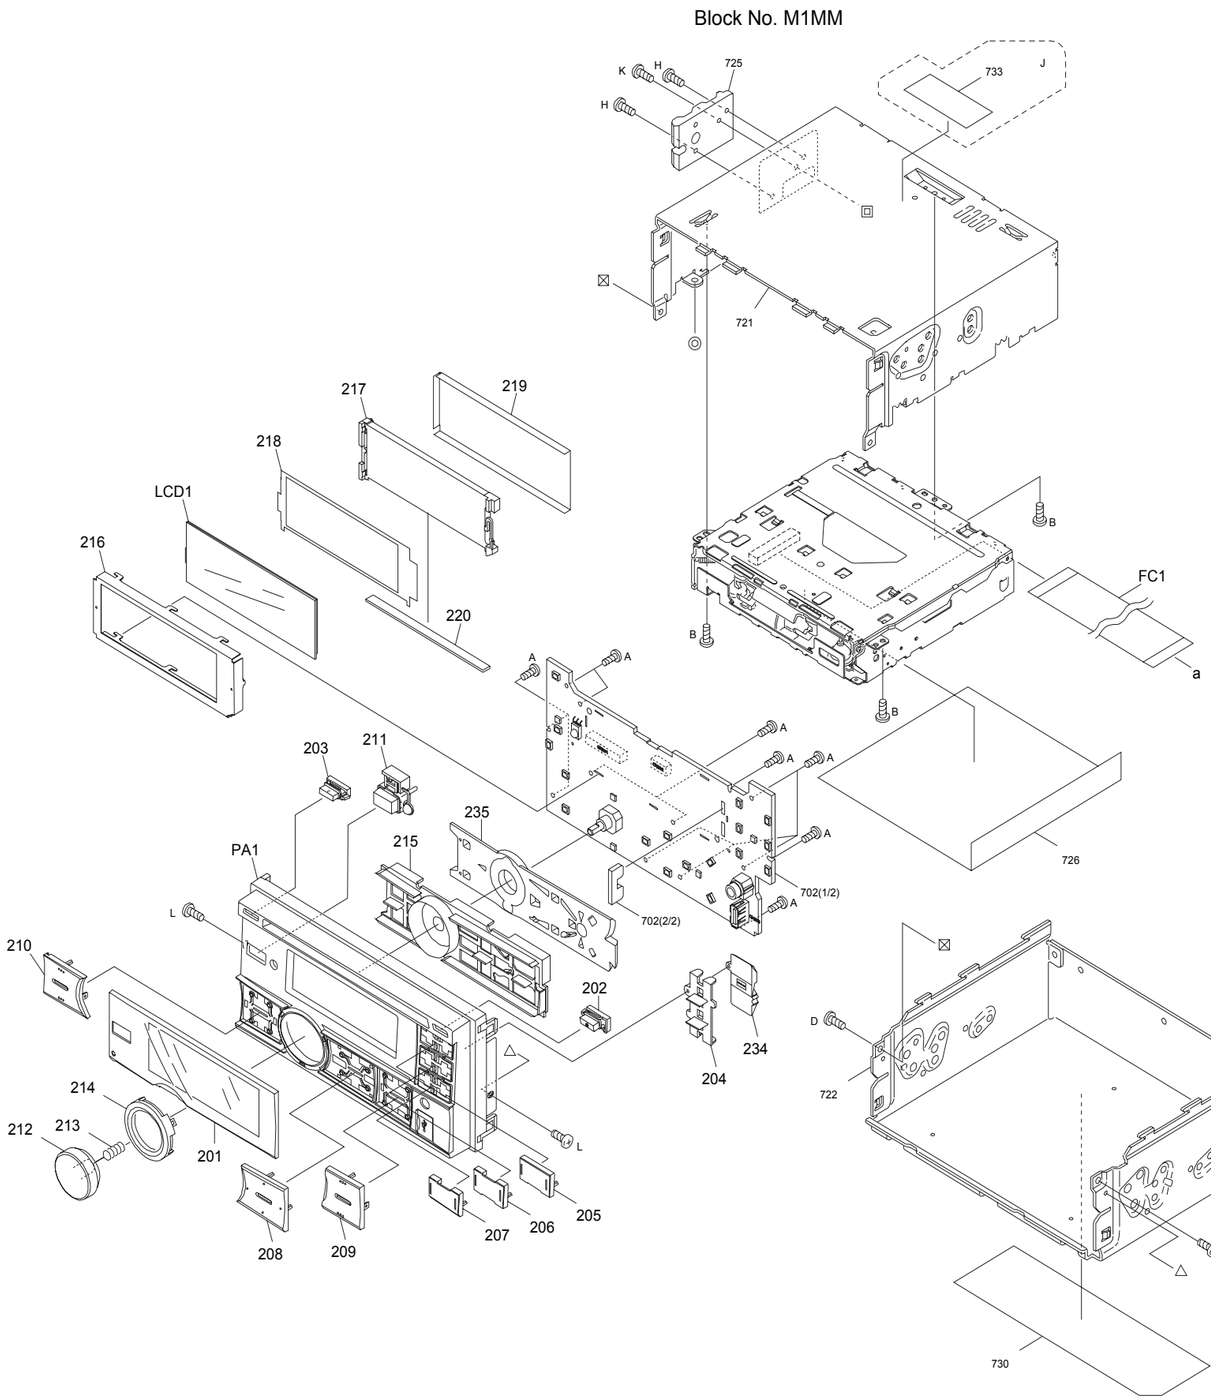

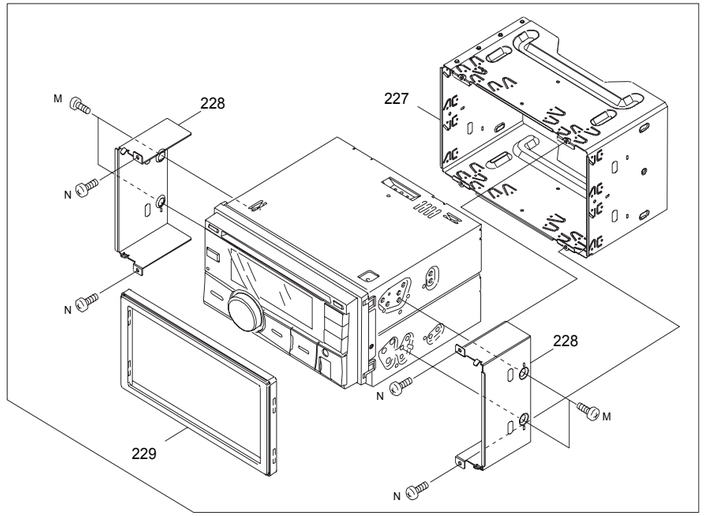

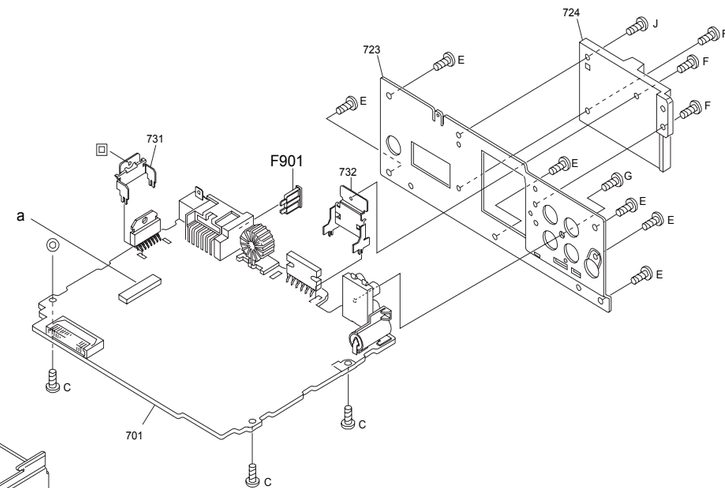

Parts with the exploded numbers lager than 700 are not supplied.

No.MA514

created date:2012-01-12

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

EXPLODED VIEW (UNIT) <M1MM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
⚠	F901	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0277-001A-E	E-CARD WIRE		1	
	LCD1	QLD0700-001	LCD MODULE		1	
	PA1	GE34823-008A	FRONT PANEL ASSY		1	
	A	QYSDSF2006ZA	TAP SCREW	M2 x 6mm	13	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	GE40377-002A	SCREW		3	
	D	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	E	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	6	
	F	GE40377-001A	SCREW		3	
	G	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	GE40377-002A	SCREW		2	
	J	GE40377-003A	SPECIAL SCREW		1	
	K	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	L	QYSDST2004ZA	TAP SCREW	M2 x 4mm	2	
	M	QYSSSP5008ZA	SCREW	M5 x 8mm	4	A,B,C,D
	N	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	4	A,B,C,D
	201	GE20304-003A	FINDER		1	A,B,C,E,F,G
	201	GE20304-002A	FINDER		1	D
	202	GE34802-001A	EJECT BUTTON		1	
	203	GE34803-001A	DISP. BUTTON		1	
	204	GE34804-001A	LIGHT STRIP		1	
	205	GE34806-001A	PRESET BTN 1 2		1	
	206	GE34807-002A	PRESET BTN 3 4		1	
	207	GE34808-001A	PRESET BTN 5 6		1	
	208	GE34812-001A	NAVI BUTTON		1	
	209	GE34815-002A	EQ BUTTON		1	
	210	GE34816-002A	MENU BUTTON		1	A,B,C
	210	GE34816-001A	MENU BUTTON		1	D,E,F,G
	211	GE40582-001A	SRC BTN ASSY		1	
	212	GE34820-002A	VOL KNOB		1	
	213	GE40127-005A	KNOB SPRING		1	
	214	GE34817-002A	RIM COVER		1	
	215	GE34813-001A	RIM LENS		1	
	216	GE34821-001A	LCD CASE		1	
	217	GE34822-001A	LCD LENS		1	
	218	GE40572-002A	LIGHT SHT(UNI)		1	
	219	GE40574-001A	REFL. SHT(UNI)		1	
	220	QNZ1077-001	RUBBER CONNE		1	
	227	LV22425-007A	SLEEVE ASSY		1	A,B,C,D
	228	LV37151-004A	SUPPORT BKT		2	A,B,C,D
	229	GE20225-005A	TRIM PLATE		1	A,B,C,D
	234	GE34805-001A	LIGHT GUIDE (T)		1	
	235	GE34818-001A	LIGHT GUIDE (B)		1	

EXPLODED VIEW (CD MECHANISM)

FLM-HC3-1D

Block No.MBMM

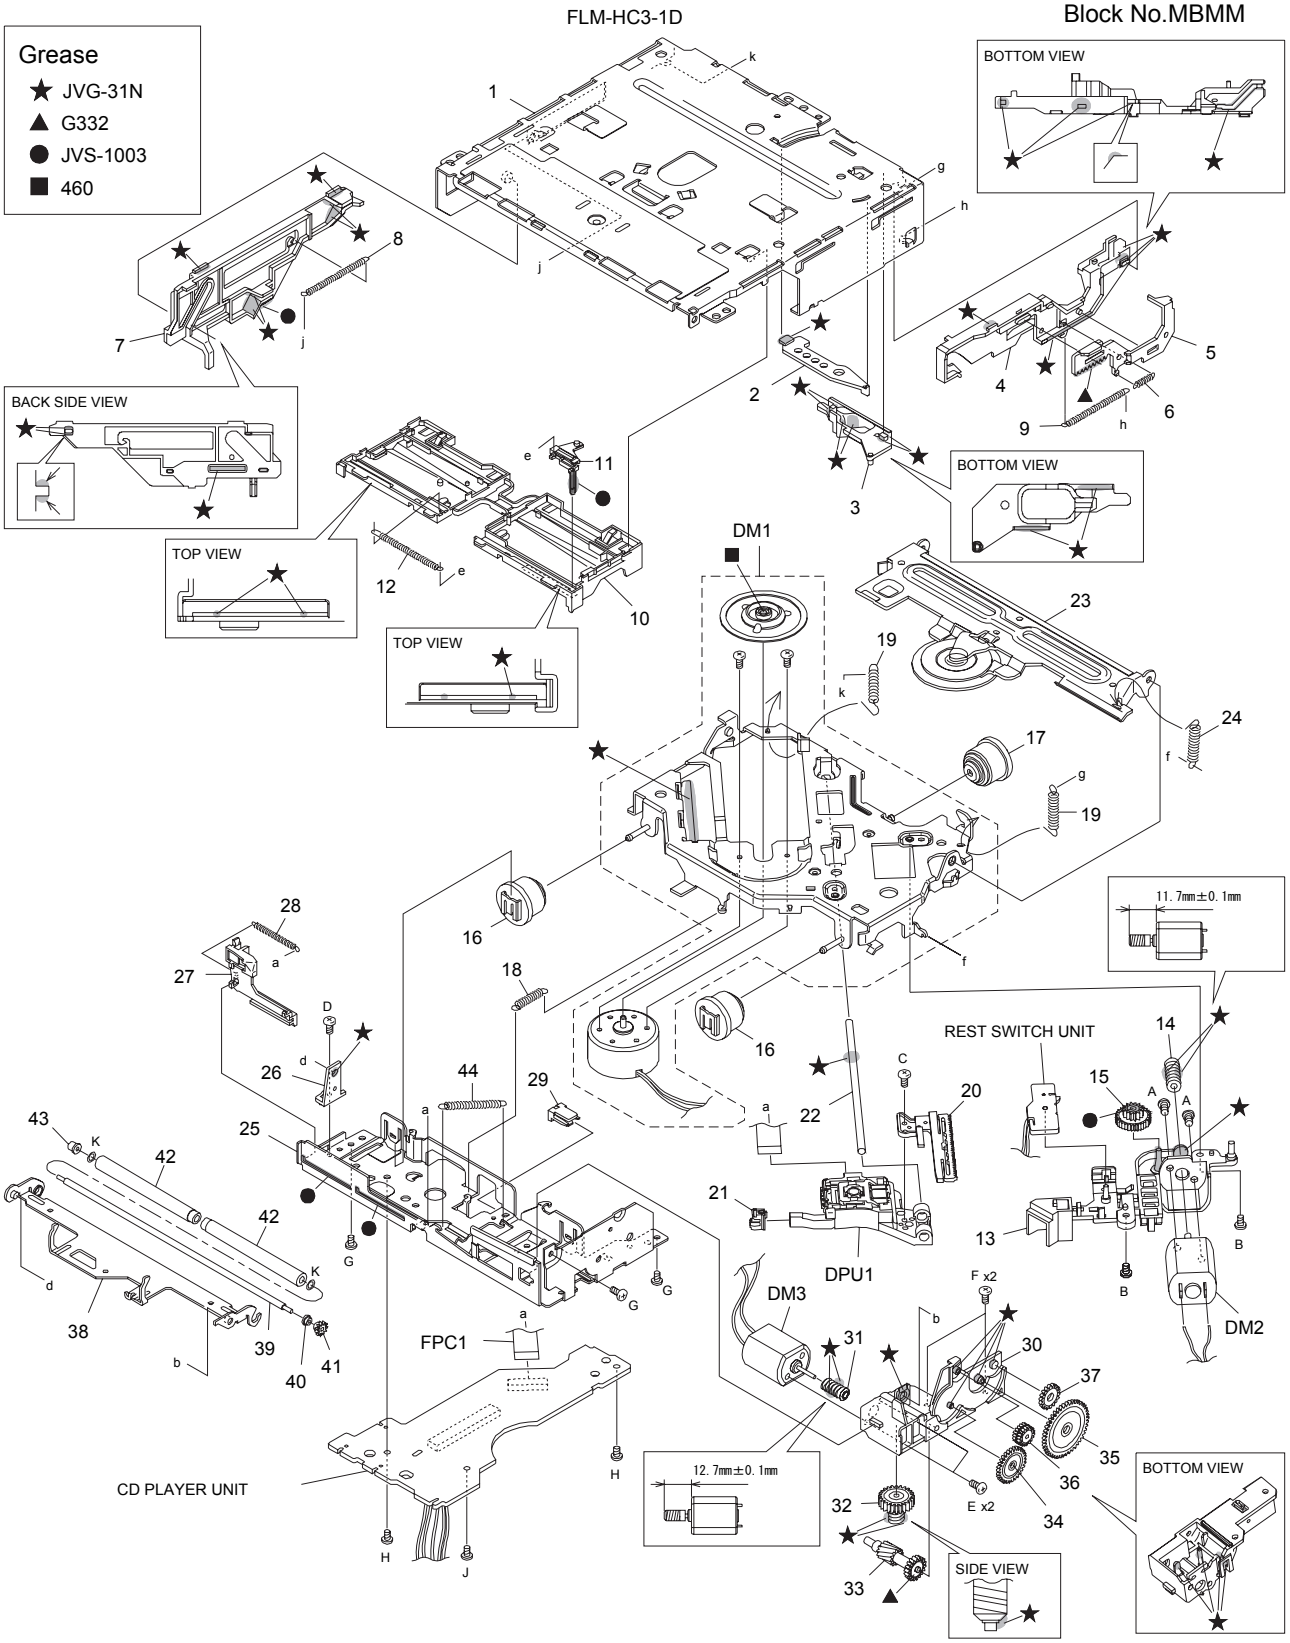

Parts with the exploded numbers larger than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local

EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D) <MBMM>

	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
⚠	DPU1	QAL1226-001	PICK UP		1	
	FPC1	QAL0817-003	FPC		1	
	A	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	K	LV45449-001A	WASHER		2	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-001A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-002A	BOTTOM FRAME		1	
	26	LV38954-002A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45418-001A	R.ARM SPRING		1	

ELECTORIC UNIT <01>

⚠	IC1	TEF6614TV1S4-X	IC		1	
	IC80	MFI341S2313-X	IC		1	
	IC161	TDA7718B-X	IC		1	A,B,C,D
	IC161	TDA7720-X	IC		1	E,F,G
⚠	IC301	TB2931HQ	IC		1	
⚠	IC501	LV8281VR-X	IC		1	
	IC530	XC6213B332NG-X	IC		1	
	IC531	XC6213B152NG-X	IC		1	
	IC532	XC6213B152NG-X	IC		1	
⚠	IC540	JCV8022	IC		1	
	IC580	NJM4565E-X	IC		1	
⚠	IC701	JES220D	IC		1	
	IC702	XC6120N282NG-X	IC		1	
	IC771	BR24T02FJ-W-X	IC		1	
	IC771 or	R1EX24002ASAA-X	IC		1	
⚠	IC901	LV5680P	IC		1	
	IC931	XC6213B332NG-X	IC		1	
	IC981	BD9673EFJ-X	IC		1	
	Q321	IMX9-W	PAIR TRANSISTOR		1	
	Q341	IMX9-W	PAIR TRANSISTOR		1	
	Q540	2SA2188/F/-X	TRANSISTOR		1	
	Q780	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q780 or	DRA5124E-X	DIGI TRANSISTOR		1	
	Q781 or	DRC5124E-X	DIGI TRANSISTOR		1	
	Q782	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q782 or	DRA5124E-X	DIGI TRANSISTOR		1	
	Q881 or	DRC5114E-X	DIGI TRANSISTOR		1	
	Q951	2SA812A/5-6/-X	TRANSISTOR		1	
	Q951 or	ISA1530AC1/QR/X	TRANSISTOR		1	
	Q952 or	DRC5144E-X	DIGI TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q970	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q970 or	2SC3928A/QR/-X	TRANSISTOR		1	
	Q971	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q971 or	2SC3928A/QR/-X	TRANSISTOR		1	
	D1	RKS801KF-X	SI DIODE		1	
	D1 or	DA2J101-X	SI DIODE		1	
	D2	RKS801KF-X	SI DIODE		1	
	D2 or	DA2J101-X	SI DIODE		1	
	D100	RKZ6.2B2KG-X	Z DIODE		1	
	D100 or	DZ2J062/M/-X	Z DIODE		1	
	D101	RKZ6.2B2KG-X	Z DIODE		1	
	D101 or	DZ2J062/M/-X	Z DIODE		1	
	D110	RKZ6.2B2KG-X	Z DIODE		1	
	D110 or	DZ2J062/M/-X	Z DIODE		1	
	D111	RKZ6.2B2KG-X	Z DIODE		1	
	D111 or	DZ2J062/M/-X	Z DIODE		1	
	D120	RKZ6.2B2KG-X	Z DIODE		1	
	D120 or	DZ2J062/M/-X	Z DIODE		1	
	D121	RKZ6.2B2KG-X	Z DIODE		1	
	D121 or	DZ2J062/M/-X	Z DIODE		1	
	D130	RKZ6.2B2KG-X	Z DIODE		1	
	D130 or	DZ2J062/M/-X	Z DIODE		1	
	D131	RKZ6.2B2KG-X	Z DIODE		1	
	D131 or	DZ2J062/M/-X	Z DIODE		1	
	D321	BAW56-TP-X	SI DIODE		1	
	D321 or	MC2836-X	DIODE		1	
	D341	BAW56-TP-X	SI DIODE		1	
	D502	GS1J-LTP-X	DIODE		1	
	D502 or	1SR154-400-X	SI DIODE		1	
	D540	RKS801KF-X	SI DIODE		1	
	D540 or	DA2J101-X	SI DIODE		1	
	D704	RKZ6.2B2KG-X	Z DIODE		1	
	D704 or	DZ2J062/M/-X	Z DIODE		1	
	D780	BAW56-TP-X	SI DIODE		1	
	D780 or	MC2836-X	DIODE		1	
	D781	BAW56-TP-X	SI DIODE		1	
	D781 or	MC2836-X	DIODE		1	
	D782	RKS801KF-X	SI DIODE		1	
	D782 or	DA2J101-X	SI DIODE		1	
	D783	BAW56-TP-X	SI DIODE		1	
	D783 or	MC2836-X	DIODE		1	
	D851	MBRX130-TP-X	SB DIODE		1	E,F,G
	D852	MBRX130-TP-X	SB DIODE		1	E,F,G
	D891	BAW56-TP-X	SI DIODE		1	
	D891 or	MC2836-X	DIODE		1	
⚠	D901	1N5401-BPC04	SI DIODE		1	
	D902	MBRX130-TP-X	SB DIODE		1	
	D941	MBRX130-TP-X	SB DIODE		1	
	D942	MBRX130-TP-X	SB DIODE		1	
	D970	RKZ6.8B2KG-X	Z DIODE		1	
	D970 or	DZ2J068/M/-X	Z DIODE		1	
	D971	RKZ6.8B2KG-X	Z DIODE		1	
	D971 or	DZ2J068/M/-X	Z DIODE		1	
	D981	DB22306-X	SB DIODE		1	
	C1	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C2	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	
	C3	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C4	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C5	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C6	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	1	
	C7	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C10	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C11	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C12	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C13	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C14	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C20	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C21	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C22	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C23	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C24	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C26	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C27	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	
	C28	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	D
	C80	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C101	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C102	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C111	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C112	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C121	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C122	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C131	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C132	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C160	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C162	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C166	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C169	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C170	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C171	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C172	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C174	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C177	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C303	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C304	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C305	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C306	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C307	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C308	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C309	QEKJ1CM-226Z-S	E CAPACITOR	22uF 16V M	1	
	C310	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	
	C311	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C312	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C313	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	
	C314	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C320	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C321	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C330	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C331	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C340	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C341	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C350	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C351	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C501	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C504	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C505	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	1	
	C506	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C507	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C513	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C514	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C530	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C531	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C532	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C533	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C534	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C535	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C540	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C541	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C543	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C544	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C545	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C546	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C547	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C548	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C549	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C550	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C552	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C553	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C554	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	
	C555	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C556	NCB31CK-683X	C CAPACITOR	0.068uF 16V K	1	
	C557	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C558	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C559	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C561	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C562	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C565	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C566	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C567	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C568	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C569	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C571	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C572	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C576	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C584	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C585	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C586	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C587	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C588	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	
	C591	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	
	C594	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C595	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C701	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	
	C702	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	
	C703	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C704	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C705	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C706	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C708	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C711	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C712	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C713	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C714	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C716	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C717	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C718	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C723	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C724	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1	
	C725	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C729	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C731	NCB21CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C733	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C780	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C794	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	
	C881	QERF1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C891	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C901	QEZ0936-278	E CAPACITOR	2700uF	1	
	C902	NCB31EK-474X	C CAPACITOR	0.47uF 25V K	1	
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C904	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C905	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C906	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C907	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C908	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	E,F,G
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C912	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C913	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C931	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C932	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C933	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C941	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C954	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C963	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C981	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C983	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C984	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C985	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C987	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C989	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C990	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C991	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C993	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C994	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C995	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R8	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R9	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,E,F,G
	R13	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R82	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R100	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R101	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R102	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R110	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R112	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R120	NQR0007-002X	FERRITE BEADS		1	
	R121	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R122	NQR0007-002X	FERRITE BEADS		1	
	R130	NQR0007-002X	FERRITE BEADS		1	
	R131	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R132	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
⚠	R150	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
⚠	R151	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	E,F,G
⚠	R152	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
⚠	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R162	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R163	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R165	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R167	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1	
	R168	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D
	R169	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	E,F,G
	R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R304	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R310	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	A,B,C,D
	R310	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1	E,F,G
	R311	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R320	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R321	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R322	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R323	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R330	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R331	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R332	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R333	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R340	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R341	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R342	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R347	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R349	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R350	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R351	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R352	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R357	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R358	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R361	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
	R361	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	E,F,G
	R362	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
	R362	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	E,F,G
	R363	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
	R363	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	E,F,G
	R364	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D
	R364	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	E,F,G
	R365	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	E,F,G
	R366	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	E,F,G
	R367	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	E,F,G
	R368	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	E,F,G
	R400	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R401	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R403	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R404	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R405	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R409	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R414	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R419	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R421	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R423	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R428	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R429	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R431	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R437	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R438	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R439	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R440	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R448	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R451	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R454	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R455	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R457	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R458	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R459	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R460	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R463	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R464	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R465	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R467	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R469	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R470	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R475	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R479	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R482	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R495	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R501	NRSA63J-114X	MG RESISTOR	110kΩ 1/16W J	1	
	R502	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R503	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R504	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1	
	R505	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R506	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	1	
	R507	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	1	
	R508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R509	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R510	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R511	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	1	
	R512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R516	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R540	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R545	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	1	
	R547	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R548	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R549	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R550	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R553	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R554	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1	
	R555	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1	
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R557	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R558	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R559	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R561	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R562	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R563	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R564	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R565	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R566	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R567	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R568	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R569	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R570	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R571	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R572	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R573	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	1	
	R574	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R575	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R576	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R577	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R579	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R581	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R582	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1	
	R583	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R584	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R587	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R588	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1	
	R589	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R590	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R592	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R593	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R594	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R597	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R598	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R599	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R701	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D
	R701	NRSA63J-364X	MG RESISTOR	360kΩ 1/16W J	1	E,F,G
	R702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R706	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R712	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R713	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R715	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R718	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R720	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R721	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R722	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R723	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R724	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R725	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R726	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R727	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R730	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R731	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R732	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R734	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R735	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R736	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R737	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R738	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R739	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R740	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R741	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R742	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R744	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R746	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R747	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	
	R749	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R750	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R751	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R753	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R754	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R755	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R756	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R757	NRSA02J-104X	MG RESISTOR	100kΩ 1/10W J	1	
	R758	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R759	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R760	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R761	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R762	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R764	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C
	R764	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	D
	R764	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	E,F,G
	R765	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R766	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C
	R766	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	D
	R766	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	E,F,G

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R768	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R770	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R771	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R772	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R773	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R774	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R775	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R776	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R778	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R779	NRS181J-271X	MG RESISTOR	270Ω 1/8W J	1	
	R780	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R781	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R782	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R783	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R784	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R785	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R786	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R789	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1	
	R790	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1	
	R791	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R792	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R794	NRSA63J-200X	MG RESISTOR	20Ω 1/16W J	1	
	R795	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E,F,G
	R860	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R861	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R882	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R891	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R892	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	
	R893	NRS181J-123X	MG RESISTOR	12kΩ 1/8W J	1	
	R894	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R901	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	1	
	R902	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	1	
	R906	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R907	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	
	R908	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R909	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R941	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R951	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R962	NRS181J-271X	MG RESISTOR	270Ω 1/8W J	1	
	R965	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R970	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R981	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R982	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	
	R983	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R986	NRSA63D-114X	MG RESISTOR	110kΩ 1/16W D	1	
	R988	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R989	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R990	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R991	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R992	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R994	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R995	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	L1	NQL093K-R47X	P COIL	0.47uH K	1	
	L2	NQL093K-1R8X	P COIL	1.8uH K	1	
	L3	NQL093K-R27X	P COIL	0.27uH K	1	
	L4	QQR1872-001	RF COIL		1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	QQL244J-561Z	COIL	560uH J	1	
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	
	L9	NQL093K-R47X	P COIL	0.47uH K	1	
	L10	NQL103J-10NX	COIL	10nH J	1	D
	L11	NQR0251-002X	FERRITE BEADS		1	
	L12	NQR0251-002X	FERRITE BEADS		1	
	L161	NQL553J-27NX	COIL	27nH J	1	
	L531	NQR0502-001X	FERRITE BEADS		1	
	L561	NQR0502-001X	FERRITE BEADS		1	
	L562	NQR0502-001X	FERRITE BEADS		1	
	L563	NQR0502-001X	FERRITE BEADS		1	
	L564	NQR0502-001X	FERRITE BEADS		1	
	L565	NQR0502-001X	FERRITE BEADS		1	
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	
	L703	NQR0502-001X	FERRITE BEADS		1	
	L901	QQR1883-001	CHOKE COIL		1	
	L981	QQL92AK-220Z	COIL	22uH K	1	
	L982	NQLH25M-4R7X	COIL	4.7uH M	1	
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1	
	CN701	QGB1004K1-24	CONNECTOR	B-B (1-24)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	J1	QNB0190-001	ANT TERMINAL		1	
	J1 or J120	QNB0348-001	ANT TERMINAL		1	
		QNS0307-001	3.5 JACK		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	J321	QNN0815-001	PIN JACK		1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X540	QAX0929-001Z	C RESONATOR		1	
	X701	QAX0966-001Z	CRYSTAL		1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	
SWITCH UNIT <02>						
	IC601	PCA9624PW-X	IC		1	
	IC661	PTC6526LQ-L	IC		1	
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	
	Q627 or	DSC5001/RS/-X	TRANSISTOR		1	
	D609	NSSM065T-X	LED		1	
	D610	NSSM065T-X	LED		1	
	D621	NSSM065T-X	LED		1	
	D622	NSSM065T-X	LED		1	
	D623	NSSM065T-X	LED		1	
	D625	NSSM065T-X	LED		1	
	D626	NSSM065T-X	LED		1	
	D627	DZ2J056/M/-X	Z DIODE		1	
	D633	SML-D12V8W-X	LED		1	
	D634	SML-D12V8W-X	LED		1	
	D661	RKS801KF-X	SI DIODE		1	
	D682	DZ2J033/M/-X	Z DIODE		1	
	D691	DZ2J051/M/-X	Z DIODE		1	
	D692	DZ2J051/M/-X	Z DIODE		1	
	C622	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C625	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C662	NDC31HJ-121X	C CAPACITOR	120pF 50V J	1	
	C663	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C665	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C666	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C678	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C682	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C684	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C689	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C692	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C695	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C696	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R606	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R608	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R609	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R610	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R611	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R612	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R613	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R614	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R615	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R616	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R617	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R622	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R628	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R629	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R630	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R631	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	
	R632	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R633	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R634	NRS181J-182X	MG RESISTOR	1.8kΩ 1/8W J	1	
	R635	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R636	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R637	NRSA02J-152X	MG RESISTOR	1.5kΩ 1/10W J	1	
	R638	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	
	R639	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	
	R640	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R641	NRS181J-431X	MG RESISTOR	430Ω 1/8W J	1	
	R642	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	
	R643	NRS181J-182X	MG RESISTOR	1.8kΩ 1/8W J	1	
	R644	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R645	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R647	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	
	R660	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	1	
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R664	NRSA63J-164X	MG RESISTOR	160kΩ 1/16W J	1	
	R665	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R668	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R678	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R682	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R683	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R684	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	L601	NQL79GM-4R7X	COIL	4.7uH M	1	
	L602	NQR0007-002X	FERRITE BEADS		1	
	L604	NQR0022-005X	FERRITE BEADS		1	
	L610	NQR0007-002X	FERRITE BEADS		1	
	L612	NQR0007-002X	FERRITE BEADS		1	
	CN601	QGB1004J2-24X	CONNECTOR	B-B (1-24)	1	
	CN603	QNZ1076-001	USB CONNECTOR		1	
	CN603 or	QNZ1057-001	USB CONNECTOR		1	
	EN601	QSW1231-002	ROTARY ENCODER		1	
	LF691	NQR0682-001X	CHOKE COIL		1	
	PJ601	QNS0299-001	3.5 JACK		1	
	S601	NSW0246-001X	TACT SWITCH		1	
	S602	NSW0246-001X	TACT SWITCH		1	
	S603	NSW0246-001X	TACT SWITCH		1	
	S604	NSW0246-001X	TACT SWITCH		1	
	S605	NSW0246-001X	TACT SWITCH		1	
	S606	NSW0246-001X	TACT SWITCH		1	
	S607	NSW0246-001X	TACT SWITCH		1	
	S608	NSW0246-001X	TACT SWITCH		1	
	S609	NSW0246-001X	TACT SWITCH		1	
	S610	NSW0246-001X	TACT SWITCH		1	
	S611	NSW0246-001X	TACT SWITCH		1	
	S612	NSW0246-001X	TACT SWITCH		1	
	S613	NSW0246-001X	TACT SWITCH		1	
	S614	NSW0246-001X	TACT SWITCH		1	
	S615	NSW0246-001X	TACT SWITCH		1	
	S616	NSW0246-001X	TACT SWITCH		1	
	S617	NSW0246-001X	TACT SWITCH		1	
	S691	NSW0246-001X	TACT SWITCH		1	
CD PLYAER UNIT (FLM-HC3-1D) <03>						
	R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW1 or	NSW0233-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW2 or	NSW0233-001X	DETECT SWITCH		1	
	SW3	NSW0291-001X	DETECT SWITCH		1	
	SW3 or	NSW0233-001X	DETECT SWITCH		1	
	SW4	NSW0291-001X	DETECT SWITCH		1	
	SW4 or	NSW0233-001X	DETECT SWITCH		1	

PACKING AND ACCESSORIES (EUROPE, US)

Block No.M3MM

No additional / supplemental order of WARRANTY CARDs are available.

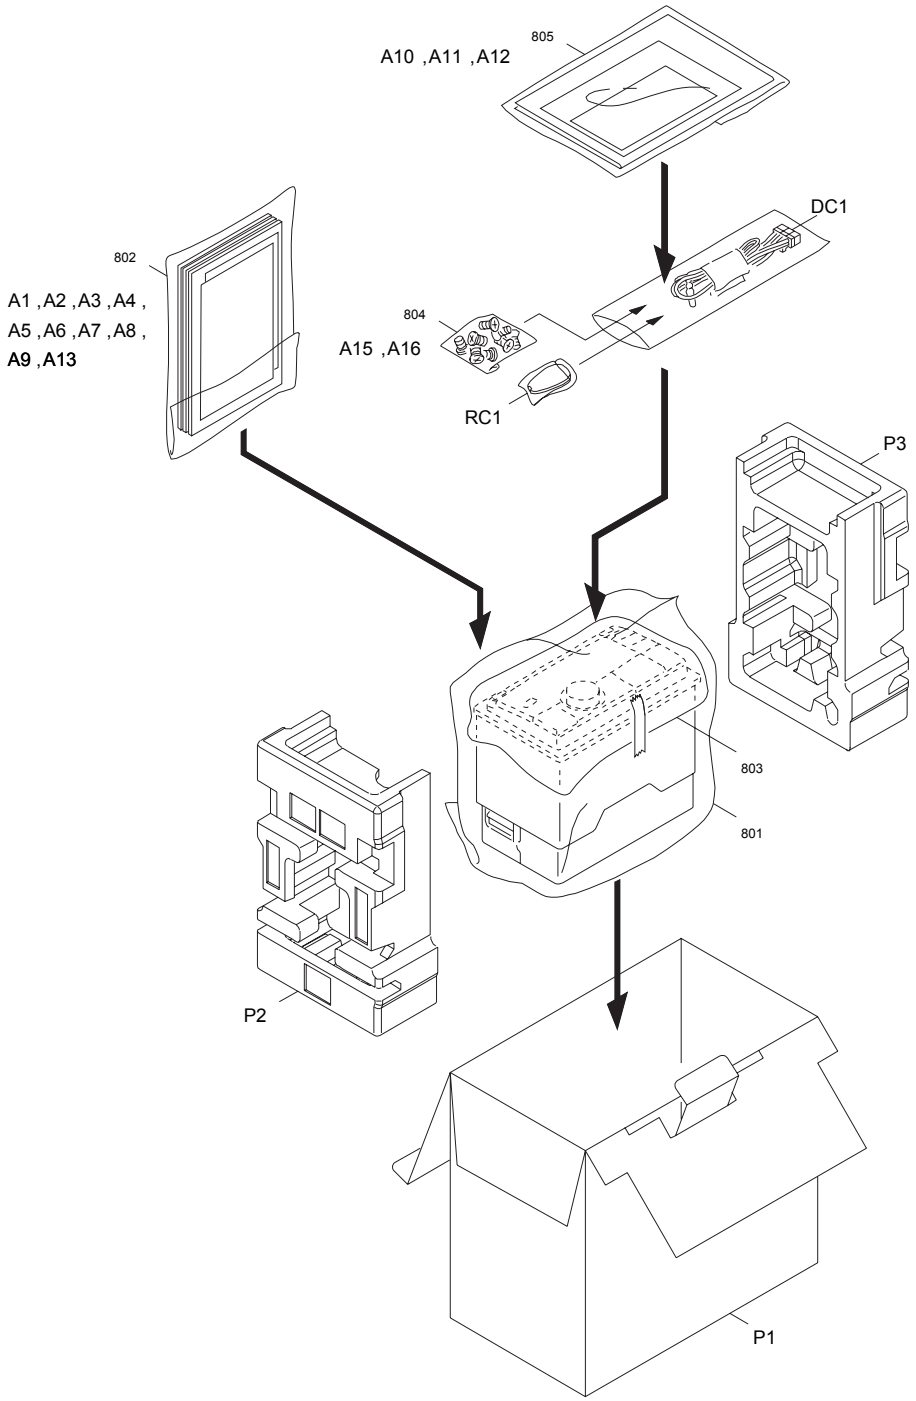

Parts with the exploded numbers lager than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

PACKING AND ACCESSORIES (EUROPE, US) <M3MM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	DC1	QAM1345-001	DC CORD		1	A,B,C
	DC1	QAM1329-001	DC CORD		1	D
	RC1	RM-RK52M	REMOCON UNIT		1	A,B,C,D
	A1	GET0789-001A	INST BOOK	GER	1	A,B,C
	A1	GET0791-001A	INST BOOK	ENG SPA FRE	1	D
	A2	GET0789-003A	INST BOOK	ENG FRE	1	A,B
	A2	GET0789-005A	INST BOOK	POL GRE	1	C
	A3	GET0789-002A	INST BOOK	DUT SPA ITA POR	1	A
	A3	GET0789-004A	INST BOOK	SWE DAN FIN	1	B
	A3	GET0789-006A	INST BOOK	RUM BUL CZE HUN	1	C
	A4	GET0789-013A	INST BOOK	RUS UKR	1	C
	A5	GET0789-007A	INSTALL MANUAL	GER	1	A,B,C
	A5	GET0791-002A	INSTALL MANUAL	ENG SPA FRE	1	D
	A6	GET0789-009A	INSTALL MANUAL	ENG FRE	1	A,B
	A6	GET0789-012A	INSTALL MANUAL	RUM BUL CZE HUN	1	C
	A7	GET0789-008A	INSTALL MANUAL	DUT SPA ITA POR	1	A
	A7	GET0789-010A	INSTALL MANUAL	SWE DAN FIN	1	B
	A7	GET0789-011A	INSTALL MANUAL	POL GRE	1	C
	A8	GET0789-014A	INSTALL MANUAL	RUS UKR	1	C
	A9	----------	WARRANTY CARD	BT-54045-1	1	A,B,C
	A10	----------	WARRANTY CARD	BT-52008-1	1	D
	A11	----------	WARRANTY CARD	BT-51018-6	1	D
	A12	BT-51044-1	REGISTRATION CARD	BT-51044-1	1	D
	A13	LVT2328-001A	RUSSIAN SHEET		1	C
	A15	QYSDSP5008ZA	SCREW	M5 x 8mm	8	A,B,C,D
	A16	QYSSSP5008ZA	SCREW	M5 x 8mm	4	A,B,D
	P1	GE34885-001A	INNER CARTON		1	A,B,C
	P1	GE34879-001A	INNER CARTON		1	D
	P2	GE10280-003A	CUSHION L		1	A,B,C,D
	P3	GE10281-001A	CUSHION R		1	A,B,C,D

PACKING AND ACCESSORIES (ASIA)

Block No.M4MM

No additional / supplemental order of WARRANTY CARDs are available.

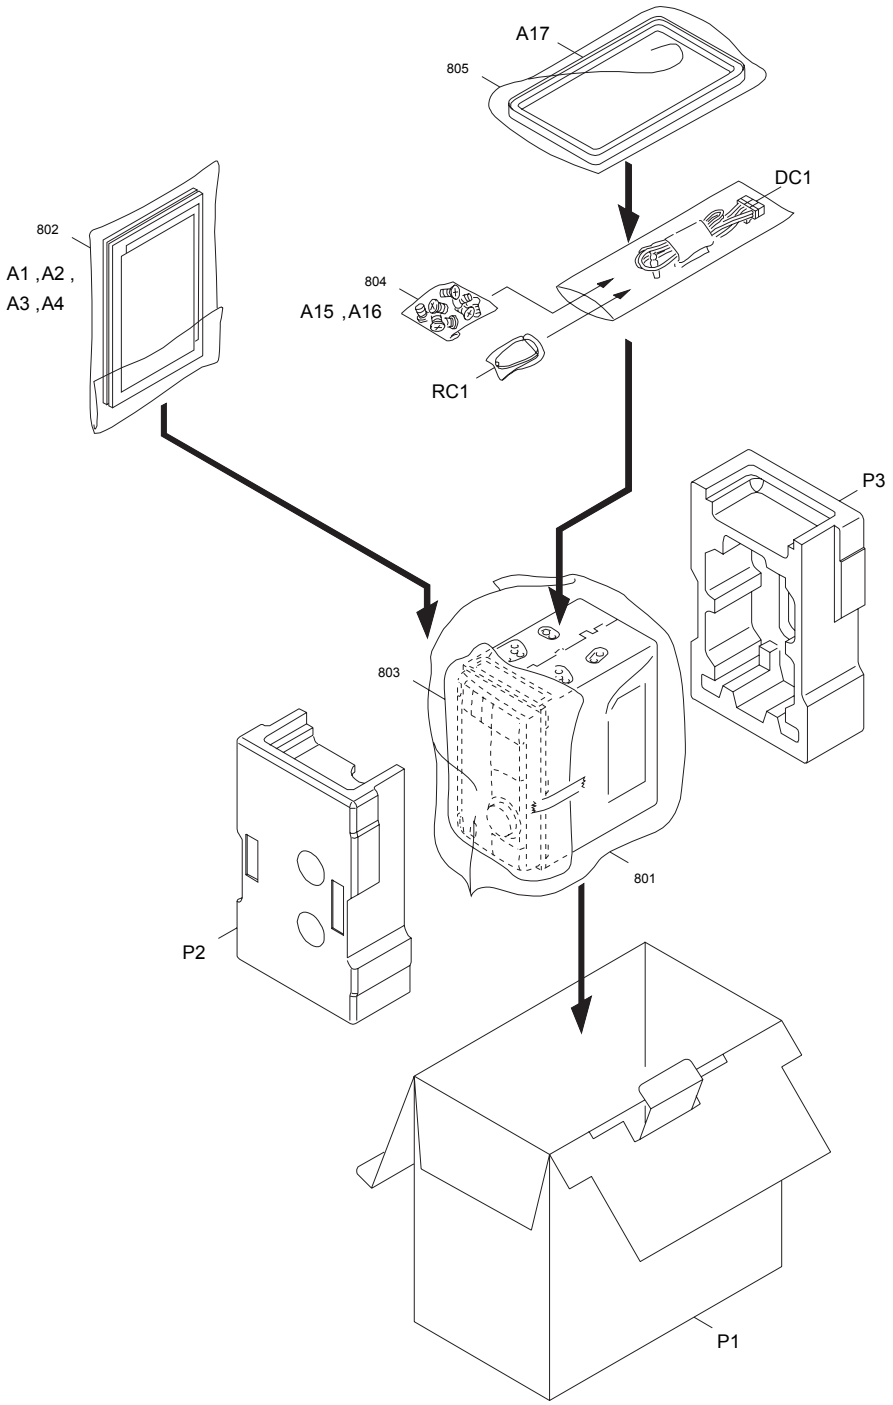

Parts with the exploded numbers lager than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-R500E	A	KW-R500EN	B	KW-R500EY	C	KW-R500J	D
KW-R500U	E	KW-R500UN	F	KW-R500UP	G		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
PACKING AND ACCESSORIES (ASIA) <M4MM>						
	DC1	QAM1330-001	DC CORD		1	E,F,G
	RC1	RM-RK52M	REMOCON UNIT		1	E,F,G
	A1	GET0788-001A	INST BOOK	ENG RUS THA ARA PER	1	E
	A1	GET0788-004A	INST BOOK	ENG IND	1	F
	A1	GET0788-003A	INST BOOK	KOR	1	G
	A2	GET0788-002A	INST BOOK	CHITAIWAN)	1	E
	A3	GET0788-005A	INSTALL MANUAL	ENG RUS THA PER ARA	1	E
	A3	GET0788-008A	INSTALL MANUAL	ENG IND	1	F
	A3	GET0788-007A	INSTALL MANUAL	KOR	1	G
	A4	GET0788-006A	INSTALL MANUAL	KOR	1	E
	A15	QYSDSP5008ZA	SCREW	M5 x 8mm	8	E,F,G
	A16	QYSSSP5008ZA	SCREW	M5 x 8mm	8	E,F,G
	A17	GE20224-005A	TRIM PLATE		1	E,F,G
	P1	GE34882-001A	INNER CARTON		1	E,F,G
	P2	GE10332-001A	CUSHION F		1	E,F,G
	P3	GE10333-001A	CUSHION R		1	E,F,G