


2. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to  mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

2.1 PACKING

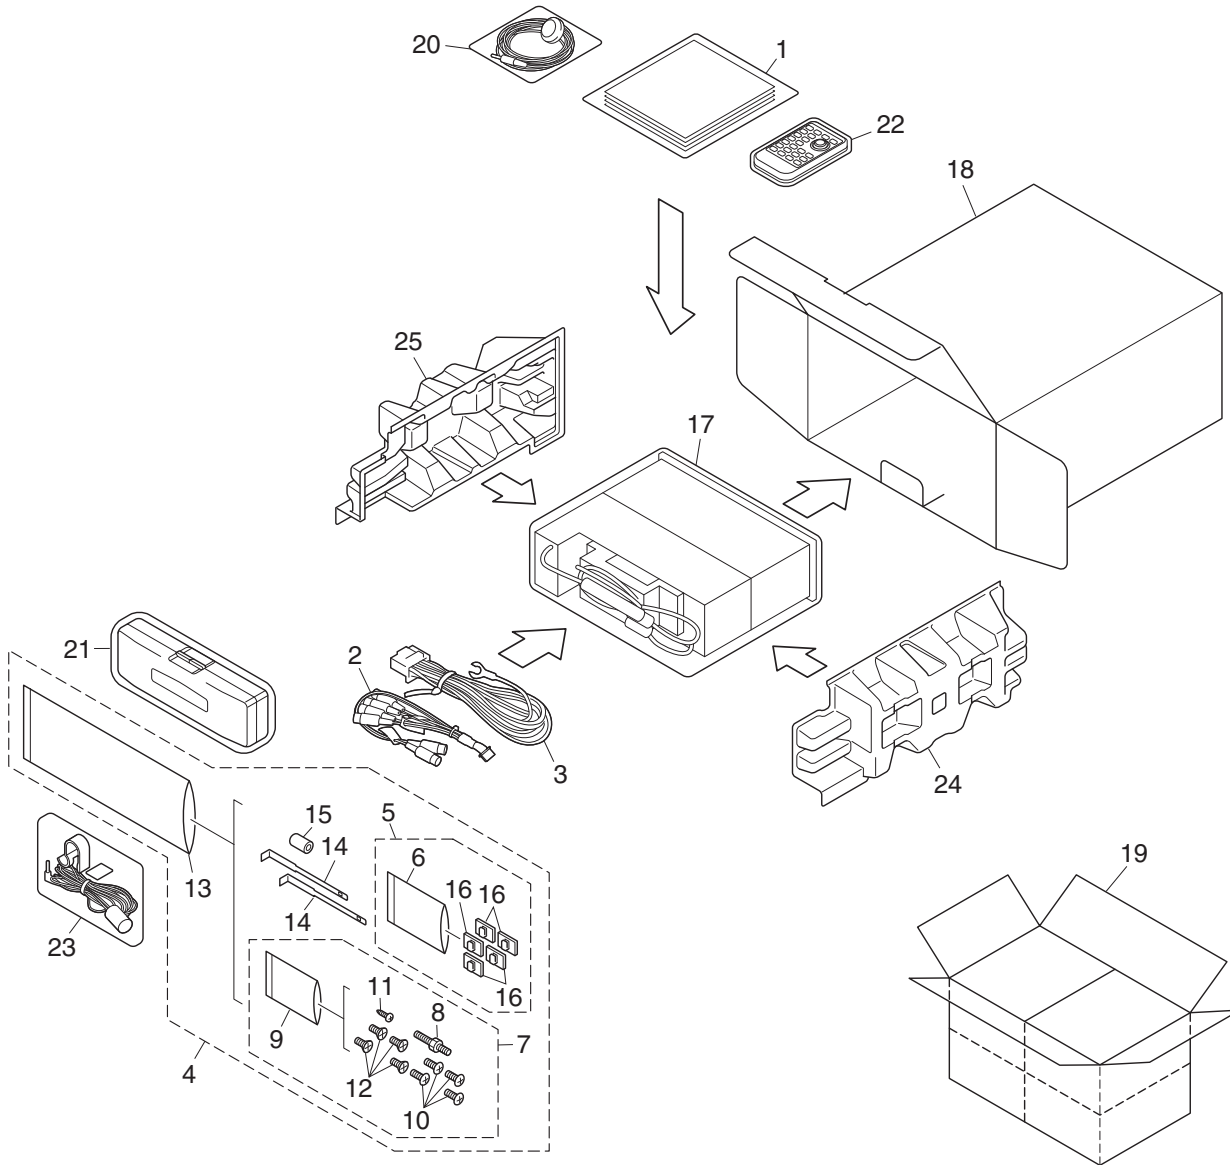

(1) PACKING SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
* 1-1	Card	See Contrast table(2)	11	Screw	See Contrast table(2)
1-2	Polyethylene Bag	CEG1116	12	Screw	TRZ50P080FTC
1-3	Owner's Manual	See Contrast table(2)	* 13	Polyethylene Bag	CEG-158
1-4	Installation Manual	See Contrast table(2)	14	Handle	CNC5395
1-5	Waranty Card	See Contrast table(2)	15	Bush	CNV3930
1-6	Caution Card	CRP1310	* 16	Clamper	CNN8262
* 1-7	Caution Card	XRP7002	17	Polyethylene Bag	See Contrast table(2)
2	Cord Assy	CDE8284	18	Carton	See Contrast table(2)
3	Cord Assy	CDE7701	19	Contain Box	See Contrast table(2)
4	Accessory Assy	See Contrast table(2)	20	Microphone Assy	See Contrast table(2)
5	Cord Clamper Assy	CEA4636	21	Case Assy	XXA7417
* 6	Polyethylene Bag	E36-615	22	Remote Control Unit	CXC5715
7	Screw Assy	See Contrast table(2)	23	Microphone Assy	CPM1059
8	Screw	CBA1650	24	Protector	XHP7008
* 9	Polyethylene Bag	CEG-127	25	Protector	XHP7007
10	Screw	CRZ50P090FTC			

(2) CONTRAST TABLE


DEH-P980BT/XN/UC, DEH-P9800BT/XN/UC and DEH-P9850BT/XN/ES are constructed the same except for the following:

Mark	No.	Description	DEH-P980BT/XN/UC	DEH-P9800BT/XN/UC	DEH-P9850BT/XN/ES
*	1-1	Not used	Not used	ARY1048	Not used
	1-3	Owner's Manual	CRD4096	CRD4098	CRB2179
	1-4	Installation Manual	CRD4097	CRD4099	CRB2180
	1-5	Waranty Card	CRY1070	CRY1246	Not used
	4	Accessory Assy	CEA5919	CEA5919	* CEA5920
	7	Screw Assy	CEA5322	CEA5322	CEA3849
	11	Screw	JPZ20P060FTB	JPZ20P060FTB	Not used
	17	Polyethylene Bag	CEG1173	CEG1173	CEG-162
	18	Carton	CHG5751	CHG5750	CHG5747
	19	Contain Box	CHL5751	CHL5750	CHL5747
	20	Microphone Assy	CPM1054	Not used	CPM1054

Owner's Manual, Installation Manual

Part No.	Language
CRD4096	English, French
CRD4097	English, French
CRD4098	English, French
CRD4099	English, French
CRB2179	English
CRB2180	English

2.2 EXTERIOR(1)

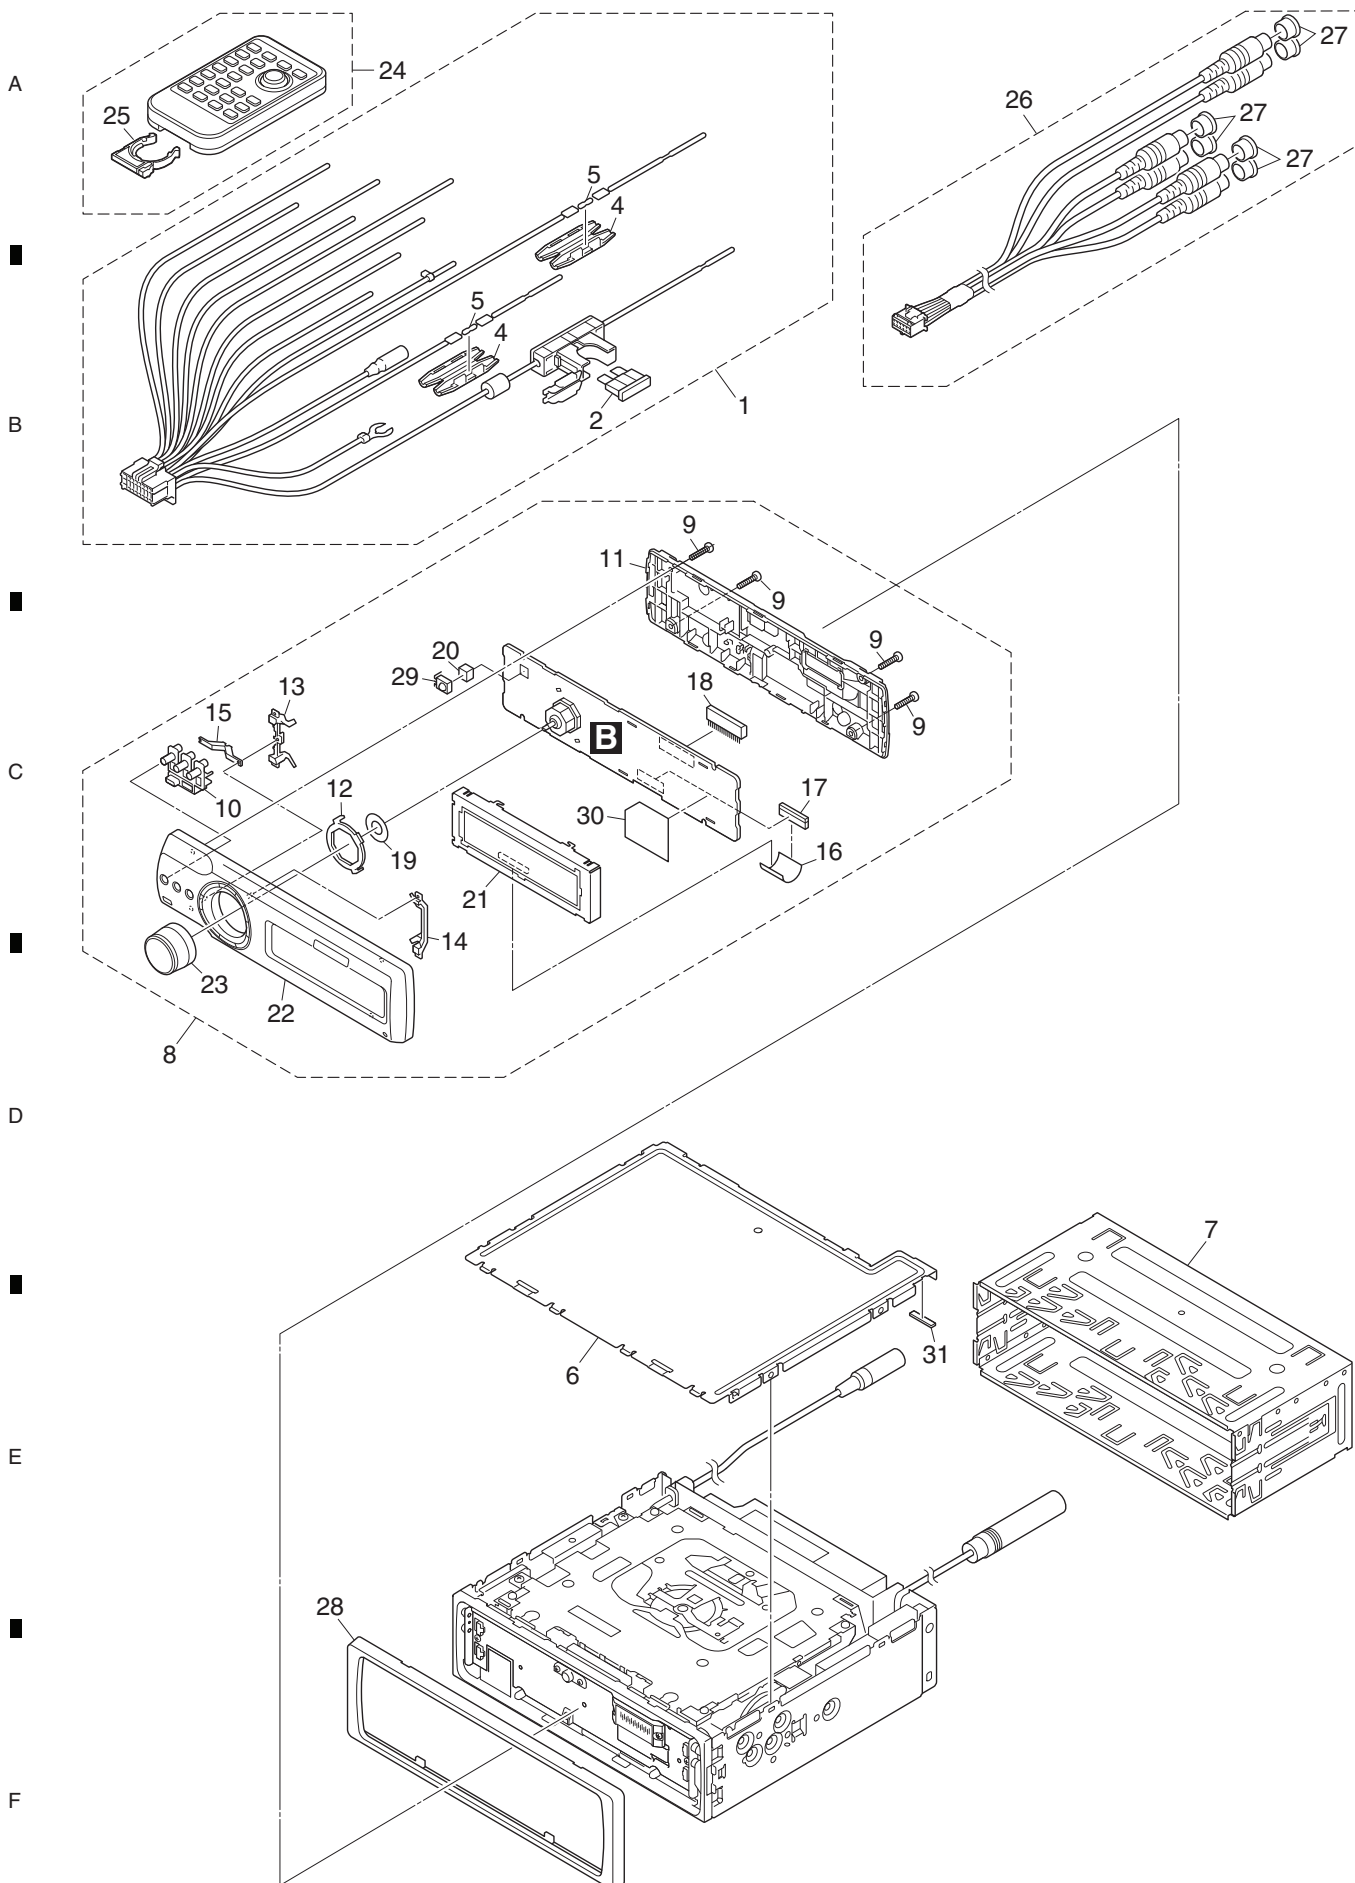

(1) EXTERIOR(1) SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Cord Assy	CDE7701	17	Connector(CN1931)	CKS5090
⚠ 2	Fuse(10 A)	CEK1136	18	Connector(CN1701)	CKS5662
3			19	Sheet	CNM8658
4	Cap	CNS1472	20	Cushion	CNM9946
5	Resistor	RS1/2PMF102J			
			21	OEL Module	MXK8230
6	Case Assy	CXC6907	22	Grille Unit	See Contrast table(2)
7	Holder	CNC8659	23	Knob Unit(MULTI-CONTROL)	CXC5674
8	Detach Grille Assy	See Contrast table(2)	24	Remote Control Unit	CXC5715
9	Screw	BPZ20P080FTB	25	Cover	CZN5357
10	Button (EQ, DISP, CLOCK)	CAC9527			
			26	Cord Assy	CDE8284
11	Cover	CNS8491	27	Cap	CNV6727
12	Holder	CNV8834	28	Panel	XNS7145
13	Lighting Conductor	CNV9010	29	IC (IC1801)	GP1UX51RK
14	Lighting Conductor	CNV9011	30	Insulator	CNN1327
15	Lighting Conductor	CNV9013			
			31	Cushion	CNN1405
16	Cable	CDE8057			

(2) CONTRAST TABLE

DEH-P980BT/XN/UC, DEH-P9800BT/XN/UC and DEH-P9850BT/XN/ES are constructed the same except for the following:

Mark	No.	Description	DEH-P980BT/XN/UC	DEH-P9800BT/XN/UC	DEH-P9850BT/XN/ES
	8	Detach Grille Assy	CXC5593	CXC5594	CXC5595
	22	Grille Unit	CXC5601	CXC5602	CXC5603

2.3 EXTERIOR(2)

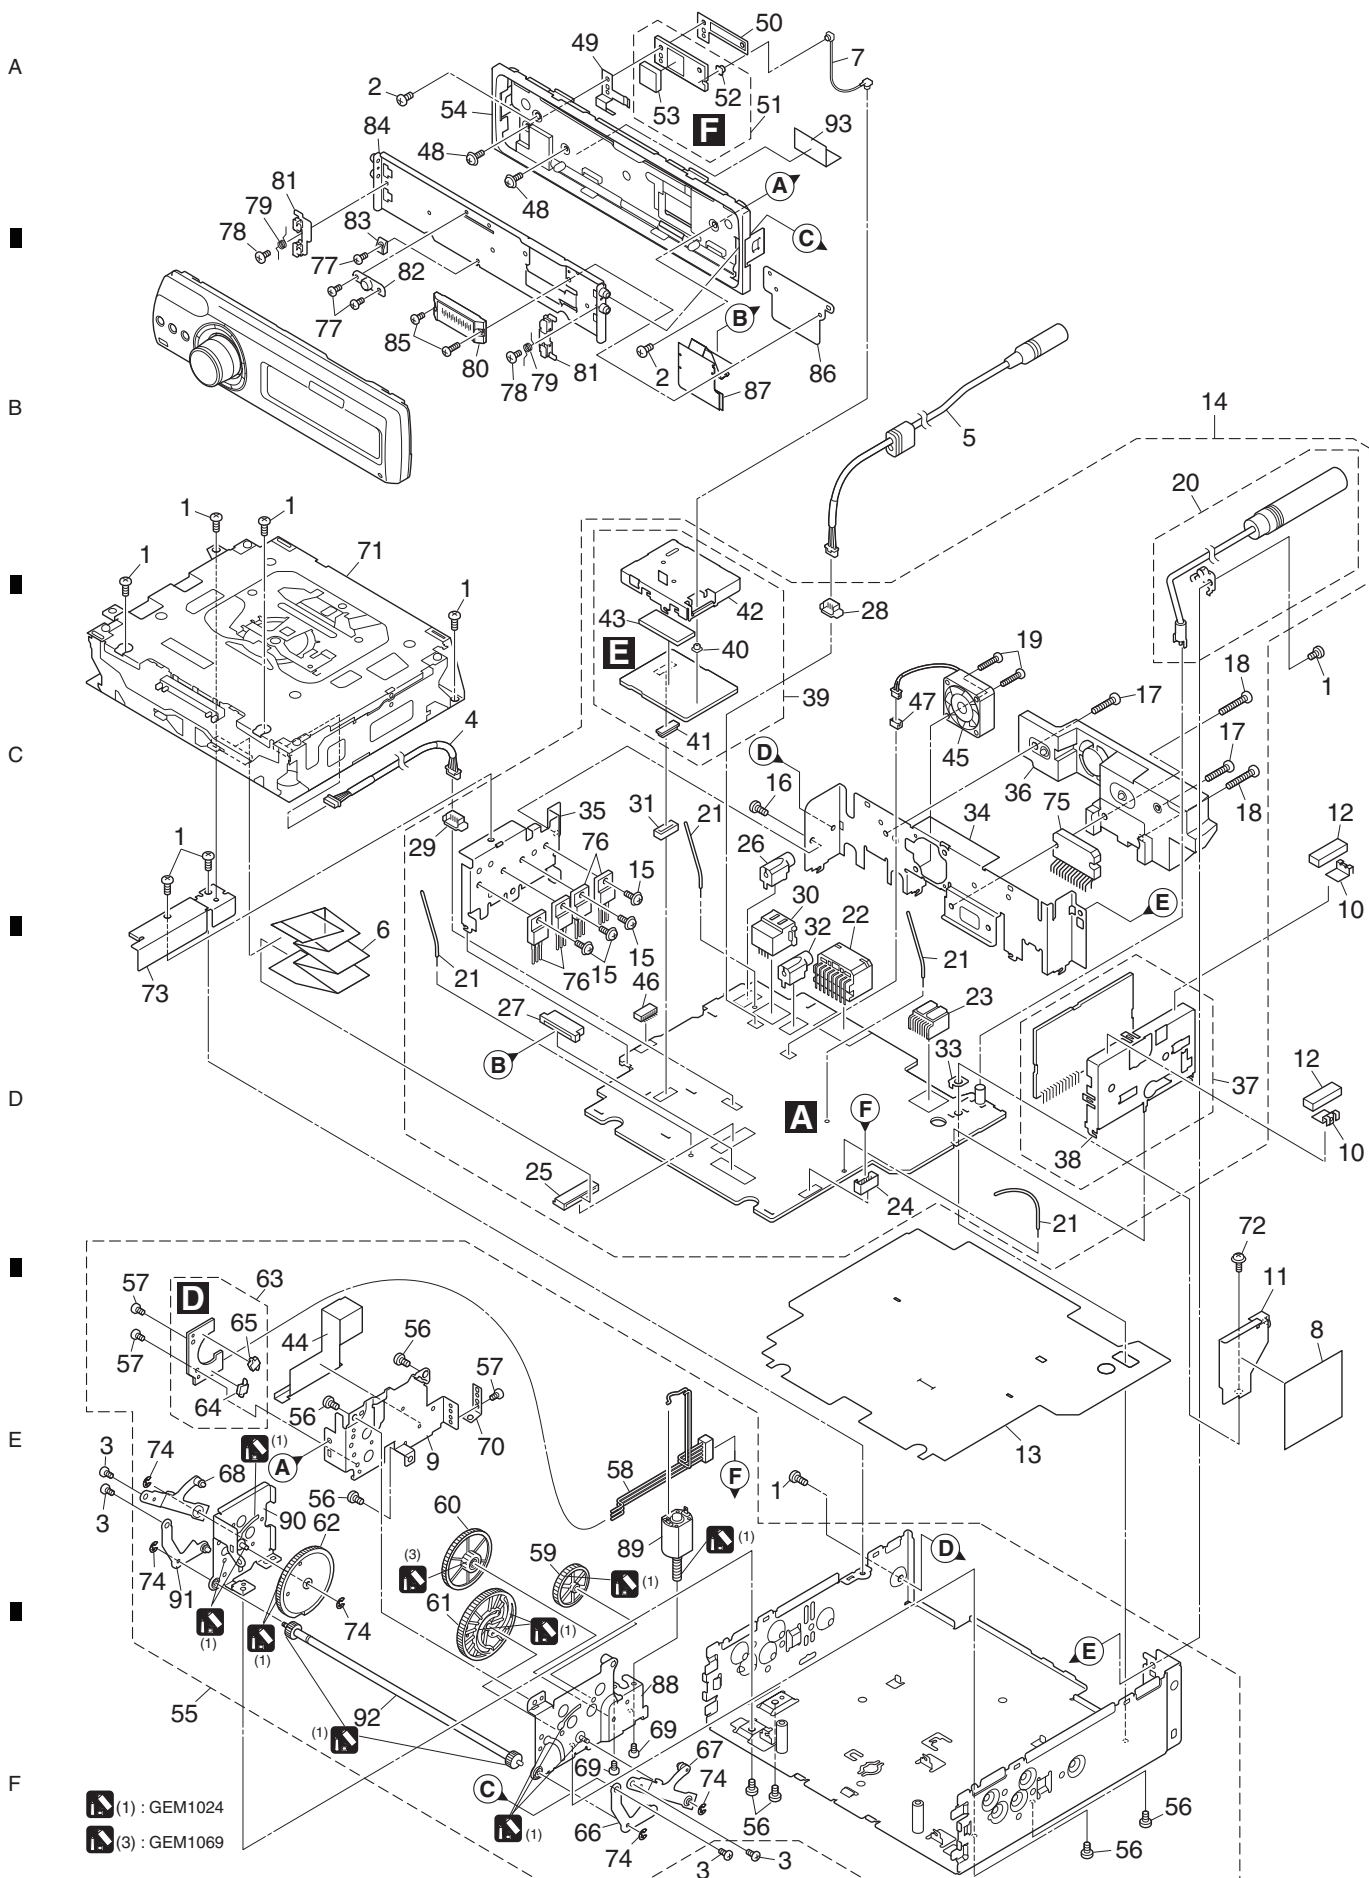

(1) EXTERIOR(2) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BSZ26P060FTC	48	Screw(M2 x 3.5)	CBA2030
2	Screw(M2.6 x 4)	CBA1828	49	Earth Plate	CND3138
3	Screw(M2 x 2.5)	CBA1924	50	Holder	CND3139
4	Cord Assy	CDE8315			
5	Cord Assy	See Contrast table(2)	51	Antenna Unit	CWN1772
			52	Connector(ANT1102)	CKS5058
6	Cable	CDE8067	53	BT Antenna (ANT1101)	CWX3132
7	Cord Assy	CDE8125	54	Panel Unit	CXC6608
8	Insulator	CNN1406	55	Drive Unit	CXC6618
9	Holder	XNX7017			
10	Earth Plate	CND2171	56	Screw	BMZ26P040FTC
			57	Screw(M2 x 2)	CBA1871
11	Shield	CND3599	58	Cord	CDE7392
12	Cushion	CNM9126	59	Gear	CNV7752
13	Insulator	CNN1413	60	Gear	CNV7753
14	Tuner Amp Unit	See Contrast table(2)			
15	Screw	ASZ26P060FTC	61	Gear	CNV7754
			62	Gear	CNV7755
16	Screw	BMZ26P040FTC	63	Switch Unit	CWS1389
17	Screw	BMZ26P120FTC	64	Switch(S1)	CSN1051
18	Screw	BMZ26P180FTC	65	Switch(S2)	CSN1052
19	Screw(M2.6 x 14)	CBA1632			
20	Antenna Cable	CDH1336	66	Arm Unit	CXC2199
			67	Arm Unit	CXC6623
21	Clamper	CEF1050	68	Arm Unit	CXC6624
22	Plug(CN991)	CKM1278	69	Screw	JFZ20P020FTC
23	Connector(CN321)	CKM1389	70	Spring	XBL7003
24	Plug(CN801)	CKS-786			
25	Connector(CN701)	CKS3834	71	CD Mechanism Module (S10.5)	CXK5754
			72	Screw	ISS26P055FTC
26	Connector(CN671)	See Contrast table(2)	73	Holder	CND3606
27	Connector(CN811)	CKS4811	74	Washer	YE15FTC
28	Connector(CN431)	CKS4823	75	IC (IC351)	PAL007B
29	Connector(CN702)	CKS4824			
30	Connector(CN101)	CKS5271	76	Transistor (Q721,901,911,921)	2SD2396
			77	Screw(M2 x 2)	CBA1871
31	Connector(CN551)	CKS5321	78	Screw(M2 x 2)	CBA1935
32	Connector(CN441)	CKS5523	79	Spring	CBH2530
33	Holder(CN402)	CNC5399	80	Connector	CKS5273
34	Holder	See Contrast table(2)			
35	Holder	CND3133	81	Arm	CNV6962
			82	Guide	CNV6967
36	Heat Sink	CNR1869	83	Guide	CNV8048
37	FM/AM Tuner Unit	CWE1952	84	Case Unit	CXC5695
38	Holder	CND1054	85	Screw(M2 x 3.5)	XBA7002
39	Bluetooth Unit	CWN1771			
40	Connector(CN1)	CKS5058	86	Holder	XNC7019
			87	Flexible PCB	XNP7026
41	Connector(CN76)	CKS5320	88	Holder Unit	XXA7399
42	Shield	CND3134	89	Motor Unit(M801)	XXA7400
43	Sheet	CNM9598	90	Holder Unit	XXA7401
44	Insulator	XNM7119			
45	Fan Motor(M972)	CXM1288	91	Arm Unit	XXA7403
			92	Gear Unit	XXA7424
46	7P FFC Connector (CN561)	VKN1299	93	Insulator	CNN1499
47	ZH Connector 2P (CN971)	VKN1928			

(2) CONTRAST TABLE

DEH-P980BT/XN/UC, DEH-P9800BT/XN/UC and DEH-P9850BT/XN/ES are constructed the same except for the following:

Mark	No.	Description	DEH-P980BT/XN/UC	DEH-P9800BT/XN/UC	DEH-P9850BT/XN/ES
	5	Cord Assy	CDE8062	CDE8144	CDE8062
	14	Tuner Amp Unit	CWN1436	CWN1437	CWN1438
	26	Connector(CN671)	CKS4124	CKS4124	Not used
	34	Holder	CND3132	CND3132	CND3161

△



 (2): GEM1045

CD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	CD Core Unit(COMP1D)	CWX3328	50	Rack	CNV8342	
2	Connector(CN101)	CKS4182				A
3	Connector(CN901)	CKS4187	51	Roller	CNV8343	
4	Screw	BMZ20P025FTC	52	Holder	CNV8344	
5	Screw	BSZ20P040FTC	53	Arm	CNV8345	
			54	Guide	CNV8347	
6	Screw(M2 x 3)	CBA1511	55	Arm	CNV8348	
7	Screw(M2 x 4)	CBA1835				
8	Washer	CBF1038	56	Arm	CNV8349	
9	*****		57	Arm	CNV8350	
10	Spring	CBH2609	58	Clamper	CNV8365	
			59	Arm	CNV8386	
11	Spring	CBH2612	60	Guide	CNV8396	B
12	Spring	CBH2614				
13	Spring	CBH2616	61	Arm	CNV8413	
14	Spring	CBH2617	62	Collar	CNV8938	
15	Spring	CBH2620	63	Motor Unit(M2)	CXC4026	
			64	Arm Unit	CXC4027	
16	Spring	CBH2855	65	Chassis Unit	CXC4028	
17	Spring	CBH2937				
18	Spring	CBH2735	66	Gear Unit	CXC4029	
19	Spring	CBH2854	67	Frame Unit	CXC4031	
20	Spring	CBH2642	68	Motor Unit(M1)	CXC6742	
			69	Screw Unit	CXC6359	C
21	Spring	CBH2856	70	Screw	JFZ20P020FTC	
22	Spring	CBH2857				
23	Spring	CBH2860	71	Screw	JGZ17P022FTC	
24	Spring	CBH2861	72	Washer	YE20FTC	
25	Spring	CBL1686	73	Pickup Unit(P10.5)(Service)	CXX1942	
			74	Screw	IMS26P030FTC	
26	Arm	CND1909	75	Connector(CN902)	CKS4979	
27	Frame	CND2582				
28	Bracket	CND2583				
29	Arm	CND2584				
30	Lever	CND2585				D
31	Arm	CND2586				
32	Bracket	CND2587				
33	Arm	CND2588				
34	Lever	CND2589				
35	Holder	CNV7201				
36	Gear	CNV7207				
37	Gear	CNV7208				
38	Gear	CNV7209				E
39	Gear	CNV7210				
40	Gear	CNV7211				
41	Gear	CNV7212				
42	Rack	CNV7214				
43	Arm	CNV7216				
44	Roller	CNV7218				
45	Gear	CNV7219				
46	Guide	CNV7361				
47	Gear	CNV7595				F
48	Guide	CNV7799				
49	Arm	CNV7805				

1

2

3

4

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○○J,RS1/○○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
Unit Number: CWN1771		Q 36 (A,17,8) Transistor	DTC124EUA
Unit Name : Bluetooth Unit		Q 37 (A,16,12) Transistor	DTC124EUA
Unit Number: CWN1436(DEH-P980BT/XN/UC)		L 1 (A,23,24) Inductor	CTF1394
Unit Name : Tuner Amp Unit		L 21 (A,26,39) Inductor	CTF1379
Unit Number: CWN1437(DEH-P9800BT/XN/UC)		L 22 (A,23,40) Inductor	CTF1379
Unit Name : Tuner Amp Unit		L 23 (B,23,44) Inductor	CTF1379
Unit Number: CWN1438(DEH-P9850BT/XN/ES)		L 36 (A,5,11) Inductor	LCYC2R2K1608
Unit Name : Tuner Amp Unit		L 51 (A,11,32) Inductor	CTF1379
Unit Number:		L 56 (B,17,7) Inductor	CTF1379
Unit Name : Keyboard Unit		L 57 (B,12,9) Inductor	CTF1379
Unit Number: CWX3328		X 21 (A,19,41)Resonator 11.289 6 MHz	CSS1670
Unit Name : CD Core Unit(COMP1D)		X 22 (B,18,42) Resonator 12.288 MHz	CSS1698
Unit Number:		Y 1 (B,27,21) Compound Unit	CWX3340

RESISTORS

Unit Name : Switch Unit		R 1 (A,22,12)	RS1/16S334J
Unit Number: CWN1771		R 2 (A,32,32)	RS1/16S103J
Unit Name : Bluetooth Unit		R 3 (A,35,26)	RS1/16S473J
		R 4 (A,28,29)	RS1/16S103J
		R 5 (A,20,24)	RS1/16S103J
		R 6 (A,22,32)	RS1/16S0R0J
		R 7 (A,35,23)	RS1/16S103J
		R 8 (A,32,23)	RS1/16S101J
		R 9 (A,32,20)	RS1/16S103J
		R 21 (A,33,39)	RS1/16S101J
		R 22 (B,21,38)	RS1/16S473J
		R 23 (A,23,37)	RS1/16S473J
		R 24 (B,24,40)	RS1/16S101J
		R 25 (A,24,40)	RS1/16S101J
		R 26 (A,21,41)	RS1/16S332J

MISCELLANEOUS

IC 21 (A,29,43) IC	TC74VHC02FTS1	R 27 (A,21,43)	RS1/16S105J
IC 22 (A,23,43) IC	TC7PAU04FU	R 28 (B,20,43)	RS1/16S332J
IC 23 (B,22,40) IC	TC7PAU04FU	R 29 (B,20,40)	RS1/16S105J
IC 36 (A,11,14) IC	AK2301A	R 36 (A,15,5)	RS1/16S103J
IC 51 (A,16,27) IC	AN6123MS	R 37 (A,14,7)	RS1/16S104J
IC 56 (B,10,13) IC	PCM1742KE	R 41 (A,8,22)	RS1/16S103J
IC 66 (B,12,21) IC	NJM4558V	R 43 (A,10,21)	RS1/16S393J
Q 1 (A,30,13) Transistor	DTC124EUA	R 44 (A,8,20)	RS1/16S393J
Q 2 (A,34,29) Transistor	DTC124EUA	R 45 (A,14,21)	RAB4C101J
Q 21 (B,27,40) Transistor	UMD2N	R 46 (A,4,18)	RS1/16S103J
Q 22 (B,31,43) Transistor	DTC124EUA	R 47 (A,16,15)	RS1/16S203J
Q 23 (B,27,43) Transistor	UMD2N		

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 48	(A,18,18)	RS1/16S103J	C 53	(A,19,29)	CKSYB106K6R3
R 49	(A,7,8)	RS1/16S203J	C 54	(A,15,30)	CKSRYB105K10
R 50	(A,14,8)	RS1/16S473J	C 55	(A,13,29)	CKSRYB104K16
R 51	(A,20,28)	RS1/16S105J	C 56	(B,8,7)	CKSYB106K6R3
			C 57	(B,15,12)	CKSRYB102K50
R 52	(A,7,5)	RS1/16S103J			
R 57	(B,15,15)	RAB4C101J	C 58	(B,16,11)	CKSYB106K6R3
R 58	(A,30,36)	RS1/16S821J	C 59	(B,14,9)	CKSRYB102K50
R 66	(B,18,21)	RS1/16S103J	C 60	(B,10,7)	CKSYB106K6R3
R 67	(B,16,24)	RS1/16S103J	C 61	(B,14,6)	CKSRYB102K50
			C 66	(B,16,18)	CKSYB475K16
R 68	(B,12,19)	RS1/16S473J			
R 69	(B,11,24)	RS1/16S103J	C 67	(B,9,17)	CKSYB475K16
R 70	(B,7,24)	RS1/16S103J	C 68	(B,16,21)	CCSRCH221J50
R 71	(B,9,19)	RS1/16S473J	C 69	(B,16,26)	CCSRCH391J50
R 72	(B,3,17)	RS1/16S103J	C 70	(B,9,26)	CKSYB106K6R3
			C 71	(B,6,25)	CKSRYB105K10
R 73	(B,5,19)	RS1/16S103J			
R 76	(A,4,30)	RS1/16S101J	C 72	(B,4,19)	CCSRCH391J50
R 77	(B,5,31)	RS1/16S101J	C 73	(B,7,20)	CCSRCH221J50
R 78	(A,6,32)	RS1/16S101J	C 76	(A,13,45)	CKSRYB102K50
R 79	(B,11,32)	RS1/16S0R0J			
R 80	(A,3,33)	RS1/16S101J			
R 81	(B,10,29)	RS1/16S101J			
R 82	(B,16,29)	RS1/16S101J			
R 83	(B,9,32)	RS1/16S101J			
R 84	(B,16,31)	RS1/16S0R0J			
R 85	(B,9,39)	RS1/16S101J			
R 86	(B,6,39)	RAB4C101J			
R 87	(B,12,39)	RAB4C101J			

CAPACITORS

C 1	(A,28,12)	CKSRYB104K16
C 4	(A,26,21)	CSZS100M16
C 5	(A,22,16)	CKSRYB104K16
C 7	(A,25,13)	CSZS1R0M16
C 8	(A,23,21)	CKSRYB104K16
C 9	(A,23,19)	CKSRYB104K16
C 10	(A,22,15)	CCSRCH101J50
C 21	(A,28,40)	CKSRYB104K16
C 22	(A,21,38)	CKSRYB105K10
C 23	(A,19,37)	CCSRCH120J50
C 24	(A,19,45)	CCSRCH120J50
C 25	(B,23,43)	CKSRYB105K10
C 26	(B,15,42)	CCSRCH120J50
C 27	(B,17,38)	CCSRCH120J50
C 28	(A,27,36)	CKSRYB102K50
C 36	(A,3,15)	CKSYB106K6R3
C 37	(A,5,15)	CKSRYB104K16
C 38	(A,10,22)	CKSRYB105K10
C 41	(A,10,19)	CCSRCH101J50
C 42	(A,7,20)	CKSRYB105K10
C 43	(A,4,20)	CKSRYB105K10
C 44	(A,11,8)	CKSRYB334K10
C 45	(A,12,5)	CKSRYB105K10
C 46	(A,16,17)	CCSRCH101J50
C 47	(A,7,7)	CCSRCH101J50
C 48	(A,9,5)	CKSRYB105K10
C 49	(A,9,8)	CKSRYB105K10
C 50	(A,17,20)	CKSRYB105K10
C 51	(A,19,24)	CKSRYB334K10
C 52	(A,16,24)	CCSRCH331J50

A

Unit Number : CWN1436(DEH-P980BT/XN/UC)

Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC 101	(B,31,140) IC	HA12241FP
IC 121	(A,129,104) IC	PM9009A
IC 122	(A,111,94) IC	TC4066BFT
IC 201	(A,61,77) IC	AK7732VT
IC 221	(A,76,86) IC	PCM1606EG
IC 240	(B,75,96) IC	NJM4558MD
IC 241	(B,78,53) IC	NJM4558MD
IC 261	(A,58,64) IC	TC74VHCT08AFTS1
IC 262	(A,96,62) IC	TC74VHC08FTS1
IC 271	(A,81,71) IC	TC7SH08FUS1
IC 281	(B,96,96) IC	NJM4558MD
IC 282	(B,96,74) IC	NJM4558MD
IC 283	(B,95,85) IC	NJM4558MD
IC 351	(A,102,139) IC	PAL007B
IC 371	(A,99,110) IC	PM8003A
IC 421	(B,160,88) IC	NJM2885DL1-33
IC 431	(A,48,108) IC	TC4066BFT
IC 441	(A,46,122) IC	NJM4558MD
IC 501	(A,95,28) IC	TC74VHCT08AFTS1
IC 511	(A,95,39) IC	TC74VHC08FTS1
IC 521	(A,99,20) IC	S99-50084
IC 561	(B,65,38) IC	NJM2885DL1-33
IC 566	(B,50,39) IC	NJM2872F05
IC 601	(A,133,67) IC	PEG260A
IC 661	(A,155,66) IC	S-80835CNUA-B8U
IC 751	(B,112,34) IC	NJM4558MD
IC 752	(B,126,47) IC	NJM4151M
IC 753	(B,127,34) IC	NJM4558MD
IC 754	(B,113,51) IC	TC7S14FU
IC 801	(A,147,40) IC	BA6288FS
IC 861	(A,65,98) IC	NJM2872F05
IC 871	(B,57,99) IC	NJM2885DL1-33
Q 101	(A,22,121) Transistor	UMF23N
Q 121	(A,111,89) Transistor	UMD3N
Q 181	(A,105,120) Transistor	2SC3052-12

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	Q 182	(A,108,130) Transistor	UMD3N	D 531	(B,53,46) Diode	1SS355
	Q 183	(B,115,93) Transistor	2SC4081	D 551	(B,54,59) Diode	DAN202U
	Q 281	(A,104,95) Transistor	UMH3N	D 601	(B,121,61) Diode	DAN202U
	Q 282	(A,106,66) Transistor	UMD3N	D 671	(B,19,140) Diode	DAN202U
	Q 291	(A,104,73) Transistor	UMH3N	D 672	(B,24,140) Diode	DAP202U
	Q 301	(A,104,84) Transistor	UMH3N	D 721	(A,30,72) Diode	HZS9L(A2)
	Q 321	(A,154,131) Transistor	IMH23	D 751	(B,135,51) Diode Network	DA204U
	Q 322	(A,148,127) Transistor	IMH23	D 752	(B,126,39) Diode Network	DA204U
	Q 323	(A,139,127) Transistor	IMH23	D 791	(B,110,73) Diode	HZU6L(B1)
	Q 324	(A,144,114) Transistor	UMD3N	D 792	(B,80,109) Diode	HZU7L(A1)
B	Q 351	(A,125,124) Transistor	DTC124EUA	D 793	(B,40,107) Diode	1SR154-400
	Q 391	(A,39,58) Transistor	2SC4081	D 794	(A,42,90) Diode	HZU9L(B2)
	Q 431	(A,46,114) Transistor	UMD3N	D 801	(A,148,30) Diode	1SS133
	Q 531	(B,55,43) Transistor	DTC314TU	D 802	(A,148,34) Diode	1SS133
	Q 601	(B,115,64) Transistor	UMD3N	D 803	(A,149,23) Diode	HZU7L(B2)
	Q 661	(B,155,56) Transistor	2SC4081	D 811	(B,115,13) Diode	DAN202U
	Q 721	(A,18,74) Transistor	2SD2396	D 812	(B,124,13) Diode	DAP202U
	Q 722	(A,36,72) Transistor	UMD3N	D 813	(A,111,27) Diode	DAN202U
	Q 791	(B,57,107) Transistor	2SD1760F5	D 814	(A,107,27) Diode	DAP202U
	Q 792	(A,57,103) Transistor	UMD3N	D 815	(B,106,15) Diode	DAN202U
C	Q 793	(B,111,69) Transistor	2SC4081	D 816	(B,106,19) Diode	DAP202U
	Q 794	(A,39,96) Transistor	2SC4081	D 817	(B,106,28) Diode	DAN202U
	Q 795	(A,39,90) Transistor	UMD3N	D 818	(B,106,24) Diode	DAP202U
	Q 801	(B,151,22) Transistor	2SD1760F5	D 841	(A,36,39) Diode	HZS9L(C2)
	Q 812	(A,153,18) Transistor	UMD3N	D 851	(A,66,13) Diode	HZS11L(A1)
	Q 831	(A,68,17) Transistor	2SB710A	D 853	(A,92,13) LED	SML412BC5T(MN)
	Q 832	(B,76,27) Transistor	DTC114EU	D 901	(A,35,59) Diode	MPG06G-6415G50
	Q 841	(A,34,19) Transistor	2SD1760F5	D 902	(A,29,59) Diode	HZS6L(B1)
	Q 842	(A,38,36) Transistor	UMD3N	D 911	(A,13,115) Diode	HZS9L(B2)
	Q 851	(B,63,24) Transistor	2SD1767	D 921	(A,30,83) Diode	HZS9L(B2)
	Q 852	(A,66,9) Transistor	UMD3N	D 931	(A,73,117) Diode	HZU7L(A1)
	Q 853	(A,132,34) Transistor	2SC4081	D 932	(A,69,118) Diode	HZU7L(C3)
	Q 901	(A,18,57) Transistor	2SD2396	D 941	(A,79,115) Diode	1SR154-400
	Q 902	(A,34,50) Transistor	UMD3N	D 951	(A,92,127) Diode	DAN202U
	Q 911	(A,18,103) Transistor	2SD2396	D 971	(A,57,114) Diode	HZS11L(B2)
D	Q 912	(A,22,118) Transistor	UMD3N	D 981	(B,87,109) Diode Network	DA204U
	Q 921	(A,18,87) Transistor	2SD2396	D 982	(B,82,117) Diode	HZU7L(C2)
	Q 922	(B,23,80) Transistor	UMD3N	D 991	(A,98,126) Diode	MPG06G-6415G50
	Q 931	(A,75,116) Transistor	UMX1N	D 992	(A,98,121) Diode	MPG06G-6415G50
	Q 941	(A,83,116) Transistor	DTC114EU	D 993	(A,61,103) Diode	DAN202U
	Q 951	(A,92,121) Transistor	2SA1576	ZNR401	(A,161,145) Surge Protector	RCCA-201Q31UA-PI
	Q 971	(A,51,115) Transistor	UMD3N	L 101	(B,24,134) Inductor	LCTAW2R2J2520
	Q 972	(A,57,117) Transistor	2SD1859	L 121	(A,117,117)	ATH1176
	D 121	(B,128,115) Diode	RB520S-30	L 201	(A,55,85) Inductor	CTF1379
	D 132	(B,124,112) Diode	1SS355	L 206	(B,66,83) Inductor	CTF1389
E	D 133	(B,124,108) Diode	RB521S-30	L 208	(A,63,68) Inductor	CTF1389
	D 134	(B,124,110) Diode	RB521S-30	L 221	(A,84,85) Inductor	CTF1379
	D 181	(A,107,127) Diode	HZU3R9(B1)	L 241	(B,84,52) Inductor	CTF1389
	D 281	(A,107,73) Diode	DAN202U	L 261	(A,56,70) Inductor	CTF1379
	D 321	(A,138,117) Diode	1SS133	L 262	(A,95,66) Inductor	CTF1379
	D 351	(A,117,130) Diode	MPG06G-6415G50	L 271	(A,83,70) Inductor	CTF1389
	D 352	(A,117,127) Diode	MPG06G-6415G50	L 272	(A,84,72) Inductor	CTF1379
	D 391	(A,44,69) Diode	DAN202U	L 371	(B,97,110) Inductor	CTF1379
	D 392	(A,43,72) Diode	HZU9L(A2)	L 401	(A,160,105) Inductor	LAU1R0K
	D 421	(A,161,84) Diode	1SR154-400	L 402	(A,154,106) Ferri-Inductor	LAU100K
F	D 422	(A,161,88) Diode	1SR154-400	L 403	(A,154,114) Inductor	LAU1R0K
	D 423	(A,161,91) Diode	1SR154-400	L 404	(B,167,149) Chip Coil	LCTAW4R7J2520
	D 431	(A,32,125) Diode	RSB6R8S	L 501	(B,95,22) Inductor	CTF1379
	D 441	(B,39,118) Diode	RSB6R8S	L 511	(B,94,35) Inductor	CTF1379
	D 442	(B,50,121) Diode	RSB6R8S	L 521	(B,84,23) Inductor	CTF1379

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
L 554	(B,60,45) Inductor	CTF1389		R 205	(A,59,68)	RS1/16S681J	
L 604	(A,139,90) Ferri-Inductor	LAU100K		R 206	(A,62,87)	RS1/16S101J	
L 701	(A,101,27) Inductor	LCTAW2R2J3225					
L 831	(A,76,17) Ferri-Inductor	LAU100K		R 207	(A,61,68)	RS1/16S681J	A
L 841	(A,57,18) Inductor	LAU2R2K		R 208	(A,67,86)	RAB4C101J	
				R 212	(A,69,76)	RS1/16S101J	
L 872	(A,41,85) Inductor	CTF1617		R 213	(A,68,71)	RS1/16S101J	
L 951	(A,86,115) Inductor	LAU2R2K		R 214	(A,67,71)	RS1/16S101J	
X 201	(A,59,91)Crystal Resonator 16.934 4 MHz CSS1052						
X 371	(A,87,107)Ceramic Resonator 4.096 MHz CSS1429			R 221	(B,78,89)	RS1/16S103J	
X 601	(A,149,67)Cristal Resonator 20 MHz VSS1167			R 222	(B,78,87)	RS1/16S103J	
				R 240	(B,83,99)	RS1/16S223J	
VR121	(A,120,112)Semi-fixed 15 kΩ(B) CCP1397			R 241	(B,83,101)	RS1/16S223J	
△FU321	(A,136,130) Fuse 3 A	CEK1286		R 242	(B,84,96)	RS1/16S153J	
BZ681	(A,152,50) Buzzer	CPV1062					
M 972	Fan Motor	CXM1288		R 243	(B,67,96)	RS1/16S153J	
	FM/AM Tuner Unit	CWE1952		R 244	(B,72,91)	RS1/16S101J	B
				R 247	(B,75,70)	RS1/16S101J	
				R 248	(B,79,65)	RS1/16S473J	
				R 249	(B,77,65)	RS1/16S473J	
RESISTORS							
R 101	(B,26,130)	RS1/16S181J					
R 102	(B,36,124)	RS1/16S181J		R 261	(B,58,66)	RS1/16S681J	
R 103	(B,27,124)	RS1/16S223J		R 262	(B,58,62)	RS1/16S681J	
R 104	(B,33,122)	RS1/16S223J		R 263	(A,69,66)	RAB4C123J	
R 105	(B,29,124)	RS1/16S102J		R 264	(B,69,63)	RAB4C223J	
				R 265	(A,103,63)	RS1/16S681J	
R 106	(B,31,122)	RS1/16S102J					
R 107	(B,39,142)	RS1/16S101J		R 266	(A,91,62)	RS1/16S681J	
R 108	(B,39,137)	RS1/16S101J		R 267	(A,91,63)	RS1/16S681J	
R 109	(B,39,140)	RS1/16S150J		R 268	(A,103,66)	RS1/16S681J	C
R 110	(B,39,138)	RS1/16S470J		R 269	(A,102,66)	RS1/16S681J	
				R 270	(A,100,66)	RS1/16S681J	
R 111	(B,39,135)	RS1/16S102J					
R 112	(A,26,124)	RS1/16S222J		R 271	(A,77,72)	RS1/16S0R0J	
R 113	(A,23,124)	RS1/16S332J		R 273	(A,82,67)	RS1/16S0R0J	
R 114	(A,20,124)	RS1/16S562J		R 274	(A,87,72)	RS1/16S0R0J	
R 122	(A,139,107)	RS1/16S0R0J		R 275	(A,91,65)	RS1/16S681J	
				R 276	(A,93,66)	RS1/16S681J	
R 123	(A,138,103)	RS1/16S0R0J					
R 124	(A,138,114)	RS1/16S0R0J		R 281	(A,98,94)	RS1/16S473J	
R 125	(A,138,113)	RS1/16S0R0J		R 282	(A,98,96)	RS1/16S473J	
R 126	(A,138,109)	RS1/16S0R0J		R 283	(A,98,93)	RS1/16S682J	
R 127	(A,138,107)	RS1/16S0R0J		R 284	(A,98,97)	RS1/16S682J	D
				R 285	(A,101,93)	RS1/16S682J	
R 128	(A,139,103)	RS1/16S0R0J					
R 129	(A,141,101)	RS1/16S0R0J		R 286	(A,101,97)	RS1/16S682J	
R 130	(A,141,99)	RS1/16S0R0J		R 287	(B,100,89)	RS1/16S102J	
R 131	(A,141,98)	RS1/16S0R0J		R 288	(B,103,94)	RS1/16S102J	
R 132	(A,107,89)	RS1/16S103J		R 289	(B,102,97)	RS1/16S101J	
				R 290	(B,89,94)	RS1/16S101J	
R 133	(A,114,89)	RS1/16S103J					
R 134	(A,133,113)	RAB4C102J		R 291	(A,98,73)	RS1/16S473J	
R 135	(A,124,113)	RS1/16S103J		R 292	(A,98,74)	RS1/16S473J	
R 181	(A,102,130)	RS1/16S104J		R 293	(A,98,71)	RS1/16S682J	
R 182	(B,110,125)	RS1/16S683J		R 294	(A,98,76)	RS1/16S682J	
				R 295	(A,101,71)	RS1/16S682J	E
R 183	(A,98,130)	RS1/16S153J					
R 184	(B,116,125)	RS1/16S682J		R 296	(A,101,76)	RS1/16S682J	
R 185	(A,104,124)	RS1/16S152J		R 297	(B,100,68)	RS1/16S102J	
R 186	(A,104,130)	RS1/16S222J		R 298	(B,103,71)	RS1/16S102J	
R 187	(A,105,130)	RS1/16S561J		R 299	(B,102,74)	RS1/16S101J	
				R 300	(B,89,70)	RS1/16S101J	
R 188	(A,110,130)	RS1/16S473J					
R 189	(B,107,97)	RS1/16S103J		R 301	(A,98,83)	RS1/16S473J	
R 190	(B,111,97)	RS1/16S223J		R 302	(A,98,85)	RS1/16S473J	
R 191	(B,115,97)	RS1/16S104J		R 303	(A,98,82)	RS1/16S682J	
R 201	(B,54,88)	RS1/16S104J		R 304	(A,98,86)	RS1/16S682J	
				R 305	(A,101,82)	RS1/16S682J	F
R 202	(B,52,88)	RS1/16S104J					
R 203	(B,57,79)	RS1/16S153J		R 306	(A,101,86)	RS1/16S682J	
R 204	(B,63,84)	RS1/16S222J		R 307	(B,100,79)	RS1/16S102J	
				R 308	(B,103,83)	RS1/16S102J	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 309 (B,102,86)
R 310 (B,89,82)

RS1/16S101J
RS1/16S101J

R 552 (B,45,69)
R 554 (B,43,69)

RS1/16S0R0J
RS1/16S102J

A R 321 (B,151,128)
R 322 (B,149,125)
R 323 (A,157,131)
R 324 (A,154,128)
R 325 (B,145,126)

RS1/16S470J
RS1/16S470J
RS1/16S223J
RS1/16S223J
RS1/16S470J

R 555 (B,41,51)
R 556 (B,53,49)
R 557 (B,48,54)
R 601 (B,131,87)
R 603 (B,131,85)

RS1/16S220J
RS1/16S102J
RS1/16S0R0J
RS1/16S104J
RS1/16S104J

R 326 (B,139,126)
R 327 (A,151,127)
R 328 (A,145,127)
R 329 (B,136,128)
R 330 (B,136,134)

RS1/16S470J
RS1/16S223J
RS1/16S223J
RS1/16S470J
RS1/16S470J

R 604 (A,135,52)
R 605 (B,131,83)
R 606 (A,139,81)
R 607 (B,132,73)
R 608 (A,126,82)

RS1/16S103J
RS1/16S104J
RS1/16S102J
RS1/16S104J
RS1/16S104J

B R 331 (A,142,127)
R 332 (A,134,130)
R 333 (A,145,118)
R 351 (B,99,147)
R 352 (A,125,121)

RS1/16S223J
RS1/16S223J
RS1/16S102J
RS1/16S103J
RS1/16S103J

R 609 (A,119,71)
R 611 (B,141,83)
R 613 (B,140,85)
R 615 (B,135,65)
R 616 (B,135,69)

RS1/16S102J
RS1/16S472J
RS1/16S472J
RS1/16S104J
RS1/16S104J

R 353 (A,125,126)
R 354 (A,122,125)
R 371 (B,91,108)
R 372 (B,100,110)
R 373 (B,130,78)

RS1/16S103J
RS1/16S331J
RS1/16S0R0J
RS1/16S473J
RS1/16S104J

R 617 (A,142,53)
R 619 (B,146,66)
R 621 (A,119,60)
R 625 (A,119,69)
R 627 (A,134,82)

RAB4C104J
RS1/16S0R0J
RAB4C104J
RS1/16S104J
RAB4C681J

C R 391 (A,39,54)
R 392 (A,40,65)
R 393 (A,38,65)
R 394 (A,37,65)
R 405 (B,167,114)

RS1/16S103J
RS1/16S223J
RS1/16S103J
RS1/16S473J
RS1/16S681J

R 628 (A,131,81)
R 629 (B,127,78)
R 631 (A,116,64)
R 632 (A,131,52)
R 633 (B,136,57)

RS1/16S681J
RS1/16S681J
RS1/16S104J
RS1/16S104J
RS1/16S104J

R 406 (B,173,130)
R 407 (B,173,132)
R 408 (B,173,134)
R 409 (B,173,136)
R 410 (B,174,140)

RS1/16S681J
RS1/16S681J
RS1/16S681J
RS1/16S681J
RS1/16S681J

R 635 (A,117,57)
R 640 (A,120,55)
R 652 (A,149,76)
R 661 (B,155,49)
R 662 (A,153,59)

RS1/16S104J
RS1/16S0R0J
RS1/16S104J
RS1/16S222J
RS1/16S102J

D R 431 (A,48,103)
R 432 (A,48,105)
R 441 (B,44,131)
R 442 (B,51,131)
R 443 (B,44,127)

RS1/16S103J
RS1/16S103J
RS1/16S223J
RS1/16S223J
RS1/16S103J

R 664 (B,155,53)
R 665 (A,156,61)
R 671 (B,13,140)
R 672 (B,15,140)
R 681 (B,149,50)

RS1/16S473J
RS1/16S183J
RS1/16S102J
RS1/16S102J
RS1/16S102J

R 444 (B,51,127)
R 445 (B,42,131)
R 446 (B,53,131)
R 447 (A,40,121)
R 448 (A,40,119)

RS1/16S103J
RS1/16S103J
RS1/16S103J
RS1/16S103J
RS1/16S103J

R 701 (B,96,43)
R 702 (B,96,47)
R 703 (A,98,47)
R 704 (A,98,50)
R 705 (B,96,51)

RS1/16S682J
RS1/16S682J
RS1/16S682J
RS1/16S682J
RS1/16S221J

E R 449 (A,39,123)
R 450 (A,52,122)
R 451 (A,45,116)
R 452 (A,47,117)
R 501 (B,95,24)

RS1/16S103J
RS1/16S103J
RS1/16S104J
RS1/16S104J
RS1/16S681J

R 706 (B,108,49)
R 707 (B,96,49)
R 708 (B,108,47)
R 709 (B,96,45)
R 710 (B,108,45)

RS1/16S221J
RS1/16S221J
RS1/16S221J
RS1/16S221J
RS1/16S681J

R 502 (B,95,26)
R 503 (B,89,31)
R 511 (B,65,49)
R 512 (B,82,40)
R 513 (B,65,51)

RS1/16S681J
RAB4C681J
RS1/16S182J
RAB4C681J
RS1/16S332J

R 711 (B,106,40)
R 712 (A,116,69)
R 721 (B,24,65)
R 751 (B,135,39)
R 752 (B,129,51)

RS1/16S473J
RS1/16S104J
RS1/4SA391J
RS1/16S393J
RS1/16S104J

F R 514 (B,61,51)
R 515 (B,89,40)
R 516 (B,65,53)
R 521 (B,82,31)
R 522 (B,88,25)

RS1/16S332J
RAB4C681J
RS1/16S182J
RAB4C101J
RS1/16S101J

R 753 (B,135,41)
R 754 (B,135,37)
R 755 (B,133,48)
R 757 (B,121,31)
R 758 (B,119,35)

RS1/16S472J
RS1/16S471J
RS1/16S273J
RS1/16S104J
RS1/16S222J

R 523 (B,88,23)
R 531 (B,51,42)
R 532 (B,49,43)

RS1/16S101J
RS1/16S223J
RS1/16S102J

R 759 (B,120,38)
R 760 (B,120,28)
R 761 (B,115,39)

RS1/16S471J
RS1/16S471J
RS1/16S473J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 762	(B,112,40)	RS1/16S473J		R 971	(A,52,119)	RS1/16S391J	
R 763	(B,118,52)	RS1/16S103J		R 972	(B,65,120)	RS1/16S1R0J	
R 764	(B,129,53)	RS1/16S103J		R 981	(B,79,112)	RS1/16S102J	A
R 765	(B,112,46)	RS1/16S473J		R 982	(B,82,111)	RS1/16S153J	
R 766	(B,112,44)	RS1/16S473J		R 983	(B,75,118)	RS1/16S102J	
R 767	(B,120,52)	RS1/16S472J		CAPACITORS			
R 768	(B,118,47)	RS1/16S103J		C 101	(B,34,134)	CKSRYB104K16	
R 769	(B,124,51)	RS1/16S682J		C 102	(B,35,144)	CKSRYB102K50	
R 770	(B,136,34)	RS1/16S333J		C 103	(B,39,144)	CKSRYB102K50	
R 771	(B,136,30)	RS1/16S332J		C 121	(A,114,106)	CKSQYB225K10	
R 773	(B,117,50)	RS1/16S0R0J		C 122	(A,114,104)	CKSQYB225K10	
R 774	(B,128,30)	RS1/16S473J		C 123	(A,114,108)	CKSQYB225K10	
R 775	(B,130,38)	RS1/16S473J		C 124	(A,114,102)	CKSQYB225K10	B
R 776	(B,139,27)	RS1/16S473J		C 125	(A,120,106)	CKSRYB105K10	
R 777	(B,140,30)	RS1/16S473J		C 126	(A,120,104)	CKSRYB105K10	
R 791	(B,107,69)	RS1/16S122J		C 127	(A,120,102)	CKSRYB104K16	
R 792	(A,54,105)	RS1/16S821J		C 128	(A,120,101)	CKSRYB104K16	
R 793	(A,39,94)	RS1/16S152J		C 129	(A,120,94)	CEJQ4R7M35	
R 801	(A,152,42)	RS1/16S102J		C 130	(A,126,94)	CEJQ4R7M35	
R 802	(A,142,42)	RS1/16S102J		C 131	(A,117,98)	CKSQYB225K10	
R 803	(B,149,38)	RS1/16S103J		C 132	(A,114,113)	CKSYB475K10	
R 804	(B,143,41)	RS1/16S563J		C 133	(A,114,111)	CKSYB475K10	
R 806	(B,152,42)	RS1/16S102J		C 134	(A,127,113)	CKSRYB105K10	C
R 807	(A,151,18)	RS1/4SA102J		C 135	(A,130,113)	CKSRYB105K10	
R 808	(B,152,38)	RS1/16S102J		C 136	(A,122,117)	CEJQ470M10	
R 811	(B,110,26)	RS1/16S222J		C 137	(A,129,117)	CEJQ470M10	
R 812	(B,112,18)	RS1/16S222J		C 138	(A,107,90)	CKSRYB104K16	
R 813	(B,110,28)	RS1/16S222J		C 139	(B,119,111)	CKSRYB105K10	
R 814	(B,115,17)	RS1/16S222J		C 151	(B,129,113)	CKSRYB105K10	
R 815	(A,116,27)	RS1/16S222J		C 181	(A,100,130)	CCSRCH681J50	
R 816	(B,117,17)	RS1/16S222J		C 182	(A,105,124)	CKSQYB225K10	
R 817	(B,120,17)	RS1/16S222J		C 183	(A,111,123)	CEJQ101M6R3	
R 818	(A,118,27)	RS1/16S222J		C 201	(B,54,81)	CKSRYB104K16	
R 819	(A,120,27)	RS1/16S104J		C 202	(B,56,82)	CKSRYB682K50	
R 820	(B,107,21)	RS1/16S223J		C 203	(B,56,76)	CKSRYB104K16	D
R 821	(B,109,12)	RS1/16S473J		C 204	(B,54,74)	CKSRYB104K16	
R 831	(B,70,15)	RS1/16S472J		C 205	(A,51,83)	CEJQ100M16	
R 832	(B,72,27)	RS1/16S821J		C 206	(A,51,77)	CEJQ100M16	
R 833	(B,80,23)	RS1/16S222J		C 207	(A,51,72)	CEJQ100M16	
R 841	(A,39,24)	RS1/16S1R0J		C 208	(B,58,84)	CKSRYB104K16	
R 842	(A,37,33)	RS1/4SA271J		C 209	(B,57,87)	CCSRCH8R0D50	
R 851	(B,63,27)	RS1/16S1R0J		C 210	(B,62,76)	CKSRYB104K16	
R 852	(B,59,20)	RS1/4SA391J		C 211	(B,62,87)	CCSRCH8R0D50	
R 853	(A,134,34)	RS1/16S562J		C 212	(B,63,79)	CKSRYB104K16	
R 854	(A,132,37)	RS1/16S103J		C 213	(B,64,75)	CKSRYB104K16	E
R 855	(A,89,16)	RS1/16S151J		C 214	(B,63,82)	CCSRCH680J50	
R 901	(B,22,56)	RS1/16S223J		C 215	(B,65,79)	CKSRYB104K16	
R 902	(A,36,50)	RS1/16S272J		C 216	(B,68,67)	CCSRCH680J50	
R 911	(A,22,116)	RS1/16S821J		C 217	(B,50,88)	CKSYB106K6R3	
R 921	(B,16,85)	RS1/16S821J		C 220	(B,65,94)	CKSRYB103K50	
R 931	(A,69,116)	RS1/16S104J		C 221	(B,81,86)	CCSRCH101J50	
R 932	(A,75,118)	RS1/16S103J		C 224	(A,81,77)	CEVW100M10	
R 933	(B,70,121)	RS1/16S473J		C 225	(A,83,83)	CKSRYB104K16	
R 934	(B,68,121)	RS1/16S473J		C 226	(A,87,77)	CSZS100M16	
R 935	(B,72,121)	RS1/16S472J		C 227	(A,84,83)	CKSRYB104K16	
R 941	(A,82,118)	RS1/16S103J		C 228	(A,93,87)	CEVW100M10	F
R 951	(A,91,119)	RS1/16S102J		C 229	(A,93,81)	CEVW100M10	
R 952	(A,89,121)	RS1/16S472J		C 230	(A,93,76)	CEVW100M10	
R 953	(A,92,124)	RS1/16S472J					
R 954	(A,90,124)	RS1/16S153J					

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 231 (A,93,70)
C 232 (A,93,98)
C 233 (A,93,92)

CEVW100M10
CEVW100M10
CEVW100M10

C 366 (B,121,133)
C 371 (B,94,112)
C 372 (B,99,112)

CKSRYB474K10
CKSRYB104K16
CKSRYB104K16

A

C 240 (B,82,96)
C 241 (B,69,96)
C 242 (B,86,95)
C 243 (B,66,71)
C 244 (A,73,79)

CCSRCH220J50
CCSRCH220J50
CKSRYB104K16
CKSRYB332K50
CKSYB106K6R3

C 373 (B,99,108)
C 374 (A,110,116)
C 378 (B,98,114)
C 401 (B,173,109)
C 402 (B,156,111)

CKSRYB104K16
CEAL100M16
CKSRYB105K10
CKSRYB103K50
CKSRYB102K50

C 245 (A,73,74)
C 246 (B,58,70)
C 247 (B,70,86)
C 250 (A,73,69)
C 251 (A,74,63)

CKSYB106K6R3
CKSRYB332K50
CKSYB106K6R3
CKSYB106K6R3
CKSYB106K6R3

C 403 (A,160,111)
C 404 (B,167,110)
C 405 (B,174,142)
C 406 (A,160,118)
C 408 (B,160,114)

CEJQ470M10
CKSYB475K10
CKSRYB103K50
CEJQ101M10
CKSRYB102K50

B

C 252 (B,78,48)
C 261 (A,56,68)
C 262 (A,98,66)
C 272 (A,81,69)
C 273 (A,85,70)

CKSRYB104K16
CKSRYB104K16
CKSRYB104K16
CCSRCH560J50
CKSRYB103K50

C 421 (A,161,96)
C 422 (B,157,93)
C 423 (B,156,83)
C 424 (B,135,97)
C 431 (A,48,112)

CEJQ220M16
CKSRYB103K50
CKSYB475K10
CKSRYB103K50
CKSRYB104K16

C 281 (A,98,91)
C 282 (A,98,99)
C 283 (A,101,94)
C 284 (A,101,96)
C 285 (B,96,89)

CCSRCH681J50
CCSRCH681J50
CCSRCH331J50
CCSRCH331J50
CKSRYB105K10

C 432 (A,33,117)
C 433 (A,36,118)
C 441 (B,42,127)
C 442 (B,53,127)
C 443 (B,43,123)

CKSQYB105K16
CKSQYB105K16
CKSQYB225K10
CKSQYB225K10
CKSQYB225K10

C

C 286 (B,104,98)
C 287 (B,95,100)
C 291 (A,98,70)
C 292 (A,98,77)
C 293 (A,101,73)

CKSRYB105K10
CKSRYB104K16
CCSRCH681J50
CCSRCH681J50
CCSRCH331J50

C 444 (B,50,123)
C 445 (A,41,123)
C 446 (A,51,122)
C 447 (A,45,118)
C 448 (A,40,115)

CKSQYB225K10
CCSRCH101J50
CCSRCH101J50
CKSRYB105K10
CEVW100M10

C 294 (A,101,74)
C 295 (B,96,68)
C 296 (B,104,74)
C 297 (B,89,76)
C 301 (A,98,80)

CCSRCH331J50
CKSRYB105K10
CKSRYB105K10
CKSRYB104K16
CCSRCH681J50

C 501 (B,99,22)
C 511 (B,94,37)
C 521 (B,84,18)
C 554 (A,46,63)
C 561 (A,51,66)

CKSRYB104K16
CKSRYB104K16
CKSRYB104K16
CEJQ330M10
CEJQ220M16

D

C 302 (A,98,88)
C 303 (A,101,83)
C 304 (A,101,85)
C 305 (B,96,79)
C 306 (B,104,86)

CCSRCH681J50
CCSRCH331J50
CCSRCH331J50
CKSRYB105K10
CKSRYB105K10

C 562 (B,63,43)
C 563 (B,63,33)
C 566 (B,45,37)
C 567 (B,55,40)
C 568 (B,55,38)

CKSRYB103K50
CKSYB475K10
CKSRYB104K16
CKSRYB103K50
CKSRYB105K6R3

C 307 (B,89,87)
C 321 (A,153,122)
C 322 (A,147,122)
C 323 (A,140,122)
C 324 (A,134,122)

CKSRYB104K16
CEJQNP100M10
CEJQNP100M10
CEJQNP100M10
CEJQNP100M10

C 601 (A,128,83)
C 602 (A,140,84)
C 603 (A,124,83)
C 605 (B,137,89)
C 606 (A,134,90)

CKSRYB104K16
CKSRYB104K16
CKSRYB104K16
CKSRYB103K50
CEJQ4R7M35

E

C 325 (A,130,127)
C 326 (A,131,133)
C 327 (A,154,134)
C 328 (A,149,115)
C 351 (B,129,123)

CEJQNP100M10
CEJQNP100M10
CKSRYB102K50
CEJQ220M16
CKSQYB474K16

C 607 (B,151,68)
C 608 (B,151,64)
C 610 (A,118,65)
C 611 (A,138,53)
C 612 (A,134,54)

CCSRCH7R0D50
CCSRCH7R0D50
CKSRYB104K16
CKSRYB104K16
CKSRYB104K16

C 352 (B,124,124)
C 353 (B,126,123)
C 354 (B,122,124)
C 355 (A,117,122)
C 357 (A,86,125) 3 300 μ F/16 V

CKSQYB474K16
CKSQYB474K16
CKSQYB474K16
CEJQ330M10
CCH1486

C 613 (B,134,78)
C 662 (B,155,51)
C 663 (A,156,59)
C 721 (B,30,74)
C 722 (B,29,67)

CCSRCH331J50
CKSRYB104K16
CKSRYB105K10
CKSRYB473K25
CKSRYB102K50

F

C 358 (B,95,140)
C 359 (A,124,130)
C 360 (A,124,135)
C 361 (A,126,135)
C 363 (B,122,140)

CKSRYB104K25
CEHAR100M16
CKSQYB225K10
CKSQYB225K10
CKSRYB474K10

C 723 (A,29,65)
C 743 (A,96,54)
C 751 (A,138,41)
C 752 (A,138,46)
C 753 (A,138,35)

CEJQ101M10
CEJQ101M10
CEJQ4R7M35
CEJQ1R0M50
CEJQ4R7M35

C 364 (B,121,135)
C 365 (B,122,138)

CKSRYB474K10
CKSRYB474K10

C 754 (B,112,38)
C 755 (B,119,31)

CKSRYB104K16
CKSRYB102K50

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 756	(B,121,35)	CCSRCH101J50		C 971	(B,63,112)	CKSRYB103K50	
C 758	(B,134,30)	CKSRYB105K10		C 972	(B,62,116)	CKSRYB103K50	
C 759	(B,124,53)	CKSRYB104K16		C 973	(A,64,116)	CEJQ100M16	
C 760	(B,122,39)	CKSRYB104K16		C 981	(B,82,113)	CKSRYB104K16	
C 761	(B,128,28)	CKSRYB104K16		A Unit Number : CWN1437(DEH-P9800BT/XN/UC) Unit Name : Tuner Amp Unit			
C 762	(B,118,45)	CKSRYB472K50					
C 763	(B,119,49)	CKSRYB102K50					
C 764	(B,112,48)	CKSRYB104K16		MISCELLANEOUS			
C 765	(B,134,34)	CKSRYB471K50		IC 101	(B,31,140) IC	HA12241FP	
C 768	(B,138,30)	CKSRYB104K16		IC 121	(A,129,104) IC	PM9009A	
C 769	(B,75,112)	CKSRYB153K50		IC 122	(A,111,94) IC	TC4066BFT	
C 791	(B,115,71)	CKSRYB103K50		IC 201	(A,61,77) IC	AK7732VT	
C 792	(A,66,107)	CEJQ470M10		IC 221	(A,76,86) IC	PCM1606EG	
C 793	(B,75,109)	CKSRYB103K50		IC 240	(B,75,96) IC	NJM4558MD	
C 794	(A,79,106)	CCH1325		IC 241	(B,78,53) IC	NJM4558MD	
C 795	(A,71,111)	CEJQ101M10		IC 261	(A,58,64) IC	TC74VHCT08AFTS1	
C 796	(A,44,90)	CKSRYB103K50		IC 262	(A,96,62) IC	TC74VHC08FTS1	
C 801	(B,143,43)	CKSRYB103K50		IC 271	(A,81,71) IC	TC7SH08FUS1	
C 802	(B,153,32)	CKSRYB102K50		IC 281	(B,96,96) IC	NJM4558MD	
C 803	(A,142,37)	CCSRCH101J50		IC 282	(B,96,74) IC	NJM4558MD	
C 804	(A,152,37)	CCSRCH101J50		IC 283	(B,95,85) IC	NJM4558MD	
C 806	(B,156,27)	CKSRYB102K50		IC 351	(A,102,139) IC	PAL007B	
C 807	(A,157,20)	CKSRYB104K16		IC 371	(A,99,110) IC	PM8003A	
C 808	(A,154,24)	CEVW220M16		IC 421	(B,160,88) IC	NJM2885DL1-33	
C 831	(B,80,21)	CKSRYB104K16		IC 441	(A,46,122) IC	NJM4558MD	
C 832	(A,76,11)	CEVW470M10		IC 501	(A,95,28) IC	TC74VHCT08AFTS1	
C 841	(A,57,12)	CEVW470M16		IC 511	(A,95,39) IC	TC74VHC08FTS1	
C 842	(B,37,37)	CKSRYB104K16		IC 521	(A,99,20) IC	S99-50084	
C 843	(B,36,31)	CKSRYB102K50		IC 561	(B,65,38) IC	NJM2885DL1-33	
C 844	(A,36,29)	CEJQ330M16		IC 566	(B,50,39) IC	NJM2872F05	
C 851	(B,65,15)	CKSRYB473K25		IC 601	(A,133,67) IC	PEG260A	
C 852	(A,92,14)	CKSRYB104K16		IC 661	(A,155,66) IC	S-80835CNUA-B8U	
C 861	(A,61,97)	CKSRYB105K6R3		IC 751	(B,112,34) IC	NJM4558MD	
C 862	(A,61,99)	CKSRYB103K50		IC 752	(B,126,47) IC	NJM4151M	
C 863	(A,68,98)	CKSRYB104K16		IC 753	(B,127,34) IC	NJM4558MD	
C 871	(A,43,75)	CKSRYB104K16		IC 754	(B,113,51) IC	TC7S14FU	
C 873	(A,41,79)	CEVW101M6R3		IC 801	(A,147,40) IC	BA6288FS	
C 875	(A,38,85)	CKSRYB105K10		IC 861	(A,65,98) IC	NJM2872F05	
C 877	(A,49,99)	CEVW101M6R3		IC 871	(B,57,99) IC	NJM2885DL1-33	
C 878	(A,55,100)	CKSRYB103K50		Q 101	(A,22,121) Transistor	UMF23N	
C 879	(B,49,98)	CKSYB475K10		Q 121	(A,111,89) Transistor	UMD3N	
C 901	(A,27,47) 2 200 μ F/16 V	CCH1405		Q 281	(A,104,95) Transistor	UMH3N	
C 903	(B,28,62)	CKSRYB472K50		Q 282	(A,106,66) Transistor	UMD3N	
C 904	(B,28,52)	CKSRYB103K50		Q 291	(A,104,73) Transistor	UMH3N	
C 905	(A,28,54)	CEJQ470M10		Q 301	(A,104,84) Transistor	UMH3N	
C 911	(A,32,109)	CEJQ221M10		Q 321	(A,154,131) Transistor	IMH23	
C 912	(B,13,117)	CKSRYB103K50		Q 322	(A,148,127) Transistor	IMH23	
C 913	(A,13,120)	CEJQ101M10		Q 323	(A,139,127) Transistor	IMH23	
C 921	(A,31,99) 470 μ F/16 V	CCH1325		Q 324	(A,144,114) Transistor	UMD3N	
C 922	(B,30,81)	CKSRYB103K50		Q 351	(A,125,124) Transistor	DTC124EUA	
C 923	(A,30,77)	CEJQ101M10		Q 391	(A,39,58) Transistor	2SC4081	
C 932	(B,74,121)	CKSRYB104K16		Q 531	(B,55,43) Transistor	DTC314TU	
C 941	(A,83,114)	CKSQYB105K16		Q 601	(B,115,64) Transistor	UMD3N	
C 963	(A,77,135)	CKSQYB105K10		Q 661	(B,155,56) Transistor	2SC4081	
C 964	(B,74,132)	CKSQYB105K16		Q 721	(A,18,74) Transistor	2SD2396	
C 965	(B,72,132)	CKSQYB105K16		Q 722	(A,36,72) Transistor	UMD3N	
C 966	(B,73,145)	CKSQYB105K16		Q 791	(B,57,107) Transistor	2SD1760F5	
C 967	(A,74,135)	CKSQYB105K16					
C 968	(A,72,135)	CKSQYB105K16					
C 969	(A,69,135)	CKSQYB105K16					

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

Q 792 (A,57,103) Transistor

UMD3N

D 816

(B,106,19) Diode

DAP202U

Q 793 (B,111,69) Transistor

2SC4081

D 817

(B,106,28) Diode

DAN202U

Q 794 (A,39,96) Transistor

2SC4081

D 818

(B,106,24) Diode

DAP202U

Q 795 (A,39,90) Transistor

UMD3N

D 841

(A,36,39) Diode

HZS9L(C2)

Q 801 (B,151,22) Transistor

2SD1760F5

D 851

(A,66,13) Diode

HZS11L(A1)

Q 812 (A,153,18) Transistor

UMD3N

D 853

(A,92,13) LED

SML412BC5T(MN)

Q 831 (A,68,17) Transistor

2SB710A

D 901

(A,35,59) Diode

MPG06G-6415G50

Q 832 (B,76,27) Transistor

DTC114EU

D 902

(A,29,59) Diode

HZS6L(B1)

Q 841 (A,34,19) Transistor

2SD1760F5

D 911

(A,13,115) Diode

HZS9L(B2)

Q 842 (A,38,36) Transistor

UMD3N

D 921

(A,30,83) Diode

HZS9L(B2)

Q 851 (B,63,24) Transistor

2SD1767

D 931

(A,73,117) Diode

HZU7L(A1)

Q 852 (A,66,9) Transistor

UMD3N

D 932

(A,69,118) Diode

HZU7L(C3)

Q 853 (A,132,34) Transistor

2SC4081

D 941

(A,79,115) Diode

1SR154-400

Q 901 (A,18,57) Transistor

2SD2396

D 951

(A,92,127) Diode

DAN202U

Q 902 (A,34,50) Transistor

UMD3N

D 971

(A,57,114) Diode

HZS11L(B2)

Q 911 (A,18,103) Transistor

2SD2396

D 981

(B,87,109) Diode Network

DA204U

Q 912 (A,22,118) Transistor

UMD3N

D 982

(B,82,117) Diode

HZU7L(C2)

Q 921 (A,18,87) Transistor

2SD2396

D 991

(A,98,126) Diode

MPG06G-6415G50

Q 922 (B,23,80) Transistor

UMD3N

D 992

(A,98,121) Diode

MPG06G-6415G50

Q 931 (A,75,116) Transistor

UMX1N

D 993

(A,61,103) Diode

DAN202U

Q 941 (A,83,116) Transistor

DTC114EU

ZNR401

(A,161,145) Surge Protector

RCCA-201Q31UA-PI

Q 951 (A,92,121) Transistor

2SA1576

L 101

(B,24,134) Inductor

LCTAW2R2J2520

Q 971 (A,51,115) Transistor

UMD3N

L 121

(A,117,117) Inductor

ATH1176

Q 972 (A,57,117) Transistor

2SD1859

L 201

(A,55,85) Inductor

CTF1379

D 121 (B,128,115) Diode

RB520S-30

L 206

(B,66,83) Inductor

CTF1389

D 132 (B,124,112) Diode

1SS355

L 208

(A,63,68) Inductor

CTF1389

D 133 (B,124,108) Diode

RB521S-30

L 221

(A,84,85) Inductor

CTF1379

D 134 (B,124,110) Diode

RB521S-30

L 241

(B,84,52) Inductor

CTF1389

D 281 (A,107,73) Diode

DAN202U

L 261

(A,56,70) Inductor

CTF1379

D 321 (A,138,117) Diode

1SS133

L 262

(A,95,66) Inductor

CTF1379

D 351 (A,117,130) Diode

MPG06G-6415G50

L 271

(A,83,70) Inductor

CTF1389

D 352 (A,117,127) Diode

MPG06G-6415G50

L 272

(A,84,72) Inductor

CTF1379

D 391 (A,44,69) Diode

DAN202U

L 371

(B,97,110) Inductor

CTF1379

D 392 (A,43,72) Diode

HZU9L(A2)

L 401

(A,160,105) Inductor

LAU1R0K

D 421 (A,161,84) Diode

1SR154-400

L 402

(A,154,106) Ferri-Inductor

LAU100K

D 422 (A,161,88) Diode

1SR154-400

L 403

(A,154,114) Inductor

LAU1R0K

D 423 (A,161,91) Diode

1SR154-400

L 404

(B,167,149) Chip Coil

LCTAW4R7J2520

D 431 (A,32,125) Diode

RSB6R8S

L 501

(B,95,22) Inductor

CTF1379

D 441 (B,39,118) Diode

RSB6R8S

L 511

(B,94,35) Inductor

CTF1379

D 442 (B,50,121) Diode

RSB6R8S

L 521

(B,84,23) Inductor

CTF1379

D 531 (B,53,46) Diode

1SS355

L 554

(B,60,45) Inductor

CTF1389

D 551 (B,54,59) Diode

DAN202U

L 604

(A,139,90) Ferri-Inductor

LAU100K

D 601 (B,121,61) Diode

DAN202U

L 701

(A,101,27) Inductor

LCTAW2R2J3225

D 671 (B,19,140) Diode

DAN202U

L 831

(A,76,17) Ferri-Inductor

LAU100K

D 672 (B,24,140) Diode

DAP202U

L 841

(A,57,18) Inductor

LAU2R2K

D 721 (A,30,72) Diode

HZS9L(A2)

L 872

(A,41,85) Inductor

CTF1617

D 751 (B,135,51) Diode Network

DA204U

L 951

(A,86,115) Inductor

LAU2R2K

D 752 (B,126,39) Diode Network

DA204U

X 201

(A,59,91) Crystal Resonator 16.934 4 MHz CSS1052

D 791 (B,110,73) Diode

HZU6L(B1)

X 371

(A,87,107) Ceramic Resonator 4.096 MHz CSS1429

D 792 (B,80,109) Diode

HZU7L(A1)

X 601

(A,149,67) Cristal Resonator 20 MHz VSS1167

D 793 (B,40,107) Diode

1SR154-400

VR121

(A,120,112) Semi-fixed 15 kΩ(B) CCP1397

D 794 (A,42,90) Diode

HZU9L(B2)

△FU321

(A,136,130) Fuse 3 A

CEK1286

D 801 (A,148,30) Diode

1SS133

BZ681

(A,152,50) Buzzer

CPV1062

D 802 (A,148,34) Diode

1SS133

M 972

Fan Motor

CXM1288

D 803 (A,149,23) Diode

HZU7L(B2)

FM/AM Tuner Unit

CWE1951

D 811 (B,115,13) Diode

DAN202U

RESISTORS

D 812 (B,124,13) Diode

DAP202U

R 101

(B,26,130)

RS1/16S181J

D 813 (A,111,27) Diode

DAN202U

R 102

(B,36,124)

RS1/16S181J

D 814 (A,107,27) Diode

DAP202U

D 815 (B,106,15) Diode

DAN202U

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 103	(B,27,124)	RS1/16S223J		R 275	(A,91,65)	RS1/16S681J	
R 104	(B,33,122)	RS1/16S223J		R 276	(A,93,66)	RS1/16S681J	
R 105	(B,29,124)	RS1/16S102J		R 281	(A,98,94)	RS1/16S473J	A
R 106	(B,31,122)	RS1/16S102J		R 282	(A,98,96)	RS1/16S473J	
R 107	(B,39,142)	RS1/16S101J		R 283	(A,98,93)	RS1/16S682J	
R 108	(B,39,137)	RS1/16S101J		R 284	(A,98,97)	RS1/16S682J	
R 109	(B,39,140)	RS1/16S150J		R 285	(A,101,93)	RS1/16S682J	
R 110	(B,39,138)	RS1/16S470J		R 286	(A,101,97)	RS1/16S682J	
R 111	(B,39,135)	RS1/16S102J		R 287	(B,100,89)	RS1/16S102J	
R 112	(A,26,124)	RS1/16S222J		R 288	(B,103,94)	RS1/16S102J	
R 113	(A,23,124)	RS1/16S332J		R 289	(B,102,97)	RS1/16S101J	
R 114	(A,20,124)	RS1/16S562J		R 290	(B,89,94)	RS1/16S101J	
R 122	(A,139,107)	RS1/16S0R0J		R 291	(A,98,73)	RS1/16S473J	
R 123	(A,138,103)	RS1/16S0R0J		R 292	(A,98,74)	RS1/16S473J	B
R 124	(A,138,114)	RS1/16S0R0J		R 293	(A,98,71)	RS1/16S682J	
R 125	(A,138,113)	RS1/16S0R0J		R 294	(A,98,76)	RS1/16S682J	
R 126	(A,138,109)	RS1/16S0R0J		R 295	(A,101,71)	RS1/16S682J	
R 127	(A,138,107)	RS1/16S0R0J		R 296	(A,101,76)	RS1/16S682J	
R 128	(A,139,103)	RS1/16S0R0J		R 297	(B,100,68)	RS1/16S102J	
R 129	(A,141,101)	RS1/16S0R0J		R 298	(B,103,71)	RS1/16S102J	
R 130	(A,141,99)	RS1/16S0R0J		R 299	(B,102,74)	RS1/16S101J	
R 131	(A,141,98)	RS1/16S0R0J		R 300	(B,89,70)	RS1/16S101J	
R 132	(A,107,89)	RS1/16S103J		R 301	(A,98,83)	RS1/16S473J	
R 133	(A,114,89)	RS1/16S103J		R 302	(A,98,85)	RS1/16S473J	
R 134	(A,133,113)	RAB4C102J		R 303	(A,98,82)	RS1/16S682J	C
R 135	(A,124,113)	RS1/16S103J		R 304	(A,98,86)	RS1/16S682J	
R 201	(B,54,88)	RS1/16S104J		R 305	(A,101,82)	RS1/16S682J	
R 202	(B,52,88)	RS1/16S104J		R 306	(A,101,86)	RS1/16S682J	
R 203	(B,57,79)	RS1/16S153J		R 307	(B,100,79)	RS1/16S102J	
R 204	(B,63,84)	RS1/16S222J		R 308	(B,103,83)	RS1/16S102J	
R 205	(A,59,68)	RS1/16S681J		R 309	(B,102,86)	RS1/16S101J	
R 206	(A,62,87)	RS1/16S101J		R 310	(B,89,82)	RS1/16S101J	
R 207	(A,61,68)	RS1/16S681J		R 321	(B,151,128)	RS1/16S470J	
R 208	(A,67,86)	RAB4C101J		R 322	(B,149,125)	RS1/16S470J	
R 212	(A,69,76)	RS1/16S101J		R 323	(A,157,131)	RS1/16S223J	
R 213	(A,68,71)	RS1/16S101J		R 324	(A,154,128)	RS1/16S223J	D
R 214	(A,67,71)	RS1/16S101J		R 325	(B,145,126)	RS1/16S470J	
R 221	(B,78,89)	RS1/16S103J		R 326	(B,139,126)	RS1/16S470J	
R 222	(B,78,87)	RS1/16S103J		R 327	(A,151,127)	RS1/16S223J	
R 240	(B,83,99)	RS1/16S223J		R 328	(A,145,127)	RS1/16S223J	
R 241	(B,83,101)	RS1/16S223J		R 329	(B,136,128)	RS1/16S470J	
R 242	(B,84,96)	RS1/16S153J		R 330	(B,136,134)	RS1/16S470J	
R 243	(B,67,96)	RS1/16S153J		R 331	(A,142,127)	RS1/16S223J	
R 244	(B,72,91)	RS1/16S101J		R 332	(A,134,130)	RS1/16S223J	
R 247	(B,75,70)	RS1/16S101J		R 333	(A,145,118)	RS1/16S102J	
R 248	(B,79,65)	RS1/16S473J		R 351	(B,99,147)	RS1/16S103J	E
R 249	(B,77,65)	RS1/16S473J		R 352	(A,125,121)	RS1/16S103J	
R 261	(B,58,66)	RS1/16S681J		R 353	(A,125,126)	RS1/16S103J	
R 262	(B,58,62)	RS1/16S681J		R 354	(A,122,125)	RS1/16S331J	
R 263	(A,69,66)	RAB4C123J		R 371	(B,91,108)	RS1/16S0R0J	
R 264	(B,69,63)	RAB4C223J		R 372	(B,100,110)	RS1/16S473J	
R 265	(A,103,63)	RS1/16S681J		R 373	(B,130,78)	RS1/16S104J	
R 266	(A,91,62)	RS1/16S681J		R 391	(A,39,54)	RS1/16S103J	
R 267	(A,91,63)	RS1/16S681J		R 392	(A,40,65)	RS1/16S223J	
R 268	(A,103,66)	RS1/16S681J		R 393	(A,38,65)	RS1/16S103J	
R 269	(A,102,66)	RS1/16S681J		R 394	(A,37,65)	RS1/16S473J	
R 270	(A,100,66)	RS1/16S681J		R 405	(B,167,114)	RS1/16S681J	F
R 271	(A,77,72)	RS1/16S0R0J		R 406	(B,173,130)	RS1/16S681J	
R 273	(A,82,67)	RS1/16S0R0J		R 407	(B,173,132)	RS1/16S681J	
R 274	(A,87,72)	RS1/16S0R0J		R 408	(B,173,134)	RS1/16S681J	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 409 (B,173,136)
R 410 (B,174,140)
R 433 (A,43,113)

RS1/16S681J
RS1/16S681J
RS1/16S0R0J

R 661 (B,155,49)
R 662 (A,153,59)
R 664 (B,155,53)

RS1/16S222J
RS1/16S102J
RS1/16S473J

A

R 434 (A,51,103)
R 441 (B,44,131)
R 442 (B,51,131)
R 443 (B,44,127)
R 444 (B,51,127)

RS1/16S0R0J
RS1/16S223J
RS1/16S223J
RS1/16S103J
RS1/16S103J

R 665 (A,156,61)
R 671 (B,13,140)
R 672 (B,15,140)
R 681 (B,149,50)
R 701 (B,96,43)

RS1/16S183J
RS1/16S102J
RS1/16S102J
RS1/16S102J
RS1/16S682J

R 445 (B,42,131)
R 446 (B,53,131)
R 447 (A,40,121)
R 448 (A,40,119)
R 449 (A,39,123)

RS1/16S103J
RS1/16S103J
RS1/16S103J
RS1/16S103J
RS1/16S103J

R 702 (B,96,47)
R 703 (A,98,47)
R 704 (A,98,50)
R 705 (B,96,51)
R 706 (B,108,49)

RS1/16S682J
RS1/16S682J
RS1/16S682J
RS1/16S221J
RS1/16S221J

B

R 450 (A,52,122)
R 451 (A,45,116)
R 452 (A,47,117)
R 501 (B,95,24)
R 502 (B,95,26)

RS1/16S103J
RS1/16S104J
RS1/16S104J
RS1/16S681J
RS1/16S681J

R 707 (B,96,49)
R 708 (B,108,47)
R 709 (B,96,45)
R 710 (B,108,45)
R 711 (B,106,40)

RS1/16S221J
RS1/16S221J
RS1/16S221J
RS1/16S681J
RS1/16S473J

R 503 (B,89,31)
R 511 (B,65,49)
R 512 (B,82,40)
R 513 (B,65,51)
R 514 (B,61,51)

RAB4C681J
RS1/16S182J
RAB4C681J
RS1/16S332J
RS1/16S332J

R 712 (A,116,69)
R 721 (B,24,65)
R 751 (B,135,39)
R 752 (B,129,51)
R 753 (B,135,41)

RS1/16S104J
RS1/4SA391J
RS1/16S393J
RS1/16S104J
RS1/16S472J

C

R 515 (B,89,40)
R 516 (B,65,53)
R 521 (B,82,31)
R 522 (B,88,25)
R 523 (B,88,23)

RAB4C681J
RS1/16S182J
RAB4C101J
RS1/16S101J
RS1/16S101J

R 754 (B,135,37)
R 755 (B,133,48)
R 757 (B,121,31)
R 758 (B,119,35)
R 759 (B,120,38)

RS1/16S471J
RS1/16S273J
RS1/16S104J
RS1/16S222J
RS1/16S471J

R 531 (B,51,42)
R 532 (B,49,43)
R 552 (B,45,69)
R 554 (B,43,69)
R 555 (B,41,51)

RS1/16S223J
RS1/16S102J
RS1/16S0R0J
RS1/16S102J
RS1/16S220J

R 760 (B,120,28)
R 761 (B,115,39)
R 762 (B,112,40)
R 763 (B,118,52)
R 764 (B,129,53)

RS1/16S471J
RS1/16S473J
RS1/16S473J
RS1/16S103J
RS1/16S103J

D

R 556 (B,53,49)
R 557 (B,48,54)
R 601 (B,131,87)
R 603 (B,131,85)
R 604 (A,135,52)

RS1/16S102J
RS1/16S0R0J
RS1/16S104J
RS1/16S104J
RS1/16S103J

R 765 (B,112,46)
R 766 (B,112,44)
R 767 (B,120,52)
R 768 (B,118,47)
R 769 (B,124,51)

RS1/16S473J
RS1/16S473J
RS1/16S472J
RS1/16S103J
RS1/16S682J

R 605 (B,131,83)
R 606 (A,139,81)
R 607 (B,132,73)
R 608 (A,126,82)
R 609 (A,119,71)

RS1/16S104J
RS1/16S102J
RS1/16S104J
RS1/16S104J
RS1/16S102J

R 770 (B,136,34)
R 771 (B,136,30)
R 773 (B,117,50)
R 774 (B,128,30)
R 775 (B,130,38)

RS1/16S333J
RS1/16S332J
RS1/16S0R0J
RS1/16S473J
RS1/16S473J

E

R 611 (B,141,83)
R 613 (B,140,85)
R 615 (B,135,65)
R 616 (B,135,69)
R 617 (A,142,53)

RS1/16S472J
RS1/16S472J
RS1/16S104J
RS1/16S104J
RAB4C104J

R 776 (B,139,27)
R 777 (B,140,30)
R 791 (B,107,69)
R 792 (A,54,105)
R 793 (A,39,94)

RS1/16S473J
RS1/16S473J
RS1/16S122J
RS1/16S821J
RS1/16S152J

R 619 (B,146,66)
R 621 (A,119,60)
R 625 (A,119,69)
R 627 (A,134,82)
R 628 (A,131,81)

RS1/16S0R0J
RAB4C104J
RS1/16S104J
RAB4C681J
RS1/16S681J

R 801 (A,152,42)
R 802 (A,142,42)
R 803 (B,149,38)
R 804 (B,143,41)
R 806 (B,152,42)

RS1/16S102J
RS1/16S102J
RS1/16S103J
RS1/16S563J
RS1/16S102J

F

R 629 (B,127,78)
R 631 (A,116,64)
R 632 (A,131,52)
R 633 (B,136,57)
R 636 (A,120,57)

RS1/16S681J
RS1/16S104J
RS1/16S104J
RS1/16S104J
RS1/16S0R0J

R 807 (A,151,18)
R 808 (B,152,38)
R 811 (B,110,26)
R 812 (B,112,18)
R 813 (B,110,28)

RS1/4SA102J
RS1/16S102J
RS1/16S222J
RS1/16S222J
RS1/16S222J

R 640 (A,120,55)
R 652 (A,149,76)

RS1/16S0R0J
RS1/16S104J

R 814 (B,115,17)
R 815 (A,116,27)

RS1/16S222J
RS1/16S222J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 816	(B,117,17)	RS1/16S222J		C 151	(B,129,113)	CKSRYB105K10	
R 817	(B,120,17)	RS1/16S222J		C 201	(B,54,81)	CKSRYB104K16	
R 818	(A,118,27)	RS1/16S222J		C 202	(B,56,82)	CKSRYB682K50	A
R 819	(A,120,27)	RS1/16S104J		C 203	(B,56,76)	CKSRYB104K16	
R 820	(B,107,21)	RS1/16S223J		C 204	(B,54,74)	CKSRYB104K16	
R 821	(B,109,12)	RS1/16S473J		C 205	(A,51,83)	CEJQ100M16	
R 831	(B,70,15)	RS1/16S472J		C 206	(A,51,77)	CEJQ100M16	
R 832	(B,72,27)	RS1/16S821J		C 207	(A,51,72)	CEJQ100M16	
R 833	(B,80,23)	RS1/16S222J		C 208	(B,58,84)	CKSRYB104K16	
R 841	(A,39,24)	RS1/16S1R0J		C 209	(B,57,87)	CCSRCH8R0D50	
R 842	(A,37,33)	RS1/4SA271J		C 210	(B,62,76)	CKSRYB104K16	
R 851	(B,63,27)	RS1/16S1R0J		C 211	(B,62,87)	CCSRCH8R0D50	
R 852	(B,59,20)	RS1/4SA391J		C 212	(B,63,79)	CKSRYB104K16	
R 853	(A,134,34)	RS1/16S562J		C 213	(B,64,75)	CKSRYB104K16	B
R 854	(A,132,37)	RS1/16S103J		C 214	(B,63,82)	CCSRCH680J50	
R 855	(A,89,16)	RS1/16S151J		C 215	(B,65,79)	CKSRYB104K16	
R 901	(B,22,56)	RS1/16S223J		C 216	(B,68,67)	CCSRCH680J50	
R 902	(A,36,50)	RS1/16S272J		C 217	(B,50,88)	CKSYB106K6R3	
R 911	(A,22,116)	RS1/16S821J		C 220	(B,65,94)	CKSRYB103K50	
R 921	(B,16,85)	RS1/16S821J		C 221	(B,81,86)	CCSRCH101J50	
R 931	(A,69,116)	RS1/16S104J		C 224	(A,81,77)	CEVW100M10	
R 932	(A,75,118)	RS1/16S103J		C 225	(A,83,83)	CKSRYB104K16	
R 933	(B,70,121)	RS1/16S473J		C 226	(A,87,77)	CSZS100M16	
R 934	(B,68,121)	RS1/16S473J		C 227	(A,84,83)	CKSRYB104K16	
R 935	(B,72,121)	RS1/16S472J		C 228	(A,93,87)	CEVW100M10	C
R 941	(A,82,118)	RS1/16S103J		C 229	(A,93,81)	CEVW100M10	
R 951	(A,91,119)	RS1/16S102J		C 230	(A,93,76)	CEVW100M10	
R 952	(A,89,121)	RS1/16S472J		C 231	(A,93,70)	CEVW100M10	
R 953	(A,92,124)	RS1/16S472J		C 232	(A,93,98)	CEVW100M10	
R 954	(A,90,124)	RS1/16S153J		C 233	(A,93,92)	CEVW100M10	
R 971	(A,52,119)	RS1/16S391J		C 240	(B,82,96)	CCSRCH220J50	
R 972	(B,65,120)	RS1/16S1R0J		C 241	(B,69,96)	CCSRCH220J50	
R 981	(B,79,112)	RS1/16S102J		C 242	(B,86,95)	CKSRYB104K16	
R 982	(B,82,111)	RS1/16S153J		C 243	(B,66,71)	CKSRYB332K50	
R 983	(B,75,118)	RS1/16S102J		C 244	(A,73,79)	CKSYB106K6R3	
CAPACITORS				C 245	(A,73,74)	CKSYB106K6R3	D
C 101	(B,34,134)	CKSRYB104K16		C 246	(B,58,70)	CKSRYB332K50	
C 102	(B,35,144)	CKSRYB102K50		C 247	(B,70,86)	CKSYB106K6R3	
C 103	(B,39,144)	CKSRYB102K50		C 250	(A,73,69)	CKSYB106K6R3	
C 121	(A,114,106)	CKSQYB225K10		C 251	(A,74,63)	CKSYB106K6R3	
C 122	(A,114,104)	CKSQYB225K10		C 252	(B,78,48)	CKSRYB104K16	
C 123	(A,114,108)	CKSQYB225K10		C 261	(A,56,68)	CKSRYB104K16	
C 124	(A,114,102)	CKSQYB225K10		C 262	(A,98,66)	CKSRYB104K16	
C 125	(A,120,106)	CKSRYB105K10		C 272	(A,81,69)	CCSRCH560J50	
C 126	(A,120,104)	CKSRYB105K10		C 273	(A,85,70)	CKSRYB103K50	
C 127	(A,120,102)	CKSRYB104K16		C 281	(A,98,91)	CCSRCH681J50	
C 128	(A,120,101)	CKSRYB104K16		C 282	(A,98,99)	CCSRCH681J50	E
C 129	(A,120,94)	CEJQ4R7M35		C 283	(A,101,94)	CCSRCH331J50	
C 130	(A,126,94)	CEJQ4R7M35		C 284	(A,101,96)	CCSRCH331J50	
C 131	(A,117,98)	CKSQYB225K10		C 285	(B,96,89)	CKSRYB105K10	
C 132	(A,114,113)	CKSYB475K10		C 286	(B,104,98)	CKSRYB105K10	
C 133	(A,114,111)	CKSYB475K10		C 287	(B,95,100)	CKSRYB104K16	
C 134	(A,127,113)	CKSRYB105K10		C 291	(A,98,70)	CCSRCH681J50	
C 135	(A,130,113)	CKSRYB105K10		C 292	(A,98,77)	CCSRCH681J50	
C 136	(A,122,117)	CEJQ470M10		C 293	(A,101,73)	CCSRCH331J50	
C 137	(A,129,117)	CEJQ470M10		C 294	(A,101,74)	CCSRCH331J50	
C 138	(A,107,90)	CKSRYB104K16		C 295	(B,96,68)	CKSRYB105K10	
C 139	(B,119,111)	CKSRYB105K10		C 296	(B,104,74)	CKSRYB105K10	F
				C 297	(B,89,76)	CKSRYB104K16	
				C 301	(A,98,80)	CCSRCH681J50	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 302 (A,98,88) CCSRCH681J50
 C 303 (A,101,83) CCSRCH331J50
 C 304 (A,101,85) CCSRCH331J50

C 563 (B,63,33)
 C 566 (B,45,37)
 C 567 (B,55,40)

CKSYB475K10
 CKSRYB104K16
 CKSRYB103K50

A

C 305 (B,96,79) CKSRYB105K10
 C 306 (B,104,86) CKSRYB105K10
 C 307 (B,89,87) CKSRYB104K16
 C 321 (A,153,122) CEJQNP100M10
 C 322 (A,147,122) CEJQNP100M10

C 568 (B,55,38)
 C 601 (A,128,83)
 C 602 (A,140,84)
 C 603 (A,124,83)
 C 605 (B,137,89)

CKSRYB105K6R3
 CKSRYB104K16
 CKSRYB104K16
 CKSRYB104K16
 CKSRYB103K50

C 323 (A,140,122) CEJQNP100M10
 C 324 (A,134,122) CEJQNP100M10
 C 325 (A,130,127) CEJQNP100M10
 C 326 (A,131,133) CEJQNP100M10
 C 327 (A,154,134) CKSRYB102K50

C 606 (A,134,90)
 C 607 (B,151,68)
 C 608 (B,151,64)
 C 610 (A,118,65)
 C 611 (A,138,53)

CEJQ4R7M35
 CCSRCH7R0D50
 CCSRCH7R0D50
 CKSRYB104K16
 CKSRYB104K16

B

C 328 (A,149,115) CEJQ220M16
 C 351 (B,129,123) CKSQYB474K16
 C 352 (B,124,124) CKSQYB474K16
 C 353 (B,126,123) CKSQYB474K16
 C 354 (B,122,124) CKSQYB474K16

C 612 (A,134,54)
 C 613 (B,134,78)
 C 662 (B,155,51)
 C 663 (A,156,59)
 C 721 (B,30,74)

CKSRYB104K16
 CCSRCH331J50
 CKSRYB104K16
 CKSRYB105K10
 CKSRYB473K25

C 355 (A,117,122) CEJQ330M10
 C 357 (A,86,125) 3 300 μ F/16 V CCH1486
 C 358 (B,95,140) CKSRYB104K25
 C 359 (A,124,130) CEHAR100M16
 C 360 (A,124,135) CKSQYB225K10

C 722 (B,29,67)
 C 723 (A,29,65)
 C 743 (A,96,54)
 C 751 (A,138,41)
 C 752 (A,138,46)

CKSRYB102K50
 CEJQ101M10
 CEJQ101M10
 CEJQ4R7M35
 CEJQ1R0M50

C

C 361 (A,126,135) CKSQYB225K10
 C 363 (B,122,140) CKSRYB474K10
 C 364 (B,121,135) CKSRYB474K10
 C 365 (B,122,138) CKSRYB474K10
 C 366 (B,121,133) CKSRYB474K10

C 753 (A,138,35)
 C 754 (B,112,38)
 C 755 (B,119,31)
 C 756 (B,121,35)
 C 758 (B,134,30)

CEJQ4R7M35
 CKSRYB104K16
 CKSRYB102K50
 CCSRCH101J50
 CKSRYB105K10

C 371 (B,94,112) CKSRYB104K16
 C 372 (B,99,112) CKSRYB104K16
 C 373 (B,99,108) CKSRYB104K16
 C 374 (A,110,116) CEAL100M16
 C 378 (B,98,114) CKSRYB105K10

C 759 (B,124,53)
 C 760 (B,122,39)
 C 761 (B,128,28)
 C 762 (B,118,45)
 C 763 (B,119,49)

CKSRYB104K16
 CKSRYB104K16
 CKSRYB104K16
 CKSRYB472K50
 CKSRYB102K50

D

C 401 (B,173,109) CKSRYB103K50
 C 402 (B,156,111) CKSRYB102K50
 C 403 (A,160,111) CEJQ470M10
 C 404 (B,167,110) CKSYB475K10
 C 405 (B,174,142) CKSRYB103K50

C 764 (B,112,48)
 C 765 (B,134,34)
 C 768 (B,138,30)
 C 769 (B,75,112)
 C 791 (B,115,71)

CKSRYB104K16
 CKSRYB471K50
 CKSRYB104K16
 CKSRYB153K50
 CKSRYB103K50

C 406 (A,160,118) CEJQ101M10
 C 408 (B,160,114) CKSRYB102K50
 C 421 (A,161,96) CEJQ220M16
 C 422 (B,157,93) CKSRYB103K50
 C 423 (B,156,83) CKSYB475K10

C 792 (A,66,107)
 C 793 (B,75,109)
 C 794 (A,79,106)
 C 795 (A,71,111)
 C 796 (A,44,90)

CEJQ470M10
 CKSRYB103K50
 CCH1325
 CEJQ101M10
 CKSRYB103K50

E

C 424 (B,135,97) CKSRYB103K50
 C 432 (A,33,117) CKSQYB105K16
 C 433 (A,36,118) CKSQYB105K16
 C 441 (B,42,127) CKSQYB225K10
 C 442 (B,53,127) CKSQYB225K10

C 801 (B,143,43)
 C 802 (B,153,32)
 C 803 (A,142,37)
 C 804 (A,152,37)
 C 806 (B,156,27)

CKSRYB103K50
 CKSRYB102K50
 CCSRCH101J50
 CCSRCH101J50
 CKSRYB102K50

C 443 (B,43,123) CKSQYB225K10
 C 444 (B,50,123) CKSQYB225K10
 C 445 (A,41,123) CCSRCH101J50
 C 446 (A,51,122) CCSRCH101J50
 C 447 (A,45,118) CKSRYB105K10

C 807 (A,157,20)
 C 808 (A,154,24)
 C 831 (B,80,21)
 C 832 (A,76,11)
 C 841 (A,57,12)

CKSRYB104K16
 CEVW220M16
 CKSRYB104K16
 CEVW470M10
 CEVW470M16

F

C 448 (A,40,115) CEVW100M10
 C 501 (B,99,22) CKSRYB104K16
 C 511 (B,94,37) CKSRYB104K16
 C 521 (B,84,18) CKSRYB104K16
 C 554 (A,46,63) CEJQ330M10

C 842 (B,37,37)
 C 843 (B,36,31)
 C 844 (A,36,29)
 C 851 (B,65,15)
 C 852 (A,92,14)

CKSRYB104K16
 CKSRYB102K50
 CEJQ330M16
 CKSRYB473K25
 CKSRYB104K16

C 561 (A,51,66) CEJQ220M16
 C 562 (B,63,43) CKSRYB103K50

C 861 (A,61,97)
 C 862 (A,61,99)

CKSRYB105K6R3
 CKSRYB103K50

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
C 863	(A,68,98)		CKSRYB104K16			IC 601	(A,133,67) IC		PEG261A		
C 871	(A,43,75)		CKSRYB104K16			IC 661	(A,155,66) IC		S-80835CNUA-B8U		
C 873	(A,41,79)		CEVW101M6R3								
C 875	(A,38,85)		CKSRYB105K10			IC 751	(B,112,34) IC		NJM4558MD		A
C 877	(A,49,99)		CEVW101M6R3			IC 752	(B,126,47) IC		NJM4151M		
C 878	(A,55,100)		CKSRYB103K50			IC 753	(B,127,34) IC		NJM4558MD		
C 879	(B,49,98)		CKSYB475K10			IC 754	(B,113,51) IC		TC7S14FU		
C 901	(A,27,47) 2 200 μ F/16 V		CCH1405			IC 801	(A,147,40) IC		BA6288FS		
C 903	(B,28,62)		CKSRYB472K50			IC 861	(A,65,98) IC		NJM2872F05		
C 904	(B,28,52)		CKSRYB103K50			IC 871	(B,57,99) IC		NJM2885DL1-33		
C 905	(A,28,54)		CEJQ470M10			Q 101	(A,22,121) Transistor		UMF23N		
C 911	(A,32,109)		CEJQ221M10			Q 121	(A,111,89) Transistor		UMD3N		
C 912	(B,13,117)		CKSRYB103K50			Q 181	(A,105,120) Transistor		2SC3052-12		
C 913	(A,13,120)		CEJQ101M10			Q 182	(A,108,130) Transistor		UMD3N		
C 921	(A,31,99) 470 μ F/16 V		CCH1325			Q 183	(B,115,93) Transistor		2SC4081		B
C 922	(B,30,81)		CKSRYB103K50			Q 281	(A,104,95) Transistor		UMH3N		
C 923	(A,30,77)		CEJQ101M10			Q 282	(A,106,66) Transistor		UMD3N		
C 932	(B,74,121)		CKSRYB104K16			Q 291	(A,104,73) Transistor		UMH3N		
C 941	(A,83,114)		CKSQYB105K16			Q 301	(A,104,84) Transistor		UMH3N		
C 963	(A,77,135)		CKSQYB105K10			Q 321	(A,154,131) Transistor		IMH23		
C 964	(B,74,132)		CKSQYB105K16			Q 322	(A,148,127) Transistor		IMH23		
C 965	(B,72,132)		CKSQYB105K16			Q 323	(A,139,127) Transistor		IMH23		
C 966	(B,73,145)		CKSQYB105K16			Q 324	(A,144,114) Transistor		UMD3N		
C 967	(A,74,135)		CKSQYB105K16			Q 351	(A,125,124) Transistor		DTC124EUA		
C 968	(A,72,135)		CKSQYB105K16			Q 391	(A,39,58) Transistor		2SC4081		
C 969	(A,69,135)		CKSQYB105K16			Q 431	(A,46,114) Transistor		UMD3N		C
C 971	(B,63,112)		CKSRYB103K50			Q 531	(B,55,43) Transistor		DTC314TU		
C 972	(B,62,116)		CKSRYB103K50			Q 601	(B,115,64) Transistor		UMD3N		
C 973	(A,64,116)		CEJQ100M16			Q 661	(B,155,56) Transistor		2SC4081		
C 981	(B,82,113)		CKSRYB104K16			Q 721	(A,18,74) Transistor		2SD2396		
						Q 722	(A,36,72) Transistor		UMD3N		
						Q 791	(B,57,107) Transistor		2SD1760F5		
						Q 792	(A,57,103) Transistor		UMD3N		
						Q 793	(B,111,69) Transistor		2SC4081		
						Q 794	(A,39,96) Transistor		2SC4081		
						Q 795	(A,39,90) Transistor		UMD3N		
						Q 801	(B,151,22) Transistor		2SD1760F5		D
						Q 812	(A,153,18) Transistor		UMD3N		
						Q 831	(A,68,17) Transistor		2SB710A		
						Q 832	(B,76,27) Transistor		DTC114EU		
						Q 841	(A,34,19) Transistor		2SD1760F5		
						Q 842	(A,38,36) Transistor		UMD3N		
						Q 851	(B,63,24) Transistor		2SD1767		
						Q 852	(A,66,9) Transistor		UMD3N		
						Q 853	(A,132,34) Transistor		2SC4081		
						Q 901	(A,18,57) Transistor		2SD2396		
						Q 902	(A,34,50) Transistor		UMD3N		
						Q 911	(A,18,103) Transistor		2SD2396		E
						Q 912	(A,22,118) Transistor		UMD3N		
						Q 921	(A,18,87) Transistor		2SD2396		
						Q 922	(B,23,80) Transistor		UMD3N		
						Q 931	(A,75,116) Transistor		UMX1N		
						Q 941	(A,83,116) Transistor		DTC114EU		
						Q 951	(A,92,121) Transistor		2SA1576		
						Q 971	(A,51,115) Transistor		UMD3N		
						Q 972	(A,57,117) Transistor		2SD1859		
						D 121	(B,128,115) Diode		RB520S-30		
						D 132	(B,124,112) Diode		1SS355		F
						D 133	(B,124,108) Diode		RB521S-30		
						D 134	(B,124,110) Diode		RB521S-30		
						D 181	(A,107,127) Diode		HZU3R9(B1)		

A
Unit Number : CWN1438(DEH-P9850BT/XN/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC 101	(B,31,140) IC	HA12241FP
IC 121	(A,129,104) IC	PM9009A
IC 122	(A,111,94) IC	TC4066BFT
IC 201	(A,61,77) IC	AK7732VT
IC 221	(A,76,86) IC	PCM1606EG
IC 240	(B,75,96) IC	NJM4558MD
IC 241	(B,78,53) IC	NJM4558MD
IC 261	(A,58,64) IC	TC74VHCT08AFTS1
IC 262	(A,96,62) IC	TC74VHC08FTS1
IC 271	(A,81,71) IC	TC7SH08FUS1
IC 281	(B,96,96) IC	NJM4558MD
IC 282	(B,96,74) IC	NJM4558MD
IC 283	(B,95,85) IC	NJM4558MD
IC 351	(A,102,139) IC	PAL007B
IC 371	(A,99,110) IC	PM8003A
IC 421	(B,160,88) IC	NJM2885DL1-33
IC 431	(A,48,108) IC	TC4066BFT
IC 441	(A,46,122) IC	NJM4558MD
IC 501	(A,95,28) IC	TC74VHCT08AFTS1
IC 511	(A,95,39) IC	TC74VHC08FTS1
IC 521	(A,99,20) IC	S99-50084
IC 561	(B,65,38) IC	NJM2885DL1-33
IC 566	(B,50,39) IC	NJM2872F05

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

D 281 (A,107,73) Diode
D 321 (A,138,117) Diode

DAN202U
1SS133

L 271 (A,83,70) Inductor
L 272 (A,84,72) Inductor

CTF1389
CTF1379

A D 351 (A,117,130) Diode
D 352 (A,117,127) Diode
D 391 (A,44,69) Diode
D 392 (A,43,72) Diode
D 421 (A,161,84) Diode

MPG06G-6415G50
MPG06G-6415G50
DAN202U
HZU9L(A2)
1SR154-400

L 371 (B,97,110) Inductor
L 401 (A,160,105) Inductor
L 402 (A,154,106) Ferri-Inductor
L 403 (A,154,114) Inductor
L 404 (B,167,149) Chip Coil

CTF1379
LAU1R0K
LAU100K
LAU1R0K
LCTAW4R7J2520

D 422 (A,161,88) Diode
D 423 (A,161,91) Diode
D 431 (A,32,125) Diode
D 441 (B,39,118) Diode
D 442 (B,50,121) Diode

1SR154-400
1SR154-400
RSB6R8S
RSB6R8S
RSB6R8S

L 501 (B,95,22) Inductor
L 511 (B,94,35) Inductor
L 521 (B,84,23) Inductor
L 554 (B,60,45) Inductor
L 604 (A,139,90) Ferri-Inductor

CTF1379
CTF1379
CTF1379
CTF1389
LAU100K

B D 531 (B,53,46) Diode
D 551 (B,54,59) Diode
D 601 (B,121,61) Diode
D 721 (A,30,72) Diode
D 751 (B,135,51) Diode Network

1SS355
DAN202U
DAN202U
HZS9L(A2)
DA204U

L 701 (A,101,27) Inductor
L 831 (A,76,17) Ferri-Inductor
L 841 (A,57,18) Inductor
L 872 (A,41,85) Inductor
L 951 (A,86,115) Inductor

LCTAW2R2J3225
LAU100K
LAU2R2K
CTF1617
LAU2R2K

D 752 (B,126,39) Diode Network
D 791 (B,110,73) Diode
D 792 (B,80,109) Diode
D 793 (B,40,107) Diode
D 794 (A,42,90) Diode

DA204U
HZU6L(B1)
HZU7L(A1)
1SR154-400
HZU9L(B2)

X 201 (A,59,91)Crystal Resonator 16.934 4 MHz CSS1052
X 371 (A,87,107)Ceramic Resonator 4.096 MHz CSS1429
X 601 (A,149,67)Crystal Resonator 20 MHz VSS1167
VR121 (A,120,112)Semi-fixed 15 kΩ(B) CCP1397
△FU321 (A,136,130) Fuse 3 A CEK1286

C D 801 (A,148,30) Diode
D 802 (A,148,34) Diode
D 803 (A,149,23) Diode
D 811 (B,115,13) Diode
D 812 (B,124,13) Diode

1SS133
1SS133
HZU7L(B2)
DAN202U
DAP202U

BZ681 (A,152,50) Buzzer
M 972 Fan Motor
FM/AM Tuner Unit

CPV1062
CXM1288
CWE1952

RESISTORS

D 813 (A,111,27) Diode
D 814 (A,107,27) Diode
D 815 (B,106,15) Diode
D 816 (B,106,19) Diode
D 817 (B,106,28) Diode

DAN202U
DAP202U
DAN202U
DAP202U
DAN202U

R 101 (B,26,130)
R 102 (B,36,124)
R 103 (B,27,124)
R 104 (B,33,122)
R 105 (B,29,124)

RS1/16S181J
RS1/16S181J
RS1/16S223J
RS1/16S223J
RS1/16S102J

D 818 (B,106,24) Diode
D 841 (A,36,39) Diode
D 851 (A,66,13) Diode
D 853 (A,92,13) LED
D 901 (A,35,59) Diode

DAP202U
HZS9L(C2)
HZS11L(A1)
SML412BC5T(MN)
MPG06G-6415G50

R 106 (B,31,122)
R 107 (B,39,142)
R 108 (B,39,137)
R 109 (B,39,140)
R 110 (B,39,138)

RS1/16S102J
RS1/16S101J
RS1/16S101J
RS1/16S150J
RS1/16S470J

D 902 (A,29,59) Diode
D 911 (A,13,115) Diode
D 921 (A,30,83) Diode
D 931 (A,73,117) Diode
D 932 (A,69,118) Diode

HZS6L(B1)
HZS9L(B2)
HZS9L(B2)
HZU7L(A1)
HZU7L(C3)

R 111 (B,39,135)
R 112 (A,26,124)
R 113 (A,23,124)
R 114 (A,20,124)
R 122 (A,139,107)

RS1/16S102J
RS1/16S222J
RS1/16S332J
RS1/16S562J
RS1/16S0R0J

D 941 (A,79,115) Diode
D 951 (A,92,127) Diode
D 971 (A,57,114) Diode
D 981 (B,87,109) Diode Network
D 982 (B,82,117) Diode

1SR154-400
DAN202U
HZS11L(B2)
DA204U
HZU7L(C2)

R 123 (A,138,103)
R 124 (A,138,114)
R 125 (A,138,113)
R 126 (A,138,109)
R 127 (A,138,107)

RS1/16S0R0J
RS1/16S0R0J
RS1/16S0R0J
RS1/16S0R0J
RS1/16S0R0J

D 991 (A,98,126) Diode
D 992 (A,98,121) Diode
D 993 (A,61,103) Diode
ZNR401 (A,161,145)Surge Protector
L 101 (B,24,134) Inductor

MPG06G-6415G50
MPG06G-6415G50
DAN202U
RCCA-201Q31UA-PI
LCTAW2R2J2520

R 128 (A,139,103)
R 129 (A,141,101)
R 130 (A,141,99)
R 131 (A,141,98)
R 132 (A,107,89)

RS1/16S0R0J
RS1/16S0R0J
RS1/16S0R0J
RS1/16S0R0J
RS1/16S103J

L 121 (A,117,117) Inductor
L 201 (A,55,85) Inductor
L 206 (B,66,83) Inductor
L 208 (A,63,68) Inductor
L 221 (A,84,85) Inductor

ATH1176
CTF1379
CTF1389
CTF1389
CTF1379

R 133 (A,114,89)
R 134 (A,133,113)
R 135 (A,124,113)
R 181 (A,102,130)
R 182 (B,110,125)

RS1/16S103J
RAB4C102J
RS1/16S103J
RS1/16S104J
RS1/16S683J

L 241 (B,84,52) Inductor
L 261 (A,56,70) Inductor
L 262 (A,95,66) Inductor

CTF1389
CTF1379
CTF1379

R 183 (A,98,130)
R 184 (B,116,125)

RS1/16S153J
RS1/16S682J

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
R 185	(A,104,124)		RS1/16S152J			R 298	(B,103,71)		RS1/16S102J		
R 186	(A,104,130)		RS1/16S222J			R 299	(B,102,74)		RS1/16S101J		
R 187	(A,105,130)		RS1/16S561J			R 300	(B,89,70)		RS1/16S101J		A
R 188	(A,110,130)		RS1/16S473J			R 301	(A,98,83)		RS1/16S473J		
R 189	(B,107,97)		RS1/16S103J			R 302	(A,98,85)		RS1/16S473J		
R 190	(B,111,97)		RS1/16S223J			R 303	(A,98,82)		RS1/16S682J		
R 191	(B,115,97)		RS1/16S104J			R 304	(A,98,86)		RS1/16S682J		
R 201	(B,54,88)		RS1/16S104J			R 305	(A,101,82)		RS1/16S682J		
R 202	(B,52,88)		RS1/16S104J			R 306	(A,101,86)		RS1/16S682J		
R 203	(B,57,79)		RS1/16S153J			R 307	(B,100,79)		RS1/16S102J		
R 204	(B,63,84)		RS1/16S222J			R 308	(B,103,83)		RS1/16S102J		
R 205	(A,59,68)		RS1/16S681J			R 309	(B,102,86)		RS1/16S101J		
R 206	(A,62,87)		RS1/16S101J			R 310	(B,89,82)		RS1/16S101J		
R 207	(A,61,68)		RS1/16S681J			R 321	(B,151,128)		RS1/16S470J		B
R 208	(A,67,86)		RAB4C101J			R 322	(B,149,125)		RS1/16S470J		
R 212	(A,69,76)		RS1/16S101J			R 323	(A,157,131)		RS1/16S223J		
R 213	(A,68,71)		RS1/16S101J			R 324	(A,154,128)		RS1/16S223J		
R 214	(A,67,71)		RS1/16S101J			R 325	(B,145,126)		RS1/16S470J		
R 221	(B,78,89)		RS1/16S103J			R 326	(B,139,126)		RS1/16S470J		
R 222	(B,78,87)		RS1/16S103J			R 327	(A,151,127)		RS1/16S223J		
R 240	(B,83,99)		RS1/16S223J			R 328	(A,145,127)		RS1/16S223J		
R 241	(B,83,101)		RS1/16S223J			R 329	(B,136,128)		RS1/16S470J		
R 242	(B,84,96)		RS1/16S153J			R 330	(B,136,134)		RS1/16S470J		
R 243	(B,67,96)		RS1/16S153J			R 331	(A,142,127)		RS1/16S223J		
R 244	(B,72,91)		RS1/16S101J			R 332	(A,134,130)		RS1/16S223J		C
R 247	(B,75,70)		RS1/16S101J			R 333	(A,145,118)		RS1/16S102J		
R 248	(B,79,65)		RS1/16S473J			R 351	(B,99,147)		RS1/16S103J		
R 249	(B,77,65)		RS1/16S473J			R 352	(A,125,121)		RS1/16S103J		
R 261	(B,58,66)		RS1/16S681J			R 353	(A,125,126)		RS1/16S103J		
R 262	(B,58,62)		RS1/16S681J			R 354	(A,122,125)		RS1/16S331J		
R 263	(A,69,66)		RAB4C123J			R 371	(B,91,108)		RS1/16S0R0J		
R 264	(B,69,63)		RAB4C223J			R 372	(B,100,110)		RS1/16S473J		
R 265	(A,103,63)		RS1/16S681J			R 373	(B,130,78)		RS1/16S104J		
R 266	(A,91,62)		RS1/16S681J			R 391	(A,39,54)		RS1/16S103J		
R 267	(A,91,63)		RS1/16S681J			R 392	(A,40,65)		RS1/16S223J		
R 268	(A,103,66)		RS1/16S681J			R 393	(A,38,65)		RS1/16S103J		D
R 269	(A,102,66)		RS1/16S681J			R 394	(A,37,65)		RS1/16S473J		
R 270	(A,100,66)		RS1/16S681J			R 405	(B,167,114)		RS1/16S681J		
R 271	(A,77,72)		RS1/16S0R0J			R 406	(B,173,130)		RS1/16S681J		
R 273	(A,82,67)		RS1/16S0R0J			R 407	(B,173,132)		RS1/16S681J		
R 274	(A,87,72)		RS1/16S0R0J			R 408	(B,173,134)		RS1/16S681J		
R 275	(A,91,65)		RS1/16S681J			R 409	(B,173,136)		RS1/16S681J		
R 276	(A,93,66)		RS1/16S681J			R 410	(B,174,140)		RS1/16S681J		
R 281	(A,98,94)		RS1/16S473J			R 431	(A,48,103)		RS1/16S103J		
R 282	(A,98,96)		RS1/16S473J			R 432	(A,48,105)		RS1/16S103J		
R 283	(A,98,93)		RS1/16S682J			R 441	(B,44,131)		RS1/16S223J		E
R 284	(A,98,97)		RS1/16S682J			R 442	(B,51,131)		RS1/16S223J		
R 285	(A,101,93)		RS1/16S682J			R 443	(B,44,127)		RS1/16S103J		
R 286	(A,101,97)		RS1/16S682J			R 444	(B,51,127)		RS1/16S103J		
R 287	(B,100,89)		RS1/16S102J			R 445	(B,42,131)		RS1/16S103J		
R 288	(B,103,94)		RS1/16S102J			R 446	(B,53,131)		RS1/16S103J		
R 289	(B,102,97)		RS1/16S101J			R 447	(A,40,121)		RS1/16S103J		
R 290	(B,89,94)		RS1/16S101J			R 448	(A,40,119)		RS1/16S103J		
R 291	(A,98,73)		RS1/16S473J			R 449	(A,39,123)		RS1/16S103J		
R 292	(A,98,74)		RS1/16S473J			R 450	(A,52,122)		RS1/16S103J		
R 293	(A,98,71)		RS1/16S682J			R 451	(A,45,116)		RS1/16S104J		
R 294	(A,98,76)		RS1/16S682J			R 452	(A,47,117)		RS1/16S104J		F
R 295	(A,101,71)		RS1/16S682J			R 501	(B,95,24)		RS1/16S681J		
R 296	(A,101,76)		RS1/16S682J			R 502	(B,95,26)		RS1/16S681J		
R 297	(B,100,68)		RS1/16S102J			R 503	(B,89,31)		RAB4C681J		

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 511 (B,65,49)
R 512 (B,82,40)
R 513 (B,65,51)

RS1/16S182J
RAB4C681J
RS1/16S332J

R 754 (B,135,37)
R 755 (B,133,48)
R 757 (B,121,31)

RS1/16S471J
RS1/16S273J
RS1/16S104J

A

R 514 (B,61,51)
R 515 (B,89,40)
R 516 (B,65,53)
R 521 (B,82,31)
R 522 (B,88,25)

RS1/16S332J
RAB4C681J
RS1/16S182J
RAB4C101J
RS1/16S101J

R 758 (B,119,35)
R 759 (B,120,38)
R 760 (B,120,28)
R 761 (B,115,39)
R 762 (B,112,40)

RS1/16S222J
RS1/16S471J
RS1/16S471J
RS1/16S473J
RS1/16S473J

R 523 (B,88,23)
R 531 (B,51,42)
R 532 (B,49,43)
R 552 (B,45,69)
R 554 (B,43,69)

RS1/16S101J
RS1/16S223J
RS1/16S102J
RS1/16S0R0J
RS1/16S102J

R 763 (B,118,52)
R 764 (B,129,53)
R 765 (B,112,46)
R 766 (B,112,44)
R 767 (B,120,52)

RS1/16S103J
RS1/16S103J
RS1/16S473J
RS1/16S473J
RS1/16S472J

B

R 555 (B,41,51)
R 556 (B,53,49)
R 557 (B,48,54)
R 601 (B,131,87)
R 603 (B,131,85)

RS1/16S220J
RS1/16S102J
RS1/16S0R0J
RS1/16S104J
RS1/16S104J

R 768 (B,118,47)
R 769 (B,124,51)
R 770 (B,136,34)
R 771 (B,136,30)
R 773 (B,117,50)

RS1/16S103J
RS1/16S682J
RS1/16S333J
RS1/16S332J
RS1/16S0R0J

R 605 (B,131,83)
R 606 (A,139,81)
R 607 (B,132,73)
R 608 (A,126,82)
R 609 (A,119,71)

RS1/16S104J
RS1/16S102J
RS1/16S104J
RS1/16S104J
RS1/16S102J

R 774 (B,128,30)
R 775 (B,130,38)
R 776 (B,139,27)
R 777 (B,140,30)
R 791 (B,107,69)

RS1/16S473J
RS1/16S473J
RS1/16S473J
RS1/16S473J
RS1/16S122J

C

R 611 (B,141,83)
R 613 (B,140,85)
R 615 (B,135,65)
R 616 (B,135,69)
R 617 (A,142,53)

RS1/16S472J
RS1/16S472J
RS1/16S104J
RS1/16S104J
RAB4C104J

R 792 (A,54,105)
R 793 (A,39,94)
R 801 (A,152,42)
R 802 (A,142,42)
R 803 (B,149,38)

RS1/16S821J
RS1/16S152J
RS1/16S102J
RS1/16S102J
RS1/16S103J

R 619 (B,146,66)
R 621 (A,119,60)
R 625 (A,119,69)
R 627 (A,134,82)
R 628 (A,131,81)

RS1/16S0R0J
RAB4C104J
RS1/16S104J
RAB4C681J
RS1/16S681J

R 804 (B,143,41)
R 806 (B,152,42)
R 807 (A,151,18)
R 808 (B,152,38)
R 811 (B,110,26)

RS1/16S563J
RS1/16S102J
RS1/4SA102J
RS1/16S102J
RS1/16S222J

D

R 629 (B,127,78)
R 631 (A,116,64)
R 632 (A,131,52)
R 633 (B,136,57)
R 640 (A,120,55)

RS1/16S681J
RS1/16S104J
RS1/16S104J
RS1/16S104J
RS1/16S0R0J

R 812 (B,112,18)
R 813 (B,110,28)
R 814 (B,115,17)
R 815 (A,116,27)
R 816 (B,117,17)

RS1/16S222J
RS1/16S222J
RS1/16S222J
RS1/16S222J
RS1/16S222J

R 652 (A,149,76)
R 661 (B,155,49)
R 662 (A,153,59)
R 664 (B,155,53)
R 665 (A,156,61)

RS1/16S104J
RS1/16S222J
RS1/16S102J
RS1/16S473J
RS1/16S183J

R 817 (B,120,17)
R 818 (A,118,27)
R 819 (A,120,27)
R 820 (B,107,21)
R 821 (B,109,12)

RS1/16S222J
RS1/16S222J
RS1/16S104J
RS1/16S223J
RS1/16S473J

E

R 681 (B,149,50)
R 701 (B,96,43)
R 702 (B,96,47)
R 703 (A,98,47)
R 704 (A,98,50)

RS1/16S102J
RS1/16S682J
RS1/16S682J
RS1/16S682J
RS1/16S682J

R 831 (B,70,15)
R 832 (B,72,27)
R 833 (B,80,23)
R 841 (A,39,24)
R 842 (A,37,33)

RS1/16S472J
RS1/16S821J
RS1/16S222J
RS1/16S1R0J
RS1/4SA271J

R 705 (B,96,51)
R 706 (B,108,49)
R 707 (B,96,49)
R 708 (B,108,47)
R 709 (B,96,45)

RS1/16S221J
RS1/16S221J
RS1/16S221J
RS1/16S221J
RS1/16S221J

R 851 (B,63,27)
R 852 (B,59,20)
R 853 (A,134,34)
R 854 (A,132,37)
R 855 (A,89,16)

RS1/16S1R0J
RS1/4SA391J
RS1/16S562J
RS1/16S103J
RS1/16S151J

F

R 710 (B,108,45)
R 711 (B,106,40)
R 712 (A,116,69)
R 721 (B,24,65)
R 751 (B,135,39)

RS1/16S681J
RS1/16S473J
RS1/16S104J
RS1/4SA391J
RS1/16S393J

R 901 (B,22,56)
R 902 (A,36,50)
R 911 (A,22,116)
R 921 (B,16,85)
R 931 (A,69,116)

RS1/16S223J
RS1/16S272J
RS1/16S821J
RS1/16S821J
RS1/16S104J

R 752 (B,129,51)
R 753 (B,135,41)

RS1/16S104J
RS1/16S472J

R 932 (A,75,118)
R 933 (B,70,121)

RS1/16S103J
RS1/16S473J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 934	(B,68,121)	RS1/16S473J		C 224	(A,81,77)	CEVW100M10	
R 935	(B,72,121)	RS1/16S472J		C 225	(A,83,83)	CKSRYB104K16	
R 941	(A,82,118)	RS1/16S103J		C 226	(A,87,77)	CSZS100M16	
				C 227	(A,84,83)	CKSRYB104K16	A
R 951	(A,91,119)	RS1/16S102J		C 228	(A,93,87)	CEVW100M10	
R 952	(A,89,121)	RS1/16S472J					
R 953	(A,92,124)	RS1/16S472J		C 229	(A,93,81)	CEVW100M10	
R 954	(A,90,124)	RS1/16S153J		C 230	(A,93,76)	CEVW100M10	
R 971	(A,52,119)	RS1/16S391J		C 231	(A,93,70)	CEVW100M10	
				C 232	(A,93,98)	CEVW100M10	
R 972	(B,65,120)	RS1/16S1R0J		C 233	(A,93,92)	CEVW100M10	
R 981	(B,79,112)	RS1/16S102J					
R 982	(B,82,111)	RS1/16S153J		C 240	(B,82,96)	CCSRCH220J50	
R 983	(B,75,118)	RS1/16S102J		C 241	(B,69,96)	CCSRCH220J50	
				C 242	(B,86,95)	CKSRYB104K16	
				C 243	(B,66,71)	CKSRYB332K50	
				C 244	(A,73,79)	CKSYB106K6R3	B
CAPACITORS							
C 101	(B,34,134)	CKSRYB104K16		C 245	(A,73,74)	CKSYB106K6R3	
C 102	(B,35,144)	CKSRYB102K50		C 246	(B,58,70)	CKSRYB332K50	
C 103	(B,39,144)	CKSRYB102K50		C 247	(B,70,86)	CKSYB106K6R3	
C 121	(A,114,106)	CKSQYB225K10		C 250	(A,73,69)	CKSYB106K6R3	
C 122	(A,114,104)	CKSQYB225K10		C 251	(A,74,63)	CKSYB106K6R3	
C 123	(A,114,108)	CKSQYB225K10		C 252	(B,78,48)	CKSRYB104K16	
C 124	(A,114,102)	CKSQYB225K10		C 261	(A,56,68)	CKSRYB104K16	
C 125	(A,120,106)	CKSRYB105K10		C 262	(A,98,66)	CKSRYB104K16	
C 126	(A,120,104)	CKSRYB105K10		C 272	(A,81,69)	CCSRCH560J50	
C 127	(A,120,102)	CKSRYB104K16		C 273	(A,85,70)	CKSRYB103K50	
							C
C 128	(A,120,101)	CKSRYB104K16		C 281	(A,98,91)	CCSRCH681J50	
C 129	(A,120,94)	CEJQ4R7M35		C 282	(A,98,99)	CCSRCH681J50	
C 130	(A,126,94)	CEJQ4R7M35		C 283	(A,101,94)	CCSRCH331J50	
C 131	(A,117,98)	CKSQYB225K10		C 284	(A,101,96)	CCSRCH331J50	
C 132	(A,114,113)	CKSYB475K10		C 285	(B,96,89)	CKSRYB105K10	
C 133	(A,114,111)	CKSYB475K10		C 286	(B,104,98)	CKSRYB105K10	
C 134	(A,127,113)	CKSRYB105K10		C 287	(B,95,100)	CKSRYB104K16	
C 135	(A,130,113)	CKSRYB105K10		C 291	(A,98,70)	CCSRCH681J50	
C 136	(A,122,117)	CEJQ470M10		C 292	(A,98,77)	CCSRCH681J50	
C 137	(A,129,117)	CEJQ470M10		C 293	(A,101,73)	CCSRCH331J50	
C 138	(A,107,90)	CKSRYB104K16		C 294	(A,101,74)	CCSRCH331J50	D
C 139	(B,119,111)	CKSRYB105K10		C 295	(B,96,68)	CKSRYB105K10	
C 151	(B,129,113)	CKSRYB105K10		C 296	(B,104,74)	CKSRYB105K10	
C 181	(A,100,130)	CCSRCH681J50		C 297	(B,89,76)	CKSRYB104K16	
C 182	(A,105,124)	CKSQYB225K10		C 301	(A,98,80)	CCSRCH681J50	
C 183	(A,111,123)	CEJQ101M6R3		C 302	(A,98,88)	CCSRCH681J50	
C 201	(B,54,81)	CKSRYB104K16		C 303	(A,101,83)	CCSRCH331J50	
C 202	(B,56,82)	CKSRYB682K50		C 304	(A,101,85)	CCSRCH331J50	
C 203	(B,56,76)	CKSRYB104K16		C 305	(B,96,79)	CKSRYB105K10	
C 204	(B,54,74)	CKSRYB104K16		C 306	(B,104,86)	CKSRYB105K10	
C 205	(A,51,83)	CEJQ100M16		C 307	(B,89,87)	CKSRYB104K16	E
C 206	(A,51,77)	CEJQ100M16		C 321	(A,153,122)	CEJQNP100M10	
C 207	(A,51,72)	CEJQ100M16		C 322	(A,147,122)	CEJQNP100M10	
C 208	(B,58,84)	CKSRYB104K16		C 323	(A,140,122)	CEJQNP100M10	
C 209	(B,57,87)	CCSRCH8R0D50		C 324	(A,134,122)	CEJQNP100M10	
C 210	(B,62,76)	CKSRYB104K16		C 325	(A,130,127)	CEJQNP100M10	
C 211	(B,62,87)	CCSRCH8R0D50		C 326	(A,131,133)	CEJQNP100M10	
C 212	(B,63,79)	CKSRYB104K16		C 327	(A,154,134)	CKSRYB102K50	
C 213	(B,64,75)	CKSRYB104K16		C 328	(A,149,115)	CEJQ220M16	
C 214	(B,63,82)	CCSRCH680J50		C 351	(B,129,123)	CKSQYB474K16	
C 215	(B,65,79)	CKSRYB104K16		C 352	(B,124,124)	CKSQYB474K16	
C 216	(B,68,67)	CCSRCH680J50		C 353	(B,126,123)	CKSQYB474K16	
C 217	(B,50,88)	CKSYB106K6R3		C 354	(B,122,124)	CKSQYB474K16	F
C 220	(B,65,94)	CKSRYB103K50		C 355	(A,117,122)	CEJQ330M10	
C 221	(B,81,86)	CCSRCH101J50		C 357	(A,86,125)	CCH1486	
					3 300 µF/16 V		

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 358	(B,95,140)	CKSRYB104K25	C 722	(B,29,67)	CKSRYB102K50
	C 359	(A,124,130)	CEHAR100M16	C 723	(A,29,65)	CEJQ101M10
	C 360	(A,124,135)	CKSQYB225K10	C 743	(A,96,54)	CEJQ101M10
	C 361	(A,126,135)	CKSQYB225K10	C 751	(A,138,41)	CEJQ4R7M35
	C 363	(B,122,140)	CKSRYB474K10	C 752	(A,138,46)	CEJQ1R0M50
	C 364	(B,121,135)	CKSRYB474K10	C 753	(A,138,35)	CEJQ4R7M35
	C 365	(B,122,138)	CKSRYB474K10	C 754	(B,112,38)	CKSRYB104K16
	C 366	(B,121,133)	CKSRYB474K10	C 755	(B,119,31)	CKSRYB102K50
	C 371	(B,94,112)	CKSRYB104K16	C 756	(B,121,35)	CCSRCH101J50
	C 372	(B,99,112)	CKSRYB104K16	C 758	(B,134,30)	CKSRYB105K10
B	C 373	(B,99,108)	CKSRYB104K16	C 759	(B,124,53)	CKSRYB104K16
	C 374	(A,110,116)	CEAL100M16	C 760	(B,122,39)	CKSRYB104K16
	C 378	(B,98,114)	CKSRYB105K10	C 761	(B,128,28)	CKSRYB104K16
	C 401	(B,173,109)	CKSRYB103K50	C 762	(B,118,45)	CKSRYB472K50
	C 402	(B,156,111)	CKSRYB102K50	C 763	(B,119,49)	CKSRYB102K50
	C 403	(A,160,111)	CEJQ470M10	C 764	(B,112,48)	CKSRYB104K16
	C 404	(B,167,110)	CKSYB475K10	C 765	(B,134,34)	CKSRYB471K50
	C 405	(B,174,142)	CKSRYB103K50	C 768	(B,138,30)	CKSRYB104K16
	C 406	(A,160,118)	CEJQ101M10	C 769	(B,75,112)	CKSRYB153K50
	C 408	(B,160,114)	CKSRYB102K50	C 791	(B,115,71)	CKSRYB103K50
C	C 421	(A,161,96)	CEJQ220M16	C 792	(A,66,107)	CEJQ470M10
	C 422	(B,157,93)	CKSRYB103K50	C 793	(B,75,109)	CKSRYB103K50
	C 423	(B,156,83)	CKSYB475K10	C 794	(A,79,106)	CCH1325
	C 424	(B,135,97)	CKSRYB103K50	C 795	(A,71,111)	CEJQ101M10
	C 431	(A,48,112)	CKSRYB104K16	C 796	(A,44,90)	CKSRYB103K50
	C 432	(A,33,117)	CKSQYB105K16	C 801	(B,143,43)	CKSRYB103K50
	C 433	(A,36,118)	CKSQYB105K16	C 802	(B,153,32)	CKSRYB102K50
	C 441	(B,42,127)	CKSQYB225K10	C 803	(A,142,37)	CCSRCH101J50
	C 442	(B,53,127)	CKSQYB225K10	C 804	(A,152,37)	CCSRCH101J50
	C 443	(B,43,123)	CKSQYB225K10	C 806	(B,156,27)	CKSRYB102K50
D	C 444	(B,50,123)	CKSQYB225K10	C 807	(A,157,20)	CKSRYB104K16
	C 445	(A,41,123)	CCSRCH101J50	C 808	(A,154,24)	CEVW220M16
	C 446	(A,51,122)	CCSRCH101J50	C 831	(B,80,21)	CKSRYB104K16
	C 447	(A,45,118)	CKSRYB105K10	C 832	(A,76,11)	CEVW470M10
	C 448	(A,40,115)	CEVW100M10	C 841	(A,57,12)	CEVW470M16
	C 501	(B,99,22)	CKSRYB104K16	C 842	(B,37,37)	CKSRYB104K16
	C 511	(B,94,37)	CKSRYB104K16	C 843	(B,36,31)	CKSRYB102K50
	C 521	(B,84,18)	CKSRYB104K16	C 844	(A,36,29)	CEJQ330M16
	C 554	(A,46,63)	CEJQ330M10	C 851	(B,65,15)	CKSRYB473K25
	C 560	(B,46,54)	CKSRYB102K50	C 852	(A,92,14)	CKSRYB104K16
E	C 561	(A,51,66)	CEJQ220M16	C 861	(A,61,97)	CKSRYB105K6R3
	C 562	(B,63,43)	CKSRYB103K50	C 862	(A,61,99)	CKSRYB103K50
	C 563	(B,63,33)	CKSYB475K10	C 863	(A,68,98)	CKSRYB104K16
	C 566	(B,45,37)	CKSRYB104K16	C 871	(A,43,75)	CKSRYB104K16
	C 567	(B,55,40)	CKSRYB103K50	C 873	(A,41,79)	CEVW101M6R3
	C 568	(B,55,38)	CKSRYB105K6R3	C 875	(A,38,85)	CKSRYB105K10
	C 601	(A,128,83)	CKSRYB104K16	C 877	(A,49,99)	CEVW101M6R3
	C 602	(A,140,84)	CKSRYB104K16	C 878	(A,55,100)	CKSRYB103K50
	C 603	(A,124,83)	CKSRYB104K16	C 879	(B,49,98)	CKSYB475K10
	C 605	(B,137,89)	CKSRYB103K50	C 901	(A,27,47) 2 200 μ F/16 V	CCH1405
F	C 606	(A,134,90)	CEJQ4R7M35	C 903	(B,28,62)	CKSRYB472K50
	C 607	(B,151,68)	CCSRCH7R0D50	C 904	(B,28,52)	CKSRYB103K50
	C 608	(B,151,64)	CCSRCH7R0D50	C 905	(A,28,54)	CEJQ470M10
	C 610	(A,118,65)	CKSRYB104K16	C 911	(A,32,109)	CEJQ221M10
	C 611	(A,138,53)	CKSRYB104K16	C 912	(B,13,117)	CKSRYB103K50
	C 612	(A,134,54)	CKSRYB104K16	C 913	(A,13,120)	CEJQ101M10
	C 613	(B,134,78)	CCSRCH331J50	C 921	(A,31,99) 470 μ F/16 V	CCH1325
	C 662	(B,155,51)	CKSRYB104K16	C 922	(B,30,81)	CKSRYB103K50
	C 663	(A,156,59)	CKSRYB105K10	C 923	(A,30,77)	CEJQ101M10
	C 721	(B,30,74)	CKSRYB473K25	C 932	(B,74,121)	CKSRYB104K16

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 941	(A,83,114)	CKSQYB105K16
C 963	(A,77,135)	CKSQYB105K10
C 964	(B,74,132)	CKSQYB105K16
C 965	(B,72,132)	CKSQYB105K16
C 966	(B,73,145)	CKSQYB105K16
C 967	(A,74,135)	CKSQYB105K16
C 968	(A,72,135)	CKSQYB105K16
C 969	(A,69,135)	CKSQYB105K16
C 971	(B,63,112)	CKSRYB103K50
C 972	(B,62,116)	CKSRYB103K50
C 973	(A,64,116)	CEJQ100M16
C 981	(B,82,113)	CKSRYB104K16

B**Unit Number :****Unit Name : Keyboard Unit****MISCELLANEOUS**

IC 1702	(B,145,31) IC	NJM2870F18
IC 1703	(B,130,15) IC	S-818A33AUC-BGN
IC 1761	(A,96,34) IC	TC7WT125FU
IC 1762	(A,129,37) IC	TC7WH34FU
IC 1763	(B,97,26) IC	PEG182A
IC 1764	(A,121,31) IC	TC7WH32FU
IC 1801	(A,15,35)	GP1UX51RK
IC 1831	(A,157,27) IC(P980BT/XN/UC)	PD8162A
IC 1831	(A,157,27) IC	PD8161A
	(P9800BT/XN/UC,P9850BT/XN/ES)	
IC 1832	(A,140,21) IC	PD6544A
IC 1833	(A,97,19) IC	M5M5V216ATP-70HI
IC 1861	(A,123,19) IC	S1D13702F00A100
Q 1731	(B,10,38) Transistor	DTC114EU
D 1701	(A,122,37) Diode	DAP202U
D 1702	(A,119,37) Diode	DAN202U
D 1703	(A,114,37) Diode	DAP202U
D 1704	(A,112,37) Diode	DAN202U
D 1731	(A,8,33) LED	SML412BC5T(MN)
D 1732	(A,65,24) LED	SML412BC5T(MN)
D 1733	(A,50,38) LED	SML412BC5T(MN)
D 1734	(A,36,24) LED	SML412BC5T(MN)
D 1735	(A,50,9) LED	SML412BC5T(MN)
D 1736	(A,67,34) LED	SML412BC5T(MN)
D 1737	(A,67,14) LED	SML412BC5T(MN)
D 1738	(A,33,34) LED	SML412BC5T(MN)
D 1739	(A,33,14) LED	SML412BC5T(MN)
D 1740	(A,17,24) LED	SML412BC5T(MN)
D 1741	(A,9,11) LED	SML412BC5T(MN)
D 1751	(B,40,16) Diode	HZU7R5(B2)
D 1752	(B,66,17) Diode	DAP202U
D 1753	(B,66,22) Diode	DAN202U
D 1759	(B,36,16) Diode	HZU7R5(B2)
D 1761	(A,103,36) Diode	1SS355
L 1701	(B,121,19) Inductor	CTF1379
L 1702	(B,124,21) Inductor	CTF1379
L 1703	(B,143,23) Inductor	CTF1617
L 1762	(B,144,16) Inductor	CTF1617
L 1861	(B,159,19) Inductor	CTF1617
L 1862	(A,113,14) Inductor	LCTC1R0K2125
L 1863	(A,126,7) Inductor	LCTC1R0K2125

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
L 1931	(B,122,11) Inductor	CTF1617
L 1932	(B,123,15) Chip Ferrite Bead	CTF1399
L 1933	(B,149,15) Inductor	ATH1167
X 1761	(A,109,27) 8.0 MHz	CSS1675
S 1701	(A,163,6) Push Switch	CSG1155
S 1731	(A,8,27) Push Switch	CSG1155
S 1732	(A,35,39) Push Switch	CSG1155
S 1733	(A,50,24) Switch(MULTI-CONTROL)	CSX1065
S 1734	(A,35,9) Push Switch	CSG1155
S 1735	(A,65,39) Push Switch	CSG1155
S 1736	(A,65,9) Push Switch	CSG1155
S 1737	(A,17,27) Push Switch	CSG1155
S 1738	(A,6,11) Push Switch	CSG1155
S 1739	(A,26,27) Push Switch	CSG1155
	OEL Module	MXK8230

RESISTORS

R 1703	(B,118,18)	RS1/16S103J
R 1704	(A,124,36)	RS1/16S222J
R 1705	(A,125,37)	RS1/16S222J
R 1706	(A,157,7)	RS1/16S333J
R 1707	(A,114,34)	RS1/16S222J
R 1708	(A,110,31)	RS1/16S222J
R 1709	(A,117,37)	RS1/16S103J
R 1731	(B,11,31)	RS1/16S101J
R 1733	(B,63,34)	RS1/16S102J
R 1734	(B,35,32)	RS1/16S102J
R 1735	(B,42,11)	RS1/16S222J
R 1737	(B,54,26)	RS1/16S332J
R 1738	(B,42,13)	RS1/16S103J
R 1739	(B,65,34)	RS1/16S103J
R 1740	(B,38,32)	RS1/16S822J
R 1741	(B,38,30)	RS1/16S473J
R 1742	(B,51,39)	RS1/16S181J
R 1743	(B,50,8)	RS1/16S181J
R 1744	(B,61,7)	RS1/16S181J
R 1745	(B,35,8)	RS1/16S181J
R 1746	(B,50,39)	RS1/16S151J
R 1747	(B,49,8)	RS1/16S151J
R 1748	(B,60,7)	RS1/16S101J
R 1749	(B,36,8)	RS1/16S181J
R 1750	(B,12,17)	RS1/16S271J
R 1751	(B,11,17)	RS1/16S331J
R 1752	(B,11,11)	RS1/16S561J
R 1753	(B,10,11)	RS1/16S331J
R 1761	(A,100,35)	RS1/16S473J
R 1762	(A,97,31)	RS1/16S473J
R 1763	(A,98,29)	RS1/16S682J
R 1764	(A,103,29)	RS1/16S682J
R 1765	(A,104,33)	RS1/16S154J
R 1766	(A,101,29)	RS1/16S392J
R 1767	(A,99,29)	RS1/16S392J
R 1768	(A,107,33)	RS1/16S473J
R 1769	(B,108,22)	RAB4CQ101J
R 1770	(B,108,31)	RAB4CQ101J
R 1771	(A,101,33)	RS1/16S473J
R 1772	(B,108,28)	RS1/16S101J
R 1773	(B,107,37)	RS1/16S101J
R 1775	(B,79,7)	RAB4CQ101J
R 1776	(B,105,37)	RS1/16S101J

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 1777 (A,86,37) RAB4CQ473J
R 1778 (A,91,31) RS1/16S101J

C 1749 (B,35,33) CKSRYB103K50
C 1750 (A,67,32) CKSRYB104K16

A R 1779 (A,92,35) RS1/16S473J
R 1780 (A,91,33) RS1/16S101J
R 1781 (B,99,37) RAB4CQ101J
R 1782 (B,99,16) RS1/16S473J
R 1783 (B,97,16) RS1/16S473J

C 1751 (A,67,15) CKSRYB104K16
C 1752 (A,33,32) CKSRYB104K16
C 1753 (A,33,15) CKSRYB104K16
C 1761 (A,97,37) CKSRYB104K16
C 1762 (A,101,37) CKSRYB104K16

R 1784 (B,95,16) RS1/16S101J
R 1785 (A,83,34) RAB4CQ101J
R 1786 (B,82,35) RAB4CQ101J
R 1787 (B,85,33) RAB4CQ101J
R 1789 (B,85,16) RAB4CQ101J

C 1763 (A,101,35) CKSRYB473K25
C 1764 (A,135,38) CKSRYB104K16
C 1765 (B,103,37) CKSRYB103K50
C 1766 (B,141,16) CKSRYB104K16
C 1767 (B,90,18) CKSRYB104K16

B R 1790 (B,80,18) RS1/16S101J
R 1791 (B,80,16) RS1/16S101J
R 1793 (B,82,31) RAB4CQ101J
R 1794 (B,85,28) RAB4CQ101J
R 1795 (B,82,27) RAB4CQ101J

C 1768 (B,135,11) CKSRYB103K50
C 1769 (B,140,11) CSZS4R7M10
C 1770 (A,126,34) CKSRYB104K16
C 1801 (B,22,34) CSZS100M16
C 1831 (A,148,26) CKSRYB104K16

R 1796 (B,82,21) RAB4CQ101J
R 1797 (B,85,20) RAB4CQ101J
R 1798 (B,79,10) RAB4CQ101J
R 1799 (A,128,33) RS1/16S0R0J
R 1804 (B,108,20) RS1/16S101J

C 1832 (A,96,11) CKSRYB104K16
C 1833 (B,161,40) CKSRYB104K16
C 1834 (A,156,15) CCSRCH100D50
C 1835 (B,139,13) CCSRCH100D50
C 1862 (B,159,16) CKSRYB103K50

C R 1811 (B,19,30) RS1/16S101J
R 1812 (B,24,34) RS1/16S103J
R 1813 (B,22,37) RS1/16S2R2J
R 1831 (A,129,7) RS1/16S473J
R 1832 (A,132,7) RS1/16S101J

C 1863 (B,161,10) CSZS4R7M10
C 1864 (A,114,14) CKSRYB104K16
C 1865 (A,132,15) CKSRYB473K25
C 1867 (A,117,27) CKSRYB104K16
C 1868 (A,132,25) CKSRYB104K16

R 1833 (A,133,11) RS1/16S473J
R 1834 (A,134,33) RS1/16S473J
R 1835 (A,154,13) RS1/16S471J
R 1836 (A,150,13) RS1/16S471J
R 1864 (A,133,17) RS1/16S473J

C 1869 (A,130,11) CKSRYB104K16
C 1870 (A,132,13) CKSRYB104K16
C 1871 (A,126,29) CCSRCH100D50
C 1872 (A,130,30) CCSRCH100D50
C 1873 (A,132,24) CCSRCH100D50

D R 1865 (A,132,19) RS1/16S473J
R 1866 (A,132,27) RS1/16S101J
R 1869 (A,113,10) RS1/16S102J
R 1870 (A,132,22) RS1/16S102J
R 1871 (A,128,29) RS1/16S102J

C 1874 (A,109,14) CKSYB106K10
C 1932 (B,118,11) CKSRYB103K50
C 1933 (B,117,13) CKSRYB104K16
C 1936 (B,117,15) CKSRYB104K16
C 1937 (B,93,11) CKSRYB104K16

R 1872 (A,130,28) RS1/16S102J
R 1873 (A,132,21) RS1/16S102J
R 1874 (A,110,10) RS1/16S102J
R 1931 (B,113,16) RS1/16S101J
R 1932 (B,112,16) RS1/16S101J

C 1939 (B,154,15) CKSYB106K10
C 1941 (B,131,8) CKSYB106K10

R 1933 (B,109,16) RS1/16S101J
R 1934 (B,107,16) RAB4CQ101J

**Unit Number : CWX3328****Unit Name : CD Core Unit(COMP1D)****MISCELLANEOUS****CAPACITORS**

C 1707 (B,129,21) CKSRYB474K10
C 1708 (B,143,30) CKSRYB474K10
C 1709 (B,148,32) CKSRYB223K50
C 1710 (B,137,15) CSZS4R7M10
C 1711 (B,151,30) CSZS4R7M10

IC 201 (B,39,70) IC UPD63763CGJ
IC 203 (A,12,16) IC NJM2886DL3-33
IC 301 (A,28,18) IC BA5835FP
IC 701 (A,32,48) IC PE5552A
Q 101 (B,60,89) Transistor 2SA1577

C 1732 (A,67,24) CKSRYB104K16
C 1735 (A,34,24) CKSRYB104K16
C 1739 (A,10,35) CKSRYB104K16
C 1741 (A,50,40) CKSRYB104K16
C 1744 (A,50,7) CKSRYB104K16

Q 701 (B,24,41) Transistor UN2111
X 701 (A,24,37) Ceramic Resonator 4.000 MHz CSS1652
S 901 (A,57,57) Switch(HOME) CSN1067
S 903 (B,23,78) Switch(DSCSNS) CSN1067
S 904 (B,42,87) Switch(12EJ) CSN1068

F C 1746 (A,16,20) CKSRYB104K16
C 1747 (A,11,11) CKSRYB104K16
C 1748 (B,62,26) CKSRYB103K50

S 905 (B,28,88) Switch(8EJ) CSN1068

RESISTORS

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 101	(B,61,92)	RS1/10SR2R4J		C 216	(B,53,77)	CKSSYB332K50	
R 102	(B,63,92)	RS1/10SR2R4J		C 217	(B,52,79)	CKSSYB104K10	
R 103	(B,63,89)	RS1/10SR2R7J		C 218	(B,52,76)	CKSSYB473K10	A
R 104	(A,52,73)	RS1/16SS102J		C 219	(B,52,74)	CKSSYB104K10	
R 201	(B,44,57)	RS1/16SS102J		C 220	(A,46,77)	CKSSYB182K50	
				C 221	(B,51,74)	CKSSYB104K10	
R 202	(A,38,62)	RS1/16SS473J		C 222	(A,46,73)	CCSSCH560J50	
R 203	(A,37,62)	RS1/16SS473J					
R 210	(A,33,62)	RS1/16SS0R0J		C 223	(A,44,74)	CCSSCH4R0C50	
R 214	(A,46,79)	RS1/16SS472J		C 224	(B,52,68)	CKSSYB104K10	
R 216	(A,46,81)	RS1/16SS472J		C 225	(A,47,67)	CKSSYB103K16	
				C 226	(A,49,67)	CCSSCH680J50	
R 221	(A,44,81)	RS1/16SS103J		C 227	(A,48,65)	CCSSCH470J50	
R 222	(A,45,81)	RS1/16SS103J					
R 225	(B,52,78)	RS1/16SS103J		C 228	(A,46,62)	CKSSYB103K16	
R 226	(B,52,77)	RS1/16SS393J		C 232	(A,12,31)	CKSRYB105K10	B
R 227	(A,44,75)	RS1/16SS562J		C 237	(A,31,67)	CKSSYB104K10	
				C 239	(A,46,74)	CCSSCH220J50	
R 228	(A,46,72)	RS1/16SS122J		C 246	(A,42,80)	CKSSYB104K10	
R 229	(A,44,72)	RS1/16SS472J					
R 232	(A,46,75)	RS1/16SS122J		C 249	(B,25,57)	CKSSYB221K50	
R 237	(B,22,64)	RS1/16SS221J		C 250	(A,42,81)	CKSRYB102K50	
R 238	(B,22,65)	RS1/16SS221J		C 251	(A,41,83)	CKSRYB102K50	
				C 303	(A,18,20)	CKSSYB472K25	
R 239	(B,22,66)	RS1/16SS221J		C 304	(A,17,17)	CKSSYB103K16	
R 241	(B,26,63)	RS1/16SS333J					
R 243	(B,26,62)	RS1/16SS333J		C 307	(A,34,15)	CKSSYB104K10	
R 245	(B,26,69)	RS1/16SS333J		C 308	(A,17,30)	CKSRYB105K10	
R 248	(B,55,74)	RS1/16SS105J		C 701	(B,25,47)	CKSSYB104K10	C
				C 703	(B,28,42)	CKSSYB103K16	
R 307	(A,19,20)	RS1/16SS183J		C 706	(B,34,43)	CKSSYB104K10	
R 308	(A,17,20)	RS1/16SS183J					
R 309	(A,18,18)	RS1/16SS183J		C 707	(A,36,57)	CKSSYB104K10	
R 310	(A,17,16)	RS1/16SS183J		C 714	(A,24,41)	CKSSYB104K10	
R 701	(B,26,44)	RS1/16SS221J		C 722	(B,29,45)	CKSQYB475K6R3	
				C 903	(B,14,54)	CKSSYB471K50	
R 707	(B,32,45)	RS1/16SS473J					
R 709	(A,36,35)	RS1/16SS222J					
R 710	(B,41,46)	RS1/16SS102J					
R 712	(A,45,57)	RS1/16SS222J					
R 713	(B,40,57)	RS1/16SS222J					
R 716	(B,29,37)	RS1/16SS472J					
R 724	(B,31,36)	RS1/16S473J		S 1	Switch(CLOSE)	CSN1051	
R 726	(B,23,47)	RS1/16SS103J		S 2	Switch(OPEN)	CSN1052	
R 727	(B,31,42)	RS1/16SS473J					
R 729	(B,20,48)	RS1/16SS223J					
R 730	(B,20,46)	RS1/16SS473J					
R 740	(A,38,59)	RS1/16SS222J					
R 746	(A,13,38)	RS1/16SS104J					
R 750	(A,40,66)	RS1/16SS473J					
R 751	(B,40,46)	RS1/16SS102J					
R 902	(A,20,36)	RS1/16SS221J					
R 905	(A,21,36)	RS1/16SS221J					
R 906	(B,20,36)	RS1/16SS221J					
R 909	(B,16,65)	RS1/16SS0R0J					

CAPACITORS

C 103	(B,57,83)	CEVW101M16
C 108	(A,47,66)	CKSSYB104K10
C 201	(B,46,56)	CKSSYB102K50
C 202	(B,47,58)	CKSSYB104K10
C 205	(A,34,63)	CKSSYB104K10
C 208	(B,34,54)	CKSSYB104K10
C 209	(B,31,57)	CKSSYB104K10
C 210	(A,31,66)	CKSRYB105K10



Unit Number : CWS1389

Unit Name : Switch Unit

S 1	Switch(CLOSE)	CSN1051
S 2	Switch(OPEN)	CSN1052

Miscellaneous Parts List

	Pickup Unit(P10.5)(Service)	CXX1942
M 1	Motor Unit(SPINDLE)	CXC6742
M 2	Motor Unit(LOADING/CARRIAGE)	CXC4026
M 801	Motor Unit(FLAP)	XXA7400