


# EXPLODED VIEW / PARS LIST


## Main section

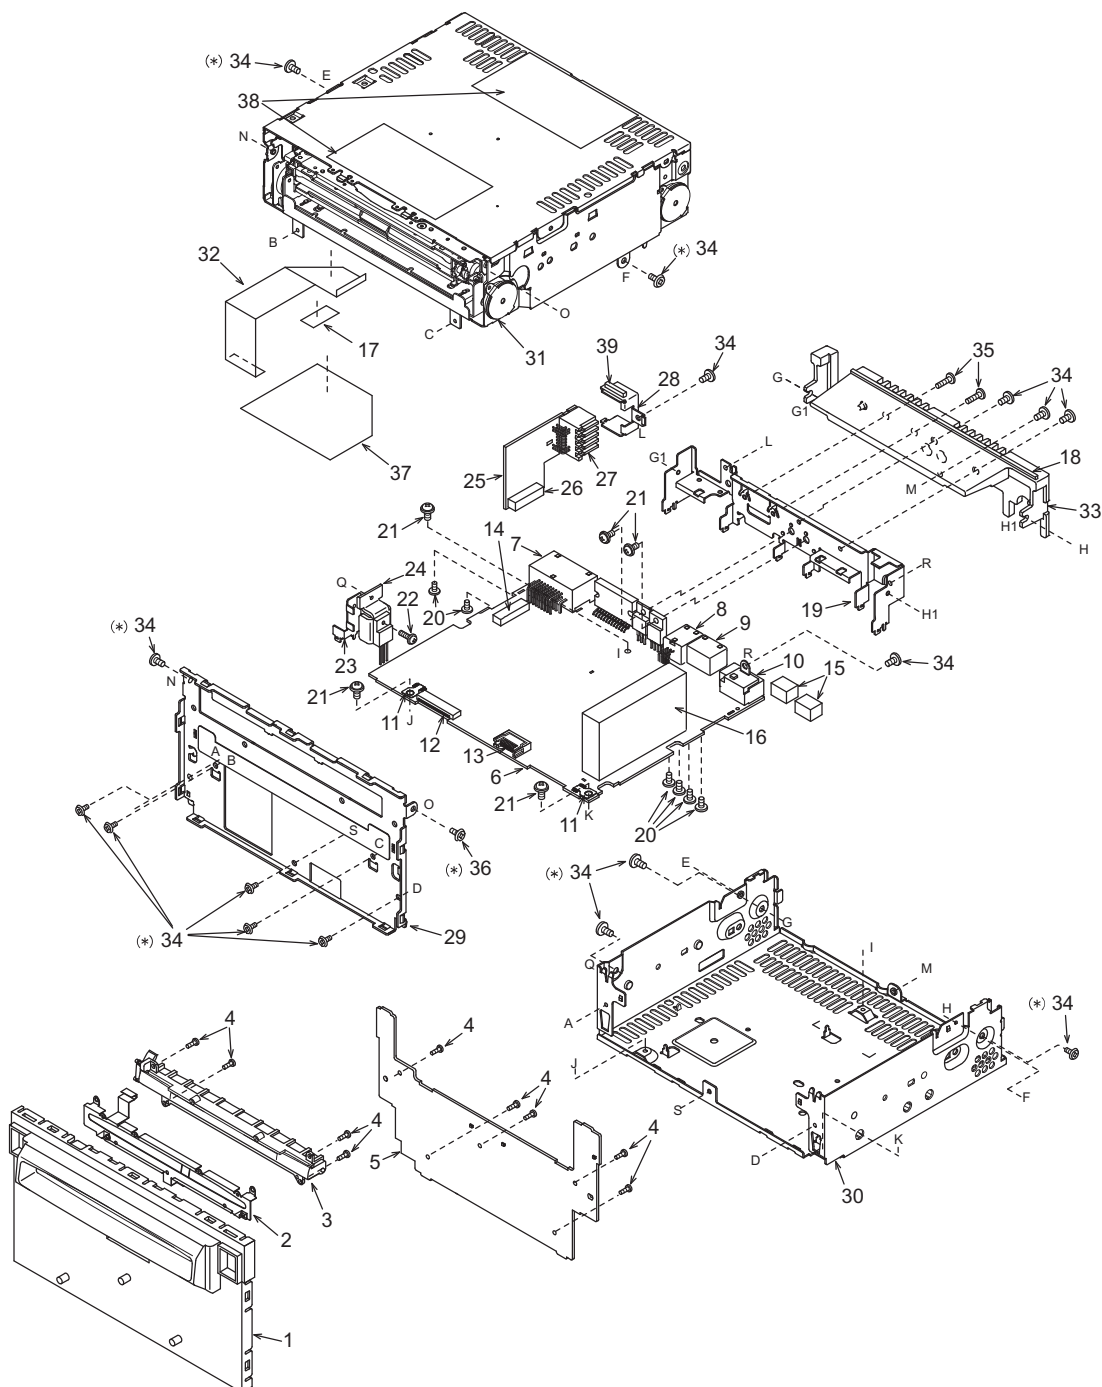

### Caution of assembling

When installing this unit into a vehicle, this unit side is equipped with an attachment bracket. The attachment accuracy of the bracket and the unit is  $\pm 0.2\text{mm}$ . If it is not satisfied, that will be a trouble for installation.

Therefore, in assembling the upper block (CD changer module) and the lower block (main unit) of the unit, please use the "Attachment jig". (When the screws of mark(\*) are tightened) After assembling, please check the attachment position of the unit with "Attachment jig" again.




Attachment jig  
(PN-2700-M0H)

Please set "Attachment jig" to the bracket attachment holes of both sides of the unit.

| NO. | PART NO.    | DESCRIPTION         | Q'TY |
|-----|-------------|---------------------|------|
| 1   | 370-6106-01 | ESCUTCHEON          | 1    |
| 2   | 331-3795-01 | SURGE PLATE         | 1    |
| 3   | 947-0527-00 | DOOR ASSY           | 1    |
| 4   | 716-0778-10 | WAVE SCREW(M2x6)    | 9    |
| 5   | -----       | ES PWB              | 1    |
| 6   | -----       | MAIN PWB            | 1    |
| 7   | 074-4009-20 | OUTLET SOCKET(TH18) | 1    |
| 8   | 074-1302-08 | OUTLET SOCKET(TH08) | 1    |
| 9   | 074-1302-12 | OUTLET SOCKET(TH12) | 1    |
| 10  | 092-2210-00 | ANT-RECEPT          | 1    |
| 11  | 073-0768-90 | TERMINAL            | 2    |
| 12  | 074-1237-70 | OUTLET SOCKET(MECH) | 1    |
| 13  | 076-0662-60 | PLUG(10P)           | 1    |
| 14  | 076-0368-20 | PLUG(20P)           | 1    |
| 15  | 345-8529-00 | RUBBER PART         | 2    |
| 16  | 880-1921U   | TUNER PACK          | 1    |
| 17  | 347-7363-00 | W-FACE              | 1    |
| 18  | 345-8749-00 | GASKET              | 1    |
| 19  | 307-0704-00 | REAR PLATE          | 1    |
| 20  | 778-3006-00 | TAP-SCREW(3x6)      | 6    |

| NO. | PART NO.    | DESCRIPTION            | Q'TY |
|-----|-------------|------------------------|------|
| 21  | 716-0878-00 | IT-SCREW(M2.6x5)       | 5    |
| 22  | 716-1646-00 | IT-SCREW(M2.6x8)       | 1    |
| 23  | 331-3880-00 | TR-HOLDER              | 1    |
| 24  | 313-1910-00 | HEAT SINK(SUB)         | 1    |
| 25  | -----       | SUB PWB                | 1    |
| 26  | 074-0898-20 | OUTLET SOCKET(20P)     | 1    |
| 27  | 074-1013-00 | OUTLET SOCKET(A12)     | 1    |
| 28  | 331-3792-00 | CONNECTR-HOLDER        | 1    |
| 29  | 331-3794-01 | ES PLATE               | 1    |
| 30  | 311-1890-01 | LOWER CASE             | 1    |
| 31  | 929-0195-84 | CD CHANGER MODULE      | 1    |
| 32  | 816-4002-50 | FLAT WIRE              | 1    |
| 33  | 313-1898-00 | HEAT SINK              | 1    |
| 34  | 714-2606-81 | MACHINE SCREW(M2.6x6)  | 16   |
| 35  | 714-2610-89 | MACHINE SCREW(M2.6x10) | 2    |
| 36  | 714-2003-89 | MACHINE SCREW(M2x3)    | 1    |
| 37  | 347-7359-00 | EARTH SHEET            | 1    |
| 38  | 286-6469-08 | SETPLATE               | 1    |
| 39  | 345-8749-10 | GASKET                 | 1    |

## CD changer module section

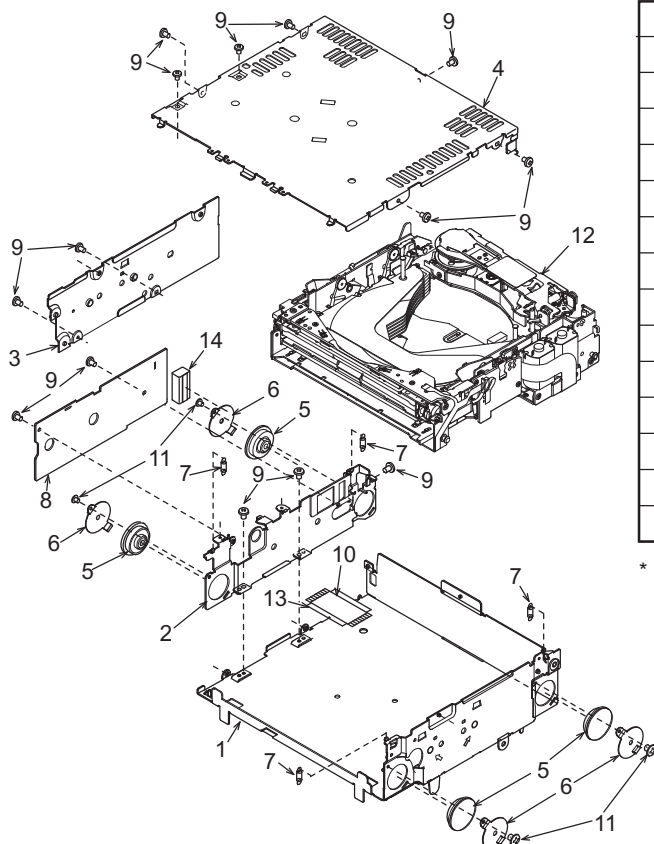


| NO. | PART NO.    | DESCRIPTION          | Q'TY |
|-----|-------------|----------------------|------|
| 1   | 311-1864-24 | LOWER CASE           | 1    |
| 2   | 331-3896-22 | PWB-HOLDER           | 1    |
| 3   | 305-0334-20 | SIDE CASE            | 1    |
| 4   | 310-1741-28 | UPPER CASE           | 1    |
| 5   | 629-0083-01 | DAMPER               | 4    |
| 6   | 620-1086-20 | DAMPER-H-PLT         | 4    |
| 7   | 750-3491-00 | FL-SPRING            | 4    |
| 8   | -----       | CD PWB               | 1    |
| 9   | 716-1716-00 | SCREW(M2x3)          | 14   |
| 10  | 039-1957-01 | FPC                  | 1    |
| 11  | 716-3450-00 | SCREW(M1.7x2)        | 4    |
| 12  | -----       | CD CHANGER MECHANISM | 1    |
| 13  | 347-6619-00 | INSULATOR            | 1    |
| 14  | 345-8748-00 | GASKET               | 1    |

\* No.12 : Refer to CD changer mechanism section.(page 10-12)

# CD changer mechanism section

(Parts List: page 12)

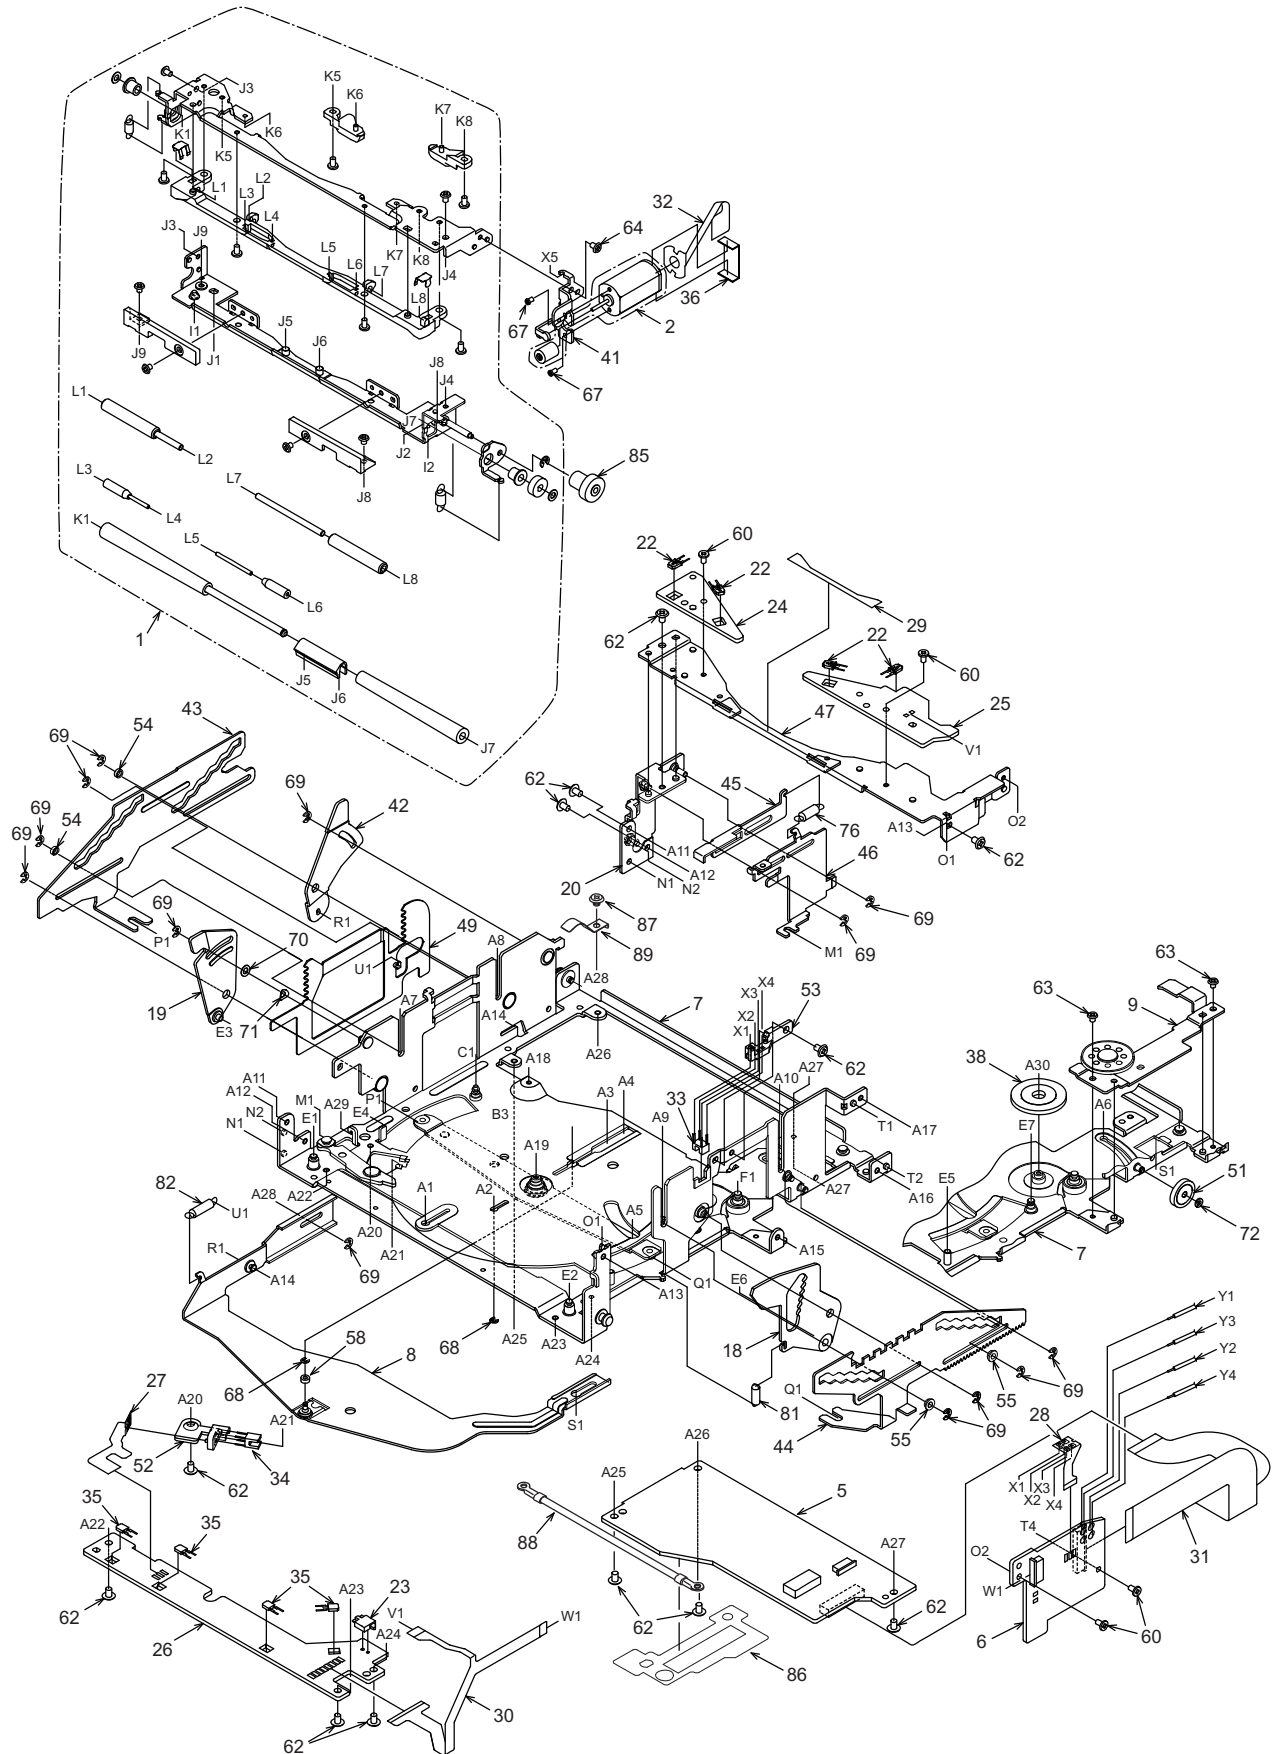




# CD changer mechanism section

| NO. | PART NO.    | DESCRIPTION                        | Q'TY |
|-----|-------------|------------------------------------|------|
| 1   | HBS-521-100 | LOADING UNIT                       | 1    |
| 2   | SMA-186-100 | LOADING MOTOR ASSY                 | 1    |
| 3   | HBS-530-100 | MOTOR PLATE SUB ASSY               | 1    |
| 4   | HBS-531-103 | DRIVE UNIT                         | 1    |
| 5   | -----       | DSP PWB                            | 1    |
| 6   | -----       | DRIVER PWB                         | 1    |
| 7   | 966-0597-25 | CHASSIS ASSY                       | 1    |
| 8   | 966-0600-23 | LOCK-P-RE-ASSY                     | 1    |
| 9   | 966-0601-21 | M-GEAR-P-ASSY                      | 1    |
| 10  | 966-0602-24 | DR-LINK-ASSY                       | 1    |
| 11  | 966-0603-21 | MODE-P-ASSY                        | 1    |
| 12  | 966-0604-24 | LOCK-PF-ASSY                       | 1    |
| 13  | 966-0605-20 | SHIFT-P-ASSY                       | 1    |
| 14  | 966-0606-23 | HLC-PLATE-ASSY                     | 1    |
| 15  | 966-0607-26 | COV-OLATE-ASSY                     | 1    |
| 16  | HBS-535-100 | TOP-PLATE-ASSY                     | 1    |
| 17  | 966-0652-22 | DR-BASE-P-ASSY                     | 1    |
| 18  | 966-0615-21 | LOCK-L-RF-ASSY                     | 1    |
| 19  | 966-0616-20 | LOCK-L-LF-ASSY                     | 1    |
| 20  | 966-0618-21 | EJECT-B-ASSY                       | 1    |
| 21  | 966-0624-27 | DISC-HOL-ASSY                      | 1    |
| 22  | 001-7042-00 | DIODE (GL4800)                     | 4    |
| 23  | 013-7414-50 | DETECTOR SWITCH                    | 1    |
| 24  | -----       | LED-L-PWB                          | 1    |
| 25  | -----       | LED-R-PWB                          | 1    |
| 26  | -----       | SENSOR PWB                         | 1    |
| 27  | 039-2009-00 | PIM-FPC<br>(WITHOUT COMPONENT)     | 1    |
| 28  | 039-2010-00 | PIV-FPC<br>(WITHOUT COMPONENT)     | 1    |
| 29  | 039-2011-01 | LED-FPC                            | 1    |
| 30  | 039-2012-00 | SENSOR-FPC                         | 1    |
| 31  | 039-2013-02 | MOS-FPC                            | 1    |
| 32  | 039-2014-01 | L-MOTOR-FPC<br>(WITHOUT COMPONENT) | 1    |
| 33  | 051-5806-01 | IC (GPIS93)                        | 1    |
| 34  | 051-5806-02 | IC (GPIS95)                        | 1    |
| 35  | 060-0252-01 | PHOTO-TR                           | 4    |
| 36  | 347-6657-01 | LO-COVER SHEET                     | 1    |
| 37  | 620-1041-26 | GEAR PLATE                         | 1    |
| 38  | 620-1042-20 | M-GEAR-H                           | 1    |
| 39  | 620-1056-22 | HLR-PLATE-L                        | 1    |
| 40  | 620-1580-20 | HLR-PLATE-R                        | 1    |
| 41  | 620-1576-20 | LO-MOTOR-PLT                       | 1    |
| 42  | 620-1066-20 | LOCK LINK-LR                       | 1    |
| 43  | 620-1067-21 | SLIDE PLATE-L                      | 1    |
| 44  | 620-1068-22 | SLIDE PLATE-R                      | 1    |
| 45  | 620-1071-21 | EJECT ARM                          | 1    |
| 46  | 620-1072-20 | EJECT PLATE                        | 1    |
| 47  | 620-1577-20 | FRONT PLATE                        | 1    |
| 48  | 620-1083-20 | FPC-PLATE                          | 1    |

| NO. | PART NO.    | DESCRIPTION     | Q'TY |
|-----|-------------|-----------------|------|
| 49  | 620-1090-20 | GAP PLATE       | 1    |
| 50  | 620-1568-20 | RATTLE PLATE-F  | 2    |
| 51  | 621-0640-20 | V-GEAR-G        | 1    |
| 52  | 621-0641-21 | PI-HOLDER-M     | 1    |
| 53  | 621-0656-21 | PI-HOLDER-V     | 1    |
| 54  | 622-1622-20 | SL-G-ROLLER     | 2    |
| 55  | 622-1623-00 | SL-G-ROLLER-R   | 2    |
| 56  | 622-1648-23 | DU-STP-SLEEVE   | 1    |
| 57  | 622-1650-23 | COV-PLATE PIN-B | 2    |
| 58  | 622-1651-00 | LOCK-RE-ROLLER  | 1    |
| 59  | 622-1652-00 | LOCK-PF-ROLLER  | 1    |
| 60  | 716-1866-00 | SCREW(M1.7x3)   | 4    |
| 61  | 716-1873-00 | SCREW(M2x1.6)   | 1    |
| 62  | 716-3449-00 | SCREW(M2x3)     | 15   |
| 63  | 716-3450-00 | SCREW(M1.7x2)   | 4    |
| 64  | 716-3451-00 | SCREW(M1.7x2.5) | 4    |
| 65  | 716-3459-00 | SCREW(M1.7x5)   | 1    |
| 66  | 716-3466-02 | SCREW(M2x6)     | 1    |
| 67  | 738-1422-11 | PRECISION SCREW | 2    |
| 68  | 743-1200-10 | E-RING          | 2    |
| 69  | 743-1500-10 | E-RING          | 13   |
| 70  | 746-0624-00 | WASHER          | 1    |
| 71  | 746-0712-23 | WASHER          | 1    |
| 72  | 746-0761-00 | WASHER          | 1    |
| 73  | 750-3478-01 | TOP-P-SP-L      | 2    |
| 74  | 750-3479-01 | TOP-P-SP-R      | 1    |
| 75  | 750-3480-01 | DR-LOCK-SP      | 1    |
| 76  | 750-3483-00 | EJECT-A-SPRING  | 1    |
| 77  | 750-3484-01 | DR-BASE-SPRING  | 1    |
| 78  | 750-3485-01 | TENSION-SP-L    | 1    |
| 79  | 750-3486-01 | LO-TENSION-SP   | 1    |
| 80  | 750-3489-01 | DRIVE-P-SPRING  | 1    |
| 81  | 750-3496-00 | GAP-P-SPRING R  | 1    |
| 82  | 750-3497-00 | GAP-P-SPRING L  | 1    |
| 83  | 750-6711-01 | DU-STP-SPRING   | 1    |
| 84  | 750-6712-01 | DR-LOCK-SP-B    | 1    |
| 85  | 621-0651-22 | LOAD GEAR-A     | 1    |
| 86  | 347-6974-22 | FPC COVER       | 1    |
| 87  | 716-1850-01 | SCREW           | 1    |
| 88  | 854-4348-01 | EXTENSION LEAD  | 1    |
| 89  | 620-1604-20 | DR-PLATE-SCREW  | 1    |

\* No.4 : Refer to Drive unit section.(page 13)

# Drive unit section

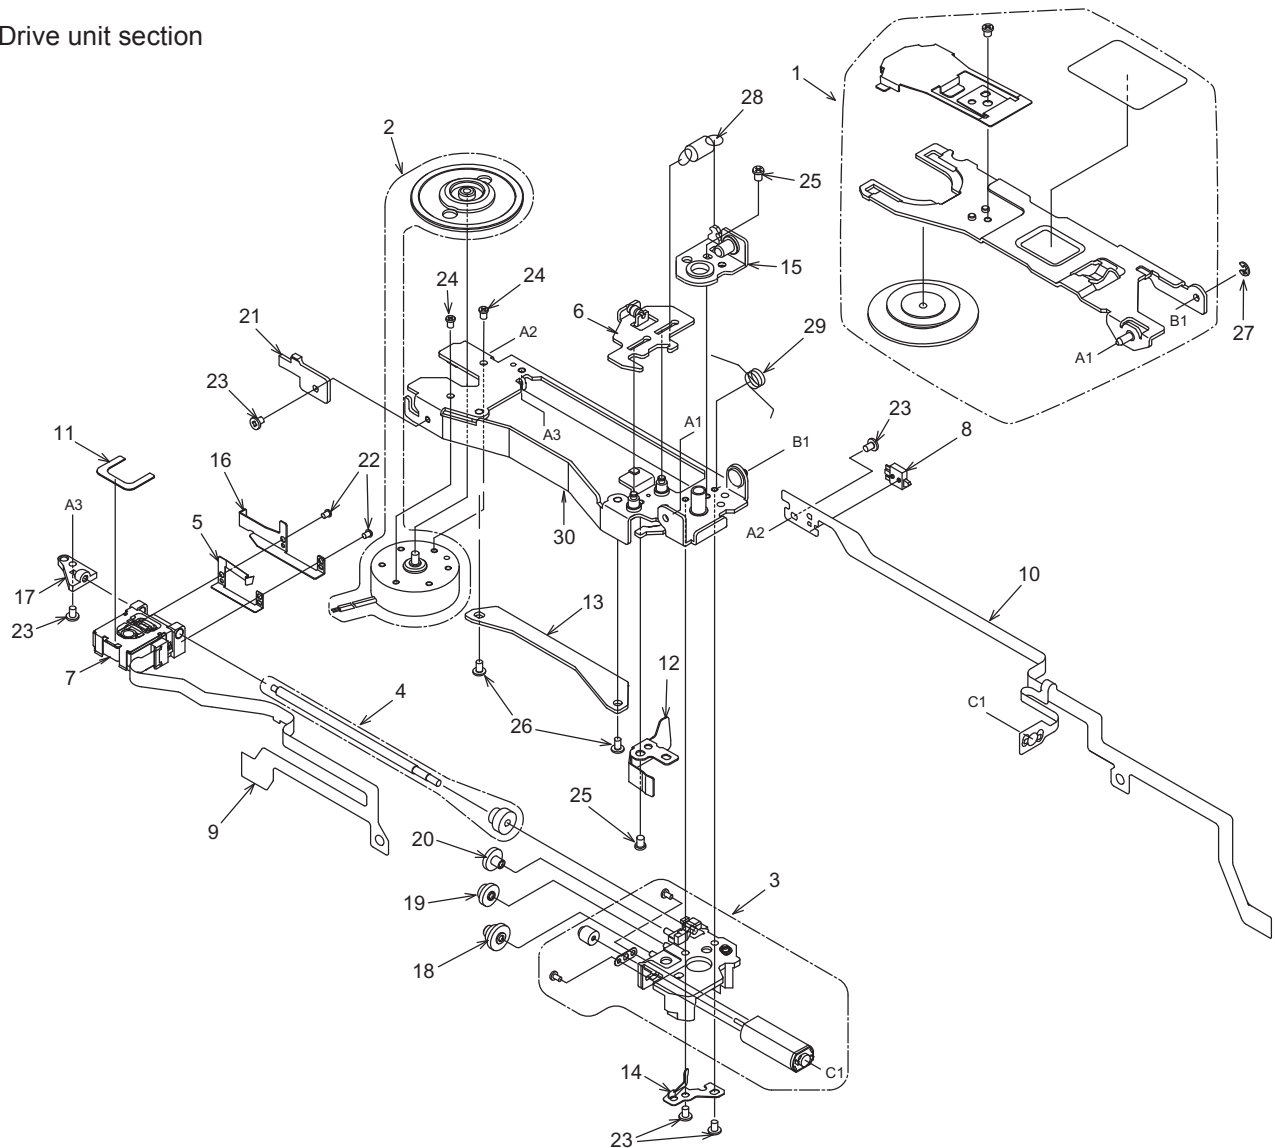

| NO. | PART NO.    | DESCRIPTION                                        | Q'TY |
|-----|-------------|----------------------------------------------------|------|
| 1   | HBS-532-100 | CLAMPER SUB ASSY<br>(Date-code : until "Y4707...") | 1    |
|     | HBS-532-101 | CLAMPER SUB ASSY<br>(Date-code : after "Y4708...") |      |
| 2   | SMA-185-102 | SPINDLE MOTOR ASSY                                 | 1    |
| 3   | SMA-191-100 | SLED MOTOR ASSY                                    | 1    |
| 4   | HBS-515-101 | LS-ASSY                                            | 1    |
| 5   | 620-1587-83 | SH-SP-PLT                                          | 1    |
| 6   | HBS-542-101 | D-SHIFT-P-ASSY                                     | 1    |
| 7   | 969-0011-01 | PICK UP-ASSY                                       | 1    |
| 8   | 013-7414-50 | DETECT SWITCH                                      | 1    |
| 9   | 039-2015-01 | P/U-FPC                                            | 1    |
| 10  | 039-2016-02 | M/S-FPC<br>(WITHOUT COMPONENT)                     | 1    |
| 11  | 347-6632-00 | PU-SHEET                                           | 1    |
| 12  | 620-1078-20 | PUSH PLATE                                         | 1    |
| 13  | 620-1080-22 | PU-GUIDE PLATE                                     | 1    |
| 14  | 620-1081-20 | SCREW PUSH-PLT                                     | 1    |
| 15  | 966-0650-20 | SPRING PLT ASSY                                    | 1    |
| 16  | 620-1730-81 | SCREW-HOL-PLT                                      | 1    |

| NO. | PART NO.    | DESCRIPTION             | Q'TY |
|-----|-------------|-------------------------|------|
| 17  | 621-0670-20 | LS-HOLDER-L             | 1    |
| 18  | 621-0673-20 | D-GEAR A                | 1    |
| 19  | 621-0674-20 | D-GEAR B                | 1    |
| 20  | 621-0675-20 | D-GEAR C                | 1    |
| 21  | 621-0683-21 | DU-STOPPER              | 1    |
| 22  | 716-3511-00 | SCREW(M1.4x3)           | 2    |
| 23  | 716-3470-00 | SCREW(M1.7x3)           | 5    |
| 24  | 738-1720-17 | PRECISION SCREW(M1.7x2) | 2    |
| 25  | 738-2025-17 | PRECISION SCREW(M2x2.5) | 2    |
| 26  | 716-3474-00 | SCREW(M1.7x3)           | 2    |
| 27  | 743-1500-20 | E-RING                  | 1    |
| 28  | 750-3487-00 | SHIFT-P-SPRING          | 1    |
| 29  | 750-3504-00 | CLAMP-A-SPRING          | 1    |
| 30  | 966-0649-02 | DRIVE PLT-ASSY          | 1    |

\* No1: The date-code is stamped on the mechanism.  
ex.) Y4707...

Y(Production place), 4(Year 200[4]), 7(Month), 07(Day)  
(Month: 10=[X], 11=[Y], 12=[Z])

# ELECTRICAL PARTS LIST

## Main PWB section(B1)

| REF No. | PART No.    | DESCRIPTION    | REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION    |
|---------|-------------|----------------|---------|-------------|-------------|---------|-------------|----------------|
| ANT101  | 092-2210-00 | ANT-RECPT      | C212    | 168-8222-55 | 8200pF K    | C404    | 166-2201-50 | 22pF CH        |
| BL152   | 880-1921U   | TUNER PACK     | C216    | 168-1022-55 | 1000pF K    | C405    | 168-4722-55 | 4700pF K       |
| C101    | 166-4701-50 | 47pF CH        | C217    | 168-1022-55 | 1000pF K    | C406    | 166-1201-50 | 12pF CH        |
| C102    | 166-4701-50 | 47pF CH        | C218    | 168-1042-78 | 16V 0.1uF   | C407    | 166-1201-50 | 12pF CH        |
| C103    | 168-1022-55 | 1000pF K       | C250    | 168-1022-55 | 1000pF K    | C408    | 168-1042-78 | 16V 0.1uF      |
| C104    | 166-1511-50 | 150pF CH       | C251    | 168-1022-55 | 1000pF K    | C409    | 187-4763-17 | 6.3V47uF       |
| C105    | 166-1011-50 | 100pF CH       | C252    | 168-1022-55 | 1000pF K    | C410    | 168-1042-78 | 16V 0.1uF      |
| C106    | 166-2201-50 | 22pF CH        | C253    | 168-1022-55 | 1000pF K    | C411    | 168-1042-78 | 16V 0.1uF      |
| C107    | 168-1022-55 | 1000pF K       | C254    | 043-0548-50 | 2.2uF       | C412    | 168-1032-55 | 0.01uF K       |
| C109    | 168-4722-55 | 4700pF K       | C255    | 043-0548-50 | 2.2uF       | C420    | 168-1022-55 | 1000pF K       |
| C113    | 168-2212-55 | 220pF K        | C256    | 043-0548-50 | 2.2uF       | C473    | 178-1052-78 | 1uF            |
| C114    | 111-0000-94 | 1/4W 0 ohm JW  | C257    | 043-0548-50 | 2.2uF       | C501    | 178-1052-78 | 1uF            |
| C115    | 166-2201-50 | 22pF CH        | C270    | 189-2273-29 | 10V 220uF   | C502    | 178-1052-78 | 1uF            |
| C116    | 166-2201-50 | 22pF CH        | C271    | 163-1063-35 | 16V10uF     | C503    | 178-1052-78 | 1uF            |
| C117    | 166-2201-50 | 22pF CH        | C272    | 168-1022-55 | 1000pF K    | C504    | 178-1052-78 | 1uF            |
| C127    | 166-1201-50 | 12pF CH        | C273    | 168-1022-55 | 1000pF K    | C505    | 166-5611-50 | 560pF CH       |
| C132    | 166-4701-50 | 47pF CH        | C274    | 187-1063-37 | 16V10uF     | C506    | 166-5611-50 | 560pF CH       |
| C133    | 166-5601-50 | 56pF CH        | C287    | 168-1022-55 | 1000pF K    | C507    | 166-5611-50 | 560pF CH       |
| C137    | 119-0000-05 | 1/10W 0 ohm JW | C305    | 187-4753-57 | 35V4.7uF    | C508    | 166-5611-50 | 560pF CH       |
| C144    | 168-1042-78 | 16V 0.1uF      | C306    | 168-1042-78 | 16V 0.1uF   | C509    | 166-2201-50 | 22pF CH        |
| C147    | 168-1022-55 | 1000pF K       | C307    | 166-1811-50 | 180pF CH    | C510    | 166-2201-50 | 22pF CH        |
| C149    | 168-1042-78 | 16V 0.1uF      | C309    | 166-1007-50 | 10pF CH     | C511    | 166-2201-50 | 22pF CH        |
| C152    | 178-1542-78 | 0.15uF         | C310    | 166-1007-50 | 10pF CH     | C512    | 166-2201-50 | 22pF CH        |
| C153    | 168-1032-55 | 0.01uF K       | C311    | 168-1042-78 | 16V 0.1uF   | C513    | 168-4722-55 | 4700pF K       |
| C154    | 168-1032-55 | 0.01uF K       | C312    | 168-1042-78 | 16V 0.1uF   | C514    | 166-5611-50 | 560pF CH       |
| C155    | 178-1052-78 | 1uF            | C313    | 168-1042-78 | 16V 0.1uF   | C515    | 166-5611-50 | 560pF CH       |
| C156    | 187-1063-37 | 16V10uF        | C314    | 168-1042-78 | 16V 0.1uF   | C516    | 166-5611-50 | 560pF CH       |
| C157    | 168-3322-55 | 3300pF K       | C317    | 187-4753-57 | 35V4.7uF    | C517    | 166-5611-50 | 560pF CH       |
| C158    | 168-1022-55 | 1000pF K       | C318    | 168-1042-78 | 16V 0.1uF   | C518    | 163-1063-35 | 16V10uF        |
| C159    | 168-4732-78 | 0.047uF K      | C319    | 187-4753-57 | 35V4.7uF    | C519    | 178-8232-78 | 0.082uF        |
| C160    | 166-1501-50 | 15pF CH        | C320    | 168-1042-78 | 16V 0.1uF   | C520    | 178-8232-78 | 0.082uF        |
| C161    | 168-1022-55 | 1000pF K       | C321    | 166-1011-50 | 100pF CH    | C521    | 178-8232-78 | 0.082uF        |
| C162    | 187-1073-37 | 16V100uF       | C322    | 168-1042-78 | 16V 0.1uF   | C522    | 178-8232-78 | 0.082uF        |
| C163    | 178-1052-78 | 1uF            | C323    | 187-4753-57 | 35V4.7uF    | C523    | 168-1042-78 | 16V 0.1uF      |
| C167    | 187-4763-17 | 6.3V47uF       | C324    | 168-1042-78 | 16V 0.1uF   | C524    | 042-0416-56 | 10V 22uF M TAN |
| C168    | 166-5611-50 | 560pF CH       | C325    | 168-2232-55 | 0.022uF K   | C525    | 178-1052-78 | 1uF            |
| C169    | 166-1007-50 | 10pF CH        | C326    | 189-3373-29 | 10V 330uF   | C526    | 168-1022-55 | 1000pF K       |
| C170    | 187-2253-67 | 50V2.2uF       | C327    | 042-0423-94 | 10V 4.7uF   | C527    | 042-1439-90 | 10V220uF       |
| C172    | 168-3312-55 | 330pF K        | C328    | 168-4732-78 | 0.047uF K   | C529    | 042-0643-50 | 35V 22uF       |
| C173    | 187-1073-27 | 10V100uF       | C329    | 187-2263-37 | 16V 22uF    | C531    | 042-0579-51 | 16V10uF        |
| C174    | 168-1042-78 | 16V 0.1uF      | C330    | 168-1022-55 | 1000pF K    | C533    | 168-1042-78 | 16V 0.1uF      |
| C175    | 043-0277-51 | 0.022uF        | C331    | 168-1042-78 | 16V 0.1uF   | C534    | 178-3342-78 | 0.33uF         |
| C176    | 187-1073-27 | 10V100uF       | C333    | 168-1022-55 | 1000pF K    | C535    | 187-1053-67 | 50V1uF         |
| C177    | 168-1042-78 | 16V 0.1uF      | C335    | 168-2232-55 | 0.022uF K   | C536    | 168-1042-78 | 16V 0.1uF      |
| C178    | 168-1042-78 | 16V 0.1uF      | C336    | 178-1052-78 | 1uF         | C538    | 189-1073-39 | 16V100uF       |
| C179    | 187-1073-27 | 10V100uF       | C337    | 168-3332-78 | 0.033uF K   | C539    | 172-1841-15 | 0.18uF         |
| C180    | 178-1052-78 | 1uF            | C338    | 168-3322-55 | 3300pF K    | C540    | 042-1465-00 | 16V 3300uF     |
| C181    | 168-1232-55 | 0.012uF K      | C339    | 168-3322-55 | 3300pF K    | C542    | 042-0423-97 | 16V 10uF       |
| C182    | 168-3932-78 | 0.039uF K      | C340    | 168-3322-55 | 3300pF K    | C543    | 168-1042-78 | 16V 0.1uF      |
| C183    | 168-3932-78 | 0.039uF K      | C341    | 168-3322-55 | 3300pF K    | C544    | 168-1042-78 | 16V 0.1uF      |
| C184    | 178-3332-78 | 0.033uF        | C342    | 168-2232-55 | 0.022uF K   | C545    | 189-1073-39 | 16V100uF       |
| C185    | 178-3332-78 | 0.033uF        | C343    | 168-4712-55 | 470pF K     | C547    | 168-2232-55 | 0.022uF K      |
| C186    | 168-4722-55 | 4700pF K       | C344    | 168-1042-78 | 16V 0.1uF   | C548    | 168-2232-55 | 0.022uF K      |
| C187    | 043-0277-51 | 0.022uF        | C345    | 168-1042-78 | 16V 0.1uF   | C549    | 168-6822-55 | 6800pF K       |
| C188    | 187-4763-37 | 16V47uF        | C346    | 168-2232-55 | 0.022uF K   | C550    | 168-2232-55 | 0.022uF K      |
| C189    | 168-1022-55 | 1000pF K       | C347    | 168-1042-78 | 16V 0.1uF   | C551    | 168-2232-55 | 0.022uF K      |
| C190    | 042-1458-90 | 50V 1uF LN     | C348    | 178-1052-78 | 1uF         | C552    | 168-2232-55 | 0.022uF K      |
| C191    | 168-2212-55 | 220pF K        | C349    | 189-3373-29 | 10V 330uF   | C553    | 168-2232-55 | 0.022uF K      |
| C192    | 187-4763-37 | 16V47uF        | C352    | 168-2222-55 | 2200pF K    | C554    | 168-2232-55 | 0.022uF K      |
| C193    | 166-1011-50 | 100pF CH       | C353    | 168-2222-55 | 2200pF K    | C555    | 168-2232-55 | 0.022uF K      |
| C194    | 166-1011-50 | 100pF CH       | C355    | 168-2222-55 | 2200pF K    | C556    | 178-1052-78 | 1uF            |
| C195    | 166-1011-50 | 100pF CH       | C356    | 189-1073-39 | 16V100uF    | C558    | 168-2232-55 | 0.022uF K      |
| C196    | 166-1011-50 | 100pF CH       | C357    | 168-2222-55 | 2200pF K    | C559    | 168-2232-55 | 0.022uF K      |
| C197    | 166-1801-50 | 18pF CH        | C358    | 189-1073-39 | 16V100uF    | C560    | 168-2232-55 | 0.022uF K      |
| C198    | 168-1022-55 | 1000pF K       | C361    | 168-1042-78 | 16V 0.1uF   | C561    | 168-2232-55 | 0.022uF K      |
| C199    | 166-1501-50 | 15pF CH        | C362    | 168-1042-78 | 16V 0.1uF   | C562    | 168-2232-55 | 0.022uF K      |
| C205    | 178-4732-78 | 0.047uF        | C363    | 168-1042-78 | 16V 0.1uF   | C563    | 168-2232-55 | 0.022uF K      |
| C206    | 178-4732-78 | 0.047uF        | C364    | 168-1042-78 | 16V 0.1uF   | C564    | 168-2232-55 | 0.022uF K      |
| C207    | 178-4732-78 | 0.047uF        | C370    | 168-1022-55 | 1000pF K    | C565    | 168-2232-55 | 0.022uF K      |
| C208    | 178-4732-78 | 0.047uF        | C371    | 168-1022-55 | 1000pF K    | C566    | 168-2232-55 | 0.022uF K      |
| C209    | 168-8222-55 | 8200pF K       | C401    | 168-1042-78 | 16V 0.1uF   | C585    | 163-1063-35 | 16V10uF        |
| C210    | 168-8222-55 | 8200pF K       | C402    | 168-1042-78 | 16V 0.1uF   | C586    | 168-1022-55 | 1000pF K       |
| C211    | 168-8222-55 | 8200pF K       | C403    | 166-2201-50 | 22pF CH     | C591    | 166-4701-50 | 47pF CH        |

| REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION        | REF No. | PART No.    | DESCRIPTION     |
|---------|-------------|-----------------|---------|-------------|--------------------|---------|-------------|-----------------|
| C593    | 042-0579-51 | 16V10uF         | L332    | 010-3105-62 | 1k ohm/100MHz      | R162    | 119-4731-15 | 1/10W 47k ohm   |
| C595    | 189-1073-39 | 16V100uF        | L333    | 010-3105-62 | 1k ohm/100MHz      | R163    | 119-1031-15 | 1/10W 10k ohm   |
| C596    | 189-1073-39 | 16V100uF        | L334    | 010-3105-62 | 1k ohm/100MHz      | R164    | 119-1011-15 | 1/10W 100 ohm   |
| C597    | 168-1022-55 | 1000pF K        | L335    | 119-0000-05 | 1/10W 0 ohm JW     | R165    | 119-1021-15 | 1/10W 1k ohm    |
| C598    | 168-1022-55 | 1000pF K        | L336    | 119-0000-05 | 1/10W 0 ohm JW     | R166    | 119-4741-15 | 1/10W 470k ohm  |
| C599    | 168-1022-55 | 1000pF K        | L337    | 119-0000-05 | 1/10W 0 ohm JW     | R167    | 119-1021-15 | 1/10W 1k ohm    |
| CCT401  | 050-0145-52 | 1/16W 1k ohm x4 | L338    | 119-0000-05 | 1/10W 0 ohm JW     | R168    | 119-2221-15 | 1/10W 2.2k ohm  |
| CCT404  | 050-0145-52 | 1/16W 1k ohm x4 | L339    | 119-0000-05 | 1/10W 0 ohm JW     | R169    | 119-4721-15 | 1/10W 4.7k ohm  |
| D101    | 001-3205-90 | 1SV251          | L340    | 119-0000-05 | 1/10W 0 ohm JW     | R170    | 119-1021-15 | 1/10W 1k ohm    |
| D102    | 001-3205-90 | 1SV251          | L341    | 119-0000-05 | 1/10W 0 ohm JW     | R171    | 119-1021-15 | 1/10W 1k ohm    |
| D204    | 001-0529-32 | MA8056-M        | L342    | 119-0000-05 | 1/10W 0 ohm JW     | R173    | 119-2701-15 | 1/10W 27 ohm    |
| D470    | 001-0516-90 | MA111           | L343    | 119-0000-05 | 1/10W 0 ohm JW     | R174    | 119-1001-15 | 1/10W 10 ohm    |
| D503    | 001-0516-90 | MA111           | L344    | 119-0000-05 | 1/10W 0 ohm JW     | R175    | 119-1501-15 | 1/10W 15 ohm    |
| D504    | 001-0516-90 | MA111           | L401    | 010-3601-50 | Common mode filter | R176    | 119-1031-15 | 1/10W 10k ohm   |
| D505    | 001-0529-48 | MA8091-H        | L402    | 010-3406-54 | NLV25 2.2uH J      | R177    | 119-1031-15 | 1/10W 10k ohm   |
| D506    | 001-0516-90 | MA111           | L403    | 010-3105-62 | 1k ohm/100MHz      | R178    | 119-1021-15 | 1/10W 1k ohm    |
| D507    | 001-0516-90 | MA111           | L404    | 010-3105-62 | 1k ohm/100MHz      | R179    | 119-1021-15 | 1/10W 1k ohm    |
| D508    | 001-2015-00 | RL253           | L501    | 010-8021-00 | 490uH              | R180    | 119-2221-15 | 1/10W 2.2k ohm  |
| D510    | 001-0466-90 | S5688B          | L502    | 010-3406-66 | NLV25 22uH J       | R181    | 119-2221-15 | 1/10W 2.2k ohm  |
| D511    | 001-0516-90 | MA111           | L503    | 010-3105-62 | 1k ohm/100MHz      | R183    | 119-3321-15 | 1/10W 3.3k ohm  |
| D512    | 001-0529-34 | MA8062-L        | L504    | 010-3105-62 | 1k ohm/100MHz      | R184    | 119-2221-15 | 1/10W 2.2k ohm  |
| D590    | 001-0504-48 | HZS9C2L         | L505    | 010-3104-54 | 600 ohm/100MHz     | R185    | 119-1021-15 | 1/10W 1k ohm    |
| IC151   | 051-3020-90 | NJM4565V        | L506    | 010-3105-62 | 1k ohm/100MHz      | R186    | 119-4721-15 | 1/10W 4.7k ohm  |
| IC152   | 051-4617-90 | LA1061M-TE-L    | L507    | 010-3105-62 | 1k ohm/100MHz      | R188    | 119-4721-15 | 1/10W 4.7k ohm  |
| IC153   | 051-4607-90 | SAA6581T        | P201    | 076-0368-20 | 20P                | R190    | 119-1031-15 | 1/10W 10k ohm   |
| IC155   | 051-6212-08 | LC72191JM-TLM   | P401    | 076-0478-58 | 8P                 | R192    | 119-0000-05 | 1/10W 0 ohm JW  |
| IC270   | 051-3340-00 | LD1085P         | P402    | 076-0662-60 | 10P PLUG           | R194    | 119-8201-15 | 1/10W 82 ohm    |
| IC301   | 051-6706-00 | SAF7730H/N114   | Q101    | 125-2026-91 | UN5211             | R195    | 119-1841-15 | 1/10W 180k ohm  |
| IC401   | 051-9421-91 | BR24L08FVM-WTR  | Q140    | 192-4116-00 | 2SC4116            | R196    | 119-4721-15 | 1/10W 4.7k ohm  |
| IC402   | 052-3188-00 | M30843MW-M02GP  | Q152    | 192-4116-00 | 2SC4116            | R197    | 119-2221-15 | 1/10W 2.2k ohm  |
| IC403   | 051-6607-08 | PCA82C250T-T    | Q153    | 192-4116-00 | 2SC4116            | R202    | 119-3011-15 | 1/10W 300 ohm   |
| IC404   | 051-5420-08 | S-80943CNMC-G9D | Q155    | 125-2026-91 | UN5211             | R203    | 119-3011-15 | 1/10W 300 ohm   |
| IC501   | 051-3019-90 | NJM2060V        | Q156    | 125-2026-91 | UN5211             | R206    | 032-0140-80 | 1/10W 18k ohm F |
| IC502   | 051-3343-00 | NJM2396F33      | Q157    | 190-1162-00 | 2SA1162            | R207    | 032-0140-80 | 1/10W 18k ohm F |
| IC503   | 051-2055-00 | TDA8593J/N3     | Q159    | 190-1162-00 | 2SA1162            | R208    | 032-0140-80 | 1/10W 18k ohm F |
| IC504   | 051-3340-00 | LD1085P         | Q160    | 125-2026-91 | UN5211             | R209    | 032-0140-80 | 1/10W 18k ohm F |
| IC505   | 051-3341-90 | BD3931FP        | Q161    | 192-4116-51 | 2SC4116 G,L        | R217    | 119-0000-05 | 1/10W 0 ohm JW  |
| IC506   | 051-5441-08 | BD4828G-TR      | Q162    | 192-4116-51 | 2SC4116 G,L        | R218    | 119-0000-05 | 1/10W 0 ohm JW  |
| J201    | 074-1302-12 | SOCKET(TH12)    | Q204    | 125-2026-91 | UN5211             | R220    | 119-0000-05 | 1/10W 0 ohm JW  |
| J203    | 074-1237-70 | 20P             | Q205    | 193-2118-00 | 2SD2118F5 Q,R,S    | R224    | 010-3104-54 | 600 ohm/100MHz  |
| J250    | 074-1302-08 | SOCKET(TH08)    | Q206    | 125-9017-92 | UMD3N-TR           | R225    | 119-0000-05 | 1/10W 0 ohm JW  |
| J501    | 074-4009-20 | SOCKET(TH18)    | Q301    | 125-7005-90 | PHK04P02T          | R226    | 119-0000-05 | 1/10W 0 ohm JW  |
| L101    | 010-2198-65 | 0.1uH           | Q302    | 125-2026-91 | UN5211             | R227    | 119-1021-15 | 1/10W 1k ohm    |
| L102    | 010-2198-53 | 5.6uH           | Q308    | 125-2026-91 | UN5211             | R229    | 117-2211-15 | 1/8W 220 ohm    |
| L103    | 010-2312-52 | 0.27uH          | Q507    | 191-1240-00 | 2SB1240            | R230    | 119-1041-15 | 1/10W 100k ohm  |
| L104    | 010-2003-04 | 30uH            | Q508    | 125-2026-95 | UN521N             | R250    | 119-2731-15 | 1/10W 27k ohm   |
| L160    | 010-3406-66 | NLV25 22uH J    | Q509    | 192-4116-51 | 2SC4116 G,L        | R251    | 119-2731-15 | 1/10W 27k ohm   |
| L161    | 010-3406-66 | NLV25 22uH J    | Q510    | 191-1204-61 | 2SB1204 R,S,T      | R252    | 032-0140-80 | 1/10W 18k ohm F |
| L202    | 010-3105-62 | 1k ohm/100MHz   | Q512    | 125-2026-91 | UN5211             | R253    | 032-0140-80 | 1/10W 18k ohm F |
| L204    | 010-3105-62 | 1k ohm/100MHz   | Q513    | 190-1298-00 | 2SA1298            | R254    | 032-0140-80 | 1/10W 18k ohm F |
| L205    | 010-3105-62 | 1k ohm/100MHz   | Q517    | 192-4116-00 | 2SC4116            | R255    | 032-0140-80 | 1/10W 18k ohm F |
| L206    | 010-3105-62 | 1k ohm/100MHz   | Q590    | 193-2118-00 | 2SD2118F5 Q,R,S    | R271    | 119-4731-15 | 1/10W 47k ohm   |
| L207    | 010-3104-54 | 600 ohm/100MHz  | R101    | 119-1021-15 | 1/10W 1k ohm       | R272    | 119-4731-15 | 1/10W 47k ohm   |
| L302    | 010-3105-62 | 1k ohm/100MHz   | R102    | 119-1031-15 | 1/10W 10k ohm      | R273    | 032-0140-98 | 1/10W 330 ohm F |
| L303    | 010-3105-62 | 1k ohm/100MHz   | R105    | 119-0000-05 | 1/10W 0 ohm JW     | R274    | 032-0140-93 | 1/10W 2k ohm F  |
| L307    | 010-3105-62 | 1k ohm/100MHz   | R107    | 119-0000-05 | 1/10W 0 ohm JW     | R301    | 032-0140-80 | 1/10W 18k ohm F |
| L308    | 010-3105-62 | 1k ohm/100MHz   | R108    | 119-0000-05 | 1/10W 0 ohm JW     | R302    | 032-0140-80 | 1/10W 18k ohm F |
| L311    | 010-3105-62 | 1k ohm/100MHz   | R124    | 116-4711-15 | 1/4W 470 ohm       | R303    | 032-0140-80 | 1/10W 18k ohm F |
| L312    | 010-3105-62 | 1k ohm/100MHz   | R125    | 119-0000-05 | 1/10W 0 ohm JW     | R304    | 032-0140-80 | 1/10W 18k ohm F |
| L313    | 010-3105-62 | 1k ohm/100MHz   | R126    | 119-0000-05 | 1/10W 0 ohm JW     | R305    | 119-4721-15 | 1/10W 4.7k ohm  |
| L314    | 010-3105-62 | 1k ohm/100MHz   | R138    | 116-4711-15 | 1/4W 470 ohm       | R306    | 119-4721-15 | 1/10W 4.7k ohm  |
| L315    | 010-3105-62 | 1k ohm/100MHz   | R141    | 119-1031-15 | 1/10W 10k ohm      | R307    | 119-0000-05 | 1/10W 0 ohm JW  |
| L316    | 010-2198-51 | 0.22uH          | R142    | 119-1031-15 | 1/10W 10k ohm      | R311    | 119-1031-15 | 1/10W 10k ohm   |
| L320    | 010-3105-62 | 1k ohm/100MHz   | R148    | 119-1021-15 | 1/10W 1k ohm       | R315    | 032-0140-50 | 1/10W 10k ohm F |
| L321    | 010-3105-62 | 1k ohm/100MHz   | R149    | 119-1021-15 | 1/10W 1k ohm       | R316    | 119-1031-15 | 1/10W 10k ohm   |
| L322    | 010-3105-62 | 1k ohm/100MHz   | R152    | 119-1041-15 | 1/10W 100k ohm     | R317    | 119-1031-15 | 1/10W 10k ohm   |
| L323    | 010-3105-62 | 1k ohm/100MHz   | R153    | 119-1041-15 | 1/10W 100k ohm     | R318    | 032-0140-50 | 1/10W 10k ohm F |
| L324    | 010-3105-62 | 1k ohm/100MHz   | R154    | 119-2731-15 | 1/10W 27k ohm      | R319    | 032-0140-50 | 1/10W 10k ohm F |
| L325    | 010-3105-62 | 1k ohm/100MHz   | R155    | 119-2731-15 | 1/10W 27k ohm      | R321    | 032-0140-50 | 1/10W 10k ohm F |
| L326    | 119-0000-05 | 1/10W 0 ohm JW  | R156    | 119-1041-15 | 1/10W 100k ohm     | R322    | 119-1041-15 | 1/10W 100k ohm  |
| L327    | 010-3105-62 | 1k ohm/100MHz   | R157    | 119-1041-15 | 1/10W 100k ohm     | R323    | 119-1041-15 | 1/10W 100k ohm  |
| L328    | 010-3105-62 | 1k ohm/100MHz   | R158    | 119-1031-15 | 1/10W 10k ohm      | R324    | 119-1001-15 | 1/10W 10 ohm    |
| L329    | 010-3105-62 | 1k ohm/100MHz   | R159    | 119-1031-15 | 1/10W 10k ohm      | R325    | 119-1031-15 | 1/10W 10k ohm   |
| L330    | 010-3105-62 | 1k ohm/100MHz   | R160    | 119-5631-15 | 1/10W 56k ohm      | R326    | 119-1031-15 | 1/10W 10k ohm   |
| L331    | 010-3105-62 | 1k ohm/100MHz   | R161    | 119-3911-15 | 1/10W 390 ohm      | R327    | 032-0140-50 | 1/10W 10k ohm F |

| REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|-----------------|---------|-------------|-----------------|---------|-------------|------------------------|
| R328    | 032-0140-50 | 1/10W 10k ohm F | R426    | 116-6201-15 | 1/4W 62 ohm     | R541    | 116-1221-15 | 1/4W 1.2k ohm          |
| R329    | 032-0140-50 | 1/10W 10k ohm F | R427    | 116-6201-15 | 1/4W 62 ohm     | R542    | 116-1221-15 | 1/4W 1.2k ohm          |
| R330    | 032-0140-50 | 1/10W 10k ohm F | R428    | 119-1031-15 | 1/10W 10k ohm   | R543    | 116-1221-15 | 1/4W 1.2k ohm          |
| R332    | 032-0140-50 | 1/10W 10k ohm F | R431    | 119-1031-15 | 1/10W 10k ohm   | R544    | 116-4791-15 | 1/4W 4.7 ohm           |
| R333    | 032-0140-50 | 1/10W 10k ohm F | R434    | 119-1031-15 | 1/10W 10k ohm   | R545    | 119-1031-15 | 1/10W 10k ohm          |
| R335    | 119-1031-15 | 1/10W 10k ohm   | R442    | 119-4731-15 | 1/10W 47k ohm   | R546    | 119-1031-15 | 1/10W 10k ohm          |
| R336    | 119-1031-15 | 1/10W 10k ohm   | R453    | 119-2221-15 | 1/10W 2.2k ohm  | R548    | 119-4721-15 | 1/10W 4.7k ohm         |
| R338    | 119-1011-15 | 1/10W 100 ohm   | R470    | 119-3311-15 | 1/10W 330 ohm   | R549    | 116-4791-15 | 1/4W 4.7 ohm           |
| R339    | 119-1011-15 | 1/10W 100 ohm   | R471    | 119-1021-15 | 1/10W 1k ohm    | R550    | 119-1521-15 | 1/10W 1.5k ohm         |
| R340    | 010-3104-54 | 600 ohm/100MHz  | R472    | 119-1021-15 | 1/10W 1k ohm    | R551    | 119-0000-05 | 1/10W 0 ohm JW         |
| R343    | 119-1031-15 | 1/10W 10k ohm   | R475    | 119-1021-15 | 1/10W 1k ohm    | R552    | 119-1031-15 | 1/10W 10k ohm          |
| R344    | 119-1031-15 | 1/10W 10k ohm   | R480    | 119-2231-15 | 1/10W 22k ohm   | R554    | 119-1011-15 | 1/10W 100 ohm          |
| R350    | 119-1021-15 | 1/10W 1k ohm    | R482    | 119-1521-15 | 1/10W 1.5k ohm  | R555    | 119-1011-15 | 1/10W 100 ohm          |
| R351    | 119-1021-15 | 1/10W 1k ohm    | R485    | 119-4731-15 | 1/10W 47k ohm   | R557    | 119-4731-15 | 1/10W 47k ohm          |
| R352    | 119-1021-15 | 1/10W 1k ohm    | R486    | 119-0000-05 | 1/10W 0 ohm JW  | R558    | 032-0148-50 | 1/10W 100k ohm         |
| R353    | 119-1021-15 | 1/10W 1k ohm    | R487    | 119-1021-15 | 1/10W 1k ohm    | R559    | 032-0148-54 | 1/16W 180k ohm         |
| R354    | 119-0000-05 | 1/10W 0 ohm JW  | R490    | 119-0000-05 | 1/10W 0 ohm JW  | R563    | 116-2721-15 | 1/4W 2.2k ohm          |
| R355    | 119-0000-05 | 1/10W 0 ohm JW  | R496    | 119-1021-15 | 1/10W 1k ohm    | R564    | 116-1531-15 | 1/4W 15k ohm           |
| R356    | 119-4731-15 | 1/10W 47k ohm   | R501    | 119-1031-15 | 1/10W 10k ohm   | R568    | 119-4731-15 | 1/10W 47k ohm          |
| R363    | 032-0140-50 | 1/10W 10k ohm F | R502    | 119-1031-15 | 1/10W 10k ohm   | R569    | 119-1031-15 | 1/10W 10k ohm          |
| R364    | 032-0140-50 | 1/10W 10k ohm F | R503    | 119-1031-15 | 1/10W 10k ohm   | R570    | 119-5611-15 | 1/10W 560 ohm          |
| R367    | 119-0000-05 | 1/10W 0 ohm JW  | R504    | 119-1031-15 | 1/10W 10k ohm   | R576    | 119-0000-05 | 1/10W 0 ohm JW         |
| R368    | 116-1001-15 | 1/4W 10 ohm     | R506    | 119-1031-15 | 1/10W 10k ohm   | R577    | 117-1001-15 | 1/8W 10 ohm            |
| R370    | 119-1011-15 | 1/10W 100 ohm   | R507    | 119-1031-15 | 1/10W 10k ohm   | R578    | 117-1001-15 | 1/8W 10 ohm            |
| R371    | 119-0000-05 | 1/10W 0 ohm JW  | R509    | 119-1031-15 | 1/10W 10k ohm   | R579    | 117-1001-15 | 1/8W 10 ohm            |
| R372    | 119-0000-05 | 1/10W 0 ohm JW  | R510    | 119-1031-15 | 1/10W 10k ohm   | R580    | 117-1001-15 | 1/8W 10 ohm            |
| R401    | 119-1021-15 | 1/10W 1k ohm    | R513    | 119-1031-15 | 1/10W 10k ohm   | R590    | 119-0000-05 | 1/10W 0 ohm JW         |
| R402    | 119-1021-15 | 1/10W 1k ohm    | R514    | 119-1031-15 | 1/10W 10k ohm   | R593    | 119-1031-15 | 1/10W 10k ohm          |
| R403    | 119-1021-15 | 1/10W 1k ohm    | R515    | 119-1051-15 | 1/10W 1M ohm    | R595    | 116-3911-15 | 1/4W 390 ohm           |
| R404    | 119-0000-05 | 1/10W 0 ohm JW  | R516    | 119-1051-15 | 1/10W 1M ohm    | R596    | 117-1001-15 | 1/8W 10 ohm            |
| R405    | 119-1021-15 | 1/10W 1k ohm    | R517    | 119-1051-15 | 1/10W 1M ohm    | R597    | 117-1001-15 | 1/8W 10 ohm            |
| R406    | 119-1021-15 | 1/10W 1k ohm    | R518    | 119-1051-15 | 1/10W 1M ohm    | R598    | 117-1001-15 | 1/8W 10 ohm            |
| R407    | 119-1021-15 | 1/10W 1k ohm    | R519    | 119-1031-15 | 1/10W 10k ohm   | R599    | 117-1001-15 | 1/8W 10 ohm            |
| R409    | 119-3311-15 | 1/10W 330 ohm   | R520    | 119-1031-15 | 1/10W 10k ohm   | SUP101  | 060-0122-91 | DSP-141N-S00B          |
| R410    | 119-3311-15 | 1/10W 330 ohm   | R521    | 119-1031-15 | 1/10W 10k ohm   | SUP102  | 060-0122-91 | DSP-141N-S00B          |
| R411    | 119-4721-15 | 1/10W 4.7k ohm  | R522    | 119-1031-15 | 1/10W 10k ohm   | TH501   | 002-0229-90 | PTH8L05B               |
| R412    | 119-4721-15 | 1/10W 4.7k ohm  | R523    | 119-1031-15 | 1/10W 10k ohm   | TM101   | 073-0768-90 | TERMINAL               |
| R413    | 119-4731-15 | 1/10W 47k ohm   | R524    | 119-1031-15 | 1/10W 10k ohm   | TM401   | 073-0768-90 | TERMINAL               |
| R414    | 119-4731-15 | 1/10W 47k ohm   | R526    | 116-1221-15 | 1/4W 1.2k ohm   | TM402   | 073-0778-90 | TERMINAL               |
| R415    | 119-4731-15 | 1/10W 47k ohm   | R527    | 116-1091-15 | 1/4W 1 ohm      | TM501   | 073-0778-90 | TERMINAL               |
| R416    | 119-4721-15 | 1/10W 4.7k ohm  | R529    | 119-1031-15 | 1/10W 10k ohm   | TM503   | 073-0778-90 | TERMINAL               |
| R417    | 119-4721-15 | 1/10W 4.7k ohm  | R530    | 119-4721-15 | 1/10W 4.7k ohm  | VR152   | 012-4318-63 | 470k ohm               |
| R418    | 119-1011-15 | 1/10W 100 ohm   | R531    | 119-4721-15 | 1/10W 4.7k ohm  | VR153   | 012-4318-56 | VR 10k ohm             |
| R419    | 119-1011-15 | 1/10W 100 ohm   | R534    | 032-0140-98 | 1/10W 330 ohm F | X102    | 061-3013-00 | 4.33MHz                |
| R420    | 119-1011-15 | 1/10W 100 ohm   | R535    | 032-0140-93 | 1/10W 2k ohm F  | X153    | 061-1066-00 | 7.2MHz                 |
| R421    | 119-1011-15 | 1/10W 100 ohm   | R536    | 119-0000-05 | 1/10W 0 ohm JW  | X302    | 061-3537-90 | 41.6MHz                |
| R422    | 119-1031-15 | 1/10W 10k ohm   | R537    | 119-0000-05 | 1/10W 0 ohm JW  | X401    | 061-3541-90 | CRYSTAL 10MHz          |
| R423    | 119-1031-15 | 1/10W 10k ohm   | R538    | 119-0000-05 | 1/10W 0 ohm JW  | PWB     | 039-2623-00 | PWB(WITHOUT COMPONENT) |
| R424    | 119-1011-15 | 1/10W 100 ohm   | R539    | 119-0000-05 | 1/10W 0 ohm JW  |         |             |                        |
| R425    | 119-1011-15 | 1/10W 100 ohm   | R540    | 119-0000-05 | 1/10W 0 ohm JW  |         |             |                        |

#### Sub PWB section(B2)

| REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION    | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|---------------|---------|-------------|----------------|---------|-------------|------------------------|
| C820    | 043-0548-50 | 2.2uF         | D825    | 001-0516-90 | MA111          | R824    | 119-5621-15 | 1/10W 5.6k ohm         |
| C821    | 043-0548-50 | 2.2uF         | D826    | 001-0516-90 | MA111          | R825    | 119-5621-15 | 1/10W 5.6k ohm         |
| C822    | 043-0548-50 | 2.2uF         | J820    | 074-1013-00 | SOCKET(A12)    | R826    | 119-5631-15 | 1/10W 56k ohm          |
| C823    | 043-0548-50 | 2.2uF         | J821    | 074-0898-20 | OUTLET SOCKET  | R827    | 119-5631-15 | 1/10W 56k ohm          |
| C824    | 168-2232-55 | 0.022uF K     | L801    | 010-3105-62 | 1k ohm/100MHz  | R828    | 119-5631-15 | 1/10W 56k ohm          |
| C825    | 168-1022-55 | 1000pF K      | L802    | 010-3105-62 | 1k ohm/100MHz  | R829    | 119-1031-15 | 1/10W 10k ohm          |
| C826    | 168-1022-55 | 1000pF K      | L803    | 010-3105-62 | 1k ohm/100MHz  | R830    | 119-1031-15 | 1/10W 10k ohm          |
| C827    | 168-1022-55 | 1000pF K      | L804    | 010-3105-62 | 1k ohm/100MHz  | R831    | 119-1031-15 | 1/10W 10k ohm          |
| C828    | 168-1022-55 | 1000pF K      | Q802    | 125-9017-92 | UMD3N-TR       | R832    | 116-8211-15 | 1/4W 820 ohm           |
| C829    | 168-2222-55 | 2200pF K      | Q803    | 125-9017-92 | UMD3N-TR       | R833    | 116-8211-15 | 1/4W 820 ohm           |
| C830    | 168-2222-55 | 2200pF K      | Q820    | 192-4116-00 | 2SC4116        | R834    | 116-8211-15 | 1/4W 820 ohm           |
| C831    | 168-1022-55 | 1000pF K      | Q823    | 192-4116-00 | 2SC4116        | R835    | 116-8211-15 | 1/4W 820 ohm           |
| C832    | 168-1022-55 | 1000pF K      | Q824    | 192-4116-00 | 2SC4116        | R836    | 119-5631-15 | 1/10W 56k ohm          |
| C833    | 168-1022-55 | 1000pF K      | Q825    | 192-4116-00 | 2SC4116        | R837    | 119-1031-15 | 1/10W 10k ohm          |
| C834    | 168-1022-55 | 1000pF K      | Q826    | 125-0020-91 | UN5111         | R840    | 119-2231-15 | 1/10W 22k ohm          |
| D820    | 001-0529-44 | MA8082-M      | Q829    | 125-2026-91 | UN5211         | R841    | 119-4731-15 | 1/10W 47k ohm          |
| D821    | 001-0584-33 | MA8200        | R820    | 119-3011-15 | 1/10W 300 ohm  | R842    | 119-4731-15 | 1/10W 47k ohm          |
| D822    | 001-0584-33 | MA8200        | R821    | 119-3011-15 | 1/10W 300 ohm  | PWB     | 039-2559-00 | PWB(WITHOUT COMPONENT) |
| D823    | 001-4305-39 | UDZSTE-17 36B | R822    | 119-1021-15 | 1/10W 1k ohm   |         |             |                        |
| D824    | 001-0516-90 | MA111         | R823    | 119-5621-15 | 1/10W 5.6k ohm |         |             |                        |

### ES PWB section(B3)

| REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|---------------|---------|-------------|---------------|---------|-------------|------------------------|
| D803    | 001-7069-90 | LED YELLOW    | R805    | 116-3321-15 | 1/4W 3.3k ohm | TM801   | 073-0778-90 | TERMINAL               |
| D805    | 001-7069-90 | LED YELLOW    | R806    | 116-3321-15 | 1/4W 3.3k ohm | TM802   | 073-0778-90 | TERMINAL               |
| D806    | 001-7069-90 | LED YELLOW    | R807    | 116-3321-15 | 1/4W 3.3k ohm | TM803   | 073-0778-90 | TERMINAL               |
| D807    | 001-7069-90 | LED YELLOW    | S801    | 013-7415-50 | SPVG110400    | TM804   | 073-0778-90 | TERMINAL               |
| J801    | 074-3003-60 | 10P SOCKET    | S802    | 013-6300-51 | SJPGAA032A    | PWB     | 039-2561-01 | PWB(WITHOUT COMPONENT) |
| R804    | 116-3321-15 | 1/4W 3.3k ohm | S803    | 013-6300-51 | SJPGAA032A    |         |             |                        |

### CD PWB section(B4)

| REF No. | PART No.    | DESCRIPTION         | REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|---------------------|---------|-------------|-----------------|---------|-------------|------------------------|
| C1      | 168-4735-56 | 0.047uF Z           | IC3     | 052-5061-01 | M30621MCM-4S5GP | R26     | 119-4721-15 | 1/10W 4.7k ohm         |
| C2      | 168-4735-56 | 0.047uF Z           | IC4     | 051-9402-78 | BR93L56RFVM-W   | R27     | 119-1031-15 | 1/10W 10k ohm          |
| C4      | 168-1222-55 | 1200pF K            | IC5     | 051-3332-90 | NUJ7222U33      | R28     | 119-1041-15 | 1/10W 100k ohm         |
| C5      | 163-2263-35 | 16V22uF             | IC6     | 051-3293-90 | BA033SFP-E2     | R29     | 119-1041-15 | 1/10W 100k ohm         |
| C6      | 168-1222-55 | 1200pF K            | J1      | 074-1189-95 | 45P             | R31     | 119-4731-15 | 1/10W 47k ohm          |
| C12     | 168-1222-55 | 1200pF K            | J3      | 074-1237-70 | 20P             | R32     | 119-0000-05 | 1/10W 0 ohm JW         |
| C15     | 168-1222-55 | 1200pF K            | P1      | 076-0478-55 | PLUG            | R35     | 119-0000-05 | 1/10W 0 ohm JW         |
| C16     | 163-2263-35 | 16V22uF             | Q3      | 190-1162-00 | 2SA1162         | R36     | 119-4731-15 | 1/10W 47k ohm          |
| C18     | 168-1045-56 | 0.1uF Z             | Q4      | 198-3018-00 | 2SK3018         | R37     | 119-4731-15 | 1/10W 47k ohm          |
| C19     | 166-1011-50 | 100pF CH            | Q5      | 131-1188-50 | 2SB1188PQR      | R38     | 119-2231-15 | 1/10W 22k ohm          |
| C21     | 168-1032-55 | 0.01uF K            | Q6      | 198-3018-00 | 2SK3018         | R39     | 119-2231-15 | 1/10W 22k ohm          |
| C22     | 168-1045-56 | 0.1uF Z             | Q7      | 125-2004-92 | RN1402          | R40     | 119-2231-15 | 1/10W 22k ohm          |
| C23     | 168-1045-56 | 0.1uF Z             | Q8      | 125-2004-92 | RN1402          | R41     | 119-4711-15 | 1/10W 470 ohm          |
| C24     | 168-1032-55 | 0.01uF K            | Q9      | 125-0014-92 | DTA114EK        | R42     | 119-2231-15 | 1/10W 22k ohm          |
| C25     | 163-1073-15 | 6.3V100uF           | Q53     | 193-0601-00 | 2SD601A         | R43     | 119-2241-15 | 1/10W 220k ohm         |
| C26     | 178-1052-78 | 1uF                 | R2      | 119-2211-15 | 1/10W 220 ohm   | R60     | 119-0000-05 | 1/10W 0 ohm JW         |
| C27     | 168-1045-56 | 0.1uF Z             | R4      | 119-4731-15 | 1/10W 47k ohm   | R530    | 119-4731-15 | 1/10W 47k ohm          |
| C28     | 042-0671-01 | 10V 47uF TA         | R8      | 119-4731-15 | 1/10W 47k ohm   | R550    | 119-4731-15 | 1/10W 47k ohm          |
| C29     | 168-1045-56 | 0.1uF Z             | R10     | 119-2211-15 | 1/10W 220 ohm   | TM1     | 073-0768-90 | TERMINAL               |
| C30     | 178-3342-78 | 0.33uF              | R13     | 119-1041-15 | 1/10W 100k ohm  | TM2     | 073-0766-90 | TERMINAL               |
| C31     | 042-1673-00 | 10V 220uF           | R14     | 119-2221-15 | 1/10W 2.2k ohm  | TM4     | 073-0766-90 | TERMINAL               |
| CCT4    | 050-0140-55 | 1/32W 2.2k ohmx4J   | R15     | 119-1041-15 | 1/10W 100k ohm  | TM5     | 073-0766-90 | TERMINAL               |
| CCT5    | 050-0145-54 | 1/16W 47k ohm x4    | R16     | 119-1021-15 | 1/10W 1k ohm    | X1      | 060-1533-90 | CSTCE10M0G52-R0        |
| CCT6    | 050-0145-53 | 1/16W 220k ohm x4 J | R20     | 119-4731-15 | 1/10W 47k ohm   | PWB     | 039-2532-20 | PWB(WITHOUT COMPONENT) |
| D2      | 001-2610-90 | RB480KTL            | R24     | 119-4731-15 | 1/10W 47k ohm   |         |             |                        |
| IC2     | 051-5445-08 | BD5227G-TR          | R25     | 119-1031-15 | 1/10W 10k ohm   |         |             |                        |

### DPS PWB section(B5)

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION         |
|---------|-------------|-------------|---------|-------------|-------------|---------|-------------|---------------------|
| C1      | 042-0671-01 | 10V 47uF TA | C37     | 168-1045-56 | 0.1uF Z     | CCT1    | 050-0140-68 | 1/32W 3.3k ohm x4J  |
| C2      | 168-4735-56 | 0.047uF Z   | C38     | 042-0671-01 | 10V 47uF TA | CCT4    | 050-0140-63 | 1/32W 47k ohm x4J   |
| C3      | 046-4722-58 | 4700pF      | C39     | 178-1052-78 | 1uF         | D1      | 001-0367-91 | 1SS226              |
| C4      | 046-1032-78 | 0.01uF      | C40     | 045-6801-50 | 68pF        | D2      | 001-2610-90 | RB480KTL            |
| C5      | 168-1045-56 | 0.1uF Z     | C41     | 168-1045-56 | 0.1uF Z     | IC2     | 051-6399-00 | TC94A15F            |
| C6      | 042-0671-01 | 10V 47uF TA | C42     | 178-1052-78 | 1uF         | IC3     | 051-6060-08 | BD7961FM-E2         |
| C7      | 168-1045-56 | 0.1uF Z     | C43     | 042-0671-01 | 10V 47uF TA | IC4     | 051-7518-18 | SN74LVC139APWR      |
| C8      | 168-1045-56 | 0.1uF Z     | C44     | 046-6812-58 | 680pF       | IC5     | 052-5062-03 | MBM29DL800BA-90PFTN |
| C9      | 045-1007-50 | 10pF        | C45     | 168-1045-56 | 0.1uF Z     | IC6     | 051-7518-18 | SN74LVC139APWR      |
| C10     | 168-1045-56 | 0.1uF Z     | C46     | 168-1045-56 | 0.1uF Z     | IC7     | 051-9330-00 | K4S641632F-TC60     |
| C11     | 045-1007-50 | 10pF        | C47     | 042-0671-01 | 10V 47uF TA | IC8     | 051-7203-48 | SN74LV74APW         |
| C12     | 168-1045-56 | 0.1uF Z     | C48     | 168-5632-78 | 16V 0.056uF | IC9     | 051-6700-00 | TMS320DA140         |
| C13     | 042-0672-00 | 25V 47uF TA | C49     | 168-1045-56 | 0.1uF Z     |         |             | PGE160              |
| C14     | 168-4735-56 | 0.047uF Z   | C50     | 168-1045-56 | 0.1uF Z     | IC10    | 051-3315-90 | TPS76316DBVR        |
| C15     | 168-4735-56 | 0.047uF Z   | C51     | 168-1045-56 | 0.1uF Z     | IC11    | 051-7221-58 | SN74AHC1G04         |
| C16     | 168-4735-56 | 0.047uF Z   | C53     | 168-1045-56 | 0.1uF Z     |         |             | HDCR                |
| C17     | 178-1052-78 | 1uF         | C54     | 042-0671-01 | 10V 47uF TA | IC12    | 051-7525-08 | SN74LVC2GU04        |
| C18     | 045-4701-50 | 47pF        | C56     | 168-4712-55 | 470pF K     |         |             | DCR                 |
| C19     | 168-1045-56 | 0.1uF Z     | C57     | 046-1032-78 | 0.01uF      | IC13    | 051-7526-08 | SN74LVC1G126        |
| C20     | 046-4712-58 | 470pF       | C58     | 168-4712-55 | 470pF K     |         |             | DCR                 |
| C21     | 046-4712-58 | 470pF       | C59     | 168-1045-56 | 0.1uF Z     | J1      | 074-1201-65 | 15P                 |
| C22     | 168-1045-56 | 0.1uF Z     | C60     | 168-1045-56 | 0.1uF Z     | J2      | 074-1138-56 | 6P                  |
| C23     | 046-1532-78 | 0.015uF     | C61     | 046-1032-78 | 0.01uF      | J3      | 074-1059-76 | 26P                 |
| C24     | 168-1045-56 | 0.1uF Z     | C62     | 042-0671-01 | 10V 47uF TA | J4      | 074-1189-95 | 45P                 |
| C25     | 046-6822-58 | 6800pF      | C63     | 046-1032-78 | 0.01uF      | J5      | 074-1201-60 | 10P                 |
| C26     | 046-1032-78 | 0.01uF      | C64     | 168-1045-56 | 0.1uF Z     | L2      | 010-3104-54 | MPZ1608S601AT       |
| C28     | 046-1022-58 | 1000pF      | C65     | 045-1201-50 | 12pF        | L3      | 010-3104-54 | MPZ1608S601AT       |
| C29     | 046-3332-78 | 0.033uF     | C66     | 046-1032-78 | 0.01uF      | Q1      | 131-1188-50 | 2SB1188PQR          |
| C32     | 046-4722-58 | 4700pF      | C67     | 046-1032-78 | 0.01uF      | Q2      | 131-1188-50 | 2SB1188PQR          |
| C33     | 046-1522-58 | 1500pF      | C68     | 168-1045-56 | 0.1uF Z     | Q3      | 125-2004-92 | RN1402              |
| C34     | 168-1045-56 | 0.1uF Z     | C69     | 045-1201-50 | 12pF        | R1      | 033-1021-15 | 1/10W 1k ohm        |
| C35     | 046-1532-78 | 0.015uF     | C101    | 046-1032-78 | 0.01uF      | R2      | 033-1021-15 | 1/10W 1k ohm        |
| C36     | 168-1045-56 | 0.1uF Z     | C102    | 046-1032-78 | 0.01uF      |         |             |                     |

| REF No. | PART No.    | DESCRIPTION    | REF No. | PART No.    | DESCRIPTION    | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|----------------|---------|-------------|----------------|---------|-------------|------------------------|
| R3      | 033-3311-15 | 1/10W 330 ohm  | R27     | 033-1011-15 | 1/10W 100 ohm  | R53     | 033-4731-15 | 1/10W 47k ohm          |
| R4      | 033-2211-15 | 1/10W 220 ohm  | R28     | 033-4731-15 | 1/10W 47k ohm  | R63     | 033-2231-15 | 1/10W 22k ohm          |
| R5      | 033-2211-15 | 1/10W 220 ohm  | R29     | 033-2231-15 | 1/10W 22k ohm  | R64     | 033-2231-15 | 1/10W 22k ohm          |
| R6      | 033-1021-15 | 1/10W 1k ohm   | R30     | 033-4721-15 | 1/10W 4.7k ohm | R65     | 033-4731-15 | 1/10W 47k ohm          |
| R7      | 033-1051-15 | 1/10W 1M ohm   | R31     | 033-4721-15 | 1/10W 4.7k ohm | R66     | 033-4731-15 | 1/10W 47k ohm          |
| R8      | 033-0000-05 | 1/10W 0 ohm    | R32     | 033-4731-15 | 1/10W 47k ohm  | R100    | 033-1011-15 | 1/10W 100 ohm          |
| R10     | 033-5621-15 | 1/10W 5.6k ohm | R33     | 033-4731-15 | 1/10W 47k ohm  | R101    | 033-1011-15 | 1/10W 100 ohm          |
| R11     | 033-4731-15 | 1/10W 47k ohm  | R35     | 033-4731-15 | 1/10W 47k ohm  | R102    | 033-1011-15 | 1/10W 100 ohm          |
| R12     | 119-3341-15 | 1/10W 330k ohm | R36     | 033-3311-15 | 1/10W 330 ohm  | R103    | 033-1011-15 | 1/10W 100 ohm          |
| R13     | 033-2231-15 | 1/10W 22k ohm  | R37     | 033-4731-15 | 1/10W 47k ohm  | R104    | 033-1011-15 | 1/10W 100 ohm          |
| R14     | 033-2231-15 | 1/10W 22k ohm  | R38     | 033-3311-15 | 1/10W 330 ohm  | R105    | 033-1011-15 | 1/10W 100 ohm          |
| R15     | 117-1001-15 | 1/8W 10 ohm    | R39     | 033-2211-15 | 1/10W 220 ohm  | R106    | 033-1011-15 | 1/10W 100 ohm          |
| R16     | 033-5631-15 | 1/10W 56k ohm  | R40     | 033-1011-15 | 1/10W 100 ohm  | R107    | 033-4731-15 | 1/10W 47k ohm          |
| R17     | 033-3331-15 | 1/10W 33k ohm  | R41     | 033-1001-15 | 1/10W 10 ohm   | R200    | 033-1051-15 | 1/10W 1M ohm           |
| R18     | 033-6831-15 | 1/10W 68k ohm  | R42     | 033-1001-15 | 1/10W 10 ohm   | R201    | 033-1021-15 | 1/10W 1k ohm           |
| R19     | 033-6831-15 | 1/10W 68k ohm  | R45     | 033-1011-15 | 1/10W 100 ohm  | R202    | 033-1021-15 | 1/10W 1k ohm           |
| R20     | 033-1011-15 | 1/10W 100 ohm  | R46     | 033-4731-15 | 1/10W 47k ohm  | R220    | 033-4731-15 | 1/10W 47k ohm          |
| R21     | 116-4711-15 | 1/4W 470 ohm   | R47     | 033-4731-15 | 1/10W 47k ohm  | R301    | 119-2231-15 | 1/10W 22k ohm          |
| R22     | 117-1811-15 | 1/8W 180 ohm   | R48     | 033-1011-15 | 1/10W 100 ohm  | R302    | 119-3911-15 | 1/10W 390 ohm          |
| R23     | 116-4711-15 | 1/4W 470 ohm   | R49     | 033-0000-05 | 1/10W 0 ohm    | X1      | 061-3534-90 | 16.92MHz               |
| R24     | 033-2231-15 | 1/10W 22k ohm  | R50     | 033-0000-05 | 1/10W 0 ohm    | PWB     | 039-2531-20 | PWB(WITHOUT COMPONENT) |
| R25     | 033-2231-15 | 1/10W 22k ohm  | R51     | 033-8231-15 | 1/10W 82k ohm  |         |             |                        |
| R26     | 033-2231-15 | 1/10W 22k ohm  | R52     | 033-0000-05 | 1/10W 0 ohm    |         |             |                        |

#### Sensor PWB sction(B6)

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|-------------|---------|-------------|------------------------|
| PT3     | 060-0252-01 | PT4850F     | S1      | 013-7414-50 | SPVG22                 |
| PT4     | 060-0252-01 | PT4850F     | PWB     | 039-1956-00 | PWB(WITHOUT COMPONENT) |
| PT5     | 060-0252-01 | PT4850F     |         |             |                        |
| PT6     | 060-0252-01 | PT4850F     |         |             |                        |

#### PIM-FPC section(B7)

| REF No. | PART No.    | DESCRIPTION |
|---------|-------------|-------------|
| IC5     | 051-5806-02 | GPIS95      |

#### Driver PWB section(B8)

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION  | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|-------------|---------|-------------|--------------|---------|-------------|------------------------|
| C1      | 168-1045-56 | 0.1uF       | J1      | 074-1239-76 | 26P          | R3      | 032-0104-59 | 1/4W 2.2 ohm           |
| C2      | 163-1073-35 | 16V100uF    | J2      | 074-1100-59 | 9P           | S1      | 013-7412-50 | SPVG21                 |
| D1      | 001-0529-29 | MA8051-M    | R1      | 033-1021-15 | 1/10W 1k ohm | PWB     | 039-2242-00 | PWB(WITHOUT COMPONENT) |
| IC1     | 051-6044-18 | BA6920FP-Y  | R2      | 032-0104-59 | 1/4W 2.2 ohm |         |             |                        |

#### PIV-FPC section(B9)

| REF No. | PART No.    | DESCRIPTION |
|---------|-------------|-------------|
| IC6     | 051-5806-01 | GPIS93      |

#### LED-L-PWB section(B10)

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|-------------|---------|-------------|------------------------|
| LED3    | 001-7042-00 | GL4800      | PWB     | 039-1954-20 | PWB(WITHOUT COMPONENT) |
| LED4    | 001-7042-00 | GL4800      |         |             |                        |

#### LED-R-PWB section(B11)

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION            |
|---------|-------------|-------------|---------|-------------|------------------------|
| LED5    | 001-7042-00 | GL4800      | PWB     | 039-1955-20 | PWB(WITHOUT COMPONENT) |
| LED6    | 001-7042-00 | GL4800      |         |             |                        |

#### L-Motor-FPC section(B12)

| REF No. | PART No.    | DESCRIPTION |
|---------|-------------|-------------|
| M1      | SMA-186-100 | LOADING     |

#### M/S-FPC section(B13)

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION |
|---------|-------------|-------------|---------|-------------|-------------|---------|-------------|-------------|
| M2      | SMA-185-102 | SPINDLE     | M3      | SMA-191-100 | SLED        | S2      | 013-7414-50 | SPVG22      |