


EXPLODED VIEW/PARTS LIST

Main section

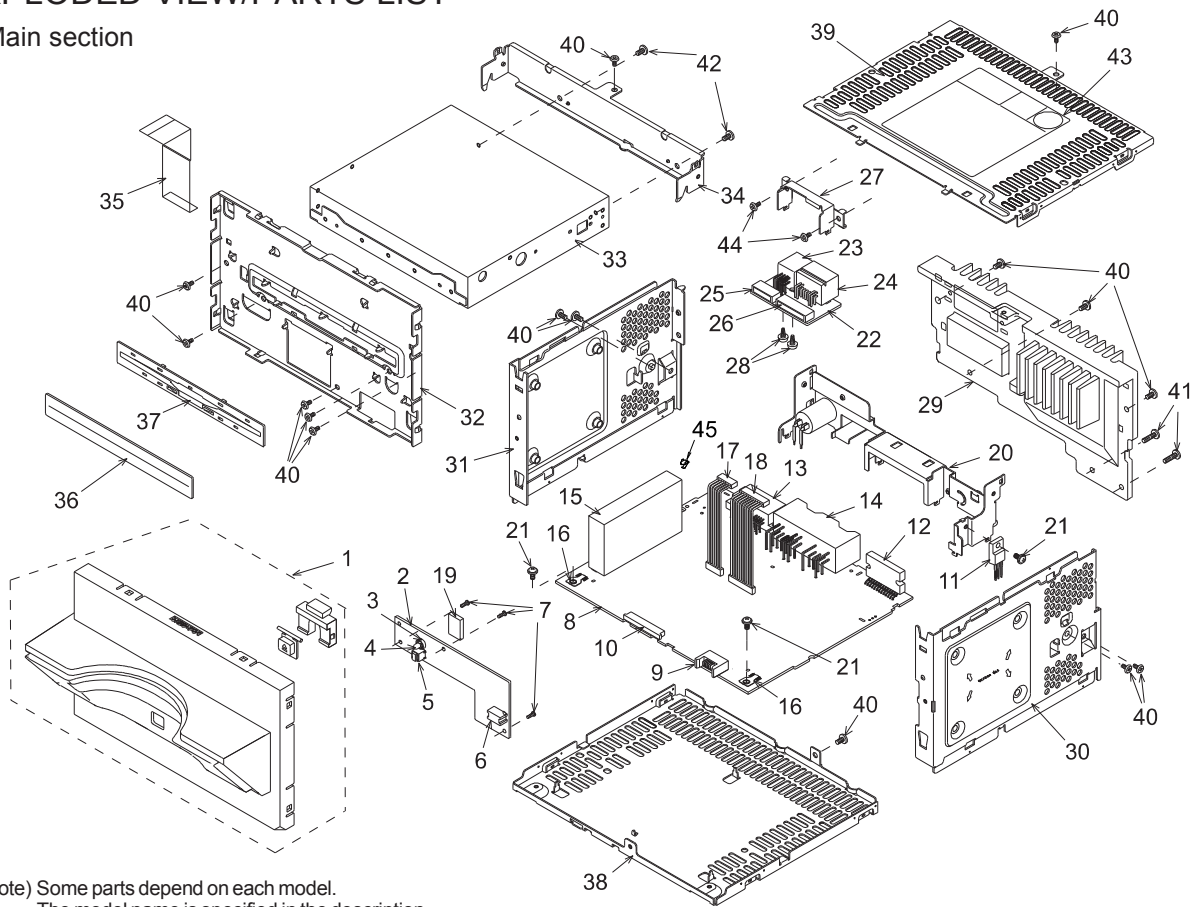


Note) Some parts depend on each model.

The model name is specified in the description.

Q-C:PN2540Q-C,Q-D:PN2540Q-D,Q-E:PN2540Q-E,Q-F:PN2540Q-F,

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8020-02	ES. ASSY(Q-C,Q-E) (EJECT BLACK COLOR)	1	23	074-1302-08	OUTLET SOCKET(TH08)	1
	940-8020-12	ES. ASSY(Q-D,Q-F) (EJECT BEIGE COLOR)	1	24	074-1013-00	OUTLET SOCKET(A12)	1
2	-----	SWITCH PWB	1	25	076-0313-06	PLUG(6P)	1
3	340-4401-00	LED HOLDER	1	26	076-0313-10	PLUG(10P)	1
4	001-0569-06	LED DIODE	1	27	331-3529-00	OUTLET HOLDER	1
5	013-3934-02	SWITCH	1	28	716-0804-01	TAP SCREW(2 X6)	2
6	074-1151-06	OUTLET SOCKET(6P)	1	29	313-1863-00	HEAT SINK	1
7	716-0778-00	WAVE SCREW(2 x 6)	3	30	305-0314-00	SIDE PLATE(RH)	1
8	-----	MAIN PWB	1	31	305-0313-00	SIDE PLATE(LH)	1
9	076-0540-06	PLUG(6P)	1	32	331-3256-00	ES PLATE	1
10	074-1191-26	OUTLET SOCKET(26P)	1	33	929-0220-86	CD MECHANISM	1
11	103-2012-00	TRANSISTOR(2SD2012)	1	34	331-3254-10	MECHANISM BRKT	1
12	051-2037-00	POWER IC	1	35	816-2549-02	FLAT WIRE	1
13	074-1319-20	OUTLET SOCKET(A20)	1	36	346-0140-00	LEATHER SHEET	1
14	074-1068-11	OUTLET SOCKET(NS10P+6P)	1	37	335-6647-00	DISC GUIDE	1
15	880-1921U	AM/FM TUNER	1	38	311-1867-00	LOWER CASE	1
16	073-0762-90	TERMINAL	2	39	310-1739-10	UPPER CASE	1
17	854-4561-50	EXTENSION LEAD	1	40	714-2606-81	MACHINE SCREW(M2.6 x 6)	15
18	854-4560-50	EXTENSION LEAD	1	41	714-2612-81	MACHINE SCREW(M2.6 x 12)	2
19	345-5336-00	CUSHION RUBBER	1	42	714-2603-81	MACHINE SCREW(M2.6 x 3)	2
20	307-0683-15	REAR PLATE WITH ANT-RECEPTACLE	1	43	286-6242-11 286-6242-12 286-6242-15 286-6242-16	SETPLATE(Q-C) SETPLATE(Q-D) SETPLATE(Q-E) SETPLATE(Q-F)	1
21	716-0878-00	IT SCREW(M2.6 x 5)	3	44	714-2604-81	MACHINE SCREW(M2.6 x 4)	2
22	-----	SUB PWB	1	45	073-0774-00	TERMINAL	1

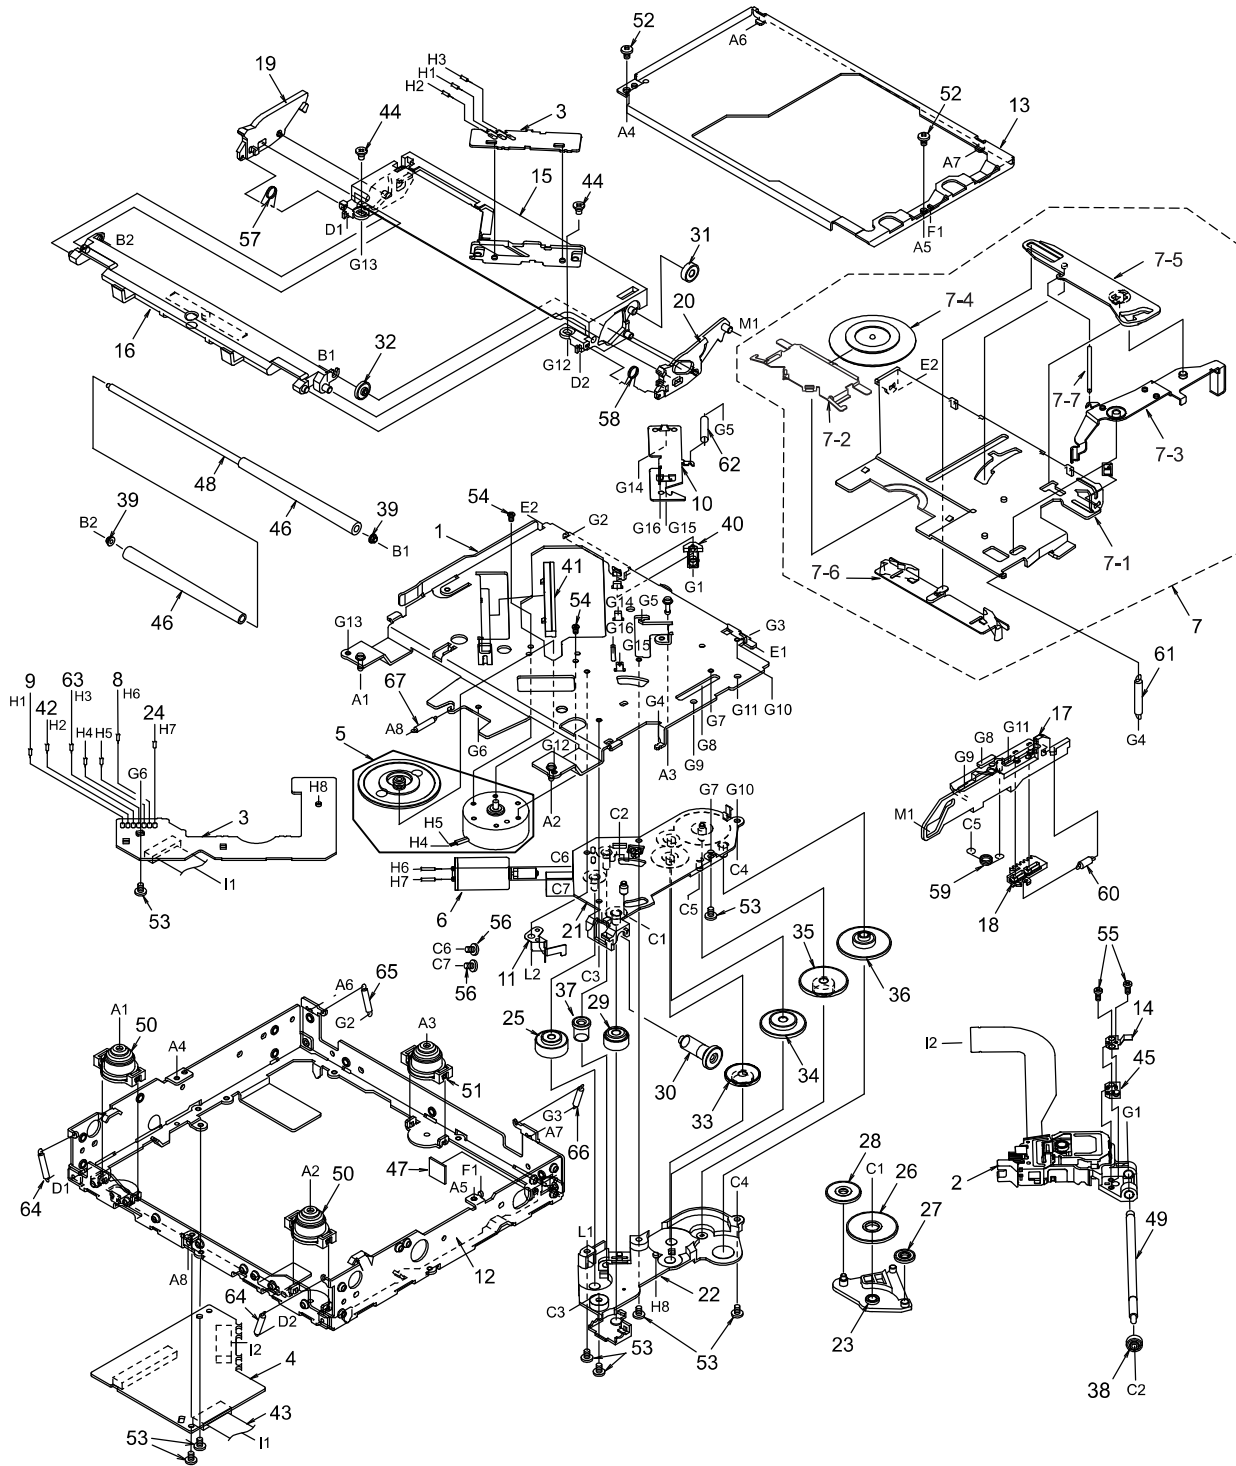

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1	31	621-0614-20	ROLLER GEAR C	1
2	969-0060-30	PICK UP UNIT	1	32	621-0615-21	ROLLER GEAR D	1
3	-----	LED PWB	1	33	621-0616-20	POWER GEAR A	1
4	-----	CD PWB	1	34	621-0617-20	POWER GEAR B	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1	35	621-0618-20	POWER GEAR C	1
6	SMA-183-100	MOTOR ASSY(SLED)	1	36	621-0619-20	POWER GEAR D	1
7	HBS-533-100	CLAMPER SUB ASSY	1	37	621-0620-20	THREAD GEAR A	1
7-1	620-1022-26	CLAMPER LINK	1	38	621-0621-20	THREAD GEAR B	1
7-2	620-1023-23	CLAMPER PLATE	1	39	621-0622-21	ROLLER SLEEVE	2
7-3	620-1721-20	SENSOR ARM	1	40	621-0623-23	LS-HOLDER	1
7-4	621-0708-20	CLAMPER RING	1	41	621-0624-22	GUIDE RAIL	1
7-5	621-0626-21	STOPPER LINK	1	42	816-2593-00	LEAD WIRE(PUR)	1
7-6	621-0627-21	DISC STOPPER	1	43	816-2542-01	FLAT WIRE(10P)	1
7-7	750-3471-20	SENSOR SPRING	1	44	716-3473-00	SCREW(M2 x 3)	2
8	803-4906-60	VINYL COAT WIRE(ORG)	1	45	621-0709-20	SH-BASE	1
9	816-2591-00	LEAD WIRE(YEL)	1	46	621-0629-20	LOADING ROLLER	2
10	620-1025-22	ID-LOCK PLATE	1	47	345-8704-20	CUSHION RUBBER	1
11	620-1026-21	SPRING PLATE	1	48	622-1571-21	ROLLER SHAFT	1
12	620-1027-27	LOWER CHASSIS	1	49	624-0018-01	LEAD SCREW	1
13	620-1028-24	UPPER CHASSIS	1	50	629-0081-21	DAMPER F	2
14	966-0638-20	SH-RACK ASSY	1	51	629-0082-21	DAMPER R	1
15	621-0598-27	UPPER GUIDE	1	52	714-2003-81	MACHINE SCREW	2
16	621-0718-21	ROLLER GUIDE	1	53	716-1507-00	SCREW(M2 x 3)	9
17	621-0600-26	SHIFT LEVER	1	54	716-1733-00	SCREW(M1.7 x 2.3)	2
18	621-0601-21	RACK	1	55	716-3469-00	SCREW(3 x 4)	2
19	621-0602-22	LOCK ARM L	1	56	716-3446-00	SCREW(M1.4 x 2.5)	2
20	621-0603-25	LOCK ARM R	1	57	750-3465-21	ROLLER SPRING L	1
21	621-0724-21	GEAR BASE	1	58	750-3466-20	ROLLER SPRING R	1
22	621-0605-22	GEAR COVER	1	59	750-3467-21	SHIFT SPRING	1
23	621-0606-21	IDLE CASE	1	60	750-3468-20	RACK SPRING	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1	61	750-3469-20	CLAMPER SPRING	1
25	621-0608-21	SECOND GEAR	1	62	750-3470-20	ID-LOCK SPRING	1
26	621-0609-20	BASE GEAR	1	63	816-2592-00	LEAD WIRE(BLU)	1
27	621-0610-20	IDLE GEAR A	1	64	750-3472-21	DR-SPRING F	2
28	621-0611-20	IDLE GEAR B	1	65	750-3473-20	DR-SPRING RA	1
29	621-0612-21	ROLLER GEAR A	1	66	750-3474-20	DR-SPRING RB	1
30	621-0613-20	ROLLER GEAR B	1	67	750-3475-21	DR-SPRING C	1

ELECTRICAL PARTS LIST

Note) Some parts depend on each model.

The model name is specified in the description.

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	880-1921U	AM/FM TUNER	C221	168-1042-78	16V 0.1uF	C401	168-1022-55	1000pF K
C101	166-1511-50	150pF CH	C222	168-1042-78	16V 0.1uF	C450	187-1063-37	16V10uF
C102	166-1201-50	12pF CH	C223	166-1801-50	18pF CH	C451	187-1063-37	16V10uF
C103	166-4701-50	47pF CH	C224	187-2263-37	16V 22uF	C470	168-1042-78	16V 0.1uF
C104	168-1042-78	16V 0.1uF	C225	166-1801-50	18pF CH	C500	168-1022-55	1000pF K
C105	188-1073-28	10V 100uF	C226	168-2212-55	220pF K	C501	168-2232-55	0.022uF K
C106	168-2232-55	0.022uF K	C227	178-2242-78	0.22uF	C502	168-1022-55	1000pF K
C107	178-1052-78	1uF	C228	168-1832-55	0.018uF K	C503	168-1022-55	1000pF K
C108	188-1073-28	10V 100uF	C229	187-2263-37	16V 22uF	C509	042-0423-94	10V 4.7uF
C110	168-1022-55	1000pF K	C230	187-1063-37	16V10uF	C511	187-1063-37	16V10uF
C111	168-1042-78	16V 0.1uF	C231	168-1032-55	0.01uF K	C512	168-1042-78	16V 0.1uF
C112	188-1073-28	10V 100uF	C232	168-1032-55	0.01uF K	C550	042-1562-17	16V 10uF
C113	168-1022-55	1000pF K	C233	187-1063-37	16V10uF	C551	042-1562-17	16V 10uF
C114	178-1052-78	1uF	C234	187-2263-37	16V 22uF	C552	042-1562-17	16V 10uF
C115	168-1532-55	0.015uF K	C235	168-1032-55	0.01uF K	C553	042-1562-17	16V 10uF
C116	166-2201-50	22pF CH	C236	187-1063-37	16V10uF	C554	166-5096-50	5pF CH
C120	168-2222-55	2200pF K	C237	178-3342-78	0.33uF	C555	166-5096-50	5pF CH
C121	178-1042-78	0.1uF	C238	168-1032-55	0.01uF K	C558	166-5096-50	5pF CH
C122	178-1042-78	0.1uF	C239	187-1063-37	16V10uF	C559	166-5096-50	5pF CH
C123	166-4701-50	47pF CH	C240	178-1052-78	1uF	C600	178-1052-78	1uF
C126	168-1022-55	1000pF K	C242	178-1052-78	1uF	C603	187-2263-67	220uF
C127	042-1458-90	50V 1uF LN	C243	178-3342-78	0.33uF	C604	168-1042-78	16V 0.1uF
C128	187-4763-37	16V47uF	C244	166-3901-50	39pF CH	C605	168-1022-55	1000pF K
C129	168-2232-55	0.022uF K	C245	178-3342-78	0.33uF	C606	168-1042-78	16V 0.1uF
C131	168-1022-55	1000pF K	C246	178-3342-78	0.33uF	C607	178-2242-78	0.22uF
C133	187-4763-37	16V47uF	C247	178-3342-78	0.33uF	C608	166-1801-50	18pF CH
C134	168-2232-55	0.022uF K	C249	166-1011-50	100pF CH	C650	168-1042-78	16V 0.1uF
C135	166-1011-50	100pF CH	C250	166-2201-50	22pF CH	C700	187-1063-37	16V10uF
C136	166-1011-50	100pF CH	C251	166-2201-50	22pF CH	C701	168-1042-78	16V 0.1uF
C137	166-1011-50	100pF CH	C253	178-4742-78	0.47uF	C702	188-1073-28	10V 100uF
C138	166-1011-50	100pF CH	C254	178-4742-78	0.47uF	C703	187-1063-37	16V10uF
C139	166-1801-50	18pF CH	C255	168-1222-55	1200pF K	C706	187-1063-37	16V10uF
C140	166-1801-50	18pF CH	C256	178-1052-78	1uF	C707	168-1042-78	16V 0.1uF
C141	168-1022-55	1000pF K	C257	178-1052-78	1uF	C710	168-1042-78	16V 0.1uF
C142	178-1542-78	0.15uF	C258	168-1042-78	16V 0.1uF	C711	187-4763-37	16V47uF
C143	187-1063-37	16V10uF	C259	187-1063-37	16V10uF	C802	187-1053-67	50V1uF
C144	168-4732-78	0.047uF K	C262	189-2273-39	16V 220uF	C803	178-2242-78	0.22uF
C146	166-1007-50	10pF CH	C263	166-1011-50	100pF CH	C804	187-2253-67	50V2.2uF
C147	168-1032-55	0.01uF K	C264	166-1011-50	100pF CH	C805	178-1052-78	1uF
C148	168-3322-55	3300pF K	C265	166-1011-50	100pF CH	C806	178-1052-78	1uF
C149	187-1073-37	16V100uF	C266	166-1011-50	100pF CH	C900	172-1041-15	0.1uF
C150	178-1052-78	1uF	C267	166-2201-50	22pF CH	C901	042-1447-00	16V 2200uF
C151	168-1032-55	0.01uF K	C300	166-5601-50	56pF CH	C902	042-1447-00	16V 2200uF
C152	166-1501-50	15pF CH	C303	166-5601-50	56pF CH	C903	187-1053-67	50V1uF
C153	168-1022-55	1000pF K	C304	166-5601-50	56pF CH	C904	168-1042-78	16V 0.1uF
C154	168-1042-78	16V 0.1uF	C307	166-5601-50	56pF CH	C905	187-1063-37	16V10uF
C163	166-2201-50	22pF CH	C308	187-1063-37	16V10uF	C906	168-2222-55	2200pF K
C164	166-2201-50	22pF CH	C309	187-1063-37	16V10uF	C907	168-2222-55	2200pF K
C165	166-2201-50	22pF CH	C310	187-4763-37	16V47uF	C908	168-2222-55	2200pF K
C166	166-2201-50	22pF CH	C311	168-1042-78	16V 0.1uF	C909	168-2222-55	2200pF K
C201	168-1042-78	16V 0.1uF	C312	187-1063-37	16V10uF	C910	168-2222-55	2200pF K
C202	168-2222-55	2200pF K	C313	189-2273-29	10V 220uF	C911	168-2222-55	2200pF K
C203	187-2253-67	50V2.2uF	C314	166-2201-50	22pF CH	C912	168-2222-55	2200pF K
C204	168-8212-55	820pF K	C315	178-1042-78	0.1uF	C913	168-2222-55	2200pF K
C205	187-2253-67	50V2.2uF	C320	168-2212-55	220pF K	C914	168-2222-55	2200pF K
C206	189-1073-29	10V100uF	C350	187-1063-37	16V10uF	CCT601	050-0140-53	1/32W 0 ohm x4J
C207	189-1073-29	10V100uF	C351	187-1063-37	16V10uF	CCT602	050-0140-53	1/32W 0 ohm x4J
C208	168-2212-55	220pF K	C352	187-1063-37	16V10uF	CCT603	050-0140-53	1/32W 0 ohm x4J
C209	168-2212-55	220pF K	C353	187-1063-37	16V10uF	CCT604	050-0140-53	1/32W 0 ohm x4J
C210	189-2273-39	16V 220uF	C354	168-2222-55	2200pF K	CCT605	050-0140-54	1/32W 1k ohm x4J
C211	166-2701-50	27pF CH	C355	187-1063-37	16V10uF	CCT606	050-0140-53	1/32W 0 ohm x4J
C212	168-4732-78	0.047uF K	C356	187-1063-37	16V10uF	D101	001-3205-90	1SV251
C213	168-2212-55	220pF K	C357	187-1063-37	16V10uF	D102	001-3205-90	1SV251
C214	178-1052-78	1uF	C358	187-1063-37	16V10uF	D200	001-0529-32	MA8056-M
C215	168-4732-78	0.047uF K	C360	166-5096-50	5pF CH	D400	001-0422-38	MTZJ36
C216	187-2263-37	16V 22uF	C361	166-5096-50	5pF CH	D401	001-0516-90	MA111
C218	168-4732-78	0.047uF K	C362	166-5096-50	5pF CH	D470	001-0516-90	MA111
C219	187-4763-37	16V47uF	C363	166-5096-50	5pF CH	D500	001-0422-38	MTZJ36
C220	168-1042-78	16V 0.1uF	C400	168-1022-55	1000pF K	D501	001-0529-44	MA8082-M

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D502	001-0330-90	1SS119	Q351	125-2020-92	DTC114EK	R122	119-4721-15	1/10W 4.7k ohm
D503	001-0330-90	1SS119	Q352	125-9003-92	IMD3	R124	119-1021-15	1/10W 1k ohm
D700	001-0504-31	HZS6 A2L	Q352	125-9002-92	RN4602	R125	119-1031-15	1/10W 10k ohm
D701	001-0504-45	HZS9B1L	Q400	125-0001-91	UN2111	R126	119-4731-15	1/10W 47k ohm
D702	001-0504-48	HZS9C2L	Q400	125-0002-92	RN2402	R138	119-1021-15	1/10W 1k ohm
D703	001-0466-90	S5688B	Q400	125-0014-92	DTA114EK	R139	119-1041-15	1/10W 100k ohm
D704	001-0466-90	S5688B	Q401	193-0601-00	2SD601A	R140	119-1041-15	1/10W 100k ohm
D705	001-0330-90	1SS119	Q401	192-2712-00	2SC2712	R141	119-2731-15	1/10W 27k ohm
D900	001-2015-00	RL253	Q402	125-2005-91	UN2211	R142	119-1041-15	1/10W 100k ohm
D901	001-0529-34	MA8062-L	Q402	125-2004-92	RN1402	R143	119-5631-15	1/10W 56k ohm
D902	001-0466-90	S5688B	Q402	125-2020-92	DTC114EK	R144	119-4731-15	1/10W 47k ohm
D903	001-0466-90	S5688B	Q403	193-0601-00	2SD601A	R145	119-4741-15	1/10W 470k ohm
D904	001-0516-90	MA111	Q403	192-2712-00	2SC2712	R146	119-1021-15	1/10W 1k ohm
IC101	051-6212-08	LC72191JM-TLM	Q470	125-0006-90	UN2110	R147	119-1031-15	1/10W 10k ohm
IC102	051-4617-90	LA1061M-TE-L	Q470	125-0019-93	DTA114TK	R148	119-1031-15	1/10W 10k ohm
IC103	051-3020-90	NJM4565V	Q500	125-0001-91	UN2111	R149	119-2731-15	1/10W 27k ohm
IC200	051-3273-90	L88M33TL	Q500	125-0002-92	RN2402	R150	119-3911-15	1/10W 390 ohm
IC201	051-6360-20	SAA7706H/N210	Q500	125-0014-92	DTA114EK	R151	119-1041-15	1/10W 100k ohm
IC202	051-6394-08	UDA1334TS-N1-118	Q501	193-0601-00	2SD601A	R162	119-0000-05	1/10W 0 ohm JW
IC300	051-3019-90	NJM2060V	Q501	192-2712-00	2SC2712	R163	119-0000-05	1/10W 0 ohm JW
IC302	051-3020-90	NJM4565V	Q502	125-2005-91	UN2211	R200	111-3911-94	1/4W 390 ohm
IC350	051-3020-90	NJM4565V	Q502	125-2004-92	RN1402	R201	119-1021-15	1/10W 1k ohm
IC501	051-3298-90	TDA3664/N1	Q502	125-2020-92	DTC114EK	R202	119-1021-15	1/10W 1k ohm
IC506	051-2037-00	TDA7560	Q503	125-9006-90	IMX1	R203	119-7521-15	1/10W 7.5k ohm
IC550	051-3020-90	NJM4565V	Q503	125-9007-90	HN1C01F	R204	119-2231-15	1/10W 22k ohm
IC600	052-3179-03	UPD703033BYGC-J24-8EU	Q700	193-1664-00	2SD1664 P,Q,R	R205	119-7521-15	1/10W 7.5k ohm
*A) IC600	052-3179-04	(PN2540Q-C,D)	Q701	125-9003-92	IMD3	R206	119-1021-15	1/10W 1k ohm
		(PN2540Q-E,F)	Q701	125-9002-92	RN4602	R207	119-1021-15	1/10W 1k ohm
IC601	051-5436-08	(PN2540Q-C,D)	Q702	103-2102-00	2SD2012	R209	119-1001-15	1/10W 10 ohm
		(PN2540Q-E,F)	Q703	193-2118-00	2SD2118F5 Q,R,S	R210	119-1001-15	1/10W 10 ohm
J201	074-1191-26	26P	Q704	190-1428-00	2SA1428	R211	119-1031-15	1/10W 10k ohm
J350	074-1319-20	A20	Q705	125-2005-91	UN2211	R212	119-1011-15	1/10W 100 ohm
J900	074-1068-11	NS10+6	Q705	125-2004-92	RN1402	R213	119-2211-15	1/10W 220 ohm
L101	010-2198-65	0.1uH	Q706	125-2020-92	DTC114EK	R214	119-2211-15	1/10W 220 ohm
L102	010-6009-76	22uH	Q706	125-2005-91	UN2211	R215	119-1011-15	1/10W 100 ohm
L103	010-2312-52	0.27uH	Q706	125-2004-92	RN1402	R216	119-1031-15	1/10W 10k ohm
L104	010-2003-04	30uH	Q706	125-2020-92	DTC114EK	R217	119-1031-15	1/10W 10k ohm
L105	010-2198-53	5.6uH	Q707	190-1048-00	2SA1048	R218	119-1031-15	1/10W 10k ohm
L200	010-2285-62	BLM11A601SPB	Q708	191-1205-60	2SB1205 R,S,T	R219	119-1011-15	1/10W 100 ohm
L201	010-2285-63	BLM11B182SP	Q900	193-0601-00	2SD601A	R220	119-1031-15	1/10W 10k ohm
L202	010-3407-70	NLV32 47uH J	Q900	192-2712-00	2SC2712	R221	119-1031-15	1/10W 10k ohm
L600	010-6009-64	2.2uH	Q901	125-2005-91	UN2211	R222	119-1011-15	1/10W 100 ohm
P901	076-0540-06	6P	Q901	125-2004-92	RN1402	R223	119-4721-15	1/10W 4.7k ohm
Q101	125-2005-91	UN2211	Q901	125-2020-92	DTC114EK	R224	119-1031-15	1/10W 10k ohm
Q101	125-2004-92	RN1402	Q902	191-0709-00	2SB709A Q,R,S	R225	119-1011-15	1/10W 100 ohm
Q101	125-2020-92	DTC114EK	Q903	100-1359-00	2SA1359	R226	119-1011-15	1/10W 100 ohm
Q102	190-1298-00	2SA1298	R101	119-2221-15	1/10W 2.2k ohm	R227	119-1011-15	1/10W 100 ohm
Q103	190-1298-00	2SA1298	R102	119-1021-15	1/10W 1k ohm	R229	119-1031-15	1/10W 10k ohm
Q104	192-2712-50	2SC2712 Y,G,L	R103	119-4721-15	1/10W 4.7k ohm	R230	119-7521-15	1/10W 7.5k ohm
Q105	192-2712-51	2SC2712 G,L	R104	119-1021-15	1/10W 1k ohm	R231	119-7521-15	1/10W 7.5k ohm
Q106	192-2712-51	2SC2712 G,L	R105	111-1501-94	1/4W 15 ohm	R232	119-2731-15	1/10W 27k ohm
Q107	193-0601-00	2SD601A	R106	111-1001-94	1/4W 10 ohm	R233	119-2731-15	1/10W 27k ohm
Q107	192-2712-00	2SC2712	R107	119-2221-15	1/10W 2.2k ohm	R234	119-4701-15	1/10W 47 ohm
Q108	193-0601-00	2SD601A	R108	119-1031-15	1/10W 10k ohm	R235	119-1031-15	1/10W 10k ohm
Q108	192-2712-00	2SC2712	R109	119-1031-15	1/10W 10k ohm	R236	119-1031-15	1/10W 10k ohm
Q109	125-2005-91	UN2211	R110	119-1021-15	1/10W 1k ohm	R237	119-1031-15	1/10W 10k ohm
Q109	125-2004-92	RN1402	R111	119-1021-15	1/10W 1k ohm	R238	119-1031-15	1/10W 10k ohm
Q109	125-2020-92	DTC114EK	R112	119-2221-15	1/10W 2.2k ohm	R240	119-2231-15	1/10W 22k ohm
Q110	125-2005-91	UN2211	R113	111-2701-94	1/4W 27 ohm	R241	119-2231-15	1/10W 22k ohm
Q110	125-2004-92	RN1402	R114	119-1031-15	1/10W 10k ohm	R242	119-2231-15	1/10W 22k ohm
Q110	125-2020-92	DTC114EK	R115	119-1011-15	1/10W 100 ohm	R243	119-2231-15	1/10W 22k ohm
Q200	102-3420-00	2SC3420	R116	119-1031-15	1/10W 10k ohm	R244	119-3931-15	1/10W 39k ohm
Q350	125-9003-92	IMD3	R117	119-1031-15	1/10W 10k ohm	R245	119-3931-15	1/10W 39k ohm
Q351	125-2005-91	UN2211	R118	119-2221-15	1/10W 2.2k ohm	R247	119-0000-05	1/10W 0 ohm JW
Q351	125-2004-92	RN1402	R119	119-4721-15	1/10W 4.7k ohm	R250	116-4701-15	1/4W 47 ohm
			R120	119-3321-15	1/10W 3.3k ohm	R300	119-2031-15	1/10W 20k ohm
			R121	119-2221-15	1/10W 2.2k ohm	R301	119-1001-15	1/10W 10 ohm

*A) Caution : IC600 uPD703033BYGC

The system control IC of PN-2540Q-C,D used 052-3179-03.

And the system control IC of PN-2540Q-E,F used 052-3179-04.

IC 052-3179-04 parts can be used for substitution of the parts of IC 052-3179-03.

However, when a power supply is connected, a difference appears in the initial-setting off start of auto volume control(SVC).

PN-2540Q-C,D
PN-2540Q-E,F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R302	119-2231-15	1/10W 22k ohm	R450	119-3011-15	1/10W 300 ohm	R656	119-4731-15	1/10W 47k ohm
R303	119-1031-15	1/10W 10k ohm	R470	119-1031-15	1/10W 10k ohm	R657	119-0000-05	1/10W 0 ohm JW
R304	119-1041-15	1/10W 100k ohm	R471	119-6821-15	1/10W 6.8k ohm	R658	119-4731-15	1/10W 47k ohm
R305	119-2231-15	1/10W 22k ohm	R472	119-4731-15	1/10W 47k ohm	R700	111-2211-94	1/4W 220 ohm
R306	119-1001-15	1/10W 10 ohm	R500	119-1031-15	1/10W 10k ohm	R701	119-1041-15	1/10W 100k ohm
R307	119-2031-15	1/10W 20k ohm	R501	119-5631-15	1/10W 56k ohm	R702	111-3911-94	1/4W 390 ohm
R308	119-1001-15	1/10W 10 ohm	R502	119-1021-15	1/10W 1k ohm	R703	111-3911-94	1/4W 390 ohm
R309	119-2231-15	1/10W 22k ohm	R503	119-4731-15	1/10W 47k ohm	R704	119-1041-15	1/10W 100k ohm
R310	119-1031-15	1/10W 10k ohm	R504	119-2231-15	1/10W 22k ohm	R705	111-3911-94	1/4W 390 ohm
R311	119-1041-15	1/10W 100k ohm	R505	119-1031-15	1/10W 10k ohm	R707	111-1021-94	1/4W 1k ohm
R312	119-3331-15	1/10W 33k ohm	R506	119-1031-15	1/10W 10k ohm	R708	119-4721-15	1/10W 4.7k ohm
R313	119-3331-15	1/10W 33k ohm	R507	119-5631-15	1/10W 56k ohm	R709	119-1021-15	1/10W 1k ohm
R314	119-2231-15	1/10W 22k ohm	R508	119-5631-15	1/10W 56k ohm	R710	119-1031-15	1/10W 10k ohm
R315	119-1001-15	1/10W 10 ohm	R509	119-5621-15	1/10W 5.6k ohm	R713	111-7501-98	1/4W 75 ohm
R316	119-1031-15	1/10W 10k ohm	R510	119-5621-15	1/10W 5.6k ohm	R715	116-2201-15	1/4W 22 ohm
R317	119-1031-15	1/10W 10k ohm	R550	119-3011-15	1/10W 300 ohm	R716	116-2201-15	1/4W 22 ohm
R320	119-4731-15	1/10W 47k ohm	R551	119-3011-15	1/10W 300 ohm	R804	119-1031-15	1/10W 10k ohm
R321	119-4731-15	1/10W 47k ohm	R552	032-0106-65	1/8W 100k ohm D	R805	119-4731-15	1/10W 47k ohm
R323	119-2231-15	1/10W 22k ohm	R553	032-0106-65	1/8W 100k ohm D	R900	119-1031-15	1/10W 10k ohm
R324	119-1031-15	1/10W 10k ohm	R554	032-0106-65	1/8W 100k ohm D	R901	119-5611-15	1/10W 560 ohm
R358	119-8201-15	1/10W 82 ohm	R555	032-0106-65	1/8W 100k ohm D	R902	111-1531-94	1/4W 15k ohm
R359	111-1211-94	1/4W 120 ohm	R556	032-0106-69	1/8W 39k ohm D	R903	111-1021-94	1/4W 1k ohm
R361	119-1831-15	1/10W 18k ohm	R557	032-0106-69	1/8W 39k ohm D	R904	116-1221-15	1/4W 1.2k ohm
R362	119-1031-15	1/10W 10k ohm	R558	032-0106-69	1/8W 39k ohm D	R905	119-4721-15	1/10W 4.7k ohm
R363	119-1031-15	1/10W 10k ohm	R559	032-0106-69	1/8W 39k ohm D	R907	111-5691-94	5.6 ohm
R364	119-3011-15	1/10W 300 ohm	R602	119-1021-15	1/10W 1k ohm	R908	111-5691-94	5.6 ohm
R365	111-1211-94	1/4W 120 ohm	R603	119-1021-15	1/10W 1k ohm	R909	111-2211-94	1/4W 220 ohm
R366	032-0106-65	1/8W 100k ohm D	R604	119-1041-15	1/10W 100k ohm	SUP101	060-0122-10	DSP-201M-S00B
R367	032-0106-65	1/8W 100k ohm D	R605	119-4731-15	1/10W 47k ohm	SUP102	060-0122-10	DSP-201M-S00B
R368	032-0106-65	1/8W 100k ohm D	R606	119-4731-15	1/10W 47k ohm	TM101	073-0762-90	TERMINAL
R369	032-0106-65	1/8W 100k ohm D	R608	119-4731-15	1/10W 47k ohm	TM102	073-0762-90	TERMINAL
R370	032-0106-69	1/8W 39k ohm D	R609	119-4731-15	1/10W 47k ohm	VR101	012-5203-63	470k ohm
R371	032-0106-69	1/8W 39k ohm D	R610	119-1041-15	1/10W 100k ohm	VR104	012-5203-56	10k ohm
R372	032-0106-69	1/8W 39k ohm D	R611	119-1041-15	1/10W 100k ohm	X101	061-1066-00	7.2MHz
R373	032-0106-69	1/8W 39k ohm D	R642	119-0000-05	1/10W 0 ohm JW	X200	061-3049-00	11.2896MHz
R400	119-1031-15	1/10W 10k ohm	R643	119-0000-05	1/10W 0 ohm JW	X601	060-1519-90	CSTCV12.5MTJ001
R401	119-5631-15	1/10W 56k ohm	R650	119-4731-15	1/10W 47k ohm	Z107	073-0774-00	TERMINAL
R402	119-1031-15	1/10W 10k ohm	R651	119-4731-15	1/10W 47k ohm	PWB	039-2312-02	PWB(WITHOUT COMPONENT)
R403	119-4721-15	1/10W 4.7k ohm	R652	119-1021-15	1/10W 1k ohm			
R404	119-1531-15	1/10W 15k ohm	R653	119-4731-15	1/10W 47k ohm			
R405	119-3321-15	1/10W 3.3k ohm	R655	119-1231-15	1/10W 12k ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D601	001-0569-06	MAY3371X-9B6	S601	013-3934-02	SKPCAH	PWB	039-2314-00	PWB(WITHOUT COMPONENT)
J601	074-1151-06	64P						

Sub PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J550	074-1013-00	A12	P550	076-0313-06	6P	PWB	039-2313-00	PWB(WITHOUT COMPONENT)
J551	074-1302-08	TH8	P551	076-0313-10	10P			

CD PWB(B4) section : CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1042-78	0.1uF	C118	043-0533-50	0.047uF	C208	046-6822-58	6800pF
C102	045-4701-50	47pF	C119	045-2701-50	27pF	C209	168-1042-78	0.1uF
C103	046-4722-58	4700pF	C120	045-1801-50	18pF	C210	043-0533-50	0.047uF
C104	168-1042-78	0.1uF	C121	163-1063-35	16V10uF	C211	168-1042-78	0.1uF
C105	046-1532-78	0.015uF	C122	178-1052-78	1uF	C212	168-1042-78	0.1uF
C106	046-1032-78	0.01uF	C123	046-1032-78	0.01uF	C213	045-5096-50	5pF
C107	046-1032-78	0.01uF	C124	163-1073-05	4V100uF	C214	045-5601-50	56pF
C108	046-4722-58	4700pF	C125	168-1042-78	0.1uF	C215	043-0533-50	0.047uF
C109	046-1522-58	1500pF	C126	168-1042-78	0.1uF	C216	178-1052-78	1uF
C110	046-3332-78	0.033uF	C129	178-1052-78	1uF	C217	045-1011-50	100pF
C111	168-1042-78	0.1uF	C201	163-3363-05	4V33uF	C301	163-1073-35	16V100uF
C112	046-3332-78	0.033uF	C202	168-1042-78	0.1uF	C302	168-1042-78	0.1uF
C113	168-1042-78	0.1uF	C203	178-1052-78	1uF	C303	043-0533-50	0.047uF
C114	168-1042-78	0.1uF	C204	163-1073-05	4V100uF	CCT1	050-0140-54	1k ohm x 4
C115	046-4712-58	470pF	C205	163-3363-05	4V33uF	D201	001-0516-90	MA111
C116	046-4712-58	470pF	C206	168-1042-78	0.1uF	IC101	051-6376-00	TC94A14FA
C117	043-0533-50	0.047uF	C207	043-0533-50	0.047uF	IC102	051-3279-90	BA033LBSG


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC201	051-5710-90	TA2157F	R110	033-1051-15	1/10W 1M ohm	R210	033-6831-15	1/10W 68k ohm
IC301	051-6049-08	BA5983FP-E2	R111	033-3321-15	1/10W 3.3k ohm	R211	033-1831-15	1/10W 18k ohm
J101	074-1228-76	26P	R114	033-2211-15	1/10W 220 ohm	R212	033-2721-15	1/10W 2.7k ohm
J201	074-1138-65	15P	R115	033-2211-15	1/10W 220 ohm	R213	033-1011-15	1/10W 100 ohm
J301	074-1138-60	10P	R116	033-1031-15	1/10W 10k ohm	R214	033-1021-15	1/10W 1k ohm
L101	010-2285-57	BLM21B102SPT	R117	033-1021-15	1/10W 1k ohm	R215	033-1031-15	1/10W 10k ohm
L102	010-2285-57	BLM21B102SPT	R131	033-4711-15	1/10W 470 ohm	R217	033-1041-15	1/10W 100k ohm
L103	010-2285-57	BLM21B102SPT	R132	033-2211-15	1/10W 220 ohm	R218	033-2211-15	1/10W 220 ohm
L104	010-2285-57	BLM21B102SPT	R201	117-2201-15	1/8W 22 ohm	R301	117-6811-15	1/10W 680 ohm
L105	010-2285-57	BLM21B102SPT	R202	117-2201-15	1/8W 22 ohm	R304	033-3921-15	1/10W 3.9k ohm
L401	010-3050-93	10uH	R203	033-1041-15	1/10W 100k ohm	R305	033-3921-15	1/10W 3.9k ohm
Q201	131-1188-50	2SB1188	R204	033-1041-15	1/10W 100k ohm	R306	033-1041-15	1/10W 100k ohm
R102	033-5621-15	1/10W 5.6k ohm	R205	033-1041-15	1/10W 100k ohm	R307	033-2211-15	1/10W 220 ohm
R104	033-4731-15	1/10W 47k ohm	R206	033-1041-15	1/10W 100k ohm	X102	060-1528-90	16.934M
R105	033-1041-15	1/10W 100k ohm	R207	033-1041-15	1/10W 100k ohm	PWB	039-1945-20	PWB(WITHOUT COMPONENT)
R108	033-1531-15	1/10W 15k ohm	R208	033-8231-15	1/10W 82k ohm			
R109	033-1031-15	1/10W 10k ohm	R209	033-6811-15	1/10W 680 ohm			

LED PWB(B5) section : CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-90	PS1192H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			

CIRCUIT DIAGRAM

Switch PWB section (B2)

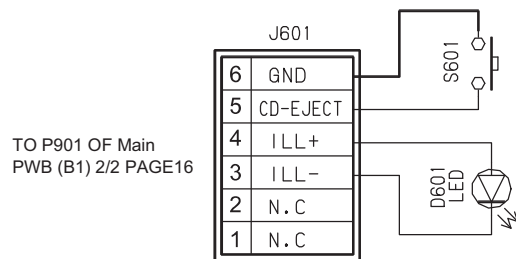

Sub PWB section (B3)

