

# TK-2202/2206

## PARTS LIST

\* New Parts.    ⚠ indicates safety critical components.  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

L: Scandinavia                      K: USA                      P: Canada  
Y: PX (Far East, Hawaii)        T: England                E: Europe  
Y: AAFES (Europe)                X: Australia              M: Other Areas

**TK-2202/2206 (Y50-5890-XX)**  
**TX-RX UNIT (X57-6870-20)**

| Ref. No.     | Address | New parts | Parts No.   | Description                     | Destination | Ref. No.                 | Address  | New parts | Parts No.     | Description                     | Destination |
|--------------|---------|-----------|-------------|---------------------------------|-------------|--------------------------|----------|-----------|---------------|---------------------------------|-------------|
| TK-2202/2206 |         |           |             |                                 |             | 54                       | 2B       | *         | J82-0092-05   | FPC                             |             |
| 1            | 1A      | *         | A02-3851-23 | CABINET ASSY(16CH)              | BM          | 56                       | 1A       | *         | K29-9307-03   | BUTTON KNOB(SIDE1/SIDE2)        |             |
| 1            | 1A      | *         | A02-3852-23 | CABINET ASSY(8CH)               | AK,AM       | 57                       | 1A       | *         | K29-9308-03   | BUTTON KNOB(PTT)                |             |
| 2            | 1A      | *         | A02-3858-13 | CABINET                         |             | 58                       | 1B       | *         | K29-9309-03   | KNOB(VOL)                       |             |
| 3            | 3A      | *         | A10-4078-01 | CHASSIS                         |             | 59                       | 1B       | *         | K29-9318-03   | KNOB(CH)                        |             |
| 4            | 1B      | *         | A21-1644-13 | DRESSING PANEL(16CH)            | BM          | A                        | 2B       | *         | N14-0808-04   | CIRCULAR NUT(CH KNOB)           |             |
| 4            | 1B      | *         | A21-1645-13 | DRESSING PANEL(8CH)             | AK,AM       | B                        | 2B       | *         | N14-0812-04   | CIRCULAR NUT(VOL KNOB)          |             |
| 6            | 2C,2E   | *         | B09-0680-03 | CAP(SP/MIC)                     | ACCESSORY   | C                        | 2A,2B    |           | N30-2604-46   | PAN HEAD MACHINE SCREW(SMA)     |             |
| 7            | 2B      | *         | B11-1817-04 | ILLUMINATION GUIDE              |             | D                        | 3A       |           | N30-2606-46   | PAN HEAD MACHINE SCREW(CHASSIS) |             |
| 8            | 1B      | *         | B43-1156-04 | BADGE                           |             | E                        | 2A,2B,3B |           | N83-2005-46   | PAN HEAD TAPTITE SCREW(PCB)     |             |
| 9            | 1C      | *         | B62-1762-00 | INSTRUCTION MANUAL              | AK,AM       | 60                       | 1C,2F    | *         | N99-2043-05   | SCREW SET                       | ACCESSORY   |
| 10           | 1E      | *         | B62-1763-00 | INSTRUCTION MANUAL              | BM          | 61                       | 2B       | *         | R31-0653-05   | VARIABLE RESISTOR(POWER SW/VOL) |             |
| 11           | 1A      | *         | D10-0649-03 | LEVER                           |             | 62                       | 2B       | *         | S60-0427-05   | ROTARY SWITCH(16CH)             | BM          |
| 12           | 1A      | *         | D21-0863-04 | SHAFT                           |             | 62                       | 2B       | *         | S60-0428-15   | ROTARY SWITCH(8CH)              | AK,AM       |
| 13           | 1A      | *         | D32-0441-03 | STOPPER                         |             | 63                       | 1B       |           | T07-0369-05   | SPEAKER                         |             |
| 14           | 2A      | *         | E04-0451-05 | RF COAXIAL RECEPTACLE(SMA)      |             | 64                       | 1C       |           | T90-1036-05   | HELICAL ANTENNA                 | ACCESSORY   |
| 15           | 3B      | *         | E23-1253-04 | TERMINAL(BATT-)                 |             | 65                       | 2D       | *         | W08-0969-05   | CHARGER                         | ACCESSORY   |
| 16           | 2B      |           | E37-0794-05 | PROCESSED LEAD WIRE(SP+)        |             | 66                       | 1D       | *         | W08-0970-05   | AC ADAPTER(AC120V)              | ACCESSORY   |
| 17           | 2B      |           | E37-0803-05 | PROCESSED LEAD WIRE(SP-)        |             | 66                       | 1D       | *         | W08-0971-05   | AC ADAPTER(AC230V)              | ACCESSORY   |
| 18           | 3A      | *         | F20-3353-14 | INSULATING SHEET(CHASSIS BATT+) |             | TX-RX UNIT (X57-6870-20) |          |           |               |                                 |             |
| 19           | 2A      | *         | G01-4542-04 | COIL SPRING(LEVER)              |             | D403                     |          |           | B30-2156-05   | LED(RED)                        |             |
| 20           | 1A      | *         | G01-4543-04 | COIL SPRING(STOPPER)            |             | D404                     |          |           | B30-2157-05   | LED(YELLOW)                     |             |
| 21           | 2B      | *         | G10-1330-04 | FIBROUS SHEET(IC302:AUDIO IC)   |             | C1                       |          |           | CK73HB1H332K  | CHIP C                          | 3300PF K    |
| 22           | 3A      | *         | G11-4283-04 | RUBBER SHEET(Q106:FINAL FET)    |             | C2                       |          |           | CK73HB1C682K  | CHIP C                          | 6800PF K    |
| 23           | 2A      | *         | G11-4313-04 | SHEET(MIC ELEMENT)              |             | C3                       |          |           | CK73GB1A105K  | CHIP C                          | 1.0UF K     |
| 24           | 3B      | *         | G11-4318-04 | SHEET                           |             | C4                       |          |           | CK73HB1C103K  | CHIP C                          | 0.010UF K   |
| 25           | 3A      | *         | G11-4320-14 | SHEET                           |             | C5                       |          |           | CK73HB1H102K  | CHIP C                          | 1000PF K    |
| 26           | 2B,3B   | *         | G11-4322-04 | SHEET                           |             | C6                       |          |           | CK73HB1A104K  | CHIP C                          | 0.10UF K    |
| 27           | 2A      | *         | G11-4323-04 | SHEET                           |             | C7 ,8                    |          |           | CC73HCH1H101J | CHIP C                          | 100PF J     |
| 29           | 3B      | *         | G13-2009-04 | CUSHION(TERMINAL BATT-)         |             | C9                       |          |           | CC73HCH1H100D | CHIP C                          | 10PF D      |
| 30           | 3A      | *         | G13-2033-04 | CUSHION(TERMINAL BATT-)         |             | C10                      |          |           | C92-0713-05   | CHIP-TAN                        | 10UF 6.3WV  |
| 31           | 3B      | *         | G13-2034-14 | CUSHION(CHASSIS)                |             | C11                      |          |           | CC73HCH1H101J | CHIP C                          | 100PF J     |
| 32           | 2B      | *         | G13-2037-04 | CUSHION(CHASSIS VOL/CH)         |             | C12                      |          |           | CK73HB1H102K  | CHIP C                          | 1000PF K    |
| 33           | 3A      | *         | G13-2038-04 | CUSHION(CHASSIS-CERAMIC FILTER) |             | C13                      |          |           | CK73HB1A104K  | CHIP C                          | 0.10UF K    |
| 34           | 2A      | *         | G13-2039-04 | CUSHION(PCB-CERAMIC FILTER)     |             | C14                      |          |           | CK73HB1C103K  | CHIP C                          | 0.010UF K   |
| 35           | 3A      | *         | G53-1604-03 | PACKING(CHASSIS)                |             | C15                      |          |           | CC73HCH1H100D | CHIP C                          | 10PF D      |
| 36           | 3A      | *         | G53-1605-03 | PACKING(TERMINAL BATT+)         |             | C16                      |          |           | CK73HB1H102K  | CHIP C                          | 1000PF K    |
| 37           | 2B      | *         | G53-1606-03 | PACKING(VOL/CH/LED)             |             | C17                      |          |           | CC73HCH1H470J | CHIP C                          | 47PF J      |
| 38           | 1B      | *         | G53-1607-03 | PACKING(SP/MIC)                 |             | C18                      |          |           | CC73HCH1H180J | CHIP C                          | 18PF J      |
| 39           | 2B      | *         | G53-1608-03 | PACKING(SP)                     |             | C19                      |          |           | CK73HB1A104K  | CHIP C                          | 0.10UF K    |
| 40           | 2A      | *         | G53-1609-14 | PACKING(MIC ELEMENT)            |             | C21                      |          |           | C92-0713-05   | CHIP-TAN                        | 10UF 6.3WV  |
| 41           | 2B      | *         | G53-1610-04 | PACKING(SMA)                    |             | C22                      |          |           | C92-0502-05   | CHIP-TAN                        | 0.33UF 35WV |
| 43           | 2C,2F   | *         | H12-3158-05 | PACKING FIXTURE                 |             | C24                      |          |           | CK73HB1H102K  | CHIP C                          | 1000PF K    |
| 44           | 1D      | *         | H13-2109-03 | CARTON BOARD                    | AK,AM       | C25                      |          |           | CC73HCH1H020B | CHIP C                          | 2.0PF B     |
| 45           | 1C,1E   |           | H25-0085-04 | PROTECTION BAG (100/200/0.07)   |             | C26                      |          |           | CC73HCH1H300J | CHIP C                          | 30PF J      |
| 46           | 3D      | *         | H52-2017-02 | ITEM CARTON CASE                | AK,AM       | C27                      |          |           | C92-0697-05   | CHIP-TAN                        | 3.3UF 16WV  |
| 47           | 3F      | *         | H52-2034-02 | ITEM CARTON CASE                | BM          | C29 ,30                  |          |           | CK73HB1H471K  | CHIP C                          | 470PF K     |
| 48           | 2C,2F   | *         | J19-5472-03 | HOLDER(SP/MIC)                  | ACCESSORY   | C32                      |          |           | C92-0001-05   | CHIP C                          | 0.1UF 35WV  |
| 49           | 2A      | *         | J19-5473-03 | HOLDER ASSY(TERMINAL BATT+)     |             | C33 ,34                  |          |           | CK73HB1H102K  | CHIP C                          | 1000PF K    |
| 50           | 2B      | *         | J21-8477-04 | HARDWARE FIXTURE(VOL/CH)        |             | C35                      |          |           | CC73HCH1H270J | CHIP C                          | 27PF J      |
| 51           | 2B      | *         | J21-8478-04 | HARDWARE FIXTURE(SP/MIC)        |             |                          |          |           |               |                                 |             |
| 52           | 2C,2F   | *         | J29-0713-05 | BELT CLIP                       | ACCESSORY   |                          |          |           |               |                                 |             |

## PARTS LIST

## TX-RX UNIT (X57-6870-20)

| Ref. No. | Address | New parts | Parts No.     | Description         | Destination | Ref. No. | Address | New parts | Parts No.     | Description         | Destination |
|----------|---------|-----------|---------------|---------------------|-------------|----------|---------|-----------|---------------|---------------------|-------------|
| C38      |         |           | CC73HCH1H060B | CHIP C 6.0PF B      |             | C135     |         |           | CK73GB1A105K  | CHIP C 1.0UF K      |             |
| C39      |         |           | CK73GB1H332K  | CHIP C 3300PF K     |             | C136     |         |           | CC73GCH1H270J | CHIP C 27PF J       |             |
| C40      |         |           | CC73HCH1H040B | CHIP C 4.0PF B      |             | C137     |         |           | CK73GB1H103K  | CHIP C 0.010UF K    |             |
| C41      |         |           | CK73GB1H682K  | CHIP C 6800PF K     |             | C138     |         |           | CK73GB1H102K  | CHIP C 1000PF K     |             |
| C42      |         |           | CC73HCH1H060B | CHIP C 6.0PF B      |             | C139     |         |           | CC73GCH1H680J | CHIP C 68PF J       |             |
| C43      |         |           | CC73HCH1H150J | CHIP C 15PF J       |             | C140     |         |           | CC73GCH1H101J | CHIP C 100PF J      |             |
| C44      |         |           | CK73HB1H471K  | CHIP C 470PF K      |             | C141     |         |           | CC73GCH1H220J | CHIP C 22PF J       |             |
| C45      |         |           | CK73GB1A105K  | CHIP C 1.0UF K      |             | C142     |         |           | CC73GCH1H150J | CHIP C 15PF J       |             |
| C47      |         |           | CC73HCH1H101J | CHIP C 100PF J      |             | C143     |         |           | CC73GCH1H100D | CHIP C 10PF D       |             |
| C48      |         |           | CK73HB1H471K  | CHIP C 470PF K      |             | C144     |         |           | CC73GCH1H820J | CHIP C 82PF J       |             |
| C49      |         |           | CC73HCH1H101J | CHIP C 100PF J      |             | C146     |         |           | CK73GB1H102K  | CHIP C 1000PF K     |             |
| C50      |         |           | CC73HCH1H100D | CHIP C 10PF D       |             | C147     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C51      |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C148     |         |           | CK73GB1H102K  | CHIP C 1000PF K     |             |
| C52      |         |           | CC73HCH1H181J | CHIP C 180PF J      |             | C149     |         |           | CC73GCH1H220G | CHIP C 22PF G       |             |
| C53      |         |           | CC73HCH1H0R5B | CHIP C 0.5PF B      |             | C150     |         |           | CC73GCH1H220J | CHIP C 22PF J       |             |
| C54      |         |           | CC73HCH1H040B | CHIP C 4.0PF B      |             | C151     |         |           | CK73GB1H102K  | CHIP C 1000PF K     |             |
| C55      |         |           | CC73HCH1H121J | CHIP C 120PF J      |             | C153     |         |           | CC73GCH1H100C | CHIP C 10PF C       |             |
| C57      |         |           | CC73HCH1H1R5B | CHIP C 1.5PF B      |             | C154     |         |           | CC73GCH1H100D | CHIP C 10PF D       |             |
| C58      |         |           | CC73HCH1H060B | CHIP C 6.0PF B      |             | C155     |         |           | CC73GCH1H180J | CHIP C 18PF J       |             |
| C59      |         |           | CC73HCH1H1R5B | CHIP C 1.5PF B      |             | C156     |         |           | CC73GCH1H120J | CHIP C 12PF J       |             |
| C60      |         |           | CC73HCH1H010B | CHIP C 1.0PF B      |             | C157     |         |           | CC73GCH1H150J | CHIP C 15PF J       |             |
| C61      |         |           | CC73HCH1H040B | CHIP C 4.0PF B      |             | C158     |         |           | CC73GCH1H220J | CHIP C 22PF J       |             |
| C62      |         |           | CC73HCH1H050B | CHIP C 5.0PF B      |             | C159     |         |           | CC73GCH1H070D | CHIP C 7.0PF D      |             |
| C63      |         |           | CC73HCH1H101J | CHIP C 100PF J      |             | C160     |         |           | CC73GCH1H330J | CHIP C 33PF J       |             |
| C64      |         |           | CC73HCH1H040B | CHIP C 4.0PF B      |             | C201     |         |           | CK73GB1A224K  | CHIP C 0.22UF K     |             |
| C65 -67  |         |           | CC73HCH1H050B | CHIP C 5.0PF B      |             | C206     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C68 -70  |         |           | CK73HB1H471K  | CHIP C 470PF K      |             | C207     |         |           | CK73HB1H182K  | CHIP C 1800PF K     |             |
| C71 ,72  |         |           | CK73HB1A104K  | CHIP C 0.10UF K     |             | C208     |         |           | CK73HB1H471K  | CHIP C 470PF K      |             |
| C73 ,74  |         |           | CC73HCH1H0R5B | CHIP C 0.5PF B      |             | C209     |         |           | C92-0713-05   | CHIP-TAN 10UF 6.3WV |             |
| C75 ,76  |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C210     |         |           | CK73HB1H471K  | CHIP C 470PF K      |             |
| C77      |         |           | CK73HB1H471K  | CHIP C 470PF K      |             | C211     |         |           | CK73HB1C103K  | CHIP C 0.010UF K    |             |
| C78      |         |           | CC73HCH1H330J | CHIP C 33PF J       |             | C213     |         |           | CK73HB1A104K  | CHIP C 0.10UF K     |             |
| C79      |         |           | C92-0713-05   | CHIP-TAN 10UF 6.3WV |             | C214     |         |           | CC73HCH1H680J | CHIP C 68PF J       |             |
| C80      |         |           | CK73HB1H471K  | CHIP C 470PF K      |             | C215     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C81      |         |           | CC73HCH1H150J | CHIP C 15PF J       |             | C216     |         |           | CK73GB1C104K  | CHIP C 0.10UF K     |             |
| C82 -86  |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C217     |         |           | CK73HB1A104K  | CHIP C 0.10UF K     |             |
| C87      |         |           | CC73HCH1H100D | CHIP C 10PF D       |             | C218     |         |           | CK73GB1C104K  | CHIP C 0.10UF K     |             |
| C90      |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C219     |         |           | CC73HCH1H330J | CHIP C 33PF J       |             |
| C101     |         |           | CK73HCH1H102K | CHIP C 1000PF K     |             | C220     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C104     |         |           | CC73GCH1H390J | CHIP C 39PF J       |             | C221     |         |           | CK73GB1C104K  | CHIP C 0.10UF K     |             |
| C105     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C222     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C107     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C224,225 |         |           | CK73HB1C103K  | CHIP C 0.010UF K    |             |
| C108     |         |           | CC73GCH1H390J | CHIP C 39PF J       |             | C227     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C109     |         |           | CK73GB1C104K  | CHIP C 0.10UF K     |             | C228     |         |           | CC73GCH1H100C | CHIP C 10PF C       |             |
| C110,111 |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C230     |         |           | CC73HCH1H080B | CHIP C 8.0PF B      |             |
| C115     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C231,232 |         |           | CK73GB1H103K  | CHIP C 0.010UF K    |             |
| C116     |         |           | CC73GCH1H220J | CHIP C 22PF J       |             | C233     |         |           | CC73HCH1H020B | CHIP C 2.0PF B      |             |
| C117     |         |           | CC73GCH1H100D | CHIP C 10PF D       |             | C234     |         |           | CK73HB1C103K  | CHIP C 0.010UF K    |             |
| C118     |         |           | CC73GCH1H101J | CHIP C 100PF J      |             | C235     |         |           | CC73HCH1H090B | CHIP C 9.0PF B      |             |
| C119     |         |           | CC73GCH1H270J | CHIP C 27PF J       |             | C236     |         |           | CK73GB1H102K  | CHIP C 1000PF K     |             |
| C120     |         |           | CK73GB1H102K  | CHIP C 1000PF K     |             | C237     |         |           | CC73HCH1H050B | CHIP C 5.0PF B      |             |
| C121     |         |           | CC73GCH1H100D | CHIP C 10PF D       |             | C238     |         |           | CC73GCH1H120J | CHIP C 12PF J       |             |
| C123     |         |           | CK73GB1A105K  | CHIP C 1.0UF K      |             | C239     |         |           | CC73HCH1H060B | CHIP C 6.0PF B      |             |
| C124,125 |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C241     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C126     |         |           | C92-0565-05   | CHIP-TAN 6.8UF 10WV |             | C242     |         |           | CK73GB1C104K  | CHIP C 0.10UF K     |             |
| C128     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C243     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             |
| C130     |         |           | CC73GCH1H100D | CHIP C 10PF D       |             | C244     |         |           | CC73HCH1H040B | CHIP C 4.0PF B      |             |
| C132     |         |           | CK73HB1H102K  | CHIP C 1000PF K     |             | C245     |         |           | CK73HB1H471K  | CHIP C 470PF K      |             |
| C133     |         |           | CK73GB1H103K  | CHIP C 0.010UF K    |             | C247     |         |           | CC73GCH1H040B | CHIP C 4.0PF B      |             |
| C134     |         |           | CK73GB1C104K  | CHIP C 0.10UF K     |             | C248     |         |           | CC73GCH1H270J | CHIP C 27PF J       |             |

## PARTS LIST

## TX-RX UNIT (X57-6870-20)

| Ref. No. | Address | New parts | Parts No.     | Description          | Destination | Ref. No. | Address | New parts | Parts No.     | Description                   | Destination |
|----------|---------|-----------|---------------|----------------------|-------------|----------|---------|-----------|---------------|-------------------------------|-------------|
| C249     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C351,352 |         |           | CK73HB1C103K  | CHIP C 0.010UF K              |             |
| C250     |         |           | CC73GCH1H040B | CHIP C 4.0PF B       |             | C354     |         |           | CK73HB1A104K  | CHIP C 0.10UF K               |             |
| C251     |         |           | C92-0714-05   | CHIP-TAN 4.7UF 6.3WV |             | C370     |         |           | CK73HB1A104K  | CHIP C 0.10UF K               |             |
| C252     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C401     |         |           | CC73GCH1H471J | CHIP C 470PF J                |             |
| C253     |         |           | CC73GCH1H4R5B | CHIP C 4.5PF B       |             | C402     |         |           | CK73HB1H102K  | CHIP C 1000PF K               |             |
| C254     |         |           | CC73GCH1H270J | CHIP C 27PF J        |             | C403     |         |           | CK73GB1C104K  | CHIP C 0.10UF K               |             |
| C255     |         |           | CC73GCH1H4R5B | CHIP C 4.5PF B       |             | C405     |         |           | CC73GCH1H101J | CHIP C 100PF J                |             |
| C256     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C407     |         |           | CK73HB1H102K  | CHIP C 1000PF K               |             |
| C258     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C409,410 |         |           | CK73GB1A105K  | CHIP C 1.0UF K                |             |
| C260     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C411     |         |           | CK73HB1H102K  | CHIP C 1000PF K               |             |
| C262     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C415     |         |           | CK73HB1H471K  | CHIP C 470PF K                |             |
| C263     |         |           | CC73GCH1H100C | CHIP C 10PF C        |             | C417     |         |           | CK73GB1A105K  | CHIP C 1.0UF K                |             |
| C264     |         |           | CC73GCH1H040B | CHIP C 4.0PF B       |             | C418,419 |         |           | CK73HB1H102K  | CHIP C 1000PF K               |             |
| C265     |         |           | CC73GCH1H330J | CHIP C 33PF J        |             | C421     |         |           | CK73GB1A105K  | CHIP C 1.0UF K                |             |
| C266     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C426,427 |         |           | CK73GB1A105K  | CHIP C 1.0UF K                |             |
| C267,268 |         |           | CC73GCH1H030B | CHIP C 3.0PF B       |             | C428,429 |         |           | CK73HB1H102K  | CHIP C 1000PF K               |             |
| C269     |         |           | CC73GCH1H330J | CHIP C 33PF J        |             | C430     |         |           | CK73GB1H103K  | CHIP C 0.010UF K              |             |
| C270     |         |           | CC73GCH1H040B | CHIP C 4.0PF B       |             | C431     |         |           | CK73HB1C103K  | CHIP C 0.010UF K              |             |
| C271     |         |           | CC73GCH1H110J | CHIP C 11PF J        |             | C432     |         |           | CC73HCH1H050B | CHIP C 5.0PF B                |             |
| C280     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | C433,434 |         |           | CC73HCH1H030B | CHIP C 3.0PF B                |             |
| C302     |         |           | CK73HB1C103K  | CHIP C 0.010UF K     |             | C435     |         |           | CC73HCH1H050B | CHIP C 5.0PF B                |             |
| C304     |         |           | CK73GB1A224K  | CHIP C 0.22UF K      |             | C440     |         |           | CC73GCH1H1R5B | CHIP C 1.5PF B                |             |
| C306     |         |           | C92-0714-05   | CHIP-TAN 4.7UF 6.3WV |             | C443     |         |           | CK73GB1A474K  | CHIP C 0.47UF K               |             |
| C307,308 |         |           | CK73HB1A104K  | CHIP C 0.10UF K      |             | TC1,2    |         |           | C05-0384-05   | CERAMIC TRIMMER CAP(10PF)     |             |
| C309     |         |           | CC73GCH1H820J | CHIP C 82PF J        |             | CN201    |         |           | E23-1081-05   | TERMINAL                      |             |
| C310     |         |           | CK73HB1A683K  | CHIP C 0.068UF K     |             | CN401    |         | *         | E40-6362-05   | FLAT CABLE CONNECTOR          |             |
| C311     |         |           | CK73GB1A105K  | CHIP C 1.0UF K       |             | J301     |         |           | E11-0457-05   | PHONE JACK(2.5/3.5)           |             |
| C312     |         |           | CC73GCH1H120J | CHIP C 12PF J        |             | F401     |         |           | F53-0190-05   | FUSE(2.5A)                    |             |
| C313     |         |           | CC73GCH1H121J | CHIP C 120PF J       |             | 67       | 2A      | *         | J30-1282-04   | SPACER(MIC ELEMENT)           |             |
| C314     |         |           | CK73HB1A104K  | CHIP C 0.10UF K      |             | CD201    |         |           | L79-1582-05   | TUNING COIL                   |             |
| C315     |         |           | CK73GB1A105K  | CHIP C 1.0UF K       |             | CF201    | 2A      |           | L72-0973-05   | CERAMIC FILTER(450KHZ)        |             |
| C316     |         |           | CK73GB1C104K  | CHIP C 0.10UF K      |             | L1       |         |           | L40-4791-37   | SMALL FIXED INDUCTOR(4.700UH) |             |
| C317     |         |           | CK73HB1A104K  | CHIP C 0.10UF K      |             | L3       |         |           | L40-5681-86   | SMALL FIXED INDUCTOR(0.56UH)  |             |
| C318     |         |           | C92-0714-05   | CHIP-TAN 4.7UF 6.3WV |             | L5       |         |           | L40-5681-86   | SMALL FIXED INDUCTOR(0.56UH)  |             |
| C319     |         |           | CC73GCH1H271J | CHIP C 270PF J       |             | L6,7     |         |           | L92-0138-05   | FERRITE CHIP                  |             |
| C320     |         |           | CK73HB1C103K  | CHIP C 0.010UF K     |             | L8       |         |           | L40-1875-92   | SMALL FIXED INDUCTOR(18NH)    |             |
| C321     |         |           | CK73GB1A105K  | CHIP C 1.0UF K       |             | L9       |         |           | L40-3375-92   | SMALL FIXED INDUCTOR(33NH)    |             |
| C322     |         |           | CK73HB1C153K  | CHIP C 0.015UF K     |             | L10      |         |           | L40-1885-92   | SMALL FIXED INDUCTOR(180NH)   |             |
| C323     |         |           | CC73GCH1H820J | CHIP C 82PF J        |             | L11      |         |           | L40-1085-92   | SMALL FIXED INDUCTOR(100NH)   |             |
| C324     |         |           | CC73HCH1H820J | CHIP C 82PF J        |             | L12      |         |           | L92-0138-05   | FERRITE CHIP                  |             |
| C325     |         |           | CK73HB1A104K  | CHIP C 0.10UF K      |             | L13,14   |         |           | L40-2285-92   | SMALL FIXED INDUCTOR(220NH)   |             |
| C326     |         |           | CK73HB1H102K  | CHIP C 1000PF K      |             | L16      |         |           | L40-3978-67   | SMALL FIXED INDUCTOR(39NH)    |             |
| C327     |         |           | CC73HCH1H101J | CHIP C 100PF J       |             | L17      |         |           | L40-2778-67   | SMALL FIXED INDUCTOR(27NH)    |             |
| C328     |         |           | CK73HB1H391K  | CHIP C 390PF K       |             | L18,19   |         |           | L41-2285-03   | SMALL FIXED INDUCTOR          |             |
| C329,330 |         |           | CK73GB1A105K  | CHIP C 1.0UF K       |             | L20,21   |         |           | L40-3391-86   | SMALL FIXED INDUCTOR(3.3UH)   |             |
| C331     |         |           | CK73HB1A104K  | CHIP C 0.10UF K      |             | L22      |         |           | L92-0138-05   | FERRITE CHIP                  |             |
| C332     |         |           | CK73HB1H471K  | CHIP C 470PF K       |             | L23      |         |           | L40-3975-92   | SMALL FIXED INDUCTOR(39NH)    |             |
| C333,334 |         |           | CK73GB1C104K  | CHIP C 0.10UF K      |             | L24      |         |           | L92-0141-05   | FERRITE CHIP                  |             |
| C335     |         |           | CC73GCH1H221J | CHIP C 220PF J       |             | L25      |         |           | L40-8275-92   | SMALL FIXED INDUCTOR(82NH)    |             |
| C336     |         |           | CK73FB1C474K  | CHIP C 0.47UF K      |             | L50      |         |           | L92-0138-05   | FERRITE CHIP                  |             |
| C338     |         |           | CC73GCH1H101J | CHIP C 100PF J       |             | L102     |         |           | L40-1085-92   | SMALL FIXED INDUCTOR(100NH)   |             |
| C339     |         |           | C92-0560-05   | CHIP-TAN 10UF 6.3WV  |             | L103     |         |           | L92-0138-05   | FERRITE CHIP                  |             |
| C340     |         |           | CK73GB1C104K  | CHIP C 0.10UF K      |             | L104     |         |           | L40-2775-92   | SMALL FIXED INDUCTOR(27NH)    |             |
| C341     |         |           | CK73GB1C473K  | CHIP C 0.047UF K     |             | L105     |         |           | L40-1585-54   | SMALL FIXED INDUCTOR(150NH)   |             |
| C342     |         |           | C92-0560-05   | CHIP-TAN 10UF 6.3WV  |             | L106     |         |           | L92-0149-05   | FERRITE CHIP                  |             |
| C343     |         |           | CK73GB1C473K  | CHIP C 0.047UF K     |             | L107     |         |           | L40-2775-54   | SMALL FIXED INDUCTOR(27NH)    |             |
| C344     |         |           | CC73GCH1H221J | CHIP C 220PF J       |             | L108     |         |           | L92-0149-05   | FERRITE CHIP                  |             |
| C345     |         |           | C92-0665-05   | TANTAL 100UF 6.3WV   |             | L109     |         |           | L40-2295-85   | SMALL FIXED INDUCTOR(2.2UH)   |             |
| C346     |         |           | CK73GB1H102K  | CHIP C 1000PF K      |             |          |         |           |               |                               |             |
| C348     |         |           | CK73HB1H471K  | CHIP C 470PF K       |             |          |         |           |               |                               |             |

## PARTS LIST

TX-RX UNIT (X57-6870-20)

| Ref. No. | Address | New parts | Parts No.    | Description                   | Destination | Ref. No. | Address | New parts | Parts No.    | Description          | Destination |
|----------|---------|-----------|--------------|-------------------------------|-------------|----------|---------|-----------|--------------|----------------------|-------------|
| L110     |         |           | L40-5675-92  | SMALL FIXED INDUCTOR(56NH)    |             | R37      |         |           | RK73HB1J101J | CHIP R 100 J 1/16W   |             |
| L111     |         |           | L40-1092-81  | SMALL FIXED INDUCTOR          |             | R38      |         |           | RK73HB1J181J | CHIP R 180 J 1/16W   |             |
| L112     |         |           | L34-4577-05  | AIR-CORE COIL                 |             | R39      |         |           | RK73HB1J151J | CHIP R 150 J 1/16W   |             |
| L113     |         |           | L34-4563-05  | AIR-CORE COIL                 |             | R40      |         |           | RK73HB1J101J | CHIP R 100 J 1/16W   |             |
| L114,115 |         |           | L34-4573-05  | AIR-CORE COIL                 |             | R41      |         |           | RK73HB1J154J | CHIP R 150K J 1/16W  |             |
| L116     |         |           | L34-4576-05  | AIR-CORE COIL                 |             | R42      |         |           | RK73HB1J472J | CHIP R 4.7K J 1/16W  |             |
| L117     |         |           | L34-4575-05  | AIR-CORE COIL                 |             | R43      |         |           | RK73HB1J101J | CHIP R 100 J 1/16W   |             |
| L118     |         |           | L34-4567-05  | AIR-CORE COIL                 |             | R44      |         |           | RK73HB1J102J | CHIP R 1.0K J 1/16W  |             |
| L119     |         |           | L34-4566-05  | AIR-CORE COIL                 |             | R45, 46  |         |           | RK73HB1J332J | CHIP R 3.3K J 1/16W  |             |
| L201     |         |           | L40-1091-37  | SMALL FIXED INDUCTOR(1.000UH) |             | R47      |         |           | RK73HB1J470J | CHIP R 47 J 1/16W    |             |
| L202     |         |           | L40-3975-92  | SMALL FIXED INDUCTOR(39NH)    |             | R48      |         |           | RK73HB1J331J | CHIP R 330 J 1/16W   |             |
| L203     |         |           | L92-0138-05  | FERRITE CHIP                  |             | R49      |         |           | RK73HB1J222J | CHIP R 2.2K J 1/16W  |             |
| L204     |         |           | L40-5685-85  | SMALL FIXED INDUCTOR(0.56UH)  |             | R50      |         |           | RK73HB1J472J | CHIP R 4.7K J 1/16W  |             |
| L205     |         |           | L40-6875-92  | SMALL FIXED INDUCTOR(68NH)    |             | R51      |         |           | RK73HB1J100J | CHIP R 10 J 1/16W    |             |
| L206     |         |           | L40-1885-92  | SMALL FIXED INDUCTOR(180NH)   |             | R101     |         |           | RK73HB1J123J | CHIP R 12K J 1/16W   |             |
| L207     |         |           | L40-1585-92  | SMALL FIXED INDUCTOR(150NH)   |             | R103     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             |
| L209     |         |           | L41-5678-14  | SMALL FIXED INDUCTOR          |             | R107     |         |           | RK73GB1J561J | CHIP R 560 J 1/16W   |             |
| L210     |         |           | L92-0138-05  | FERRITE CHIP                  |             | R108     |         |           | RK73GB1J152J | CHIP R 1.5K J 1/16W  |             |
| L211     |         |           | L41-5678-14  | SMALL FIXED INDUCTOR          |             | R109     |         |           | RK73GB1J150J | CHIP R 15 J 1/16W    |             |
| L213     |         |           | L41-5678-14  | SMALL FIXED INDUCTOR          |             | R110,111 |         |           | RK73GB1J331J | CHIP R 330 J 1/16W   |             |
| L214     |         |           | L41-4778-14  | SMALL FIXED INDUCTOR          |             | R112     |         |           | RK73GB1J180J | CHIP R 18 J 1/16W    |             |
| L301     |         |           | L92-0140-05  | FERRITE CHIP                  |             | R113     |         |           | RK73GB1J331J | CHIP R 330 J 1/16W   |             |
| L302     |         |           | L92-0149-05  | FERRITE CHIP                  |             | R114     |         |           | RK73GB1J473J | CHIP R 47K J 1/16W   |             |
| L401     |         |           | L92-0149-05  | FERRITE CHIP                  |             | R115     |         |           | RK73GB1J103J | CHIP R 10K J 1/16W   |             |
| L402-404 |         |           | L92-0138-05  | FERRITE CHIP                  |             | R116     |         |           | RK73GB1J150J | CHIP R 15 J 1/16W    |             |
| X1       |         |           | L77-1931-05  | TCXO(12.8MHZ)                 |             | R117     |         |           | RK73GB1J683J | CHIP R 68K J 1/16W   |             |
| X2       |         | *         | L78-1411-05  | RESONATOR(7.37MHZ)            |             | R119     |         |           | RK73GB1J331J | CHIP R 330 J 1/16W   |             |
| XF201    |         |           | L71-0619-05  | MCF(38.85MHZ)                 |             | R120     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             |
| CP404    |         |           | RK75HA1J473J | CHIP-COM 47K J 1/16W          |             | R121     |         |           | RK73GB1J561J | CHIP R 560 J 1/16W   |             |
| CP405    |         |           | RK75HA1J102J | CHIP-COM 1.0K J 1/16W         |             | R122     |         |           | RK73GB1J473J | CHIP R 47K J 1/16W   |             |
| R1       |         |           | RK73HB1J223J | CHIP R 22K J 1/16W            |             | R123     |         |           | RK73GB1J820J | CHIP R 82 J 1/16W    |             |
| R2       |         |           | RK73HB1J103J | CHIP R 10K J 1/16W            |             | R124     |         |           | RK73GB1J123J | CHIP R 12K J 1/16W   |             |
| R3       |         |           | RK73HB1J333J | CHIP R 33K J 1/16W            |             | R126     |         |           | RK73GB1J222J | CHIP R 2.2K J 1/16W  |             |
| R4       |         |           | RK73HB1J563J | CHIP R 56K J 1/16W            |             | R127-129 |         |           | RK73EB2ER39K | CHIP R 0.39 K 1/4W   |             |
| R5       |         |           | RK73HB1J104J | CHIP R 100K J 1/16W           |             | R130-135 |         |           | RK73GH1J154D | CHIP R 150K D 1/16W  |             |
| R6       |         |           | RK73HB1J823J | CHIP R 82K J 1/16W            |             | R136,137 |         |           | RK73GB1J271J | CHIP R 270 J 1/16W   |             |
| R7       |         |           | RK73HB1J101J | CHIP R 100 J 1/16W            |             | R138     |         |           | RK73GB1J105J | CHIP R 1.0M J 1/16W  |             |
| R8 -11   |         |           | R92-1368-05  | CHIP R 0 OHM                  |             | R139     |         |           | RK73GB1J473J | CHIP R 47K J 1/16W   |             |
| R12      |         |           | RK73HB1J222J | CHIP R 2.2K J 1/16W           |             | R140     |         |           | RK73GB1J563J | CHIP R 56K J 1/16W   |             |
| R13      |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W          |             | R141     |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             |
| R14      |         |           | RK73HB1J334J | CHIP R 330K J 1/16W           |             | R142     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             |
| R15      |         |           | RK73GB1J221J | CHIP R 220 J 1/16W            |             | R143     |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             |
| R16      |         |           | RK73GB1J561J | CHIP R 560 J 1/16W            |             | R203     |         |           | RK73HB1J184J | CHIP R 180K J 1/16W  |             |
| R17      |         |           | RK73HB1J101J | CHIP R 100 J 1/16W            |             | R206     |         |           | RK73GB1J100J | CHIP R 10 J 1/16W    |             |
| R18      |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W          |             | R207     |         |           | RK73HB1J472J | CHIP R 4.7K J 1/16W  |             |
| R19      |         |           | RK73GB1J152J | CHIP R 1.5K J 1/16W           |             | R208     |         |           | RK73HB1J823J | CHIP R 82K J 1/16W   |             |
| R20      |         |           | RK73HB1J100J | CHIP R 10 J 1/16W             |             | R209     |         |           | RK73HB1J272J | CHIP R 2.7K J 1/16W  |             |
| R21      |         |           | RK73GB1J681J | CHIP R 680 J 1/16W            |             | R210,211 |         |           | RK73HB1J332J | CHIP R 3.3K J 1/16W  |             |
| R22      |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W          |             | R212     |         |           | RK73HB1J823J | CHIP R 82K J 1/16W   |             |
| R23      |         |           | RK73GB1J103J | CHIP R 10K J 1/16W            |             | R213     |         |           | RK73HB1J392J | CHIP R 3.9K J 1/16W  |             |
| R25      |         |           | RK73HB1J223J | CHIP R 22K J 1/16W            |             | R215     |         |           | RK73HB1J101J | CHIP R 100 J 1/16W   |             |
| R26      |         |           | RK73HB1J103J | CHIP R 10K J 1/16W            |             | R216     |         |           | RK73HB1J124J | CHIP R 120K J 1/16W  |             |
| R27      |         |           | RK73HB1J220J | CHIP R 22 J 1/16W             |             | R217     |         |           | RK73HB1J472J | CHIP R 4.7K J 1/16W  |             |
| R30      |         |           | RK73HB1J123J | CHIP R 12K J 1/16W            |             | R218     |         |           | RK73HB1J561J | CHIP R 560 J 1/16W   |             |
| R31      |         |           | RK73HB1J564J | CHIP R 560K J 1/16W           |             | R219,220 |         |           | RK73GB1J561J | CHIP R 560 J 1/16W   |             |
| R32      |         |           | RK73HB1J102J | CHIP R 1.0K J 1/16W           |             | R221     |         |           | RK73GB1J102J | CHIP R 1.0K J 1/16W  |             |
| R33      |         |           | RK73HB1J154J | CHIP R 150K J 1/16W           |             | R222     |         |           | RK73GB1J221J | CHIP R 220 J 1/16W   |             |
| R34      |         |           | RK73HB1J472J | CHIP R 4.7K J 1/16W           |             | R223-226 |         |           | RK73HB1J823J | CHIP R 82K J 1/16W   |             |
| R35, 36  |         |           | RK73HB1J274J | CHIP R 270K J 1/16W           |             | R227     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             |
|          |         |           |              |                               |             | R228,229 |         |           | RK73HB1J105J | CHIP R 1.0M J 1/16W  |             |

AK : TK-2202 (K) AM : TK-2202 (M) BM : TK-2206 (M)

## PARTS LIST

## TX-RX UNIT (X57-6870-20)


| Ref. No. | Address | New parts | Parts No.    | Description          | Destination | Ref. No.  | Address | New parts | Parts No.      | Description                | Destination |
|----------|---------|-----------|--------------|----------------------|-------------|-----------|---------|-----------|----------------|----------------------------|-------------|
| R230     |         |           | RK73GB1J222J | CHIP R 2.2K J 1/16W  |             | R405      |         |           | RK73GB1J334J   | CHIP R 330K J 1/16W        |             |
| R231     |         |           | RK73GB1J470J | CHIP R 47 J 1/16W    |             | R406      |         |           | RK73HH1J474D   | CHIP R 470K D 1/16W        |             |
| R233     |         |           | RK73GB1J221J | CHIP R 220 J 1/16W   |             | R407      |         |           | RK73HB1J334J   | CHIP R 330K J 1/16W        |             |
| R234     |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             | R408-412  |         |           | RK73HB1J473J   | CHIP R 47K J 1/16W         |             |
| R237     |         |           | RK73GB1J184J | CHIP R 180K J 1/16W  |             | R413,414  |         |           | RK73GB1J331J   | CHIP R 330 J 1/16W         |             |
| R238     |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             | R415,416  |         |           | RK73GB1J473J   | CHIP R 47K J 1/16W         |             |
| R239     |         |           | RK73GB1J470J | CHIP R 47 J 1/16W    |             | R417-420  |         |           | RK73HB1J473J   | CHIP R 47K J 1/16W         |             |
| R240     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             | R421,422  |         |           | RK73HB1J102J   | CHIP R 1.0K J 1/16W        |             |
| R241,242 |         |           | RK73HB1J105J | CHIP R 1.0M J 1/16W  |             | R423      |         |           | R92-1368-05    | CHIP R 0 OHM               |             |
| R243     |         |           | R92-0670-05  | CHIP R 0 OHM         |             | R424,425  |         |           | RK73HB1J473J   | CHIP R 47K J 1/16W         |             |
| R291     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             | R426      |         |           | R92-1368-05    | CHIP R 0 OHM               |             |
| R301     |         |           | RK73HB1J473J | CHIP R 47K J 1/16W   |             | R435      |         |           | RK73HB1J473J   | CHIP R 47K J 1/16W         |             |
| R304     |         |           | RK73HB1J564J | CHIP R 560K J 1/16W  |             | R436      |         |           | R92-1252-05    | CHIP R 0 OHM J 1/16W       |             |
| R305     |         |           | RK73HB1J104J | CHIP R 100K J 1/16W  |             | R437,438  |         |           | RK73HB1J473J   | CHIP R 47K J 1/16W         |             |
| R306     |         |           | RK73HB1J102J | CHIP R 1.0K J 1/16W  |             | R445,446  |         |           | R92-1252-05    | CHIP R 0 OHM J 1/16W       |             |
| R307,308 |         |           | R92-1368-05  | CHIP R 0 OHM         |             | R447      |         |           | RK73HB1J472J   | CHIP R 4.7K J 1/16W        |             |
| R310     |         |           | RK73GB1J394J | CHIP R 390K J 1/16W  |             | VR1       |         |           | R12-7491-05    | TRIMMING POT.(68K)         |             |
| R311     |         |           | RK73HB1J123J | CHIP R 12K J 1/16W   |             | S401-403  |         |           | S70-0414-05    | TACT SWITCH                |             |
| R312     |         |           | RK73GB1J334J | CHIP R 330K J 1/16W  |             | MIC301    |         |           | T91-0543-05    | MIC ELEMENT                |             |
| R313     |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             | D1        |         |           | MA2S111        | DIODE                      |             |
| R314     |         |           | RK73GB1J103J | CHIP R 10K J 1/16W   |             | D4 ,5     |         |           | 1SV325         | VARIABLE CAPACITANCE DIODE |             |
| R315     |         |           | RK73GB1J334J | CHIP R 330K J 1/16W  |             | D7        |         |           | 1SV325         | VARIABLE CAPACITANCE DIODE |             |
| R316     |         |           | RK73GB1J124J | CHIP R 120K J 1/16W  |             | D9        |         |           | 1SV325         | VARIABLE CAPACITANCE DIODE |             |
| R317     |         |           | RK73GB1J474J | CHIP R 470K J 1/16W  |             | D10       |         |           | 1SV278         | VARIABLE CAPACITANCE DIODE |             |
| R318     |         |           | RK73GB1J122J | CHIP R 1.2K J 1/16W  |             | D11       |         |           | MA2S111        | DIODE                      |             |
| R319     |         |           | RK73HB1J563J | CHIP R 56K J 1/16W   |             | D101      |         |           | HSC277         | DIODE                      |             |
| R320     |         |           | RK73HB1J332J | CHIP R 3.3K J 1/16W  |             | D102      |         |           | HZU5CLL        | ZENER DIODE                |             |
| R321     |         |           | RK73HB1J224J | CHIP R 220K J 1/16W  |             | D103-106  |         |           | HVC131         | DIODE                      |             |
| R322     |         |           | RK73HB1J184J | CHIP R 180K J 1/16W  |             | D202      |         |           | HSC277         | DIODE                      |             |
| R323     |         |           | RK73HB1J563J | CHIP R 56K J 1/16W   |             | D203-206  |         |           | 1SV305         | VARIABLE CAPACITANCE DIODE |             |
| R324,325 |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             | D301,302  |         |           | RB706F-40      | DIODE                      |             |
| R326     |         |           | R92-1252-05  | CHIP R 0 OHM J 1/16W |             | D303      |         |           | DAN222         | DIODE                      |             |
| R327     |         |           | RK73GB1J184J | CHIP R 180K J 1/16W  |             | D401      |         |           | RB521S-30      | DIODE                      |             |
| R328     |         |           | RK73GB1J103J | CHIP R 10K J 1/16W   |             | D402      |         |           | 1SR154-400     | DIODE                      |             |
| R329     |         |           | RK73GB1J823J | CHIP R 82K J 1/16W   |             | IC1       |         |           | MB15A02        | MOS IC                     |             |
| R330     |         |           | RK73HB1J332J | CHIP R 3.3K J 1/16W  |             | IC2       |         |           | UPB1509GV      | BI-POLAR IC                |             |
| R331     |         |           | RK73GB1J393J | CHIP R 39K J 1/16W   |             | IC101     |         |           | TA75W01FU      | MOS IC                     |             |
| R332     |         |           | RK73GB1J153J | CHIP R 15K J 1/16W   |             | IC201     |         |           | TA31136FN      | MOS IC                     |             |
| R334     |         |           | RK73GB1J473J | CHIP R 47K J 1/16W   |             | IC301     |         |           | AQUA           | MOS IC                     |             |
| R335     |         |           | RK73GB1J222J | CHIP R 2.2K J 1/16W  |             | IC302     |         |           | TA7368F        | MOS IC                     |             |
| R336     |         |           | RK73GB1J102J | CHIP R 1.0K J 1/16W  |             | IC401,402 |         |           | XC6204B502MR   | MOS IC                     |             |
| R337     |         |           | RK73GB1J101J | CHIP R 100 J 1/16W   |             | IC403     |         | *         | BD4840FVE      | MOS IC                     |             |
| R338     |         |           | RK73GB1J222J | CHIP R 2.2K J 1/16W  |             | IC404     |         | *         | BD4845FVE      | MOS IC                     |             |
| R339     |         |           | RK73GB1J471J | CHIP R 470 J 1/16W   |             | IC405     |         | *         | 30622MAA-B89GP | MPU                        |             |
| R340     |         |           | RK73GB1J182J | CHIP R 1.8K J 1/16W  |             | IC406     |         | *         | BR24L08F-W     | ROM IC                     |             |
| R341     |         |           | RK73GB1J103J | CHIP R 10K J 1/16W   |             | Q1        |         |           | KTC4082        | TRANSISTOR                 |             |
| R342     |         |           | RK73GB1J100J | CHIP R 10 J 1/16W    |             | Q2        |         |           | 2SC5108(Y)     | TRANSISTOR                 |             |
| R343     |         |           | RK73GB1J474J | CHIP R 470K J 1/16W  |             | Q3 ,4     |         |           | 2SK508NV(K52)  | FET                        |             |
| R344     |         |           | RK73GB1J102J | CHIP R 1.0K J 1/16W  |             | Q5        |         |           | DTA143TE       | DIGITAL TRANSISTOR         |             |
| R345,346 |         |           | RK73GB1J101J | CHIP R 100 J 1/16W   |             | Q6        |         |           | 2SC5108(Y)     | TRANSISTOR                 |             |
| R347     |         |           | RK73GB1J104J | CHIP R 100K J 1/16W  |             | Q7        |         |           | DTA143TE       | DIGITAL TRANSISTOR         |             |
| R348     |         |           | RK73GB1J563J | CHIP R 56K J 1/16W   |             | Q8        |         |           | 2SC4617(S)     | TRANSISTOR                 |             |
| R349     |         |           | RK73GB1J333J | CHIP R 33K J 1/16W   |             | Q9        |         |           | 2SC5108(Y)     | TRANSISTOR                 |             |
| R350     |         |           | R92-1368-05  | CHIP R 0 OHM         |             | Q102      |         |           | 2SC4926YD      | TRANSISTOR                 |             |
| R354,355 |         |           | RK73HB1J103J | CHIP R 10K J 1/16W   |             | Q103      |         |           | 2SK2596        | FET                        |             |
| R357     |         |           | R92-1368-05  | CHIP R 0 OHM         |             | Q104      |         |           | DTC114EE       | DIGITAL TRANSISTOR         |             |
| R360     |         |           | R92-1368-05  | CHIP R 0 OHM         |             | Q105      |         |           | 2SK879(Y)      | FET                        |             |
| R365     |         |           | RK73HB1J473J | CHIP R 47K J 1/16W   |             |           |         |           |                |                            |             |
| R403     |         |           | RK73GB1J101J | CHIP R 100 J 1/16W   |             |           |         |           |                |                            |             |
| R404     |         |           | RK73HH1J474D | CHIP R 470K D 1/16W  |             |           |         |           |                |                            |             |

## PARTS LIST

TX-RX UNIT (X57-6870-20)  
ADDITIONAL PCB


| Ref. No.              | Address | New parts | Parts No.     | Description         | Destination | Ref. No. | Address | New parts | Parts No. | Description | Destination |
|-----------------------|---------|-----------|---------------|---------------------|-------------|----------|---------|-----------|-----------|-------------|-------------|
| Q106                  |         |           | 2SK2595       | FET                 |             |          |         |           |           |             |             |
| Q107                  |         |           | DTC114EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q108                  |         |           | 2SK1824       | FET                 |             |          |         |           |           |             |             |
| Q109                  |         |           | DTA144EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q202                  |         |           | DTA144EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q203                  |         |           | 2SC4649(N,P)  | TRANSISTOR          |             |          |         |           |           |             |             |
| Q204,205              |         |           | 3SK318        | FET                 |             |          |         |           |           |             |             |
| Q301                  |         |           | DTA114EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q302                  |         |           | 2SC4919       | TRANSISTOR          |             |          |         |           |           |             |             |
| Q303                  |         |           | DTC144EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q304                  |         |           | 2SA1362(GR)   | TRANSISTOR          |             |          |         |           |           |             |             |
| Q305                  |         |           | DTC144EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q306                  |         |           | CPH3413       | FET                 |             |          |         |           |           |             |             |
| Q316                  |         |           | CPH3413       | FET                 |             |          |         |           |           |             |             |
| Q401,402              |         |           | DTC114EE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q403,404              |         |           | CPH3317       | FET                 |             |          |         |           |           |             |             |
| Q405                  |         |           | DTA123JE      | DIGITAL TRANSISTOR  |             |          |         |           |           |             |             |
| Q407,408              |         |           | 2SK1830       | FET                 |             |          |         |           |           |             |             |
| TH101                 |         |           | 157-104-65001 | THERMISTOR          |             |          |         |           |           |             |             |
| TH203                 |         |           | 157-104-65001 | THERMISTOR          |             |          |         |           |           |             |             |
| <b>ADDITIONAL PCB</b> |         |           |               |                     |             |          |         |           |           |             |             |
| C901,902              |         |           | CK73GB1A105K  | CHIP C 1.0UF K      |             |          |         |           |           |             |             |
| R901,902              |         |           | RK73GB1J472J  | CHIP R 4.7K J 1/16W |             |          |         |           |           |             |             |
| Q901                  |         |           | 2SK1824       | FET                 |             |          |         |           |           |             |             |

## EXPLODED VIEW

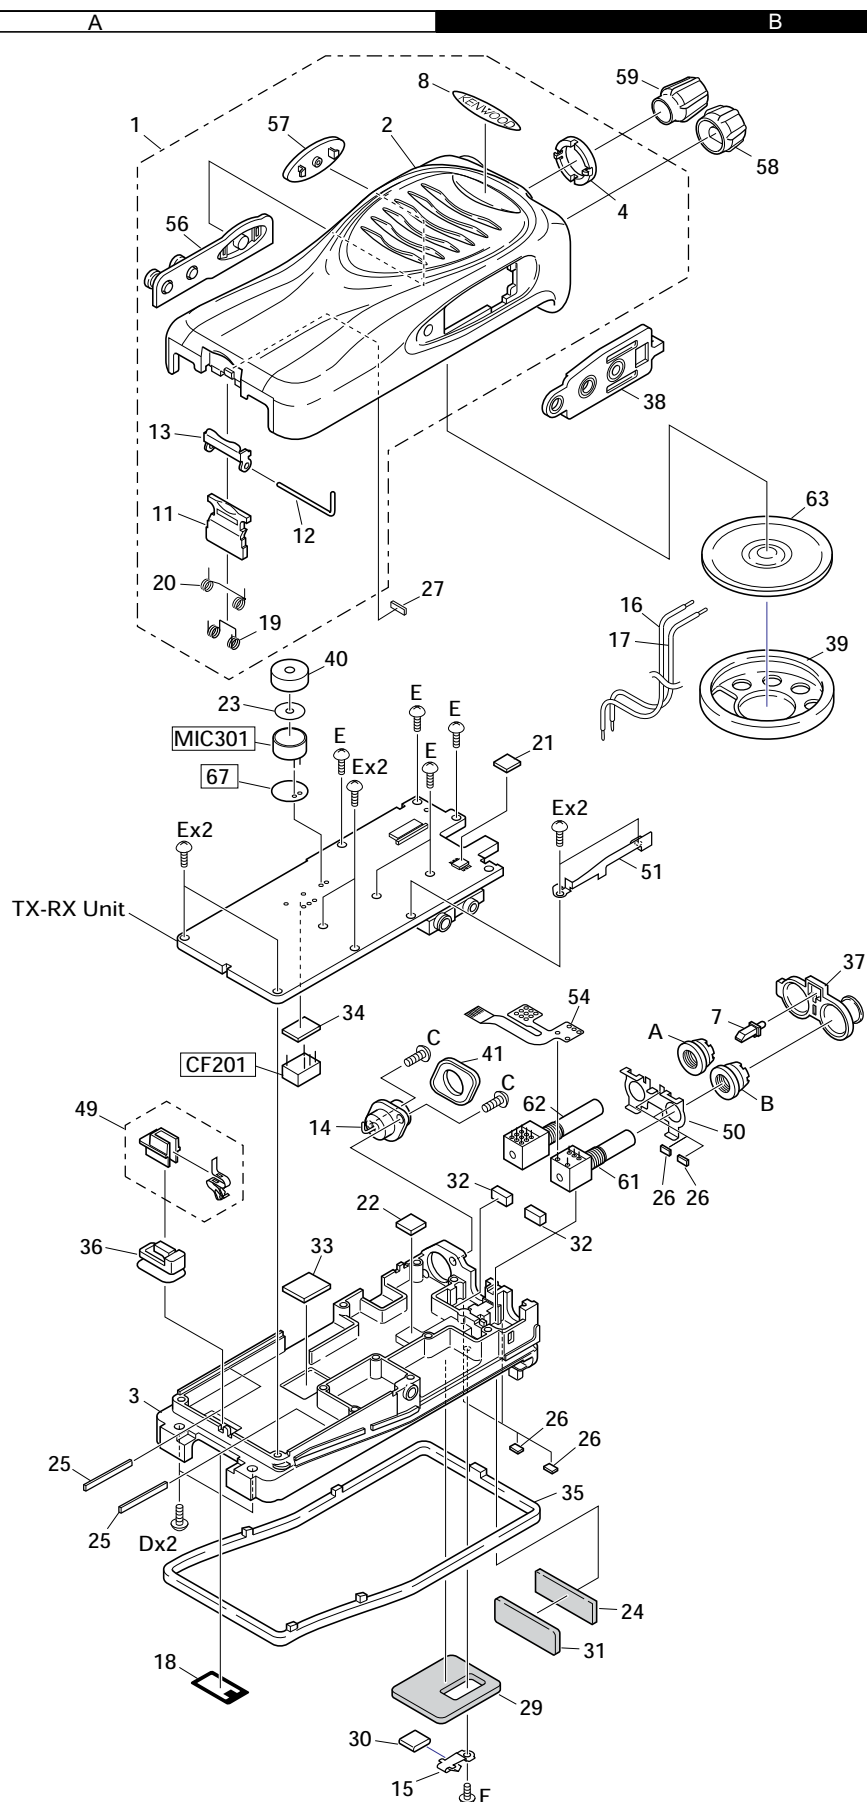

- A :N14-0808-04
- B :N14-0812-04
- C :N30-2604-46
- D :N30-2606-46
- E :N83-2005-46

## PACKING (TK-2202)

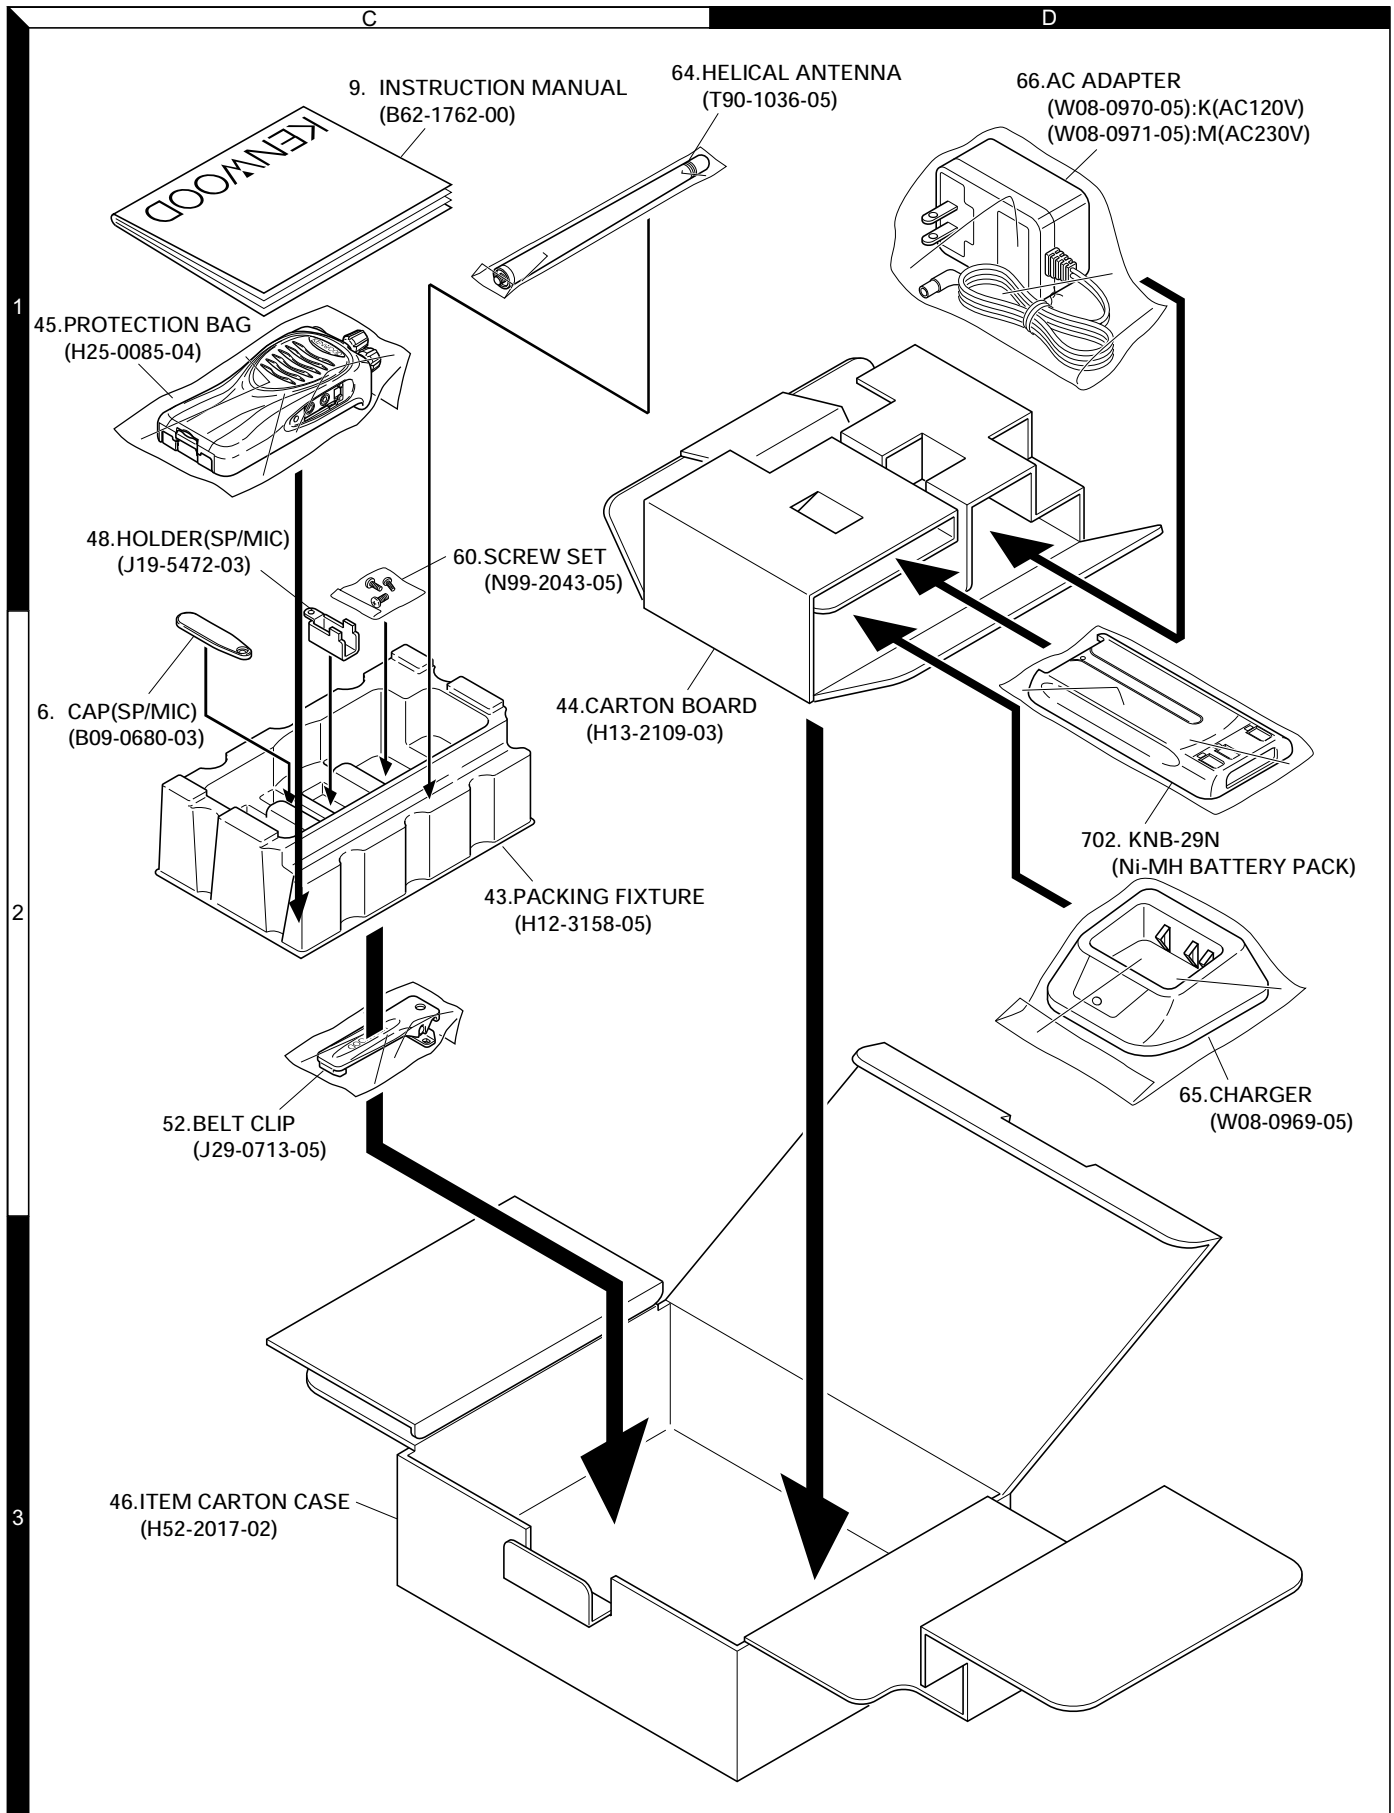

## PACKING (TK-2206)

