9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

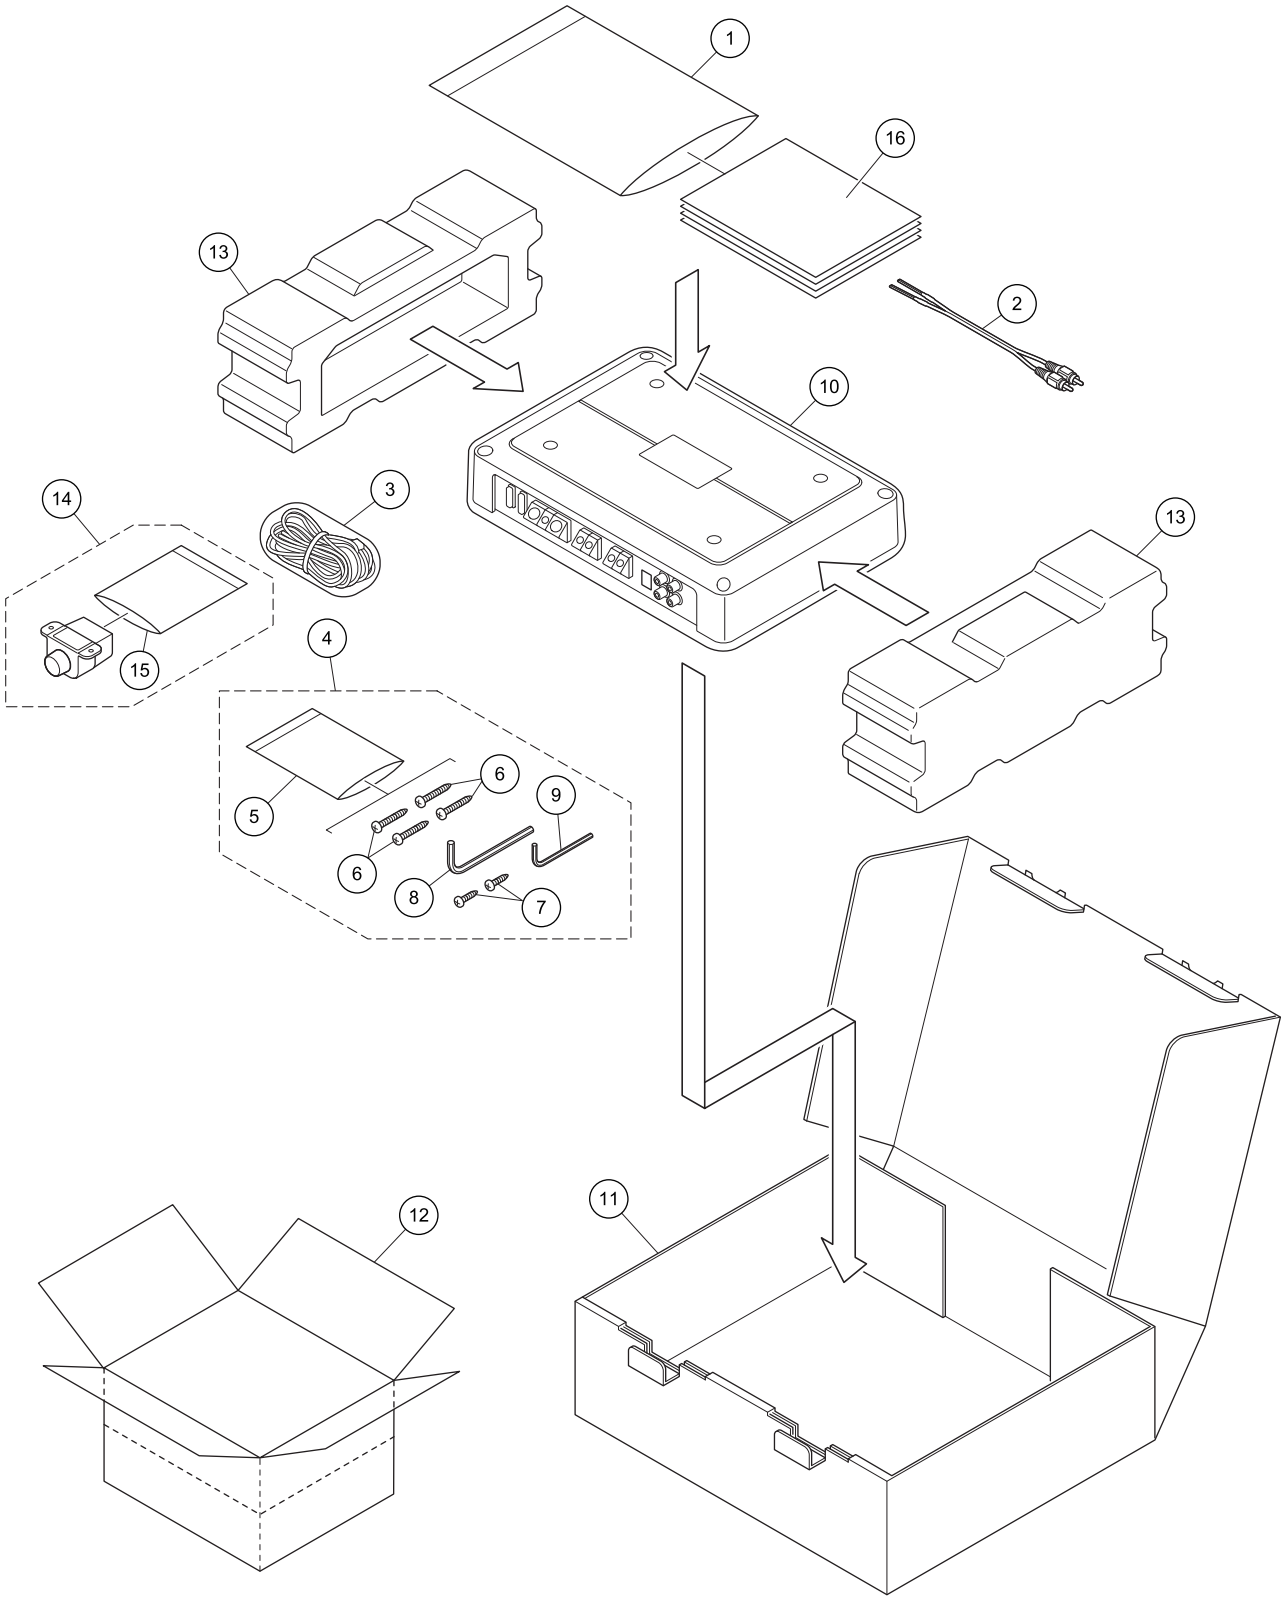

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Polyethylene Bag	CEG1116
	2	Cord Assy	YDE5010
	3	Cord Assy	YDP5015
	4	Screw Assy	YEA5034
*	5	Polyethylene Sheet	CNM4338
	6	Screw	YBA5003
	7	Screw	YBA5004
	8	Shaft	YLP5003
	9	Shaft	YLP5004
	10-1	Polyethylene Bag	See Contrast table(2)
	10-2	Packing Sheet	YEG5007
	11	Unit Box	See Contrast table(2)
	12	Contain Box	See Contrast table(2)
	13	Protector	YHP5045
	14	Remote Control Assy	CXC4064
*	15	Polyethylene Bag	CEG1171
*	16-1	Warranty Card	See Contrast table(2)
	16-2	Owner's Manual	See Contrast table(2)

(2) CONTRAST TABLE

PRS-D2200T/XS/UC, PRS-D220/XS/EW5 and PRS-D2200T/XS/ES are constructed the same except for the following:

Mark	No.	Description	PRS-D2200T/XS/UC	PRS-D220/XS/EW5	PRS-D2200T/XS/ES
	10-1	Polyethylene Bag	YEG5004	YEG5003	YEG5003
	11	Unit Box	YHG5420	YHG5421	YHG5422
	12	Contain Box	YHL5420	YHL5421	YHL5422
*	16-1	Warranty Card	CRY1070	CRY1265	Not used
	16-2	Owner's Manual	YRD5198	YRD5199	YRD5200

Owner's Manual,Installation Manual

Part No.	Language
YRD5198	English, French, Spanish
YRD5199	English, Spanish, German, French, Italian, Dutch, Russian
YRD5200	English, Spanish, Portuguese(B), Arabic

9.2 EXTERIOR

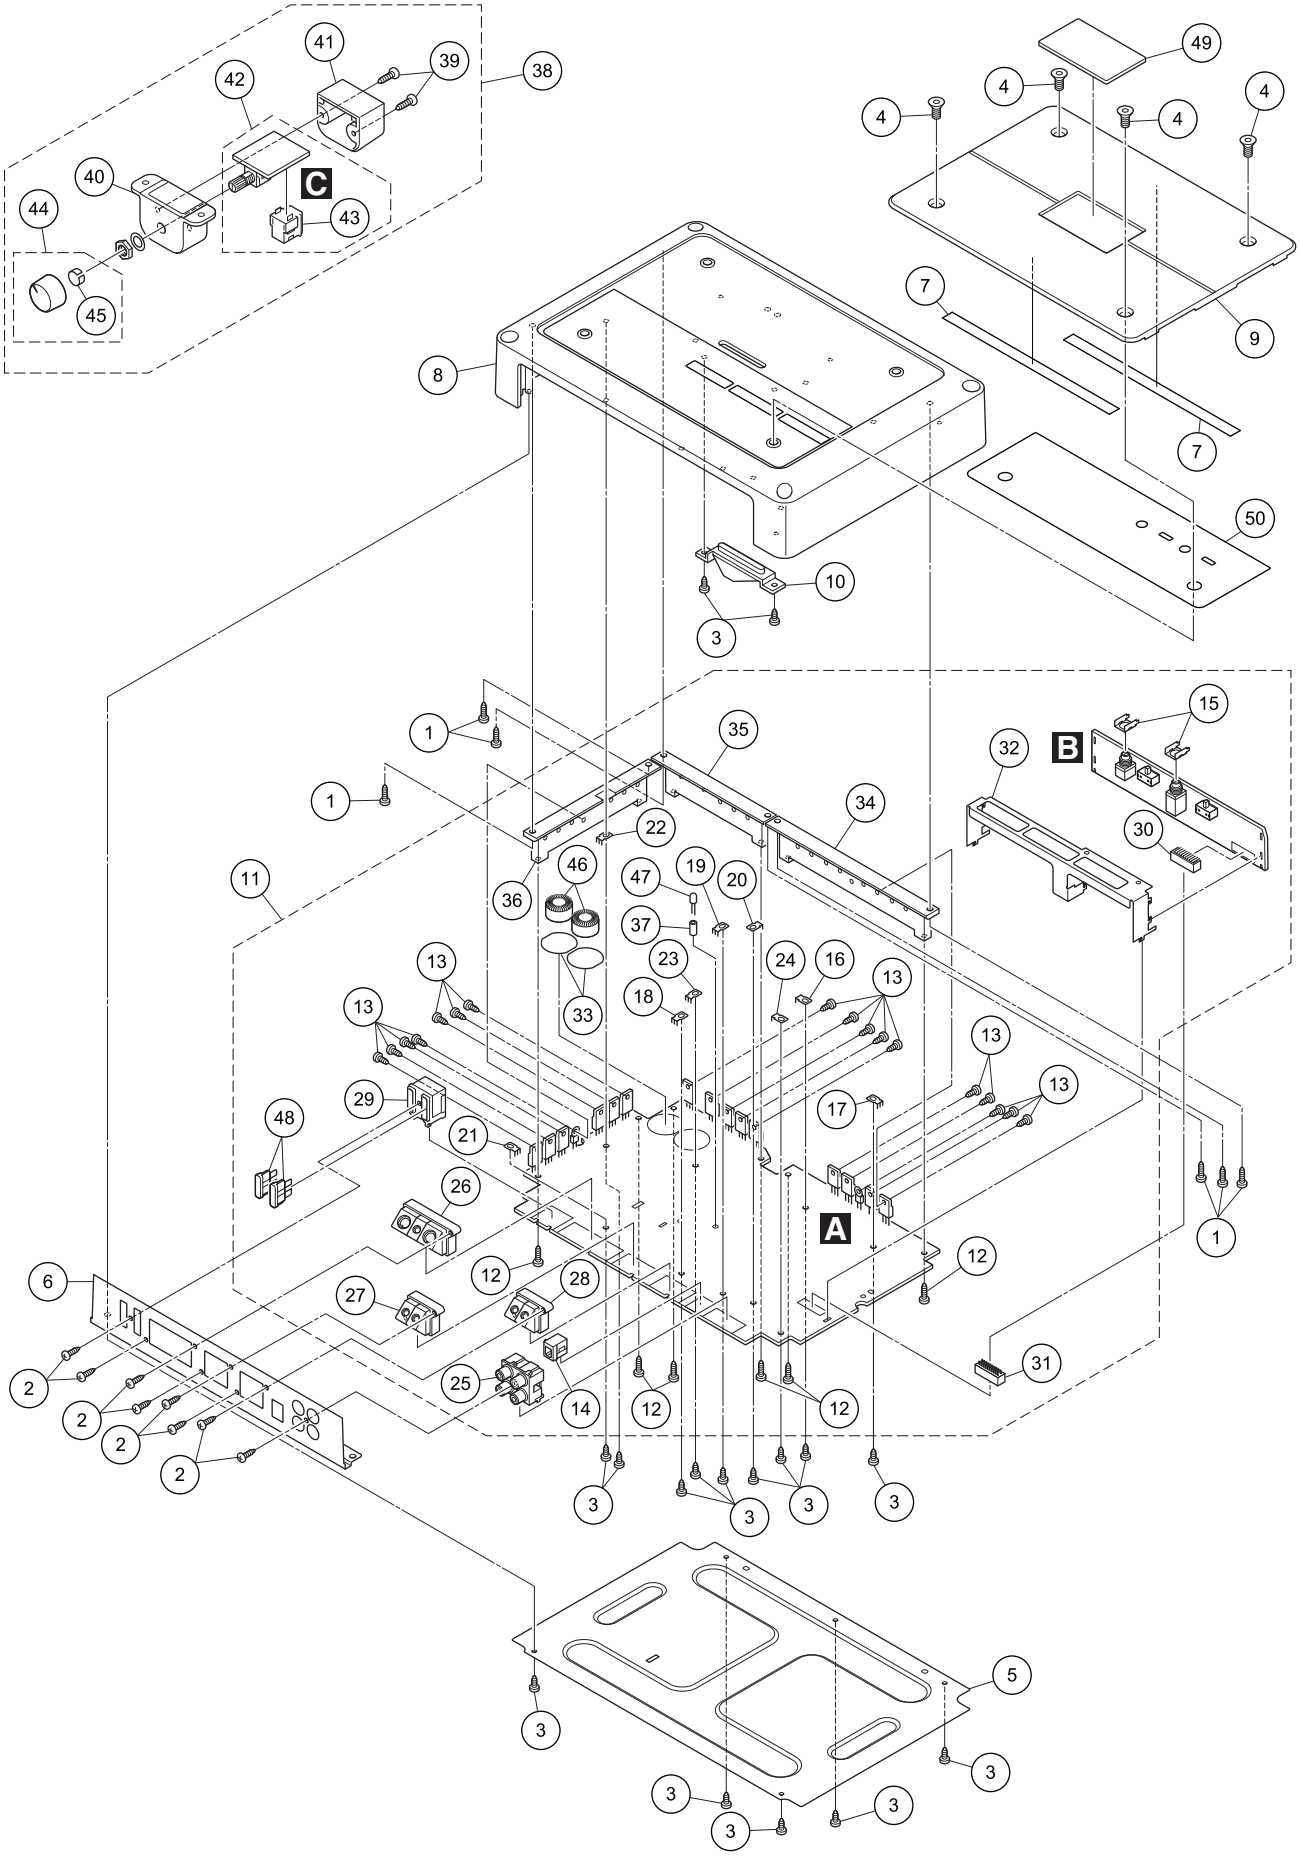
A
B
C
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BBZ30P100FTB
	2	Screw	BPZ30P100FTB
	3	Screw(M3 x 8)	CBA2011
	4	Screw	YBA5002
	5	Case	YNB5042
	6	Panel	YNB5044
	7	Spacer	YNN5009
	8	Heat Sink	YNR5108
	9	Cover	YNR5114
	10	Lighting Conductor	YNV5164
	11	Amp Unit	YWH5030
	12	Screw	BBZ30P080FSN
	13	Screw(M3 x 8)	CBA2011
	14	Connector(CN501)	CKS4962
	15	Holder	CND2466
	16	Terminal(CN301)	VNF1084
	17	Terminal(CN302)	VNF1084
	18	Terminal(CN303)	VNF1084
	19	Terminal(CN304)	VNF1084
	20	Terminal(CN502)	VNF1084
	21	Terminal(CN601)	VNF1084
	22	Terminal(CN651)	VNF1084
	23	Terminal(CN652)	VNF1084
	24	Terminal(CN800)	VNF1084
	25	Pin Jack(CN801)	YKB5001
	26	Terminal(CN600)	YKE5020
	27	Terminal(CN305)	YKE5021
	28	Terminal(CN306)	YKE5021
	29	Fuse Holder	YKR5002
	30	Connector(CN102)	YKS5008
	31	Connector(CN101)	YKS5009
	32	Holder	YND5020
	33	Insulator	YNM5045
	34	Sub Heatsink	YNR5066
	35	Sub Heatsink	YNR5067
	36	Sub Heatsink	YNR5068
	37	Spacer	YNS5118
	38	Remote Control Assy	CXC4064
	39	Screw	BPZ20P100FTB
	40	Grille	CNS8140
	41	Cover	CNS8141
	42	Remote Control Unit	CWM9848
	43	Connector(CN1351)	CKS4962
	44	Knob Unit	CXC4335
	45	Spring	CBL1692
	46	Choke Coil(L651, L652)	CTH1362
	47	LED(D608)	NSPB346BS-5859
⚠	48	Fuse(FU601, FU602) (30 A)	CEK1330
*	49	Badge	See Contrast table(2)
*	50	Plate	See Contrast table(2)

(2) CONTRAST TABLE

PRS-D2200T/XS/UC, PRS-D220/XS/EW5 and PRS-D2200T/XS/ES are constructed the same except for the following:

Mark	No.	Description	PRS-D2200T/XS/UC	PRS-D220/XS/EW5	PRS-D2200T/XS/ES
*	49	Badge	YAH5060	YAH5061	YAH5061
*	50	Plate	YAH5051	YAH5052	YAH5051

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V
- *The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.*

Unit Number : YWH5030
Unit Name : Amp Unit
Unit Number : CWM9848
Unit Name : Remote Control Unit

Amp Unit
Consists of
Amp PCB
LPF/HPF PCB

A B
Unit Number : YWH5030
Unit Name : Amp Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 101	(B,28,78) IC	NJM4558MD
IC 102	(B,19,115) IC	NJM4558MD
IC 103	(B,19,68) IC	NJM4558MD
IC 104	(B,22,93) IC	NJM4558MD
IC 105	(B,268,95) IC	LT1358CS8
IC 106	(B,280,95) IC	LT1358CS8
IC 300	(B,266,116) IC	LT1358CS8
IC 302	(B,237,101) IC	ICC1
IC 303	(B,196,146) IC	ICC3
IC 304	(B,225,146) IC	ICC3
IC 501	(B,222,53) IC	MAX309ESE
IC 601	(A,100,43) IC	PA2027A
IC 602	(B,105,76) IC	UPC494GS
IC 681	(B,123,146) Regulator IC	NJM78M05DL1A
IC 682	(B,108,145) Regulator IC	NJM79M05DL1A
IC 801	(B,262,45) IC	NJM5532MD
IC 802	(B,280,48) IC	NJM5532MD
Q 201	(B,260,79) Transistor	2SC4081
Q 202	(B,277,79) Transistor	2SC4081
Q 203	(B,267,73) Chip Digital Transistor	DTA124EUA
Q 204	(B,150,68) Digital Transistor	DTC144EUA
Q 303	(B,220,109) Transistor	UMT1N
Q 304	(B,237,123) Transistor	UMT1N
Q 305	(A,195,177) FET	2SK3645-01MR
Q 306	(A,233,177) FET	2SK3645-01MR
Q 307	(A,182,177) FET	2SK3645-01MR
Q 308	(A,220,177) FET	2SK3645-01MR
Q 601	(B,123,36) Transistor	2SC4081
Q 602	(B,105,58) Chip Transistor	DTC114TUA
Q 603	(B,100,54) Chip Transistor	DTA114EUA
Q 604	(A,113,60) Transistor	2SB1243
Q 605	(B,125,51) Transistor	2SC4081
Q 606	(B,122,51) Chip Transistor	DTC114TUA
Q 607	(B,110,67) Transistor	2SA1576A
Q 611	(B,119,40) Transistor	2SA1576A
Q 650	(B,127,36) Chip Transistor	DTC124EUA
Q 651	(B,102,91) Transistor	2SD1766
Q 652	(B,102,100) Transistor	2SB1188
Q 653	(B,110,100) Transistor	2SB1188
Q 654	(B,110,91) Transistor	2SD1766
Q 655	(A,8,75) Transistor	FKV550N
Q 656	(A,8,62) Transistor	FKV550N
Q 657	(A,8,48) Transistor	FKV550N
Q 658	(A,8,142) Transistor	FKV550N
Q 659	(A,8,129) Transistor	FKV550N
Q 660	(A,8,116) Transistor	FKV550N
Q 661	(A,91,177) Transistor	2SD2395
Q 662	(A,77,177) Transistor	2SB1566
Q 681	(A,104,177) Transistor	2SD2395
Q 901	(B,136,50) Transistor	2SA1576A
Q 902	(B,139,50) Transistor	2SC4081
Q 903	(B,142,50) Transistor	2SC4081
D 201	(B,271,73) Diode	DAP202U
D 203	(B,155,69) Diode	MA111
D 301	(B,205,144) Diode	DAP202U
D 302	(B,233,145) Diode	DAP202U
D 303	(B,197,153) Diode	DAP202U
D 304	(B,225,153) Diode	DAP202U
D 305	(A,209,146) Diode	ERA92-02VH
D 306	(A,237,146) Diode	ERA92-02VH

Circuit Symbol and No.		Part No.
D 309	(B,275,114) Diode	DAP202U
D 310	(B,275,109) Diode	DAN202U
D 311	(B,227,77) Diode	DAN202U
D 312	(B,238,76) Diode	DAP202U
D 382	(B,194,94) Diode	UDZS7R5(B)
D 383	(B,194,88) Diode	UDZS7R5(B)
D 501	(B,227,45) Diode	UDZS16(B)
D 502	(B,227,60) Diode	UDZS16(B)
D 601	(A,54,37) Diode	RM4Z-LFJ4
D 602	(B,120,31) Diode	UDZS7R5(B)
D 603	(B,89,44) Diode	1SR154-400
D 604	(B,89,48) Diode	1SR154-400
D 605	(B,132,61) Diode	MA111
D 606	(B,119,55) Diode	MA111
D 608	(A,150,90) LED	NSPB346BS-5859
D 609	(B,35,117) Diode	RR274EA-400
D 610	(B,35,124) Diode	RR274EA-400
D 611	(B,86,101) Diode	RR274EA-400
D 612	(B,86,94) Diode	RR274EA-400
D 650	(B,244,27) Diode	DAN202U
D 651	(B,90,53) Diode	DAN202U
D 652	(B,94,52) Diode	MA111
D 653	(A,38,176) Diode	FML22S
D 654	(A,60,176) Diode	FML22R
D 655	(B,109,156) Diode	UDZS16(B)
D 656	(B,88,159) Diode	UDZS16(B)
D 681	(B,123,156) Diode	UDZS11(B)
D 901	(B,133,49) Diode	MA111
D 902	(A,144,54) Diode	ERA15-02VH
D 904	(B,130,40) Diode	MA111
L 303	(A,196,136) Choke Coil 19.5 uH	YTH5006
L 304	(A,224,136) Choke Coil 19.5 uH	YTH5006
L 601	(A,47,60) Choke Coil 50 uH	CTH1341
L 651	(A,35,139) Choke Coil 320 uH	CTH1362
L 652	(A,62,139) Choke Coil 320 uH	CTH1362
L 801	(A,236,21) Ferri-Inductor	CTF1007
L 802	(A,257,13) Ferri-Inductor	CTF1007
T 651	(A,56,94) Transformer	YTT5006
RY301	(A,150,44) Relay	YSR5003
RY302	(A,187,44) Relay	YSR5003
TH651	(A,9,86) Thermistor	CCX1013
TH652	(A,212,175) Thermistor	CCX1013
TH653	(A,80,73) Thermistor	CCX1064
S 101	(A,8,76) Switch(LPF/HPF)	CSH1029
S 102	(A,8,120) Slide Switch(RCA/SP IN)	CSH1042
S 601	(A,95,71) Switch(BFC)	HSH-156
VR101	(A,13,51) Potentiometer 25 kohm	YCS5001
VR102	(A,13,95) Potentiometer 10 kohm(A)	CCS1265
⚠FU601	(A,52,17) Fuse 30 A	CEK1330
⚠FU602	(A,68,17) Fuse 30 A	CEK1330

RESISTORS

R 101	(B,28,91)	RS1/16S103J
R 102	(B,22,123)	RS1/16S103J
R 103	(B,26,85)	RS1/16S103J
R 104	(B,17,123)	RS1/16S103J
R 105	(B,24,80)	RS1/16S103J
R 106	(B,15,119)	RS1/16S103J
R 107	(B,32,78)	RS1/16S472J
R 108	(B,23,115)	RS1/16S472J
R 109	(B,28,72)	RS1/16S103J
R 110	(B,19,108)	RS1/16S103J
R 111	(B,28,69)	RS1/16S103J
R 112	(B,19,106)	RS1/16S103J
R 113	(B,10,59)	RS1/16S222J
R 114	(B,12,59)	RS1/16S222J
R 117	(B,32,70)	RS1/16S562J
R 118	(B,22,106)	RS1/16S562J
R 119	(B,28,67)	RS1/16S222J
R 120	(B,19,104)	RS1/16S222J
R 123	(B,6,82)	RS1/16S222J
R 124	(B,12,82)	RS1/16S222J
R 125	(B,8,84)	RS1/16S131J
R 126	(B,10,84)	RS1/16S131J
R 129	(B,268,87)	RS1/16S101J
R 130	(B,281,87)	RS1/16S101J
R 131	(B,272,86)	RS1/16S182J
R 132	(B,285,86)	RS1/16S182J
R 133	(B,264,107)	RS1/16S222J
R 134	(B,262,120)	RS1/16S222J
R 135	(B,262,98)	RS1/16S331J
R 136	(B,274,98)	RS1/16S331J
R 137	(B,267,101)	RS1/16S273J
R 138	(B,279,102)	RS1/16S273J
R 141	(B,266,88)	RS1/16S222J
R 142	(B,279,88)	RS1/16S222J
R 201	(B,257,79)	RS1/16S472J
R 202	(B,274,77)	RS1/16S472J
R 203	(B,152,65)	RS1/16S102J
R 204	(B,155,64)	RS1/16S103J
R 205	(B,155,67)	RS1/16S224J
R 207	(B,268,76)	RS1/16S472J
R 301	(B,267,107)	RS1/16S222J
R 302	(B,266,123)	RS1/16S222J
R 303	(B,268,105)	RS1/16S112J
R 304	(B,266,125)	RS1/16S112J
R 305	(B,240,73)	RS1/16S222J
R 306	(B,242,80)	RS1/16S222J
R 307	(B,236,87)	RS1/16S683J
R 308	(B,238,88)	RS1/16S332J
R 309	(B,232,87)	RS1/16S332J
R 310	(B,231,87)	RS1/16S683J
R 311	(B,249,90)	RS1/16S473J
R 312	(B,249,93)	RS1/16S473J
R 313	(B,231,90)	RS1/16S102J
R 314	(B,253,112)	RS1/16S102J
R 315	(B,167,52)	RS1/16S183J
R 316	(B,210,57)	RS1/16S183J
R 317	(B,218,100)	RS1/16S822J
R 318	(B,249,118)	RS1/16S822J
R 319	(B,209,136)	RS1/16S223J
R 320	(B,212,136)	RS1/16S223J
R 321	(B,217,105)	RS1/16S102J
R 322	(B,242,120)	RS1/16S102J
R 323	(B,225,110)	RS1/16S681J
R 324	(B,232,115)	RS1/16S682J
R 326	(B,228,115)	RS1/16S105J
R 327	(B,229,110)	RS1/16S105J

Circuit Symbol and No.		Part No.
R 328	(B,235,115)	RS1/16S681J
R 329	(B,189,146)	RS1/16S472J
R 330	(B,218,146)	RS1/16S472J
R 331	(B,209,142)	RS1/16S103J
R 332	(B,236,141)	RS1/16S103J
R 337	(B,200,155)	RS1/16S103J
R 338	(B,228,155)	RS1/16S103J
R 341	(A,170,141)	RS2LMF220J
R 342	(A,251,141)	RS2LMF220J
R 343	(A,160,146)	RD1/4PU100J
R 344	(A,266,145)	RD1/4PU100J
R 345	(B,224,110)	RS1/16S103J
R 346	(B,230,119)	RS1/16S103J
R 347	(A,164,141)	RS2LMF220J
R 348	(A,257,141)	RS2LMF220J
R 349	(B,144,43)	RS1/16S333J
R 350	(B,179,48)	RS1/16S333J
R 351	(B,222,89)	RS1/16S182J
R 352	(B,248,111)	RS1/16S182J
R 353	(B,228,94)	RS1/16S473J
R 354	(B,247,110)	RS1/16S473J
R 355	(B,224,98)	RS1/16S182J
R 356	(B,247,116)	RS1/16S182J
R 357	(B,224,94)	RS1/16S182J
R 358	(B,247,114)	RS1/16S182J
R 359	(B,226,98)	RS1/16S182J
R 360	(B,244,112)	RS1/16S182J
R 361	(B,227,102)	RS1/16S182J
R 362	(B,242,115)	RS1/16S182J
R 363	(B,227,105)	RS1/16S473J
R 364	(B,240,115)	RS1/16S473J
R 365	(B,223,102)	RS1/16S102J
R 366	(B,241,118)	RS1/16S102J
R 385	(B,142,34)	RS1/16S333J
R 386	(B,184,40)	RS1/16S333J
R 388	(B,202,89)	RS1/16S102J
R 389	(B,187,93)	RS1/16S102J
R 501	(B,231,53)	RS1/16S472J
R 502	(B,226,26)	RS1/16S102J
R 503	(B,232,53)	RS1/16S102J
R 504	(B,226,58)	RS1/16S473J
R 505	(B,226,47)	RS1/16S473J
R 506	(B,229,53)	RS1/16S473J
R 507	(B,223,60)	RS1/16S104J
R 508	(B,221,60)	RS1/16S122J
R 509	(B,220,60)	RS1/16S471J
R 510	(B,218,60)	RS1/16S101J
R 511	(B,223,45)	RS1/16S104J
R 512	(B,221,45)	RS1/16S122J
R 513	(B,220,45)	RS1/16S471J
R 514	(B,218,45)	RS1/16S101J
R 601	(A,120,27)	RD1/4PU222J
R 602	(B,124,24)	RS1/16S473J
R 603	(B,124,27)	RS1/16S103J
R 604	(B,124,31)	RS1/16S103J
R 605	(B,124,39)	RS1/16S222J
R 606	(B,118,36)	RS1/16S472J
R 607	(B,111,40)	RS1/16S512J
R 608	(B,90,41)	RS1/16S512J
R 609	(B,105,39)	RS1/16S103J

Circuit Symbol and No.		Part No.
R 610	(B,110,46)	RS1/16S472J
R 611	(B,116,57)	RS1/16S221J
R 612	(B,116,53)	RS1/16S102J
R 613	(B,100,48)	RS1/16S223J
R 614	(B,102,48)	RS1/16S223J
R 615	(B,105,48)	RS1/16S223J
R 616	(A,129,52)	RD1/4PU472J
R 617	(A,136,66)	RD1/4PU101J
R 618	(A,145,65)	RD1/4PU271J
R 619	(A,140,62)	RD1/4PU271J
R 620	(B,123,55)	RS1/16S222J
R 621	(B,109,49)	RS1/16S103J
R 622	(B,106,66)	RS1/16S202J
R 623	(B,116,71)	RS1/16S101J
R 624	(B,96,74)	RS1/16S105J
R 625	(B,102,69)	RS1/16S153J
R 626	(B,111,70)	RS1/16S102J
R 627	(B,103,65)	RS1/16S473J
R 629	(B,110,63)	RS1/16S223J
R 631	(A,99,107)	RS1/2PMF100J
R 632	(A,96,88)	RS1/2PMF100J
R 648	(B,240,27)	RS1/16S683J
R 650	(B,116,87)	RS1/16S683J
R 651	(B,105,83)	RS1/16S472J
R 652	(B,108,84)	RS1/16S472J
R 653	(B,98,81)	RS1/16S332J
R 654	(B,101,82)	RS1/16S332J
R 655	(B,89,57)	RS1/16S272J
R 656	(B,91,57)	RS1/16S272J
R 657	(B,97,55)	RS1/16S272J
R 658	(B,121,85)	RS1/16S222J
R 659	(B,112,81)	RS1/16S183J
R 660	(A,22,75)	RS1/2PMF121J
R 661	(A,22,62)	RS1/2PMF121J
R 662	(A,22,52)	RS1/2PMF121J
R 663	(B,104,104)	RS1/16S472J
R 664	(B,107,104)	RS1/16S472J
R 665	(A,22,135)	RS1/2PMF121J
R 666	(A,22,129)	RS1/2PMF121J
R 667	(A,22,116)	RS1/2PMF121J
R 668	(A,32,68)	RS1/2PMF100J
R 669	(A,25,84)	RS1/2PMF100J
R 670	(A,66,125)	RS1/2PMF220J
R 671	(A,86,107)	RS1/2PMF220J
R 672	(A,46,135)	RS1/2PMF220J
R 675	(A,102,169)	RS1/2PMF100J
R 676	(A,71,169)	RS1/2PMF100J
R 677	(A,110,163)	RD1/4PU392J
R 678	(A,84,169)	RD1/4PU392J
R 679	(B,103,84)	RS1/16S472J
R 680	(B,119,85)	RS1/16S394J
R 681	(A,112,162)	RD1/4PU332J
R 682	(A,149,157)	RD1/4PU2R2J
R 683	(A,149,162)	RD1/4PU2R2J
R 684	(B,101,172)	RS1/16S394J
R 686	(A,136,161)	RS1/2PMF220J
R 801	(A,248,57)	RD1/4PU683J
R 802	(A,258,57)	RD1/4PU683J
R 803	(B,253,49)	RS1/16S471J
R 804	(B,272,51)	RS1/16S471J

Circuit Symbol and No.			Part No.
R 805	(B,262,52)		RS1/16S223J
R 806	(B,277,57)		RS1/16S223J
R 807	(B,268,46)	10 kohm	CCN1152
R 808	(B,286,49)	10 kohm	CCN1152
R 809	(B,267,39)	10 kohm	CCN1152
R 810	(B,284,42)	10 kohm	CCN1152
R 811	(B,267,42)	10 kohm	CCN1152
R 812	(B,285,46)	10 kohm	CCN1152
R 813	(B,262,37)	10 kohm	CCN1152
R 814	(B,280,40)	10 kohm	CCN1152
R 821	(B,257,37)		RS1/16S471J
R 822	(B,281,39)		RS1/16S471J
R 901	(B,136,58)		RS1/16S472J
R 902	(B,135,46)		RS1/16S104J
R 903	(B,137,46)		RS1/16S472J
R 904	(B,139,46)		RS1/16S223J

CAPACITORS

C 101	(B,26,87)		CCSRCH470J50
C 102	(B,17,121)		CCSRCH470J50
C 103	(A,21,76)		CFTLA154J50
C 104	(A,22,101)		CFTLA154J50
C 105	(A,20,60)		CFTLA154J50
C 106	(A,22,85)		CFTLA154J50
C 107	(A,263,83)		CEANP4R7M50
C 108	(A,276,83)		CEANP4R7M50
C 109	(A,271,89)		CFTNA823J50
C 110	(A,283,89)		CFTNA823J50
C 111	(A,263,96)		CFTLA224J50
C 112	(A,275,95)		CFTLA224J50
C 113	(B,263,86)		CCSRCH101J50
C 114	(B,275,86)		CCSRCH101J50
C 151	(B,24,75)		CKSRYB103K50
C 152	(B,15,114)		CKSRYB103K50
C 153	(B,31,85)		CKSRYB103K50
C 154	(B,22,121)		CKSRYB103K50
C 155	(B,15,68)		CKSRYB103K50
C 156	(B,18,93)		CKSRYB103K50
C 157	(B,23,68)		CKSRYB103K50
C 158	(B,26,92)		CKSRYB103K50
C 159	(B,264,93)		CKSRYB103K50
C 160	(B,276,93)		CKSRYB103K50
C 161	(B,271,101)		CKSRYB103K50
C 162	(B,281,102)		CKSRYB103K50
C 165	(A,33,128)		CEAT100M50
C 166	(A,22,143)		CEAT100M50
C 202	(B,152,72)		CKSRYB104K16
C 204	(B,268,78)		CKSRYB473K50
C 301	(B,268,109)		CCSRCH101J50
C 302	(B,266,121)		CCSRCH101J50
C 303	(A,223,77)	10 uF/35 V	CCH1705
C 304	(A,232,77)	10 uF/35 V	CCH1705
C 305	(A,219,93)		CEAT4R7M50
C 306	(A,211,98)		CEAT4R7M50
C 307	(B,244,88)		CCSRCH272J50
C 308	(B,249,96)		CCSRCH272J50
C 309	(B,242,89)		CKSQYB474K25
C 310	(B,251,100)		CKSQYB474K25
C 311	(B,212,92)		CKSRYB104K50
C 312	(B,207,99)		CKSRYB104K50
C 313	(A,198,162)	47 uF/50 V	ACH1411
C 314	(A,249,162)	47 uF/50 V	ACH1411
C 315	(B,208,169)		CKSQYF105Z50
C 316	(B,251,160)		CKSQYF105Z50
C 317	(B,208,166)		CKSQYF105Z50
C 318	(B,253,160)		CKSQYF105Z50
C 319	(B,239,88)		CKSRYB222K50
C 320	(B,234,87)		CKSRYB222K50
C 321	(B,228,92)		CCSRCH272J50
C 322	(B,251,112)		CCSRCH272J50
C 323	(B,223,104)		CCSRCH222J50
C 324	(B,239,115)		CCSRCH222J50
C 325	(B,219,97)		CCSRCH151J50
C 326	(B,248,121)		CCSRCH151J50
C 327	(B,217,97)		CCSRCH221J50
C 328	(B,250,121)		CCSRCH221J50
C 329	(B,227,110)		CKSRYB105K10
C 330	(B,230,115)		CKSRYB105K10
C 331	(B,234,115)		CKSRYB105K10
C 333	(B,204,149)		CKSQYB224K50
C 334	(B,234,149)		CKSQYB224K50
C 335	(A,190,157)		CEAT4R7M50
C 336	(A,232,162)		CEAT4R7M50
C 337	(A,164,149)		CQHA221J2A
C 338	(A,261,147)		CQHA221J2A
C 339	(A,177,141)		CFTLA334J50
C 340	(A,244,143)		CFTLA334J50
C 341	(A,177,134)		CFTNA684J50
C 342	(A,244,136)		CFTNA684J50
C 345	(B,166,26)		CCSQCH102J50
C 346	(B,206,25)		CCSQCH102J50
C 347	(B,166,28)		CKSQYB103K50
C 348	(B,206,23)		CKSQYB103K50
C 351	(A,182,127)		CFTNA684J50
C 352	(A,239,128)		CFTNA684J50
C 353	(A,183,157)	47 uF/50 V	ACH1411
C 354	(A,216,157)	47 uF/50 V	ACH1411
C 355	(B,177,160)		CKSQYF105Z50
C 356	(B,215,166)		CKSQYF105Z50
C 357	(B,180,160)		CKSQYF105Z50
C 358	(B,215,169)		CKSQYF105Z50
C 363	(B,262,107)		CKSRYB103K50
C 364	(B,270,121)		CKSRYB103K50
C 367	(B,166,21)		CKSQYB102K50
C 368	(B,206,18)		CKSQYB102K50
C 369	(B,166,23)		CKSQYB103K50
C 370	(B,206,20)		CKSQYB103K50
C 380	(A,240,162)	47 uF/50 V	ACH1411
C 381	(A,207,162)	47 uF/50 V	ACH1411
C 382	(A,225,157)	47 uF/50 V	ACH1411
C 383	(A,174,157)	47 uF/50 V	ACH1411
C 384	(B,242,160)		CKSQYF105Z50
C 385	(B,193,160)		CKSQYF105Z50
C 386	(B,227,160)		CKSQYF105Z50
C 387	(B,171,160)		CKSQYF105Z50
C 388	(B,245,160)		CKSQYF105Z50
C 389	(B,195,160)		CKSQYF105Z50
C 390	(B,230,160)		CKSQYF105Z50
C 391	(B,169,160)		CKSQYF105Z50

Circuit Symbol and No.		Part No.
C 392	(A,262,161)	CEAT220M2A
C 393	(A,160,161)	CEAT220M2A
C 394	(A,256,157)	CFTNA104J2A
C 395	(A,167,158)	CFTNA104J2A
C 501	(B,229,26)	CKSQYB102K50
C 502	(B,229,35)	CKSQYB102K50
C 503	(A,235,56)	CFTLA473J50
C 504	(A,221,40)	CFTLA473J50
C 505	(B,220,36)	CKSQYB102K50
C 601	(B,102,17)	CKSQYB102K50
C 602	(B,100,17)	CKSQYB103K50
C 603	(B,104,17)	CKSQYB104K50
C 604	(B,95,21)	CKSQYB102K50
C 605	(B,92,21)	CKSQYB103K50
C 606	(B,97,21)	CKSQYB104K50
C 608	(B,118,35)	CKSRYB103K50
C 609	(B,118,32)	CKSRYB103K50
C 610	(B,124,26)	CKSRYB103K50
C 611	(B,103,40)	CKSRYB103K50
C 612	(A,107,40)	CEAT100M50
C 613	(A,113,40)	CEAT100M50
C 614	(B,98,43)	CKSRYB103K50
C 615	(A,96,46)	CEAT101M16
C 616	(A,108,55)	CEAT220M25
C 617	(B,98,49)	CKSRYB103K50
C 618	(A,132,55)	CEAT471M16
C 619	(A,123,47)	CEAT220M25
C 620	(B,104,48)	CKSRYB103K50
C 621	(A,114,65)	CEAT100M50
C 622	(A,106,64)	CEAT221M16
C 624	(B,104,69)	CKSRYB102K50
C 625	(B,112,76)	CKSQYB474K16
C 626	(B,149,86)	CKSRYB104K50
C 627	(A,31,116) 22 uF/35 V	YCH5008
C 628	(A,26,124) 22 uF/35 V	YCH5008
C 629	(A,90,101) 22 uF/35 V	YCH5008
C 630	(A,95,94) 22 uF/35 V	YCH5008
C 631	(B,123,116)	CKSRYB104K50
C 632	(B,142,116)	CKSRYB104K50
C 633	(B,137,116)	CKSRYB104K50
C 634	(B,119,116)	CKSRYB104K50
C 635	(B,108,132)	CKSRYB104K50
C 636	(B,113,132)	CKSRYB104K50
C 637	(B,127,132)	CKSRYB104K50
C 638	(B,133,132)	CKSRYB104K50
C 639	(A,97,111) 47 uF/50 V	YCH5019(P35)
C 640	(A,155,129) 47 uF/50 V	YCH5019(P35)
C 641	(B,36,110)	CKSRYB104K50
C 642	(B,28,126)	CKSRYB104K50
C 650	(B,127,32)	CKSRYB105K10
C 651	(A,99,66)	CEAT101M16
C 652	(B,100,64)	CKSRYB103K50
C 653	(A,116,79)	CFTLA124J50
C 654	(B,114,81)	CKSRYB472K50
C 655	(A,26,71)	CQHA472J2A
C 656	(A,25,79)	CQHA472J2A
C 657	(A,67,42) 3 900 uF/16 V	YCH5003(P35)
C 658	(A,67,60) 3 900 uF/16 V	YCH5003(P35)
C 660	(A,61,128)	CQHA102J2A

Circuit Symbol and No.		Part No.
C 661	(A,79,119)	CQHA103J2A
C 662	(A,52,128)	CQHA103J2A
C 663	(A,150,112) 2 700 uF/50 V	CCH1817(P35)
C 664	(A,131,112) 2 700 uF/50 V	CCH1817(P35)
C 665	(A,112,112) 2 700 uF/50 V	CCH1817(P35)
C 666	(A,141,129) 2 700 uF/50 V	CCH1817(P35)
C 667	(A,122,129) 2 700 uF/50 V	CCH1817(P35)
C 668	(A,103,129) 2 700 uF/50 V	CCH1817(P35)
C 669	(A,113,158) 47 uF/25 V	CCH1544
C 670	(A,84,156) 47 uF/25 V	CCH1544
C 671	(A,96,151) 1 500 uF/25 V	YCH5017(P35)
C 672	(A,82,146) 1 500 uF/25 V	YCH5017(P35)
C 673	(B,93,148)	CKSRYB473K50
C 674	(B,85,148)	CKSRYB473K50
C 681	(A,133,145) 10 uF/50 V	YCH5010
C 682	(B,118,147)	CKSRYB104K50
C 683	(A,98,161) 10 uF/50 V	YCH5010
C 684	(B,93,159)	CKSRYB104K50
C 685	(A,128,158)	CEAT470M25
C 686	(A,119,158)	CEAT470M16
C 687	(B,115,156)	CKSRYB473K50
C 688	(B,173,126)	CKSRYB104K16
C 689	(B,160,158)	CKSRYB104K16
C 690	(A,141,155)	CEAT220M50
C 691	(A,105,158) 22 uF/50 V	YCH5007
C 692	(A,77,156) 22 uF/50 V	YCH5007
C 695	(A,115,143) 10 uF/50 V	YCH5010
C 696	(A,91,161) 10 uF/50 V	YCH5010
C 801	(A,251,53)	CEAT100M50
C 802	(A,268,56)	CEAT100M50
C 803	(B,259,53)	CCSQCH471J50
C 804	(B,281,57)	CCSQCH471J50
C 805	(A,256,47) 10 uF/50 V	CCH1543
C 806	(A,275,45) 10 uF/50 V	CCH1543
C 807	(B,267,50)	CKSQYB223K50
C 808	(B,271,60)	CKSQYB223K50
C 809	(B,267,41)	CCSRCH470J50
C 810	(B,285,44)	CCSRCH470J50
C 811	(B,262,39)	CCSRCH470J50
C 812	(B,280,42)	CCSRCH470J50
C 813	(B,267,48)	CKSRYB103K50
C 814	(B,285,52)	CKSRYB103K50
C 815	(B,258,40)	CKSRYB103K50
C 816	(B,276,42)	CKSRYB103K50
C 821	(A,249,47) 10 uF/35 V	CCH1705
C 822	(A,244,39) 10 uF/35 V	CCH1705
C 831	(B,265,21)	CKSQYB102K50
C 832	(B,276,38)	CKSQYB102K50
C 833	(B,235,28)	CKSQYB102K50
C 834	(B,245,55)	CKSQYB102K50
C 835	(B,265,23)	CKSQYB103K50
C 836	(B,274,38)	CKSQYB103K50
C 837	(B,233,28)	CKSQYB103K50
C 838	(B,245,52)	CKSQYB103K50
C 901	(A,139,40)	CEANP471M16

Circuit Symbol and No.		Part No.

C

Unit Number : CWM9848
Unit Name : Remote Control Unit

MISCELLANEOUS

Q 1351	(B,22,24) Chip Transistor	DTC114EUA
Q 1352	(B,23,7) Chip Transistor	DTC114EUA
D 1351	(B,13,26) Diode	DAN202U
D 1352	(B,17,7) Diode	DAN202U
D 1366	(B,22,13) Diode	UDZS16(B)
D 1367	(B,29,17) Diode	UDZS16(B)
S 1351	(A,7,12) Rotary Switch (BASS BOOST CONTROL)	CSD1128

RESISTORS

R 1351	(B,16,17)	RS1/16S103J
R 1352	(B,19,19)	RS1/16S102J
R 1353	(B,32,23)	RS1/16S103J
R 1354	(B,32,17)	RS1/16S102J
R 1359	(B,17,10)	RS1/16S102J