9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

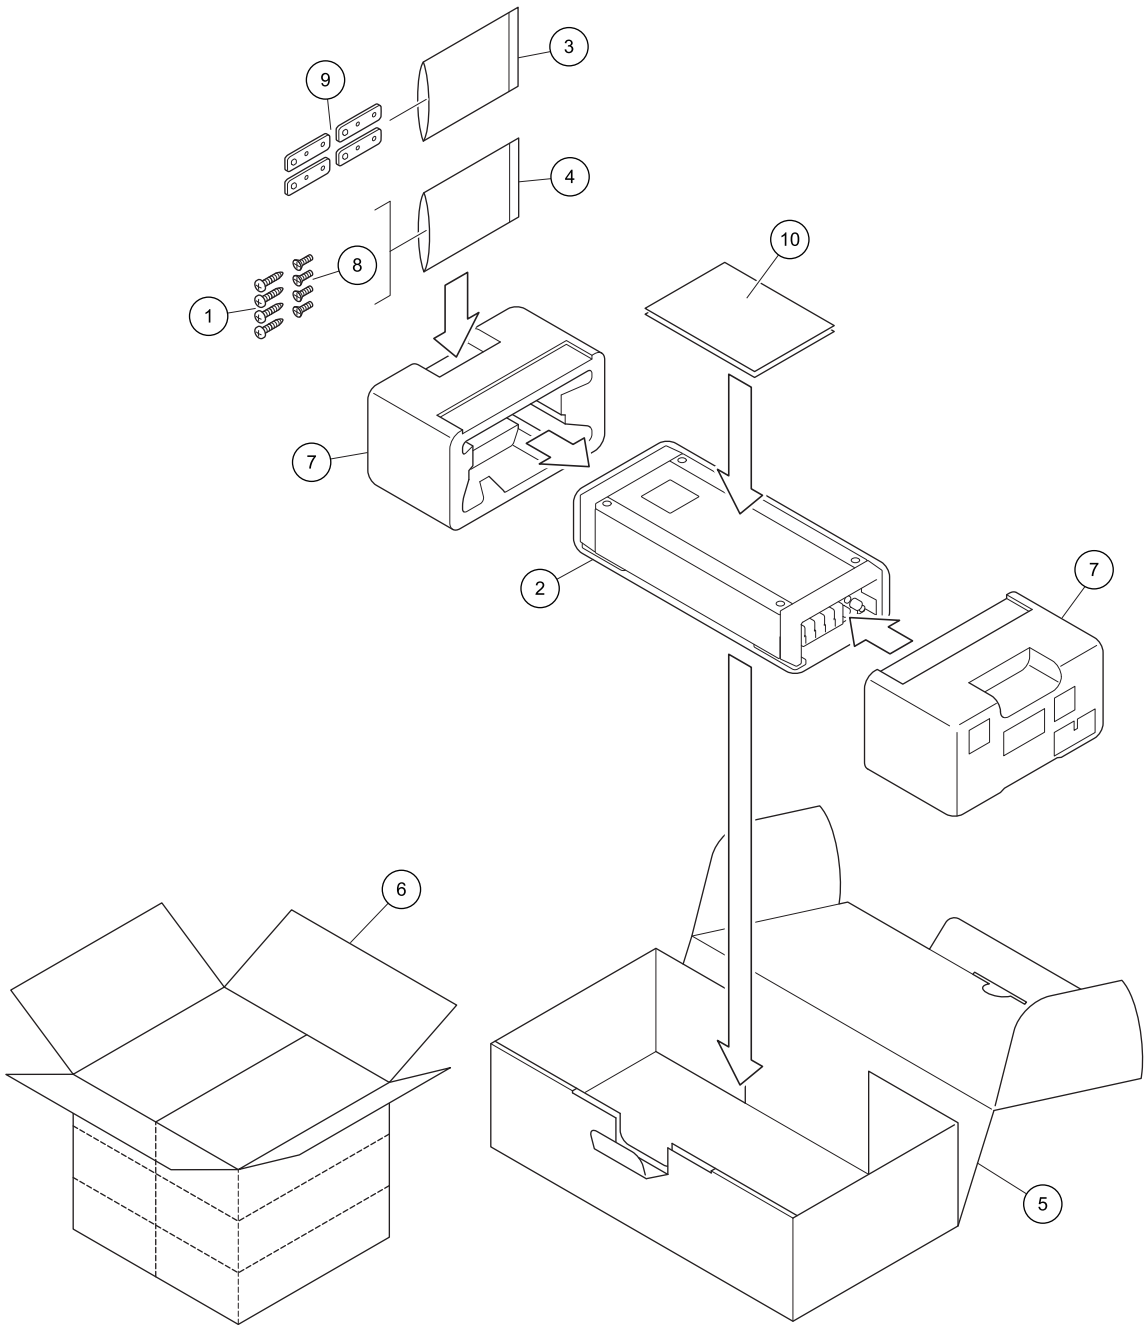

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BYC40P180FTB
	2	Polyethylene Bag	See Contrast table (2)
*	3	Polyethylene Bag	CEG1163
	4	Polyethylene Bag	CEG1160
	5	Unit Box	See Contrast table (2)
	6	Contain Box	See Contrast table (2)
	7	Protector	CHP4346
	8	Screw	CMZ30P080FTB
	9	Bracket	CNB3799
	10-1	Owner's Manual	See Contrast table (2)
*	10-2	Warranty Card	See Contrast table (2)

(2) CONTRAST TABLE

PRS-D800/XSUC, PRS-D800/XSEW5, PRS-D800/XSCN5 and PRS-D800/XSES are constructed the same except for the following:

Mark	No.	Description	PRS-D800/XSUC	PRS-D800/XSEW5	PRS-D800/XSCN5	PRS-D800/XSES
	2	Polyethylene Bag	CEG1185	CEG1088	CEG1088	CEG1088
	5	Unit Box	CHG7769	CHG7768	CHG7771	CHG7770
	6	Contain Box	CHL7769	CHL7768	CHL7771	CHL7770
	10-1	Owner's Manual	CRD4624	CRD4623	CRB3840	CRD4625
*	10-2	Warranty Card	QRY3001	CRY1376	YRY5002	Not used

Owner's Manual,Installation Manual

Part No.	Language
CRD4624	English, French, Spanish(Espanol)
CRD4623	English, French, Italian, Spanish(Espanol), German, Dutch, Russian
CRB3840	Traditional Chinese
CRD4625	English, Spanish(Espanol), Portuguese(B), Arabic

9.2 EXTERIOR

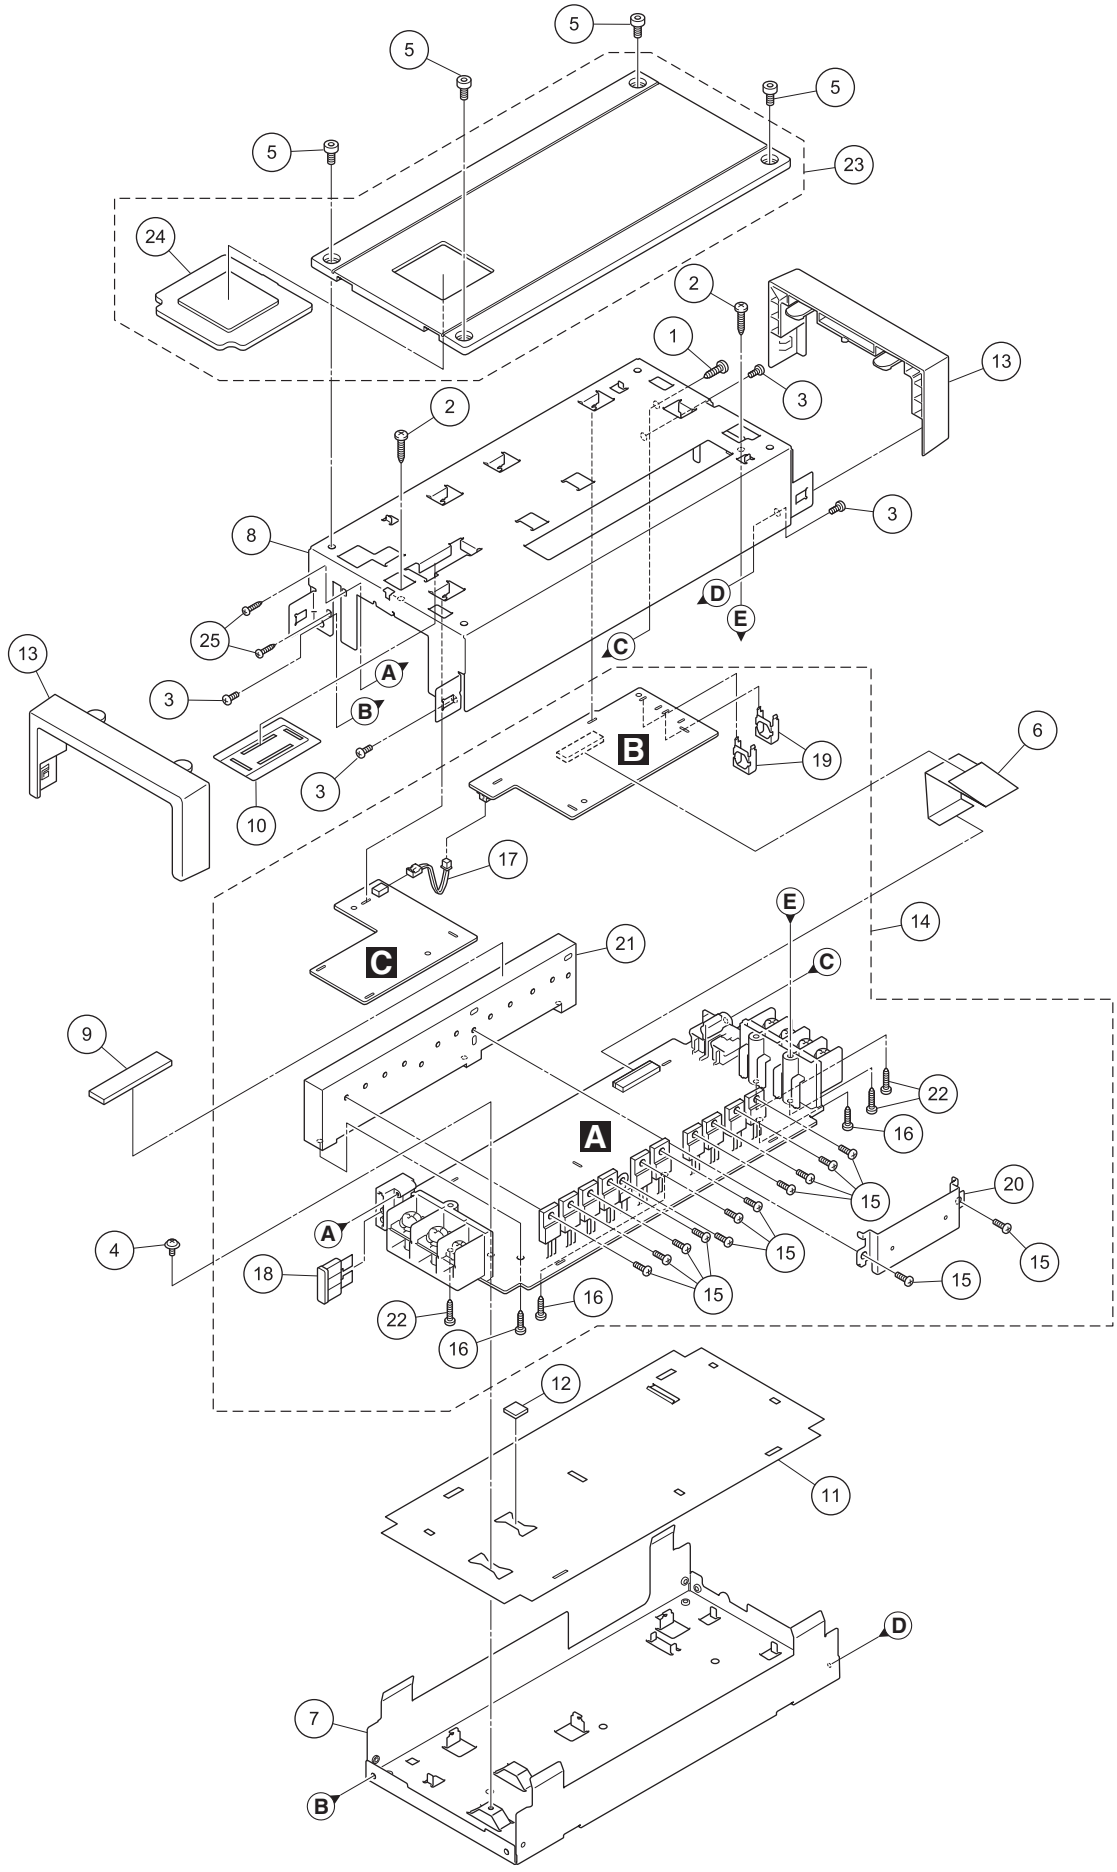

EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BPZ30P100FTB
	2	Screw	BPZ30P140FTC
	3	Screw	BSZ26P060FTB
	4	Screw (M2.6 x 6)	CBA2275
	5	Screw	CBA2292
	6	FFC	CDE9590
	7	Chassis	CNA3245
	8	Case	CNB3798
	9	Sheet	CNN3949
	10	Sheet	CNN3950
	11	Insulator	CNN3953
	12	Cushion	CNN4012
	13	Cover	CNU1874
	14	Amp Unit	CWH1707
	15	Screw	BBZ26P080FTC
	16	Screw	BBZ30P080FSN
	17	Cable (CN802)	CDE9642
⚠	18	Fuse (30 A)	CEK1330
	19	Holder	CND2466
	20	Holder	CND6378
	21	Heat Sink	CNR2117
	22	Screw	PPZ30P100FSN
	23	Panel Assy	CXE5295
*	24	Badge Unit	CXE5084
	25	Screw	PPZ20P080FTB

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

  Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

  IC 301 (A, 91, 111) IC NJM2068V
- *The expression of the unit in this manual is shown by u instead of μ. Please do not make a mistake.*

Unit Number : CWH1707

Unit Name : Amp Unit

Amp Unit
Consists of
Mother PCB
Gain PCB
LED PCB

A B C

Unit Number : CWH1707

Unit Name : Amp Unit

MISCELLANEOUS

Circuit Symbol and No.			Part No.
IC 101	(B,92,32)	IC	NJM2068MD
IC 201	(B,92,14)	IC	NJM2068MD
IC 601	(B,67,88)	IC	UPC494GS
IC 701	(A,152,77)	IC	TA78L05F
IC 702	(A,152,68)	Regulator IC	TA79L05F
IC 1101	(B,140,73)	IC	LT1358CS8
IC 1102	(A,127,51)	IC	IRS20957SPBFS1
IC 1201	(B,160,73)	IC	LT1358CS8
IC 1202	(A,164,51)	IC	IRS20957SPBFS1
Q 601	(A,19,20)	Transistor	2SC4081
Q 602	(B,26,16)	Transistor	2SC4081
Q 603	(B,22,12)	Transistor	2SA1576A
Q 604	(A,51,74)	Chip Transistor	DTC114EUA
Q 605	(A,51,78)	Digital Transistor	DTC143ZUA
Q 606	(A,56,83)	Transistor	2SB1184F5
Q 631	(B,62,71)	Transistor	2SD1766
Q 632	(B,62,79)	Transistor	2SB1188
Q 633	(B,71,79)	Transistor	2SB1188
Q 634	(B,71,71)	Transistor	2SD1766
Q 635	(A,39,14)	Transistor	FKV550N
Q 636	(A,52,14)	Transistor	FKV550N
Q 637	(A,65,14)	Transistor	FKV550N
Q 638	(A,78,14)	Transistor	FKV550N
Q 701	(A,125,90)	Transistor	2SD2318F5

Circuit Symbol and No.			Part No.
Q 803	(A,31,12)	Transistor	2SD2318F5
Q 804	(A,31,26)	Transistor	2SA1834F5
Q 805	(B,52,44)	Transistor	2SC4081
Q 806	(B,51,49)	Transistor	2SC4081
Q 807	(B,59,47)	Transistor	2SD1766
Q 901	(A,120,70)	Transistor	2SC4081
Q 902	(A,123,65)	Transistor	2SC4081
Q 903	(B,140,90)	Transistor	2SA1576A
Q 904	(B,152,90)	Transistor	2SA1576A
Q 905	(B,153,95)	Chip Digital Transistor	DTA124EUA
Q 906	(A,197,17)	Transistor	2SA1576A
Q 907	(A,193,12)	Transistor	2SC4081
Q 908	(A,190,9)	Transistor	2SD1664
Q 1101	(A,148,15)	FET	2SK3645-01MR
Q 1102	(A,135,15)	FET	2SK3645-01MR
Q 1201	(A,176,15)	FET	2SK3645-01MR
Q 1202	(A,163,15)	FET	2SK3645-01MR
D 101	(B,71,20)	Diode	DAP202U
D 602	(B,17,83)	Diode	1SR154-400
D 603	(B,21,83)	Diode	1SR154-400
D 604	(A,17,20)	Diode	UDZS16(B)
D 605	(B,19,16)	Diode	UDZS7R5(B)
D 606	(B,23,7)	Diode	USFZ8.2V
D 607	(B,51,76)	Diode	DAN202U
D 701	(A,113,14)	Diode	FML22S
D 702	(A,100,14)	Diode	FML22R
D 703	(A,110,86)	Diode	UDZS13(B)
D 704	(A,145,77)	Diode	1SS355
D 705	(A,145,68)	Diode	1SS355
D 801	(B,39,16)	Diode	UDZS16(B)
D 802	(B,39,22)	Diode	UDZS16(B)
D 803	(B,45,44)	Diode	UDZS5R6(B)
D 804	(A,69,51)	White LED	CL-194S-WS-SD
D 805	(A,63,51)	White LED	CL-194S-WS-SD
D 806	(A,57,51)	White LED	CL-194S-WS-SD
D 807	(A,51,51)	White LED	CL-194S-WS-SD
D 808	(A,45,51)	White LED	CL-194S-WS-SD
D 901	(A,117,65)	Diode	UDZS15(B)
D 902	(A,122,76)	Diode	UDZS20(B)
D 903	(A,125,73)	Diode	UDZS22(B)

Circuit Symbol and No.			Part No.
D 904	(A,149,83)	Diode	DAN202U
D 905	(B,137,93)	Diode	UDZS9R1(B)
D 906	(A,185,13)	Diode	1SS355
D 907	(A,199,21)	Diode	1SS355
D 1101	(B,126,35)	Diode	RF081M2S
D 1102	(B,137,50)	Diode	RF081M2S
D 1103	(B,122,61)	Diode	1SS355
D 1201	(B,161,30)	Diode	RF081M2S
D 1202	(B,174,50)	Diode	RF081M2S
D 1203	(B,157,63)	Diode	1SS355
D 1204	(B,194,55)	Diode	1SS355
L 601	(A,30,83)	Choke Coil 50 uH	YTH5010
L 701	(A,86,72)	Choke Coil 320 uH	YTH5018
L 702	(A,86,44)	Choke Coil 320 uH	YTH5018
L 1101	(A,141,39)	Choke Coil 22 uH	CTH1510
L 1201	(A,178,38)	Choke Coil 22 uH	CTH1510
T 601	(A,52,51)	Power Transformer	CTT1201
RY1101	(A,197,46)	Relay	YSR5002
TH602	(A,89,16)	Thermistor	CCX1057
S 101	(A,182,77)	Slide Switch(INPUT)	CSH1065
VR101	(A,103,32)	Variable Resistor 20 kohm(A) (A CH GAIN)	CCW1030
VR201	(A,103,17)	Variable Resistor 20 kohm(A) (B CH GAIN)	CCW1030
CN101	(A,217,77)	RCA Jack	CKB1104
CN104	(A,68,19)	Connector	CKS6070
CN601	(A,10,52)	Terminal	YKE5002
CN602	(A,10,83)	Auto Fuse Holder	CKR1021
CN603	(A,168,89)	Connector	CKS4807
CN801	(A,6,11)	Connector	CKS4822
CN802	(A,10,11)	Harness	CDE9642
CN1101	(A,209,36)	Terminal	YKE5003
⚠		Fuse (30 A)	CEK1330

RESISTORS

R 101	(A,198,73)	RS1/8SQ471J
R 103	(B,97,41)	RS1/8SQ223J
R 104	(A,89,41)	RS1/8SQ332J
R 105	(B,90,39)	RS1/8SQ152J
R 106	(B,87,35)	RS1/8SQ1002D
R 107	(B,87,30)	RS1/8SQ1002D
R 108	(B,98,35)	RS1/8SQ1002D
R 109	(B,96,30)	RS1/8SQ1002D
R 111	(B,80,30)	RS1/8SQ332J
R 112	(B,77,30)	RS1/8SQ181J
R 113	(B,72,30)	RS1/10SR472J
R 114	(B,141,80)	RS1/8SQ102J
R 115	(B,144,72)	RS1/8SQ103J
R 116	(B,138,79)	RS1/8SQ223J
R 117	(B,146,82)	RS1/8SQ104J
R 201	(A,198,87)	RS1/8SQ471J
R 203	(B,94,23)	RS1/8SQ223J
R 204	(A,89,22)	RS1/8SQ332J
R 205	(B,89,20)	RS1/8SQ152J
R 206	(B,87,17)	RS1/8SQ1002D
R 207	(B,96,12)	RS1/8SQ1002D
R 208	(B,84,17)	RS1/8SQ1002D
R 209	(B,87,13)	RS1/8SQ1002D
R 211	(B,80,13)	RS1/8SQ332J
R 212	(B,77,13)	RS1/8SQ181J
R 213	(B,71,14)	RS1/10SR472J
R 214	(B,157,80)	RS1/8SQ102J
R 215	(B,155,73)	RS1/8SQ103J
R 216	(B,161,79)	RS1/8SQ223J
R 217	(B,152,78)	RS1/8SQ104J
R 601	(A,11,24)	RS1/8SQ102J
R 602	(A,17,16)	RS1/8SQ472J
R 603	(B,9,17)	RS1/8SQ102J
R 604	(B,9,12)	RS1/8SQ102J
R 605	(B,13,12)	RS1/8SQ473J
R 606	(B,19,21)	RS1/8SQ103J
R 607	(B,21,18)	RS1/8SQ103J
R 608	(B,26,10)	RS1/8SQ472J
R 609	(B,29,13)	RS1/4SA222J
R 610	(B,20,8)	RS1/4SA471J
R 612	(B,86,11)	RS1/8SQ472J
R 613	(A,48,83)	RS1/8SQ223J
R 614	(B,52,83)	RS1/8SQ223J
R 615	(B,49,83)	RS1/4SA472J
R 631	(B,70,96)	RS1/8SQ153J
R 632	(B,64,96)	RS1/8SQ182J
R 633	(A,61,83)	RS1/8SQ473J
R 634	(A,61,80)	RS1/8SQ472J
R 635	(A,63,80)	RS1/8SQ472J
R 636	(A,66,78)	RS1/8SQ472J
R 637	(B,94,87)	RS1/8SQ272J
R 638	(A,92,87)	RS1/8SQ563J
R 639	(B,56,90)	RS1/8SQ472J
R 640	(A,69,78)	RS1/8SQ332J
R 641	(A,73,78)	RS1/8SQ332J
R 642	(B,67,76)	RS1/8SQ472J
R 643	(B,67,71)	RS1/8SQ472J
R 644	(B,34,25)	RS1/4SA121J
R 645	(B,34,19)	RS1/4SA121J
R 646	(B,37,25)	RS1/4SA121J
R 647	(B,37,19)	RS1/4SA121J
R 648	(B,50,25)	RS1/4SA121J
R 649	(B,50,19)	RS1/4SA121J
R 650	(B,47,25)	RS1/4SA121J
R 651	(B,47,19)	RS1/4SA121J
R 652	(B,63,25)	RS1/4SA121J
R 653	(B,63,19)	RS1/4SA121J
R 654	(B,60,25)	RS1/4SA121J
R 655	(B,60,19)	RS1/4SA121J
R 656	(B,76,25)	RS1/4SA121J
R 657	(B,76,19)	RS1/4SA121J
R 658	(B,73,25)	RS1/4SA121J
R 659	(B,73,19)	RS1/4SA121J
R 660	(B,38,31)	RS1/4SA100J
R 661	(B,31,50)	RS1/4SA100J
R 701	(B,76,51)	RS1/4SA100J
R 702	(A,73,64)	RS1/4SA220J
R 703	(B,73,58)	RS1/4SA220J
R 704	(B,105,88)	RS1/4SA121J
R 705	(A,110,91)	RS1/4SA472J
R 706	(B,105,82)	RS1/8SQ470J
R 707	(B,106,35)	RS1/8SQ470J
R 708	(B,102,88)	RS1/4SA121J
R 709	(B,101,94)	RS1/4SA121J
R 710	(B,98,94)	RS1/4SA121J

Circuit Symbol and No.		Part No.
R 801	(A,50,7)	RS1/8SQ100J
R 802	(B,39,10)	RS1/4SA332J
R 803	(A,50,31)	RS1/8SQ100J
R 804	(B,39,28)	RS1/4SA332J
R 805	(A,54,41)	RS1/10SR103J
R 806	(B,55,39)	RS1/10SR103J
R 807	(B,61,39)	RS1/10SR103J
R 808	(B,59,40)	RS1/4SA101J
R 809	(B,48,44)	RS1/4SA101J
R 810	(B,69,58)	RS1/8SQ392J
R 811	(B,63,58)	RS1/8SQ392J
R 812	(B,57,58)	RS1/8SQ392J
R 813	(B,51,58)	RS1/8SQ392J
R 814	(B,45,58)	RS1/8SQ392J
R 901	(A,118,75)	RS1/10SR103J
R 902	(A,120,68)	RS1/10SR472J
R 903	(A,120,75)	RS1/10SR473J
R 904	(A,123,72)	RS1/10SR472J
R 905	(A,120,78)	RS1/10SR102J
R 906	(A,123,70)	RS1/10SR472J
R 907	(A,126,64)	RS1/10SR102J
R 908	(A,149,86)	RS1/8SQ332J
R 909	(B,141,95)	RS1/8SQ222J
R 911	(A,185,9)	RS1/10SR223J
R 912	(A,200,17)	RS1/10SR103J
R 913	(B,199,56)	RS1/10SR103J
R 914	(A,197,21)	RS1/10SR683J
R 915	(A,190,14)	RS1/10SR103J
R 1101	(B,141,66)	RS1/8SQ332J
R 1102	(B,133,66)	RS1/8SQ101J
R 1103	(B,129,59)	RS1/8SQ102J
R 1104	(B,132,59)	RS1/8SQ102J
R 1105	(B,137,61)	RS1/8SQ471J
R 1106	(B,120,39)	RS1/8SQ103J
R 1107	(A,122,60)	RS1/8SQ682J
R 1108	(A,119,58)	RS1/8SQ272J
R 1109	(A,119,54)	RS1/8SQ332J
R 1111	(B,127,45)	RS1/8SQ103J
R 1112	(B,127,42)	RS1/8SQ272J
R 1113	(B,128,38)	RS1/8SQ392J
R 1114	(B,121,51)	RS1/8SQ100J
R 1115	(B,118,53)	RS1/8SQ4R7J
R 1116	(B,123,39)	RS1/8SQ473J
R 1117	(B,143,15)	RS1/8SQ270J
R 1118	(B,130,15)	RS1/8SQ270J
R 1119	(A,130,64)	RS1/8SQ390J
R 1120	(A,139,50)	RS1/8SQ471J
R 1121	(A,139,54)	RS1/8SQ473J
R 1122	(A,144,55)	RS2LMF100J
R 1123	(B,190,38)	RS1/10SR473J
R 1124	(B,204,16)	RS1/10SR473J
R 1125	(B,146,44)	RS1/8SQ222J
R 1127	(B,137,8)	RS1/4SA220J
R 1128	(A,125,36)	RS1/8SQ393J
R 1201	(B,161,66)	RS1/8SQ332J
R 1202	(B,169,65)	RS1/8SQ101J
R 1203	(B,166,59)	RS1/8SQ102J
R 1204	(B,169,59)	RS1/8SQ102J
R 1205	(B,174,61)	RS1/8SQ471J
R 1206	(B,159,36)	RS1/8SQ103J

Circuit Symbol and No.		Part No.
R 1207	(A,159,60)	RS1/8SQ682J
R 1208	(A,156,58)	RS1/8SQ272J
R 1209	(A,156,54)	RS1/8SQ332J
R 1211	(B,164,45)	RS1/8SQ103J
R 1212	(B,164,42)	RS1/8SQ272J
R 1213	(B,165,38)	RS1/8SQ392J
R 1214	(B,157,51)	RS1/8SQ100J
R 1215	(B,155,53)	RS1/8SQ4R7J
R 1216	(B,161,36)	RS1/8SQ473J
R 1217	(B,171,15)	RS1/8SQ270J
R 1218	(B,158,15)	RS1/8SQ270J
R 1219	(A,168,64)	RS1/8SQ390J
R 1220	(A,176,50)	RS1/8SQ471J
R 1221	(A,176,54)	RS1/8SQ473J
R 1222	(A,181,55)	RS2LMF100J
R 1223	(B,191,51)	RS1/10SR473J
R 1224	(B,203,56)	RS1/10SR473J
R 1225	(B,183,44)	RS1/8SQ222J
R 1227	(B,165,8)	RS1/4SA220J
R 1228	(A,163,36)	RS1/8SQ393J

CAPACITORS

C 101	(A,197,70)	CCSQCH471J50
C 102	(A,191,75) 10 uF/50 V	CCH1543
C 103	(B,210,72)	CCSQCH223J50
C 104	(B,90,41)	CCSQCH470J50
C 106	(B,84,30)	CCSQCH330J50
C 107	(B,98,30)	CCSQCH330J50
C 108	(A,87,34) Capacitor	CEVW220M16
C 109	(A,93,34) Capacitor	CEVW220M16
C 110	(A,83,34)	CCSQCH103J50
C 111	(A,97,34)	CCSQCH103J50
C 112	(B,207,68)	CCSQCH471J50
C 113	(B,144,82)	CCSQCH330J50
C 114	(B,138,81)	CCSQCH470J50
C 201	(A,197,84)	CCSQCH471J50
C 202	(A,191,95) 10 uF/50 V	CCH1543
C 203	(B,197,83)	CCSQCH223J50
C 204	(B,89,23)	CCSQCH470J50
C 206	(B,98,12)	CCSQCH330J50
C 207	(B,84,13)	CCSQCH330J50
C 208	(A,87,15) Capacitor	CEVW220M16
C 209	(A,93,15) Capacitor	CEVW220M16
C 210	(A,83,15)	CCSQCH103J50
C 211	(A,98,15)	CCSQCH103J50
C 212	(B,209,68)	CCSQCH471J50
C 213	(B,154,78)	CCSQCH330J50
C 214	(B,161,81)	CCSQCH470J50
C 601	(B,22,55)	CCSQCH103J50
C 602	(A,11,16) Capacitor	CEVW4R7M35
C 603	(B,17,12)	CCSQCH103J50
C 604	(A,21,9)	CEVW101M16
C 605	(A,23,55) 6 800 uF/16 V	CCH1468
C 606	(B,17,58)	CCSQCH103J50
C 608	(B,12,36)	CCSQCH103J50
C 631	(B,67,96)	CCSQCH102J50
C 632	(B,59,95)	CKSQYB105K25
C 633	(A,67,88) Capacitor	CEVW221M16

Circuit Symbol and No.		Part No.
C 634	(A,84,91)	CCSQCH223J50
C 635	(A,78,91)	CEVW101M16
C 636	(A,92,92)	CFTLA334J50
C 637	(B,58,90)	CKSQYB104K50
C 638	(B,32,35)	CCSQCH472J50
C 639	(B,31,43)	CCSQCH472J50
C 701	(B,76,58) 1 000 pF	CCG1186
C 702	(A,73,69) 1 000 pF	CCG1186
C 703	(B,73,51) 1 000 pF	CCG1186
C 704	(A,106,71) 4 800 uF/35 V	CCH2042
C 705	(B,104,71)	CKSQYB104K50
C 706	(A,106,44) 4 800 uF/35 V	CCH2042
C 707	(B,104,44)	CKSQYB104K50
C 708	(A,103,88)	CEVW100M50
C 709	(A,117,89) Capacitor	CEVW470M25
C 710	(A,134,89) Capacitor	CEVW470M25
C 711	(A,138,89)	CKSRYB473K50
C 713	(A,147,77)	CKSQYB334K50
C 715	(A,147,70)	CKSQYB334K50
C 801	(A,47,12) 10 uF/50 V	CCH1543
C 802	(A,39,14) Capacitor	CEVW470M25
C 803	(B,37,14)	CCSQCH103J50
C 804	(A,22,14) 47 uF/25 V	CCH1643
C 805	(B,22,16)	CCSQCH103J50
C 806	(A,47,26) 10 uF/50 V	CCH1543
C 807	(A,39,25) Capacitor	CEVW470M25
C 808	(B,37,24)	CCSQCH103J50
C 809	(A,22,25) 47 uF/25 V	CCH1643
C 810	(B,22,22)	CCSQCH103J50
C 811	(B,43,58)	CKSQYB104K50
C 901	(A,123,68)	CCSQCH102J50
C 902	(A,144,92) Capacitor	CEVW221M16
C 903	(A,200,9)	CEANP221M10
C 1101	(A,131,74) 22 uF/16 V	CCH1784
C 1102	(B,137,66)	CCSQCH102J50
C 1103	(B,135,66)	CCSQCH102J50
C 1104	(A,141,68) Capacitor	CEVW220M16
C 1105	(B,144,76)	CCSQCH103J50
C 1106	(A,141,77) Capacitor	CEVW220M16
C 1107	(B,133,71)	CCSQCH103J50
C 1108	(B,134,59)	CKSQYB225K16
C 1109	(B,125,55)	CKSYB225K25
C 1110	(A,130,59)	CEVW100M16
C 1111	(A,123,44)	CKSYB225K25
C 1112	(B,134,50) 22 uF	ACG7103
C 1114	(B,140,14) 0.1 uF	CCG1202
C 1115	(B,145,9) 1 uF	CCG1255
C 1116	(B,140,8) 1 uF	CCG1255
C 1117	(A,150,51)	CFTLA334J50
C 1118	(A,150,60)	CFTLA334J50
C 1125	(B,204,25) 0.01 uF	ACG7062
C 1126	(B,202,25) 0.01 uF	ACG7062
C 1130	(B,132,10)	CCSQCH102J50
C 1131	(B,135,7)	CCSQCH102J50
C 1201	(A,168,74) 22 uF/16 V	CCH1784
C 1202	(B,166,65)	CCSQCH102J50
C 1203	(B,164,71)	CCSQCH102J50
C 1204	(A,159,68) Capacitor	CEVW220M16
C 1205	(B,155,68)	CCSQCH103J50
C 1206	(A,159,77) Capacitor	CEVW220M16

Circuit Symbol and No.		Part No.
C 1207	(B,164,78)	CCSQCH103J50
C 1208	(B,171,59)	CKSQYB225K16
C 1209	(B,162,55)	CKSYB225K25
C 1210	(A,167,59)	CEVW100M16
C 1211	(A,160,44)	CKSYB225K25
C 1212	(B,171,50) 22 uF	ACG7103
C 1214	(B,168,13) 0.1 uF	CCG1202
C 1215	(B,174,9) 1 uF	CCG1255
C 1216	(B,168,8) 1 uF	CCG1255
C 1217	(A,187,51)	CFTLA334J50
C 1218	(A,187,60)	CFTLA334J50
C 1225	(B,204,47) 0.01 uF	ACG7062
C 1226	(B,204,45) 0.01 uF	ACG7062
C 1230	(B,160,10)	CCSQCH102J50
C 1231	(B,163,7)	CCSQCH102J50