


## EXPLODED VIEW • PARTS LIST


Escutcheon section

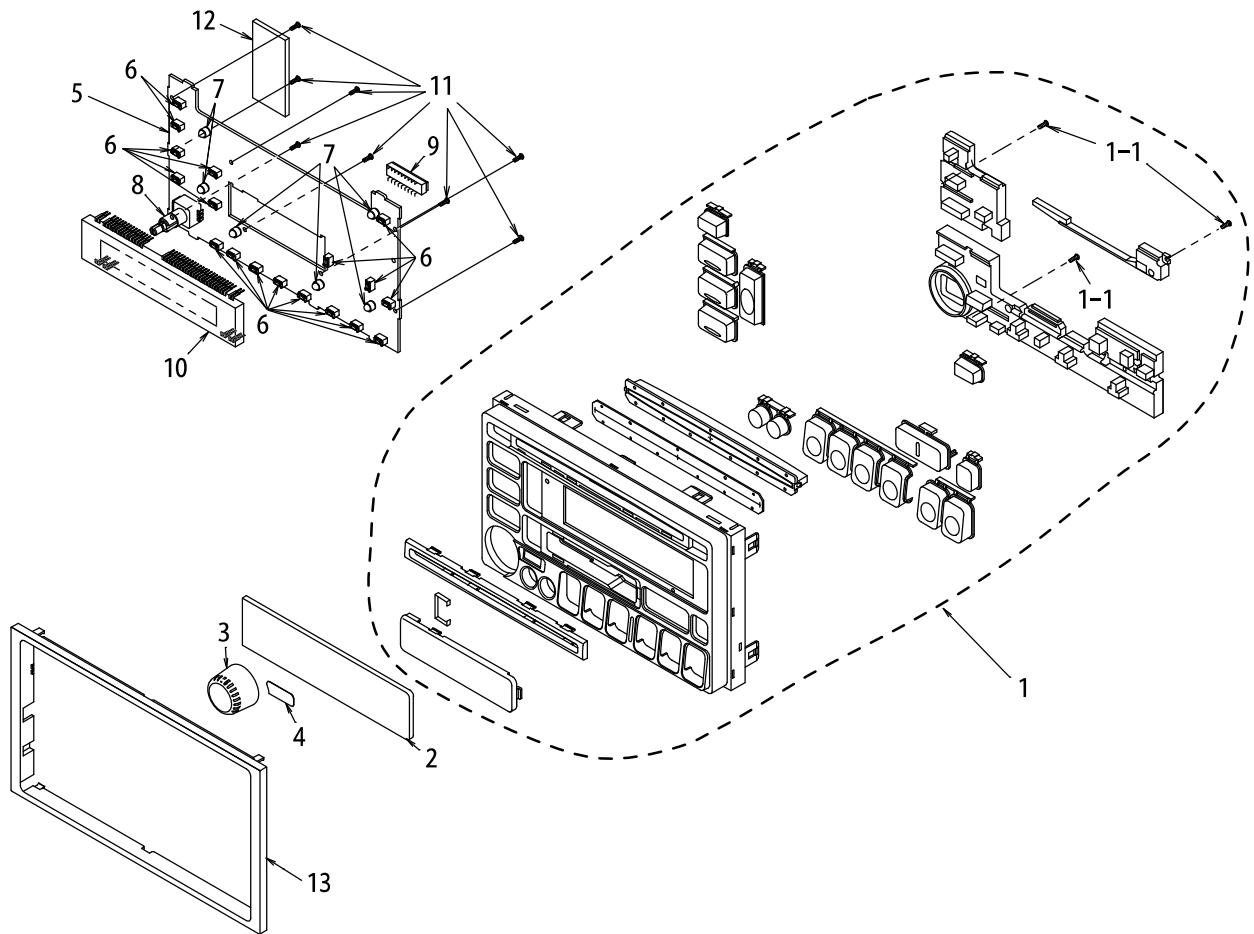

| NO. | PART NO.    | DESCRIPTION                       | Q'TY |
|-----|-------------|-----------------------------------|------|
| 1   | 940-7928-22 | ESCUTCHEON ASSY                   | 1    |
| 1-1 | 716-0778-00 | WAVE SCREW( $\phi 2 \times 6$ )   | 3    |
| 2   | 373-0939-20 | DIAL COVER                        | 1    |
| 3   | 380-5494-00 | KNOB                              | 1    |
| 4   | 371-3938-00 | TRIM PLATE                        | 1    |
| 5   | 039-1731-01 | SWITCH PWB<br>(WITHOUT COMPONENT) | 1    |
| 6   | 013-6302-01 | SWITCH                            | 18   |

| NO. | PART NO.    | DESCRIPTION                     | Q'TY |
|-----|-------------|---------------------------------|------|
| 7   | 017-0420-09 | PILOT LAMP(14V 40mA)            | 6    |
| 8   | 016-0010-05 | VR W/SHAFT                      | 1    |
| 9   | 074-1151-18 | OUTLET SOCKET(18P)              | 1    |
| 10  | 379-4018-24 | INDICATOR                       | 1    |
| 11  | 716-0778-00 | WAVE SCREW( $\phi 2 \times 6$ ) | 8    |
| 12  | 345-8090-00 | INSULATOR                       | 1    |
| 13  | 383-0616-21 | FACE PANEL                      | 1    |

# Main section

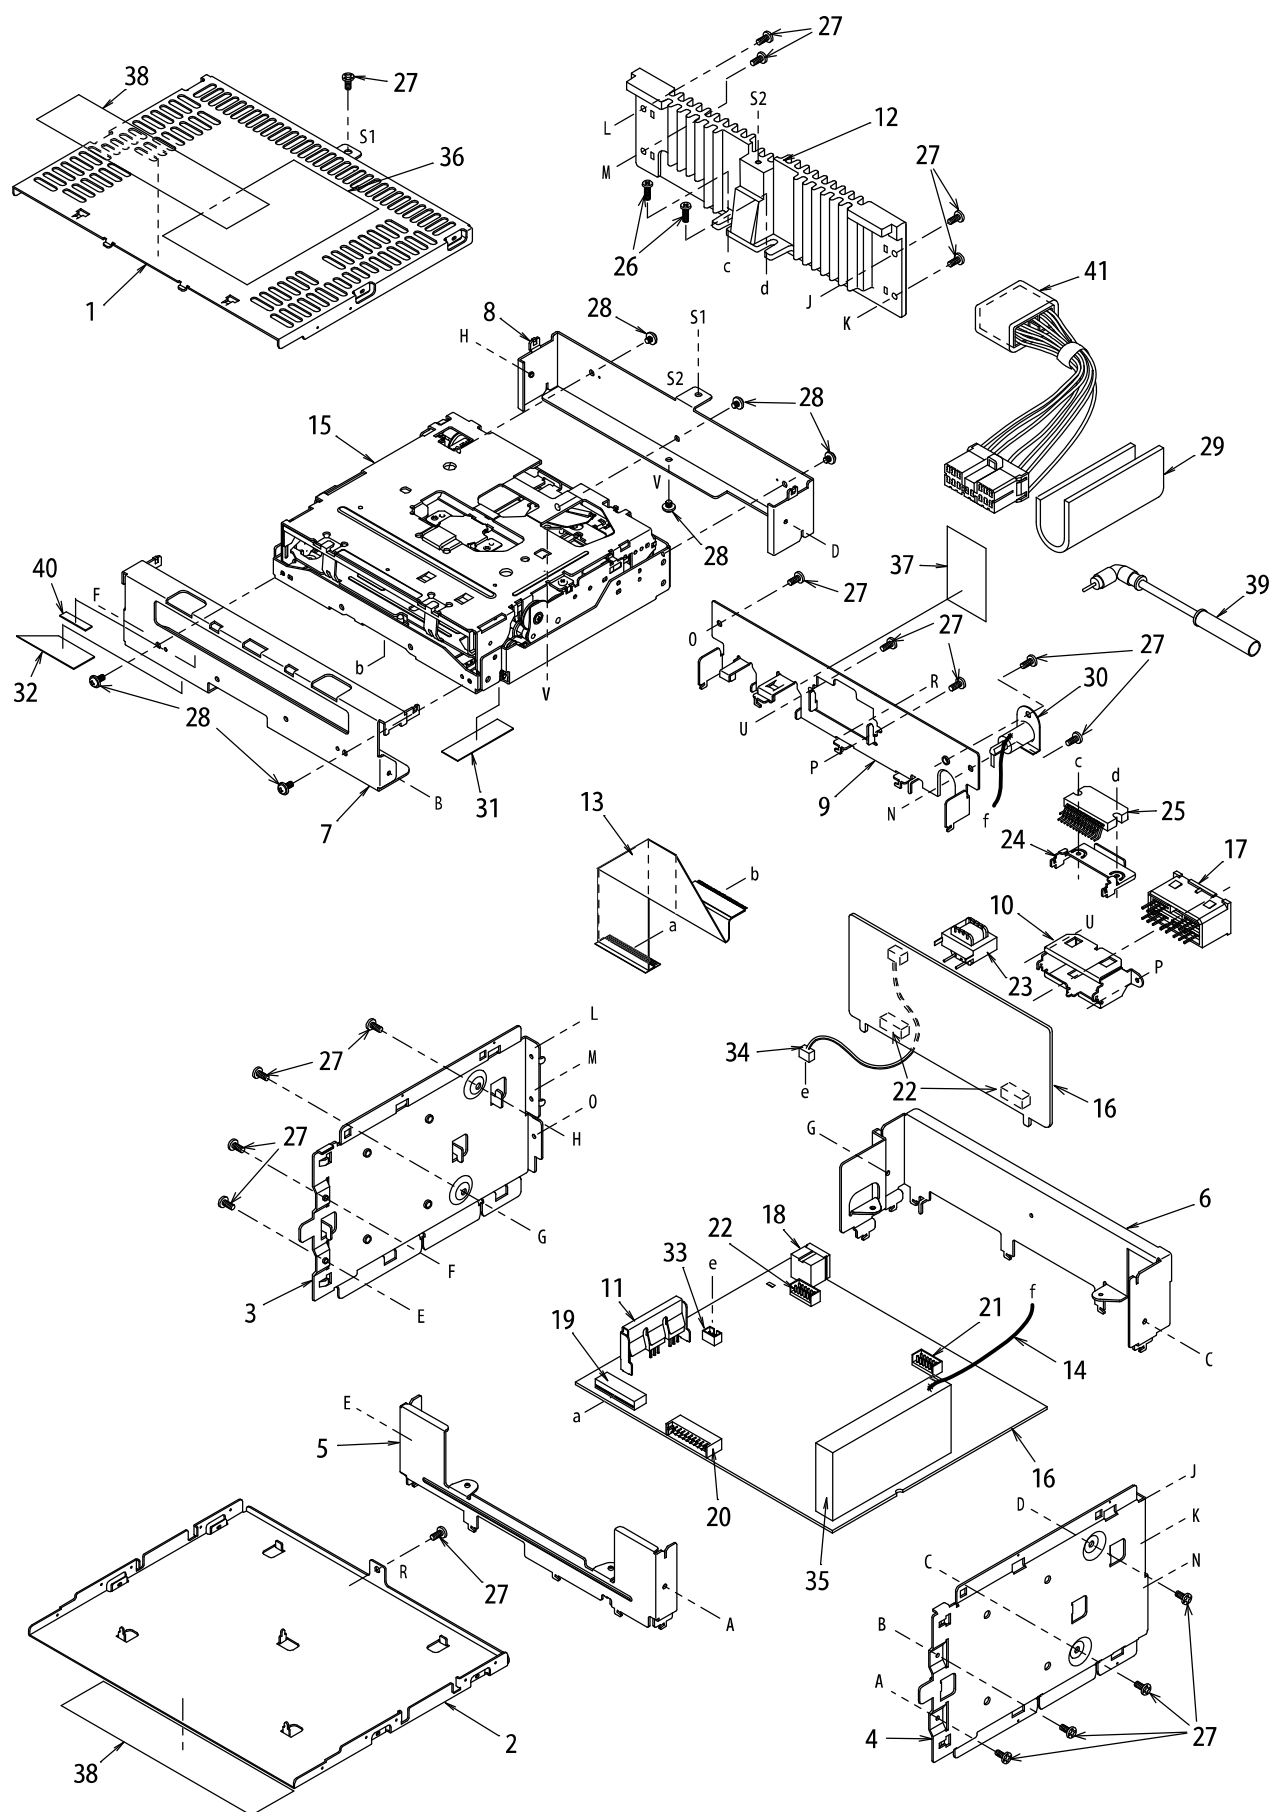


PS-2375D,I  
PS-2376D,I  
PS-2377D,I

| NO. | PART NO.    | DESCRIPTION                  | Q'TY |
|-----|-------------|------------------------------|------|
| 1   | 310-1639-00 | UPPER CASE                   | 1    |
| 2   | 311-1727-02 | LOWER CASE                   | 1    |
| 3   | 305-0266-00 | SIDE PLATE(LEFT)             | 1    |
| 4   | 305-0265-00 | SIDE PLATE(RIGHT)            | 1    |
| 5   | 309-0698-00 | FRONT PLATE                  | 1    |
| 6   | 331-2275-01 | MECHANISM BRACKET            | 1    |
| 7   | 331-2281-01 | MECHANISM BRACKET (FRONT)    | 1    |
| 8   | 331-2282-00 | MECHANISM BRACKET(REAR)      | 1    |
| 9   | 307-0597-20 | REAR PLATE                   | 1    |
| 10  | 331-2276-00 | OUTLET HOLDER                | 1    |
| 11  | 331-0567-00 | TRANSISTOR HOLDER            | 1    |
| 12  | 313-1709-00 | HEAT SINK                    | 1    |
| 13  | 816-2451-00 | FLAT CABLE                   | 1    |
| 14  | 060-0108-00 | JUMPER WIRE                  | 1    |
| 15  | 929-0069-04 | CD MECHANISM                 | 1    |
| 16  | 039-1730-01 | MAIN PWB (WITHOUT COMPONENT) | 1    |
| 17  | 074-1010-00 | OUTLET SOCKET                | 1    |
| 18  | 074-1194-00 | OUTLET SOCKET                | 1    |
| 19  | 074-1186-26 | OUTLET SOCKET                | 1    |
| 20  | 076-0540-18 | PLUG(18P)                    | 1    |
| 21  | 076-0368-12 | PLUG(12P)                    | 2    |
| 22  | 074-0898-12 | OUTLET SOCKET                | 2    |

| NO. | PART NO.                                                                               | DESCRIPTION                                                                                                                      | Q'TY |
|-----|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|------|
| 23  | 009-0666-62                                                                            | CHOKE                                                                                                                            | 1    |
| 24  | 331-2277-00                                                                            | IC HOLDER                                                                                                                        | 1    |
| 25  | 051-2013-00                                                                            | IC(TDA7385)                                                                                                                      | 1    |
| 26  | 714-2612-81                                                                            | MACHINE SCREW(M2.6×12)                                                                                                           | 2    |
| 27  | 714-2606-81                                                                            | MACHINE SCREW(M2.6×6)                                                                                                            | 19   |
| 28  | 714-2303-81                                                                            | MACHINE SCREW(M2.3×3)                                                                                                            | 6    |
| 29  | 345-8455-01                                                                            | CUSHION RUBBER                                                                                                                   | 1    |
| 30  | 092-0702-00                                                                            | ANTENNA RECEPT                                                                                                                   | 1    |
| 31  | 347-2022-02                                                                            | PAPER PART                                                                                                                       | 1    |
| 32  | 347-5679-02                                                                            | DOUBLE FACE                                                                                                                      | 1    |
| 33  | 076-0312-03                                                                            | PLUG(3P)                                                                                                                         | 1    |
| 34  | 854-4376-00                                                                            | EXTENSION LEAD                                                                                                                   | 1    |
| 35  | 880-2079G                                                                              | TUNER PACK (AM/FM)                                                                                                               | 1    |
| 36  | 286-9431-00<br>286-9431-10<br>286-9431-20<br>286-9431-30<br>286-9431-40<br>286-9431-50 | SETPLATE(PS-2375D)<br>SETPLATE(PS-2375I)<br>SETPLATE(PS-2376D)<br>SETPLATE(PS-2376I)<br>SETPLATE(PS-2377D)<br>SETPLATE(PS-2377I) | 1    |
| 37  | 347-5206-00                                                                            | SHADE                                                                                                                            | 1    |
| 38  | 353-0531-00                                                                            | SHADE                                                                                                                            | 2    |
| 39  | 093-0778-01                                                                            | ANTENNA JUMPER (USE PS-2375I/2376I/2377I)                                                                                        | 1    |
| 40  | 347-6036-00                                                                            | DOUBLE FACE                                                                                                                      | 1    |
| 41  | 854-8213-00                                                                            | EXTENSION LEAD                                                                                                                   | 1    |

# CD mechanism section

※ The parts list is on page 10.

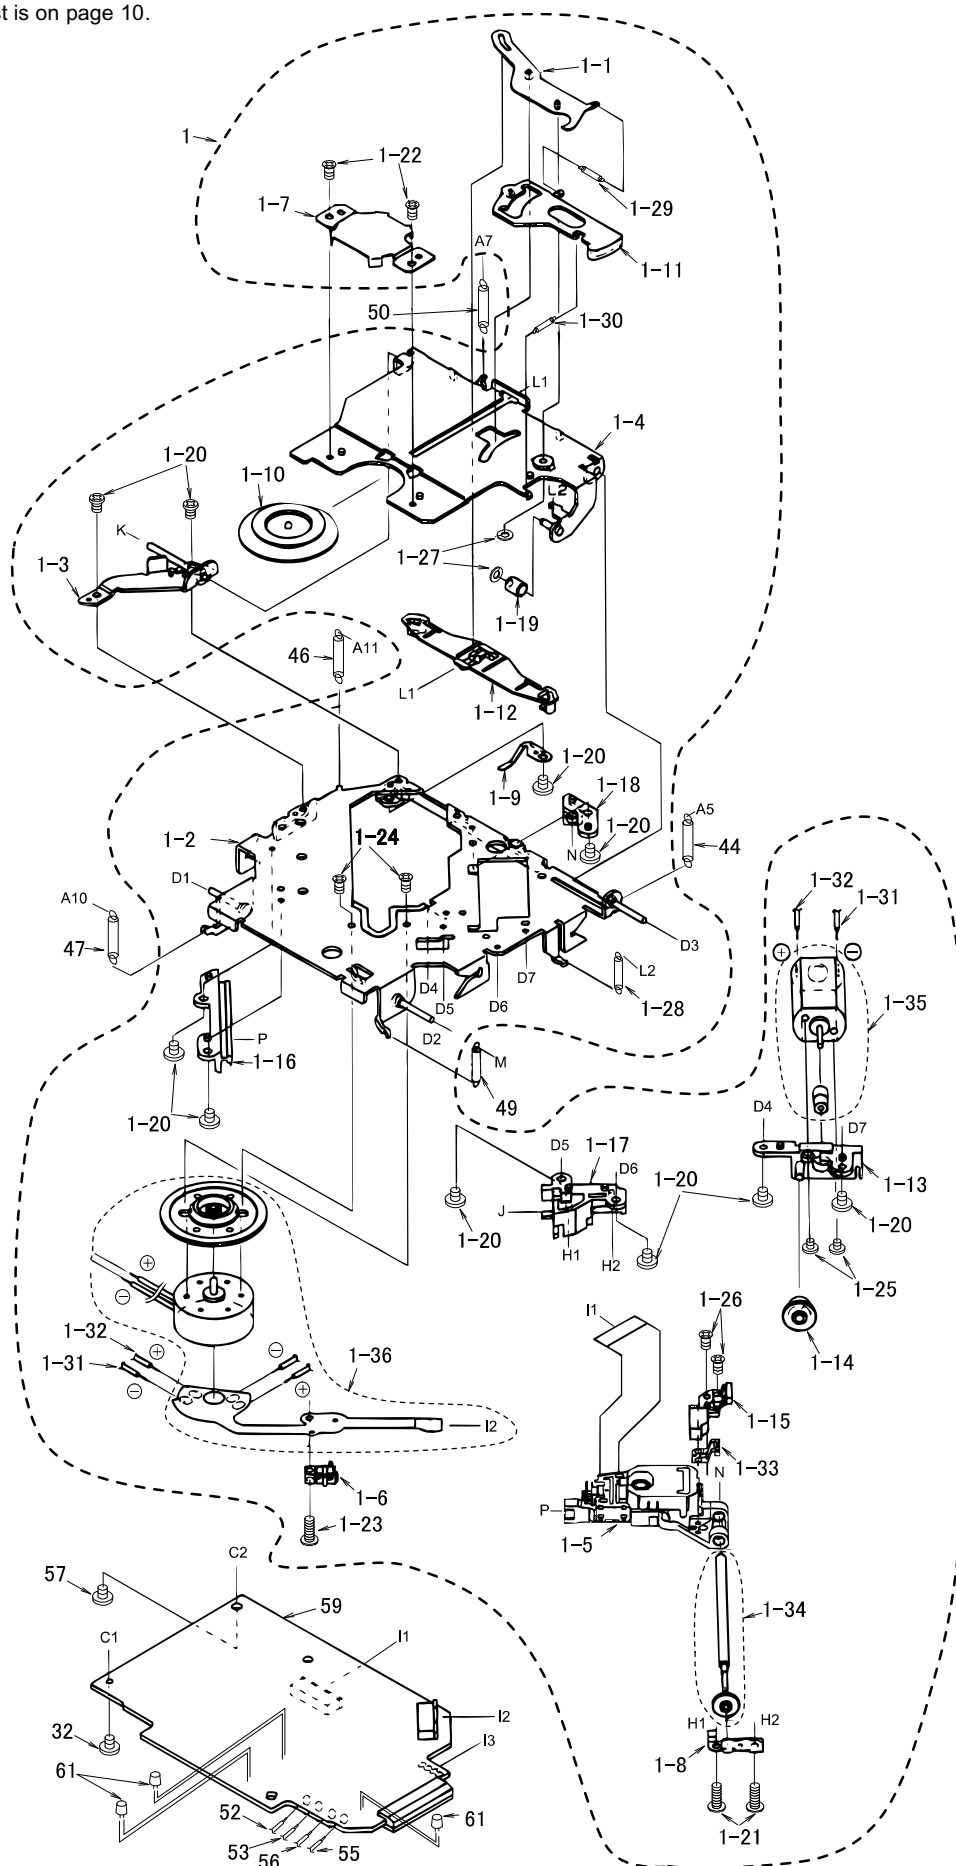



CD mechanism section

| NO.  | PART NO.    | DESCRIPTION                                | Q'TY | NO. | PART NO.    | DESCRIPTION           | Q'TY |
|------|-------------|--------------------------------------------|------|-----|-------------|-----------------------|------|
| 1    | HBS-463-100 | DRIVE UNIT                                 | 1    | 13  | 345-7514-00 | S-PWB-SHEET           | 1    |
| 1-1  | 966-0314-21 | STOP LINK ASSY                             | 1    | 14  | 620-0485-20 | FRONT PLATE           | 1    |
| 1-2  | 966-0447-23 | DR-PLATE ASSY                              | 1    | 15  | 620-0488-20 | S-L-LINK PLATE        | 1    |
| 1-3  | 966-0448-21 | SIDE PLATE ASSY                            | 1    | 16  | 620-0489-02 | MOTOR PLATE           | 1    |
| 1-4  | 966-0449-23 | CLAMP LINK ASSY                            | 1    | 17  | 620-0492-20 | MOTOR BRACKET         | 1    |
| 1-5  | 969-0050-04 | PICK UP UNIT                               | 1    | 18  | 620-0773-01 | MECHANISM BRACKET     | 1    |
| 1-6  | 013-7100-00 | LIMIT SWITCH                               | 1    | 19  | 621-0402-02 | U-DISC GUIDE-F        | 1    |
| 1-7  | 620-0198-03 | CLAMPER PLATE                              | 1    | 20  | 621-0243-02 | ROLLER SLEEVE         | 2    |
| 1-8  | 620-0491-03 | SPRING PLATE                               | 1    | 21  | 621-0248-07 | RACK GEAR             | 1    |
| 1-9  | 620-0690-01 | RATTLE PLATE                               | 1    | 22  | 621-0249-02 | ROLLER GEAR           | 1    |
| 1-10 | 621-0205-02 | CLAMPER RING                               | 1    | 23  | 621-0250-01 | DAMPER HOLDER         | 4    |
| 1-11 | 621-0251-03 | LOCK LINK                                  | 1    | 24  | 621-0258-03 | LOADING ROLLER        | 2    |
| 1-12 | 621-0252-03 | DISC STOPPER                               | 1    | 25  | 622-1072-05 | ROLLER SHAFT          | 1    |
| 1-13 | 621-0253-02 | MOTOR HOLDER                               | 1    | 26  | 622-1219-01 | SHIFT ROLLER          | 1    |
| 1-14 | 621-0255-02 | SECOND GEAR                                | 1    | 27  | 629-0058-00 | DAMPER-VA             | 4    |
| 1-15 | 621-0375-00 | SH-BASE                                    | 1    | 28  | 714-2003-81 | MACHINE SCREW(M2×3)   | 8    |
| 1-16 | 621-0357-03 | PICK UP GUIDE                              | 1    | 29  | 714-2603-81 | MACHINE SCREW(M2.6×3) | 5    |
| 1-17 | 621-0358-02 | LS-HOLDER-F                                | 1    | 30  | 716-1468-00 | SCREW(M2×2.5)         | 2    |
| 1-18 | 621-0359-02 | LS-HOLDER-R                                | 1    | 31  | 716-1507-00 | SCREW(M2×3)           | 2    |
| 1-19 | 622-1073-02 | CLAMPER ROLLER                             | 1    | 32  | 716-1670-00 | SCREW(M2×4)           | 5    |
| 1-20 | 714-2003-81 | MACHINE SCREW(M2X3)                        | 10   | 33  | 716-1677-00 | SCREW(M2×5)           | 1    |
| 1-21 | 716-0675-00 | SCREW                                      | 2    | 34  | 716-1704-00 | SCREW(M2×7)           | 1    |
| 1-22 | 716-1468-00 | SCREW                                      | 2    | 35  | 716-1742-00 | SCREW((M2×5)          | 1    |
| 1-23 | 716-1555-00 | WAVE SCREW                                 | 1    | 36  | 743-1500-20 | E-RING                | 3    |
| 1-24 | 716-1733-00 | SCREW                                      | 2    | 37  | 746-0712-03 | WASHER                | 1    |
| 1-25 | 732-2004-11 | SEMS SCREW                                 | 2    | 38  | 746-0762-00 | WASHER                | 1    |
| 1-26 | 739-1735-17 | PRECISION SCREW                            | 2    | 39  | 746-0877-02 | WASHER                | 2    |
| 1-27 | 746-0761-00 | SCREW                                      | 2    | 40  | 750-3090-02 | RO-SPRING-L           | 1    |
| 1-28 | 750-3097-03 | CLAMPER SPRING                             | 1    | 41  | 750-3091-03 | RO-SPRING-R           | 1    |
| 1-29 | 750-3098-00 | L-LINK SPRING                              | 1    | 42  | 750-3092-03 | SHIFT SPRING          | 1    |
| 1-30 | 750-3099-00 | ES-SPRING                                  | 1    | 43  | 750-3094-00 | S-ARM SPRING          | 1    |
| 1-31 | 816-2372-00 | VINYL COAT WIRE(BLU)                       | 1    | 44  | 750-3096-01 | DR-SPRING-R           | 1    |
| 1-32 | 816-2373-00 | VINYL COAT WIRE(WHT)                       | 1    | 45  | 750-3098-00 | L-LINK SPRING         | 1    |
| 1-33 | 966-0454-00 | SH-RACK ASSY                               | 1    | 46  | 750-3164-00 | DR-SPRING-LR          | 1    |
| 1-34 | HBS-432-100 | LS-GEAR ASSY                               | 1    | 47  | 750-3188-00 | DR-SPRING-F-B         | 1    |
| 1-35 | SMA-146-100 | SLED MOTOR ASSY                            | 1    | 48  | 750-3189-00 | SIDE-L-SPRING         | 1    |
| 1-36 | SMA-151-100 | SPINDLE MOTOR ASSY                         | 1    | 49  | 750-3201-00 | DR-SPRING-F-R         | 1    |
| 2    | 966-0308-24 | CHASSIS ASSY                               | 1    | 50  | 750-3202-00 | CENTER SPRING-B       | 1    |
| 3    | 966-0309-22 | L-DISC-G-ASSY                              | 1    | 51  | 800-4904-60 | VINYL COAT WIRE(BLK)  | 1    |
| 4    | 966-0310-21 | SFT-P-CH-ASSY                              | 1    | 52  | 800-4910-60 | VINYL COAT WIRE(BLK)  | 1    |
| 5    | 966-0312-21 | SHIFT-P-ASSY                               | 1    | 53  | 801-4910-60 | VINYL COAT WIRE(BRN)  | 1    |
| 6    | 966-0358-21 | DRIVE-L-PL-ASSY                            | 1    | 54  | 802-4904-60 | VINYL COAT WIRE(RED)  | 1    |
| 7    | 966-0359-21 | SIDE-L-PL-ASSY                             | 1    | 55  | 802-4910-60 | VINYL COAT WIRE(RED)  | 1    |
| 8    | 013-3879-01 | CHUCKING SWITCH                            | 1    | 56  | 804-4910-60 | VINYL COAT WIRE(YEL)  | 1    |
| 9    | 039-0586-01 | CHUCKING SWITCH PWB<br>(WITHOUT COMPONENT) | 1    | 57  | 716-1819-00 | MECHANISM PWB SCREW   | 1    |
| 10   | 039-0588-01 | SENSOR PWB<br>(WITHOUT COMPONENT)          | 1    | 58  | HBS-430-100 | GEAR-PLATE ASSY       | 1    |
| 11   | 060-0252-01 | PHOTO TR (PT4850F)                         | 3    | 59  | HBS-482-100 | MECHANISM PWB ASSY    | 1    |
| 12   | 345-7513-01 | CLAMPER SHEET                              | 1    | 60  | SMA-147-100 | LOADING MOTOR ASSY    | 1    |
|      |             |                                            |      | 61  | 001-0563-00 | DIODE                 | 3    |

# **■ ELECTRICAL PARTS LIST**

## **Main PWB section(B1)**

Note) Several different parts of the same reference number are alternative parts.  
One of those parts is used in the set.

| REF No. | PART No.    | DESCRIPTION         | REF No. | PART No.    | DESCRIPTION         | REF No. | PART No.    | DESCRIPTION         |
|---------|-------------|---------------------|---------|-------------|---------------------|---------|-------------|---------------------|
| ANT1    | 092-0702-00 | ANT RECEPT          | C216    | 184-4773-22 | 10V470 $\mu$ F      | C500    | 178-2732-78 | 0.027 $\mu$ F       |
| BL101   | 880-2079G   | AM/FM TUNER         | C217    | 183-1063-31 | 16V10 $\mu$ F       | C501    | 178-2732-78 | 0.027 $\mu$ F       |
| C101    | 176-1801-00 | 18pF CH             | C221    | 178-3332-78 | 0.033 $\mu$ F       | C502    | 042-0563-71 | 16V100 $\mu$ F      |
| C104    | 178-1032-78 | 0.01 $\mu$ F        | C222    | 043-0309-90 | 10V 1 $\mu$ F       | C503    | 042-0563-71 | 16V100 $\mu$ F      |
| C105    | 178-1032-78 | 0.01 $\mu$ F        | C223    | 183-4763-31 | 16V47 $\mu$ F       | C504    | 184-1073-52 | 35V100 $\mu$ F      |
| C109    | 183-1063-31 | 16V10 $\mu$ F       | C227    | 178-1042-78 | 0.1 $\mu$ F         | C505    | 183-1063-51 | 35V10 $\mu$ F       |
| C110    | 183-1073-21 | 10V100 $\mu$ F      | C228    | 043-0309-90 | 10V 1 $\mu$ F       | C506    | 042-0563-71 | 16V100 $\mu$ F      |
| C112    | 178-3322-78 | 3300pF              | C229    | 178-4732-78 | 0.047 $\mu$ F       | C507    | 183-2263-31 | 16V22 $\mu$ F       |
| C115    | 178-1042-78 | 0.1 $\mu$ F         | C230    | 183-1063-31 | 16V10 $\mu$ F       | D108    | 001-0377-21 | MA4039H             |
| C118    | 178-2232-78 | 0.022 $\mu$ F       | C232    | 178-1032-78 | 0.01 $\mu$ F        | D109    | 001-0377-32 | MA4056M             |
| C119    | 178-1032-78 | 0.01 $\mu$ F        | C237    | 042-0563-15 | 10V220 $\mu$ F      | D110    | 001-0377-45 | MA4082H             |
| C120    | 117-0000-00 | 1/10W 0 $\Omega$ JW | C239    | 183-4763-31 | 16V47 $\mu$ F       | D111    | 001-0377-68 | MA4180L             |
| C121    | 042-0458-05 | 35V4.7 $\mu$ F      | C243    | 042-0565-00 | 16V22 $\mu$ F       | D114    | 001-0377-68 | MA4180L             |
| C122    | 178-1042-78 | 0.1 $\mu$ F         | C246    | 184-4773-22 | 10V470 $\mu$ F      | D115    | 001-0377-68 | MA4180L             |
| C123    | 176-1011-00 | 100pF CH            | C247    | 183-1053-61 | 50V1 $\mu$ F        | D116    | 001-0377-40 | MA4075L             |
| C124    | 176-1011-00 | 100pF CH            | C248    | 184-4773-22 | 10V470 $\mu$ F      | D117    | 001-0503-47 | HZS9B3L             |
| C125    | 176-1011-00 | 100pF CH            | C249    | 183-2263-31 | 16V22 $\mu$ F       | D118    | 001-0503-32 | HZS6A3L             |
| C126    | 178-2212-78 | 220pF               | C250    | 178-2232-78 | 0.022 $\mu$ F       | D120    | 001-0516-00 | MA111               |
| C127    | 176-1801-00 | 18pF CH             | C251    | 178-4742-78 | 0.47 $\mu$ F        | D122    | 001-0516-00 | MA111               |
| C128    | 176-2201-00 | 22pF CH             | C254    | 178-1032-78 | 0.01 $\mu$ F        | D301    | 001-0376-34 | MTZJ6.2A            |
| C130    | 183-1073-21 | 10V100 $\mu$ F      | C255    | 176-2201-00 | 22pF CH             | D302    | 001-2015-00 | RL253               |
| C133    | 178-2232-78 | 0.022 $\mu$ F       | C256    | 176-1511-00 | 150pF CH            | D304    | 001-2015-00 | RL253               |
| C147    | 178-1032-78 | 0.01 $\mu$ F        | C259    | 184-1073-52 | 35V100 $\mu$ F      | D305    | 001-0466-00 | S5688B              |
| C152    | 184-4773-22 | 10V470 $\mu$ F      | C267    | 178-2212-78 | 220pF               | D306    | 001-0516-00 | MA111               |
| C158    | 178-2232-78 | 0.022 $\mu$ F       | C268    | 178-2212-78 | 220pF               | D500    | 001-0330-00 | 1SS119              |
| C159    | 178-2232-78 | 0.022 $\mu$ F       | C269    | 042-0565-00 | 16V22 $\mu$ F       | D501    | 001-0330-00 | 1SS119              |
| C160    | 178-1832-78 | 0.018 $\mu$ F       | C278    | 178-2232-78 | 0.022 $\mu$ F       | D502    | 001-0330-00 | 1SS119              |
| C161    | 183-1046-67 | 50V0.1 $\mu$ F NP   | C279    | 183-1063-31 | 16V10 $\mu$ F       | D503    | 001-0330-00 | 1SS119              |
| C162    | 183-1046-67 | 50V0.1 $\mu$ F NP   | C281    | 176-1011-00 | 100pF CH            | D504    | 001-0377-68 | MA4180L             |
| C163    | 172-1831-11 | 0.018 $\mu$ F       | C282    | 178-1022-78 | 1000pF              | D505    | 001-0516-00 | MA111               |
| C164    | 183-2263-31 | 16V22 $\mu$ F       | C290    | 176-2201-00 | 22pF CH             | IC103   | 051-6212-08 | LC72191JM-TLM       |
| C165    | 183-2253-62 | 50V2.2 $\mu$ F      | C291    | 176-1801-00 | 18pF CH             | IC105   | 051-5013-00 | LC75384E            |
| C166    | 183-2253-62 | 50V2.2 $\mu$ F      | C304    | 176-2201-00 | 22pF CH             | IC106   | 051-6600-38 | CA0008AM            |
| C168    | 183-2253-62 | 50V2.2 $\mu$ F      | C305    | 176-2201-00 | 22pF CH             | IC107   | 052-3143-20 | M30622MAA-D86FP     |
| C170    | 178-1042-78 | 0.1 $\mu$ F         | C306    | 117-0000-00 | 1/10W 0 $\Omega$ JW | IC109   | 051-0869-05 | MB3771PF-(G)        |
| C171    | 183-4763-31 | 16V47 $\mu$ F       | C307    | 117-0000-00 | 1/10W 0 $\Omega$ JW | IC113   | 051-3019-90 | NJM2060V            |
| C174    | 183-2253-62 | 50V2.2 $\mu$ F      | C309    | 117-0000-00 | 1/10W 0 $\Omega$ JW | IC114   | 051-1700-00 | TA7806S             |
| C176    | 183-2253-62 | 50V2.2 $\mu$ F      | C310    | 117-0000-00 | 1/10W 0 $\Omega$ JW | IC305   | 051-2013-00 | TDA7385             |
| C177    | 183-2253-62 | 50V2.2 $\mu$ F      | C311    | 176-2201-00 | 22pF CH             | IC500   | 051-0172-05 | TC4011BF            |
| C181    | 183-1053-61 | 50V1 $\mu$ F        | C312    | 176-2201-00 | 22pF CH             | IC501   | 051-3237-00 | NJM78L18A           |
| C182    | 183-1053-61 | 50V1 $\mu$ F        | C330    | 117-0000-00 | 1/10W 0 $\Omega$ JW | J101    | 074-1186-26 | 26P                 |
| C184    | 178-1542-78 | 0.15 $\mu$ F        | C331    | 117-0000-00 | 1/10W 0 $\Omega$ JW | J102    | 074-1194-00 | 13P CE-NET          |
| C185    | 178-1542-78 | 0.15 $\mu$ F        | C332    | 117-0000-00 | 1/10W 0 $\Omega$ JW | J104    | 074-0898-12 | 12P                 |
| C186    | 183-1063-31 | 16V10 $\mu$ F       | C333    | 117-0000-00 | 1/10W 0 $\Omega$ JW | J105    | 074-0898-12 | 12P                 |
| C187    | 183-1063-31 | 16V10 $\mu$ F       | C338    | 163-1063-30 | 16V10 $\mu$ F       | J303    | 074-1010-00 | OUTLET SOCKET       |
| C188    | 183-1063-31 | 16V10 $\mu$ F       | C339    | 163-1063-30 | 16V10 $\mu$ F       | JW101   | 117-0000-00 | 1/10W 0 $\Omega$ JW |
| C189    | 183-1063-31 | 16V10 $\mu$ F       | C340    | 183-6853-59 | 35V6.8 $\mu$ F      | JW102   | 117-0000-00 | 1/10W 0 $\Omega$ JW |
| C190    | 043-0309-90 | 10V 1 $\mu$ F       | C341    | 163-1063-30 | 16V10 $\mu$ F       | JW103   | 117-0000-00 | 1/10W 0 $\Omega$ JW |
| C191    | 043-0309-90 | 10V 1 $\mu$ F       | C342    | 163-1063-30 | 16V10 $\mu$ F       | JW104   | 117-0000-00 | 1/10W 0 $\Omega$ JW |
| C192    | 178-6832-78 | 0.068 $\mu$ F       | C344    | 043-0499-51 | 0.1 $\mu$ F         | L101    | 010-2330-12 | 2.2 $\mu$ H J       |
| C193    | 178-6832-78 | 0.068 $\mu$ F       | C345    | 043-0499-51 | 0.1 $\mu$ F         | L102    | 010-2230-88 | 220 $\mu$ H         |
| C194    | 178-1042-78 | 0.1 $\mu$ F         | C346    | 043-0499-51 | 0.1 $\mu$ F         | L103    | 010-2330-17 | 5.6 $\mu$ H J       |
| C195    | 178-1042-78 | 0.1 $\mu$ F         | C348    | 043-0499-51 | 0.1 $\mu$ F         | L107    | 010-2230-84 | 100 $\mu$ H         |
| C196    | 178-4722-78 | 4700pF              | C349    | 178-4712-78 | 470pF               | L108    | 010-2230-84 | 100 $\mu$ H         |
| C197    | 178-4722-78 | 4700pF              | C350    | 178-4712-78 | 470pF               | P103    | 076-0540-18 | 18P                 |
| C198    | 178-1032-78 | 0.01 $\mu$ F        | C351    | 178-4712-78 | 470pF               | P106    | 076-0368-12 | 12P                 |
| C199    | 178-1032-78 | 0.01 $\mu$ F        | C352    | 178-4712-78 | 470pF               | P107    | 076-0368-12 | 12P                 |
| C200    | 178-1032-78 | 0.01 $\mu$ F        | C353    | 172-1041-11 | 0.1 $\mu$ F         | P108    | 076-0312-03 | 3P                  |
| C201    | 178-4712-78 | 470pF               | C354    | 183-2263-31 | 16V22 $\mu$ F       | Q105    | 102-2712-51 | 2SC2712G,L          |
| C202    | 178-4712-78 | 470pF               | C355    | 042-0447-00 | 16V2200 $\mu$ F     | Q107    | 102-2712-51 | 2SC2712G,L          |
| C205    | 176-1201-00 | 12pF CH             | C356    | 042-0280-01 | 16V1000 $\mu$ F     | Q112    | 101-1240-00 | 2SB1240             |
| C206    | 176-1201-00 | 12pF CH             | C357    | 183-1063-32 | 16V10 $\mu$ F       | Q113    | 101-1240-00 | 2SB1240             |
| C209    | 183-1063-31 | 16V10 $\mu$ F       | C358    | 183-1053-62 | 50V1 $\mu$ F        | Q115    | 125-0002-02 | RN2402              |
| C210    | 176-1011-00 | 100pF CH            | C360    | 183-1063-31 | 16V10 $\mu$ F       | Q116    | 125-2004-03 | RN1403              |
| C211    | 172-1041-11 | 0.1 $\mu$ F         | C361    | 183-4763-32 | 16V47 $\mu$ F       | Q118    | 102-2712-00 | 2SC2712             |
| C212    | 178-2212-78 | 220pF               | C362    | 172-1041-11 | 0.1 $\mu$ F         | Q119    | 103-1858-00 | 2SD1858             |
| C213    | 178-2212-78 | 220pF               | C363    | 183-4753-52 | 35V4.7 $\mu$ F      | Q120    | 103-1858-00 | 2SD1858             |
| C214    | 183-4763-31 | 16V47 $\mu$ F       | C369    | 178-2232-78 | 0.022 $\mu$ F       | Q121    | 125-0002-03 | RN2403              |
| C215    | 178-4732-78 | 0.047 $\mu$ F       | C370    | 178-2232-78 | 0.022 $\mu$ F       | Q123    | 125-0002-02 | RN2402              |

| REF No. | PART No.    | DESCRIPTION    | REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION   |
|---------|-------------|----------------|---------|-------------|-------------|---------|-------------|---------------|
| Q124    | 125-2004-02 | RN1402         | R177    | 117-4721-10 | 1/10W 4.7kΩ | R306    | 117-1031-10 | 1/10W 10kΩ    |
| Q125    | 103-2012-00 | 2SD2012        | R178    | 117-4721-10 | 1/10W 4.7kΩ | R307    | 117-6821-10 | 1/10W 6.8kΩ   |
| Q128    | 125-0002-02 | RN2402         | R182    | 117-4731-10 | 1/10W 47kΩ  | R308    | 117-2241-10 | 1/10W 220kΩ   |
| Q129    | 125-2004-03 | RN1403         | R185    | 117-6811-10 | 1/10W 680Ω  | R309    | 117-2241-10 | 1/10W 220kΩ   |
| Q130    | 102-2712-00 | 2SC2712        | R187    | 117-2221-10 | 1/10W 2.2kΩ | R310    | 117-2241-10 | 1/10W 220kΩ   |
| Q132    | 100-1431-00 | 2SA1431        | R188    | 117-2221-10 | 1/10W 2.2kΩ | R311    | 117-2241-10 | 1/10W 220kΩ   |
| Q133    | 103-1858-00 | 2SD1858        | R189    | 117-2221-10 | 1/10W 2.2kΩ | R312    | 117-6821-10 | 1/10W 6.8kΩ   |
| Q134    | 103-1858-00 | 2SD1858        | R190    | 111-3311-91 | 1/4WS 330Ω  | R313    | 117-1031-10 | 1/10W 10kΩ    |
| Q135    | 102-2712-51 | 2SC2712G,L     | R191    | 117-6821-10 | 1/10W 6.8kΩ | R314    | 117-1031-10 | 1/10W 10kΩ    |
| Q137    | 100-1162-00 | 2SA1162        | R193    | 117-2231-10 | 1/10W 22kΩ  | R315    | 117-6821-10 | 1/10W 6.8kΩ   |
| Q138    | 125-2004-06 | RN1406         | R194    | 117-3621-10 | 1/10W 3.6kΩ | R321    | 117-0000-00 | 1/10W 0Ω JW   |
| Q140    | 108-0161-50 | 2SK161Y.G      | R195    | 117-3621-10 | 1/10W 3.6kΩ | R322    | 117-0000-00 | 1/10W 0Ω JW   |
| Q142    | 101-1240-00 | 2SB1240        | R196    | 117-3321-10 | 1/10W 3.3kΩ | R326    | 117-0000-00 | 1/10W 0Ω JW   |
| Q143    | 125-2004-03 | RN1403         | R197    | 117-3331-10 | 1/10W 33kΩ  | R330    | 117-0000-00 | 1/10W 0Ω JW   |
| Q144    | 103-1858-00 | 2SD1858        | R198    | 117-2231-10 | 1/10W 22kΩ  | R358    | 117-0000-00 | 1/10W 0Ω JW   |
| Q145    | 102-2458-51 | 2SC2458Y.GR.BL | R200    | 117-1041-10 | 1/10W 100kΩ | R359    | 117-0000-00 | 1/10W 0Ω JW   |
| Q300    | 125-4001-00 | XN1504         | R201    | 117-2231-10 | 1/10W 22kΩ  | R360    | 117-0000-00 | 1/10W 0Ω JW   |
| Q301    | 125-4001-00 | XN1504         | R205    | 117-2231-10 | 1/10W 22kΩ  | R361    | 117-0000-00 | 1/10W 0Ω JW   |
| Q302    | 125-2003-03 | RN1203         | R207    | 117-2231-10 | 1/10W 22kΩ  | R362    | 117-2221-10 | 1/10W 2.2kΩ   |
| Q303    | 125-2004-02 | RN1402         | R209    | 111-2291-91 | 1/4WS 2.2Ω  | R363    | 117-2221-10 | 1/10W 2.2kΩ   |
| Q304    | 100-1431-00 | 2SA1431        | R210    | 111-2291-91 | 1/4WS 2.2Ω  | R365    | 117-2221-10 | 1/10W 2.2kΩ   |
| Q305    | 125-2003-01 | RN1201         | R214    | 117-1041-10 | 1/10W 100kΩ | R366    | 117-2221-10 | 1/10W 2.2kΩ   |
| Q306    | 125-0002-03 | RN2403         | R215    | 117-5611-10 | 1/10W 560Ω  | R369    | 117-4731-10 | 1/10W 47kΩ    |
| Q500    | 100-1048-50 | 2SA1048Y,GR    | R224    | 117-1031-10 | 1/10W 10kΩ  | R370    | 117-2221-10 | 1/10W 2.2kΩ   |
| Q501    | 102-2458-49 | 2SC2458Y,GR    | R225    | 117-5631-10 | 1/10W 56kΩ  | R373    | 117-4731-10 | 1/10W 47kΩ    |
| Q502    | 100-1048-50 | 2SA1048Y,GR    | R227    | 111-4711-91 | 1/4WS 470Ω  | R374    | 117-4731-10 | 1/10W 47kΩ    |
| Q503    | 102-2458-49 | 2SC2458Y,GR    | R229    | 117-1241-10 | 1/10W 120kΩ | R375    | 117-4731-10 | 1/10W 47kΩ    |
| Q504    | 103-1858-00 | 2SD1858        | R230    | 117-1041-10 | 1/10W 100kΩ | R376    | 117-4721-10 | 1/10W 4.7kΩ   |
| R103    | 117-2221-10 | 1/10W 2.2kΩ    | R241    | 117-5621-10 | 1/10W 5.6kΩ | R377    | 117-4721-10 | 1/10W 4.7kΩ   |
| R105    | 117-2221-10 | 1/10W 2.2kΩ    | R243    | 117-1021-10 | 1/10W 1kΩ   | R378    | 117-4721-10 | 1/10W 4.7kΩ   |
| R110    | 117-4721-10 | 1/10W 4.7kΩ    | R244    | 111-2291-91 | 1/4WS 2.2Ω  | R380    | 117-4721-10 | 1/10W 4.7kΩ   |
| R116    | 117-4721-10 | 1/10W 4.7kΩ    | R245    | 111-2291-91 | 1/4WS 2.2Ω  | R381    | 111-1021-91 | 1/4WS 1kΩ     |
| R117    | 117-2221-10 | 1/10W 2.2kΩ    | R246    | 117-4721-10 | 1/10W 4.7kΩ | R383    | 117-1031-10 | 1/10W 10kΩ    |
| R121    | 117-1021-10 | 1/10W 1kΩ      | R247    | 111-6801-91 | 1/4WS 68Ω   | R384    | 117-2231-10 | 1/10W 22kΩ    |
| R128    | 117-4721-10 | 1/10W 4.7kΩ    | R248    | 117-1031-10 | 1/10W 10kΩ  | R385    | 111-4721-91 | 1/4WS 4.7kΩ   |
| R129    | 117-2221-10 | 1/10W 2.2kΩ    | R249    | 111-1211-91 | 1/4WS 120Ω  | R386    | 111-2701-91 | 1/4WS 27Ω     |
| R130    | 117-2221-10 | 1/10W 2.2kΩ    | R250    | 111-2221-91 | 1/4WS 2.2kΩ | R387    | 111-2221-91 | 1/4WS 2.2kΩ   |
| R131    | 117-2221-10 | 1/10W 2.2kΩ    | R251    | 117-1031-10 | 1/10W 10kΩ  | R388    | 111-8201-91 | 1/4WS 82Ω     |
| R132    | 117-1031-10 | 1/10W 10kΩ     | R252    | 111-2221-91 | 1/4WS 2.2kΩ | R389    | 111-8221-91 | 1/4WS 8.2kΩ   |
| R134    | 117-1221-10 | 1/10W 1.2kΩ    | R253    | 117-1011-10 | 1/10W 100Ω  | R390    | 117-2221-10 | 1/10W 2.2kΩ   |
| R135    | 117-1221-10 | 1/10W 1.2kΩ    | R258    | 111-2221-91 | 1/4WS 2.2kΩ | R391    | 117-2221-10 | 1/10W 2.2kΩ   |
| R136    | 117-1031-10 | 1/10W 10kΩ     | R261    | 114-8291-11 | 1W 8.2Ω     | R393    | 111-2701-91 | 1/4WS 27Ω     |
| R137    | 117-1031-10 | 1/10W 10kΩ     | R262    | 117-1031-10 | 1/10W 10kΩ  | R406    | 111-2701-91 | 1/4WS 27Ω     |
| R138    | 117-1031-10 | 1/10W 10kΩ     | R263    | 111-2221-91 | 1/4WS 2.2kΩ | R407    | 111-8201-91 | 1/4WS 82Ω     |
| R140    | 117-2231-10 | 1/10W 22kΩ     | R266    | 117-4721-10 | 1/10W 4.7kΩ | R408    | 117-1031-10 | 1/10W 10kΩ    |
| R141    | 117-1021-10 | 1/10W 1kΩ      | R267    | 117-1031-10 | 1/10W 10kΩ  | R409    | 111-1521-91 | 1/4WS 1.5kΩ   |
| R143    | 117-1031-10 | 1/10W 10kΩ     | R269    | 111-4791-91 | 1/4WS 4.7Ω  | R410    | 111-1031-91 | 1/4WS 10kΩ    |
| R144    | 117-1021-10 | 1/10W 1kΩ      | R270    | 111-4791-91 | 1/4WS 4.7Ω  | R500    | 117-4731-10 | 1/10W 47kΩ    |
| R147    | 117-1021-10 | 1/10W 1kΩ      | R272    | 117-6821-10 | 1/10W 6.8kΩ | R501    | 117-4731-10 | 1/10W 47kΩ    |
| R148    | 117-2241-10 | 1/10W 220kΩ    | R273    | 114-3391-11 | 1W 3.3Ω     | R502    | 117-1531-10 | 1/10W 15kΩ    |
| R149    | 117-2241-10 | 1/10W 220kΩ    | R274    | 117-1041-10 | 1/10W 100kΩ | R503    | 117-1531-10 | 1/10W 15kΩ    |
| R150    | 117-3341-10 | 1/10W 330kΩ    | R275    | 117-1041-10 | 1/10W 100kΩ | R504    | 117-1531-10 | 1/10W 15kΩ    |
| R151    | 117-1031-10 | 1/10W 10kΩ     | R276    | 117-1041-10 | 1/10W 100kΩ | R505    | 117-1531-10 | 1/10W 15kΩ    |
| R156    | 117-3341-10 | 1/10W 330kΩ    | R277    | 117-4731-10 | 1/10W 47kΩ  | R506    | 117-3331-10 | 1/10W 33kΩ    |
| R157    | 111-2291-91 | 1/4WS 2.2Ω     | R278    | 117-1031-10 | 1/10W 10kΩ  | R507    | 111-1001-91 | 1/4WS 10Ω     |
| R158    | 117-4721-10 | 1/10W 4.7kΩ    | R287    | 117-4741-10 | 1/10W 470kΩ | R508    | 111-1021-91 | 1/4WS 1kΩ     |
| R161    | 117-2231-10 | 1/10W 22kΩ     | R288    | 117-4731-10 | 1/10W 47kΩ  | R900    | 117-1011-10 | 1/10W 100Ω    |
| R164    | 117-2231-10 | 1/10W 22kΩ     | R292    | 117-1041-10 | 1/10W 100kΩ | R902    | 117-4721-10 | 1/10W 4.7kΩ   |
| R166    | 117-1241-10 | 1/10W 120kΩ    | R296    | 117-1021-10 | 1/10W 1kΩ   | SUP1    | 060-0122-10 | DSP-201M-S00B |
| R167    | 117-1241-10 | 1/10W 120kΩ    | R297    | 117-1021-10 | 1/10W 1kΩ   | T301    | 009-0666-62 | 0.4mH         |
| R168    | 117-1241-10 | 1/10W 120kΩ    | R298    | 111-4711-91 | 1/4WS 470Ω  | TC101   | 004-1580-10 | 30pF GRN      |
| R169    | 117-1241-10 | 1/10W 120kΩ    | R300    | 117-1031-10 | 1/10W 10kΩ  | VR101   | 012-5203-57 | 22kΩ          |
| R170    | 117-2231-10 | 1/10W 22kΩ     | R301    | 117-1031-10 | 1/10W 10kΩ  | VR103   | 012-5203-57 | 22kΩ          |
| R171    | 117-4721-10 | 1/10W 4.7kΩ    | R302    | 117-1031-10 | 1/10W 10kΩ  | VR105   | 012-5203-63 | 470kΩ         |
| R172    | 117-4721-10 | 1/10W 4.7kΩ    | R303    | 117-1031-10 | 1/10W 10kΩ  | X101    | 061-1066-00 | 7.2MHz        |
| R173    | 117-4731-10 | 1/10W 47kΩ     | R304    | 117-6821-10 | 1/10W 6.8kΩ | X103    | 061-3504-90 | CX-5F 10MHz   |
| R176    | 117-4731-10 | 1/10W 47kΩ     | R305    | 117-1031-10 | 1/10W 10kΩ  | X104    | 061-3506-90 | 10MHz         |

### Switch PWB section(B2)

| REF No. | PART No.    | DESCRIPTION  | REF No. | PART No.    | DESCRIPTION        | REF No. | PART No.    | DESCRIPTION |
|---------|-------------|--------------|---------|-------------|--------------------|---------|-------------|-------------|
| C401    | 178-1032-78 | 0.01 $\mu$ F | PL405   | 017-0420-09 | 14V40mA            | S407    | 013-6302-01 | SKQMAL      |
| C402    | 178-1032-78 | 0.01 $\mu$ F | PL406   | 017-0420-09 | 14V40mA            | S408    | 013-6302-01 | SKQMAL      |
| C403    | 178-1042-78 | 0.1 $\mu$ F  | R401    | 117-1231-10 | 1/10W 12k $\Omega$ | S409    | 013-6302-01 | SKQMAL      |
| C404    | 176-3301-00 | 33pF CH      | R402    | 117-1021-10 | 1/10W 1k $\Omega$  | S410    | 013-6302-01 | SKQMAL      |
| C405    | 178-1042-78 | 0.1 $\mu$ F  | R403    | 117-1021-10 | 1/10W 1k $\Omega$  | S411    | 013-6302-01 | SKQMAL      |
| D401    | 001-2403-90 | M1F60        | R404    | 117-1021-10 | 1/10W 1k $\Omega$  | S412    | 013-6302-01 | SKQMAL      |
| D402    | 001-2403-90 | M1F60        | R405    | 117-1021-10 | 1/10W 1k $\Omega$  | S413    | 013-6302-01 | SKQMAL      |
| IC401   | 051-6028-10 | LC75757W     | S401    | 013-6302-01 | SKQMAL             | S414    | 013-6302-01 | SKQMAL      |
| J401    | 074-1151-18 | 18P          | S402    | 013-6302-01 | SKQMAL             | S415    | 013-6302-01 | SKQMAL      |
| PL401   | 017-0420-09 | 14V40mA      | S403    | 013-6302-01 | SKQMAL             | S416    | 013-6302-01 | SKQMAL      |
| PL402   | 017-0420-09 | 14V40mA      | S404    | 013-6302-01 | SKQMAL             | S417    | 013-6302-01 | SKQMAL      |
| PL403   | 017-0420-09 | 14V40mA      | S405    | 013-6302-01 | SKQMAL             | S418    | 013-6302-01 | SKQMAL      |
| PL404   | 017-0420-09 | 14V40mA      | S406    | 013-6302-01 | SKQMAL             | VR401   | 016-0010-05 |             |

### Mechanism PWB section(B3) : CD mechanism

| REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION         |
|---------|-------------|-----------------|---------|-------------|-----------------|---------|-------------|---------------------|
| C1      | 183-1073-12 | 6.3V100 $\mu$ F | C34     | 176-1501-00 | 15pF CH         | Q1      | 101-1237-50 | 2SB1237QR           |
| C2      | 183-4763-11 | 6.3V47 $\mu$ F  | C35     | 176-1501-00 | 15pF CH         | Q2      | 102-2712-00 | 2SC2712             |
| C3      | 178-1042-78 | 0.1 $\mu$ F     | C39     | 178-1042-78 | 0.1 $\mu$ F     | R1      | 117-1011-10 | 1/10W 100 $\Omega$  |
| C4      | 176-2201-00 | 22pF CH         | C40     | 178-1042-78 | 0.1 $\mu$ F     | R2      | 117-1841-10 | 1/10W 180k $\Omega$ |
| C5      | 176-1801-00 | 18pF CH         | C41     | 183-1073-12 | 6.3V100 $\mu$ F | R3      | 117-1841-10 | 1/10W 180k $\Omega$ |
| C6      | 176-1801-00 | 18pF CH         | C43     | 183-1073-12 | 6.3V100 $\mu$ F | R4      | 117-2201-10 | 1/10W 22 $\Omega$   |
| C7      | 176-8201-00 | 82pF CH         | C44     | 183-4763-11 | 6.3V47 $\mu$ F  | R5      | 117-8231-10 | 1/10W 82k $\Omega$  |
| C8      | 178-1042-78 | 0.1 $\mu$ F     | C45     | 183-1073-12 | 6.3V100 $\mu$ F | R6      | 117-1041-10 | 1/10W 100k $\Omega$ |
| C9      | 178-2242-78 | 0.22 $\mu$ F    | C46     | 178-1032-78 | 0.01 $\mu$ F    | R7      | 117-1041-10 | 1/10W 100k $\Omega$ |
| C10     | 178-2242-78 | 0.22 $\mu$ F    | C47     | 178-1042-78 | 0.1 $\mu$ F     | R8      | 117-1031-10 | 1/10W 10k $\Omega$  |
| C11     | 176-4701-00 | 47pF CH         | C48     | 178-1032-78 | 0.01 $\mu$ F    | R9      | 117-2221-10 | 1/10W 2.2k $\Omega$ |
| C12     | 178-1532-78 | 0.015 $\mu$ F   | C49     | 176-6801-00 | 68pF CH         | R10     | 117-1031-10 | 1/10W 10k $\Omega$  |
| C13     | 178-1032-78 | 0.01 $\mu$ F    | C51     | 178-1032-78 | 0.01 $\mu$ F    | R12     | 117-1031-10 | 1/10W 10k $\Omega$  |
| C14     | 178-2722-78 | 2700pF          | C52     | 178-1032-78 | 0.01 $\mu$ F    | R13     | 117-4731-10 | 1/10W 47k $\Omega$  |
| C15     | 178-4722-78 | 4700pF          | C54     | 183-4763-11 | 6.3V47 $\mu$ F  | R15     | 117-4741-10 | 1/10W 470k $\Omega$ |
| C16     | 176-1201-00 | 12pF CH         | C55     | 178-1042-78 | 0.1 $\mu$ F     | R17     | 117-3331-10 | 1/10W 33k $\Omega$  |
| C17     | 178-4712-78 | 470pF           | C56     | 178-1042-78 | 0.1 $\mu$ F     | R18     | 117-3311-10 | 1/10W 330 $\Omega$  |
| C18     | 178-4712-78 | 470pF           | C58     | 178-1042-78 | 0.1 $\mu$ F     | R19     | 117-3321-10 | 1/10W 3.3k $\Omega$ |
| C19     | 178-4732-78 | 0.047 $\mu$ F   | C59     | 178-2222-78 | 2200pF          | R20     | 117-1031-10 | 1/10W 10k $\Omega$  |
| C20     | 178-4732-78 | 0.047 $\mu$ F   | D1      | 001-0563-00 | GL380           | R21     | 117-3321-10 | 1/10W 3.3k $\Omega$ |
| C21     | 178-4732-78 | 0.047 $\mu$ F   | D2      | 001-0563-00 | GL380           | R22     | 117-3321-10 | 1/10W 3.3k $\Omega$ |
| C22     | 178-4732-78 | 0.047 $\mu$ F   | D3      | 001-0563-00 | GL380           | R23     | 117-3321-10 | 1/10W 3.3k $\Omega$ |
| C23     | 178-1032-78 | 0.01 $\mu$ F    | D4      | 001-0330-00 | 1SS119          | R24     | 117-3321-10 | 1/10W 3.3k $\Omega$ |
| C25     | 183-1073-21 | 10V100 $\mu$ F  | IC1     | 051-5704-00 | TA2096FN        | R26     | 117-1041-10 | 1/10W 100k $\Omega$ |
| C26     | 178-1042-78 | 0.1 $\mu$ F     | IC2     | 051-6330-00 | TC9432AF        | R27     | 117-4711-10 | 1/10W 470 $\Omega$  |
| C27     | 178-1042-78 | 0.1 $\mu$ F     | IC3     | 051-6026-08 | TA2058F         | R28     | 117-2211-10 | 1/10W 220 $\Omega$  |
| C29     | 178-1042-78 | 0.1 $\mu$ F     | IC4     | 051-6027-00 | BA6283N         | R29     | 117-2211-10 | 1/10W 220 $\Omega$  |
| C30     | 178-1042-78 | 0.1 $\mu$ F     | J1      | 074-1138-17 | 17P             | R30     | 117-4721-10 | 1/10W 4.7k $\Omega$ |
| C31     | 178-1032-78 | 0.01 $\mu$ F    | J2      | 074-1143-06 | 6P              | R34     | 111-2711-91 | 1/4WS 270 $\Omega$  |
| C32     | 178-1032-78 | 0.01 $\mu$ F    | L1      | 010-2155-03 | 10 $\mu$ H      | R40     | 117-3321-10 | 1/10W 3.3k $\Omega$ |
| C33     | 178-1042-78 | 0.1 $\mu$ F     | L3      | 010-2199-24 | 10 $\mu$ H J    | X1      | 061-3051-00 | HC49/US 16.92MHz    |

### Sensor PWB section(B4) : CD mechanism

| REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION | REF No. | PART No.    | DESCRIPTION |
|---------|-------------|-------------|---------|-------------|-------------|---------|-------------|-------------|
| Q101    | 060-0252-01 | PT4850F     | Q102    | 060-0252-01 | PT4850F     | Q103    | 060-0252-01 | PT4850F     |

### Chuckling switch PWB section(B5) : CD mechanism

| REF No. | PART No.    | DESCRIPTION     | REF No. | PART No.    | DESCRIPTION   |
|---------|-------------|-----------------|---------|-------------|---------------|
| S2      | 013-3879-01 | CHUCKING SWITCH | M3      | SMA-147-100 | LOADING MOTOR |

### Limit switch PWB section(B6) : CD mechanism

| REF No. | PART No.    | DESCRIPTION  | REF No. | PART No.    | DESCRIPTION   | REF No. | PART No.    | DESCRIPTION |
|---------|-------------|--------------|---------|-------------|---------------|---------|-------------|-------------|
| S1      | 013-7100-00 | LIMIT SWITCH | M1      | SMA-151-100 | SPINDLE MOTOR | M2      | SMA-146-100 | SLED MOTOR  |