9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

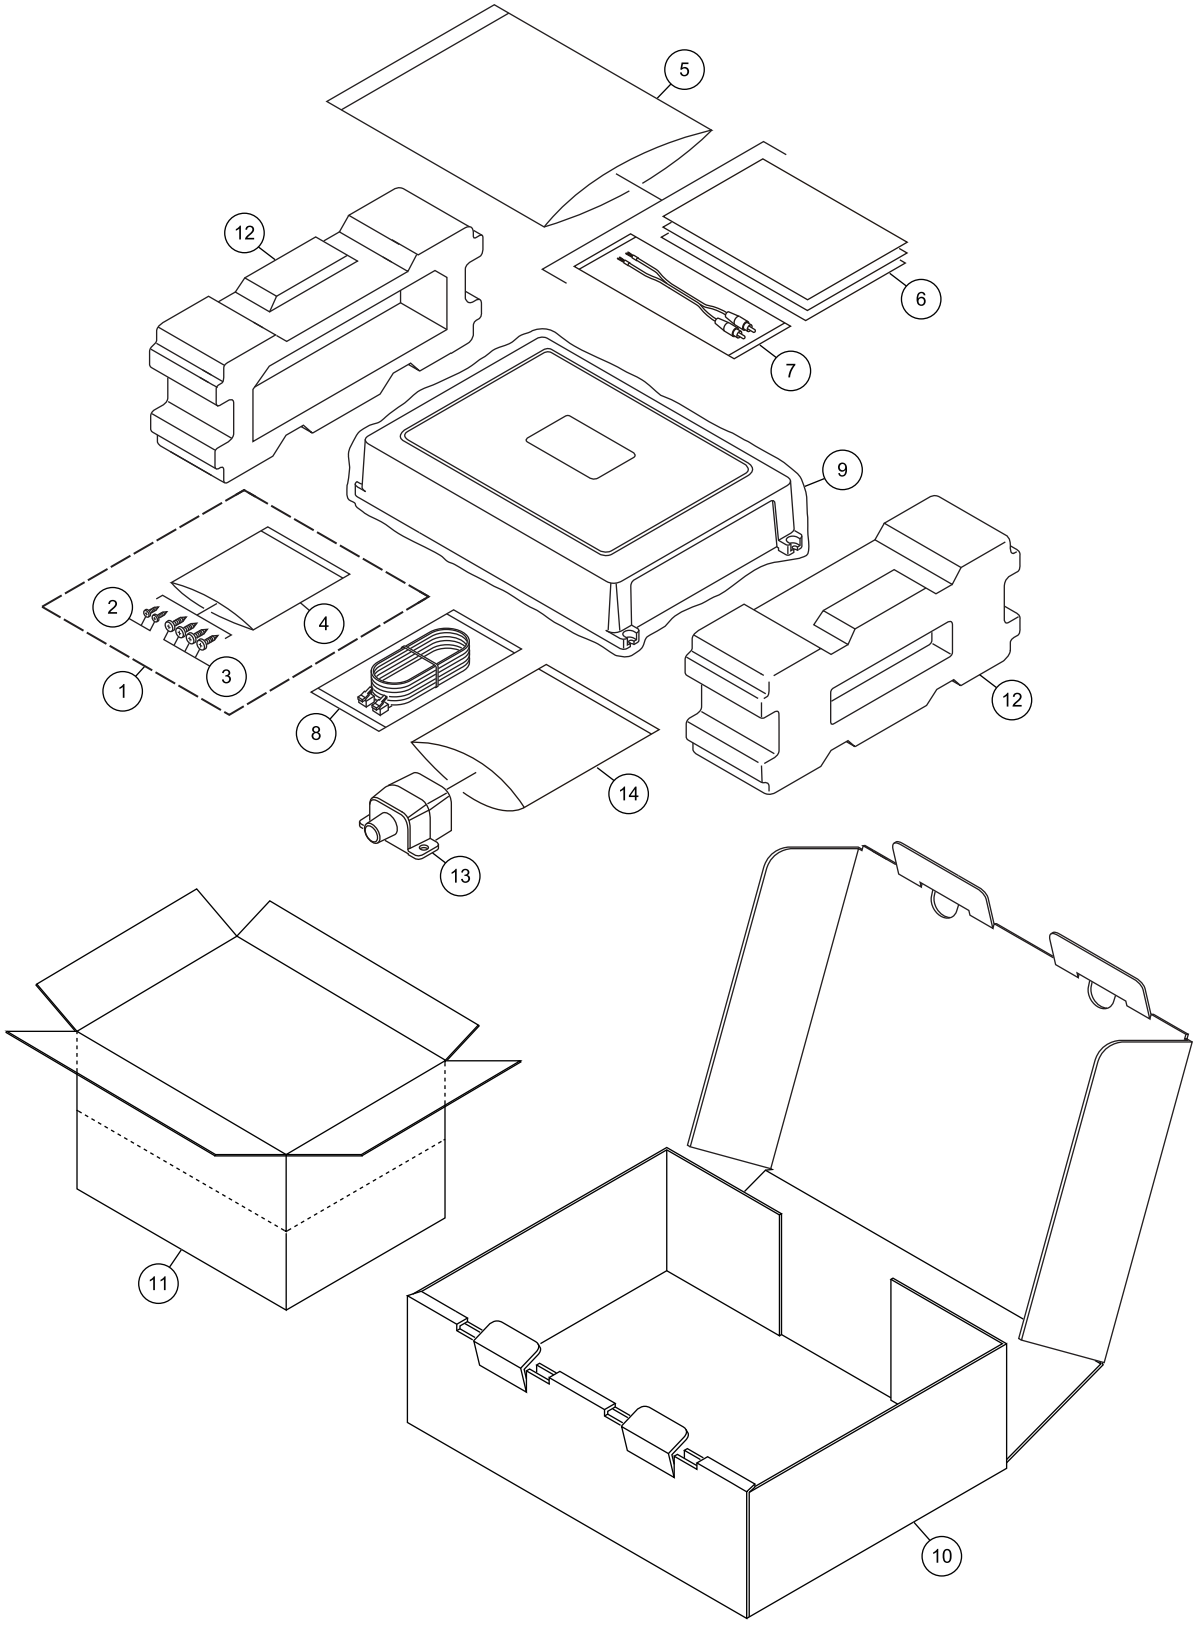

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw Assy	CEA5328
	2	Screw	BYC30P100FTB
	3	Screw	BYC40P180FTB
*	4	Polyethylene Sheet	CNM4338
	5	Polyethylene Bag	CEG1116
	6-1	Caution Card	See Contrast table(2)
*	6-2	Warranty Card	See Contrast table(2)
	6-3	Owner's Manual	See Contrast table(2)
	7	Cord Assy	YDE5010
	8	Cord Assy	YDP5015
	9	Polyethylene Bag	See Contrast table(2)
	10	Unit Box	See Contrast table(2)
	11	Contain Box	See Contrast table(2)
	12	Protector	YHP5062
	13	Remote Control Assy	YXC5142
*	14	Polyethylene Bag	CEG1171

(2) CONTRAST TABLE

GM-D8500M/XSUC, GM-D8500M/XSEW5 and GM-D8500M/XSES are constructed the same except for the following:

Mark	No.	Description	GM-D8500M/XSUC	GM-D8500M/XSEW5	GM-D8500M/XSES
	6-1	Caution Card	CRP1386	Not used	Not used
	6-2	Warranty Card	CRY1276	CRY1279	Not used
	6-3	Qwner's Manual	YRD5308	YRD5307	YRD5309
	9	Polyethylene Bag	YEG5004	YEG5003	YEG5003
	10	Unit Box	YHG5554	YHG5553	YHG5555
	11	Contain Box	YHL5554	YHL5553	YHL5567

Owner's Manual,Installation Manual

Part No.	Language
YRD5307	English, Spanish(Espanol), German, French, Italian, Dutch, Russian
YRD5308	English, Spanish(Espanol), French
YRD5309	English, Spanish(Espanol), Portuguese(B), Arabic

9.2 EXTERIOR

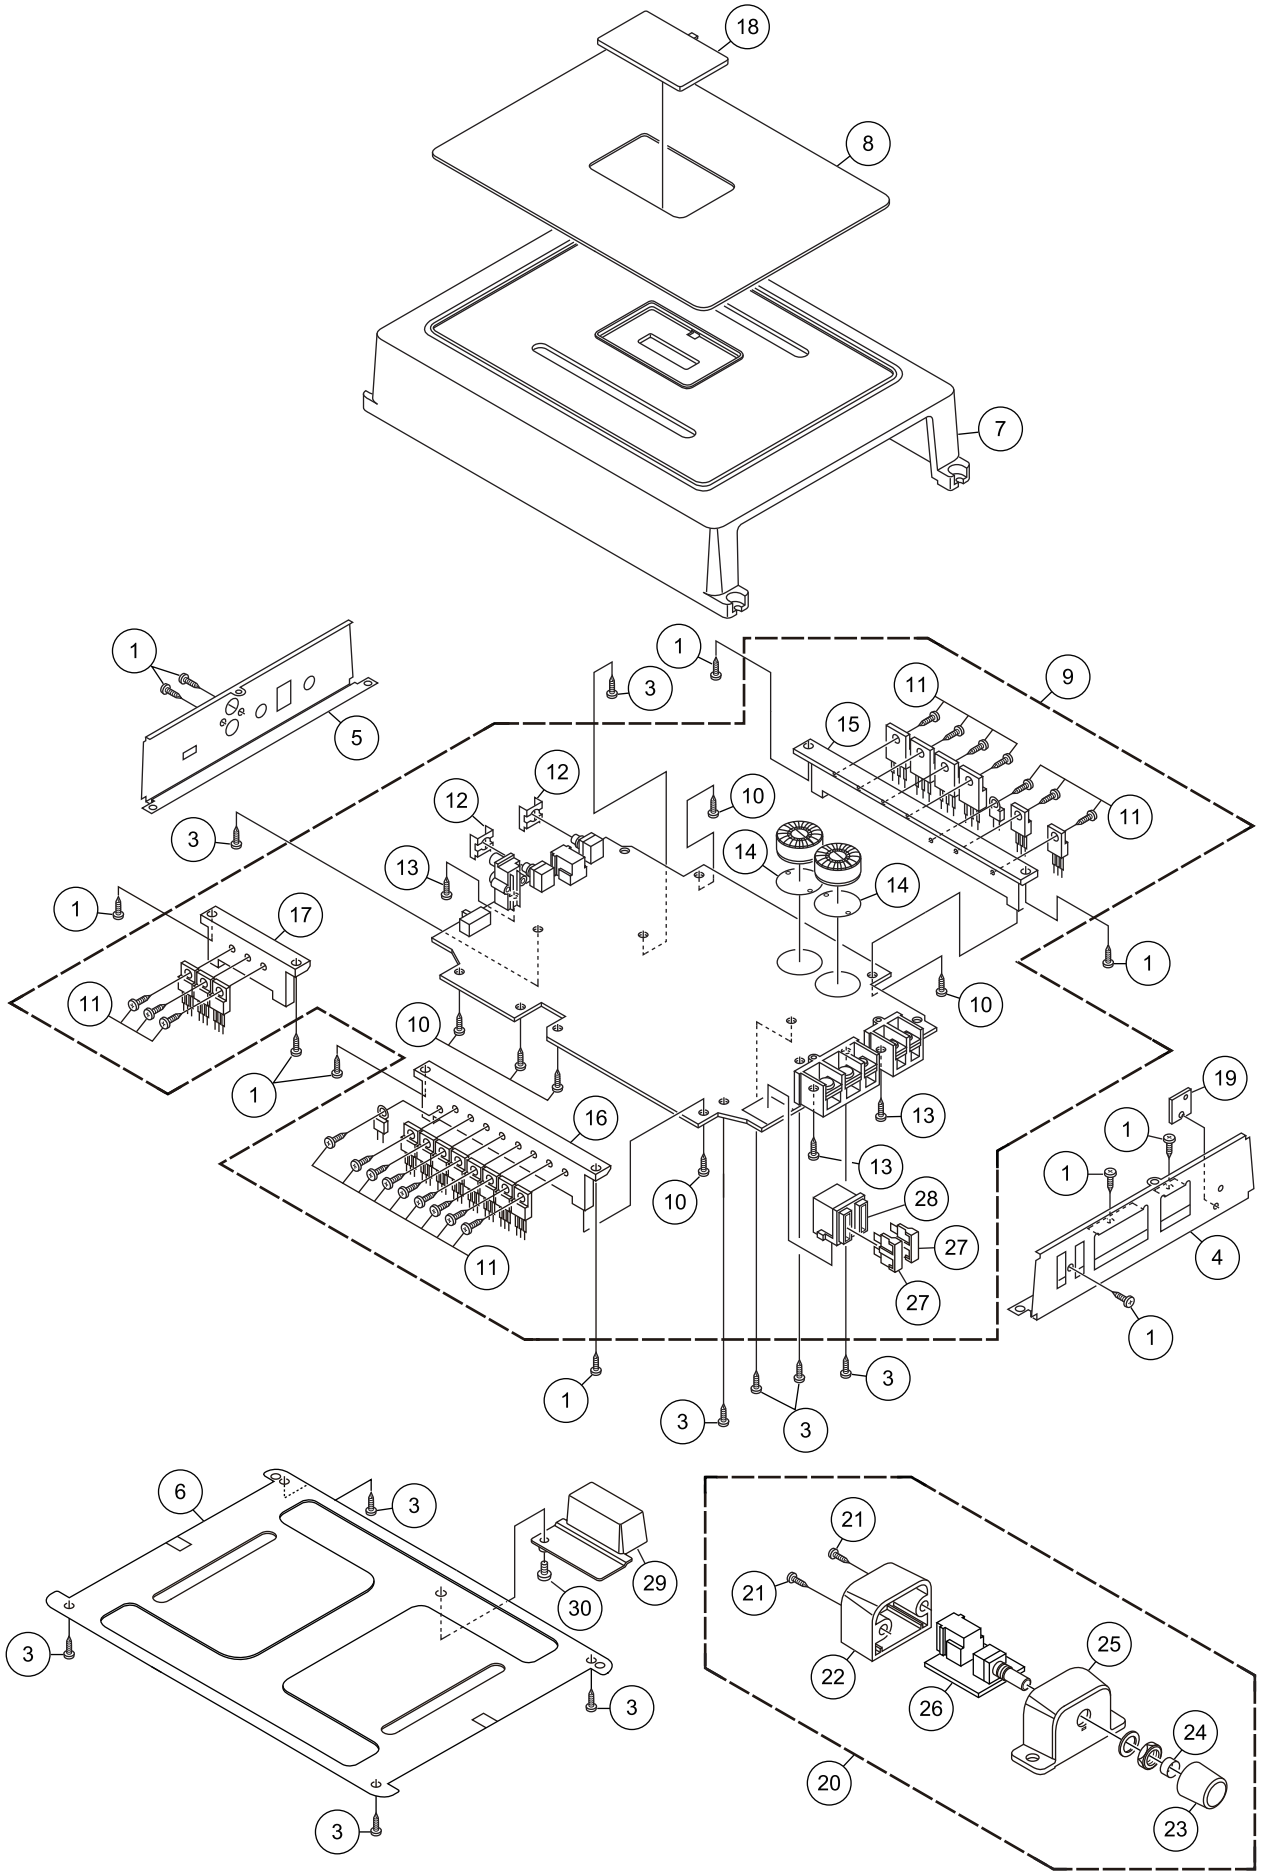
A
B
C
D
E
F
18
8
7
1
5
3
9
11
15
12
10
14
13
17
16
19
4
28
27
6
29
30
21
22
26
25
24
20
23

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BBZ30P100FTB
	2	.....	
	3	Screw(M3 x 8)	CBA2011
	4	Panel	YNB5065
	5	Panel	YNB5066
	6	Case	See Contrast table(2)
	7	Heat Sink	YNR5140
	8	Cover	YNR5141
	9	Amp Unit	YWH5044
	10	Screw	BBZ30P080FSN
	11	Screw(M3 x 8)	CBA2011
	12	Holder	CND2466
	13	Screw	PPZ30P100FSN
	14	Insulator	YNM5045
	15	Sub Heat Sink	YNR5101
	16	Sub Heat Sink	YNR5121
	17	Sub Heat Sink	YNR5122
	18	Badge Unit	YXA5696
	19	Lighting Conductor Unit	YXA5721
	20	Remote Control Assy	YXC5142
	21	Screw	BPZ20P100FTB
	22	Cover	CNS8141
	23	Knob	YAA5040
	24	Spring	YBL5010
	25	Grille	YNS5389
*	26	Tuner Amp Assy	YWM5457
⚠	27	Fuse(30 A)(FU601,602)	CEK1330
	28	Fuse Holder	YKR5002
	29	Holder	See Contrast table(2)
	30	Screw	See Contrast table(2)

(2) CONTRAST TABLE

GM-D8500M/XSUC, GM-D8500M/XSEW5 and GM-D8500M/XSES are constructed the same except for the following:

Mark	No.	Description	GM-D8500M/XSUC	GM-D8500M/XSEW5	GM-D8500M/XSES
	6	Case	YNB5067	YNB5064	YNB5064
	29	Holder	YNV5187	Not used	Not used
	30	Screw	BMZ40P140FTC	Not used	Not used

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Unit Number : YWH5044

Unit Name : Amp Unit

Amp Unit
Consists of
Amp PCB
Remote PCB

A B

Unit Number : YWH5044

Unit Name : Amp Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 101	(B,52,64) IC	NJM2068MD
IC 102	(B,38,64) IC	NJM2068MD
IC 103	(B,28,88) IC	NJM4558MD
IC 105	(B,45,111) IC	NJM4558MD
IC 301	(B,42,96) IC	NJM311M
IC 302	(B,56,94) IC	NJM311M
IC 303	(B,65,82) IC	TC74AC14F
IC 305	(B,85,106) IC	TND505MD
IC 501	(B,32,156) IC	NJM4558MD
IC 502	(B,31,135) IC	NJM2172V
IC 601	(A,108,77) IC	PA2027A
IC 602	(B,120,47) IC	UPC494GS
IC 603	(A,60,44) IC	TA78L005AP
Q 301	(B,66,97) Transistor	IMT4
Q 302	(B,58,157) Transistor	2SC5565
Q 303	(B,58,168) Transistor	2SA2012
Q 304	(B,50,158) Transistor	2SC5565
Q 305	(B,50,169) Transistor	2SA2012
Q 306	(A,131,192) FET	FKP250A
Q 307	(A,111,192) FET	FKP250A
Q 308	(A,91,192) FET	FKP250A
Q 309	(A,71,192) FET	FKP250A
Q 601	(B,121,76) Transistor	2SC4081
Q 602	(B,118,74) Chip Transistor	2SA1576A
Q 603	(B,114,66) Chip Transistor	DTA114EUA
Q 604	(B,111,62) Chip Transistor	DTC114TUA
Q 605	(A,94,66) Transistor	2SB1243
Q 606	(B,127,54) Transistor	2SC4081
Q 607	(B,130,54) Chip Transistor	DTC114TUA
Q 608	(B,132,40) Transistor	2SD1766
Q 609	(B,122,29) Transistor	2SB1188
Q 610	(B,131,29) Transistor	2SB1188
Q 611	(B,122,37) Transistor	2SD1766
Q 612	(A,229,10) Transistor	FKV550N
Q 613	(A,177,10) Transistor	FKV550N
Q 614	(A,216,10) Transistor	FKV550N
Q 615	(A,164,10) Transistor	FKV550N
Q 616	(A,203,10) Transistor	FKV550N
Q 617	(A,152,10) Transistor	FKV550N
Q 618	(A,190,10) Transistor	FKV550N
Q 619	(A,139,10) Transistor	FKV550N
Q 620	(A,52,10) Transistor	2SD2395
Q 621	(A,65,10) Transistor	2SB1566
Q 622	(A,78,10) Transistor	2SC5511
Q 691	(B,101,57) Chip Transistor	DTC114EUA
Q 901	(B,42,172) Transistor	2SA1579
Q 902	(B,41,163) Transistor	2SC4102
Q 903	(B,42,158) Transistor	2SC4102
Q 904	(B,39,157) Transistor	2SA1579
Q 905	(B,41,153) Transistor	2SA1579
Q 911	(B,12,166) Transistor	2SC4102
Q 912	(B,18,163) Chip Transistor	2SA1576A
Q 921	(B,262,165) Transistor	2SC4081
Q 922	(B,257,162) Transistor	2SC4081
Q 923	(B,257,166) Chip Transistor	2SA1576A
Q 931	(B,78,90) Transistor	2SA1579
Q 932	(B,79,97) Transistor	2SC4081
Q 933	(B,75,88) Chip Transistor	DTC114YUA
Q 942	(B,94,56) Chip Digital Transistor	DTA124EUA
D 101	(B,15,72) Diode	1SR154-400
D 102	(B,24,71) Diode	1SR154-400
D 301	(B,36,106) Diode	1SS355
D 302	(B,50,122) Diode	1SS355
D 303	(B,63,74) Diode	1SS355
D 304	(B,67,74) Diode	1SS355

Circuit Symbol and No.		Part No.
D 305	(B,73,82) Diode	1SS355
D 309	(B,97,99) Diode	RF101L2S
D 601	(A,219,44) Diode	RM4Z-LFJ4
D 602	(B,121,82) Diode	UDZS7R5(B)
D 603	(B,114,78) Diode	1SR154-400
D 604	(B,111,73) Diode	1SR154-400
D 605	(B,85,81) Diode	1SS355
D 606	(B,270,165) LED	VUB1112H-4B63B
D 607	(B,133,53) Diode	1SS355
D 608	(B,127,66) Diode	DAN202U
D 609	(B,120,66) Diode	DAN202U
D 610	(A,178,190) Diode	FML22S
D 611	(A,209,190) Diode	FML22R
D 612	(B,46,31) Diode	UDZS16(B)
D 613	(B,60,31) Diode	UDZS16(B)
D 614	(B,57,41) Diode	1SS355
D 615	(B,85,31) Diode	UDZS13(B)
D 901	(B,34,168) Diode	1SS355
D 911	(B,25,164) Diode	1SS355
D 921	(B,265,161) Diode	1SS355
D 922	(B,252,165) Diode	1SS355
D 941	(B,84,56) Diode	1SS355
ZNR101	(B,10,74) Surge Protector	CSA30-201N
ZNR102	(B,18,75) Surge Protector	CSA30-201N
L 301	(A,83,154) Choke Coil 93.75 uH	YTH5009
L 501	(B,36,135) Inductor	CTF1306
L 502	(B,21,127) Inductor	CTF1306
L 503	(B,17,123) Inductor	CTF1306
L 601	(A,233,62) Choke Coil 50 uH	YTH5010
L 602	(A,183,164) Choke Coil 220 uH	YTH5007
L 603	(A,215,164) Choke Coil 220 uH	YTH5007
T 601	(A,180,62) Transformer	YTT5008
TH601	(A,129,12) Thermistor	CCX1013
TH602	(A,157,189) Thermistor	CCX1013
TH603	(A,152,49) Thermistor	CCX1064
TH604	(A,63,144) Thermistor	CCX1064
S 101	(A,15,57) Slide Switch(RCA-SP)	CSH1042
VR101	(A,21,113) Variable Resistor 20 kohm	YCS5002
VR102	(A,21,153) Variable Resistor 10 kohm(A)	CCS1265
VR301	(A,32,111) Semi-fixed 10 kohm(OB)	CCP1506
VR401	(A,8,20) Variable Resistor 10 kohm(B)	YCS5004
⚠FU601	Fuse 30 A	CEK1330
⚠FU602	Fuse 30 A	CEK1330
CN103	(A,35,80) Terminal	VNF1084
CN301	(A,244,26) Terminal	VNF1084
CN302	(A,267,118) Terminal	VNF1084
CN401	(A,27,19) Connector	CKS4962
CN501	(A,19,130) Connector	CKS4962
CN602	(A,255,87) Terminal	VNF1084
CN605	(A,214,129) Terminal	VNF1084
CN606	(A,92,129) Terminal	VNF1084

RESISTORS

R 101	(A,22,44)	RD1/4PU683J
R 102	(A,27,54)	RD1/4PU683J
R 103	(B,47,55)	RS1/10SR471J
R 104	(B,34,55)	RS1/10SR471J
R 105	(B,53,55)	RS1/10SR223J
R 106	(B,40,55)	RS1/10SR223J
R 107	(B,48,64) 10 kohm	CCN1152
R 108	(B,34,64) 10 kohm	CCN1152
R 109	(B,49,71) 10 kohm	CCN1152
R 110	(B,36,71) 10 kohm	CCN1152
R 111	(B,46,68) 10 kohm	CCN1152
R 112	(B,33,68) 10 kohm	CCN1152
R 113	(B,52,72) 10 kohm	CCN1152
R 114	(B,39,70) 10 kohm	CCN1152
R 115	(B,53,75)	RS1/10SR222J
R 116	(B,42,71)	RS1/10SR222J
R 118	(B,20,105)	RS1/10SR272J
R 119	(B,29,105)	RS1/10SR272J
R 120	(B,19,157)	RS1/10SR182J
R 122	(B,23,157)	RS1/10SR470J
R 127	(B,42,118)	RS1/10SR682J
R 128	(B,41,115)	RS1/10SR682J
R 181	(B,32,46)	RS1/10SR333J
R 182	(B,32,51)	RS1/10SR333J
R 301	(B,38,107)	RS1/10SR223J
R 302	(B,49,118)	RS1/10SR223J
R 303	(B,38,104)	RS1/10SR203J
R 304	(B,52,119)	RS1/10SR153J
R 305	(B,46,104)	RS1/10SR272J
R 306	(B,43,104)	RS1/10SR105J
R 307	(B,55,101)	RS1/10SR102J
R 308	(B,53,101)	RS1/10SR222J
R 309	(B,43,89)	RS1/10SR223J
R 310	(B,45,89)	RS1/10SR562J
R 311	(B,41,89)	RS1/10SR273J
R 312	(A,51,93)	RD1/4PU332J
R 313	(B,57,101)	RS1/10SR223J
R 314	(B,58,101)	RS1/10SR104J
R 315	(B,70,89)	RS1/10SR102J
R 316	(B,69,75)	RS1/10SR562J
R 317	(B,64,76)	RS1/10SR102J
R 318	(B,71,82)	RS1/10SR102J
R 319	(B,62,89)	RS1/10SR332J
R 320	(B,65,89)	RS1/10SR332J
R 321	(B,64,102)	RS1/10SR822J
R 322	(B,68,102)	RS1/10SR822J
R 323	(A,88,99)	RD1/4PU1R0J
R 324	(A,63,169)	RD1/4PU1R0J
R 325	(A,54,170)	RD1/4PU1R0J
R 326	(B,60,174)	RS1/10SR104J
R 327	(B,52,174)	RS1/10SR104J
R 328	(A,146,179)	RS1/2PMF220J
R 329	(A,121,179)	RS1/2PMF220J
R 330	(A,95,179)	RS1/2PMF220J
R 331	(A,81,179)	RS1/2PMF220J
R 332	(A,130,174)	RS2PMF100J
R 333	(A,84,174)	RS2PMF100J
R 334	(A,125,170) 10 mohm	YCN5005
R 335	(A,119,160) 10 mohm	YCN5005
R 336	(A,71,129)	RS2PMF4R7J
R 339	(A,63,161)	RS1PMF333J
R 340	(A,53,145)	RS1/2PMF223J
R 341	(A,50,140)	RD1/4PU102J
R 342	(A,53,133)	RD1/4PU222J
R 401	(B,18,12)	RS1/10SR622J

Circuit Symbol and No.		Part No.
R 402	(B,18,22)	RS1/10SR821J
R 501	(B,26,149)	RS1/10SR393J
R 502	(B,31,149)	RS1/10SR683J
R 503	(B,26,146)	RS1/10SR333J
R 504	(B,33,149)	RS1/10SR473J
R 505	(B,36,149)	RS1/10SR223J
R 506	(B,36,144)	RS1/10SR102J
R 507	(B,27,135)	RS1/10SR103J
R 508	(B,41,131)	RS1/10SR103J
R 509	(B,44,121)	RS1/10SR682J
R 512	(B,45,121)	RS1/10SR182J
R 513	(B,20,125)	RS1/10SR184J
R 601	(A,253,82)	RD1/4PU222J
R 602	(B,123,79)	RS1/10SR473J
R 603	(B,117,81)	RS1/10SR103J
R 604	(B,119,79)	RS1/10SR103J
R 605	(B,121,72)	RS1/10SR222J
R 606	(B,117,71)	RS1/10SR472J
R 607	(B,98,83)	RS1/10SR472J
R 608	(B,102,83)	RS1/10SR472J
R 609	(B,106,83)	RS1/10SR103J
R 610	(B,95,83)	RS1/10SR472J
R 611	(A,91,61)	RD1/4PU221J
R 612	(A,97,61)	RD1/4PU152J
R 613	(B,112,66)	RS1/10SR223J
R 614	(B,106,66)	RS1/10SR223J
R 615	(B,105,66)	RS1/10SR223J
R 616	(A,87,74)	RD1/4PU472J
R 617	(A,84,69)	RD1/4PU101J
R 618	(A,129,71)	RD1/4PU392J
R 619	(A,125,76)	RD1/4PU471J
R 620	(A,128,84)	RD1/4PU471J
R 621	(B,124,54)	RS1/10SR105J
R 622	(B,122,54)	RS1/10SR153J
R 623	(B,117,54)	RS1/10SR242J
R 624	(B,115,54)	RS1/10SR182J
R 625	(B,114,54)	RS1/10SR273J
R 626	(B,125,62)	RS1/10SR272J
R 627	(B,127,62)	RS1/10SR272J
R 628	(B,118,62)	RS1/10SR272J
R 629	(B,120,62)	RS1/10SR272J
R 630	(B,119,40)	RS1/10SR472J
R 631	(B,117,40)	RS1/10SR472J
R 632	(B,117,36)	RS1/10SR472J
R 633	(B,113,42)	RS1/10SR683J
R 634	(B,115,39)	RS1/10SR392J
R 635	(A,114,33)	RD1/4PU332J
R 636	(A,129,40)	RD1/4PU332J
R 637	(A,120,24)	RD1/4PU472J
R 638	(A,140,45)	RD1/4PU472J
R 639	(A,177,33)	RS1/2PMF121J
R 640	(A,229,33)	RS1/2PMF121J
R 641	(A,164,33)	RS1/2PMF121J
R 642	(A,216,33)	RS1/2PMF121J
R 643	(A,152,33)	RS1/2PMF121J
R 644	(A,203,33)	RS1/2PMF121J
R 645	(A,139,33)	RS1/2PMF121J
R 646	(A,190,33)	RS1/2PMF121J
R 647	(A,153,37)	RS1/2PMF220J
R 648	(A,195,36)	RS1/2PMF220J

Circuit Symbol and No.		Part No.
R 649	(A,150,70)	RS1/2PMF220J
R 650	(A,165,88)	RS1/2PMF220J
R 651	(A,140,60)	RS1/2PMF220J
R 652	(A,49,39)	RS1/2PMF100J
R 653	(A,71,39)	RS1/2PMF100J
R 654	(A,49,25)	RD1/4PU222J
R 655	(A,69,25)	RD1/4PU222J
R 656	(A,89,39)	RS1PMF220J
R 657	(A,89,25)	RS1PMF333J
R 671	(B,100,41)	RS1/10SR223J
R 691	(B,102,50)	RS1/10SR393J
R 901	(B,37,172)	RS1/10SR222J
R 902	(B,43,167)	RS1/10SR104J
R 903	(B,38,163)	RS1/10SR473J
R 904	(B,34,172)	RS1/10SR104J
R 905	(B,30,168)	RS1/10SR473J
R 906	(B,38,153)	RS1/10SR472J
R 907	(B,44,155)	RS1/10SR472J
R 908	(B,44,162)	RS1/10SR473J
R 909	(B,44,151)	RS1/10SR104J
R 911	(B,15,163)	RS1/10SR102J
R 912	(B,15,167)	RS1/10SR104J
R 913	(B,18,168)	RS1/10SR103J
R 914	(B,21,163)	RS1/10SR223J
R 915	(B,21,166)	RS1/10SR103J
R 921	(A,242,161)	RD1/4PU154J
R 922	(B,254,162)	RS1/10SR472J
R 923	(B,252,161)	RS1/10SR104J
R 924	(B,260,161)	RS1/10SR472J
R 925	(B,262,161)	RS1/10SR472J
R 931	(B,74,93)	RS1/10SR332J
R 932	(B,82,97)	RS1/10SR103J
R 933	(B,82,93)	RS1/10SR472J
R 934	(B,76,93)	RS1/10SR822J
R 941	(B,97,56)	RS1/10SR392J
R 942	(B,91,56)	RS1/10SR102J
R 943	(B,87,57)	RS1/10SR333J
R 944	(B,98,52)	RS1/10SR471J

CAPACITORS

C 101	(A,22,49)	CEAT100M50
C 102	(A,22,58)	CEAT100M50
C 103	(B,49,55)	CCSRCH471J50
C 104	(B,36,55)	CCSRCH471J50
C 105	(A,51,52)	CEAT100M50
C 106	(A,38,52)	CEAT100M50
C 107	(B,12,74)	CKSQYB102K50
C 108	(B,21,77)	CKSQYB102K50
C 109	(B,47,71)	CKSQYB223K50
C 110	(B,34,72)	CKSQYB223K50
C 111	(B,48,68)	CCSRCH271J50
C 112	(B,34,68)	CCSRCH271J50
C 113	(B,52,70)	CCSRCH271J50
C 114	(B,39,72)	CCSRCH271J50
C 115	(B,56,64)	CKSRYB103K50
C 116	(B,34,61)	CKSRYB103K50
C 117	(B,48,61)	CKSRYB103K50
C 118	(B,43,64)	CKSRYB103K50
C 121	(B,33,88)	CKSRYB103K50
C 122	(A,29,102)	CFTLA274J50

Circuit Symbol and No.		Part No.
C 123	(A,24,102)	CFTLA154J50
C 124	(B,24,86)	CKSRYB103K50
C 128	(B,39,115)	CKSRYB472K50
C 129	(B,41,108)	CKSRYB103K50
C 130	(B,48,118)	CKSRYB103K50
C 181	(B,10,85)	CKSRYB102K50
C 182	(B,19,85)	CKSRYB102K50
C 301	(A,51,108)	CEAT220M50
C 302	(B,41,104)	CKSRYB222K50
C 303	(B,39,89)	CCSRCH471J50
C 304	(B,38,93)	CKSQYB105K25
C 307	(B,46,96)	CKSQYB105K25
C 309	(B,51,101)	CKSRYB103K50
C 310	(B,60,101)	CCSRCH471J50
C 311	(B,60,94)	CKSQYB474K25
C 312	(B,64,72)	CKSRYB221K50
C 313	(B,52,87)	CKSQYB474K25
C 314	(B,69,89)	CKSRYB104K50
C 315	(B,67,89)	CKSRYB221K50
C 318	(A,93,109)	CEAT100M50
C 319	(A,77,104)	CEAT101M25
C 320	(B,87,113)	CKSYB475K25
C 321	(B,82,111)	CKSRYB104K50
C 322	(B,95,106)	CKSRYB104K50
C 323	(B,50,163)	CKSRYB474K16
C 324	(A,71,104)	CFTNA103J2A
C 325	(A,62,108)	CEAT100M2A
C 326	(B,58,174)	CKSQYB472K50
C 327	(B,50,174)	CKSQYB472K50
C 328	(A,117,178)	CQMA102K2E
C 329	(A,93,174)	CQMA102K2E
C 330	(A,103,171) 1 uF	CCE1035
C 331	(A,111,171) 1 uF	CCE1035
C 334	(A,104,141) 4.7 uF	CCE1036
C 335	(A,75,120) 4.7 uF	CCE1036
C 338	(B,263,138) 2 200 pF	CCG1248
C 339	(B,272,117)	CKSQYB103K50
C 340	(B,270,117)	CKSQYB102K50
C 341	(B,51,144)	CCSRCH471J50
C 349	(B,58,163)	CKSRYB474K16
C 501	(B,30,147)	CKSRYB104K50
C 502	(B,28,149)	CKSRYB104K50
C 503	(A,27,143)	CEAT1R0M50
C 504	(A,44,138)	CEAT100M50
C 505	(A,26,128)	CEAT100M50
C 506	(A,38,138)	CEAT470M16
C 507	(A,32,128)	CEAT2R2M50
C 508	(A,38,128)	CEAT1R0M50
C 509	(B,33,163)	CKSRYB103K50
C 510	(B,28,153)	CKSRYB103K50
C 601	(B,256,73)	CKSQYB104K50
C 602	(B,256,77)	CKSQYB103K50
C 603	(B,256,75)	CKSQYB102K50
C 604	(B,233,50)	CKSRYB103K50
C 605	(B,265,103)	CKSQYB104K50
C 606	(B,265,99)	CKSQYB103K50
C 607	(B,265,101)	CKSQYB102K50
C 608	(B,121,79)	CKSRYB103K50
C 609	(B,107,85)	CKSRYB103K50
C 610	(A,103,81)	CEAT100M50

Circuit Symbol and No.		Part No.
C 611	(A,97,81)	CEAT100M50
C 612	(A,109,81)	CEAT101M16
C 613	(B,111,83)	CKSRYB103K50
C 614	(B,110,66)	CKSRYB103K50
C 615	(B,90,73)	CKSRYB102K50
C 616	(A,86,66)	CEAT220M50
C 617	(B,108,66)	CKSRYB103K50
C 618	(A,102,66)	CEAT220M25
C 619	(A,89,82)	CEAT471M16
C 620	(B,270,167)	CKSRYB104K50
C 621	(B,121,54)	CKSRYB102K50
C 622	(B,119,54)	CKSRYB472K50
C 623	(A,111,50)	CEANP221M10
C 624	(B,123,62)	CKSRYB104K50
C 625	(B,129,62)	CKSRYB104K50
C 626	(B,116,62)	CKSRYB104K50
C 627	(B,122,62)	CKSRYB104K50
C 628	(B,113,46)	CKSRYB105K16
C 629	(B,127,47)	CKSRYB223K50
C 630	(A,129,44)	CEAT221M16
C 631	(A,104,40)	CFTNA103J2A
C 632	(B,113,39)	CKSQYB474K16
C 633	(A,150,42)	CQMA472J50
C 634	(A,214,36)	CQMA472J50
C 635	(A,220,71) 3 900 uF/16 V	YCH5003(P35)
C 636	(A,238,71) 3 900 uF/16 V	YCH5003(P35)
C 637	(A,151,78)	CQMA102K2E
C 638	(A,155,83)	CQMA102K2E
C 639	(A,145,65)	CQMA102K2E
C 640	(A,195,106) 3 300 uF/71 V	CCH1703
C 641	(A,233,106) 3 300 uF/71 V	CCH1703
C 642	(A,195,137) 3 300 uF/71 V	CCH1703
C 643	(A,233,137) 3 300 uF/71 V	CCH1703
C 644	(A,214,138)	CFTNA104J2A
C 645	(A,214,98)	CFTNA104J2A
C 648	(A,49,29)	CEAT100M2A
C 649	(A,69,34)	CEAT100M2A
C 650	(A,43,29)	CEAT470M25
C 651	(A,62,34)	CEAT470M25
C 652	(B,40,31)	CKSRYB103K50
C 653	(B,66,31)	CKSRYB103K50
C 654	(A,56,29)	CEAT470M25
C 655	(A,76,34)	CEAT470M25
C 656	(B,63,40)	CKSRYB103K50
C 657	(B,78,31)	CKSRYB103K50
C 658	(B,65,40)	CKSQYB334K50
C 659	(B,51,42)	CKSRYB104K50
C 660	(A,54,44)	CEAT100M50
C 671	(A,89,29)	CEAT100M2A
C 672	(A,82,29)	CEAT470M25
C 674	(A,106,29)	CEAT470M25
C 675	(B,97,31)	CKSRYB473K50
C 691	(B,101,53)	CKSRYB103K50
C 901	(B,39,172)	CKSRYB103K50
C 902	(B,38,169)	CKSRYB103K50
C 903	(B,32,168)	CKSRYB104K50
C 911	(B,9,164)	CKSRYB103K50
C 912	(B,11,163)	CKSRYB102K50
C 913	(B,18,166)	CKSRYB104K50
C 914	(B,23,166)	CKSRYB104K50

Circuit Symbol and No.		Part No.
C 921	(A,242,167)	CEANP221M10
C 931	(B,79,94)	CKSRYB473K50
C 941	(B,91,53)	CKSRYB474K16