EXPLODED VIEW : PARTS LIST

Escutcheon section

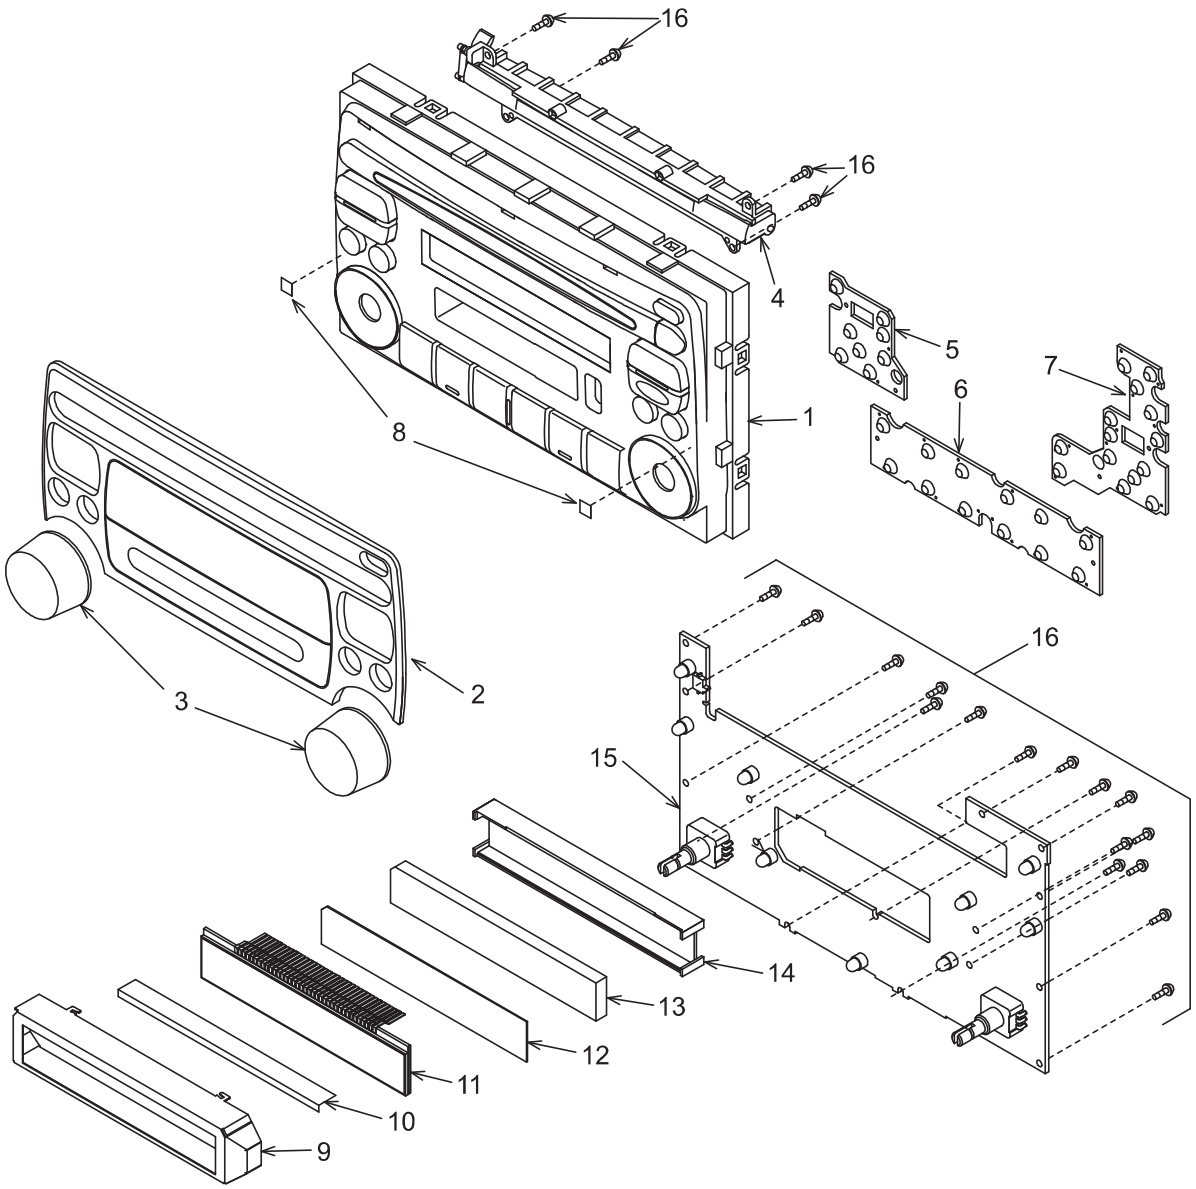

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8011-04	ESCUTCHEON-ASSY	1
2	373-0996-11	DIAL-CVR	1
3	380-5549-00	KNOB	2
4	947-0527-00	DOOR-ASSY	1
5	345-5196-00	RUBBER SW (A)	1
6	345-5197-00	RUBBER SW (B)	1
7	345-5198-00	RUBBER SW (C)	1
8	347-6937-00	DOUBLE FACE	2
9	331-3461-00	LCD-CVR	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	345-5259-00 345-5259-20	PROTECTOR PROTECTOR	1
11	379-1248-30	INDICATOR	1
12	335-6876-00	COLOR FILTER	1
13	335-6875-00	LCD-ILLUMI	1
14	335-6824-00	LCD HOLDER	1
15	039-2197-00	SWITCH PWB (WITHOUT COMPONENT)	1
16	716-0778-00	WAVE SCREW (M2 x 6)	20

Main section

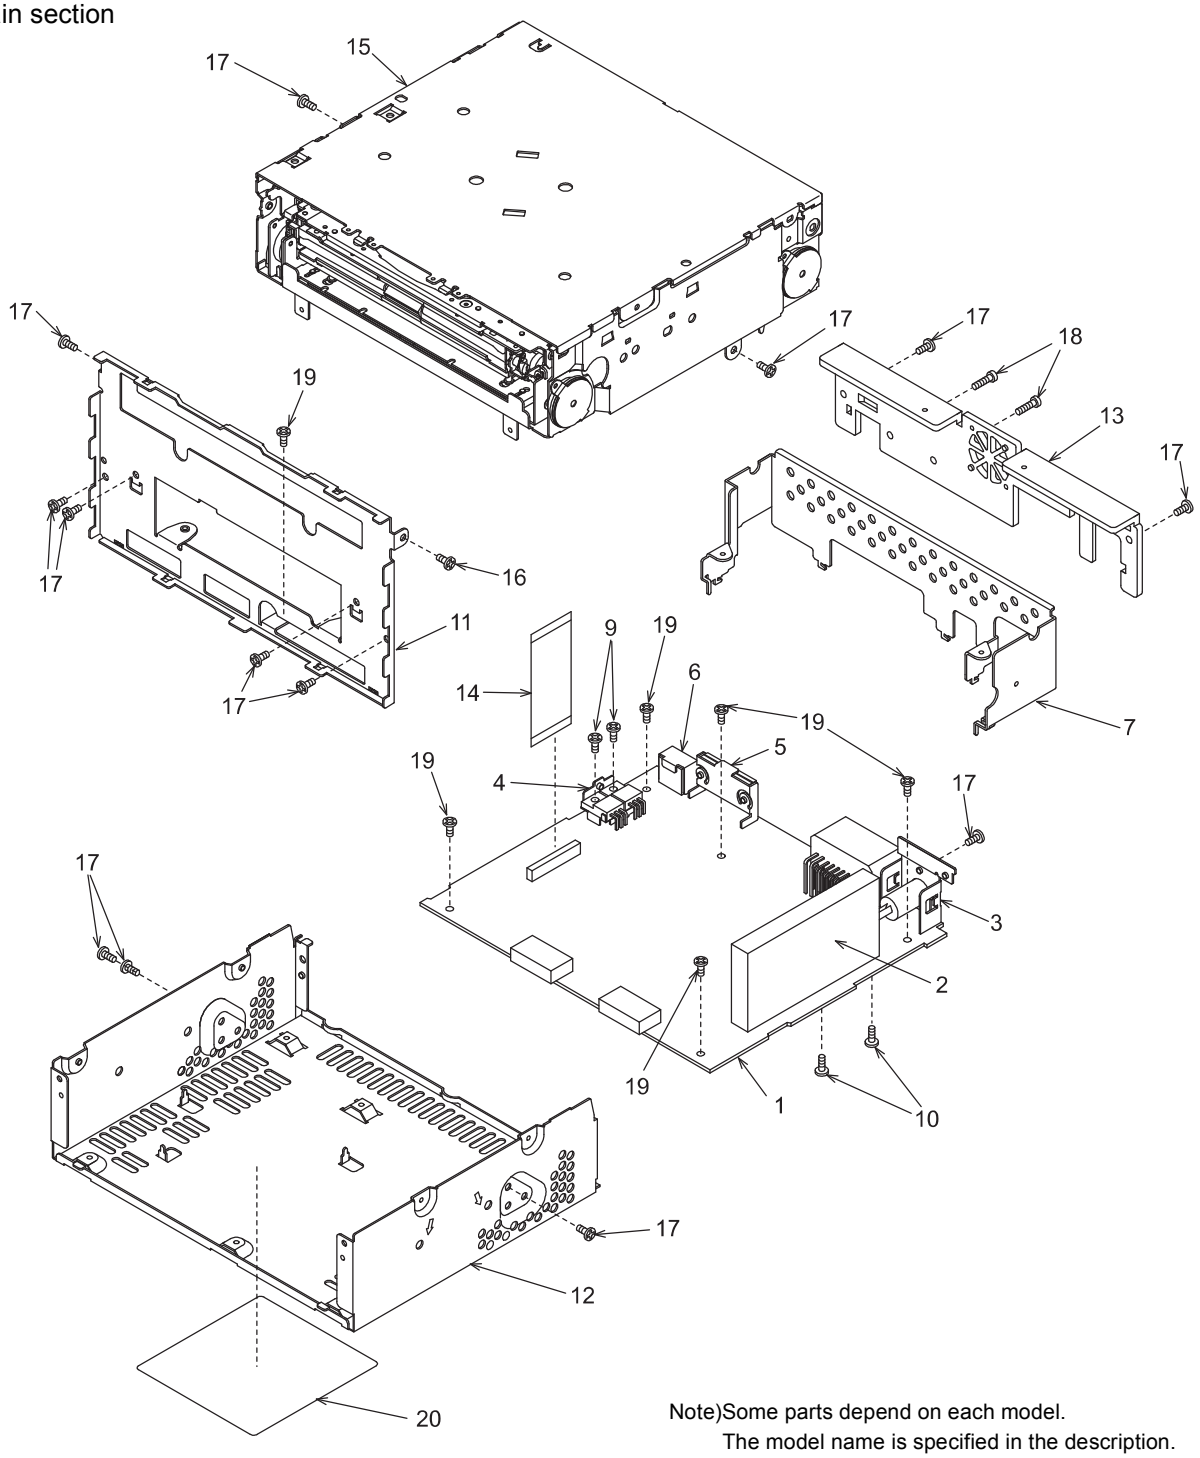

Note)Some parts depend on each model.
The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	039-2196-01	MAIN PWB (WITHOUT COMPONENT)	1
2	941-0213-62	TUNER PACK	1
3	331-3444-10	ANT HOLDER	1
4	331-3458-00	TR HOLDER	1
5	331-3459-00	IC HOLDER	1
6	331-3460-00	CONNECT HOLDER	1
7	331-3462-00	MECH BRKT	1
8	714-2606-81	MACHINE SCREW (M2.6 x 6)	1
9	716-0878-00	IT-SCREW (M2.6 x 5)	2
10	778-3006-00	TAP-SCREW (phi3 x 6)	2
11	309-0787-00	ES PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	311-1861-00	LOWER CASE	1
13	313-1856-00	HEAT SINK	1
14	816-2603-00	FLAT WIRE	1
15	----------	CD CHANGER MECHANISM (481910)	1
16	714-2003-89	MACHINE SCREW (M2x 3)	1
17	714-2606-81	MACHINE SCREW (M2.6 x 6)	12
18	714-2612-81	MACHINE SCREW (M2.6 x 12)	2
19	716-0878-00	IT-SCREW (M2.6 x 5)	6
20	286-6092-00 286-6092-04 286-6100-03	SETPLATE (PS-2533B) SETPLATE (PS-2533D) SETPLATE (PS-2534D)	1

CD changer mechanism section : Main chassis

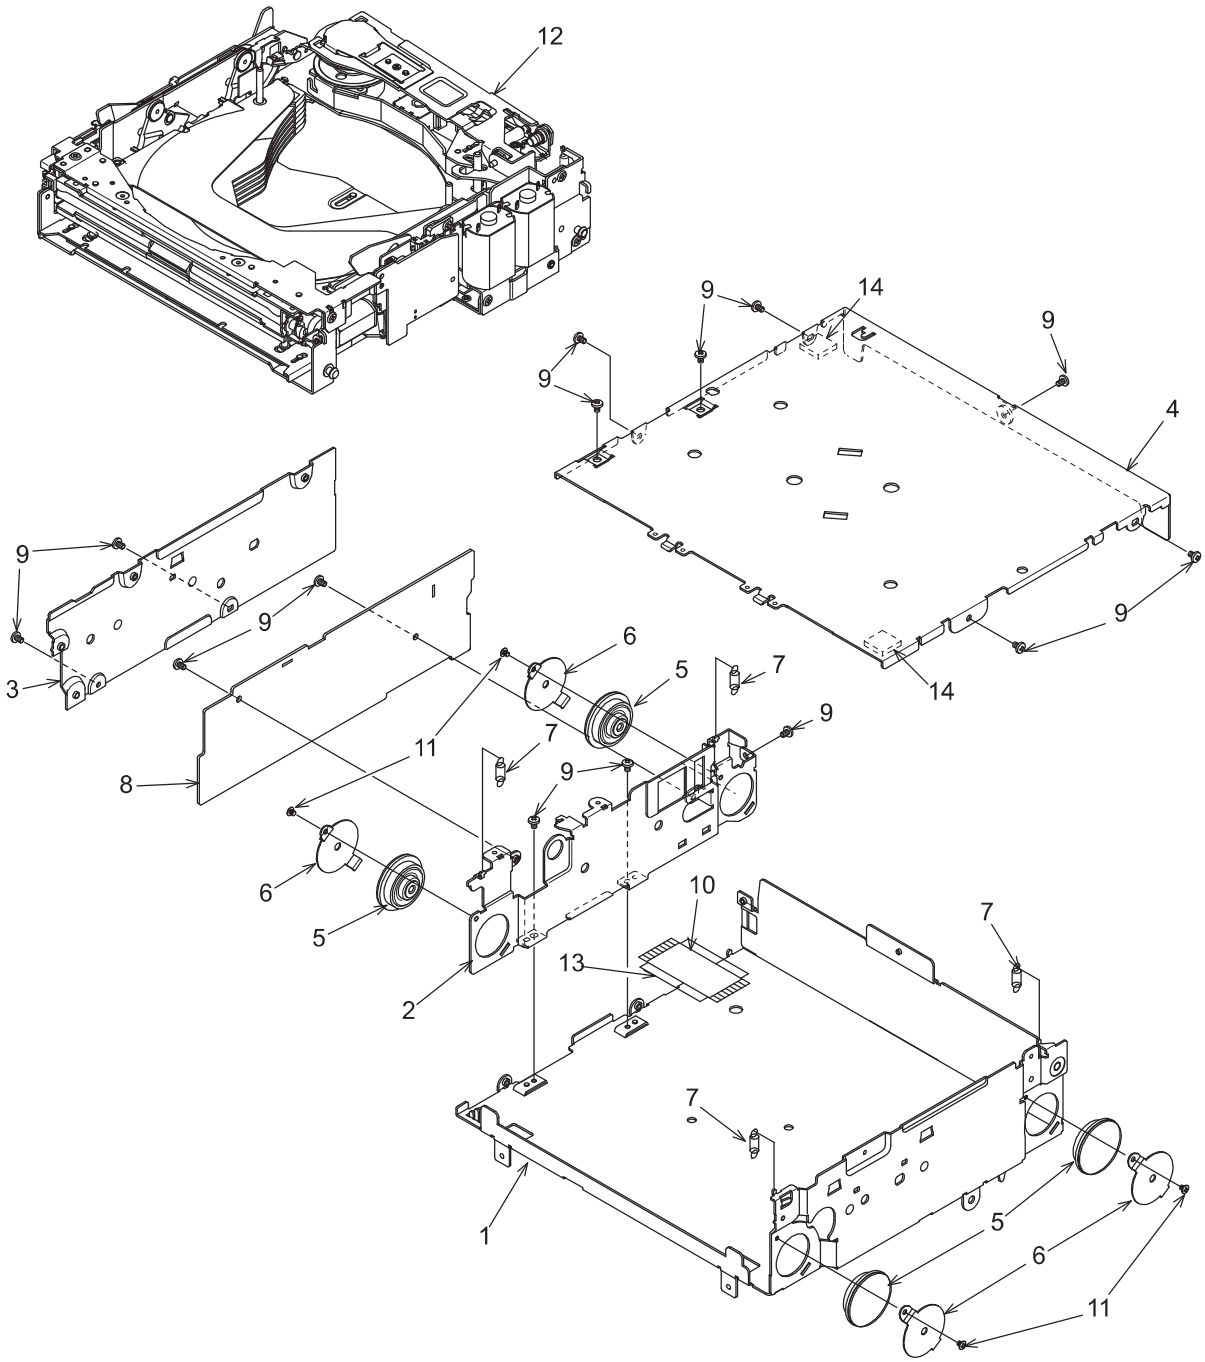

NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1864-82	LOWER CASE	1
2	331-3266-24	PWB-HOLDER	1
3	305-0315-84	SIDE CASE	1
4	310-1741-83	UPPER CASE	1
5	629-0083-00	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	1
8	039-2219-00	MAIN PWB (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
9	716-1716-00	SCREW (M2 x 3)	14
10	039-1957-01	FPC (WITHOUT COMPONENT)	1
11	716-3450-00	SCREW (M1.7 x 2)	4
12	----------	CD-CHG-MODULE	1
13	347-6619-00	INSULATOR	1
14	345-8329-00	CUSHION RUBBER	2

CD changer mechanism section : Main module 1/2

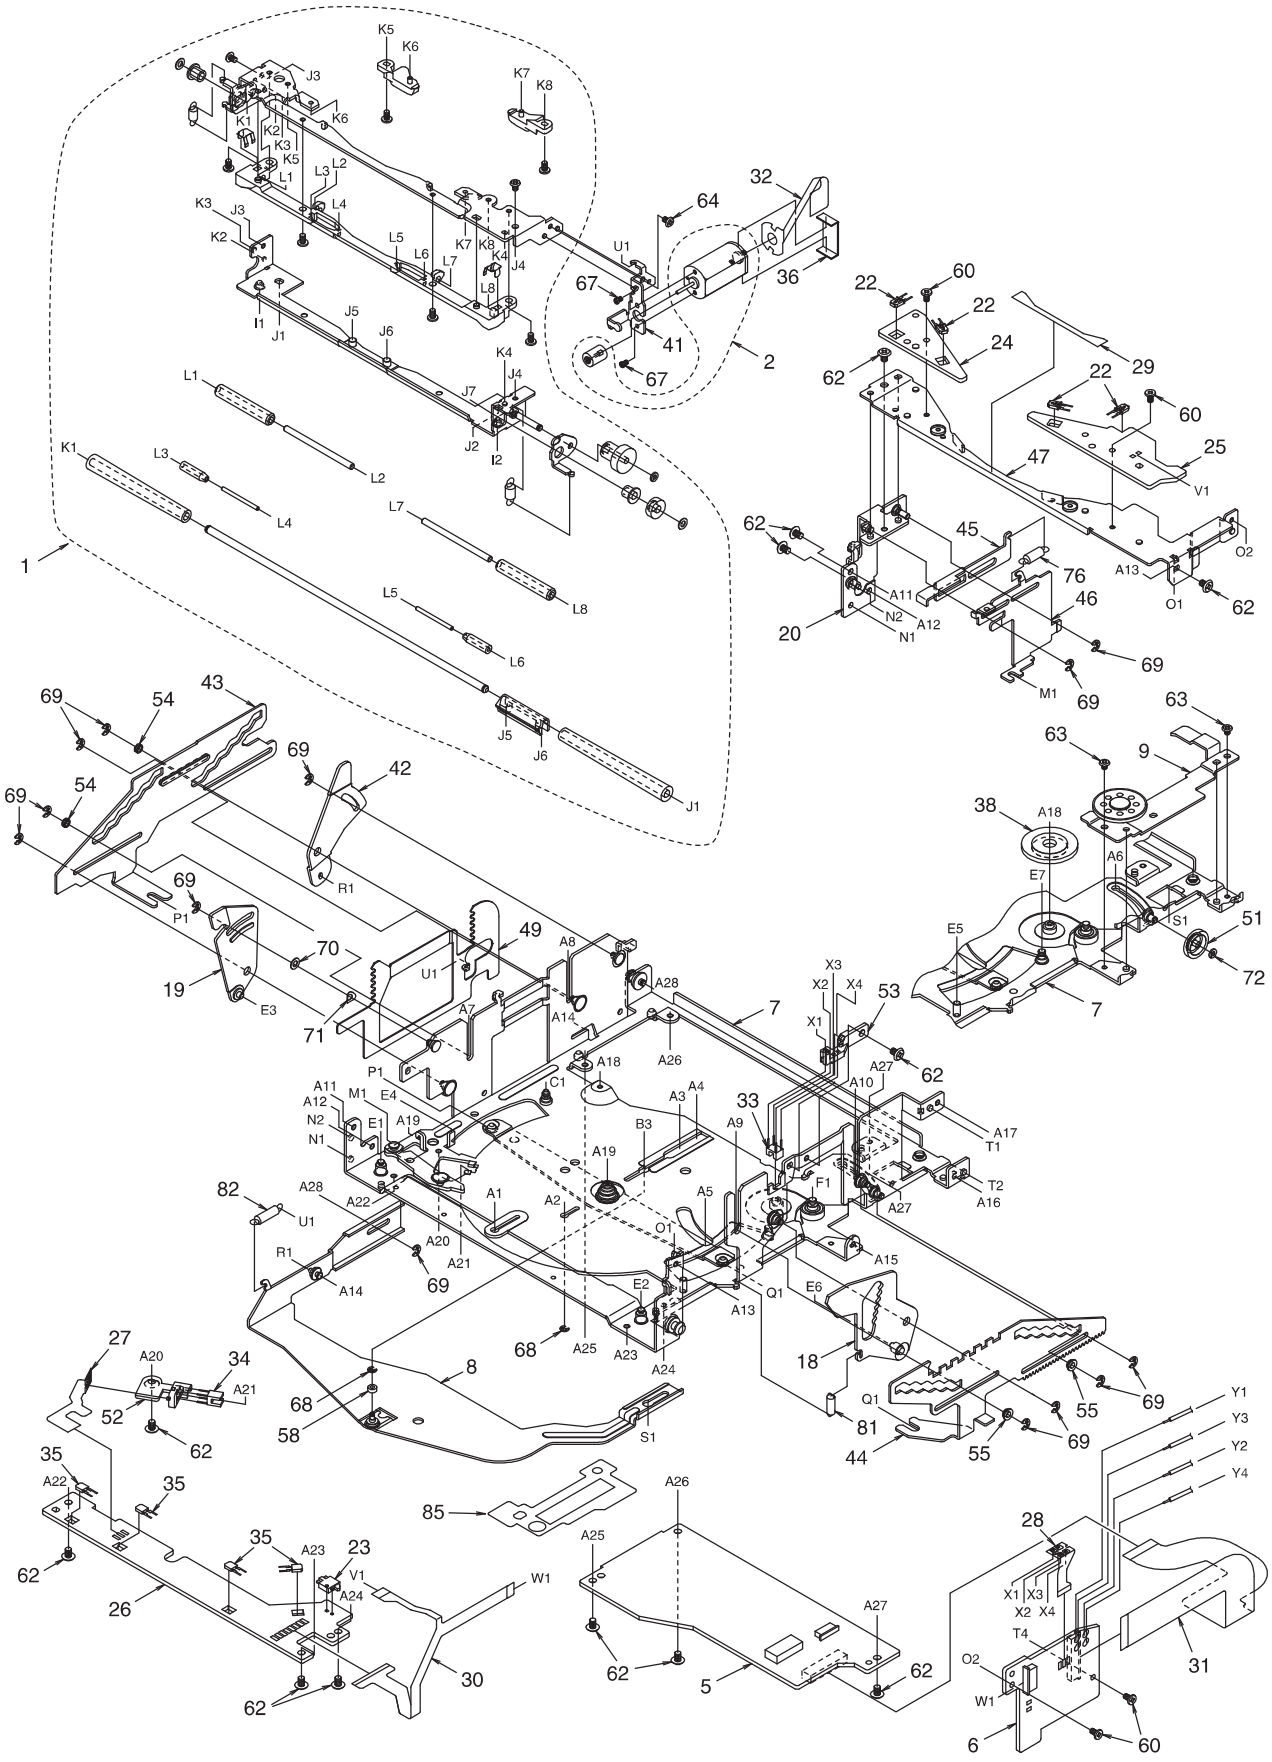

PS-2533B , D
PS-2534D

CD changer mechanism section : Main module 2/2

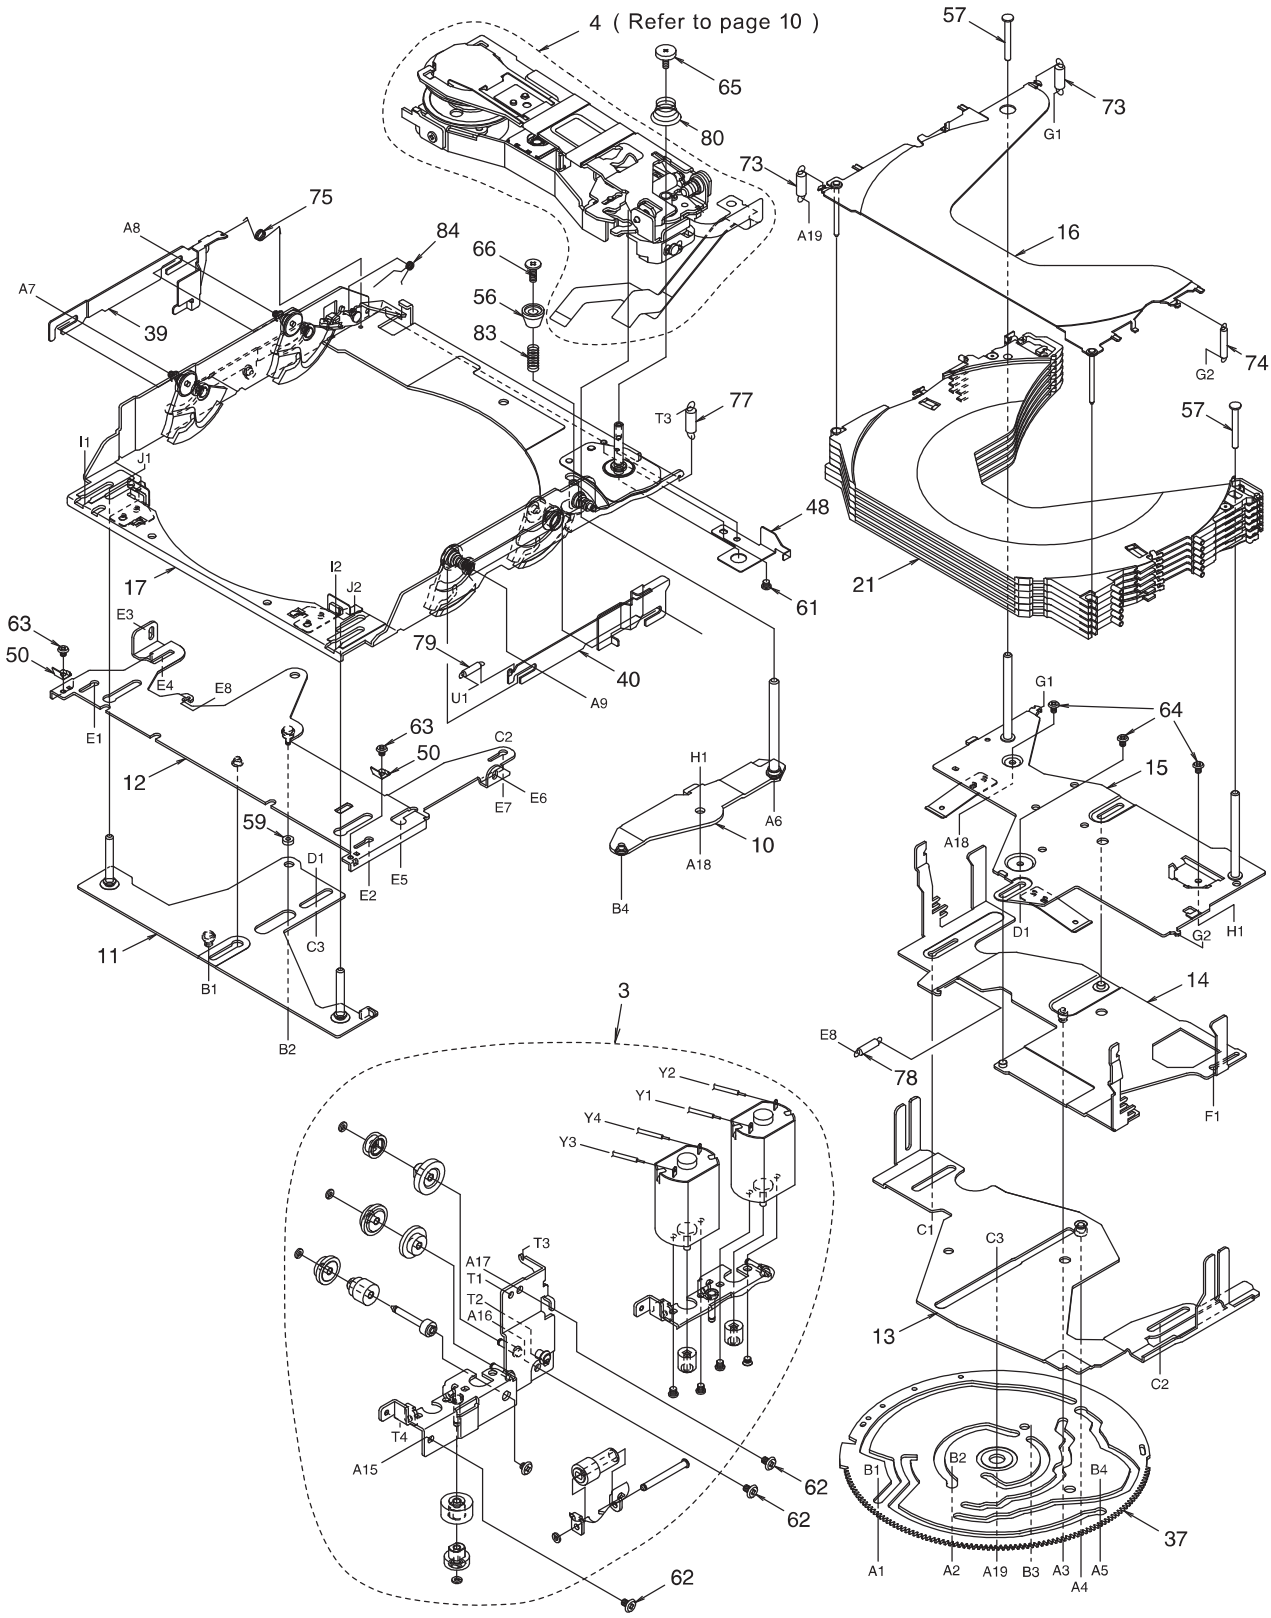

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-511-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1
4	HBS-513-103	DRIVE UNIT	1
5	039-1951-00	CD PWB (WITHOUT COMPONENT)	1
6	039-1953-00	DRIVER PWB (WITHOUT COMPONENT)	1
7	966-0597-02	CHASSIS ASSY	1
8	966-0600-01	LOCK-P-RE-ASSY	1
9	966-0601-00	M-GEAR-P-ASSY	1
10	966-0602-02	DR-LINK-ASSY	1
11	966-0603-00	MODE-P-ASSY	1
12	966-0604-02	LOCK-PF-ASSY	1
13	966-0605-00	SHIFT-P-ASSY	1
14	966-0606-02	HLC-PLATE-ASSY	1
15	966-0607-03	COV-OLATE-ASSY	1
16	966-0610-03	TOP-PLATE-ASSY	1
17	966-0611-85	DR-BASE-P-ASSY	1
18	966-0615-81	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-03	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	039-1954-00	LED-L-PWB (WITHOUT COMPONENT)	1
25	039-1955-00	LED-R-PWB (WITHOUT COMPONENT)	1
26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
27	039-2009-00	PIM FPC	1
28	039-2010-00	RIV-FOC	1
29	039-2011-00	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-00	MOS-FPC	1
32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-03	GEAR PLATE	1
38	620-1042-00	M-GEAR-H	1
39	620-1056-21	HLR-PLATE-L	1
40	620-1057-21	HLR-PLATE-R	1
41	620-1063-00	LO-MOTOR-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-81	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-20	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1073-00	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1
49	620-1090-00	GAP PLATE	1
50	620-1568-00	RATTLE PLATE-F	2
51	621-0640-00	V-GEAR-G	1
52	621-0641-01	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-00	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-02	DU-STP-SLEEVE	1
57	622-1650-02	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW (M1.7 x 3)	4
61	716-1873-00	SCREW (M2 x 1.6)	1
62	716-3449-00	SCREW (M2 x 3)	15
63	716-3450-00	SCREW (M1.7 x 2)	4
64	716-3451-00	SCREW (M1.7 x 2.5)	4
65	716-3459-00	SCREW (M1.7 x 5)	1
66	716-3466-02	SCREW	1
67	738-1420-17	PRECISION SCREW	2
68	743-1200-20	E-RING	2
69	743-1500-10	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-03	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-00	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	347-6974-00	FPC COVER	1

CD changer mechanism section : Drive unit

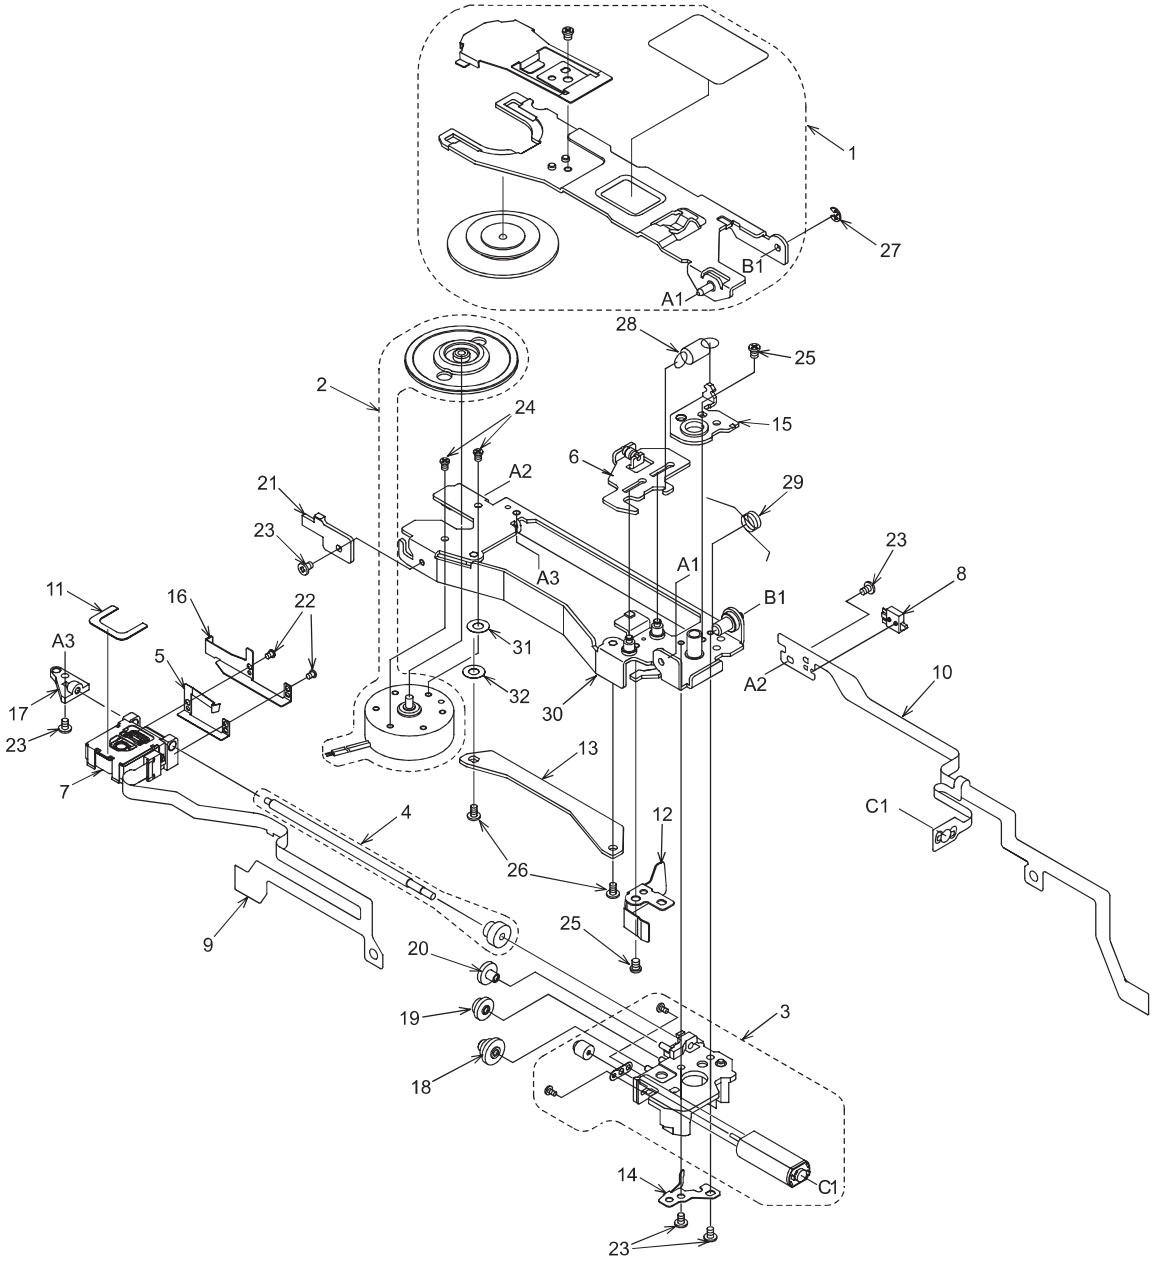

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1
3	SMA-184-100	SLED MOTOR ASSY	1
4	HBS-515-101	LS-ASSY	1
5	620-1587-80	SH-SPRING	1
6	966-0622-02	D-SHIFT-P-ASSY	1
7	969-0009-00	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-01	M/S-FPC	1
11	347-6632-00	PU-SHEET	1
12	620-1078-00	PUSH PLATE	1
13	620-1080-01	PU-GUIDE PLATE	1
14	620-1081-00	SCREW PUSH-PLT	1
15	620-1082-01	SPRING PLATE	1
16	620-1588-00	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-00	D-GEAR A	1
19	621-0674-00	D-GEAR B	1
20	621-0675-00	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3460-00	SCREW (M1.4 x 1.8)	2
23	716-3470-00	SCREW (M1.7 x 3)	5
24	738-1722-17	PRECISION SCREW	2
25	738-2025-17	PRECISION SCREW	2
26	716-3474-00	SCREW (M1.7 x 3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3488-00	CLAMP-A-SPRING	1
30	966-0619-84	DRIVE PLT-ASSY	1
31	745-0807-00	WASHER	1
32	745-0808-00	WASHER	1

ELECTRICAL PARTS LIST

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model.The model name is specified in the description.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT
BL101	941-0213-62	AM/FM TUNER
C107	168-2232-55	0.022uF
C109	178-4742-78	0.47uF
C113	184-1073-29	10V 100uF
C114	168-1042-78	16V 0.1uF
C115	168-1042-78	16V 0.1uF
C116	168-1042-78	16V 0.1uF
C117	166-1801-50	18pF CH
C118	166-1801-50	18pF CH
C119	183-1073-29	10V100uF
C120	168-2232-55	0.022uF
C121	166-1011-50	100pF CH
C122	166-1011-50	100pF CH
C123	042-0458-90	50V1uF
C124	168-2232-55	0.022uF
C125	183-4763-39	16V47uF
C126	168-1022-55	1000pF
C127	183-4763-39	16V47uF
C128	166-1011-50	100pF CH
C129	166-1011-50	100pF CH
C131	168-2232-55	0.022uF
C132	166-1011-50	100pF CH
C133	166-1011-50	100pF CH
C134	178-4742-78	0.47uF
C214	183-1073-29	10V 100uF
C215	183-4763-19	6.3V 47uF
C216	168-1042-78	16V 0.1uF
C301	168-1032-55	0.01uF
C302	168-1042-78	16V 0.1uF
C303	183-4763-19	6.3V 47uF
C304	168-1032-55	0.01uF
C305	168-1032-55	0.01uF
C306	168-1032-55	0.01uF
C309	183-1053-69	50V1uF
C311	168-1022-55	1000pF
C312	168-1022-55	1000pF
C313	168-1042-78	16V 0.1uF
C316	042-0576-00	5.5V 0.1F
C318	183-1073-29	10V 100uF
C319	168-1042-78	16V 0.1uF
C320	183-4763-39	16V 47uF
C403	183-1063-39	16V 10uF
C404	183-1073-29	10V 100uF
C601	163-1063-35	16V 10uF
C602	163-1063-35	16V 10uF
C603	183-2253-67	50V 2.2uF
C604	168-2732-55	16V 0.027uF
		(PS-2533B , D)
C604	168-3332-78	0.033uF
		(PS-2534D)
C605	168-2732-55	16V 0.027uF
		(PS-2533B , D)
C605	168-3332-78	0.033uF
		(PS-2534D)
C606	183-2253-67	50V 2.2uF
C607	163-1063-35	16V 10uF
C608	163-1063-35	16V 10uF
C610	168-4712-55	470pF
C611	168-4712-55	470pF
C619	183-4763-37	16V 47uF
C620	183-4763-17	6.3V 47uF
C622	178-5642-78	0.56uF
C623	178-5642-78	0.56uF
C626	183-1053-69	50V 1uF
C627	183-1053-69	50V 1uF
C632	168-1042-78	16V 0.1uF
C633	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C634	168-1042-78	16V 0.1uF
C635	168-1042-78	16V 0.1uF
C640	168-1022-55	1000pF
C641	168-1022-55	1000pF
C642	168-1022-55	1000pF
C643	168-1022-55	1000pF
C644	183-1066-38	16V 10uF NP
C645	183-1066-38	16V 10uF NP
C646	168-3332-78	0.033uF
C647	168-4732-78	0.047uF
		(PS-2533B , D)
C647	168-3332-78	0.033uF
		(PS-2534D)
C648	168-4732-78	0.047uF
		(PS-2533B , D)
C648	168-3332-78	0.033uF
		(PS-2534D)
C653	168-4732-78	0.047uF
C654	168-4732-78	0.047uF
C655	178-1052-78	1uF
C656	183-1066-38	16V 10uF NP
C657	178-1052-78	1uF
C658	178-1052-78	1uF
C659	183-1066-38	16V 10uF NP
C660	178-1052-78	1uF
C661	168-4732-78	0.047uF
C662	168-4732-78	0.047uF
C663	183-1063-39	16V 10uF
C664	183-1063-39	16V 10uF
C665	168-1032-55	0.01uF
C666	168-1032-55	0.01uF
C667	168-1032-55	0.01uF
C668	168-1032-55	0.01uF
C669	183-1063-39	16V 10uF
C670	183-1063-39	16V 10uF
C671	168-2222-55	2200pF
C672	168-2222-55	2200pF
C673	168-2222-55	2200pF
C674	168-2222-55	2200pF
C675	183-1063-39	16V 10uF
C676	183-1063-39	16V 10uF
C677	168-1022-55	1000pF
C678	168-1022-55	1000pF
C679	168-1022-55	1000pF
C680	183-1063-39	16V 10uF
C681	183-1063-39	16V 10uF
C682	168-1022-55	1000pF
C683	183-1063-39	16V 10uF
C684	183-4763-39	16V 47uF
C685	168-1032-55	0.01uF
C730	168-1042-78	16V 0.1uF
C731	168-1042-78	16V 0.1uF
C732	168-1042-78	16V 0.1uF
C733	168-1042-78	16V 0.1uF
C734	183-1053-69	50V 1uF
C735	183-1063-39	16V 10uF
C736	168-1042-78	16V 0.1uF
C737	183-1063-39	16V 10uF
C738	183-1053-69	50V 1uF
C806	183-4763-39	16V 47uF
C807	183-1073-29	10V 100uF
C809	172-1041-15	0.1uF
C810	183-1053-69	50V 1uF
C813	042-0586-00	16V 4700uF
C814	172-1041-15	0.1uF
C816	183-4763-39	16V 47uF
C817	172-1041-15	0.1uF
CCT301	050-0140-54	1/32W 1k ohm x 4J

REF No.	PART No.	DESCRIPTION
D205	001-0347-48	MA4091H
D301	001-0347-69	MA4180M
D302	001-0454-91	MA700A
D303	001-0454-91	MA700A
D304	001-0347-69	MA4180M
D306	001-0529-25	MA8047-L
D308	001-0347-69	MA4180M
D310	001-0516-90	MA111
D312	001-0516-90	MA111
D314	001-0466-90	S5688B
D316	001-0504-36	HZS7 A1L
D402	001-0347-37	MA4068L
D403	001-0347-43	MA4082L
D701	001-0529-25	MA8047-L
D702	001-0516-90	MA111
D803	001-0347-48	MA4091H
D804	001-0516-90	MA111
D805	001-0466-90	S5688B
D806	001-0466-90	S5688B
D807	001-0466-90	S5688B
D808	001-2015-00	RL253
IC102	051-6212-08	LC72191JM-TLM
IC301	051-6600-38	CA0008AM
IC302	052-3176-01	M30620MCA-5NPGP
IC303	051-0869-58	NJM2103M
IC601	051-5027-00	LC75412WH
IC602	051-5819-00	LC75281E
IC702	051-2040-00	TA8276H
J203	074-1192-22	22P
J301	074-1194-00	13P CE-NET
J801	074-1166-01	20P
L103	010-6009-76	22uH
L104	010-6009-76	22uH
L202	010-6009-76	22uH
L301	010-6009-76	22uH
L302	010-6009-76	22uH
P401	076-0540-12	12P
P402	076-0540-12	12P
Q105	192-2712-51	2SC2712G,L
Q106	192-2712-51	2SC2712G,L
Q108	191-1240-00	2SB1240
Q109	191-1240-00	2SB1240
Q110	191-1240-00	2SB1240
Q214	103-2012-00	2SD2012
Q215	103-2012-00	2SD2012
Q216	192-2712-00	2SC2712
Q217	190-1428-00	2SA1428
Q218	192-2712-00	2SC2712
Q219	125-0002-92	RN2402
Q220	125-2004-92	RN1402
Q221	192-2712-00	2SC2712
Q222	125-0002-92	RN2402
Q301	192-2712-00	2SC2712
Q304	192-2712-00	2SC2712
Q308	192-2712-00	2SC2712
Q311	191-1240-00	2SB1240
Q312	192-2712-00	2SC2712
Q320	193-2118-50	2SD2118F5
Q404	125-0002-92	RN2402
Q405	125-2004-92	RN1402
Q407	192-2712-00	2SC2712
Q409	193-2118-00	2SD2118
Q701	125-2004-92	RN1402
Q702	125-2004-92	RN1402
Q703	125-2004-92	RN1402
Q705	192-2712-00	2SC2712
Q802	192-2712-00	2SC2712

REF No.	PART No.	DESCRIPTION
Q804	193-2118-00	2SD2118
Q805	192-2712-00	2SC2712
Q807	125-0002-92	RN2402
Q808	125-2004-92	RN1402
Q809	191-1240-00	2SB1240
Q810	192-2712-00	2SC2712
R107	119-0000-05	1/16W 0 ohm JW
R108	119-5621-15	1/16W 5.6k ohm
R112	119-2221-15	1/16W 2.2k ohm
R115	119-2221-15	1/16W 2.2k ohm
R116	119-2231-15	1/16W 22k ohm
R117	111-1001-94	1/4W 10 ohm
	111-1001-98	1/4W 10 ohm
R119	119-5631-15	1/16W 56k ohm
R120	119-3321-15	1/16W 3.3k ohm
R121	119-2221-15	1/16W 2.2k ohm
R122	119-4721-15	1/16W 4.7k ohm
R123	119-1021-15	1/16W 1k ohm
R124	119-5121-15	1/16W 5.1k ohm
R125	119-1041-15	1/16W 100k ohm
R126	119-2221-15	1/16W 2.2k ohm
R128	119-1021-15	1/16W 1k ohm
R129	119-1021-15	1/16W 1k ohm
R131	119-1031-15	1/16W 10k ohm
R132	119-1031-15	1/16W 10k ohm
R133	119-2221-15	1/16W 2.2k ohm
R134	119-2221-15	1/16W 2.2k ohm
R135	119-1031-15	1/16W 10k ohm
R136	119-0000-05	1/16W 0 ohm JW
R137	119-3311-15	1/16W 330 ohm
		(PS-2533B , D)
R137	119-0000-05	1/16W 0 ohm JW
		(PS-2534D)
R140	119-1041-15	1/16W 100k ohm
R231	116-2291-15	1/8W 2.2 ohm
R232	116-2291-15	1/8W 2.2 ohm
R236	119-3321-15	1/16W 3.3k ohm
R237	111-1511-81	1/2W 150 ohm
R238	119-2231-15	1/16W 22k ohm
R240	116-4711-15	1/8W 470 ohm
R241	119-1031-15	1/16W 10k ohm
R242	119-5631-15	1/16W 56k ohm
R243	117-4721-15	1/10W 4.7k ohm
R244	116-4711-15	1/8W 470 ohm
R245	119-2231-15	1/16W 22k ohm
R246	119-2231-15	1/16W 22k ohm
R306	119-1031-15	1/16W 10k ohm
R307	119-4721-15	1/16W 4.7k ohm
R308	119-4721-15	1/16W 4.7k ohm
R309	119-4721-15	1/16W 4.7k ohm
R310	119-4731-15	1/16W 47k ohm
R311	119-4731-15	1/16W 47k ohm
R312	119-4731-15	1/16W 47k ohm
R313	119-4731-15	1/16W 47k ohm
R314	119-4721-15	1/16W 4.7k ohm
R316	119-1021-15	1/16W 1k ohm
R317	119-0000-05	1/16W 0 ohm JW
R318	119-1021-15	1/16W 1k ohm
R319	119-4721-15	1/16W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R320	119-4721-15	1/16W 4.7k ohm
R321	----------	NO USED
		(PS-2533B , D)
R321	119-0000-05	1/16W 0 ohm JW
		(PS-2534D)
R322	119-0000-05	1/16W 0 ohm JW
		(PS-2533B , D)
R322	----------	NO USED
		(PS-2534D)
R323	119-0000-05	1/16W 0 ohm JW
		(PS-2533B , D)
R323	----------	NO USED
		(PS-2534D)
R324	----------	NO USED
		(PS-2533B , D)
R324	119-0000-05	1/16W 0 ohm JW
		(PS-2534D)
R326	119-0000-05	1/16W 0 ohm JW
R328	119-0000-05	1/16W 0 ohm JW
R329	119-0000-05	1/16W 0 ohm JW
R332	119-0000-05	1/16W 0 ohm JW
R334	119-1031-15	1/16W 10k ohm
R335	119-4731-15	1/16W 47k ohm
R336	119-4731-15	1/16W 47k ohm
R337	119-4731-15	1/16W 47k ohm
R338	119-4731-15	1/16W 47k ohm
R339	117-2231-15	1/10W 22k ohm
R340	111-6801-94	1/4W 68 ohm
	111-6801-98	1/4W 68 ohm
R341	117-2231-15	1/10W 22k ohm
R342	119-1031-15	1/16W 10k ohm
R344	117-5621-15	1/10W 5.6k ohm
R345	119-2231-15	1/16W 22k ohm
R346	117-1021-15	1/10W 1k ohm
R348	119-2231-15	1/16W 22k ohm
R352	119-6831-15	1/16W 68k ohm
R354	119-3341-15	1/16W 330k ohm
R355	119-6831-15	1/16W 68k ohm
R356	119-4731-15	1/16W 47k ohm
R357	111-1211-94	1/4W 120 ohm
	111-1211-98	1/4W 120 ohm
R361	119-1021-15	1/16W 1k ohm
R363	119-1031-15	1/16W 10k ohm
R364	119-1021-15	1/16W 1k ohm
R365	119-1031-15	1/16W 10k ohm
R366	119-2221-15	1/16W 2.2k ohm
R370	116-1001-15	1/8W 10 ohm
R371	119-4721-15	1/16W 4.7k ohm
R372	119-4721-15	1/16W 4.7k ohm
R379	117-6821-15	1/10W 6.8k ohm
R405	116-1021-15	1/8W 1k ohm
R406	119-2231-15	1/16W 22k ohm
R407	119-2231-15	1/16W 22k ohm
R408	116-1591-15	1/8W 1.5 ohm
R411	111-1501-81	1/2W 15 ohm
R412	119-0000-05	1/16W 0 ohm JW
R413	119-0000-05	1/16W 0 ohm JW
R414	119-4721-15	1/16W 4.7k ohm
R415	119-4721-15	1/16W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R417	119-4721-15	1/16W 4.7k ohm
R601	119-3331-15	1/16W 33k ohm
R602	119-3331-15	1/16W 33k ohm
R605	119-4721-15	1/16W 4.7k ohm
R606	119-1031-15	1/16W 10k ohm
		(PS-2533B , D)
R606	119-1531-15	1/16W 15k ohm
		(PS-2534D)
R607	119-1031-15	1/16W 10k ohm
		(PS-2533B , D)
R607	119-1531-15	1/16W 15k ohm
		(PS-2534D)
R608	119-4721-15	1/16W 4.7k ohm
R611	119-3331-15	1/16W 33k ohm
R612	119-3331-15	1/16W 33k ohm
R615	119-1221-15	1/16W 1.2k ohm
R616	119-1221-15	1/16W 1.2k ohm
R620	119-1051-15	1/16W 1M ohm
R729	119-1031-15	1/16W 10k ohm
R730	117-1021-15	1/10W 1k ohm
R731	116-4721-15	1/8W 4.7k ohm
R732	119-2231-15	1/16W 22k ohm
R733	119-8221-15	1/16W 8.2k ohm
R734	119-2221-15	1/16W 2.2k ohm
R735	119-2221-15	1/16W 2.2k ohm
R736	119-2221-15	1/16W 2.2k ohm
R737	119-2221-15	1/16W 2.2k ohm
R738	119-2221-15	1/16W 2.2k ohm
R739	119-4731-15	1/16W 47k ohm
R740	119-4731-15	1/16W 47k ohm
R801	119-1031-15	1/16W 10k ohm
R802	119-1041-15	1/16W 100k ohm
R804	119-1031-15	1/16W 10k ohm
R807	119-8231-15	1/16W 82k ohm
R808	119-1231-15	1/16W 12k ohm
R809	119-1031-15	1/16W 10k ohm
R810	119-1041-15	1/16W 100k ohm
R811	119-1031-15	1/16W 10k ohm
R813	119-8231-15	1/16W 82k ohm
R814	119-1231-15	1/16W 12k ohm
R815	116-4711-15	1/8W 470 ohm
R816	111-5621-94	1/4W 5.6k ohm
	111-5621-98	1/4W 5.6k ohm
R817	116-2221-15	1/8W 2.2k ohm
R818	117-1031-15	1/10W 10k ohm
R819	116-2221-15	1/8W 2.2k ohm
R820	119-3321-15	1/16W 3.3k ohm
R821	119-1031-15	1/16W 10k ohm
R831	114-2291-11	1W 2.2 ohm
SUP101	060-0122-20	SURGE-PROTEC-
		TOR
T801	009-0670-00	CHOKE 180uH
TH801	002-0222-90	PTH61G30BD
TM101	073-0762-90	TERMINAL
TM102	073-0762-90	TERMINAL
TM103	073-0762-90	TERMINAL
TM104	073-0762-90	TERMINAL
X101	061-1066-80	7.2MHz
X301	060-1533-90	10MHZ

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF
C902	168-4732-78	0.047uF
C903	168-4732-78	0.047uF
C904	168-8212-55	820pF
IC901	051-6000-20	LC7583NW
J901	074-1151-12	12P
J902	074-1151-12	12P
L901	010-2323-82	NL252018T-220J
LCD901	379-1248-30	INDICATOR

REF No.	PART No.	DESCRIPTION
		PS-2533B(AMBER)
PL901	017-0429-18	8V 105mA(AMBER)
PL902	017-0420-35	14V 40mA(AMBER)
PL903	017-0429-18	8V 105mA(AMBER)
PL904	017-0420-18	14V 40mA(AMBER)
PL905	017-0420-18	14V 40mA(AMBER)
PL906	017-0420-18	14V 40mA(AMBER)
PL907	017-0420-18	14V 40mA(AMBER)
PL908	017-0420-18	14V 40mA(AMBER)
PL909	017-0420-18	14V 40mA(AMBER)

REF No.	PART No.	DESCRIPTION
		PS-2533D(WHITE)
		PS-2534D(WHITE)
PL901	017-0429-20	8V 105mA(BLUE)
PL902	017-0420-38	14V 40mA(BLUE)
PL903	017-0429-20	8V 105mA(BLUE)
PL904	017-0420-38	14V 40mA(BLUE)
PL905	017-0420-38	14V 40mA(BLUE)
PL906	017-0420-38	14V 40mA(BLUE)
PL907	017-0420-38	14V 40mA(BLUE)
PL908	017-0420-38	14V 40mA(BLUE)
PL909	017-0420-38	14V 40mA(BLUE)

REF No.	PART No.	DESCRIPTION
Q901	192-2712-00	2SC2712
R901	119-4731-15	1/16W 47k ohm
R904	119-0000-05	1/16W 0 ohm JW
R905	119-0000-05	1/16W 0 ohm JW
R906	119-0000-05	1/16W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R907	119-0000-05	1/16W 0 ohm JW
R910	119-6831-15	1/16W 68k ohm
R911	119-0000-05	1/16W 0 ohm JW
R912	119-1021-15	1/16W 1k ohm
R914	119-0000-05	1/16W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R916	119-0000-05	1/16W 0 ohm JW
S901	013-7415-50	DETECTOR-SW
VR901	016-0014-09	ROTALY ENCODER
VR902	016-0014-09	ROTALY ENCODER

CD changer maechanism section

CD Main PWB section(B3)

REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF
C102	046-1032-78	0.01uF
C104	163-1073-15	6.3V 100uF
C106	163-1063-35	16V 10uF
C107	163-1073-15	6.3V 100uF
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	163-1073-35	16V 100uF
C112	168-2722-55	2700pF
C113	163-2263-35	16V 22uF
C114	163-2263-35	16V 22uF
C115	046-3312-58	330pF
C116	046-3312-58	330pF
C117	045-1011-50	100pF
C118	045-1011-50	100pF
C119	168-2722-55	2700pF
C120	046-1022-58	1000pF
C121	163-2263-35	16V 22uF
C122	046-1022-58	1000pF
C123	163-2263-35	16V 22uF
C124	042-0403-55	16V 33uF
C125	042-0403-55	16V 33uF
C502	168-1045-56	0.1uF
C503	046-1032-78	0.01uF
C504	168-1045-56	0.1uF
C506	046-1032-78	0.01uF
C507	046-1032-78	0.01uF
D103	001-0504-07	HZS4BLL
D104	001-0516-90	MA111
D105	001-0529-31	MA8056-L
D106	001-2601-90	MA728-TX
D107	001-2601-90	MA728-TX
IC501	051-9400-28	BR93LC46F-WE2
IC502	052-5047-11	M30621MCM-5P7GP

REF No.	PART No.	DESCRIPTION
IC504	051-1407-90	NJM4556AM
J101	074-1189-95	45P
J102	074-1191-22	22P
L101	010-3071-65	18uH
L102	010-2199-80	33uH J
P101	076-0478-55	PLUG
Q101	125-2004-92	RN1402
Q102	131-1188-50	2SB1188PQR
Q103	193-1758-00	2SD1758TK-P,Q,R
Q104	193-1758-00	2SD1758TK-P,Q,R
Q105	125-0014-92	DTA114EK
Q106	125-2004-92	RN1402
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q507	125-0002-92	RN2402
Q508	192-2712-00	2SC2712
Q509	125-2004-92	RN1402
R101	119-4711-15	1/16W 470 ohm
R102	033-2231-15	1/16W 22k ohm
R103	119-1821-15	1/16W 1.8k ohm
R104	033-1831-15	1/16W 18k ohm
R105	116-1211-15	1/8W 120 ohm
R107	033-4731-15	1/16W 47k ohm
R108	119-1031-15	1/16W 10k ohm
R109	119-1031-15	1/16W 10k ohm
R110	033-4741-15	1/16W 470k ohm
R111	033-4741-15	1/16W 470k ohm
R112	033-2731-15	1/16W 27k ohm
R113	033-2731-15	1/16W 27k ohm
R114	033-2731-15	1/16W 27k ohm
R115	033-2731-15	1/16W 27k ohm
R116	033-5611-15	1/16W 560 ohm
R117	033-5611-15	1/16W 560 ohm
R118	033-4731-15	1/16W 47k ohm
R119	033-4731-15	1/16W 47k ohm

REF No.	PART No.	DESCRIPTION
R122	033-2241-15	1/16W 220k ohm
R126	033-2221-15	1/16W 2.2k ohm
R127	033-2221-15	1/16W 2.2k ohm
R128	033-1021-15	1/16W 1k ohm
R129	033-1021-15	1/16W 1k ohm
R130	033-2221-15	1/16W 2.2k ohm
R502	033-4731-15	1/16W 47k ohm
R503	033-4731-15	1/16W 47k ohm
R505	119-4731-15	1/16W 47k ohm
R506	033-1041-15	1/16W 100k ohm
R507	033-0000-05	1/16W 0 ohm
R512	050-0145-54	1/16W 47k ohm x 4
R513	033-1041-15	1/16W 100k ohm
R514	033-2241-15	1/16W 220k ohm
R515	033-2241-15	1/16W 220k ohm
R516	033-2241-15	1/16W 220k ohm
R517	033-1041-15	1/16W 100k ohm
R518	033-2241-15	1/16W 220k ohm
R519	033-0000-05	1/16W 0 ohm
R522	033-1041-15	1/16W 100k ohm
R524	033-1041-15	1/16W 100k ohm
R526	033-4731-15	1/16W 47k ohm
R529	033-1021-15	1/16W 1k ohm
R531	033-1021-15	1/16W 1k ohm
R532	033-1021-15	1/16W 1k ohm
R533	033-1021-15	1/16W 1k ohm
R535	033-2231-15	1/16W 22k ohm
R536	033-2231-15	1/16W 22k ohm
R538	033-1031-15	1/16W 10k ohm
R539	033-5631-15	1/16W 56k ohm
R540	033-1041-15	1/16W 100k ohm
R541	033-1021-15	1/16W 1k ohm
R542	033-4721-15	1/16W 4.7k ohm
R546	033-1031-15	1/16W 10k ohm
X501	060-1505-50	10MHz

CD PWB section(B4)

REF No.	PART No.	DESCRIPTION
C1	045-1201-50	12pF
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1uF
C4	042-0636-54	4V 220uF
C5	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF
C7	168-1042-78	16V 0.1uF
C8	178-4742-78	0.47uF
C9	178-2242-78	0.22uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	168-1042-78	16V 0.1uF
C13	046-2232-78	0.022uF
C14	168-5612-55	560pF
C15	168-1042-78	16V 0.1uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF
C19	046-3322-58	3300pF
C20	168-3932-78	0.039uF
C21	168-3932-78	0.039uF
C22	042-0416-52	10V 10uF TAN
C23	045-1201-50	12pF
C25	178-1052-78	1uF

REF No.	PART No.	DESCRIPTION
C26	042-0472-91	16V 47uF
C27	178-3342-78	0.33uF
C29	168-2732-55	16V 0.027uF
C30	042-0416-58	4V 100uF
C31	042-0636-52	4V 47uF
C32	046-1022-58	1000pF
C33	046-6822-58	6800pF
C34	168-2732-55	16V 0.027uF
C35	178-2742-78	0.27uF
C36	178-1052-78	1uF
C37	168-1042-78	16V 0.1uF
C38	042-0472-91	16V 47uF
C39	042-0636-50	6.3V 100uF
C40	045-1211-50	120pF
C41	045-5601-50	56pF
C42	168-1042-78	16V 0.1uF
C43	042-0636-52	4V 47uF
C50	168-1042-78	16V 0.1uF
C51	168-1042-78	16V 0.1uF
C60	168-5612-55	560pF
C61	045-1201-50	12pF
D1	001-0516-90	MA111
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D

REF No.	PART No.	DESCRIPTION
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-2155-93	10uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/16W 100k ohm
R3	033-3311-15	1/16W 330 ohm
R4	033-6811-15	1/16W 680 ohm
R5	033-1041-15	1/16W 100k ohm
R6	033-3931-15	1/16W 39k ohm
R7	033-1041-15	1/16W 100k ohm
R8	033-5611-15	1/16W 560 ohm
R9	033-5611-15	1/16W 560 ohm
R10	033-1011-15	1/16W 100 ohm
R11	033-3911-15	1/16W 390 ohm
R12	033-2221-15	1/16W 2.2k ohm
R13	033-6831-15	1/16W 68k ohm
R14	033-5621-15	1/16W 5.6k ohm
R15	033-1021-15	1/16W 1k ohm
R16	033-5631-15	1/16W 56k ohm

REF No.	PART No.	DESCRIPTION
R17	033-1031-15	1/16W 10k ohm
R18	033-1031-15	1/16W 10k ohm
R19	033-5621-15	1/16W 5.6k ohm
R20	033-6831-15	1/16W 68k ohm
R21	033-5621-15	1/16W 5.6k ohm
R22	033-1031-15	1/16W 10k ohm
R23	033-1031-15	1/16W 10k ohm
R24	033-4731-15	1/16W 47k ohm
R25	033-3931-15	1/16W 39k ohm
R26	033-6831-15	1/16W 68k ohm
R27	033-6831-15	1/16W 68k ohm

REF No.	PART No.	DESCRIPTION
R28	033-1031-15	1/16W 10k ohm
R29	033-2201-15	1/16W 22 ohm
R31	033-8211-15	1/16W 820 ohm
R32	033-5631-15	1/16W 56k ohm
R33	033-6831-15	1/16W 68k ohm
R34	033-3331-15	1/16W 33k ohm
R35	033-6831-15	1/16W 68k ohm
R38	033-3931-15	1/16W 39k ohm
R39	033-1831-15	1/16W 18k ohm
R40	117-1001-15	1/10W 10 ohm
R41	033-6821-15	1/16W 6.8k ohm

REF No.	PART No.	DESCRIPTION
R42	033-6821-15	1/16W 6.8k ohm
R43	033-1241-15	1/16W 120k ohm
R44	033-6831-15	1/16W 68k ohm
R45	116-4711-15	1/8W 470 ohm
R46	117-1811-15	1/10W 180 ohm
R47	116-4711-15	1/8W 470 ohm
R48	033-1031-15	1/16W 10k ohm
R49	033-1011-15	1/16W 100 ohm
R60	033-1031-15	1/16W 10k ohm
TM1	073-0768-90	TERMIMAL
X2	061-3525-90	33.8688MHz

Sensor PWB section(B5)

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
PT6	060-0252-01	PT4850F
S1	013-7414-50	SPVG22

PIM-FPC section(B6)

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B7)

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF
C2	163-1073-35	16V100uF
D1	001-0529-32	MA8056-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/16W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21

PIV-FPC section(B8)

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B9)

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

LED-R-PWB section(B10)

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

L-Motor-FPC section(B11)

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B12) :

REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE
M3	SMA-184-100	SLED
S2	013-7414-50	SPVG22