


EXPLODED VIEW : PARTS LIST

Escutcheon section

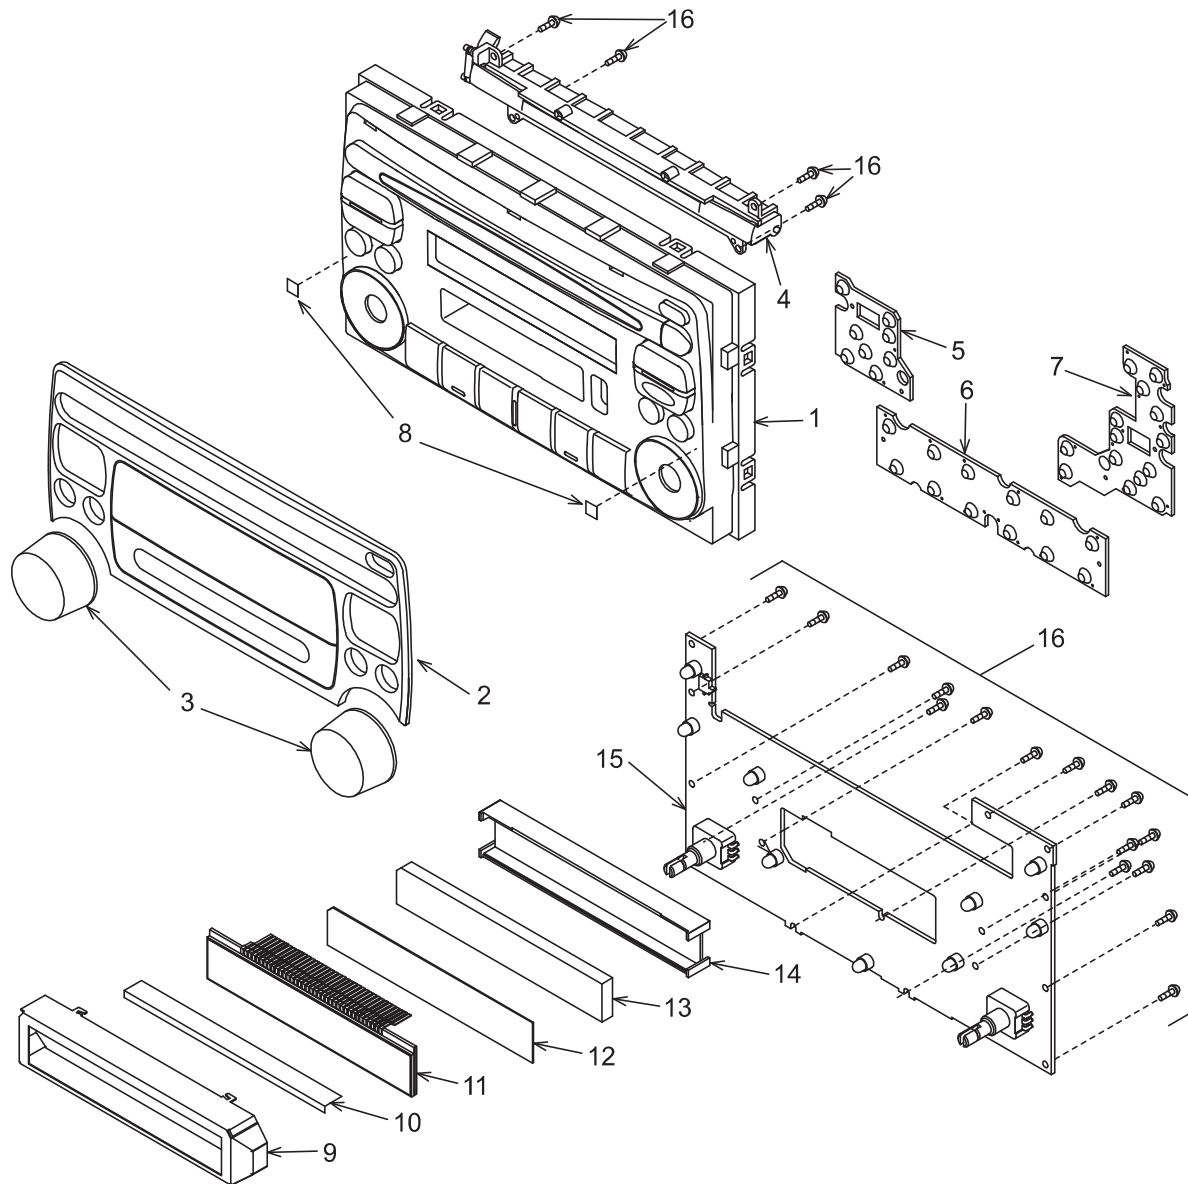


Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8011-04	ESCUTCHEON-ASSY	1	10	345-5259-00 345-5259-20	PROTECTOR PROTECTOR	1
2	373-0996-11	DIAL-CVR	1	11	379-1248-30	INDICATOR	1
3	380-5549-00	KNOB	2	12	335-6876-00	COLOR FILTER	1
4	947-0527-00	DOOR-ASSY	1	13	335-6875-00	LCD-ILLUMI	1
5	345-5196-00	RUBBER SW (A)	1	14	335-6824-00	LCD HOLDER	1
6	345-5197-00	RUBBER SW (B)	1	15	039-2197-00	SWITCH PWB (WITHOUT COMPONENT)	1
7	345-5198-00	RUBBER SW (C)	1	16	716-0778-00	WAVE SCREW (M2 x 6)	20
8	347-6937-00	DOUBLE FACE	2				
9	331-3461-00	LCD-CVR	1				

PS-2533B , D
PS-2534D

Main section

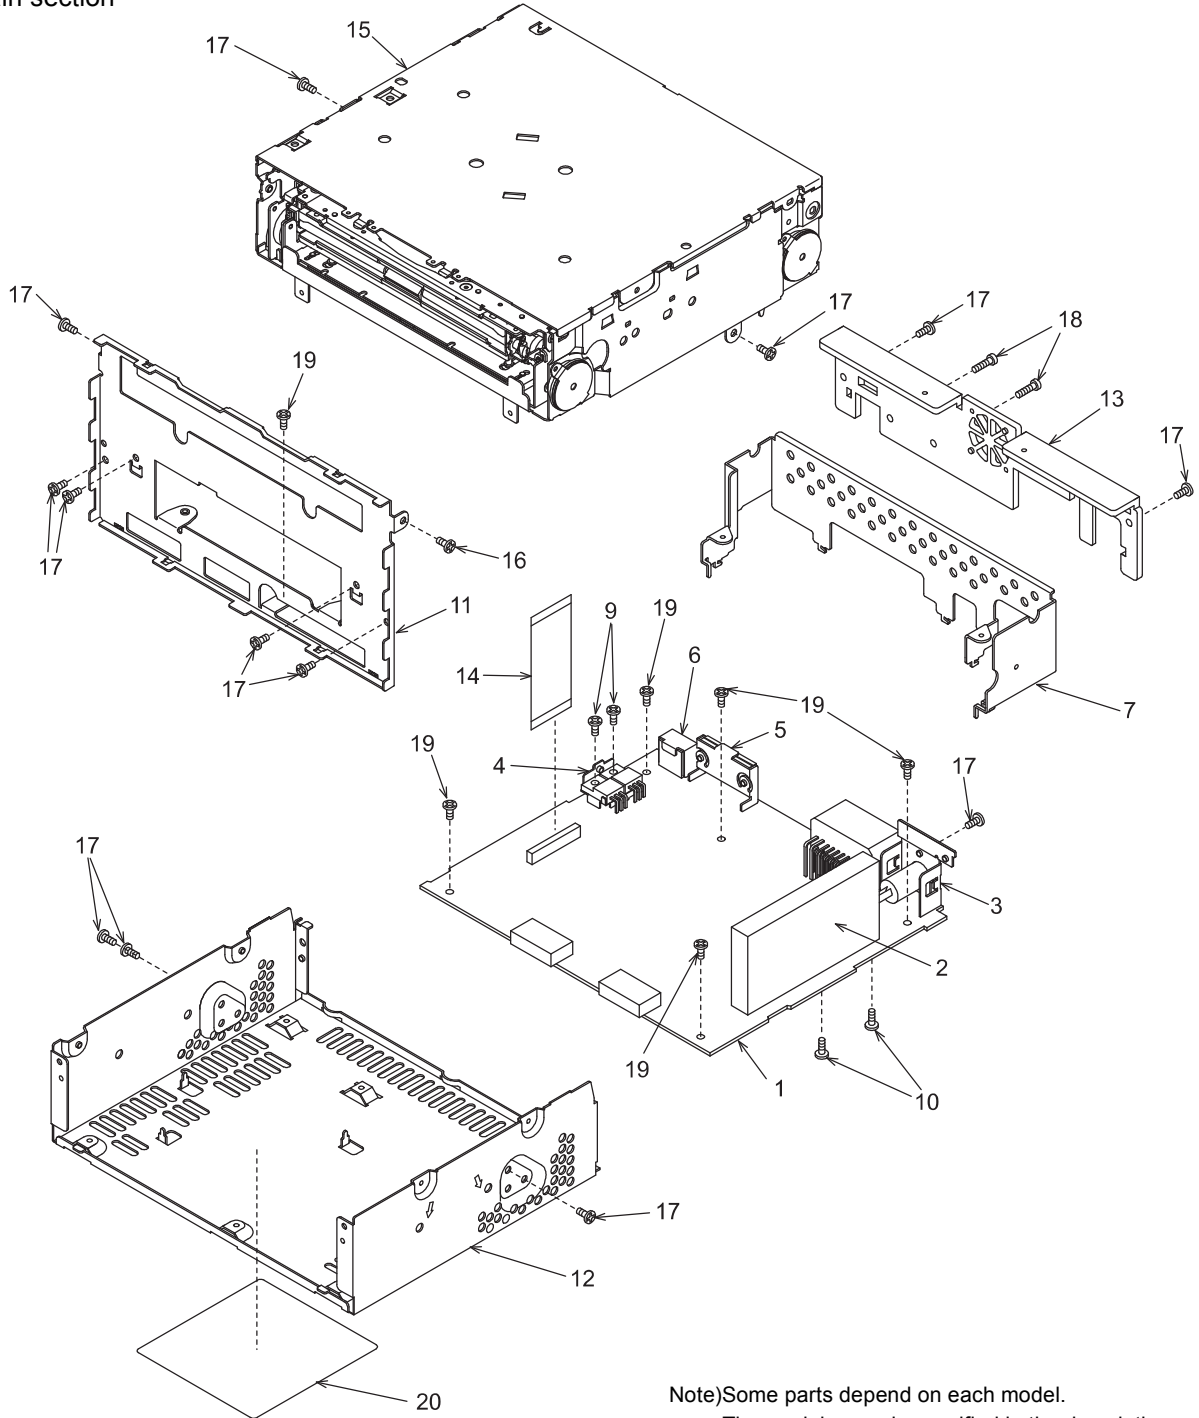


Note)Some parts depend on each model.

The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	039-2196-01	MAIN PWB (WITHOUT COMPONENT)	1
2	941-0213-62	TUNER PACK	1
3	331-3444-10	ANT HOLDER	1
4	331-3458-00	TR HOLDER	1
5	331-3459-00	IC HOLDER	1
6	331-3460-00	CONNECT HOLDER	1
7	331-3462-00	MECH BRKT	1
8	714-2606-81	MACHINE SCREW (M2.6 x 6)	1
9	716-0878-00	IT-SCREW (M2.6 x 5)	2
10	778-3006-00	TAP-SCREW (phi3 x 6)	2
11	309-0787-00	ES PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	311-1861-00	LOWER CASE	1
13	313-1856-00	HEAT SINK	1
14	816-2603-00	FLAT WIRE	1
15	-----	CD CHANGER MECHANISM (481910)	1
16	714-2003-89	MACHINE SCREW (M2x 3)	1
17	714-2606-81	MACHINE SCREW (M2.6 x 6)	12
18	714-2612-81	MACHINE SCREW (M2.6 x 12)	2
19	716-0878-00	IT-SCREW (M2.6 x 5)	6
20	286-6092-00 286-6092-04 286-6100-03	SETPLATE (PS-2533B) SETPLATE (PS-2533D) SETPLATE (PS-2534D)	1

CD changer mechanism section : Main chassis

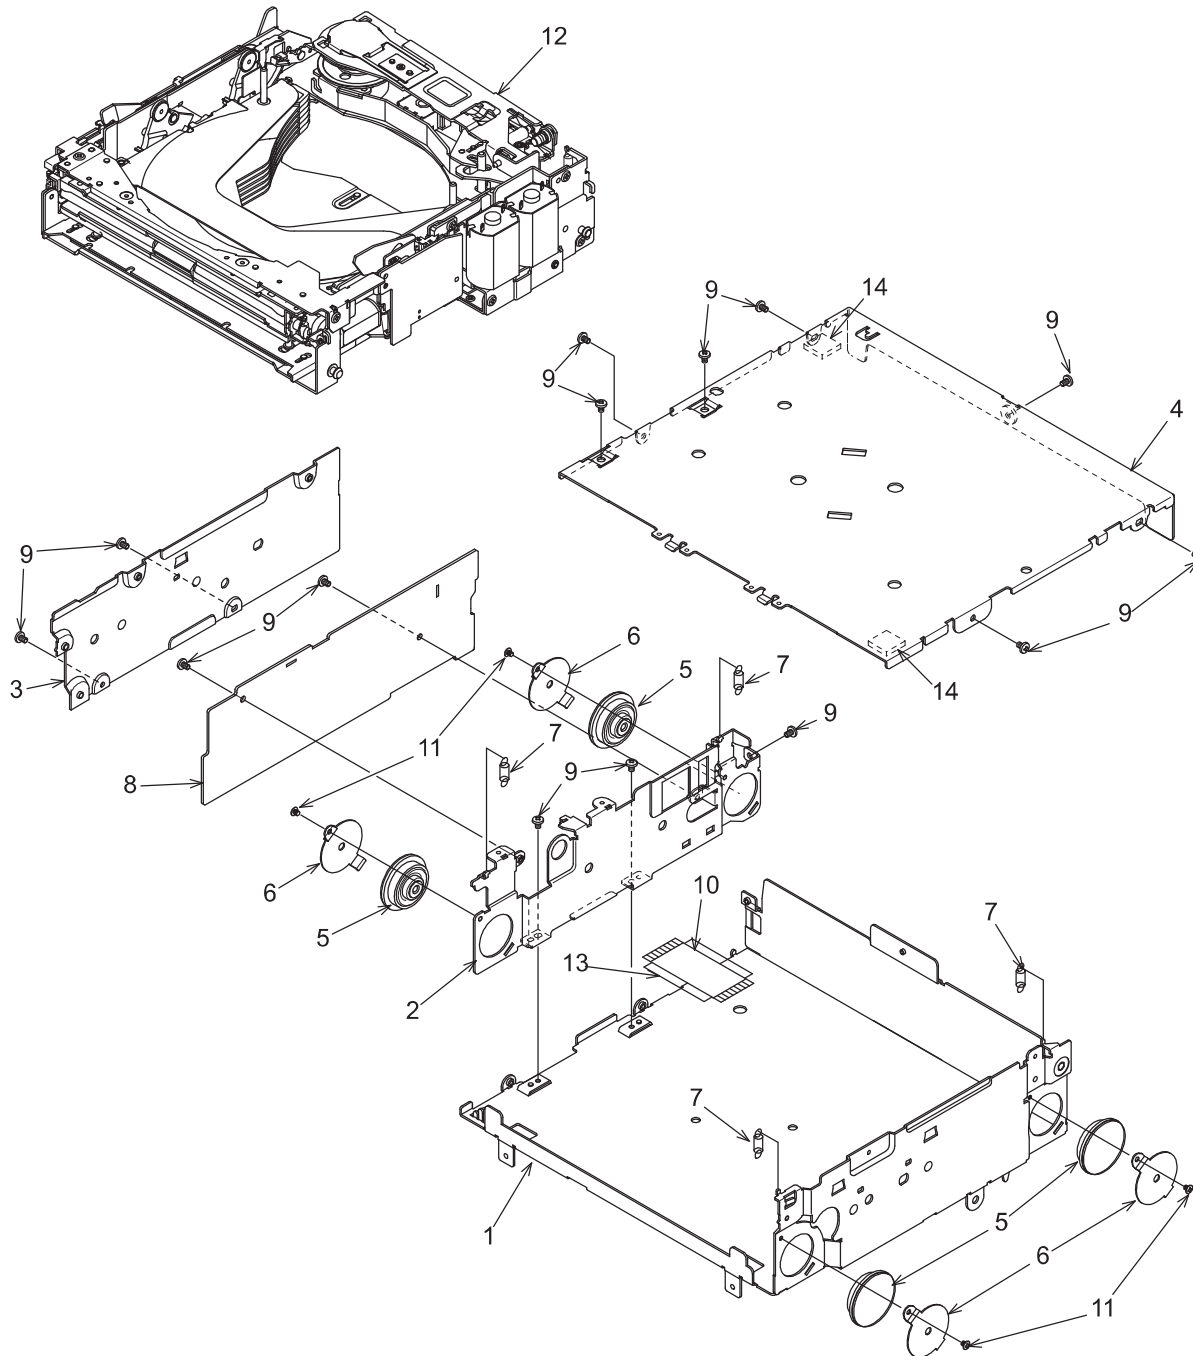


NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1864-82	LOWER CASE	1
2	331-3266-24	PWB-HOLDER	1
3	305-0315-84	SIDE CASE	1
4	310-1741-83	UPPER CASE	1
5	629-0083-00	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	1
8	039-2219-00	MAIN PWB (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
9	716-1716-00	SCREW (M2 x 3)	14
10	039-1957-01	FPC (WITHOUT COMPONENT)	1
11	716-3450-00	SCREW (M1.7 x 2)	4
12	-----	CD-CHG-MODULE	1
13	347-6619-00	INSULATOR	1
14	345-8329-00	CUSHION RUBBER	2

This is a detailed exploded view diagram of a mechanical assembly. The diagram shows the following components and sub-assemblies:

- Sub-assembly 1:** A long, thin component with various internal parts labeled J1, J2, J3, J4, J5, J6, J7, J8, J9, J10, J11, J12, J13, J14, J15, J16, J17, J18, J19, J20, J21, J22, J23, J24, J25, J26, J27, J28, J29, J30, J31, J32, J33, J34, J35, J36, J37, J38, J39, J40, J41, J42, J43, J44, J45, J46, J47, J48, J49, J50, J51, J52, J53, J54, J55, J56, J57, J58, J59, J60, J61, J62, J63, J64, J65, J66, J67, J68, J69, J70, J71, J72, J73, J74, J75, J76, J77, J78, J79, J80, J81, J82, J83, J84, J85, J86, J87, J88, J89, J90, J91, J92, J93, J94, J95, J96, J97, J98, J99, J100.
- Sub-assembly 2:** A component with parts labeled K1, K2, K3, K4, K5, K6, K7, K8, K9, K10, K11, K12, K13, K14, K15, K16, K17, K18, K19, K20, K21, K22, K23, K24, K25, K26, K27, K28, K29, K30, K31, K32, K33, K34, K35, K36, K37, K38, K39, K40, K41, K42, K43, K44, K45, K46, K47, K48, K49, K50, K51, K52, K53, K54, K55, K56, K57, K58, K59, K60, K61, K62, K63, K64, K65, K66, K67, K68, K69, K70, K71, K72, K73, K74, K75, K76, K77, K78, K79, K80, K81, K82, K83, K84, K85, K86, K87, K88, K89, K90, K91, K92, K93, K94, K95, K96, K97, K98, K99, K100.
- Sub-assembly 3:** A component with parts labeled L1, L2, L3, L4, L5, L6, L7, L8, L9, L10, L11, L12, L13, L14, L15, L16, L17, L18, L19, L20, L21, L22, L23, L24, L25, L26, L27, L28, L29, L30, L31, L32, L33, L34, L35, L36, L37, L38, L39, L40, L41, L42, L43, L44, L45, L46, L47, L48, L49, L50, L51, L52, L53, L54, L55, L56, L57, L58, L59, L60, L61, L62, L63, L64, L65, L66, L67, L68, L69, L70, L71, L72, L73, L74, L75, L76, L77, L78, L79, L80, L81, L82, L83, L84, L85, L86, L87, L88, L89, L90, L91, L92, L93, L94, L95, L96, L97, L98, L99, L100.
- Sub-assembly 4:** A component with parts labeled M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M18, M19, M20, M21, M22, M23, M24, M25, M26, M27, M28, M29, M30, M31, M32, M33, M34, M35, M36, M37, M38, M39, M40, M41, M42, M43, M44, M45, M46, M47, M48, M49, M50, M51, M52, M53, M54, M55, M56, M57, M58, M59, M60, M61, M62, M63, M64, M65, M66, M67, M68, M69, M70, M71, M72, M73, M74, M75, M76, M77, M78, M79, M80, M81, M82, M83, M84, M85, M86, M87, M88, M89, M90, M91, M92, M93, M94, M95, M96, M97, M98, M99, M100.
- Sub-assembly 5:** A component with parts labeled N1, N2, N3, N4, N5, N6, N7, N8, N9, N10, N11, N12, N13, N14, N15, N16, N17, N18, N19, N20, N21, N22, N23, N24, N25, N26, N27, N28, N29, N30, N31, N32, N33, N34, N35, N36, N37, N38, N39, N40, N41, N42, N43, N44, N45, N46, N47, N48, N49, N50, N51, N52, N53, N54, N55, N56, N57, N58, N59, N60, N61, N62, N63, N64, N65, N66, N67, N68, N69, N70, N71, N72, N73, N74, N75, N76, N77, N78, N79, N80, N81, N82, N83, N84, N85, N86, N87, N88, N89, N90, N91, N92, N93, N94, N95, N96, N97, N98, N99, N100.
- Sub-assembly 6:** A component with parts labeled O1, O2, O3, O4, O5, O6, O7, O8, O9, O10, O11, O12, O13, O14, O15, O16, O17, O18, O19, O20, O21, O22, O23, O24, O25, O26, O27, O28, O29, O30, O31, O32, O33, O34, O35, O36, O37, O38, O39, O40, O41, O42, O43, O44, O45, O46, O47, O48, O49, O50, O51, O52, O53, O54, O55, O56, O57, O58, O59, O60, O61, O62, O63, O64, O65, O66, O67, O68, O69, O70, O71, O72, O73, O74, O75, O76, O77, O78, O79, O80, O81, O82, O83, O84, O85, O86, O87, O88, O89, O90, O91, O92, O93, O94, O95, O96, O97, O98, O99, O100.
- Sub-assembly 7:** A component with parts labeled P1, P2, P3, P4, P5, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15, P16, P17, P18, P19, P20, P21, P22, P23, P24, P25, P26, P27, P28, P29, P30, P31, P32, P33, P34, P35, P36, P37, P38, P39, P40, P41, P42, P43, P44, P45, P46, P47, P48, P49, P50, P51, P52, P53, P54, P55, P56, P57, P58, P59, P60, P61, P62, P63, P64, P65, P66, P67, P68, P69, P70, P71, P72, P73, P74, P75, P76, P77, P78, P79, P80, P81, P82, P83, P84, P85, P86, P87, P88, P89, P90, P91, P92, P93, P94, P95, P96, P97, P98, P99, P100.
- Sub-assembly 8:** A component with parts labeled Q1, Q2, Q3, Q4, Q5, Q6, Q7, Q8, Q9, Q10, Q11, Q12, Q13, Q14, Q15, Q16, Q17, Q18, Q19, Q20, Q21, Q22, Q23, Q24, Q25, Q26, Q27, Q28, Q29, Q30, Q31, Q32, Q33, Q34, Q35, Q36, Q37, Q38, Q39, Q40, Q41, Q42, Q43, Q44, Q45, Q46, Q47, Q48, Q49, Q50, Q51, Q52, Q53, Q54, Q55, Q56, Q57, Q58, Q59, Q60, Q61, Q62, Q63, Q64, Q65, Q66, Q67, Q68, Q69, Q70, Q71, Q72, Q73, Q74, Q75, Q76, Q77, Q78, Q79, Q80, Q81, Q82, Q83, Q84, Q85, Q86, Q87, Q88, Q89, Q90, Q91, Q92, Q93, Q94, Q95, Q96, Q97, Q98, Q99, Q100.
- Sub-assembly 9:** A component with parts labeled R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100.
- Sub-assembly 10:** A component with parts labeled S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S13, S14, S15, S16, S17, S18, S19, S20, S21, S22, S23, S24, S25, S26, S27, S28, S29, S30, S31, S32, S33, S34, S35, S36, S37, S38, S39, S40, S41, S42, S43, S44, S45, S46, S47, S48, S49, S50, S51, S52, S53, S54, S55, S56, S57, S58, S59, S60, S61, S62, S63, S64, S65, S66, S67, S68, S69, S70, S71, S72, S73, S74, S75, S76, S77, S78, S79, S80, S8


CD changer mechanism section : Main module 2/2

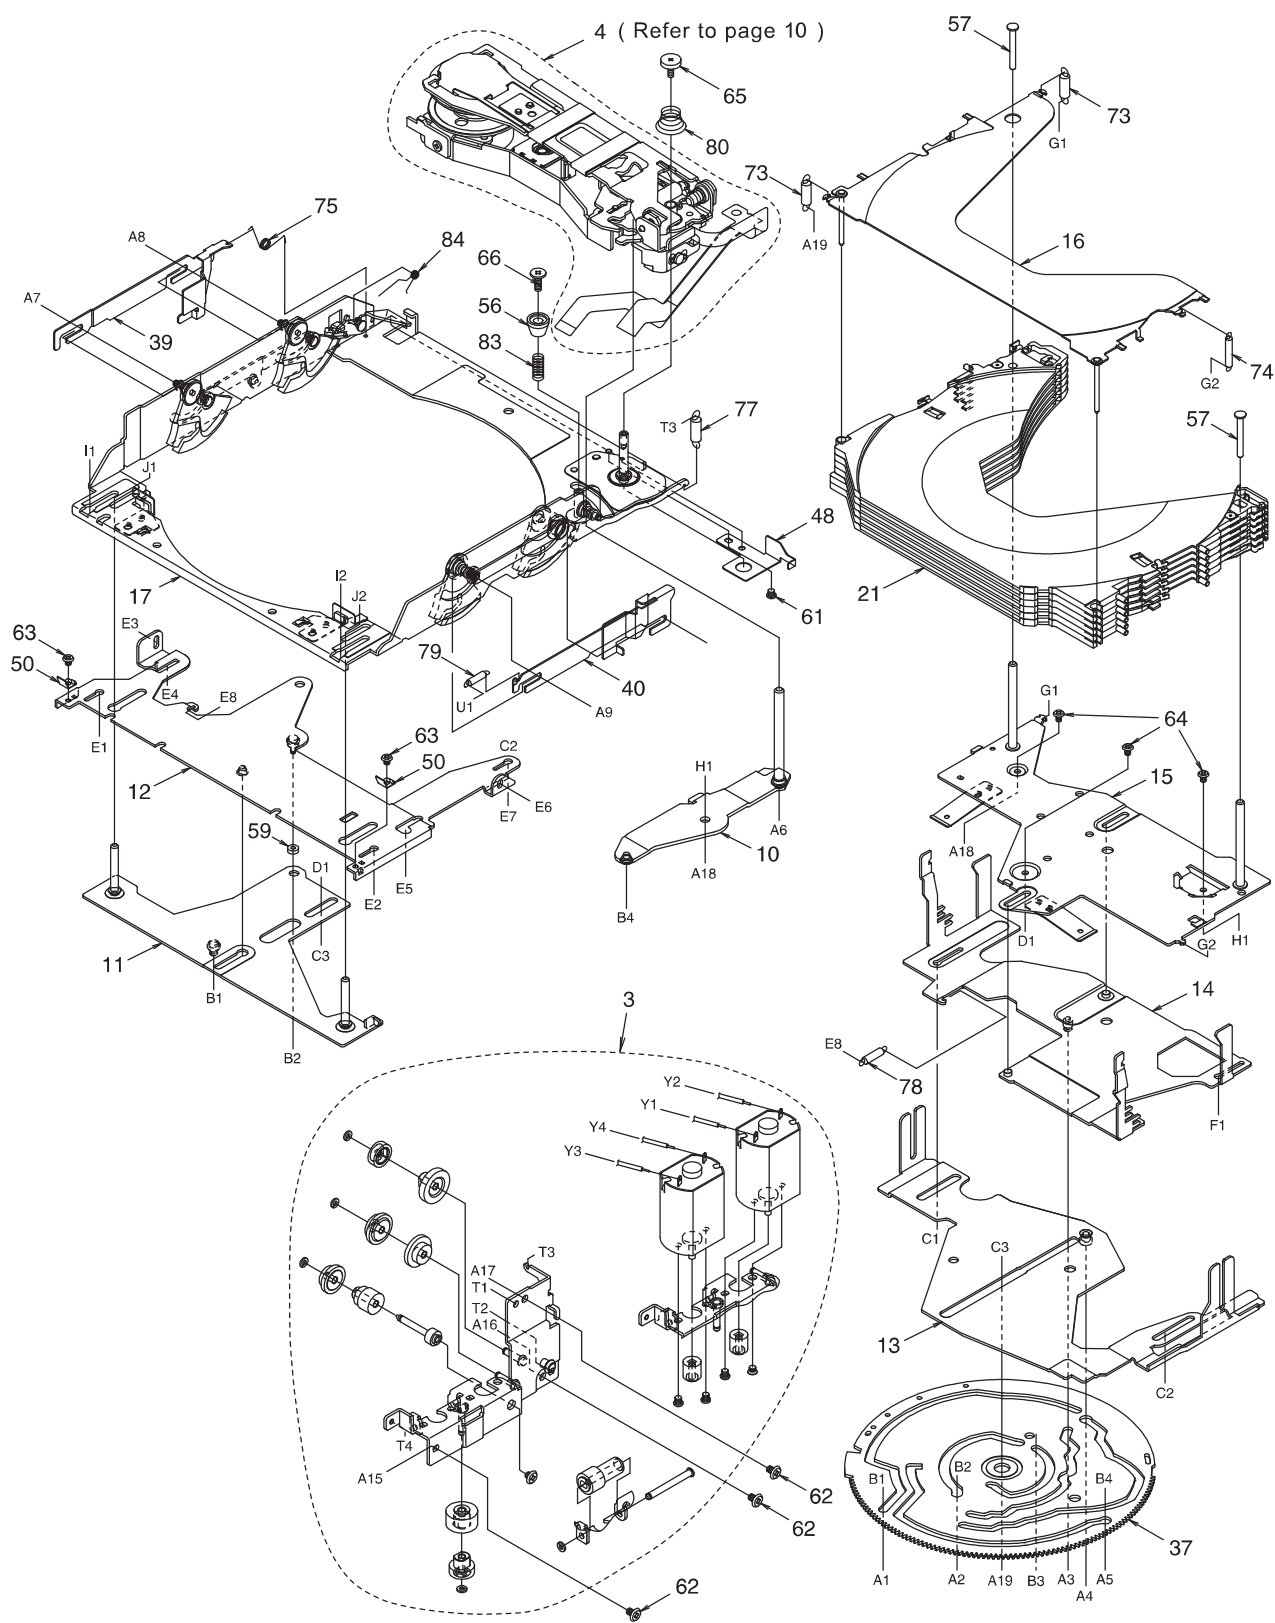

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-511-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1
4	HBS-513-103	DRIVE UNIT	1
5	039-1951-00	CD PWB (WITHOUT COMPONENT)	1
6	039-1953-00	DRIVER PWB (WITHOUT COMPONENT)	1
7	966-0597-02	CHASSIS ASSY	1
8	966-0600-01	LOCK-P-RE-ASSY	1
9	966-0601-00	M-GEAR-P-ASSY	1
10	966-0602-02	DR-LINK-ASSY	1
11	966-0603-00	MODE-P-ASSY	1
12	966-0604-02	LOCK-PF-ASSY	1
13	966-0605-00	SHIFT-P-ASSY	1
14	966-0606-02	HLC-PLATE-ASSY	1
15	966-0607-03	COV-OLATE-ASSY	1
16	966-0610-03	TOP-PLATE-ASSY	1
17	966-0611-85	DR-BASE-P-ASSY	1
18	966-0615-81	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-03	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	039-1954-00	LED-L-PWB (WITHOUT COMPONENT)	1
25	039-1955-00	LED-R-PWB (WITHOUT COMPONENT)	1
26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
27	039-2009-00	PIM FPC	1
28	039-2010-00	RIV-FOC	1
29	039-2011-00	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-00	MOS-FPC	1
32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-03	GEAR PLATE	1
38	620-1042-00	M-GEAR-H	1
39	620-1056-21	HLR-PLATE-L	1
40	620-1057-21	HLR-PLATE-R	1
41	620-1063-00	LO-MOTOR-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-81	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-20	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1073-00	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1
49	620-1090-00	GAP PLATE	1
50	620-1568-00	RATTLE PLATE-F	2
51	621-0640-00	V-GEAR-G	1
52	621-0641-01	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-00	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-02	DU-STP-SLEEVE	1
57	622-1650-02	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW (M1.7 x 3)	4
61	716-1873-00	SCREW (M2 x 1.6)	1
62	716-3449-00	SCREW (M2 x 3)	15
63	716-3450-00	SCREW (M1.7 x 2)	4
64	716-3451-00	SCREW (M1.7 x 2.5)	4
65	716-3459-00	SCREW (M1.7 x 5)	1
66	716-3466-02	SCREW	1
67	738-1420-17	PRECISION SCREW	2
68	743-1200-20	E-RING	2
69	743-1500-10	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-03	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-00	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	347-6974-00	FPC COVER	1

CD changer mechanism section : Drive unit

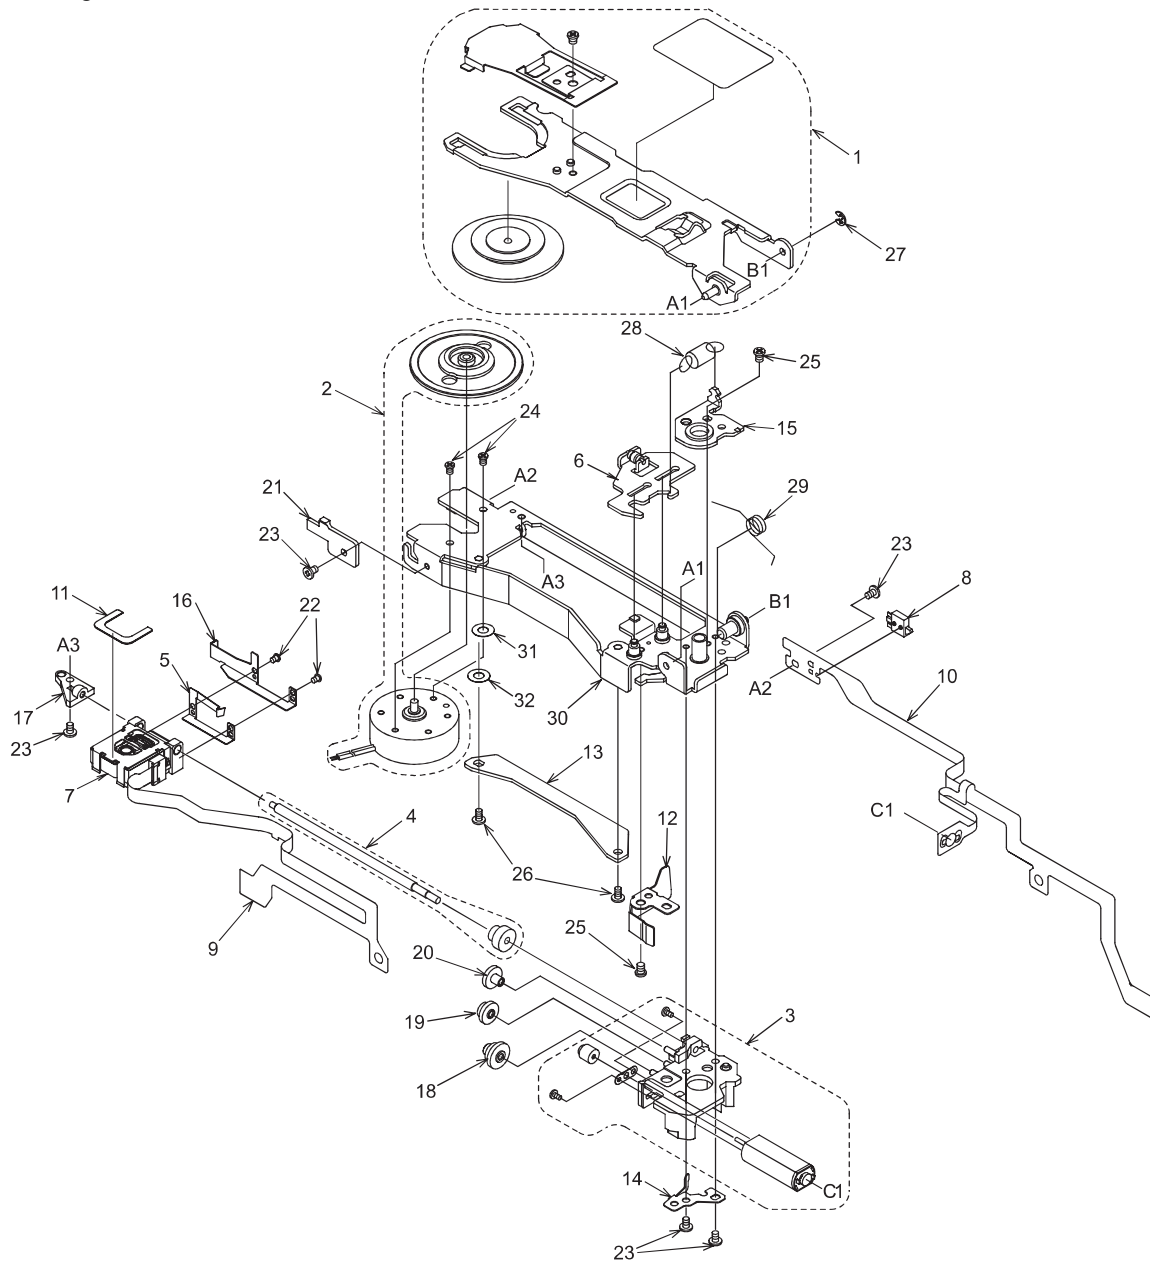

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1	17	621-0670-20	LS-HOLDER-L	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1	18	621-0673-00	D-GEAR A	1
3	SMA-184-100	SLED MOTOR ASSY	1	19	621-0674-00	D-GEAR B	1
4	HBS-515-101	LS-ASSY	1	20	621-0675-00	D-GEAR C	1
5	620-1587-80	SH-SPRING	1	21	621-0683-21	DU-STOPPER	1
6	966-0622-02	D-SHIFT-P-ASSY	1	22	716-3460-00	SCREW (M1.4 x 1.8)	2
7	969-0009-00	PICK UP-ASSY	1	23	716-3470-00	SCREW (M1.7 x 3)	5
8	013-7414-50	DETECT SWITCH	1	24	738-1722-17	PRECISION SCREW	2
9	039-2015-01	P/U-FPC	1	25	738-2025-17	PRECISION SCREW	2
10	039-2016-01	M/S-FPC	1	26	716-3474-00	SCREW (M1.7 x 3)	2
11	347-6632-00	PU-SHEET	1	27	743-1500-20	E-RING	1
12	620-1078-00	PUSH PLATE	1	28	750-3487-00	SHIFT-P-SPRING	1
13	620-1080-01	PU-GUIDE PLATE	1	29	750-3488-00	CLAMP-A-SPRING	1
14	620-1081-00	SCREW PUSH-PLT	1	30	966-0619-84	DRIVE PLT-ASSY	1
15	620-1082-01	SPRING PLATE	1	31	745-0807-00	WASHER	1
16	620-1588-00	SCREW-HOL-PLT	1	32	745-0808-00	WASHER	1

PS-2533B , D
PS-2534D

ELECTRICAL PARTS LIST

Note)Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Main PWB(B1) section

Some parts depend on each model.The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT	C634	168-1042-78	16V 0.1uF	D205	001-0347-48	MA4091H
BL101	941-0213-62	AM/FM TUNER	C635	168-1042-78	16V 0.1uF	D301	001-0347-69	MA4180M
C107	168-2232-55	0.022uF	C640	168-1022-55	1000pF	D302	001-0454-91	MA700A
C109	178-4742-78	0.47uF	C641	168-1022-55	1000pF	D303	001-0454-91	MA700A
C113	184-1073-29	10V 100uF	C642	168-1022-55	1000pF	D304	001-0347-69	MA4180M
C114	168-1042-78	16V 0.1uF	C643	168-1022-55	1000pF	D306	001-0529-25	MA8047-L
C115	168-1042-78	16V 0.1uF	C644	183-1066-38	16V 10uF NP	D308	001-0347-69	MA4180M
C116	168-1042-78	16V 0.1uF	C645	183-1066-38	16V 10uF NP	D310	001-0516-90	MA111
C117	166-1801-50	18pF CH	C646	168-3332-78	0.033uF	D312	001-0516-90	MA111
C118	166-1801-50	18pF CH	C647	168-4732-78	0.047uF	D314	001-0466-90	S5688B
C119	183-1073-29	10V100uF			(PS-2533B , D)	D316	001-0504-36	HZS7 A1L
C120	168-2232-55	0.022uF	C647	168-3332-78	0.033uF	D402	001-0347-37	MA4068L
C121	166-1011-50	100pF CH			(PS-2534D)	D403	001-0347-43	MA4082L
C122	166-1011-50	100pF CH	C648	168-4732-78	0.047uF	D701	001-0529-25	MA8047-L
C123	042-0458-90	50V1uF			(PS-2533B , D)	D702	001-0516-90	MA111
C124	168-2232-55	0.022uF	C648	168-3332-78	0.033uF	D803	001-0347-48	MA4091H
C125	183-4763-39	16V47uF			(PS-2534D)	D804	001-0516-90	MA111
C126	168-1022-55	1000pF	C653	168-4732-78	0.047uF	D805	001-0466-90	S5688B
C127	183-4763-39	16V47uF	C654	168-4732-78	0.047uF	D806	001-0466-90	S5688B
C128	166-1011-50	100pF CH	C655	178-1052-78	1uF	D807	001-0466-90	S5688B
C129	166-1011-50	100pF CH	C656	183-1066-38	16V 10uF NP	D808	001-2015-00	RL253
C131	168-2232-55	0.022uF	C657	178-1052-78	1uF	IC102	051-6212-08	LC72191JM-TLM
C132	166-1011-50	100pF CH	C658	178-1052-78	1uF	IC301	051-6600-38	CA0008AM
C133	166-1011-50	100pF CH	C659	183-1066-38	16V 10uF NP	IC302	052-3176-01	M30620MCA-5NPGP
C134	178-4742-78	0.47uF	C660	178-1052-78	1uF			
C214	183-1073-29	10V 100uF	C661	168-4732-78	0.047uF	IC303	051-0869-58	NJM2103M
C215	183-4763-19	6.3V 47uF	C662	168-4732-78	0.047uF	IC601	051-5027-00	LC75412WH
C216	168-1042-78	16V 0.1uF	C663	183-1063-39	16V 10uF	IC602	051-5819-00	LC75281E
C301	168-1032-55	0.01uF	C664	183-1063-39	16V 10uF	IC702	051-2040-00	TA8276H
C302	168-1042-78	16V 0.1uF	C665	168-1032-55	0.01uF	J203	074-1192-22	22P
C303	183-4763-19	6.3V 47uF	C666	168-1032-55	0.01uF	J301	074-1194-00	13P CE-NET
C304	168-1032-55	0.01uF	C667	168-1032-55	0.01uF	J801	074-1166-01	20P
C305	168-1032-55	0.01uF	C668	168-1032-55	0.01uF	L103	010-6009-76	22uH
C306	168-1032-55	0.01uF	C669	183-1063-39	16V 10uF	L104	010-6009-76	22uH
C309	183-1053-69	50V1uF	C670	183-1063-39	16V 10uF	L202	010-6009-76	22uH
C311	168-1022-55	1000pF	C671	168-2222-55	2200pF	L301	010-6009-76	22uH
C312	168-1022-55	1000pF	C672	168-2222-55	2200pF	L302	010-6009-76	22uH
C313	168-1042-78	16V 0.1uF	C673	168-2222-55	2200pF	P401	076-0540-12	12P
C316	042-0576-00	5.5V 0.1F	C674	168-2222-55	2200pF	P402	076-0540-12	12P
C318	183-1073-29	10V 100uF	C675	183-1063-39	16V 10uF	Q105	192-2712-51	2SC2712G,L
C319	168-1042-78	16V 0.1uF	C676	183-1063-39	16V 10uF	Q106	192-2712-51	2SC2712G,L
C320	183-4763-39	16V 47uF	C677	168-1022-55	1000pF	Q108	191-1240-00	2SB1240
C403	183-1063-39	16V 10uF	C678	168-1022-55	1000pF	Q109	191-1240-00	2SB1240
C404	183-1073-29	10V 100uF	C679	168-1022-55	1000pF	Q110	191-1240-00	2SB1240
C601	163-1063-35	16V 10uF	C680	183-1063-39	16V 10uF	Q214	103-2012-00	2SD2012
C602	163-1063-35	16V 10uF	C681	183-1063-39	16V 10uF	Q215	103-2012-00	2SD2012
C603	183-2253-67	50V 2.2uF	C682	168-1022-55	1000pF	Q216	192-2712-00	2SD2712
C604	168-2732-55	16V 0.027uF	C683	183-1063-39	16V 10uF	Q217	190-1428-00	2SA1428
		(PS-2533B , D)	C684	183-4763-39	16V 47uF	Q218	192-2712-00	2SC2712
C604	168-3332-78	0.033uF	C685	168-1032-55	0.01uF	Q219	125-0002-92	RN2402
		(PS-2534D)	C730	168-1042-78	16V 0.1uF	Q220	125-2004-92	RN1402
C605	168-2732-55	16V 0.027uF	C731	168-1042-78	16V 0.1uF	Q221	192-2712-00	2SC2712
		(PS-2533B , D)	C732	168-1042-78	16V 0.1uF	Q222	125-0002-92	RN2402
C605	168-3332-78	0.033uF	C733	168-1042-78	16V 0.1uF	Q301	192-2712-00	2SC2712
		(PS-2534D)	C734	183-1053-69	50V 1uF	Q304	192-2712-00	2SC2712
C606	183-2253-67	50V 2.2uF	C735	183-1063-39	16V 10uF	Q308	192-2712-00	2SC2712
C607	163-1063-35	16V 10uF	C736	168-1042-78	16V 0.1uF	Q311	191-1240-00	2SB1240
C608	163-1063-35	16V 10uF	C737	183-1063-39	16V 10uF	Q312	192-2712-00	2SC2712
C610	168-4712-55	470pF	C738	183-1053-69	50V 1uF	Q320	193-2118-50	2SD2118F5
C611	168-4712-55	470pF	C806	183-4763-39	16V 47uF	Q404	125-0002-92	RN2402
C619	183-4763-37	16V 47uF	C807	183-1073-29	10V 100uF	Q405	125-2004-92	RN1402
C620	183-4763-17	6.3V 47uF	C809	172-1041-15	0.1uF	Q407	192-2712-00	2SC2712
C622	178-5642-78	0.56uF	C810	183-1053-69	50V 1uF	Q409	193-2118-00	2SD2118
C623	178-5642-78	0.56uF	C813	042-0586-00	16V 4700uF	Q701	125-2004-92	RN1402
C626	183-1053-69	50V 1uF	C814	172-1041-15	0.1uF	Q702	125-2004-92	RN1402
C627	183-1053-69	50V 1uF	C816	183-4763-39	16V 47uF	Q703	125-2004-92	RN1402
C632	168-1042-78	16V 0.1uF	C817	172-1041-15	0.1uF	Q705	192-2712-00	2SC2712
C633	168-1042-78	16V 0.1uF	CCT301	050-0140-54	1/32W 1k ohm x 4J	Q802	192-2712-00	2SC2712

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q804	193-2118-00	2SD2118	R320	119-4721-15	1/16W 4.7k ohm	R417	119-4721-15	1/16W 4.7k ohm
Q805	192-2712-00	2SC2712	R321	-----	NO USED	R601	119-3331-15	1/16W 33k ohm
Q807	125-0002-92	RN2402			(PS-2533B , D)	R602	119-3331-15	1/16W 33k ohm
Q808	125-2004-92	RN1402	R321	119-0000-05	1/16W 0 ohm JW	R605	119-4721-15	1/16W 4.7k ohm
Q809	191-1240-00	2SB1240			(PS-2534D)	R606	119-1031-15	1/16W 10k ohm
Q810	192-2712-00	2SC2712	R322	119-0000-05	1/16W 0 ohm JW			(PS-2533B , D)
R107	119-0000-05	1/16W 0 ohm JW			(PS-2533B , D)	R606	119-1531-15	1/16W 15k ohm
R108	119-5621-15	1/16W 5.6k ohm	R322	-----	NO USED			(PS-2534D)
R112	119-2221-15	1/16W 2.2k ohm			(PS-2534D)	R607	119-1031-15	1/16W 10k ohm
R115	119-2221-15	1/16W 2.2k ohm	R323	119-0000-05	1/16W 0 ohm JW			(PS-2533B , D)
R116	119-2231-15	1/16W 22k ohm			(PS-2533B , D)	R607	119-1531-15	1/16W 15k ohm
R117	111-1001-94	1/4W 10 ohm	R323	-----	NO USED			(PS-2534D)
	111-1001-98	1/4W 10 ohm			(PS-2534D)	R608	119-4721-15	1/16W 4.7k ohm
R119	119-5631-15	1/16W 56k ohm	R324	-----	NO USED	R611	119-3331-15	1/16W 33k ohm
R120	119-3321-15	1/16W 3.3k ohm			(PS-2533B , D)	R612	119-3331-15	1/16W 33k ohm
R121	119-2221-15	1/16W 2.2k ohm	R324	119-0000-05	1/16W 0 ohm JW	R615	119-1221-15	1/16W 1.2k ohm
R122	119-4721-15	1/16W 4.7k ohm			(PS-2534D)	R616	119-1221-15	1/16W 1.2k ohm
R123	119-1021-15	1/16W 1k ohm	R326	119-0000-05	1/16W 0 ohm JW	R620	119-1051-15	1/16W 1M ohm
R124	119-5121-15	1/16W 5.1k ohm	R328	119-0000-05	1/16W 0 ohm JW	R729	119-1031-15	1/16W 10k ohm
R125	119-1041-15	1/16W 100k ohm	R329	119-0000-05	1/16W 0 ohm JW	R730	117-1021-15	1/10W 1k ohm
R126	119-2221-15	1/16W 2.2k ohm	R332	119-0000-05	1/16W 0 ohm JW	R731	116-4721-15	1/8W 4.7k ohm
R128	119-1021-15	1/16W 1k ohm	R334	119-1031-15	1/16W 10k ohm	R732	119-2231-15	1/16W 22k ohm
R129	119-1021-15	1/16W 1k ohm	R335	119-4731-15	1/16W 47k ohm	R733	119-8221-15	1/16W 8.2k ohm
R131	119-1031-15	1/16W 10k ohm	R336	119-4731-15	1/16W 47k ohm	R734	119-2221-15	1/16W 2.2k ohm
R132	119-1031-15	1/16W 10k ohm	R337	119-4731-15	1/16W 47k ohm	R735	119-2221-15	1/16W 2.2k ohm
R133	119-2221-15	1/16W 2.2k ohm	R338	119-4731-15	1/16W 47k ohm	R736	119-2221-15	1/16W 2.2k ohm
R134	119-2221-15	1/16W 2.2k ohm	R339	117-2231-15	1/10W 22k ohm	R737	119-2221-15	1/16W 2.2k ohm
R135	119-1031-15	1/16W 10k ohm	R340	111-6801-94	1/4W 68 ohm	R738	119-2221-15	1/16W 2.2k ohm
R136	119-0000-05	1/16W 0 ohm JW		111-6801-98	1/4W 68 ohm	R739	119-4731-15	1/16W 47k ohm
R137	119-3311-15	1/16W 330 ohm	R341	117-2231-15	1/10W 22k ohm	R740	119-4731-15	1/16W 47k ohm
		(PS-2533B , D)	R342	119-1031-15	1/16W 10k ohm	R801	119-1031-15	1/16W 10k ohm
R137	119-0000-05	1/16W 0 ohm JW	R344	117-5621-15	1/10W 5.6k ohm	R802	119-1041-15	1/16W 100k ohm
		(PS-2534D)	R345	119-2231-15	1/16W 22k ohm	R804	119-1031-15	1/16W 10k ohm
R140	119-1041-15	1/16W 100k ohm	R346	117-1021-15	1/10W 1k ohm	R807	119-8231-15	1/16W 82k ohm
R231	116-2291-15	1/8W 2.2 ohm	R348	119-2231-15	1/16W 22k ohm	R808	119-1231-15	1/16W 12k ohm
R232	116-2291-15	1/8W 2.2 ohm	R352	119-6831-15	1/16W 68k ohm	R809	119-1031-15	1/16W 10k ohm
R236	119-3321-15	1/16W 3.3k ohm	R354	119-3341-15	1/16W 330k ohm	R810	119-1041-15	1/16W 100k ohm
R237	111-1511-81	1/2W 150 ohm	R355	119-6831-15	1/16W 68k ohm	R811	119-1031-15	1/16W 10k ohm
R238	119-2231-15	1/16W 22k ohm	R356	119-4731-15	1/16W 47k ohm	R813	119-8231-15	1/16W 82k ohm
R240	116-4711-15	1/8W 470 ohm	R357	111-1211-94	1/4W 120 ohm	R814	119-1231-15	1/16W 12k ohm
R241	119-1031-15	1/16W 10k ohm		111-1211-98	1/4W 120 ohm	R815	116-4711-15	1/8W 470 ohm
R242	119-5631-15	1/16W 56k ohm	R361	119-1021-15	1/16W 1k ohm	R816	111-5621-94	1/4W 5.6k ohm
R243	117-4721-15	1/10W 4.7k ohm	R363	119-1031-15	1/16W 10k ohm		111-5621-98	1/4W 5.6k ohm
R244	116-4711-15	1/8W 470 ohm	R364	119-1021-15	1/16W 1k ohm	R817	116-2221-15	1/8W 2.2k ohm
R245	119-2231-15	1/16W 22k ohm	R365	119-1031-15	1/16W 10k ohm	R818	117-1031-15	1/10W 10k ohm
R246	119-2231-15	1/16W 22k ohm	R366	119-2221-15	1/16W 2.2k ohm	R819	116-2221-15	1/8W 2.2k ohm
R306	119-1031-15	1/16W 10k ohm	R370	116-1001-15	1/8W 10 ohm	R820	119-3321-15	1/16W 3.3k ohm
R307	119-4721-15	1/16W 4.7k ohm	R371	119-4721-15	1/16W 4.7k ohm	R821	119-1031-15	1/16W 10k ohm
R308	119-4721-15	1/16W 4.7k ohm	R372	119-4721-15	1/16W 4.7k ohm	R831	114-2291-11	1W 2.2 ohm
R309	119-4721-15	1/16W 4.7k ohm	R379	117-6821-15	1/10W 6.8k ohm	SUP101	060-0122-20	SURGE-PROTEC-
R310	119-4731-15	1/16W 47k ohm	R405	116-1021-15	1/8W 1k ohm			TOR
R311	119-4731-15	1/16W 47k ohm	R406	119-2231-15	1/16W 22k ohm	T801	009-0670-00	CHOKO 180uH
R312	119-4731-15	1/16W 47k ohm	R407	119-2231-15	1/16W 22k ohm	TH801	002-0222-90	PTH61G30BD
R313	119-4731-15	1/16W 47k ohm	R408	116-1591-15	1/8W 1.5 ohm	TM101	073-0762-90	TERMINAL
R314	119-4721-15	1/16W 4.7k ohm	R411	111-1501-81	1/2W 15 ohm	TM102	073-0762-90	TERMINAL
R316	119-1021-15	1/16W 1k ohm	R412	119-0000-05	1/16W 0 ohm JW	TM103	073-0762-90	TERMINAL
R317	119-0000-05	1/16W 0 ohm JW	R413	119-0000-05	1/16W 0 ohm JW	TM104	073-0762-90	TERMINAL
R318	119-1021-15	1/16W 1k ohm	R414	119-4721-15	1/16W 4.7k ohm	X101	061-1066-80	7.2MHz
R319	119-4721-15	1/16W 4.7k ohm	R415	119-4721-15	1/16W 4.7k ohm	X301	060-1533-90	10MHZ

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF			PS-2533B(AMBER)			PS-2533D(WHITE)
C902	168-4732-78	0.047uF	PL901	017-0429-18	8V 105mA(AMBER)			PS-2534D(WHITE)
C903	168-4732-78	0.047uF	PL902	017-0420-35	14V 40mA(AMBER)	PL901	017-0429-20	8V 105mA(BLUE)
C904	168-8212-55	820pF	PL903	017-0429-18	8V 105mA(AMBER)	PL902	017-0420-38	14V 40mA(BLUE)
IC901	051-6000-20	LC7583NW	PL904	017-0420-18	14V 40mA(AMBER)	PL903	017-0429-20	8V 105mA(BLUE)
J901	074-1151-12	12P	PL905	017-0420-18	14V 40mA(AMBER)	PL904	017-0420-38	14V 40mA(BLUE)
J902	074-1151-12	12P	PL906	017-0420-18	14V 40mA(AMBER)	PL905	017-0420-38	14V 40mA(BLUE)
L901	010-2323-82	NL252018T-220J	PL907	017-0420-18	14V 40mA(AMBER)	PL906	017-0420-38	14V 40mA(BLUE)
LCD901	379-1248-30	INDICATOR	PL908	017-0420-18	14V 40mA(AMBER)	PL907	017-0420-38	14V 40mA(BLUE)
			PL909	017-0420-18	14V 40mA(AMBER)	PL908	017-0420-38	14V 40mA(BLUE)
						PL909	017-0420-38	14V 40mA(BLUE)

PS-2533B , D
PS-2534D

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q901	192-2712-00	2SC2712	R907	119-0000-05	1/16W 0 ohm JW	R916	119-0000-05	1/16W 0 ohm JW
R901	119-4731-15	1/16W 47k ohm	R910	119-6831-15	1/16W 68k ohm	S901	013-7415-50	DETECTOR-SW
R904	119-0000-05	1/16W 0 ohm JW	R911	119-0000-05	1/16W 0 ohm JW	VR901	016-0014-09	ROTALY ENCODER
R905	119-0000-05	1/16W 0 ohm JW	R912	119-1021-15	1/16W 1k ohm	VR902	016-0014-09	ROTALY ENCODER
R906	119-0000-05	1/16W 0 ohm JW	R914	119-0000-05	1/16W 0 ohm JW			

CD changer maechanism section

CD Main PWB section(B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF	IC504	051-1407-90	NJM4556AM	R122	033-2241-15	1/16W 220k ohm
C102	046-1032-78	0.01uF	J101	074-1189-95	45P	R126	033-2221-15	1/16W 2.2k ohm
C104	163-1073-15	6.3V 100uF	J102	074-1191-22	22P	R127	033-2221-15	1/16W 2.2k ohm
C106	163-1063-35	16V 10uF	L101	010-3071-65	18uH	R128	033-1021-15	1/16W 1k ohm
C107	163-1073-15	6.3V 100uF	L102	010-2199-80	33uH J	R129	033-1021-15	1/16W 1k ohm
C108	168-1042-78	16V 0.1uF	P101	076-0478-55	PLUG	R130	033-2221-15	1/16W 2.2k ohm
C109	168-1042-78	16V 0.1uF	Q101	125-2004-92	RN1402	R502	033-4731-15	1/16W 47k ohm
C110	168-1042-78	16V 0.1uF	Q102	131-1188-50	2SB1188PQR	R503	033-4731-15	1/16W 47k ohm
C111	163-1073-35	16V 100uF	Q103	193-1758-00	2SD1758TK-P,Q,R	R505	119-4731-15	1/16W 47k ohm
C112	168-2722-55	2700pF	Q104	193-1758-00	2SD1758TK-P,Q,R	R506	033-1041-15	1/16W 100k ohm
C113	163-2263-35	16V 22uF	Q105	125-0014-92	DTA114EK	R507	033-0000-05	1/16W 0 ohm
C114	163-2263-35	16V 22uF	Q106	125-2004-92	RN1402	R512	050-0145-54	1/16W 47k ohm x 4
C115	046-3312-58	330pF	Q505	125-2004-92	RN1402	R513	033-1041-15	1/16W 100k ohm
C116	046-3312-58	330pF	Q506	125-0014-92	DTA114EK	R514	033-2241-15	1/16W 220k ohm
C117	045-1011-50	100pF	Q507	125-0002-92	RN2402	R515	033-2241-15	1/16W 220k ohm
C118	045-1011-50	100pF	Q508	192-2712-00	2SC2712	R516	033-2241-15	1/16W 220k ohm
C119	168-2722-55	2700pF	Q509	125-2004-92	RN1402	R517	033-1041-15	1/16W 100k ohm
C120	046-1022-58	1000pF	R101	119-4711-15	1/16W 470 ohm	R518	033-2241-15	1/16W 220k ohm
C121	163-2263-35	16V 22uF	R102	033-2231-15	1/16W 22k ohm	R519	033-0000-05	1/16W 0 ohm
C122	046-1022-58	1000pF	R103	119-1821-15	1/16W 1.8k ohm	R522	033-1041-15	1/16W 100k ohm
C123	163-2263-35	16V 22uF	R104	033-1831-15	1/16W 18k ohm	R524	033-1041-15	1/16W 100k ohm
C124	042-0403-55	16V 33uF	R105	116-1211-15	1/8W 120 ohm	R526	033-4731-15	1/16W 47k ohm
C125	042-0403-55	16V 33uF	R107	033-4731-15	1/16W 47k ohm	R529	033-1021-15	1/16W 1k ohm
C502	168-1045-56	0.1uF	R108	119-1031-15	1/16W 10k ohm	R531	033-1021-15	1/16W 1k ohm
C503	046-1032-78	0.01uF	R109	119-1031-15	1/16W 10k ohm	R532	033-1021-15	1/16W 1k ohm
C504	168-1045-56	0.1uF	R110	033-4741-15	1/16W 470k ohm	R533	033-1021-15	1/16W 1k ohm
C506	046-1032-78	0.01uF	R111	033-4741-15	1/16W 470k ohm	R535	033-2231-15	1/16W 22k ohm
C507	046-1032-78	0.01uF	R112	033-2731-15	1/16W 27k ohm	R536	033-2231-15	1/16W 22k ohm
D103	001-0504-07	HZS4BLL	R113	033-2731-15	1/16W 27k ohm	R538	033-1031-15	1/16W 10k ohm
D104	001-0516-90	MA111	R114	033-2731-15	1/16W 27k ohm	R539	033-5631-15	1/16W 56k ohm
D105	001-0529-31	MA8056-L	R115	033-2731-15	1/16W 27k ohm	R540	033-1041-15	1/16W 100k ohm
D106	001-2601-90	MA728-TX	R116	033-5611-15	1/16W 560 ohm	R541	033-1021-15	1/16W 1k ohm
D107	001-2601-90	MA728-TX	R117	033-5611-15	1/16W 560 ohm	R542	033-4721-15	1/16W 4.7k ohm
IC501	051-9400-28	BR93LC46F-WE2	R118	033-4731-15	1/16W 47k ohm	R546	033-1031-15	1/16W 10k ohm
IC502	052-5047-11	M30621MCM-5P7GP	R119	033-4731-15	1/16W 47k ohm	X501	060-1505-50	10MHz

CD PWB section(B4)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	045-1201-50	12pF	C26	042-0472-91	16V 47uF	IC3	051-6060-08	BD7961FM-E2
C2	046-1022-58	1000pF	C27	178-3342-78	0.33uF	IC4	051-5711-90	AN8882SB-E1
C3	168-1042-78	16V 0.1uF	C29	168-2732-55	16V 0.027uF	J1	074-1189-95	45P
C4	042-0636-54	4V 220uF	C30	042-0416-58	4V 100uF	J4	074-1138-56	6P
C5	168-1042-78	16V 0.1uF	C31	042-0636-52	4V 47uF	J5	074-1201-65	15P
C6	046-1032-78	0.01uF	C32	046-1022-58	1000pF	J6	074-1059-76	26P
C7	168-1042-78	16V 0.1uF	C33	046-6822-58	6800pF	L2	010-2155-93	10uH
C8	178-4742-78	0.47uF	C34	168-2732-55	16V 0.027uF	Q2	131-1188-00	2SB1188
C9	178-2242-78	0.22uF	C35	178-2742-78	0.27uF	Q3	131-1188-00	2SB1188
C10	168-1042-78	16V 0.1uF	C36	178-1052-78	1uF	R2	033-1041-15	1/16W 100k ohm
C11	168-1042-78	16V 0.1uF	C37	168-1042-78	16V 0.1uF	R3	033-3311-15	1/16W 330 ohm
C12	168-1042-78	16V 0.1uF	C38	042-0472-91	16V 47uF	R4	033-6811-15	1/16W 680 ohm
C13	046-2232-78	0.022uF	C39	042-0636-50	6.3V 100uF	R5	033-1041-15	1/16W 100k ohm
C14	168-5612-55	560pF	C40	045-1211-50	120pF	R6	033-3931-15	1/16W 39k ohm
C15	168-1042-78	16V 0.1uF	C41	045-5601-50	56pF	R7	033-1041-15	1/16W 100k ohm
C16	046-2212-58	220pF	C42	168-1042-78	16V 0.1uF	R8	033-5611-15	1/16W 560 ohm
C17	046-2212-58	220pF	C43	042-0636-52	4V 47uF	R9	033-5611-15	1/16W 560 ohm
C18	168-1222-55	1200pF	C50	168-1042-78	16V 0.1uF	R10	033-1011-15	1/16W 100 ohm
C19	046-3322-58	3300pF	C51	168-1042-78	16V 0.1uF	R11	033-3911-15	1/16W 390 ohm
C20	168-3932-78	0.039uF	C60	168-5612-55	560pF	R12	033-2221-15	1/16W 2.2k ohm
C21	168-3932-78	0.039uF	C61	045-1201-50	12pF	R13	033-6831-15	1/16W 68k ohm
C22	042-0416-52	10V 10uF TAN	D1	001-0516-90	MA111	R14	033-5621-15	1/16W 5.6k ohm
C23	045-1201-50	12pF	IC1	051-6365-00	MN662785TBUC	R15	033-1021-15	1/16W 1k ohm
C25	178-1052-78	1uF	IC2	051-9318-00	MSM51V17400D	R16	033-5631-15	1/16W 56k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R17	033-1031-15	1/16W 10k ohm	R28	033-1031-15	1/16W 10k ohm	R42	033-6821-15	1/16W 6.8k ohm
R18	033-1031-15	1/16W 10k ohm	R29	033-2201-15	1/16W 22 ohm	R43	033-1241-15	1/16W 120k ohm
R19	033-5621-15	1/16W 5.6k ohm	R31	033-8211-15	1/16W 820 ohm	R44	033-6831-15	1/16W 68k ohm
R20	033-6831-15	1/16W 68k ohm	R32	033-5631-15	1/16W 56k ohm	R45	116-4711-15	1/8W 470 ohm
R21	033-5621-15	1/16W 5.6k ohm	R33	033-6831-15	1/16W 68k ohm	R46	117-1811-15	1/10W 180 ohm
R22	033-1031-15	1/16W 10k ohm	R34	033-3331-15	1/16W 33k ohm	R47	116-4711-15	1/8W 470 ohm
R23	033-1031-15	1/16W 10k ohm	R35	033-6831-15	1/16W 68k ohm	R48	033-1031-15	1/16W 10k ohm
R24	033-4731-15	1/16W 47k ohm	R38	033-3931-15	1/16W 39k ohm	R49	033-1011-15	1/16W 100 ohm
R25	033-3931-15	1/16W 39k ohm	R39	033-1831-15	1/16W 18k ohm	R60	033-1031-15	1/16W 10k ohm
R26	033-6831-15	1/16W 68k ohm	R40	117-1001-15	1/10W 10 ohm	TM1	073-0768-90	TERMINAL
R27	033-6831-15	1/16W 68k ohm	R41	033-6821-15	1/16W 6.8k ohm	X2	061-3525-90	33.8688MHz

Sensor PWB section(B5)

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F

PIM-FPC section(B6)

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B7)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2 ohm
C2	163-1073-35	16V100uF	J2	074-1100-59	9P	S1	013-7412-50	SPVG21
D1	001-0529-32	MA8056-M	R1	033-1021-15	1/16W 1k ohm			
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC section(B8)

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B9)

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

LED-R-PWB section(B10)

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

L-Motor-FPC section(B11)

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B12) :

REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE
M3	SMA-184-100	SLED
S2	013-7414-50	SPVG22