


EXPLODED VIEW / PARTS LIST

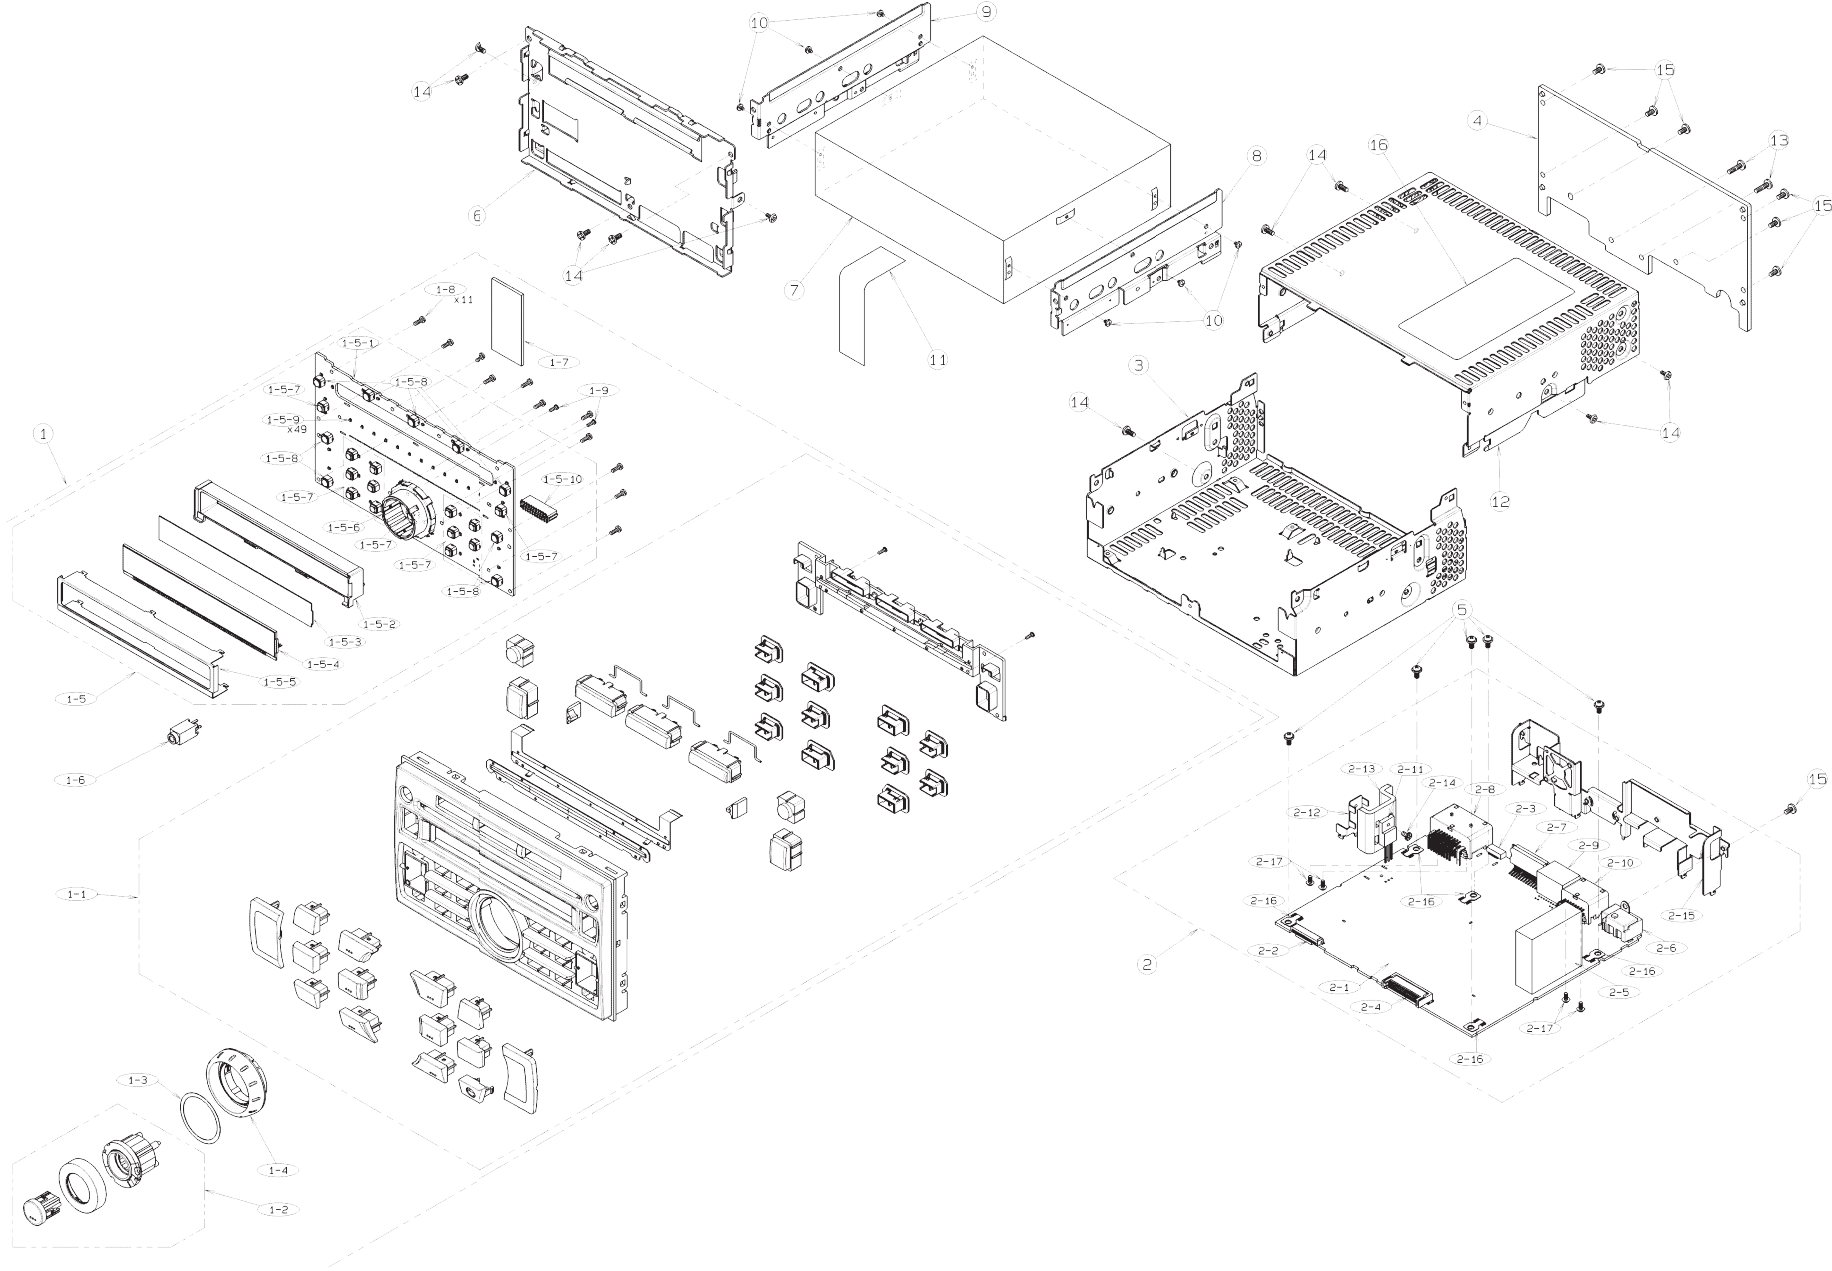

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	ESCUTCHEON-ASSY	1	2-6	092-2210-00	ANT-RECEPT	1
1-1	940-8186-31	ESCUTCHEON-ASSY	1	2-7	051-2037-00	IC	1
1-2	947-0591-10	KNOB ASSY	1	2-8	074-4009-20	OUTLET SOCKET	1
1-3	347-7959-00	SHADE	1	2-9	074-1013-00	OUTLET SOCKET	1
1-4	380-5655-00	KNOB	1	2-10	074-1302-16	OUTLET SOCKET	1
1-5	-----	SW-PWB-ASSY	1	2-11	051-3340-00	IC	1
1-5-1	-----	SW PWB	1	2-12	331-3880-00	TR-HOLDER	1
1-5-2	335-7693-00	LCD HOLDER	1	2-13	313-1967-00	HEAT SINK	1
1-5-3	335-7801-00	LCD LEFLECTOR	1	2-14	716-1646-50	IT SCREW	1
1-5-4	379-1372-50	INDICATOR	1	2-15	307-0720-10	REAR PLATE	1
1-5-5	331-4166-00	LCD COVER	1	2-16	073-0762-90	TERMINAL	5
1-5-6	016-7004-00	ROTARY SWITCH	1	2-17	778-3006-00	TAP-SCREW	4
1-5-7	013-6201-52	TACT SWITCH	14	3	311-1914-00	LOWER CASE	1
1-5-8	013-6202-52	TACT SWITCH	9	4	313-1969-00	HEAT SINK	1
1-5-9	001-7093-91	DIODE	49	5	716-0878-50	SPECIAL SCREW	5
1-5-10	074-3013-74	OUTLET SOCKET	1	6	309-0822-00	ES PLATE (6CD)	1
1-6	075-9009-00	JACK	1	7	929-0390-82	CD-CHG-MODULE	1
1-7	345-8090-00	CUSHION RUBBER	1	8	331-4092-10	6CD BRKT(R)	1
1-8	716-0778-52	SPECIAL SCREW	11	9	331-4091-10	6CD BRKT(L)	1
1-9	716-0872-51	SPECIAL SCREW	2	10	716-3552-00	SPECIAL SCREW	6
2	-----	MAIN-PWB-ASSY	1	11	816-4024-50	FLAT WIRE	1
2-1	-----	MAIN PWB	1	12	310-1823-10	UPPER CASE	1
2-2	074-1237-69	OUTLET SOCKET	1	13	714-2612-89	D-SEMS SCREW	2
2-3	-	-	-	14	714-2606-8B	MACHINE SCREW	10
2-4	076-0662-74	PLUG	1	15	714-2608-8B	MACHINE SCREW	7
2-5	880-2091R	TUNER	1	16	276-0153-00	SETPLATE	1

ELECTRICAL PARTS LIST

MAIN PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-00	ANTENNA RECEPT	C343	168-1022-55	1000pF K	C544	166-2201-50	22pF CH
BL101	880-2091R	TUNER	C344	163-2263-35	16V 22uF	C545	166-2201-50	22pF CH
C104	168-2222-55	2200pF K	C345	168-3322-55	3300pF K	C546	168-1042-78	16V 0.1uF K
C108	166-1511-50	150pF CH	C346	168-3322-55	3300pF K	C547	178-1042-78	0.1uF
C109	166-2201-50	22pF CH	C347	168-3322-55	3300pF K	C548	163-4763-35	16V 47uF
C119	168-1022-55	1000pF K	C348	168-3322-55	3300pF K	C549	163-2273-25	10V 220uF
C122	163-1073-35	16V 100uF	C350	042-0643-58	6.3V 330uF	C550	168-2212-55	220pF K
C123	168-2222-55	2200pF K	C352	168-2222-55	2200pF K	C551	166-2201-50	22pF CH
C124	168-1022-55	1000pF K	C353	168-2222-55	2200pF K	C552	042-0592-61	16V 47uF
C127	168-1022-55	1000pF K	C354	168-2222-55	2200pF K	C553	042-0592-61	16V 47uF
C128	168-1022-55	1000pF K	C355	168-2222-55	2200pF K	C554	189-3383-31	16V 3300uF
C130	168-1022-55	1000pF K	C356	163-1073-15	6.3V 100uF	C556	043-0499-51	50V 0.1uF J
C131	163-1073-35	16V 100uF	C357	168-3322-55	3300pF K	C557	163-4763-35	16V 47uF
C138	178-3342-78	0.33uF	C358	168-3322-55	3300pF K	C559	168-6822-55	6800pF K
C140	163-1063-35	16V 10uF	C401	168-1042-78	16V 0.1uF K	C560	168-6822-55	6800pF K
C141	163-1063-35	16V 10uF	C402	168-1042-78	16V 0.1uF K	C561	168-6822-55	6800pF K
C142	043-0319-51	200pF J CH	C403	166-1011-50	100pF CH	C562	168-6822-55	6800pF K
C201	163-1063-35	16V 10uF	C404	166-1201-50	12pF CH	C563	168-6822-55	6800pF K
C202	163-1063-35	16V 10uF	C405	163-4763-35	16V 47uF	C564	042-0427-94	16V 47uF TAN
C203	163-1063-35	16V 10uF	C406	166-1201-50	12pF CH	C565	168-6822-55	6800pF K
C204	163-1063-35	16V 10uF	C407	168-1042-78	16V 0.1uF K	C566	168-6822-55	6800pF K
C210	168-1022-55	1000pF K	C408	163-4763-15	6.3V 47uF	C567	168-1042-78	16V 0.1uF K
C211	168-1022-55	1000pF K	C409	168-1042-78	16V 0.1uF K	C568	168-6822-55	6800pF K
C212	168-1022-55	1000pF K	C410	166-1011-50	100pF CH	C569	168-6822-55	6800pF K
C213	168-3332-78	0.033uF K	C411	166-1801-50	18pF CH	C570	168-1042-78	16V 0.1uF K
C214	168-3332-78	0.033uF K	C412	168-1032-55	0.01uF K	C571	163-1073-35	16V 100uF
C215	168-4722-55	4700pF K	C413	166-2201-50	22pF CH	C572	178-1052-78	25V 1uF
C216	168-4722-55	4700pF K	C414	166-2201-50	22pF CH	C573	168-1042-78	16V 0.1uF K
C217	168-1042-78	16V 0.1uF K	C415	166-2201-50	22pF CH	C574	163-1063-35	16V 10uF
C221	168-1042-78	16V 0.1uF K	C416	166-2201-50	22pF CH	C575	168-2232-55	0.022uF K
C225	178-1052-78	25V 1uF	C417	166-2201-50	22pF CH	C577	166-4701-50	47pF CH
C228	163-2273-25	10V 220uF	C418	166-2201-50	22pF CH	C578	178-1242-78	0.12uF
C230	168-1042-78	16V 0.1uF K	C419	043-0548-50	10V 2.2uF	C579	178-1242-78	0.12uF
C231	163-1063-35	16V 10uF	C420	043-0548-50	10V 2.2uF	C580	178-1242-78	0.12uF
C232	163-1063-35	16V 10uF	C421	043-0548-50	10V 2.2uF	C581	178-1242-78	0.12uF
C233	168-1042-78	16V 0.1uF K	C422	043-0548-50	10V 2.2uF	C902	043-0548-50	10V 2.2uF
C234	168-2232-55	0.022uF K	C423	043-0548-50	10V 2.2uF	C914	166-5601-50	56pF CH
C240	168-1042-78	16V 0.1uF K	C424	043-0548-50	10V 2.2uF	C916	166-2201-50	22pF CH
C301	163-4753-65	50V 4.7uF	C501	178-1052-78	25V 1uF	C918	166-2201-50	22pF CH
C302	168-1042-78	16V 0.1uF K	C502	178-1052-78	25V 1uF	C920	166-5601-50	56pF CH
C303	166-1811-50	180pF CH	C503	178-1052-78	25V 1uF	C924	163-3363-25	10V 33uF
C306	168-1042-78	16V 0.1uF K	C504	178-1052-78	25V 1uF	C925	163-3363-25	10V 33uF
C307	168-1042-78	16V 0.1uF K	C505	166-5611-50	560pF CH	C928	168-6822-55	6800pF K
C308	166-8097-50	8pF +/-0.5pF CH	C506	166-5611-50	560pF CH	CCT301	050-0145-52	1/16W 1k ohm x4
C309	166-8097-50	8pF +/-0.5pF CH	C507	166-5611-50	560pF CH	CCT401	050-0145-52	1/16W 1k ohm x4
C310	168-1022-55	1000pF K	C508	166-5611-50	560pF CH	CCT402	050-0145-52	1/16W 1k ohm x4
C311	163-4753-65	50V 4.7uF	C509	166-2201-50	22pF CH	CCT403	050-0145-52	1/16W 1k ohm x4
C312	168-1042-78	16V 0.1uF K	C510	166-2201-50	22pF CH	CCT404	050-0145-52	1/16W 1k ohm x4
C313	163-4753-65	50V 4.7uF	C513	166-2201-50	22pF CH	D106	001-0516-90	MA111
C314	168-1042-78	16V 0.1uF K	C514	166-2201-50	22pF CH	D108	001-0529-48	MA8091-H
C315	168-1022-55	1000pF K	C516	166-5611-50	560pF CH	D109	001-0516-90	MA111
C316	168-1022-55	1000pF K	C517	166-5611-50	560pF CH	D201	001-4305-39	UDZSTE-17 36B
C317	166-1011-50	100pF CH	C518	043-0566-90	50V 2.2uF K	D202	001-0516-90	MA111
C318	168-1042-78	16V 0.1uF K	C519	166-5611-50	560pF CH	D203	001-0516-90	MA111
C319	168-5622-55	5600pF K	C520	166-5611-50	560pF CH	D204	001-0516-90	MA111
C320	168-5622-55	5600pF K	C523	163-1063-35	16V 10uF	D209	001-0529-44	MA8082-M
C323	168-1022-55	1000pF K	C525	043-0554-90	25V 10uF	D502	001-2624-90	RB501V-40
C324	163-2273-25	10V 220uF	C526	043-0328-90	50V 0.1uF	D504	001-2627-90	SSA24
C325	168-2222-55	2200pF K	C528	168-1022-55	1000pF K	D505	001-0529-48	MA8091-H
C326	168-4732-78	0.047uF K	C529	168-5622-55	5600pF K	D508	001-0529-48	MA8091-H
C327	163-2263-35	16V 22uF	C530	163-1073-35	16V 100uF	D510	001-2015-00	RL253
C328	168-1022-55	1000pF K	C531	168-6822-55	6800pF K	D511	001-0516-90	MA111
C330	042-0423-94	10V 4.7uF	C532	168-1042-78	16V 0.1uF K	D512	001-0529-48	MA8091-H
C331	168-1022-55	1000pF K	C533	178-1242-78	0.12uF	D513	001-0627-90	U1BC44
C333	168-1042-78	16V 0.1uF K	C534	178-1242-78	0.12uF	D514	001-0516-90	MA111
C334	163-4763-15	6.3V 47uF	C535	178-1242-78	0.12uF	D515	001-0529-34	MA8062-L
C335	178-1052-78	25V 1uF	C536	178-1242-78	0.12uF	D516	001-0516-90	MA111
C336	168-3332-78	0.033uF K	C537	178-1052-78	25V 1uF	D517	001-4301-68	HZU18B1
C338	168-1022-55	1000pF K	C540	163-1063-35	16V 10uF	D518	001-4301-68	HZU18B1
C339	168-1022-55	1000pF K	C542	166-2201-50	22pF CH	D519	001-4301-68	HZU18B1
C341	168-4712-55	470pF K	C543	166-2201-50	22pF CH	D567	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D568	001-0516-90	MA111	Q504	190-1586-00	2SA1586 O,Y,G	R311	119-0000-05	1/10W 0 ohm JW
D901	001-0627-90	U1BC44	Q506	125-2026-91	UNR5211G	R312	119-0000-05	1/10W 0 ohm JW
IC104	051-0352-91	TA78L05F	Q507	190-1586-00	2SA1586 O,Y,G	R313	119-0000-05	1/10W 0 ohm JW
IC105	051-3020-90	NJM4565V	Q508	192-4116-00	2SC4116	R314	119-1011-15	1/10W 100 ohm
IC203	051-3367-90	NJU7780U1-33-TE2	Q509	193-2118-00	2SD2118F5	R315	119-1031-15	1/10W 10k ohm
IC204	051-3340-00	LD1085P	Q511	125-2026-91	UNR5211G	R316	119-1021-15	1/10W 1k ohm
IC301	-----	SAF7730HV/N317/S1 (670660-051) (DSP:center pad type)	Q512	125-2026-91	UNR5211G	R317	032-0140-50	1/10W 10k ohm F
IC401	051-9424-90	BR24L16FVM-WTR	Q515	193-1664-00	2SD1664	R318	119-3921-15	1/10W 3.9k ohm
IC402	052-3205-01	M30876MJB-A05GP	Q516	192-4116-51	2SC4116 G,L	R319	032-0140-50	1/10W 10k ohm F
IC403	051-6212-08	LC72191JM-TLM	Q517	191-1204-61	2SB1204 R,S,T	R320	119-3921-15	1/10W 3.9k ohm
IC404	051-5417-08	S-80927CNMC-B8M	Q518	125-2026-91	UNR5211G	R321	032-0140-50	1/10W 10k ohm F
IC405	051-3020-90	NJM4565V	Q519	190-1298-00	2SA1298	R322	119-0000-05	1/10W 0 ohm JW
IC501	051-3019-90	NJM2060V	Q520	192-4116-00	2SC4116	R323	032-0140-50	1/10W 10k ohm F
IC502	051-3372-90	LT1767EMS8E#TRP BF	Q521	192-4116-00	2SC4116	R324	119-1041-15	1/10W 100k ohm
IC503	051-2037-00	TDA7560	Q522	125-2026-91	UNR5211G	R325	119-1041-15	1/10W 100k ohm
IC505	051-3034-90	NJM4558V	R102	119-0000-05	1/10W 0 ohm JW	R326	119-1001-15	1/10W 10 ohm
IC506	051-5441-08	BD4828G-TR	R112	119-0000-05	1/10W 0 ohm JW	R327	119-3921-15	1/10W 3.9k ohm
IC507	051-3341-90	BD3931FP	R115	119-1041-15	1/10W 100k ohm	R328	119-0000-05	1/10W 0 ohm JW
J101	074-1302-16	16P	R119	119-1031-15	1/10W 10k ohm	R329	119-1021-15	1/10W 1k ohm
J202	074-1237-69	19P	R120	119-1031-15	1/10W 10k ohm	R330	119-3921-15	1/10W 3.9k ohm
J204	074-1013-00	12P	R126	119-1011-15	1/10W 100 ohm	R331	119-0000-05	1/10W 0 ohm JW
J502	074-4009-20	20P	R131	119-1011-15	1/10W 100 ohm	R332	032-0140-50	1/10W 10k ohm F
L105	010-2003-04	30uH	R132	119-1011-15	1/10W 100 ohm	R334	032-0140-50	1/10W 10k ohm F
L108	010-4011-20	2.5mH +/-3%	R136	116-6891-15	1/4W 6.8 ohm	R336	032-0140-50	1/10W 10k ohm F
L301	010-3104-54	600 ohm/100MHz	R148	116-1091-15	1/4W 1 ohm	R337	032-0140-50	1/10W 10k ohm F
L302	010-3104-54	600 ohm/100MHz	R149	116-1221-15	1/4W 1.2k ohm	R338	032-0140-50	1/10W 10k ohm F
L303	010-3104-54	600 ohm/100MHz	R150	116-3911-15	1/4W 390 ohm	R339	032-0140-50	1/10W 10k ohm F
L304	010-3104-54	600 ohm/100MHz	R151	119-1031-15	1/10W 10k ohm	R340	032-0140-50	1/10W 10k ohm F
L305	010-3104-54	600 ohm/100MHz	R152	119-0000-05	1/10W 0 ohm JW	R341	032-0140-50	1/10W 10k ohm F
L306	010-3104-54	600 ohm/100MHz	R202	119-0000-05	1/10W 0 ohm JW	R342	119-1031-15	1/10W 10k ohm
L307	010-3104-54	600 ohm/100MHz	R203	119-0000-05	1/10W 0 ohm JW	R343	119-1031-15	1/10W 10k ohm
L308	010-3104-54	600 ohm/100MHz	R204	119-0000-05	1/10W 0 ohm JW	R344	119-1011-15	1/10W 100 ohm
L309	010-3104-54	600 ohm/100MHz	R205	119-0000-05	1/10W 0 ohm JW	R345	119-1011-15	1/10W 100 ohm
L310	010-3104-54	600 ohm/100MHz	R206	119-0000-05	1/10W 0 ohm JW	R346	119-0000-05	1/10W 0 ohm JW
L311	010-3104-54	600 ohm/100MHz	R207	119-3011-15	1/10W 300 ohm	R347	119-0000-05	1/10W 0 ohm JW
L312	010-3104-54	600 ohm/100MHz	R208	119-3011-15	1/10W 300 ohm	R348	119-0000-05	1/10W 0 ohm JW
L401	010-3406-66	22uH J	R210	119-1021-15	1/10W 1k ohm	R349	119-0000-05	1/10W 0 ohm JW
L402	010-3406-54	2.2uH J	R212	119-3331-15	1/10W 33k ohm	R350	119-1031-15	1/10W 10k ohm
L403	010-3104-54	600 ohm/100MHz	R215	119-4731-15	1/10W 47k ohm	R351	119-0000-05	1/10W 0 ohm JW
L501	010-3104-54	600 ohm/100MHz	R220	119-1041-15	1/10W 100k ohm	R352	119-4731-15	1/10W 47k ohm
L503	010-3104-54	600 ohm/100MHz	R224	119-4721-15	1/10W 4.7k ohm	R353	119-1021-15	1/10W 1k ohm
L504	010-3074-51	5.4uH	R225	119-0000-05	1/10W 0 ohm JW	R354	119-1021-15	1/10W 1k ohm
L509	010-8046-00	260uH	R226	119-5621-15	1/10W 5.6k ohm	R355	119-1021-15	1/10W 1k ohm
P402	076-0662-74	24P	R227	119-4721-15	1/10W 4.7k ohm	R356	119-1021-15	1/10W 1k ohm
Q103	192-4116-00	2SC4116	R228	119-5621-15	1/10W 5.6k ohm	R357	119-4731-15	1/10W 47k ohm
Q109	193-2118-00	2SD2118F5	R229	119-4721-15	1/10W 4.7k ohm	R358	119-1001-15	1/10W 10 ohm
Q110	125-2026-95	UNR5211G	R230	119-3011-15	1/10W 300 ohm	R359	119-4731-15	1/10W 47k ohm
Q111	131-1188-00	2SB1188	R231	119-5631-15	1/10W 56k ohm	R360	119-4731-15	1/10W 47k ohm
Q201	192-4116-00	2SC4116	R232	119-5631-15	1/10W 56k ohm	R361	119-4731-15	1/10W 47k ohm
Q204	125-2026-91	UNR5211G	R233	119-4721-15	1/10W 4.7k ohm	R362	119-4731-15	1/10W 47k ohm
Q205	125-0020-91	UNR5111	R234	119-1031-15	1/10W 10k ohm	R363	119-0000-05	1/10W 0 ohm JW
Q206	198-3018-00	2SK3018	R235	119-1031-15	1/10W 10k ohm	R400	119-0000-05	1/10W 0 ohm JW
Q207	198-3018-00	2SK3018	R236	032-0140-89	1/10W 47k ohm F	R408	119-4721-15	1/10W 4.7k ohm
Q208	192-4116-00	2SC4116	R237	032-0140-89	1/10W 47k ohm F	R409	119-4721-15	1/10W 4.7k ohm
Q209	192-4116-00	2SC4116	R238	119-5631-15	1/10W 56k ohm	R411	119-3311-15	1/10W 330 ohm
Q210	192-4116-00	2SC4116	R239	119-1031-15	1/10W 10k ohm	R412	119-3311-15	1/10W 330 ohm
Q211	125-0020-91	UNR5111	R240	119-2231-15	1/10W 22k ohm	R413	119-4731-15	1/10W 47k ohm
Q212	125-2026-91	UNR5211G	R241	119-4731-15	1/10W 47k ohm	R414	119-4731-15	1/10W 47k ohm
Q215	125-0006-90	UNR2110	R243	119-1031-15	1/10W 10k ohm	R415	119-4731-15	1/10W 47k ohm
Q216	125-2026-91	UNR5211G	R244	119-6821-15	1/10W 6.8k ohm	R416	119-4731-15	1/10W 47k ohm
Q222	125-9017-92	UMD3N-TR	R245	119-4731-15	1/10W 47k ohm	R417	119-4731-15	1/10W 47k ohm
Q301	125-7005-90	PHK04P02T	R249	032-0140-98	1/10W 330 ohm F	R418	119-4711-15	1/10W 470 ohm
Q302	125-2026-91	UNR5211G	R251	032-0140-93	1/10W 2k ohm F	R419	119-4711-15	1/10W 470 ohm
Q303	125-2026-91	UNR5211G	R254	119-1021-15	1/10W 1k ohm	R420	119-4711-15	1/10W 470 ohm
Q304	125-2026-91	UNR5211G	R266	119-0000-05	1/10W 0 ohm JW	R421	119-4711-15	1/10W 470 ohm
Q305	125-2026-91	UNR5211G	R301	119-1031-15	1/10W 10k ohm	R422	119-1011-15	1/10W 100 ohm
Q306	125-2026-91	UNR5211G	R302	119-1031-15	1/10W 10k ohm	R423	119-1011-15	1/10W 100 ohm
Q307	125-2026-91	UNR5211G	R303	119-2201-15	1/10W 22 ohm	R426	119-1011-15	1/10W 100 ohm
Q308	125-2026-91	UNR5211G	R304	032-0140-80	1/10W 18k ohm F	R427	119-1011-15	1/10W 100 ohm
Q501	125-9017-92	UMD3N-TR	R305	032-0140-80	1/10W 18k ohm F	R428	119-1031-15	1/10W 10k ohm
Q503	125-2026-91	UNR5211G	R306	032-0140-80	1/10W 18k ohm F	R429	119-1031-15	1/10W 10k ohm
			R307	032-0140-80	1/10W 18k ohm F	R430	119-1031-15	1/10W 10k ohm
			R308	119-0000-05	1/10W 0 ohm JW	R431	119-1031-15	1/10W 10k ohm
			R309	119-0000-05	1/10W 0 ohm JW	R432	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R433	119-1031-15	1/10W 10k ohm	R497	119-0000-05	1/10W 0 ohm JW	R568	116-1221-15	1/4W 1.2k ohm
R434	119-1021-15	1/10W 1k ohm	R498	119-0000-05	1/10W 0 ohm JW	R569	116-1221-15	1/4W 1.2k ohm
R435	119-1021-15	1/10W 1k ohm	R499	119-0000-05	1/10W 0 ohm JW	R570	119-1031-15	1/10W 10k ohm
R436	119-1021-15	1/10W 1k ohm	R500	119-0000-05	1/10W 0 ohm JW	R571	119-4721-15	1/10W 4.7k ohm
R437	119-1021-15	1/10W 1k ohm	R501	116-8211-15	1/4W 820 ohm	R572	119-1031-15	1/10W 10k ohm
R439	119-1041-15	1/10W 100k ohm	R502	119-1031-15	1/10W 10k ohm	R573	032-0148-50	1/10W 100k ohm D
R440	119-4731-15	1/10W 47k ohm	R503	119-1031-15	1/10W 10k ohm	R574	032-0140-16	1/10W 180k ohm F
R441	119-1021-15	1/10W 1k ohm	R504	119-1031-15	1/10W 10k ohm	R575	116-2721-15	1/4W 2.7k ohm
R442	119-1031-15	1/10W 10k ohm	R505	119-1031-15	1/10W 10k ohm	R576	116-1531-15	1/4W 15k ohm
R443	119-4731-15	1/10W 47k ohm	R506	116-8211-15	1/4W 820 ohm	R578	119-2221-15	1/10W 2.2k ohm
R445	119-0000-05	1/10W 0 ohm JW	R507	119-1031-15	1/10W 10k ohm	R579	116-2721-15	1/4W 2.7k ohm
R446	119-4731-15	1/10W 47k ohm	R508	119-1031-15	1/10W 10k ohm	R580	116-1531-15	1/4W 15k ohm
R447	119-1031-15	1/10W 10k ohm	R509	119-1031-15	1/10W 10k ohm	R581	119-1031-15	1/10W 10k ohm
R448	119-4731-15	1/10W 47k ohm	R510	119-1031-15	1/10W 10k ohm	R582	119-5611-15	1/10W 560 ohm
R449	119-1021-15	1/10W 1k ohm	R512	119-1031-15	1/10W 10k ohm	R583	116-4791-15	1/4W 4.7 ohm
R450	119-1021-15	1/10W 1k ohm	R513	119-1031-15	1/10W 10k ohm	R584	116-4791-15	1/4W 4.7 ohm
R451	119-4731-15	1/10W 47k ohm	R514	119-1051-15	1/10W 1M ohm	R585	119-1031-15	1/10W 10k ohm
R452	119-4731-15	1/10W 47k ohm	R515	119-1051-15	1/10W 1M ohm	R587	119-2231-15	1/10W 22k ohm
R453	119-4731-15	1/10W 47k ohm	R516	119-0000-05	1/10W 0 ohm JW	R588	119-3321-15	1/10W 3.3k ohm
R454	119-4731-15	1/10W 47k ohm	R517	119-1051-15	1/10W 1M ohm	R589	119-0000-05	1/10W 0 ohm JW
R455	119-2231-15	1/10W 22k ohm	R518	119-1051-15	1/10W 1M ohm	R590	119-0000-05	1/10W 0 ohm JW
R456	119-4731-15	1/10W 47k ohm	R519	119-1031-15	1/10W 10k ohm	R591	119-0000-05	1/10W 0 ohm JW
R457	119-4731-15	1/10W 47k ohm	R520	119-1031-15	1/10W 10k ohm	R592	119-0000-05	1/10W 0 ohm JW
R458	119-1011-15	1/10W 100 ohm	R521	119-1031-15	1/10W 10k ohm	R594	119-1051-15	1/10W 1M ohm
R459	119-1011-15	1/10W 100 ohm	R522	119-1031-15	1/10W 10k ohm	R595	119-4731-15	1/10W 47k ohm
R460	119-4721-15	1/10W 4.7k ohm	R523	119-1031-15	1/10W 10k ohm	R596	119-1041-15	1/10W 100k ohm
R461	119-4721-15	1/10W 4.7k ohm	R524	119-1031-15	1/10W 10k ohm	R597	119-1021-15	1/10W 1k ohm
R464	119-2231-15	1/10W 22k ohm	R525	119-1031-15	1/10W 10k ohm	R914	119-3321-15	1/10W 3.3k ohm
R475	119-1531-15	1/10W 15k ohm	R526	119-1031-15	1/10W 10k ohm	R930	119-1001-15	1/10W 10 ohm
R476	119-1531-15	1/10W 15k ohm	R530	032-0140-50	1/10W 10k ohm F	R931	119-4731-15	1/10W 47k ohm
R477	119-1531-15	1/10W 15k ohm	R531	032-0140-80	1/10W 18k ohm F	R932	119-2231-15	1/10W 22k ohm
R478	119-1531-15	1/10W 15k ohm	R533	119-1031-15	1/10W 10k ohm	R936	119-2231-15	1/10W 22k ohm
R479	119-1031-15	1/10W 10k ohm	R534	119-1031-15	1/10W 10k ohm	R938	119-1031-15	1/10W 10k ohm
R480	119-1031-15	1/10W 10k ohm	R535	119-1031-15	1/10W 10k ohm	R941	119-1001-15	1/10W 10 ohm
R481	119-1031-15	1/10W 10k ohm	R536	119-1021-15	1/10W 1k ohm	R942	119-2231-15	1/10W 22k ohm
R482	119-1031-15	1/10W 10k ohm	R537	119-4721-15	1/10W 4.7k ohm	SUP102	060-0122-90	DSP-201M-S00B
R483	119-0000-05	1/10W 0 ohm JW	R538	119-2221-15	1/10W 2.2k ohm	TC401	004-1580-10	30PF GRN
R484	119-0000-05	1/10W 0 ohm JW	R539	119-1041-15	1/10W 100k ohm	TH101	002-0229-00	PTH8L05BAIR8M1B
R485	119-0000-05	1/10W 0 ohm JW	R540	116-6811-15	1/4W 680 ohm	TM101	073-0762-90	TERMINAL
R486	119-1031-15	1/10W 10k ohm	R552	119-4731-15	1/10W 47k ohm	TM102	073-0762-90	TERMINAL
R487	119-1031-15	1/10W 10k ohm	R553	119-1031-15	1/10W 10k ohm	TM201	073-0762-90	TERMINAL
R488	119-0000-05	1/10W 0 ohm JW	R554	119-1031-15	1/10W 10k ohm	TM501	073-0762-90	TERMINAL
R489	119-0000-05	1/10W 0 ohm JW	R555	119-2731-15	1/10W 27k ohm	TM502	073-0762-90	TERMINAL
R490	119-0000-05	1/10W 0 ohm JW	R556	116-4721-15	1/4W 4.7k ohm	X301	061-3537-90	41.6MHz
R491	119-0000-05	1/10W 0 ohm JW	R557	119-4721-15	1/10W 4.7k ohm	X401	061-3541-90	10.00MHz
R492	119-0000-05	1/10W 0 ohm JW	R563	116-3911-15	1/4W 390 ohm	X402	061-1066-00	7.2MHz
R493	119-0000-05	1/10W 0 ohm JW	R564	116-1221-15	1/4W 1.2k ohm	PWB	039-2851-00	PWB(WITHOUT CO MPONENTS)
R494	119-0000-05	1/10W 0 ohm JW	R565	116-1221-15	1/4W 1.2k ohm			
R495	119-0000-05	1/10W 0 ohm JW	R566	119-1521-15	1/10W 1.5k ohm			
R496	119-0000-05	1/10W 0 ohm JW	R567	119-1031-15	1/10W 10k ohm			


SW PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	042-0416-59	10V 33uF M TAN			L	D820	001-7093-91	RFY1112H-16-TR YE
C802	168-1042-78	16V 0.1uF K	D810	001-7093-91	RFY1112H-16-TR YE			L
C803	168-1042-78	16V 0.1uF K			L	D821	001-7093-91	RFY1112H-16-TR YE
C804	168-4732-78	0.047uF K	D811	001-7093-91	RFY1112H-16-TR YE			L
C805	168-4732-78	0.047uF K			L	D822	001-7093-91	RFY1112H-16-TR YE
C806	168-4732-78	0.047uF K	D812	001-7093-91	RFY1112H-16-TR YE			L
C807	166-2211-50	220pF CH			L	D823	001-7093-91	RFY1112H-16-TR YE
CCT801	050-0145-52	1/16W 1k ohm x4	D813	001-7093-91	RFY1112H-16-TR YE			L
D801	001-0529-32	MA8056-M			L	D824	001-7093-91	RFY1112H-16-TR YE
D802	001-0529-32	MA8056-M	D814	001-7093-91	RFY1112H-16-TR YE			L
D803	001-0529-32	MA8056-M			L	D825	001-0529-32	MA8056-M
D804	001-0529-32	MA8056-M	D815	001-7093-91	RFY1112H-16-TR YE			L
D805	001-0529-32	MA8056-M			L	D826	001-0529-32	MA8056-M
D806	001-7093-91	RFY1112H-16-TR YE	D816	001-7093-91	RFY1112H-16-TR YE			L
		L			L	D827	001-0529-32	MA8056-M
D807	001-7093-91	RFY1112H-16-TR YE	D817	001-7093-91	RFY1112H-16-TR YE			L
		L			L	D828	001-0529-32	MA8056-M
D808	001-7093-91	RFY1112H-16-TR YE	D818	001-7093-91	RFY1112H-16-TR YE			L
		L			L	D829	001-0529-32	MA8056-M
D809	001-7093-91	RFY1112H-16-TR YE	D819	001-7093-91	RFY1112H-16-TR YE	D830	001-7093-91	RFY1112H-16-TR YE
		L			L			L
		L			L	D831	001-7093-91	RFY1112H-16-TR YE
		L			L			L

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D832	001-7093-91	RFY1112H-16-TR YE L	D858	001-7093-91	RFY1112H-16-TR YE L	R819	116-3321-15	1/4W 3.3k ohm
D833	001-7093-91	RFY1112H-16-TR YE L	D859	001-7093-91	RFY1112H-16-TR YE L	R822	119-2421-15	1/10W 2.4k ohm
D834	001-7093-91	RFY1112H-16-TR YE L	D860	001-7093-91	RFY1112H-16-TR YE L	R823	116-4721-15	1/4W 4.7k ohm
D835	001-7093-91	RFY1112H-16-TR YE L	D861	001-7093-91	RFY1112H-16-TR YE L	R824	119-2421-15	1/10W 2.4k ohm
D836	001-7093-91	RFY1112H-16-TR YE L	D862	001-7093-91	RFY1112H-16-TR YE L	R825	116-4721-15	1/4W 4.7k ohm
D837	001-7093-91	RFY1112H-16-TR YE L	D863	001-0529-32	MA8056-M	R826	119-2421-15	1/10W 2.4k ohm
D838	001-7093-91	RFY1112H-16-TR YE L	D864	001-7093-91	RFY1112H-16-TR YE L	R827	116-4721-15	1/4W 4.7k ohm
D839	001-7093-91	RFY1112H-16-TR YE L	D865	001-7093-91	RFY1112H-16-TR YE L	R828	119-2421-15	1/10W 2.4k ohm
D840	001-0529-32	MA8056-M	D868	001-0529-32	MA8056-M	R829	116-2421-15	1/4W 2.4k ohm
D845	001-0529-32	MA8056-M	D869	001-7093-91	RFY1112H-16-TR YE L	R830	119-2421-15	1/10W 2.4k ohm
D846	001-7093-91	RFY1112H-16-TR YE L	D870	001-7093-91	RFY1112H-16-TR YE L	R832	119-2421-15	1/10W 2.4k ohm
D847	001-7093-91	RFY1112H-16-TR YE L	D881	001-0529-72	MA8200-M	S801	016-7004-00	ROTARY SWITCH
D848	001-7093-91	RFY1112H-16-TR YE L	IC801	051-6075-00	LC75816W-8722-E	S802	013-6201-52	SKPMAP010
D849	001-7093-91	RFY1112H-16-TR YE L	J801	074-3013-74	24P	S803	013-6202-52	SKPMBJE010
D850	001-7093-91	RFY1112H-16-TR YE L	J802	075-9009-00	JACK	S804	013-6202-52	SKPMBJE010
D851	001-7093-91	RFY1112H-16-TR YE L	R801	119-0000-05	1/10W 0 ohm JW	S807	013-6202-52	SKPMBJE010
D852	001-7093-91	RFY1112H-16-TR YE L	R802	119-3331-15	1/10W 33k ohm	S808	013-6201-52	SKPMAP010
D853	001-7093-91	RFY1112H-16-TR YE L	R803	119-1021-15	1/10W 1k ohm	S809	013-6201-52	SKPMAP010
D854	001-0529-32	MA8056-M	R804	116-3321-15	1/4W 3.3k ohm	S810	013-6202-52	SKPMBJE010
D855	001-7093-91	RFY1112H-16-TR YE L	R805	116-3321-15	1/4W 3.3k ohm	S811	013-6202-52	SKPMBJE010
D856	001-7093-91	RFY1112H-16-TR YE L	R806	116-3321-15	1/4W 3.3k ohm	S812	013-6202-52	SKPMBJE010
D857	001-7093-91	RFY1112H-16-TR YE L	R807	116-3321-15	1/4W 3.3k ohm	S813	013-6201-52	SKPMAP010
			R808	116-3321-15	1/4W 3.3k ohm	S814	013-6201-52	SKPMAP010
			R809	116-3921-15	1/4W 3.9k ohm	S815	013-6202-52	SKPMBJE010
			R810	116-2421-15	1/4W 2.4k ohm	S816	013-6202-52	SKPMBJE010
			R811	116-4721-15	1/4W 4.7k ohm	S818	013-6201-52	SKPMAP010
			R812	116-4721-15	1/4W 4.7k ohm	S819	013-6201-52	SKPMAP010
			R813	116-4721-15	1/4W 4.7k ohm	S821	013-6202-52	SKPMBJE010
			R814	116-4721-15	1/4W 4.7k ohm	S822	013-6201-52	SKPMAP010
			R815	116-2221-15	1/4W 2.2k ohm	S823	013-6201-52	SKPMAP010
			R816	116-2221-15	1/4W 2.2k ohm	S824	013-6201-52	SKPMAP010
			R817	116-1021-15	1/4W 1k ohm	S825	013-6201-52	SKPMAP010
						S826	013-6201-52	SKPMAP010
						S827	013-6201-52	SKPMAP010
						S828	013-6201-52	SKPMAP010
						TM801	073-0778-90	TERMINAL
						TM802	073-0778-90	TERMINAL
						TM803	073-0778-90	TERMINAL
						TM804	073-0778-90	TERMINAL
						PWB	039-2852-00	PWB(WITHOUT CO MPONENTS)

EXPLODED VIEW/PARTS LIST

Main section

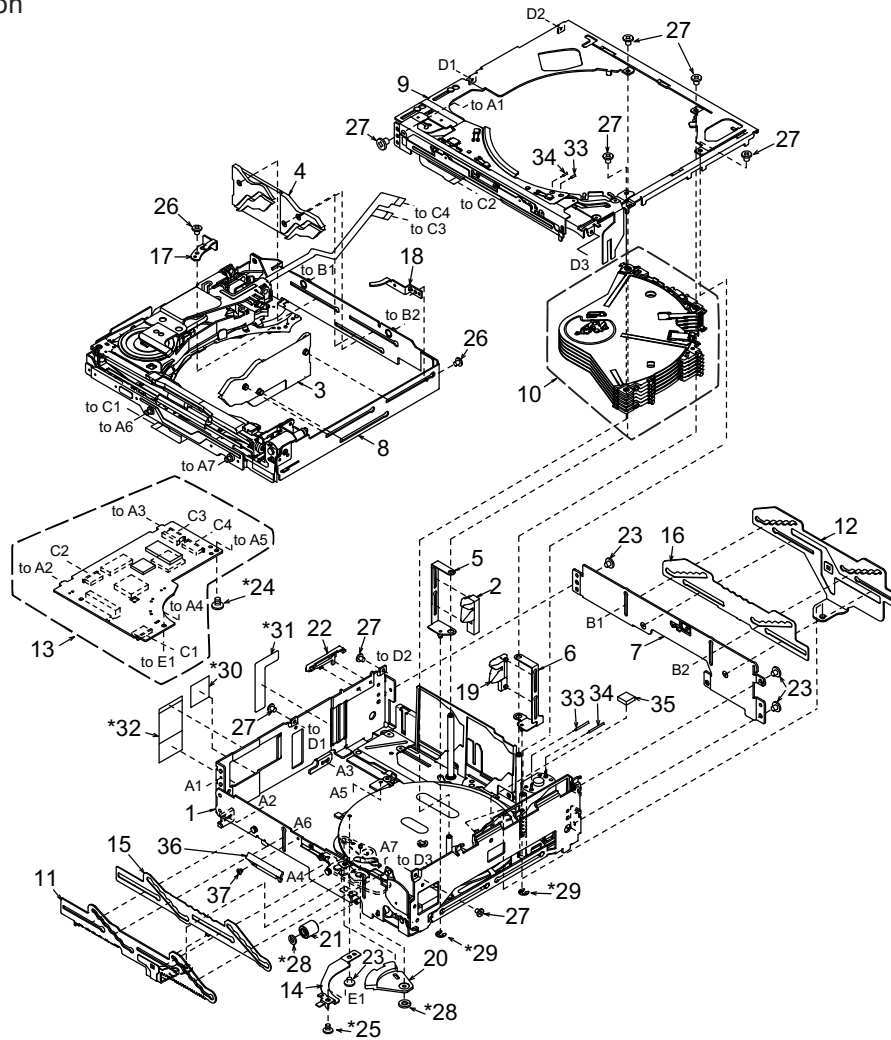


* Do not reuse the following parts.
(No.24,25,28,29,30,31,32)

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-610-100	LOWER UNIT ASSY	1
2	966-0667-21	DISC STP-ASSY L	1
3	HBS-584-100	DH-SEL-ASSY S	1
4	HBS-583-100	DH-SEL-ASSY R	1
5	966-0670-22	DS-SP-ASSY L	1
6	966-0671-23	DS-SP-ASSY R	1
7	966-0672-21	REAR-P-ASSY	1
8	966-1871-21	N-DRIVE-CH UNIT	1
9	966-1764-23	UPPRR UNIT ASSY	1
10	HBS-566-300	DISCHOLDER UNIT	1
11	966-1771-21	SLIDE-P-ASSY F	1
12	966-0709-21	SLIDE-P-ASSY R	1
13	HBS-605-100	CD-PWB-ASSY	1
14	620-1640-20	SW-H-PLATE	1
15	620-1778-21	GAP PLATE F	1
16	620-1662-21	GAP PLATE R	1
17	620-1685-21	DS-PLATE L	1
18	620-1686-20	DS-PLATE R	1
19	621-1634-23	DISC STOPPER R	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	621-1636-24	SW LINK	1
21	621-1765-20	UD-GEAR-D	1
22	621-1715-20	FPC-STOPPER	1
23	716-1850-01	SCREW (M2.0x2.0)	4
24	716-3629-00	SCREW (M2.0x2.5)	1
△ 25	716-1851-02	SCREW (M2.0x3.0)	1
26	716-3450-00	SCREW (M1.7x2.0)	2
27	716-3451-01	SCREW (M1.7x2.5)	8
28	746-0761-00	WASHER	2
29	744-0045-01	C-RING	2
30	347-7271-00	FPC SHEET	1
31	347-7275-00	PROTECT SHEET	1
32	347-7276-00	FPC-SHEET C	1
33	800-4921-60	VINYL-COAT WIRE	1
34	802-4921-60	VINYL-COAT WIRE	1
35	345-5824-00	RUBBER PART	1
36	621-1763-20	LOADING GUIDE B	1
37	716-1859-01	SCREW (M1.7x2.0)	1


Lower unit assy section

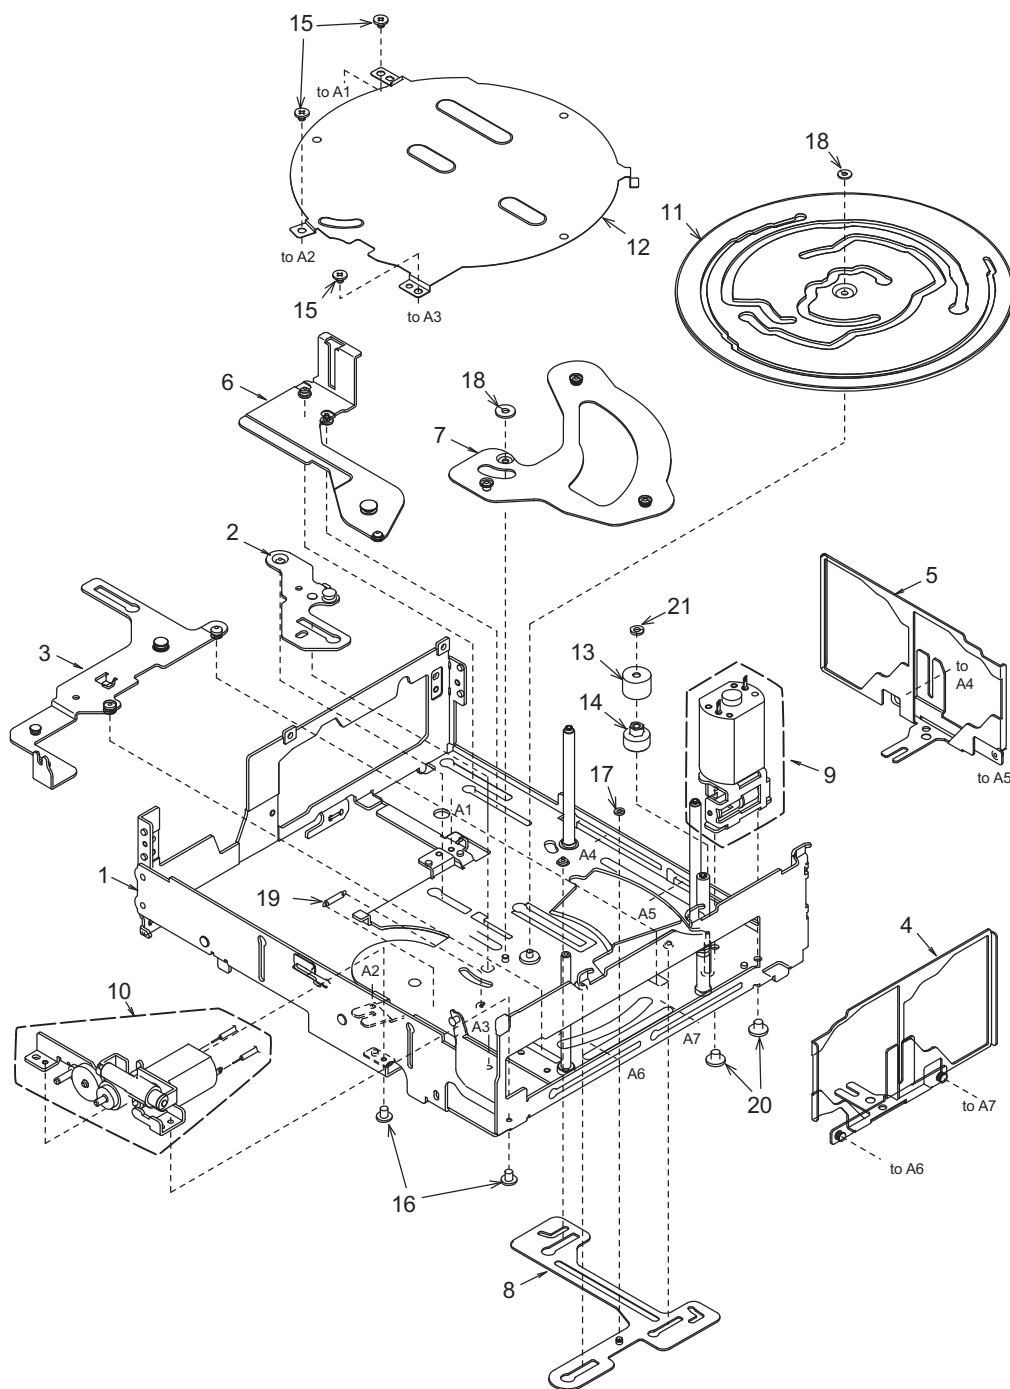

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1869-20	LOWER-C-ASSY	1
2	966-0658-22	DH-SP-ASSY A	1
3	966-1758-20	DS-SP-ASSY A	1
4	966-1808-20	DH-SP-ASSY S	1
5	966-1809-20	DH-SP-ASSY R	1
6	966-0677-24	D-SHT PL-B-ASSY	1
7	966-0659-22	DH-SP-ASSY B	1
8	966-0666-22	DS-SP-ASSY B	1
9	HBS-546-100	M-MTR SUB ASSY	1
10	HBS-568-200	UD-MOTOR-ASSY	1
11	620-1623-24	CAM GEAR	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	620-1624-24	GEAR COVER	1
13	621-0732-21	M-GEAR B	1
14	621-0733-20	M-GEAR C	1
15	716-1850-01	SCREW(M2.0x2.0)	3
16	716-3451-01	SCREW(M1.7x2.5)	2
17	746-0761-00	WASHER	1
18	746-0768-00	WASHER	2
19	750-6756-21	SW-L-SPRING	1
20	716-1851-03	SCREW(M2.0x3.0)	2
21	746-0941-00	WASHER	1


N-Drive-CH unit section

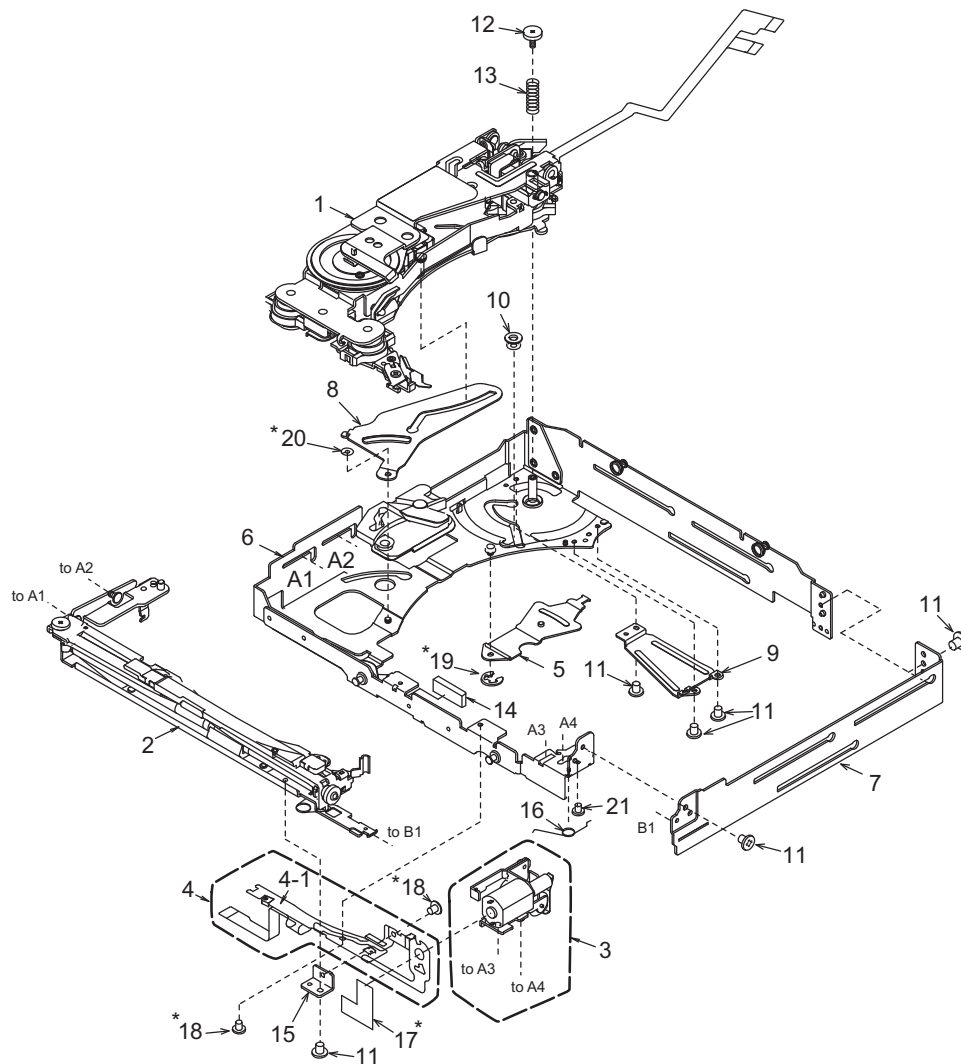

* Do not reuse the following parts.
(No.17,18,19,20)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-604-100	N-DRIVE UNIT	1	11	716-3450-00	SCREW(M1.7x2.0)	6
2	HBS-567-200	LOADING-U-ASSY	1	12	716-3459-01	SCREW(M1.7x2.0)	1
3	HBS-556-100	LO-MOTOR-S-ASSY	1	13	750-6761-20	DRIVE SPRING A	1
4	HBS-552-200	L-SENSOR-S-ASSY	1	14	345-5868-01	RUBBER PART	1
4-1	-----	SENSOR-L-FPC	1	15	620-1651-21	S-PWB-PLATE	1
5	966-0676-21	D-SHT LK-A-ASSY	1	16	750-6754-20	LO-ES-SPRING B	1
6	966-1755-23	DRIVE-CH A ASSY	1	17	345-5424-01	SEN-FPC GUIDE	1
7	620-1681-21	DRIVE CHASSIS B	1	18	716-1859-01	SCREW(M1.7x2.0)	2
8	620-1672-21	DR-SUPPORT-PL	1	19	744-0039-00	E-RING	1
9	620-1680-20	D-SHIFT COVER	1	20	746-0870-00	WASHER	1
10	622-1743-21	D-SHIFT ROLLER B	1	21	716-3538-00	SCREW(M1.7x2.0)	1

Upper unit assy section

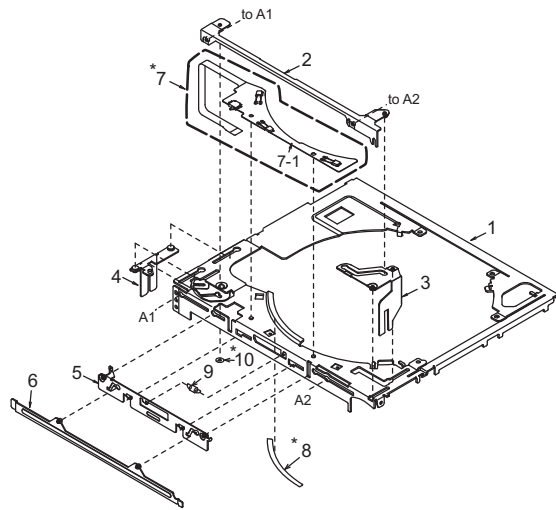

* Do not reuse the following parts.
(No.7,8,10)


NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1761-22	UPPER-CHA-ASSY	1
2	966-1765-20	LO-SHIFT A ASSY	1
3	966-0700-22	LO-SHIFT B ASSY	1
4	966-0701-21	LO-SHIFT ASSY	1
5	966-1766-20	SHUTTER-PL-ASSY	1
6	966-1763-20	SHUTTER ASSY	1
7	HBS-553-200	U-SENSOR-S-ASSY	1
7-1	-----	SENSOR-U-FPC	1
8	347-7272-00	RATTLE SHEET	1
9	750-6755-21	SHUTTER SPRING	1
10	746-0870-00	WASHER	1

[Grease Point]

* Grease : SANKOL FG-87HSR

	Put grease on the surface	
	Put grease on the reverse side	
	Put grease on the both sides	
	Put grease on the edge	

①

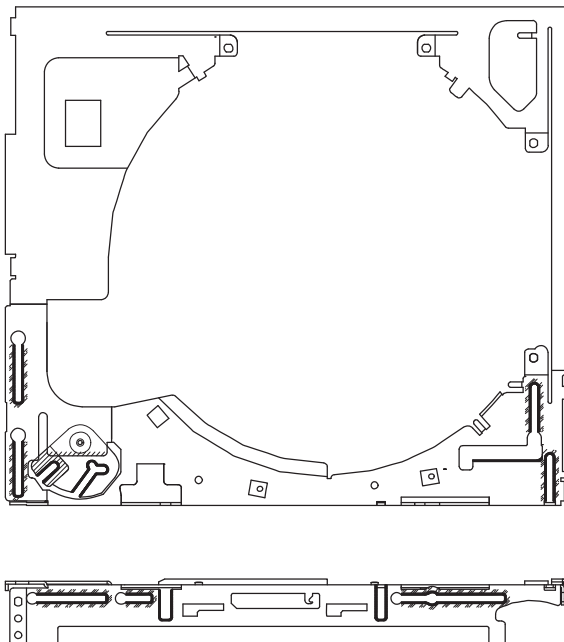

②




③



④



⑤



⑥



ELECTRICAL PARTS LIST

CD PWB(BM1)

* Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1052-78	1uF	C76	168-5622-55	5600pF K	R16	119-1041-15	1/10W 100k ohm
C3	168-1042-78	16V 0.1uF	C77	168-1032-55	0.01uF K	R17	119-1041-15	1/10W 100k ohm
C4	043-0559-90	6.3V 22uF	C79	166-1501-50	15pF CH	R18	119-1041-15	1/10W 100k ohm
C5	168-1032-55	0.01uF K	C80	166-1501-50	15pF CH	R19	119-1041-15	1/10W 100k ohm
C6	042-1702-90	6.3V 100uF	C101	043-0563-90	16V 47uF	R20	119-1041-15	1/10W 100k ohm
C7	168-1052-78	1uF	CCT1	050-0145-59	1/16W 22 ohm x4	R21	119-2221-15	1/10W 2.2k ohm
C9	168-1052-78	1uF	CCT2	050-0145-54	1/16W 47k ohm x4	R22	119-4711-15	1/10W 470 ohm
C11	168-1052-78	1uF	CCT3	050-0145-54	1/16W 47k ohm x4	R23	119-1051-15	1/10W 1M ohm
C12	042-0671-01	10V 47uF TA	CCT4	050-0145-55	1/16W 10k ohm x4	R24	119-2211-15	1/10W 220 ohm
C13	168-1052-78	1uF	CCT5	050-0140-55	1/32W 2.2k ohmx4J	R25	119-2211-15	1/10W 220 ohm
C14	168-1042-78	16V 0.1uF	D1	001-4301-14	HZU 3.0B1	R26	119-1041-15	1/10W 100k ohm
C15	168-1052-78	1uF	D1	001-0529-14	MA8030-L	R27	119-1051-15	1/10W 1M ohm
C16	043-0559-90	6.3V 22uF	D2	001-0367-91	1SS226	R28	119-1041-15	1/10W 100k ohm
C17	168-1032-55	0.01uF K	D3	001-4301-13	HZU 2.7B2	R29	119-1041-15	1/10W 100k ohm
C18	168-1052-78	1uF	D3	001-0529-13	MA8027-H	R30	119-4701-15	1/10W 47 ohm
C19	043-0559-90	6.3V 22uF	D4	001-4301-18	HZU 3.6B1	R31	119-2201-15	1/10W 22 ohm
C20	168-1042-78	16V 0.1uF	D4	001-0529-18	MA8036-L	R32	119-1051-15	1/10W 1M ohm
C21	168-1032-55	0.01uF K	D5	001-2612-90	RB520S-30	R33	119-2211-15	1/10W 220 ohm
C23	043-0559-90	6.3V 22uF	D6	001-2612-90	RB520S-30	R35	119-1051-15	1/10W 1M ohm
C24	043-0559-90	6.3V 22uF	D7	001-9210-50	AVR-	R36	119-4721-15	1/10W 4.7k ohm
C25	168-4732-78	0.047uF K			M1608C270MTAAD	R37	119-4731-15	1/10W 47k ohm
C26	166-4711-50	470pF CH	D8	001-9210-50	AVR-	R38	119-2231-15	1/10W 22k ohm
C28	168-4732-78	0.047uF K			M1608C270MTAAD	R39	119-1041-15	1/10W 100k ohm
C29	166-4711-50	470pF CH	IC2	052-5071-30	TMP91CY22IFG-6R96	R40	119-4721-15	1/10W 4.7k ohm
C30	166-1007-50	10pF CH	IC3	051-6733-00	TC94A73MFG-201	R41	119-4731-15	1/10W 47k ohm
C31	166-1007-50	10pF CH	IC4	051-6060-08	BD7961FM-E2	R44	119-2201-15	1/10W 22 ohm
C32	168-1042-78	16V 0.1uF	IC5	051-5445-08	BD5227G-TR	R45	119-1511-15	1/10W 150 ohm
C33	168-2222-55	2200pF K	IC8	051-9402-78	BR93L56RFVM-W	R46	119-4721-15	1/10W 4.7k ohm
C34	168-1042-78	16V 0.1uF	IC9	051-6072-08	BD7931FE2	R48	119-1041-15	1/10W 100k ohm
C35	168-1042-78	16V 0.1uF	IC10	051-5833-00	GP1S093HCZ	R49	119-0000-05	1/10W 0 ohm JW
C36	168-1042-78	16V 0.1uF	IC11	051-3392-90	S-1323B15NB-N8ATFG	R50	119-2211-15	1/10W 220 ohm
C37	168-6822-55	6800pF K				R51	119-0000-05	1/10W 0 ohm JW
C39	168-1042-78	16V 0.1uF	J1	074-1237-69	19PIN	R52	119-1041-15	1/10W 100k ohm
C40	168-3332-78	0.033uF K	J2	074-1201-65	15P	R53	119-5621-15	1/10W 5.6k ohm
C41	168-1042-78	16V 0.1uF	J3	074-1138-56	6P	R55	119-3341-15	1/10W 330k ohm
C42	168-1042-78	16V 0.1uF	J4	074-1100-61	SOCKET 11P	R56	119-4731-15	1/10W 47k ohm
C43	168-1042-78	16V 0.1uF	J5	074-1201-61	11P SOCKET	R57	119-2231-15	1/10W 22k ohm
C45	168-1042-78	16V 0.1uF	Q1	060-0252-01	PT4850F	R58	119-0000-05	1/10W 0 ohm JW
C46	168-1042-78	16V 0.1uF	Q2	125-0021-91	DTA114EUA	R59	119-1511-15	1/10W 150 ohm
C48	168-1042-78	16V 0.1uF	Q3	198-3018-00	2SK3018	R60	119-4731-15	1/10W 47k ohm
C49	168-1042-78	16V 0.1uF	Q4	190-2060-00	2SA2060	R61	119-1041-15	1/10W 100k ohm
C50	168-1042-78	16V 0.1uF	Q8	190-2060-00	2SA2060	R62	119-1041-15	1/10W 100k ohm
C51	168-1042-78	16V 0.1uF	Q9	125-9026-90	IMF29	R63	119-1041-15	1/10W 100k ohm
C52	168-5622-55	5600pF K	Q10	125-2027-91	DTC114EUA	R64	119-1011-15	1/10W 100 ohm
C53	168-1042-78	16V 0.1uF	Q11	125-0021-91	DTA114EUA	R65	119-1041-15	1/10W 100k ohm
C54	166-6801-50	68pF CH	Q12	125-2027-91	DTC114EUA	R66	117-5611-15	1/8W 560 ohm
C55	168-1532-55	0.015uF K	Q13	125-9026-90	IMF29	R67	117-7511-15	1/8W 750 ohm
C56	168-1042-78	16V 0.1uF	R1	119-6811-15	1/10W 680 ohm	R68	117-7511-15	1/8W 750 ohm
C57	168-1032-55	0.01uF K	R2	119-6811-15	1/10W 680 ohm	R69	119-1041-15	1/10W 100k ohm
C58	168-1042-78	16V 0.1uF	R3	032-0163-91	1/2W 10 ohm	R81	116-1591-15	1/4W 1.5 ohm
C59	168-1042-78	16V 0.1uF	R4	032-0163-91	1/2W 10 ohm	R211	119-1041-15	1/10W 100k ohm
C60	168-1522-55	1500pF K	R5	119-2231-15	1/10W 22k ohm	R212	119-1041-15	1/10W 100k ohm
C61	168-3322-55	3300pF K	R6	116-1001-15	1/4W 10 ohm	S1	013-7416-50	SW SPVL110200
C62	168-1032-55	0.01uF K	R7	119-1021-15	1/10W 1k ohm	S2	013-7416-50	SW SPVL110200
C64	168-1042-78	16V 0.1uF	R8	116-1591-15	1/4W 1.5 ohm	S3	013-7416-50	SW SPVL110200
C65	168-1032-55	0.01uF K	R9	119-2231-15	1/10W 22k ohm	S4	013-7415-50	SPVG110400
C67	168-1032-55	0.01uF K	R10	119-4711-15	1/10W 470 ohm	X1	061-3534-90	16.92MHz
C69	168-1532-55	0.015uF K	R11	119-2211-15	1/10W 220 ohm	X3	060-1545-90	20MHz
C70	166-4701-50	47pF CH	R12	119-6811-15	1/10W 680 ohm	PWB	039-3083-21	PWB(WITHOUT COMPONENT)
C71	168-1042-78	16V 0.1uF	R13	119-1011-15	1/10W 100 ohm			
C72	168-1042-78	16V 0.1uF	R14	119-2231-15	1/10W 22k ohm			
C74	166-6097-50	6pF CH	R15	119-8231-15	1/10W 82k ohm			
C75	168-1042-78	16V 0.1uF						

Sensor-L-FPC(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT1	060-0252-01	PT14850F	PT3	051-5833-00	GP1S093HCZ	PWB	039-2467-21	PWB(WITHOUT COMPONENTS)
PT2	060-0252-01	PT14850F						

Sensor-U-FPC(BM3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED1	001-7077-00	GL4804	LED3	001-7077-00	GL4804	PWB	039-2466-20	PWB(WITHOUT COMPONENTS)
LED2	001-7077-00	GL4804	S5	013-7417-50	ABC1122P161			