


Exploded view of general assembly

Block No.M1MM

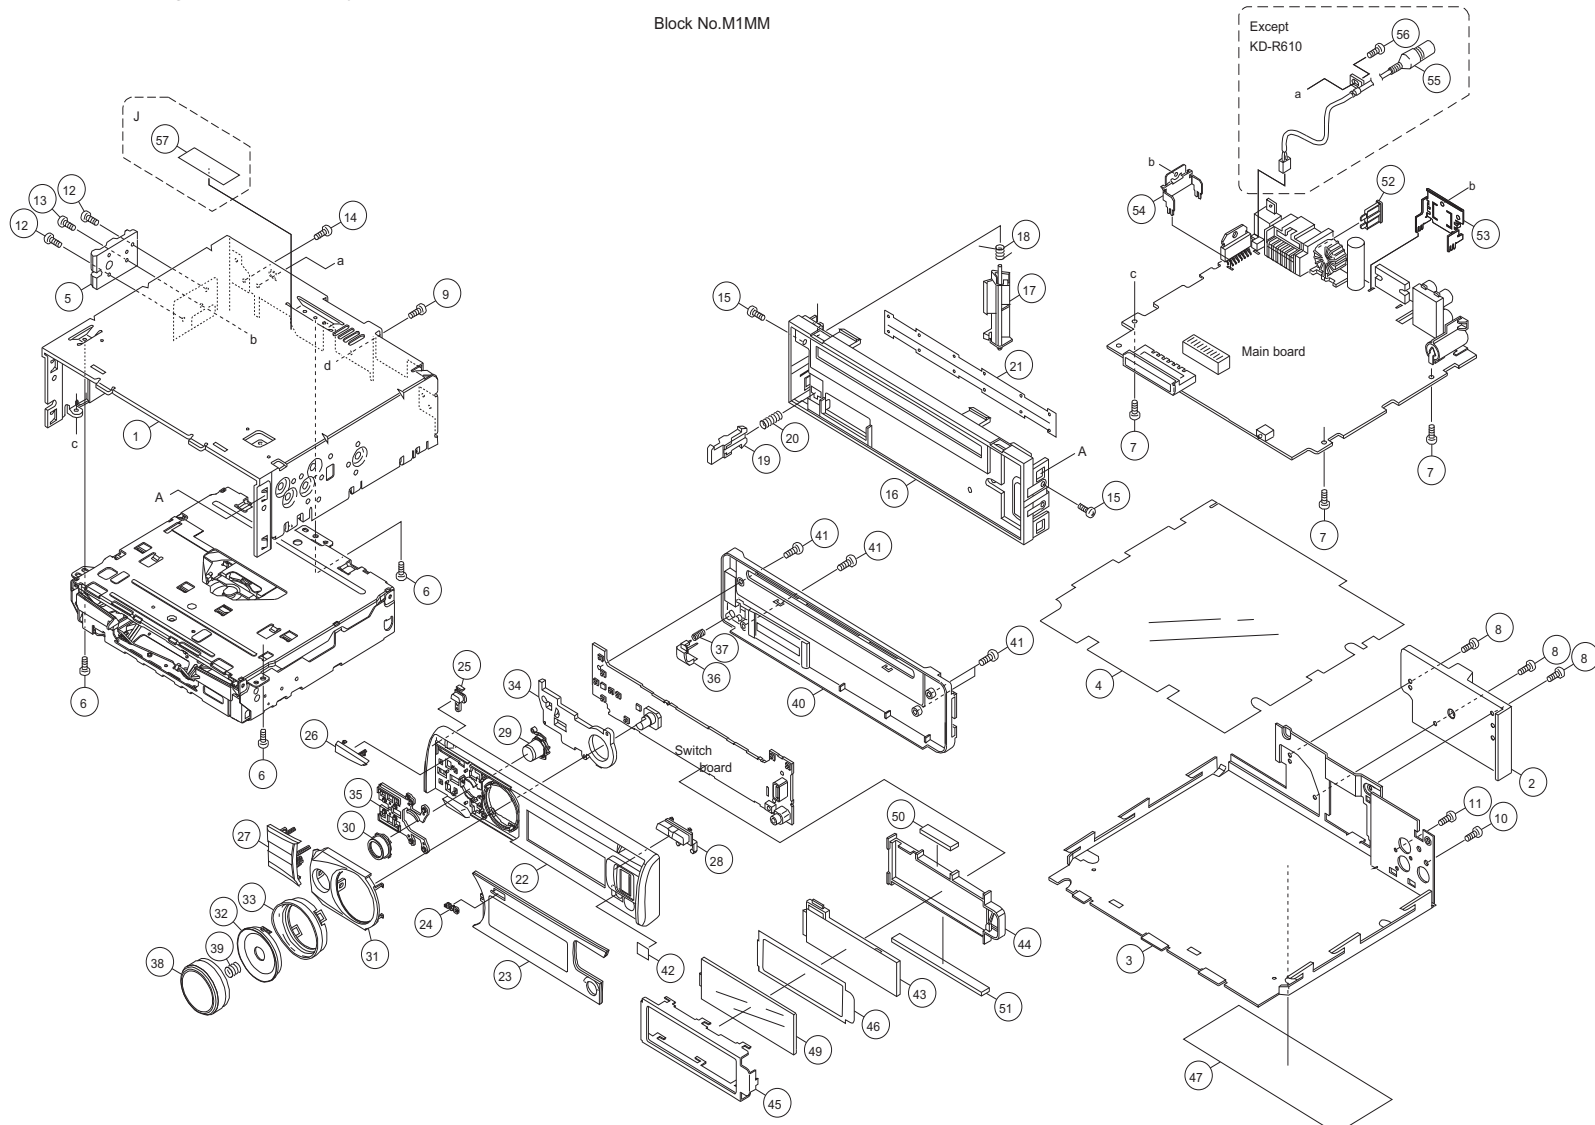

The parts without symbol number are not service.


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
General assembly <M1MM>						
	1	GE10248-012A	TOP CHASSIS		1	A,C,D,E,F,G,H,I
	1	GE10248-003A	TOP CHASSIS		1	B
	2	GE33323-002A	HEAT SINK		1	
	3	GE20248-003A	BOTTOM COVER		1	
	4	GE33325-003A	INSULATOR		1	
	5	GE40395-002A	SIDE PANEL		1	
	6	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	7	GE40377-002A	SCREW		3	
	8	GE40377-003A	SPECIAL SCREW		3	
	9	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	10	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	11	QYSDSF2606ZA	TAP SCREW	M2.6 x 6mm	1	
	12	GE40377-002A	SCREW		2	
	13	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	14	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	15	QYSDST2004ZA	TAP SCREW	M2 x 4mm	2	
	16	GE10242-012A	FRONT CHASSIS		1	
	17	GE33792-001A	LOCK LEVER		1	
	18	GE40368-002A	TORSION SPRING		1	
	19	GE32810-001A	RELEASE LEVER		1	
	20	GE30999-004A	COMP.SPRING		1	
	21	GE40432-001A	BLIND		1	
	22	GE33886-002A	FRT PANEL ASSY		1	A
	22	GE33886-003A	FRT PANEL ASSY		1	B,C,D,E,F,G,H
	22	GE33886-006A	FRT PANEL ASSY		1	I
	23	GE33885-019A	FINDER ASSY		1	A
	23	GE33885-013A	FINDER ASSY		1	B
	23	GE33885-021A	FINDER ASSY		1	C,D,E
	23	GE33885-015A	FINDER ASSY		1	F,G,H
	23	GE33885-014A	FINDER ASSY		1	I
	24	GE40463-001A	JVC BADGE		1	
	25	GE33800-002A	EJECT BUTTON		1	
	26	GE33801-002A	SOURCE BUTTON		1	
	27	GE33802-004A	NAVI BUTTON		1	
	28	GE33803-001A	DISP BUTTON		1	
	29	GE40495-001A	MENU BTN ASSY		1	
	30	GE33805-003A	BUTTON RIM		1	A
	30	GE33805-001A	BUTTON RIM		1	B,C,D,E,F,G,H
	30	GE33805-002A	BUTTON RIM		1	I
	31	GE33806-002A	PHONE BACK BTN		1	A
	31	GE33806-003A	PHONE BACK BTN		1	B,F,G,H
	31	GE33806-004A	PHONE BACK BTN		1	C,D,E
	31	GE33806-001A	PHONE BACK BTN		1	I
	32	GE33807-001A	RIM LENS		1	
	33	GE33808-003A	RIM COVER		1	A
	33	GE33808-001A	RIM COVER		1	B,C,D,E,F,G,H
	33	GE33808-002A	RIM COVER		1	I
	34	GE33809-002A	LIGHT GUIDE		1	
	35	GE33810-001A	RUBBER BASE		1	
	36	GE33881-002A	DETACH BUTTON		1	
	37	GE30999-009A	COMP.SPRING		1	
	38	GE33704-003A	VOLUME KNOB		1	A
	38	GE33704-001A	VOLUME KNOB		1	B,C,D,E,F,G,H
	38	GE33704-002A	VOLUME KNOB		1	I
	39	GE40127-006A	KNOB SPRING		1	
	40	GE10273-003A	REAR COVER		1	
	41	VKZ4777-010	MINI SCREW		4	
	42	GE40431-003A	REMOTE SHEET		1	
	43	GE33813-001A	LCD LENS		1	
	44	GE33814-001A	LENS CASE		1	
	45	GE33815-001A	LCD CASE		1	
	46	GE40482-001A	LIGHTING SHEET		1	
	47	GE33854-001A	NAME PLATE		1	A
	47	GE33860-001A	NAME PLATE		1	B
	47	GE33866-002A	NAME PLATE		1	C,D,E
	47	GE33863-001A	NAME PLATE		1	F,G,H
	47	GE33857-002A	NAME PLATE		1	I
	49	QLD0631-001	LCD MODULE		1	
	50	QNZ1002-001	RUBBER CONNE		1	
	51	QNZ1003-001	RUBBER CONNE		1	
△	52	QMFZ064-150-J1	FUSE	15A	1	
	53	GE40439-001A	POWER IC BKT		1	
	54	GE40308-001A	REG IC BRACKET		1	
	55	QAM0992-002	CAR CABLE		1	A,C,D,E,F,G,H,I
	56	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	1	A,C,D,E,F,G,H,I
	57	GE40442-001A	FCC RULE LABEL		1	A,B,I

CD mechanism assembly

FMU-CD6-21D

Block No.MBMM

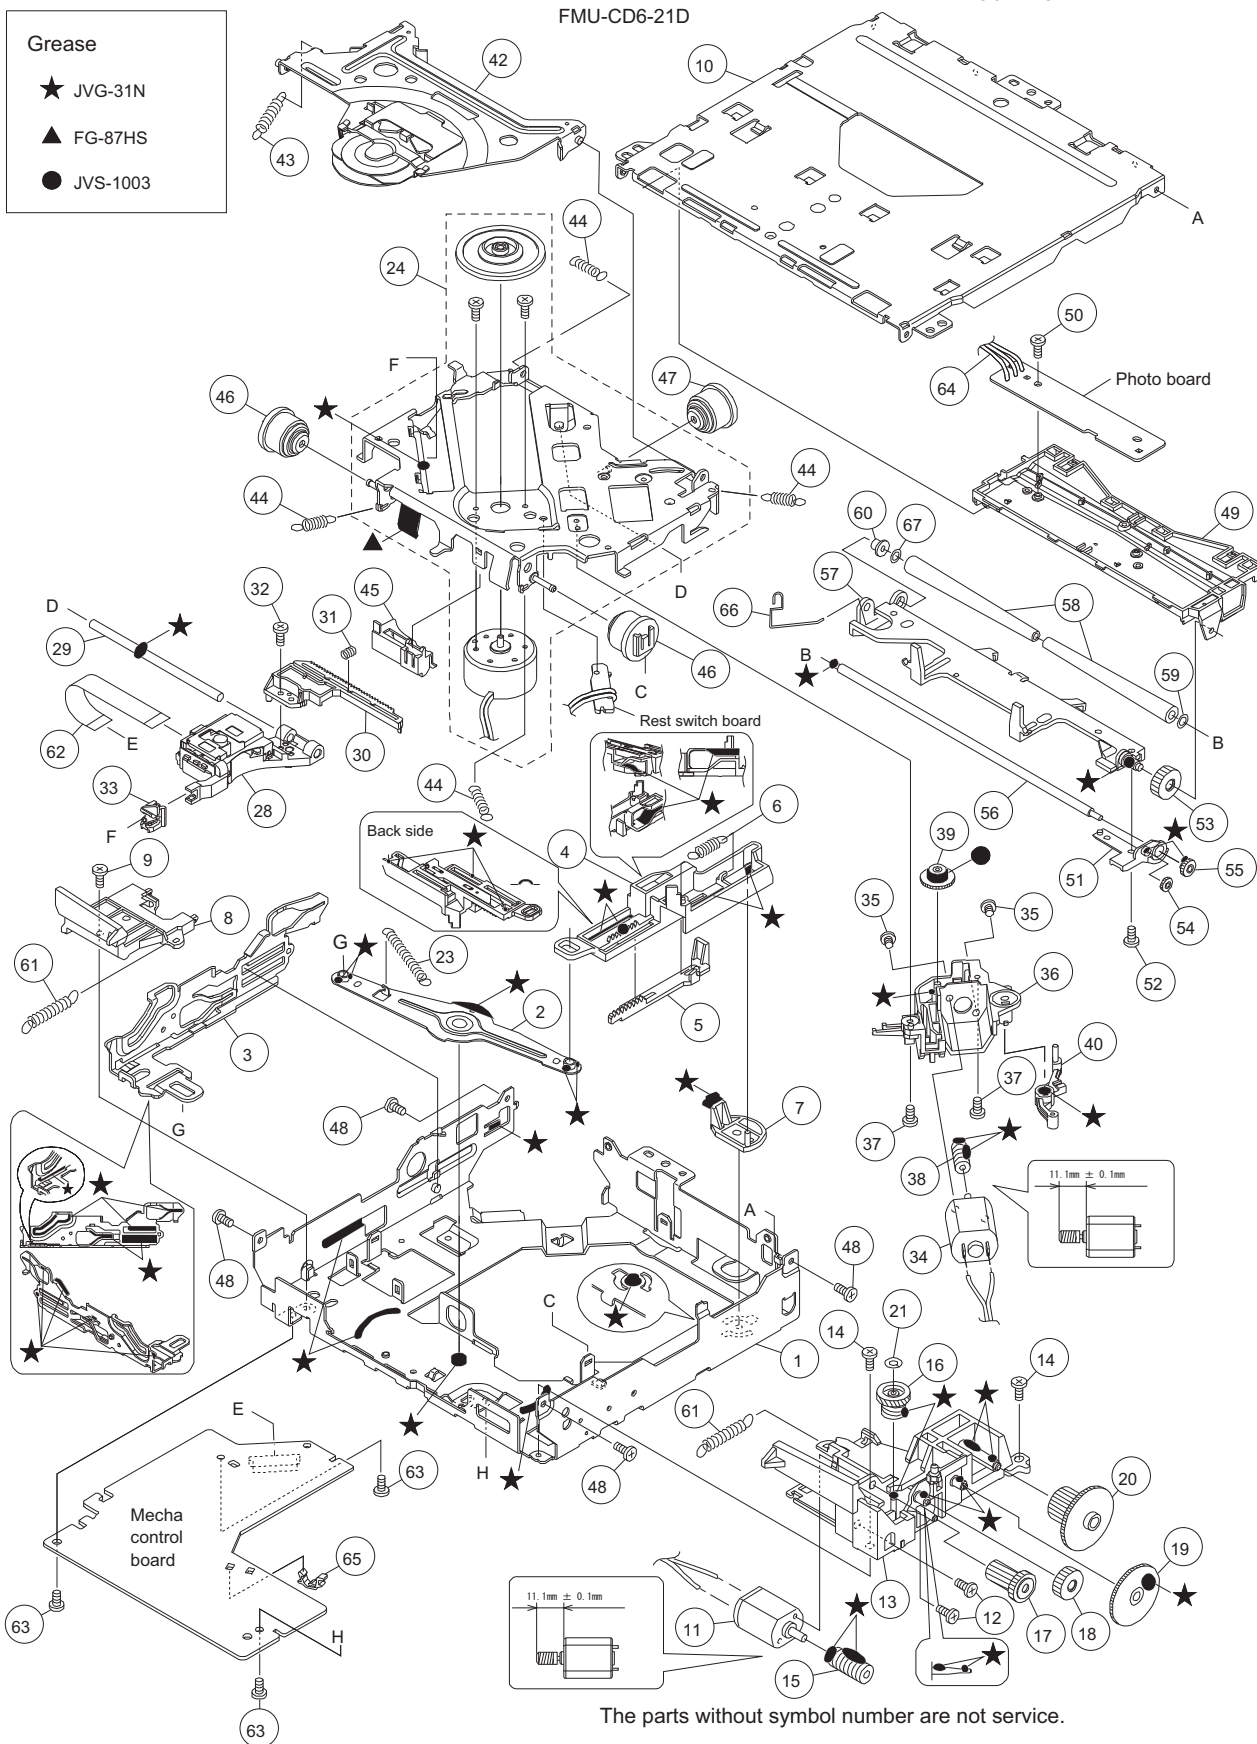

No.MA467

created date:2010-02-09

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

FMU-CD6-21D CD mechanism <MBMM>

1	LV11598-001A	MECHA FRAME		1	A,B,C,D,E,F,G,H,I
2	LV36800-002A	LINK ARM		1	A,B,C,D,E,F,G,H,I
3	LV22300-002A	SLIDE CAM (L)		1	A,B,C,D,E,F,G,H,I
4	LV22298-002A	SLIDE CAM(R)		1	A,B,C,D,E,F,G,H,I
5	LV36802-001A	LOAD RACK		1	A,B,C,D,E,F,G,H,I
6	LV44552-001A	RETURN SPRING		1	A,B,C,D,E,F,G,H,I
7	LV36803-002A	F LOCK LEVER		1	A,B,C,D,E,F,G,H,I
8	LV36804-002A	CAM COVER		1	A,B,C,D,E,F,G,H,I
9	VKZ4539-054	MINI SCREW		1	A,B,C,D,E,F,G,H,I
10	LV11260-003A	TOP COVER		1	A,B,C,D,E,F,G,H,I
11	QAR0373-002	MOTOR		1	A,B,C,D,E,F,G,H,I
12	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	A,B,C,D,E,F,G,H,I
13	LV36903-003A	L M BASE ASSY		1	A,B,C,D,E,F,G,H,I
14	VKZ4539-054	MINI SCREW		2	A,B,C,D,E,F,G,H,I
15	LV36806-001A	L WORM GEAR		1	A,B,C,D,E,F,G,H,I
16	LV36805-002A	M WHEEL GEAR		1	A,B,C,D,E,F,G,H,I
17	LV36807-001A	A WHEEL GEAR		1	A,B,C,D,E,F,G,H,I
18	LV36808-001A	R ACT GEAR(1)		1	A,B,C,D,E,F,G,H,I
19	LV36809-001A	LOAD ACT GEAR		1	A,B,C,D,E,F,G,H,I
20	LV36810-001A	LOADING GEAR		1	A,B,C,D,E,F,G,H,I
21	QYWDL1230250	SLIT WASHER	3mm/1.2mm x 0.25mm	1	A,B,C,D,E,F,G,H,I
23	LV44658-001A	LINK SPRING		1	A,B,C,D,E,F,G,H,I
24	CM-FLMCD1D	SPINDLE MOTOR ASSY		1	A,B,C,D,E,F,G,H,I
28	QAL1226-001	PICK UP		1	A,B,C,D,E,F,G,H,I
29	LV44555-001A	MAIN SHAFT		1	A,B,C,D,E,F,G,H,I
30	LV36799-001A	RACK PLATE		1	A,B,C,D,E,F,G,H,I
31	LV45227-001A	RACK SPRING		1	A,B,C,D,E,F,G,H,I
32	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	A,B,C,D,E,F,G,H,I
33	LV36813-001A	SUB GUIDE CAP		1	A,B,C,D,E,F,G,H,I
34	QAR0144-003	MOTOR	2.0V DC	1	A,B,C,D,E,F,G,H,I
35	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	A,B,C,D,E,F,G,H,I
36	LV22296-001A	F MOTOR HOLDER		1	A,B,C,D,E,F,G,H,I
37	VKZ4539-054	MINI SCREW		2	A,B,C,D,E,F,G,H,I
38	LV36814-001A	F WORM GEAR		1	A,B,C,D,E,F,G,H,I
39	LV36815-002A	F WHEEL GEAR		1	A,B,C,D,E,F,G,H,I
40	LV36816-001A	TRIGGER ARM		1	A,B,C,D,E,F,G,H,I
42	LV37326-003A	CLAMPER ASSY		1	A,B,C,D,E,F,G,H,I
43	LV44557-002A	CLAMPER SPRING		1	A,B,C,D,E,F,G,H,I
44	LV44558-001A	SUS SPRING		4	A,B,C,D,E,F,G,H,I
45	LV36820-001A	WIRE HOLDER		1	A,B,C,D,E,F,G,H,I
46	LV36904-001A	DAMPER		2	A,B,C,D,E,F,G,H,I
47	LV37061-001A	DAMPER		1	A,B,C,D,E,F,G,H,I
48	VKZ4539-054	MINI SCREW		4	A,B,C,D,E,F,G,H,I
49	LV11264-003A	DISC PLATE		1	A,B,C,D,E,F,G,H,I
50	LV44586-001A	SPECIAL SCREW		1	A,B,C,D,E,F,G,H,I
51	LV36801-002A	GEAR HOLDER		1	A,B,C,D,E,F,G,H,I
52	VKZ4539-054	MINI SCREW		1	A,B,C,D,E,F,G,H,I
53	LV36821-001A	R ACT GEAR(2)		1	A,B,C,D,E,F,G,H,I
54	LV36822-001A	R ACT GEAR(3)		1	A,B,C,D,E,F,G,H,I
55	LV36823-001A	ROLLER GEAR		1	A,B,C,D,E,F,G,H,I
56	LV44559-003A	ROLLER SHAFT		1	A,B,C,D,E,F,G,H,I
57	LV22744-001A	R HOLDER ASSY 2		1	A,B,C,D,E,F,G,H,I
58	LV44560-001A	ROLLER		2	A,B,C,D,E,F,G,H,I
59	LV44590-001A	WASHER		1	A,B,C,D,E,F,G,H,I
60	LV45268-001A	ROLLER COLLAR 2		1	A,B,C,D,E,F,G,H,I
61	LV44562-002A	ROLLER SPRING		2	A,B,C,D,E,F,G,H,I
62	QAL0817-003	FPC		1	A,B,C,D,E,F,G,H,I
63	VKZ4539-054	MINI SCREW		3	A,B,C,D,E,F,G,H,I
64	WJS0085-001A-E	E-FL/RB WIRE		1	A,B,C,D,E,F,G,H,I
65	LV34916-002A	WIRE CLAMP		1	A,B,C,D,E,F,G,H,I
66	LV45269-001A	R HOLDER ROD		1	A,B,C,D,E,F,G,H,I
67	LV45270-001A	WASHER 2		1	A,B,C,D,E,F,G,H,I

Electrical parts list Main board <01>

△	IC1	TEF6606T/V5-X	IC	1	
	IC71	LC72725KV-X	IC	1	C,D,E
	IC161	TDA7718N-X	IC	1	
△	IC301	TDA7851A	IC	1	
	IC371	NJM2792V-X	IC	1	A,F,G,H,I
	IC581	NJM4565E-X	IC	1	
△	IC701	MN101E16YFM	IC(MCU)	1	A,B,F,G,H,I
△	IC701	MN101E16YFP	IC(MCU)	1	C,D,E
	IC702	S-80824CNNB-G-W	IC	1	
	IC702 or	IC-PST3424U-X	IC	1	
	IC771	R1EX24002ASAA-X	IC	1	A,B,F,G,H,I
	IC771	R1EX24016ASAA-X	IC	1	C,D,E
	IC801	74AHCT126PW-X	IC	1	
△	IC901	R2S25400DS-E	IC	1	
	IC902	XC6213B332NG-X	IC	1	
	Q321	IMX9-W	PAIR TRANSISTOR	1	
	Q331	IMX9-W	PAIR TRANSISTOR	1	
	Q701	RT1N441C-X	TRANSISTOR	1	
	Q781	RT1P141C-X	DIGI TRANSISTOR	1	
	Q781 or	UN2111-X	TRANSISTOR	1	A
	Q782	2SC1623A/5-6/-X	TRANSISTOR	1	
	Q782 or	2SC3928A/QR/-X	TRANSISTOR	1	
	Q784	RT1P141C-X	DIGI TRANSISTOR	1	
	Q784 or	UN2111-X	TRANSISTOR	1	A

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	Q881	RT1N141C-X	DIGI TRANSISTOR		1		
	Q881 or	UN2211-X	TRANSISTOR		1	A	
	Q891	RT1N141C-X	DIGI TRANSISTOR		1	C,D,E	
	Q921	2SB1132/QR/-W	TRANSISTOR		1	F,G,H	
	Q922	RT1N141C-X	DIGI TRANSISTOR		1	F,G,H	
	Q976	RT1N141C-X	DIGI TRANSISTOR		1		
	Q976 or	UN2211-X	TRANSISTOR		1	A	
	Q977	2SA812A/5-6/-X	TRANSISTOR		1		
	Q977 or	ISA1530AC1/QR/X	TRANSISTOR		1		
	Q978	2SC1623A/5-6/-X	TRANSISTOR		1		
	Q978 or	2SC3928A/QR/-X	TRANSISTOR		1		
	D321	BAW56-TP-X	SI DIODE		1		
	D321 or	MC2836-X	DIODE		1		
	D331	BAW56-TP-X	SI DIODE		1		
	D331 or	MC2836-X	DIODE		1		
	D712	HSU119-X	SI DIODE		1		
	D712 or	MA111-X	SI DIODE		1	A	
	D715	RKZ5.1B2KG-X	Z DIODE		1		
	D716	RKZ5.1B2KG-X	Z DIODE		1		
	D717	RKZ5.1B2KG-X	Z DIODE		1		
	D718	RKZ5.1B2KG-X	Z DIODE		1		
	D781	HSU119-X	SI DIODE		1		
	D781 or	MA111-X	SI DIODE		1	A	
	D784	RKZ10B2KG-X	Z DIODE		1		
	D851	MBRX130-TP-X	SB DIODE		1	F,G,H	
	D852	MBRX130-TP-X	SB DIODE		1	F,G,H	
	D891	BAW56-TP-X	SI DIODE		1	C,D,E	
	D891 or	MC2836-X	DIODE		1	C,D,E	
△	D901	1N5401-BPC04	SI DIODE		1		
△	D901 or	1N5401-04	SI DIODE		1		
	D903	HSU119-X	SI DIODE		1		
	D903 or	MA111-X	SI DIODE		1	A	
	D971	MBRX130-TP-X	SB DIODE		1		
	D971 or	MA22D23-X	SB DIODE		1	A	
	D972	MBRX130-TP-X	SB DIODE		1		
	D972 or	MA22D23-X	SB DIODE		1	A	
	C1	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1		
	C2	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1		
	C3	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1		
	C4	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1		
	C5	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1		
	C7	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1		
	C10	NCB21EK-105X	C CAPACITOR	1uF 25V K	1		
	C11	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C12	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C13	NCB21EK-105X	C CAPACITOR	1uF 25V K	1		
	C14	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1		
	C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C22	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1		
	C23	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C24	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C25	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1		
	C26	NCJ11EK-106X-A	C CAPACITOR	10uF 25V K	1		
	C27	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1		
	C33	NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1		
	C71	NCB31HK-561X	C CAPACITOR	560pF 50V K	1	C,D,E	
	C72	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	C,D,E	
	C73	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	C,D,E	
	C74	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	C,D,E	
	C75	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	C,D,E	
	C76	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	C,D,E	
	C78	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	C,D,E	
	C161	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C162	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C163	QTE1H64-225Z	E CAPACITOR	2.2uF 50V	1		
	C164	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C165	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C168	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C170	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1		
	C171	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C172	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C173	QTE1H64-225Z	E CAPACITOR	2.2uF 50V	1		
	C174	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C175	QTE1H57-335Z	E CAPACITOR	3.3uF 50V	1		
	C176	QTE1H57-335Z	E CAPACITOR	3.3uF 50V	1		
	C177	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1		
	C178	QTE1C57-106Z	E CAPACITOR	10uF 16V	1		
	C184	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C303	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	C304	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	C305	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1		
	C306	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1		
	C311	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		
	C312	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C313	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	C314	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	C315	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C316	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C317	QTE1C57-476Z	E CAPACITOR	47uF 16V	1	
	C319	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C320	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C322	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C323	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C326	QERF1CM-226Z-E	E CAPACITOR	22uF 16V M	1	
	C327	NCB21AK-225X-A	C CAPACITOR	2.2uF 10V K	1	
	C328	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C329	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C340	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C365	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C366	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C371	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,F,G,H,I
	C372	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,F,G,H,I
	C373	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	A,F,G,H,I
	C374	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	A,F,G,H,I
	C375	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	A,F,G,H,I
	C376	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F,G,H,I
	C381	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,F,G,H,I
	C382	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,F,G,H,I
	C383	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	A,F,G,H,I
	C384	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	A,F,G,H,I
	C393	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C394	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C583	NCB31HK-821X	C CAPACITOR	820pF 50V K	1	
	C584	NCB31HK-821X	C CAPACITOR	820pF 50V K	1	
	C585	QTE1H57-475Z	E CAPACITOR	4.7uF 50V	1	
	C586	QTE1H57-475Z	E CAPACITOR	4.7uF 50V	1	
	C587	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C588	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C590	QTE0J57-476Z	E CAPACITOR	47uF 6.3V	1	
	C591	QTE1A57-107Z	E CAPACITOR	100uF 10V	1	
	C592	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C703	NDC31HJ-8R0X	C CAPACITOR	8pF 50V J	1	
	C704	NDC31HJ-9R0X	C CAPACITOR	9pF 50V J	1	
	C707	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C708	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C709	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C711	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C714	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C717	NCB31HK-821X	C CAPACITOR	820pF 50V K	1	
	C718	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C719	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C720	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C721	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C722	QERF1EM-475Z	E CAPACITOR	4.7uF 25V M	1	
	C723	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	C,D,E
	C724	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C725	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C733	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C736	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C771	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C781	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	
	C784	QERF1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C801	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C851	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	F,G,H
	C852	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	F,G,H
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C891	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	C,D,E
	C901	QE20870-278	E CAPACITOR	2700uF	1	
	C902	NCB21EK-474X	C CAPACITOR	0.47uF 25V K	1	
	C903	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C905	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C906	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C908	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C909	QERF1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C912	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C913	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C917	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C951	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C952	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C971	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	R1	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	
	R2	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	
	R3	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R6	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R7	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R11	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1	
	R14	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R15	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R71	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	C,D,E
	R72	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	C,D,E
	R73	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	C,D,E
	R74	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	C,D,E
	R161	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R162	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R164	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R168	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R169	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R171	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R172	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R301	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R302	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R305	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R309	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R311	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R321	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R322	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R323	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R324	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R331	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R332	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R333	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R334	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R341	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R342	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R343	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R344	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R351	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R352	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R353	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R354	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R371	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,F,G,H,I
	R372	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,F,G,H,I
	R373	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,F,G,H,I
	R374	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,F,G,H,I
	R375	NRS181J-223X	MG RESISTOR	22kΩ 1/8W J	1	A,F,G,H,I
	R376	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,F,G,H,I
	R377	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,F,G,H,I
	R378	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,F,G,H,I
	R381	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,F,G,H,I
	R382	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,F,G,H,I
	R383	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,F,G,H,I
	R384	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,F,G,H,I
	R385	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,F,G,H,I
	R386	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,F,G,H,I
	R387	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,F,G,H,I
	R388	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,F,G,H,I
	R389	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R390	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R391	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R392	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R583	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R584	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R585	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R586	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R587	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R588	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R591	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R592	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R593	NRS181J-223X	MG RESISTOR	22kΩ 1/8W J	1	
	R594	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R702	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R703	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R704	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R708	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	F,G,H
	R709	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,I
	R711	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R713	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R714	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R715	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R716	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R717	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R718	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R719	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R720	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R721	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R722	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R723	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R724	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R725	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R726	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R727	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R728	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R730	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R731	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R732	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R733	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R736	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1		
	R737	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1		
	R738	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1		
	R739	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R740	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1		
	R741	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R742	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R743	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	C,D,E	
	R744	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1		
	R745	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	C,D,E	
	R746	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R747	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R748	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1		
	R749	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R750	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R752	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R753	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R755	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R756	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R758	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R759	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R761	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R762	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	F,G,H	
	R763	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1		
	R764	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	C,D,E	
	R765	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R766	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R767	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R768	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1		
	R770	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1		
	R771	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1		
	R772	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1		
	R773	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1		
	R774	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R775	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1		
	R777	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R779	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R781	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1		
	R782	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R783	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R784	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R801	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R802	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R803	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1		
	R804	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	1		
	R805	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R806	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R807	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R808	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R809	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R810	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1		
	R811	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1		
	R812	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1		
	R813	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R814	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R819	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	F,G,H	
	R881	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1		
	R882	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1		
	R891	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	C,D,E	
	R892	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	C,D,E	
	R901	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	1		
	R902	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R903	NRSA02J-472X	MG RESISTOR	4.7kΩ 1/10W J	1		
	R921	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	F,G,H	
	R922	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	1	F,G,H	
	R930	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R971	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1		
	R976	NRSA02J-273X	MG RESISTOR	27kΩ 1/10W J	1		
	R977	NRSA02J-123X	MG RESISTOR	12kΩ 1/10W J	1		
	L1	NQL093K-R47X	P COIL	0.47uH K	1		
	L2	NQL093K-1R8X	P COIL	1.8uH K	1		
	L3	NQL093K-R22X	P COIL	0.22uH K	1		
	L4	QQR1872-001	RF COIL		1		
	L5	QQL244J-561Z	COIL	560uH J	1		
	L6	QQL244J-561Z	COIL	560uH J	1		
	L8	QQL231K-4R7Y	INDUCTOR	4.7uH K	1		
	L9	QQL231K-4R7Y	INDUCTOR	4.7uH K	1		
	L31	NQL093K-R47X	P COIL	0.47uH K	1		
	L177	NQL553J-27NX	COIL	27nH J	1		
	L701	QQL231K-4R7Y	INDUCTOR	4.7uH K	1		
	L702	QQL231K-4R7Y	INDUCTOR	4.7uH K	1		
△	L901	QQR1852-001	CHOKE COIL		1		
△	L901 or	QQR0703-001	CHOKE COIL		1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	L930	NQLH25M-4R7X	COIL	4.7uH M	1		
	CN501	QGB2027ME-28	CONNECTOR	B-B (1-28)	1		
	CN701	QGZ1101J1-20	CONNECTOR	(1-20)	1		
	CN702	QGA2001C1-02	CONNECTOR	W-B (1-2)	1	A,C,D,E,F,G,H,I	
	CN901	QNZ0607-001	CAR CONNECTOR		1		
	J1	QNB0190-001	ANT TERMINAL		1		
	J1 or	QNB0348-001	ANT TERMINAL		1		
	J321	QNN0490-001	PIN JACK		1	A	
	J321	QNN0815-001	PIN JACK		1	B,C,D,E,F,G,H,I	
	J801	QNZ0095-001	CONNECTOR		1		
	K161	NRSA02J-123X	MG RESISTOR	12kΩ 1/10W J	1		
	K162	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	K163	NRSA02J-123X	MG RESISTOR	12kΩ 1/10W J	1		
	PP1	QZW0010-001	STYLE PIN		1	A,C,D,E,F,G,H,I	
	PP2	QZW0010-001	STYLE PIN		1	A,C,D,E,F,G,H,I	
	S701	QSW0648-001Z	TACT SWITCH		1		
	X1	QAX0952-001Z	CRYSTAL		1		
	X71	QAX0954-001Z	CRYSTAL		1	C,D,E	
	X701	QAX0667-001Z	C RESONATOR	8.000MHz	1		
	X702	QAX0953-001	CRYSTAL		1		
Switch board <02>							
	IC601	PCA9624PW-X	IC		1		
	IC661	PTC6526LQ-L	IC		1		
	IC681	KSM-2003TN2M	IR DETECT UNIT		1		
	IC930	TPS54040DGQ-X	IC		1		
	Q627	2SC1623A/5-6/-X	TRANSISTOR		1		
	Q627 or	2SC3928A/QR/-X	TRANSISTOR		1		
	D623	NSSM065T-X	LED		1		
	D624	NSSM065T-X	LED		1		
	D625	NSSM065T-X	LED		1		
	D627	RKZ5.6B2KG-X	Z DIODE		1		
	D631	LHQ974/LM/-X	LED		1		
	D632	LHQ974/LM/-X	LED		1		
	D661	HSU119-X	SI DIODE		1		
	D691	RKZ5.1B2KG-X	Z DIODE		1		
	D692	RKZ5.1B2KG-X	Z DIODE		1		
	D930	MBRX130-TP-X	SB DIODE		1		
	C620	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1		
	C628	NCB21EK-105X	C CAPACITOR	1uF 25V K	1		
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1		
	C662	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1		
	C663	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1		
	C682	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	C687	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1		
	C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1		
	C691	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C692	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C930	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C931	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C932	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C933	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	C934	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1		
	C935	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1		
	C936	NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1		
	C937	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C938	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1		
	C939	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1		
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1		
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1		
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1		
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R608	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1		
	R609	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1		
	R610	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1		
	R611	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1		
	R612	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1		
	R613	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1		
	R623	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1		
	R624	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R625	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R628	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1		
	R631	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1		
	R647	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1		
	R648	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1		
	R649	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1		
	R656	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1		
	R657	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1		
	R658	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1		
	R660	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	1		
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R664	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1		
	R665	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R674	NQR0007-002X	FERRITE BEADS		1		
	R675	NQR0007-002X	FERRITE BEADS		1		
	R676	NQR0007-002X	FERRITE BEADS		1		
	R681	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1		
	R682	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1		
	R693	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1		
	R931	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	1		
	R932	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1		
	R933	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	1		
	R934	NRSA63J-753X	MG RESISTOR	75kΩ 1/16W J	1		
	R935	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1		
	R936	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	1		
	R937	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1		
	R938	NRSA63D-513X	MG RESISTOR	51kΩ 1/16W D	1		
	L691	NQR0536-001X	CHOKE COIL		1		
	L931	NQL52EM-220X	COIL	22uH M	1		
	CJ601	QGZ1101K1-20	CONNECTOR	(1-20)	1		
	CN603	QNZ1006-001	USB CONNECTOR		1		
	CN603 or	QNZ0963-002	USB CONNECTOR		1		
	J601	QNS0280-001	3.5 JACK		1		
	JS686	QSW1231-002	ROTARY ENCODER		1		
	S601	NSW0326-001X	TACT SWITCH		1		
	S602	NSW0326-001X	TACT SWITCH		1		
	S603	NSW0326-001X	TACT SWITCH		1		
	S604	NSW0326-001X	TACT SWITCH		1		
	S605	NSW0326-001X	TACT SWITCH		1		
	S606	NSW0326-001X	TACT SWITCH		1		
	S607	NSW0326-001X	TACT SWITCH		1		
	S608	NSW0326-001X	TACT SWITCH		1		
	S609	NSW0326-001X	TACT SWITCH		1		
	S610	NSW0326-001X	TACT SWITCH		1		
	S611	NSW0326-001X	TACT SWITCH		1		
FMU-CD6-21D CD control board <03>							
	IC301	MN6627946JE	IC(MCU)		1	A,B,C,D,E,F,G,H,I	
	IC302	R1EX24016ASAA-X	IC		1	A,B,C,D,E,F,G,H,I	
	IC303	MF1341S2162-X	IC		1	A,B,C,D,E,F,G,H,I	
	IC501	LA6565-X	IC		1	A,B,C,D,E,F,G,H,I	
	Q101	2SC3928A/R/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	Q201	2SC3928A/R/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	Q211	PS1191RB22/BC/X	PHOTO TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	Q212	PS1191RB22/BC/X	PHOTO TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	Q301	2SA2188/F/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	Q302	RT1N441C-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	Q501	2SB1424/R/-W	TRANSISTOR		1	A,B,C,D,E,F,G,H,I	
	D101	AN1105W21/AB/-X	IR LED		1	A,B,C,D,E,F,G,H,I	
	D201	AN1105W21/AB/-X	IR LED		1	A,B,C,D,E,F,G,H,I	
	D301	MA2SD31-X	SB DIODE		1	A,B,C,D,E,F,G,H,I	
	D501	1SR154-400-X	SI DIODE		1	A,B,C,D,E,F,G,H,I	
	D502	1SR154-400-X	SI DIODE		1	A,B,C,D,E,F,G,H,I	
	D503	1SR154-400-X	SI DIODE		1	A,B,C,D,E,F,G,H,I	
	C101	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C102	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C103	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C104	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C201	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C301	NEAF0JM-226X	E CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I	
	C302	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C303	NEAF0JM-476X	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I	
	C304	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C305	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C307	NCB31CK-334X	C CAPACITOR	0.33uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C308	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C309	NCB31EK-823X	C CAPACITOR	0.082uF 25V K	1	A,B,C,D,E,F,G,H,I	
	C310	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C311	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C312	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	A,B,C,D,E,F,G,H,I	
	C313	NCJ21CK-475X-R	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C314	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C316	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	1	A,B,C,D,E,F,G,H,I	
	C317	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I	
	C319	NCB31CK-334X	C CAPACITOR	0.33uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C321	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C322	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C323	NEAF0JM-476X	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I	
	C324	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C326	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C327	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C328	NCB31HK-681X	C CAPACITOR	680pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C329	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C331	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I	
	C334	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C335	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C337	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C338	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C339	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C343	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C345	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C346	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C347	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C351	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I	
	C352	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I	
	C373	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C393	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C394	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C395	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C501	NEHN1EM-476X	E CAPACITOR	47uF 25V M	1	A,B,C,D,E,F,G,H,I	
	C502	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C503	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	A,B,C,D,E,F,G,H,I	
	C511	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C512	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C513	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C514	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C531	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I	
	C532	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I	
	C534	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I	
	C551	NEHN1AM-107X	E CAPACITOR	100uF 10V M	1	A,B,C,D,E,F,G,H,I	
	R101	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R102	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R103	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R104	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R105	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R201	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R203	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R204	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R205	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R206	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R207	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R214	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I	
	R215	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I	
	R216	NRS181F-300X	MG RESISTOR	30Ω 1/8W F	1	A,B,C,D,E,F,G,H,I	
	R217	NRS181F-300X	MG RESISTOR	30Ω 1/8W F	1	A,B,C,D,E,F,G,H,I	
	R228	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R229	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R230	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R241	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R242	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R246	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I	
	R301	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R304	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R307	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R308	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R309	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R310	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R311	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R312	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R313	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R314	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R315	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R316	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R318	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R321	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I	
	R322	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R323	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R324	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R325	NRSA02F-100X	MG RESISTOR	10Ω 1/10W F	1	A,B,C,D,E,F,G,H,I	
	R326	NRSA02F-100X	MG RESISTOR	10Ω 1/10W F	1	A,B,C,D,E,F,G,H,I	
	R330	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R331	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R332	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R333	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R334	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R336	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R349	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I	
	R361	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R362	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R501	NRS125J-100X	MG RESISTOR	10Ω 1/2W J	1	A,B,C,D,E,F,G,H,I	
	R503	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R504	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R505	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R506	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R507	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R508	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R510	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R511	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R512	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R513	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R514	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R515	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R516	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R519	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R520	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R521	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R522	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R523	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	
	R524	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I	


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R525	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	CN101	QGB2027L5-28X	CONNECTOR	B-B (1-28)	1	A,B,C,D,E,F,G,H,I
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	A,B,C,D,E,F,G,H,I
	CN301	QGA1002C1-06X	CONNECTOR	W-B (1-6)	1	A,B,C,D,E,F,G,H,I
	K101	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	K102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	K103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	SW1	NSW0291-001X	DETECT SWITCH		1	A,B,C,D,E,F,G,H,I
	X301	NAX0566-001X	C RESONATOR	16.934MHz	1	A,B,C,D,E,F,G,H,I
	X302	NAX0367-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I

Packing materials and accessories

Block No.M3MM

No additional / supplemental order of WARRANTY CARDS are available.

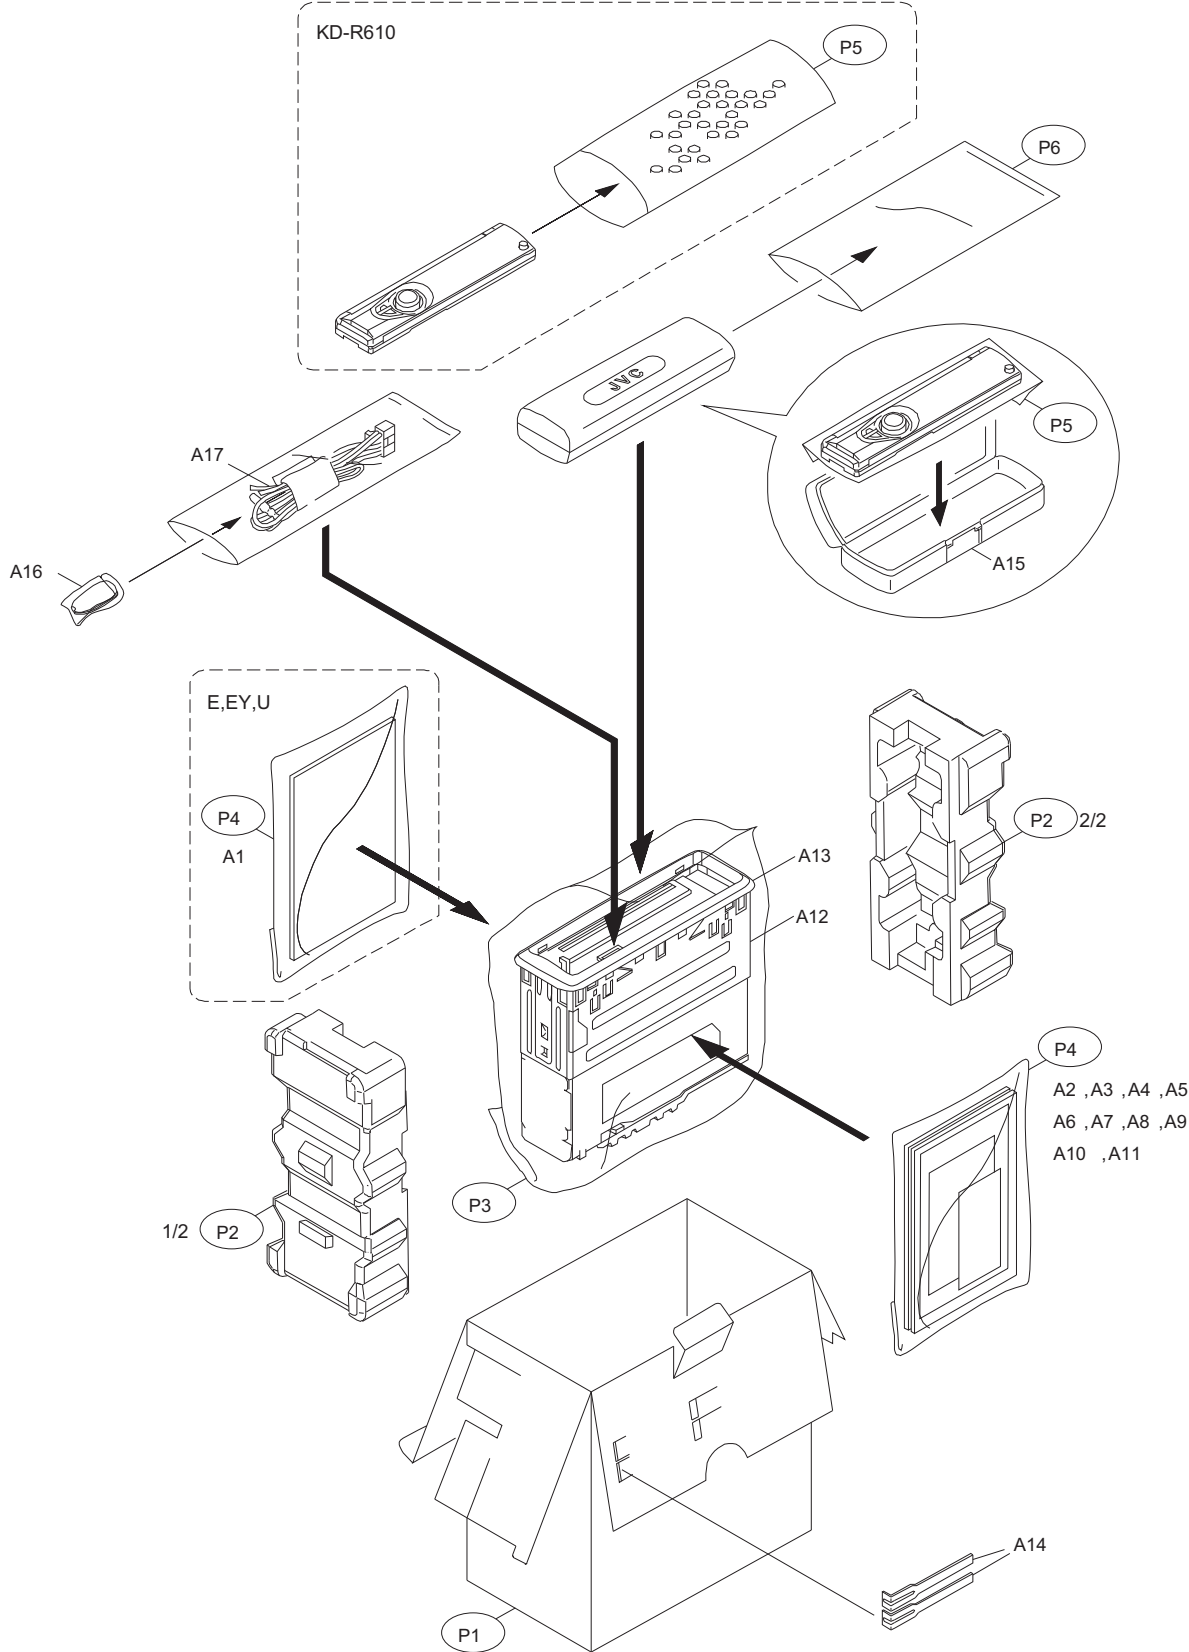

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A615J	A	KD-R610J	B	KD-R611E	C	KD-R611EY	D
KD-R611EU	E	KD-R616U	F	KD-R616UN	G	KD-R616UH	H
KD-R618J	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

Packing and accessories <M3MM>

A1	GET0640-001A	INST BOOK	GER	1	C,D
A1	GET0639-002B	INST BOOK	KOR CHI(TAIWAN) ARA PER	1	F
A2	GET0638-001A	INST BOOK	ENG SPA FRE	1	A,B,I
A2	GET0640-002A	INST BOOK	DUT SPA ITA POR	1	C
A2	GET0640-006A	INST BOOK	POL RUS GRE	1	D
A2	GET0639-001A	INST BOOK	ENG THA	1	F,H
A2	GET0639-004A	INST BOOK	ENG INA	1	G
A3	GET0640-003A	INST BOOK	ENG FRE	1	C,E
A3	GET0640-007A	INST BOOK	RUM BUL CZE HUN	1	D
A3	GET0639-003B	INST BOOK	RUS	1	F
A4	GET0640-005A	INST BOOK	SPA RUS TUR PER	1	E
A5	GET0638-002A	INSTALL MANUAL	ENG SPA FRE	1	A,B,I
A5	GET0640-008A	INSTALL MANUAL	GER	1	C,D
A5	GET0639-006A	INSTALL MANUAL	ENG THA	1	F,H
A5	GET0639-009A	INSTALL MANUAL	ENG INA	1	G
A6	GET0640-009A	INSTALL MANUAL	DUT SPA ITA POR	1	C
A6	GET0640-013A	INSTALL MANUAL	POL RUS GRE	1	D
A6	GET0639-007B	INSTALL MANUAL	KOR CHI(TAIWAN) ARA PER	1	F
A7	GET0640-010A	INSTALL MANUAL	ENG FRE	1	C,E
A7	GET0640-014A	INSTALL MANUAL	RUM BUL CZE HUN	1	D
A7	GET0639-008A	INSTALL MANUAL	RUS	1	F
A8	GET0640-012A	INSTALL MANUAL	SPA RUS TUR PER	1	E
A9	-----	WARRANTY CARD	BT-52008-1	1	A,B,I
A9	-----	WARRANTY CARD	BT-54042-1	1	C,D
A10	-----	WARRANTY CARD	BT-51029-3	1	A
A10	-----	WARRANTY CARD	BT-51018-6	1	B,I
A11	BT-51044-1	REGISTRATION CARD		1	A,B,I
A12	GE20267-001A	MOUNTING SLEEVE		1	
A13	GE20235-014A	TRIM PLATE		1	A,B,F,G,H,I
A13	GE20204-020A	TRIM PLATE		1	C,D,E
A14	GE40481-001A	HOOK		2	
A15	GE32320-001A	HARD CASE ASSY		1	A,C,D,E,F,G,H,I
A16	RM-RK50C1	REMOCON UNIT		1	A,B,C,D,E,I
A16	RM-RK50M	REMOCON UNIT		1	F,G,H
A17	QAM1143-001	CAR CABLE		1	A,B,I
A17	QAM1237-001	CAR CABLE		1	C,D,E
A17	QAM1146-001	CAR CABLE		1	F,G,H
P1	GE33855-001A	CARTON		1	A
P1	GE33861-001A	CARTON		1	B
P1	GE33867-001A	CARTON		1	C,D,E
P1	GE33864-001A	CARTON		1	F,G,H
P1	GE33858-001A	CARTON		1	I
P2	GE10271-001A	CUSHION		1	A,B,F,G,H,I
P2	GE10270-001A	CUSHION		1	C,D,E
P3	QPC03004315PB	POLY BAG	30cm x 43cm	1	
P4	FSPG4002-001	POLY BAG		1	A,B,E,G,H,I
P4	FSPG4002-001	POLY BAG		2	C,D,F
P5	QPC01002515	POLY BAG	10cm x 25cm	1	A,C,D,E,F,G,H,I
P5	GE40276-003A	AIR BUBBLE		1	B
P6	QPA01003003	POLY BAG	10cm x 30cm	1	A,C,D,E,F,G,H,I