## EXPLODED VIEW

Block No.M1MM

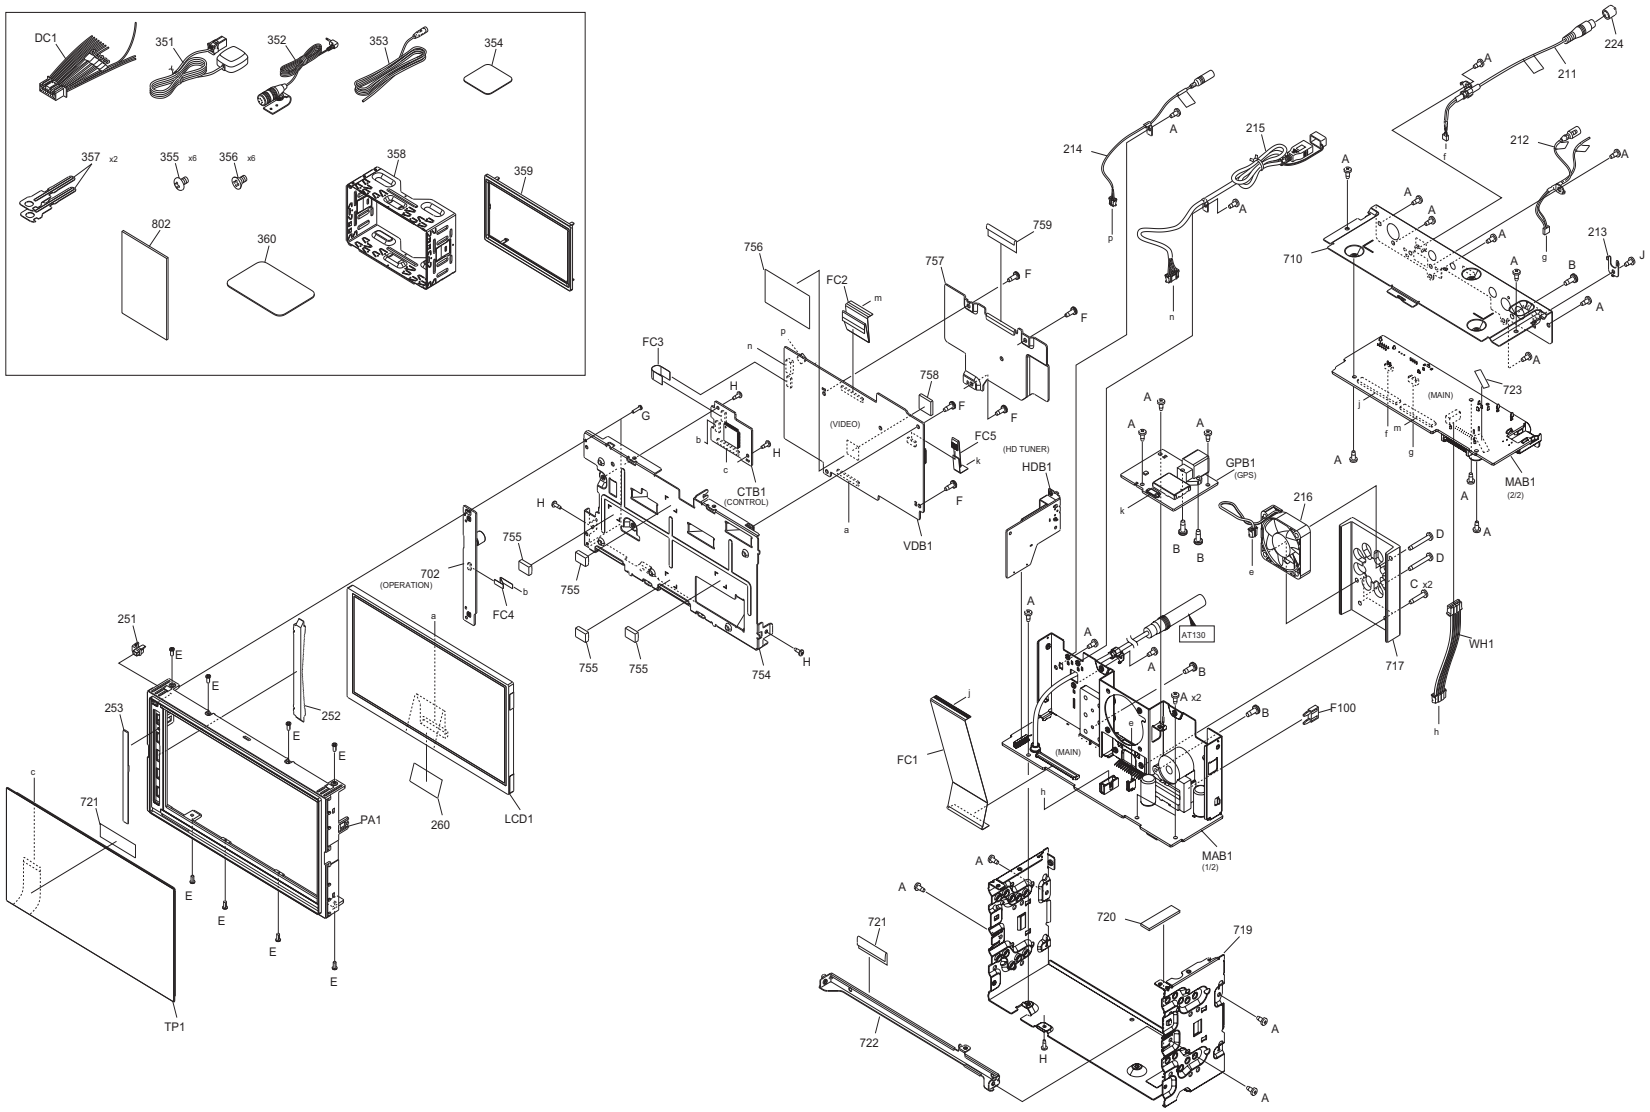


Parts with the exploded numbers larger than 700 are not supplied.

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| EXPLODED VIEW <M1MM> | | | | | | |
| | CTB1 | CB-XJ6170K00N | CONTROL PWB | XJ6-170K-00 | 1 | |
| | GPB1 | CB-XJ9024K00N | GPS PWB | XJ9-024K-00 | 1 | |
| | HDB1 | XJH-225K-00 | HD TUNER PWB | XJM-035K-00 | 1 | K0 |
| | MAB1 | CB-XJ1397K04N | MAIN PWB | XJ1-397K-04 | 1 | K0 |
| | MAB1 | CB-XJ1397K05N | MAIN PWB | XJ1-397K-05 | 1 | K1 |
| | VDB1 | CB-XJ8107K01N | VIDEO PWB | XJ8-107K-01 | 1 | |
| | FC1 | E3G-0216-00 | FFC WIRE | | 1 | |
| | FC2 | E3G-0207-00 | FFC WIRE | | 1 | |
| | FC3 | EF0AD051203BC | FFC WIRE | | 1 | |
| | FC4 | E3G-0205-00 | FFC WIRE | | 1 | |
| | FC5 | E3G-0208-00 | FFC WIRE | | 1 | |
| | WH1 | E3K-0690-00 | WIRING HARNESS | | 1 | |
| | DC1 | E3A-0322-00 | DC CORD | | 1 | |
| | F100 | FZB10BT-100 | BLADE FUSE | | 1 | |
| | LCD1 | B3H-0085-10 | LCD ASSY | | 1 | |
| | PA1 | A6C-0180-0B | PANEL | | 1 | K0 |
| | PA1 | A6C-0180-0C | PANEL | | 1 | K1 |
| | TP1 | W0C-0489-00 | TOUCH PANEL | | 1 | |
| | A | QYSDST2606ZA | TAP SCREW | M2.6 x 6.0mm | 26 | K0 |
| | A | QYSDST2606ZA | TAP SCREW | M2.6 x 6.0mm | 25 | K1 |
| | B | QYSPSG3008ZA | TAP SCREW | M3.0 x 8.0mm | 5 | |
| | C | QYSDST2614ZA | TAP SCREW | M2.6 x 14.0mm | 2 | |
| | D | QYSDST2620ZA | TAP SCREW | M2.6 x 20.0mm | 2 | |
| | E | LV45701-003A | SPECIAL SCREW | | 8 | |
| | F | QYSDST2608ZA | TAP SCREW | M2.6 x 8.0mm | 5 | |
| | G | VKZ4777-014 | SCREW | | 2 | |
| | H | QYSDST2006ZA | TAP SCREW | M2.0 x 6.0mm | 5 | |
| | J | QYSDST3006MA | TAP SCREW | M3.0 x 6.0mm | 1 | |
| | 211 | E3A-0377-10 | CORD W.CON. | | 1 | |
| | 212 | E3A-0045-00 | CORD W.CON. | | 1 | |
| | 213 | J2B-0744-00 | HOLDER | | 1 | |
| | 214 | E3A-0423-10 | CORD W.CON. | | 1 | |
| | 215 | E3A-0883-00 | USB CORD | | 1 | |
| | 216 | F0K-0403-00 | FAN | | 1 | |
| | 224 | F2K-0012-00 | INS.COVER | | 1 | |
| | 251 | T6A-0109-00 | PLASTIC LENS | | 1 | |
| | 252 | B1K-0208-00 | LIGHTING BOARD | | 1 | |
| | 253 | B1K-0209-00 | LIGHTING BOARD | | 1 | |
| | 260 | F1C-0101-04 | CONDUCT SHEET | | 1 | |
| | 351 | T9A-0096-00 | ANTENNA ASSY | | 1 | |
| | 352 | T9B-0092-00 | MICROPHONE | | 1 | |
| | 353 | E3A-0344-00 | CORD | | 1 | |
| | 354 | LV45939-001A | GPS BRACKET | | 1 | |
| | 355 | QYSTSP5008ZA | SCREW | M5.0 x 8.0mm | 6 | |
| | 356 | QYSSSP5008ZA | SCREW | M5.0 x 8.0mm | 6 | |
| | 357 | D1A-0109-00 | LEVER | | 2 | |
| | 358 | J2B-0508-00 | MOUNTING ASSY | | 1 | |
| | 359 | B9H-0020-00 | ESCUTCHEON | | 1 | |
| | 360 | B4G-0201-00 | ID CARD | | 1 | K0 |
| | 360 | B4G-0200-00 | ID CARD | | 1 | K1 |
| | 702 | --------- | OPERATION PWB | NO SERVICE PART | 1 | |
| | 710 | --------- | TOP COVER | NO SERVICE PART | 1 | |
| | 717 | --------- | HEAT SINK | NO SERVICE PART | 1 | |
| | 719 | --------- | CHASSIS | NO SERVICE PART | 1 | |
| | 720 | --------- | COOL SHEET | NO SERVICE PART | 1 | |
| | 721 | --------- | SPACER(H) | NO SERVICE PART | 2 | |
| | 722 | --------- | STAY | NO SERVICE PART | 1 | |
| | 723 | --------- | SPACER(H) | NO SERVICE PART | 1 | |
| | 754 | --------- | BRACKET | NO SERVICE PART | 1 | |
| | 755 | --------- | CONDUCT CUSHION | NO SERVICE PART | 4 | |
| | 756 | --------- | SHEET | NO SERVICE PART | 1 | |
| | 757 | --------- | HEATSINK MOUNT | NO SERVICE PART | 1 | |
| | 758 | --------- | COOL SHEET | NO SERVICE PART | 1 | |
| | 759 | --------- | SHEET | NO SERVICE PART | 1 | |
| | 802 | --------- | SUB-INST.MANUAL | NO SERVICE PART | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| MAIN PWB ASSY (XJ1-397K-0x) <XJ1> | | | | | | |
| ⚠ | IC20 | TCB502HQ | ANALOG IC | | 1 | |
| | IC180 | SI4763-A42-AM | ANALOG IC | | 1 | K1 |
| | IC250 | NJU7108F3 | MOS IC | | 1 | |
| | IC251 | IC-PST8428U | MOS IC | | 1 | |
| | IC360 | BD49105RFS-M | ANALOG IC | | 1 | |
| | IC430 | BD37069FV-M | ANALOG IC | | 1 | |
| | IC520 | ADAU1401AWBST | MOS IC | | 1 | |
| | IC521 | NJU6366AF1 | MOS IC | | 1 | |
| | IC522 | MM3608A18NH | ANALOG IC | | 1 | |
| | IC523 | MM3608A33NH | ANALOG IC | | 1 | |
| | IC524 | PCM1754DBQ | ANALOG IC | | 1 | |
| | IC580 | PCM1754DBQ | ANALOG IC | | 1 | |
| | IC600 | TC7SET04FUJC | MOS IC | | 1 | |
| | IC750 | --------- | MCU IC | NO SERVICE PART | 1 | |
| | IC870 | BR24H16FVT5AC | ROM IC | | 1 | |
| | IC880 | RA8900CEUB | ANALOG IC | | 1 | |
| | IC1200 | XC6223B121P-G | ANALOG IC | | 1 | |
| | IC1201 | IT68013FN/BX | MOS IC | | 1 | |
| | IC1250 | PCM1754DBQ | ANALOG IC | | 1 | |
| | IC1360 | BH7673G | ANALOG IC | | 1 | |
| | IC1400 | NJM2535V-ZB | ANALOG IC | | 1 | |
| | IC1401 | NJM2561F1 | BIPOLAR IC | | 1 | |
| | IC1451 | TC7SZ17FUJC | MOS IC | | 1 | |
| | IC1452 | TC7SET08FUJC | MOS IC | | 1 | |
| | IC1490 | TC7SZ17FUJC | MOS IC | | 1 | |
| | IC1491 | TC7SET08FUJC | MOS IC | | 1 | |
| | Q100 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q101 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q102 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q103 | KRA306-P | DIGI TRANSISTOR | | 1 | |
| | Q104 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q105 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q250 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q251 | KTA2014EP/Y/ | TRANSISTOR | | 1 | |
| | Q252 | KRC407E-P | DIGI TRANSISTOR | | 1 | |
| | Q253 | KTC4075EP/Y/ | TRANSISTOR | | 1 | |
| | Q254 | KTA2014EP/Y/ | TRANSISTOR | | 1 | |
| | Q255 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q256 | KRC407E-P | DIGI TRANSISTOR | | 1 | |
| | Q257 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q310 | KRC407E-P | DIGI TRANSISTOR | | 1 | |
| | Q311 | RQ6E030AT | FET | | 1 | |
| | Q340 | KTC4075EP/Y/ | TRANSISTOR | | 1 | |
| | Q460 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q461 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q462 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q463 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q464 | 2SD2114K/VW/ | TRANSISTOR | | 1 | |
| | Q466 | KRA306-P | DIGI TRANSISTOR | | 1 | |
| | Q480 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q510 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q511 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q920 | KRA302E-P | DIGI TRANSISTOR | | 1 | |
| | Q921 | KRC404E-P | DIGI TRANSISTOR | | 1 | |
| | Q922 | MCQ4435 | FET | | 1 | |
| | Q1340 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q1341 | KRC403E-P | DIGI TRANSISTOR | | 1 | |
| | Q1342 | KTA2014EP/Y/ | TRANSISTOR | | 1 | |
| | Q1343 | KTC4075EP/Y/ | TRANSISTOR | | 1 | |
| | D1 | S3DB | RECTIFIER DIODE | | 1 | |
| | D2 | UDZV6.2B | ZENER DIODE | | 1 | |
| | D20 | 1SS355VM | DIODE | | 1 | |
| | D100 | DAP202UM | DIODE | | 1 | |
| | D250 | 1SS355VM | DIODE | | 1 | |
| | D251 | 1SS355VM | DIODE | | 1 | |
| | D280 | SK53A-L | SCHOTTKY DIODE | | 1 | |
| | D312 | UDZV16B | ZENER DIODE | | 1 | |
| | D330 | SM5818PL | SCHOTTKY DIODE | | 1 | |
| | D331 | SM5818PL | SCHOTTKY DIODE | | 1 | |
| | D340 | UDZV16B | ZENER DIODE | | 1 | |
| | D360 | SK34A-L | SCHOTTKY DIODE | | 1 | |
| | D361 | SK34A-L | SCHOTTKY DIODE | | 1 | |
| | D364 | SK34A-L | SCHOTTKY DIODE | | 1 | |
| | D365 | SK34A-L | SCHOTTKY DIODE | | 1 | |
| | D368 | SK34A-L | SCHOTTKY DIODE | | 1 | |
| | D480 | UDZV18B | ZENER DIODE | | 1 | |
| | D510 | UDZV6.2B | ZENER DIODE | | 1 | |
| | D920 | UDZV18B | ZENER DIODE | | 1 | |
| | D1200 | 1SS355VM | DIODE | | 1 | |
| | D1340 | 1SS355VM | DIODE | | 1 | |
| | D1341 | UDZV16B | ZENER DIODE | | 1 | |
| | D1440 | SK53A-L | SCHOTTKY DIODE | | 1 | |
| | D1450 | UDZV6.8B | ZENER DIODE | | 1 | |
| | C4 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C5 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C6 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C7 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C8 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C9 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C10 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C11 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C12 | CD04EU1C222M1 | E CAPACITOR | 2200uF 16V M | 1 | |
| | C13 | CD04EU1C222M1 | E CAPACITOR | 2200uF 16V M | 1 | |
| | C22 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C26 | CE32CL1E330M | E CAPACITOR | 33uF 25V M | 1 | |
| | C32 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C34 | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C35 | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C36 | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C37 | CK73GXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C38 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C100 | CK73JXR1H332K | C CAPACITOR | 3300pF 50V K | 1 | |
| | C101 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C102 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C103 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C104 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C105 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C106 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C107 | CK730DK1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C108 | CK730DK1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C109 | CK730DK1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C110 | CK730DK1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C111 | CK730DK1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C112 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C113 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C114 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C115 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C116 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C117 | CK73HXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C118 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C119 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C120 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C121 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C130 | CC73JCH1H0R5C | C CAPACITOR | 0.5pF 50V C | 1 | |
| | C133 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C134 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C135 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C136 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C137 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C138 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C139 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C142 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C143 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C147 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C148 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C150 | CK73HXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C151 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C152 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C153 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C156 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C157 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C158 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C159 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C160 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C161 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C162 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C163 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C164 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C165 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C166 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C167 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C168 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C169 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C170 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C171 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C172 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C173 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C175 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C176 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C177 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C178 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C179 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C181 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | K1 |
| | C182 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K1 |
| | C183 | CC73JCH1H270J | C CAPACITOR | 27pF 50V J | 1 | K1 |
| | C184 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | K1 |
| | C185 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C186 | CC73JCH1H050C | C CAPACITOR | 5pF 50V C | 1 | K1 |
| | C188 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K1 |
| | C191 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C192 | CC73JCH1H390J | C CAPACITOR | 39pF 50V J | 1 | K1 |
| | C194 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | K1 |
| | C195 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | K1 |
| | C196 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C197 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C198 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C199 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C200 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K1 |
| | C201 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K1 |
| | C202 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | K1 |
| | C203 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | K1 |
| | C206 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | K1 |
| | C207 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | K1 |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C208 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | K1 |
| | C209 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | K1 |
| | C210 | CK73JXR1H682K | C CAPACITOR | 6800pF 50V K | 1 | K1 |
| | C211 | CK73JXR1H682K | C CAPACITOR | 6800pF 50V K | 1 | K1 |
| | C214 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | K1 |
| | C215 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | K1 |
| | C216 | CC73JCH1H0R5C | C CAPACITOR | 0.5pF 50V C | 1 | K1 |
| | C217 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | K1 |
| | C218 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K1 |
| | C219 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | K1 |
| | C220 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | K1 |
| | C221 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | K1 |
| | C226 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K1 |
| | C227 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K1 |
| | C228 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | K1 |
| | C251 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C252 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C253 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C254 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C255 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C256 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C257 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C258 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C259 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C261 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C262 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C263 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C282 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C283 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C284 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C285 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C288 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C289 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C293 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C310 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C311 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C340 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C341 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C342 | CK73JXR1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C343 | CK73JXR1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C360 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C362 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C363 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C364 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C370 | CC73JCH1E271J | C CAPACITOR | 270pF 25V J | 1 | |
| | C371 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C372 | CC73JCH1E391J | C CAPACITOR | 390pF 25V J | 1 | |
| | C373 | CC73JCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C374 | CC73JCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C375 | CC73JCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C378 | CE32CC1A151M | E CAPACITOR | 150uF 10V M | 1 | |
| | C379 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C380 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C381 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C382 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C383 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C384 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C385 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C387 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C388 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C389 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C393 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C397 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C398 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C399 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C400 | CE32BY1C221M | E CAPACITOR | 220uF 16V M | 1 | |
| | C401 | CE32CC1A151M | E CAPACITOR | 150uF 10V M | 1 | |
| | C406 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C407 | CC73JCH1E561J | C CAPACITOR | 560pF 25V J | 1 | |
| | C408 | CC73JCH1E391J | C CAPACITOR | 390pF 25V J | 1 | |
| | C409 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C410 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C411 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C412 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C413 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C414 | CK73HXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C415 | CK73HXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C416 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C430 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C431 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C432 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C433 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C434 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C435 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C436 | CE32BM1E470M | E CAPACITOR | 47uF 25V M | 1 | |
| | C437 | CE32CL1C100M | E CAPACITOR | 10uF 16V M | 1 | |
| | C438 | CE32BY1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C439 | CE32BJ1V4R7M | E CAPACITOR | 4.7uF 35V M | 1 | |
| | C440 | CE32BJ1V4R7M | E CAPACITOR | 4.7uF 35V M | 1 | |
| | C441 | CE32BJ1V4R7M | E CAPACITOR | 4.7uF 35V M | 1 | |
| | C442 | CE32BJ1V4R7M | E CAPACITOR | 4.7uF 35V M | 1 | |
| | C443 | CE32BJ1V4R7M | E CAPACITOR | 4.7uF 35V M | 1 | |
| | C444 | CE32BJ1V4R7M | E CAPACITOR | 4.7uF 35V M | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C451 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C452 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C453 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C454 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C457 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C458 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C459 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C477 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C478 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C480 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C481 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C482 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C483 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C494 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C495 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C496 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C497 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C498 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C510 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C520 | CK73JXR1C103K | C CAPACITOR | 0.01uF 16V K | 1 | |
| | C521 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C522 | CK73GXR1C475K | C CAPACITOR | 4.7uF 16V K | 1 | |
| | C523 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C524 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C525 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C526 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C527 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C528 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C529 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C530 | CK73JXR1C473K | C CAPACITOR | 0.047uF 16V K | 1 | |
| | C531 | CK73JXR1C103K | C CAPACITOR | 0.01uF 16V K | 1 | |
| | C532 | CK73JXR1H332K | C CAPACITOR | 3300pF 50V K | 1 | |
| | C533 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C534 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C535 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C536 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C537 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C538 | CK73EXR1A476M | C CAPACITOR | 47uF 10V M | 1 | |
| | C539 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C540 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C541 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C542 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C543 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C544 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C545 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C546 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C547 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C548 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C549 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C550 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C551 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C552 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C553 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C554 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | |
| | C555 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | |
| | C558 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C559 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C561 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C562 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C564 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C565 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C566 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C567 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C568 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C569 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C570 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C571 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C580 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C581 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C582 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C583 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C584 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C585 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C600 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C601 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C602 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C603 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C604 | CK73HXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C605 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C711 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C712 | CK73HXR0J225K | C CAPACITOR | 2.2uF 6.3V K | 1 | |
| | C720 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C721 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C722 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C723 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C724 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C725 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C726 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C727 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C728 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C729 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C730 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C731 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C732 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C733 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C734 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C735 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C736 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C737 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C739 | CK73JXR1E104K | C CAPACITOR | 0.1uF 25V K | 1 | |
| | C742 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C743 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C750 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C751 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C752 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C753 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C754 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C757 | CK73JXR1E103K | C CAPACITOR | 0.01uF 25V K | 1 | |
| | C758 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C759 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C760 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C761 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C762 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C763 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C764 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C765 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C766 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C767 | CC73JCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C768 | CC73JCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C769 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C770 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C870 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C880 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C920 | CK73FXR1E334K | C CAPACITOR | 0.33uF 25V K | 1 | |
| | C921 | CC73HCH1H471J | C CAPACITOR | 470pF 50V J | 1 | |
| | C1200 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C1201 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1202 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C1203 | CC73JCH1H090C | C CAPACITOR | 9pF 50V C | 1 | |
| | C1204 | CC73JCH1H080C | C CAPACITOR | 8pF 50V C | 1 | |
| | C1205 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C1207 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C1208 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C1209 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1210 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1211 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1212 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1213 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1214 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1215 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1216 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1217 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1218 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1219 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1220 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1221 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1222 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1223 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1224 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1225 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1226 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1227 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1228 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1229 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1232 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1234 | CK73EXR1A476M | C CAPACITOR | 47uF 10V M | 1 | |
| | C1235 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1236 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1237 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1238 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1239 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1240 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1241 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1242 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1243 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C1244 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1252 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C1253 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C1254 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C1255 | CK73JXR1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C1256 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1257 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C1258 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1259 | CK73GXR1A106K | C CAPACITOR | 10uF 10V K | 1 | |
| | C1260 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1261 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1264 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C1266 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C1267 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C1268 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C1269 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1270 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1271 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1272 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C1273 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1274 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1275 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1276 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1277 | CC73JCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C1283 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C1284 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C1285 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C1340 | CK73GXR0J225K | C CAPACITOR | 2.2uF 6.3V K | 1 | |
| | C1342 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C1343 | CK73JXR1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C1344 | CK73JXR1H221K | C CAPACITOR | 220pF 50V K | 1 | |
| | C1361 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C1362 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1363 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1364 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1365 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1366 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C1367 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1368 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C1369 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1390 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1400 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C1401 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1402 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C1403 | CE32BY1C221M | E CAPACITOR | 220uF 16V M | 1 | |
| | C1404 | CE32BY1C221M | E CAPACITOR | 220uF 16V M | 1 | |
| | C1405 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C1406 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C1407 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C1408 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | |
| | C1409 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C1410 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C1411 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C1413 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1414 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1415 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1440 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C1441 | CD04EU1C222M1 | E CAPACITOR | 2200uF 16V M | 1 | |
| | C1450 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1451 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1452 | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M | 1 | |
| | C1453 | CK73GXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1454 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1455 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1456 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1457 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1458 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1470 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1471 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1472 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C1473 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1474 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1490 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C1491 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | R190 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K1 |
| | R191 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K1 |
| | R1 | RK73HB1J152J | MG RESISTOR | 1.5kΩ 1/16W J | 1 | |
| | R20 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R21 | RK73HB1J1R0J | MG RESISTOR | 1.0Ω 1/16W J | 1 | |
| | R22 | RK73HB1J432J | MG RESISTOR | 4.3kΩ 1/16W J | 1 | |
| | R23 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R26 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R28 | RK73HB1J160J | MG RESISTOR | 16Ω 1/16W J | 1 | |
| | R100 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R101 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R102 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R103 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R104 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R105 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R106 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R107 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R108 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R109 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R110 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R111 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R112 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R113 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R114 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R115 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R116 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R117 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R118 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R119 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R120 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R121 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R122 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R130 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R131 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R132 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R170 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R180 | RK73HB1J474J | MG RESISTOR | 470kΩ 1/16W J | 1 | K1 |
| | R181 | RK73HB1J474J | MG RESISTOR | 470kΩ 1/16W J | 1 | K1 |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R182 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | K1 |
| | R184 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R185 | RK73HB1J240J | MG RESISTOR | 24Ω 1/16W J | 1 | K1 |
| | R186 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K1 |
| | R187 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K1 |
| | R188 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K1 |
| | R189 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K1 |
| | R192 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | K1 |
| | R193 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R194 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R195 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R196 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R197 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R198 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R199 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K1 |
| | R200 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | K1 |
| | R204 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | K1 |
| | R207 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R208 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R250 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R251 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R252 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R253 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R254 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R255 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R256 | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J | 1 | |
| | R257 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R258 | RK73HB1J124J | MG RESISTOR | 120kΩ 1/16W J | 1 | |
| | R259 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R260 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R261 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R262 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R263 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R264 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R265 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R266 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R267 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R311 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R312 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R313 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R314 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R330 | RK73FB2B472J | MG RESISTOR | 4.7kΩ 1/8W J | 1 | |
| | R340 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R341 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R342 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R343 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R344 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R360 | RK73HH1J394D | MG RESISTOR | 390kΩ 1/16W D | 1 | |
| | R361 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R362 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R363 | RK73HH1J123D | MG RESISTOR | 12kΩ 1/16W D | 1 | |
| | R364 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R365 | RK73HH1J154D | MG RESISTOR | 150kΩ 1/16W D | 1 | |
| | R366 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R367 | RK73HH1J473D | MG RESISTOR | 47kΩ 1/16W D | 1 | |
| | R368 | RK73HH1J100D | MG RESISTOR | 10Ω 1/16W D | 1 | |
| | R369 | RK73HB1J683J | MG RESISTOR | 68kΩ 1/16W J | 1 | |
| | R370 | RK73EB2E184J | MG RESISTOR | 180kΩ 1/4W J | 1 | |
| | R371 | RK73HH1J304D | MG RESISTOR | 300kΩ 1/16W D | 1 | |
| | R372 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R373 | RK73EB2E682J | MG RESISTOR | 6.8kΩ 1/4W J | 1 | |
| | R374 | RK73EB2E682J | MG RESISTOR | 6.8kΩ 1/4W J | 1 | |
| | R375 | RK73EB2E203J | MG RESISTOR | 20kΩ 1/4W J | 1 | |
| | R376 | RK73GB2A433J | MG RESISTOR | 43kΩ 1/10W J | 1 | |
| | R378 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R379 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R380 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R381 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R382 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R383 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R384 | RK73HH1J433D | MG RESISTOR | 43kΩ 1/16W D | 1 | |
| | R385 | RK73HH1J564D | MG RESISTOR | 560kΩ 1/16W D | 1 | |
| | R386 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R387 | RK73HH1J184D | MG RESISTOR | 180kΩ 1/16W D | 1 | |
| | R388 | RK73HH1J434D | MG RESISTOR | 430kΩ 1/16W D | 1 | |
| | R389 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R390 | RK73HH1J823D | MG RESISTOR | 82kΩ 1/16W D | 1 | |
| | R391 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R392 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R430 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R431 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R432 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R433 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R435 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R437 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R438 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R439 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R440 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R441 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R442 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R443 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R444 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R445 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R446 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R451 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R452 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R460 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R461 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R462 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R463 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R464 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R465 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R466 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R467 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R468 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R469 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R470 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R471 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R472 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R473 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R474 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R475 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R476 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R477 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R478 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R479 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R480 | RK73GH2A752D | MG RESISTOR | 7.5kΩ 1/10W D | 1 | |
| | R510 | RK73HB1J563J | MG RESISTOR | 56kΩ 1/16W J | 1 | |
| | R511 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R512 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R513 | RK73EB2E823J | MG RESISTOR | 82kΩ 1/4W J | 1 | |
| | R520 | RK73HB1J183J | MG RESISTOR | 18kΩ 1/16W J | 1 | |
| | R521 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R522 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R523 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R524 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R525 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R526 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R527 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R528 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R529 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R530 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R531 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R532 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R533 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R534 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R535 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R536 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R537 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R538 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R539 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R540 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R541 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R542 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R543 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R544 | RK73HH1J221D | MG RESISTOR | 220Ω 1/16W D | 1 | |
| | R545 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R548 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R549 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R550 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R551 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R553 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R555 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R556 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R557 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R558 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R559 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R560 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R561 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R562 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R563 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R566 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R567 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R569 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R570 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R571 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R580 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R581 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R582 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R583 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R584 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R585 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R586 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R587 | RK73HB1J182J | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R588 | RK73HB1J182J | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R589 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R590 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R591 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R592 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R593 | RK73HB1J242J | MG RESISTOR | 2.4kΩ 1/16W J | 1 | |
| | R594 | RK73HB1J242J | MG RESISTOR | 2.4kΩ 1/16W J | 1 | |
| | R601 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R603 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R750 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R751 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R752 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R753 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R754 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R755 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R756 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R757 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R758 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R759 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R760 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R761 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R762 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R763 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R764 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R765 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R766 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R767 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R768 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R769 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R771 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R772 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R773 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R774 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R775 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R776 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R777 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R778 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R782 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R783 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R789 | RK73HB1J680J | MG RESISTOR | 68Ω 1/16W J | 1 | |
| | R790 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R791 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R794 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R795 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R796 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R797 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R798 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R799 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R800 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R801 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R802 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R803 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R804 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R805 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | K0 |
| | R806 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R807 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R808 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R809 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R810 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R811 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R812 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R813 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R814 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R815 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R816 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R817 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R818 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R819 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R820 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R822 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R823 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R824 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | |
| | R825 | RK73HH1J154D | MG RESISTOR | 150kΩ 1/16W D | 1 | |
| | R826 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | K0 |
| | R827 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | K0 |
| | R827 | RK73HH1J753D | MG RESISTOR | 75kΩ 1/16W D | 1 | K1 |
| | R828 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R829 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R830 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R831 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R833 | RK73HB1J152J | MG RESISTOR | 1.5kΩ 1/16W J | 1 | |
| | R834 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R835 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R836 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R837 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R838 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R839 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R840 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R841 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R842 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R843 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | K1 |
| | R844 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R845 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R846 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R847 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R870 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R871 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R880 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R881 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R882 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R910 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R912 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R913 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R914 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R921 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R922 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R923 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R1200 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R1202 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R1203 | RK73GB2A390J | MG RESISTOR | 39Ω 1/10W J | 1 | |
| | R1204 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1205 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1206 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1207 | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R1208 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1217 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1218 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1219 | RK73HB1J152J | MG RESISTOR | 1.5kΩ 1/16W J | 1 | |
| | R1220 | RK73HB1J302J | MG RESISTOR | 3kΩ 1/16W J | 1 | |
| | R1221 | RK73HB1J225J | MG RESISTOR | 2.2MΩ 1/16W J | 1 | |
| | R1222 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1223 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1224 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R1225 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R1226 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1227 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1228 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1229 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1231 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1232 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1235 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R1237 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1238 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1239 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1240 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1251 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R1252 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R1253 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1254 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1255 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R1256 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R1257 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R1258 | RK73HB1J221J | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R1259 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1260 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1261 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1265 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | |
| | R1266 | RK73HB1J182J | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R1267 | RK73HB1J182J | MG RESISTOR | 1.8kΩ 1/16W J | 1 | |
| | R1268 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R1269 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R1270 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1271 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1276 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1277 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1278 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1279 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1281 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1340 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1341 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R1342 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R1343 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R1344 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R1345 | RK73GB2A153J | MG RESISTOR | 15kΩ 1/10W J | 1 | |
| | R1346 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R1347 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R1348 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R1349 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R1350 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R1360 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R1361 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1362 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1363 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R1364 | RK73HH1J680D | MG RESISTOR | 68Ω 1/16W D | 1 | |
| | R1368 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R1369 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R1370 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R1371 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R1374 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R1390 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R1391 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |
| | R1392 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |
| | R1400 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R1401 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |
| | R1403 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |
| | R1450 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R1451 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R1452 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R1453 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R1454 | RK73GB2A4R7J | MG RESISTOR | 4.7Ω 1/10W J | 1 | |
| | R1455 | RK73GB2A100J | MG RESISTOR | 10Ω 1/10W J | 1 | |
| | R1456 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R1457 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R1458 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R1459 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R1460 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R1490 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R1491 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1492 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R1493 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1494 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R1495 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | L3 | L3D-0043-00 | CHOKE COIL | | 1 | |
| | L130 | LR73Z0AD4R7M | CHIP INDUCTOR | | 1 | |
| | L131 | LR73Z0AD4R7M | CHIP INDUCTOR | | 1 | |
| | L181 | LK73G0BER12K | M.CHIP INDUCTOR | | 1 | K1 |
| | L182 | LK73G0BE82NK | M.CHIP INDUCTOR | | 1 | K1 |
| | L183 | LK73G0BER12K | M.CHIP INDUCTOR | | 1 | K1 |
| | L184 | L1K-0001-00 | BALUN TRANS | | 1 | K1 |
| | L185 | LK73G0BE1R8K | M.CHIP INDUCTOR | | 1 | K1 |
| | L186 | LK73G0BER39K | M.CHIP INDUCTOR | | 1 | K1 |
| | L187 | LK73G0BE100K | M.CHIP INDUCTOR | | 1 | K1 |
| | L190 | LR73Z0AD4R7M | CHIP INDUCTOR | | 1 | K1 |
| | L360 | LR79Z0JM330M | CHIP INDUCTOR | | 1 | |
| | L361 | LR79Z0JM330M | CHIP INDUCTOR | | 1 | |
| | L362 | LK73Z0CQ4R7M | M.CHIP INDUCTOR | | 1 | |
| | L430 | LR73Z0AD4R7M | CHIP INDUCTOR | | 1 | |
| | L431 | LK73G0BE4R7K | M.CHIP INDUCTOR | | 1 | |
| | L480 | LK73G0BE4R7K | M.CHIP INDUCTOR | | 1 | |
| | L520 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L580 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L750 | LB73G0EA-002 | CHIP FERRITE | | 1 | |
| | L920 | LR79Z0JM4R3M | CHIP INDUCTOR | | 1 | |
| | L1200 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1201 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1202 | LB73H0DZ-003 | CHIP FERRITE | | 1 | |
| | L1203 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1204 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1205 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1206 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1209 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1210 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1211 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1212 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1213 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1214 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1215 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1216 | LB73H0FJ-006 | CHIP FERRITE | | 1 | |
| | L1250 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L1340 | LB73H0FJ-003 | CHIP FERRITE | | 1 | |
| | L1341 | LB73H0FJ-003 | CHIP FERRITE | | 1 | |
| | AT130 | QAM1484-001 | CAR CABLE | | 1 | |
| | CN170 | EB770BH-0830A | B TO B CONNE | | 1 | K0 |
| | CN280 | EC720CF-0570A | FFC FPC CONNE | | 1 | |
| | CN281 | EA710AP-2005A | W TO B CONNE | | 1 | |
| | CN600 | EA710AT-1004A | W TO B CONNE | | 1 | |
| | CN710 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN720 | EC720CF-0570A | FFC FPC CONNE | | 1 | |
| | CN721 | EA710AP-2005A | W TO B CONNE | | 1 | |
| | CN890 | EA720AT-1008A | W TO B CONNE | | 1 | |
| | CN1200 | EB150AA-1020A | B TO B CONNE | | 1 | |
| | CN1342 | EA110CU-2502A | W TO B CONNE | | 1 | |
| | CN1390 | EA710AP-2002A | W TO B CONNE | | 1 | |
| | CN1470 | EA120CK-2004A | W TO B CONNE | | 1 | |
| | E180 | F1B-0106-00 | SHIELDING CASE | | 1 | K1 |
| ⚠ | F920 | FZA10BZ-7R0 | FUSE (CC) | | 1 | |
| ⚠ | F1360 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1390 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1400 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1471 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1472 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1473 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1480 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1500 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1520 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| ⚠ | F1521 | F53-0513-08 | PATTERN FUSE | 4A | 1 | |
| | J1 | E5J-0139-00 | R.RECEPTACLE | | 1 | |
| | J100 | E6D-0016-10 | PIN JACK | | 1 | |
| | J600 | J2B-0743-00 | JACK MOUNTING | | 1 | |
| | J1200 | E5J-0218-00 | HDMI TERMINAL | | 1 | |
| | J1360 | E1B-0060-00 | 3.5D PHONE JACK | | 1 | |
| | J1400 | E6D-0041-00 | PIN JACK | | 1 | |
| | J1450 | E5G-0029-00 | CYL.RECEPTACLE | | 1 | |
| | J1470 | E1B-0041-00 | 3.5D PHONE JACK | | 1 | |
| | VA100 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA101 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA102 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA103 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA104 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA130 | F0K-0014-00 | SURGE ABSORBER | | 1 | |
| | VA340 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA890 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA891 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA892 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA893 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA1200 | EZJZ0V80010 | VARISTOR | | 1 | |
| | VA1201 | EZJZ0V80010 | VARISTOR | | 1 | |
| | VA1202 | EZJZ0V80010 | VARISTOR | | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | VA1203 | F0K-0176-00 | SURGE ABSORBER | | 1 | |
| | VA1204 | F0K-0176-00 | SURGE ABSORBER | | 1 | |
| | VA1205 | AVRL101A1R1NB | VARISTOR | | 1 | |
| | VA1206 | EZJP0270EA | VARISTOR | | 1 | |
| | VA1340 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1341 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1360 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1361 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1362 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1363 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1390 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1400 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1401 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1450 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1451 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1452 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA1453 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA1454 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA1455 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA1470 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA1471 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA1490 | SDV1005E18//1 | VARISTOR | | 1 | |
| | VA1491 | SDV1005E18//1 | VARISTOR | | 1 | |
| | W610 | QZW0010-001 | WIRE CLAMP | | 1 | |
| | W1560 | QZW0010-001 | WIRE CLAMP | | 1 | |
| | X180 | L7J-0028-00 | QUARTZ CRYSTAL | | 1 | K1 |
| | X520 | L7J-0026-00 | QUARTZ CRYSTAL | | 1 | |
| | X750 | L7J-0099-00 | QUARTZ CRYSTAL | | 1 | |
| | X1200 | L7J-0052-00 | QUARTZ CRYSTAL | | 1 | |

CONTROL PWB ASSY (XJ6-170K-00) <XJ6>

| | | | | | | |
|---|---|---|---|---|---|---|
| | IC3301 | --------- | MOS IC | NO SERVICE PART | 1 | |
| | C3302 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C3304 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C3320 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C3321 | CK73JXR1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C3322 | CK73JXR1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C3323 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C3326 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C3327 | CK73JXR1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C3350 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C3351 | CK73JXR1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C3353 | CK73JXR1E223K | C CAPACITOR | 0.022uF 25V K | 1 | |
| | C3360 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C3381 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | R3301 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3310 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R3311 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R3314 | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R3315 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R3316 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R3317 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R3318 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R3319 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3320 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3321 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3322 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3323 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3324 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3326 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R3327 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R3328 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R3329 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3330 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3331 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3332 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3333 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3334 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3335 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3336 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3337 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3338 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3339 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3340 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3341 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3342 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3343 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3344 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3345 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3346 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3347 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3348 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3349 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3350 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3351 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3352 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3353 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3354 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3355 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3356 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3357 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3358 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R3359 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3360 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3361 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3362 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3363 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3364 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3365 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3366 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3367 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3368 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3369 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3370 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R3391 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3392 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | L3301 | LB73G0EA-001 | CHIP FERRITE | | 1 | |
| | L3302 | LB73G0EA-001 | CHIP FERRITE | | 1 | |
| | CN3301 | EC720AA-0512A | FFC FPC CONNE | | 1 | |
| | CN3302 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN3303 | EC720AA-0506A | FFC FPC CONNE | | 1 | |
| OPERATION PWB ASSY (XJ7-074K-00) <XJ7> | | | | | | |
| | IC3750 | PICA38603-NV | IR DETECT UNIT | | 1 | |
| | IC3760 | PCA9632DP2Z | MOS IC | | 1 | |
| | Q3760 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q3761 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q3762 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | D3760 | NSSM124F | LED | | 1 | |
| | D3761 | NSSM124F | LED | | 1 | |
| | C3750 | CK73HXR0J105K | C CAPACITOR | 1uF 6.3V K | 1 | |
| | C3753 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3757 | CE32BY1C471M | E CAPACITOR | 470uF 16V M | 1 | |
| | C3760 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3761 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3762 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3763 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | R3760 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R3761 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3762 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R3763 | RK73GB2A271J | MG RESISTOR | 270Ω 1/10W J | 1 | |
| | R3764 | RK73GB2A271J | MG RESISTOR | 270Ω 1/10W J | 1 | |
| | R3765 | RK73GB2A271J | MG RESISTOR | 270Ω 1/10W J | 1 | |
| | R3766 | RK73GH2A561D | MG RESISTOR | 560Ω 1/10W D | 1 | |
| | R3767 | RK73GH2A561D | MG RESISTOR | 560Ω 1/10W D | 1 | |
| | R3768 | RK73GH2A561D | MG RESISTOR | 560Ω 1/10W D | 1 | |
| | R3769 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R3770 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R3771 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R3772 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R3773 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R3774 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | CN3750 | EC720AA-0506A | FFC FPC CONNE | | 1 | |
| VIDEO PWB ASSY (XJ8-107K-01) <XJ8> | | | | | | |
| | IC2000 | --------- | MPU IC | NO SERVICE PART | 1 | |
| | IC2100 | MFI343S00177 | MCU IC | | 1 | |
| | IC2120 | F50L2G41XA//1 | ROM IC | | 1 | |
| | IC2150 | XC6223B331P-G | ANALOG IC | | 1 | |
| | IC2340 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC2370 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC2400 | LM3481MMXNOPB | ANALOG IC | | 1 | |
| | IC2430 | BD00IC0EEFJ-M | ANALOG IC | | 1 | |
| | IC2450 | NJM2904CV | ANALOG IC | | 1 | |
| | IC2540 | NJM11100F1 | ANALOG IC | | 1 | |
| | IC2710 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC2740 | MP9943AGQ | ANALOG IC | | 1 | |
| | IC2750 | INA199B3DCK | ANALOG IC | | 1 | |
| | Q2000 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2100 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2101 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2200 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2201 | MCQ4435 | FET | | 1 | |
| | Q2300 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2340 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2341 | RQ6E030AT | FET | | 1 | |
| | Q2370 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2371 | LTC044EEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2400 | RQ6E035TN | FET | | 1 | |
| | Q2450 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2451 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2452 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2453 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2454 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2455 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2456 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2570 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2571 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2572 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2573 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2590 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2591 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2592 | LTA014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2593 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2594 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2610 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2611 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | Q2612 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2613 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2614 | LSAR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2615 | LSCR523UBFS8 | TRANSISTOR | | 1 | |
| | Q2741 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2750 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2751 | LSCR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2752 | LSAR523EBFS8 | TRANSISTOR | | 1 | |
| | Q2753 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q2754 | LTC014YEBFS8 | DIGI TRANSISTOR | | 1 | |
| | D2400 | RBR1LAM40A | SCHOTTKY DIODE | | 1 | |
| | D2401 | 1SS355VM | DIODE | | 1 | |
| | D2402 | 1SS355VM | DIODE | | 1 | |
| | D2403 | 1SS355VM | DIODE | | 1 | |
| | D2404 | 1SS355VM | DIODE | | 1 | |
| | D2740 | UDZV6.2B | ZENER DIODE | | 1 | |
| | C2000 | CC73JCH1H030C | C CAPACITOR | 3pF 50V C | 1 | |
| | C2001 | CC73JCH1H030C | C CAPACITOR | 3pF 50V C | 1 | |
| | C2003 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2004 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2005 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2006 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2007 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2008 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C2009 | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K | 1 | |
| | C2010 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2011 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2012 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2014 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2015 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2016 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2017 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2018 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2019 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2020 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2021 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2022 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2023 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2024 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2025 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2026 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2027 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2028 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2029 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2030 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2031 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2032 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2033 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2034 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2035 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2036 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2037 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2038 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2039 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2040 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2041 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2042 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2043 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2044 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2045 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2046 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2047 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2048 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2049 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2050 | CC73JCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C2051 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C2052 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C2053 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2054 | CS770AJ0J101M | TA E CAPACITOR | 100uF 6.3V M | 1 | |
| | C2055 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2056 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2057 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2058 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2059 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2060 | CK73JXR1A224K | C CAPACITOR | 0.22uF 10V K | 1 | |
| | C2070 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2071 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2072 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2074 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2075 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2100 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2120 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2121 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2150 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2151 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C2152 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2153 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2154 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C2155 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2156 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2157 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2158 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2159 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C2206 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | |
| | C2210 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2216 | CC73JCH1H100D | C CAPACITOR | 10pF 50V D | 1 | |
| | C2218 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2219 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2343 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2344 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2345 | CK73HXR1E224K | C CAPACITOR | 0.22uF 25V K | 1 | |
| | C2346 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2347 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2348 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2350 | CC73JCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C2351 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2352 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2353 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2354 | CK73HXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2372 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2373 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2374 | CK73HXR1E224K | C CAPACITOR | 0.22uF 25V K | 1 | |
| | C2375 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2376 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2377 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2380 | CC73JCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C2381 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2382 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2383 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2384 | CK73HXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2400 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2401 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2402 | CC73JCH1E391J | C CAPACITOR | 390pF 25V J | 1 | |
| | C2403 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2404 | CC73JCH1E102J | C CAPACITOR | 1000pF 25V J | 1 | |
| | C2405 | CC73JCH1E821J | C CAPACITOR | 820pF 25V J | 1 | |
| | C2406 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2407 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2408 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2409 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2410 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2412 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2413 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2415 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2416 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2417 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2418 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2419 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2420 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2421 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2430 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2431 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2432 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2434 | CK73HXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2450 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2469 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2490 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2491 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2492 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2493 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2494 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2495 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2496 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2540 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2541 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C2542 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C2543 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2545 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2570 | CK73FXR1E475K | C CAPACITOR | 4.7uF 25V K | 1 | |
| | C2571 | CK73GXR1E225K | C CAPACITOR | 2.2uF 25V K | 1 | |
| | C2572 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2590 | CK73GXR1E105K | C CAPACITOR | 1uF 25V K | 1 | |
| | C2591 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2592 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2610 | CK73HXR1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C2712 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2713 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2714 | CK73HXR1E224K | C CAPACITOR | 0.22uF 25V K | 1 | |
| | C2716 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2717 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2719 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2720 | CC73JCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C2722 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2723 | CK73FXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C2724 | CC73JCH1H221J | C CAPACITOR | 220pF 50V J | 1 | |
| | C2742 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2743 | CK73FXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C2744 | CK73HXR1E224K | C CAPACITOR | 0.22uF 25V K | 1 | |
| | C2746 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2747 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2749 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C2750 | CC73JCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C2752 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2753 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C2754 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C2755 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2759 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2760 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2761 | CK73JXR1C224K | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C2762 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C2763 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C2764 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2765 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2766 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2767 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2768 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C2769 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C3000 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3001 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3002 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3003 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3004 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C3005 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3006 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3007 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3008 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3009 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3012 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3014 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3016 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3017 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C3018 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C3019 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3020 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3021 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3024 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C3026 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C3027 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3028 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3029 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3030 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3032 | CK73JXR1H471K | C CAPACITOR | 470pF 50V K | 1 | |
| | C3033 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | R2000 | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R2001 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R2004 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2006 | RK73HH1J750D | MG RESISTOR | 75Ω 1/16W D | 1 | |
| | R2007 | RK73HH1J202D | MG RESISTOR | 2kΩ 1/16W D | 1 | |
| | R2008 | RK73HH1J202D | MG RESISTOR | 2kΩ 1/16W D | 1 | |
| | R2009 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2011 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2012 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2013 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2016 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2017 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2019 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2022 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2024 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2026 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2027 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2028 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2031 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2032 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2035 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2037 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2039 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2040 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2042 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2044 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R2045 | RK73HB1J272J | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R2046 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2047 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2048 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2052 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2053 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2054 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2073 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2074 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2075 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2076 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2077 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2078 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2079 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2080 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2082 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2083 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2086 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2087 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2088 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2089 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2090 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2091 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2092 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2094 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2101 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2102 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2103 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2104 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R2109 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2110 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2111 | RK73HB1J122J | MG RESISTOR | 1.2kΩ 1/16W J | 1 | |
| | R2120 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2121 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2122 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2123 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2124 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2125 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2150 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2151 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R2152 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2180 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2181 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2182 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2183 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2184 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2185 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2186 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2187 | RK73HB1J301J | MG RESISTOR | 300Ω 1/16W J | 1 | |
| | R2189 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2190 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2191 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2200 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2201 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2202 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2203 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2204 | RK73HB1J562J | MG RESISTOR | 5.6kΩ 1/16W J | 1 | |
| | R2205 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2206 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2207 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R2208 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R2210 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2211 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2212 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2213 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2221 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2222 | RK73HB1J151J | MG RESISTOR | 150Ω 1/16W J | 1 | |
| | R2226 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2250 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2251 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2252 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2253 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2254 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2255 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2256 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2258 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2259 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2260 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2261 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2262 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2263 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2264 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2265 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2266 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2267 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2269 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2280 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2281 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2320 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2321 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2322 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2323 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2326 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2327 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2328 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R2330 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R2331 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R2332 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R2333 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R2334 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2335 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2336 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2340 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2342 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R2343 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R2345 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2346 | RK73HB1J200J | MG RESISTOR | 20Ω 1/16W J | 1 | |
| | R2348 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R2349 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2350 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R2351 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R2352 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R2353 | RK73HH1J123D | MG RESISTOR | 12kΩ 1/16W D | 1 | |
| | R2355 | RK73HB1J151J | MG RESISTOR | 150Ω 1/16W J | 1 | |
| | R2359 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R2360 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R2370 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2371 | RK73HB1J200J | MG RESISTOR | 20Ω 1/16W J | 1 | |
| | R2373 | RK73HH1J273D | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R2374 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2376 | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R2377 | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D | 1 | |
| | R2378 | RK73HH1J273D | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R2379 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R2382 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2383 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2384 | RK73HB1J822J | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R2400 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R2401 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R2402 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2403 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R2404 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R2405 | RK73HH1J152D | MG RESISTOR | 1.5kΩ 1/16W D | 1 | |
| | R2406 | RK73HH1J823D | MG RESISTOR | 82kΩ 1/16W D | 1 | |
| | R2407 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R2408 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2409 | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R2410 | RK73HH1J563D | MG RESISTOR | 56kΩ 1/16W D | 1 | |
| | R2411 | RZ73F0AK62LJ | RESISTOR | 62mΩ J | 1 | |
| | R2412 | RK73EB2E100J | MG RESISTOR | 10Ω 1/4W J | 1 | |
| | R2413 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2414 | RK73EB2E560J | MG RESISTOR | 56Ω 1/4W J | 1 | |
| | R2431 | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D | 1 | |
| | R2432 | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D | 1 | |
| | R2433 | RK73HH1J751D | MG RESISTOR | 750Ω 1/16W D | 1 | |
| | R2434 | RK73HB1J273J | MG RESISTOR | 27kΩ 1/16W J | 1 | |
| | R2452 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2453 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2454 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2455 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2456 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2457 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2458 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2460 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2461 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2462 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2463 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2464 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2465 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2466 | RK73GH2A101D | MG RESISTOR | 100Ω 1/10W D | 1 | |
| | R2469 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2474 | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R2490 | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R2491 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2494 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2495 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2496 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2497 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2498 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2499 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2502 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2503 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2504 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2505 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2506 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2507 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2510 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2511 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2512 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2513 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2514 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2515 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2516 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2517 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | |
| | R2520 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2521 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2522 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2540 | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R2541 | RK73GH2A133D | MG RESISTOR | 13kΩ 1/10W D | 1 | |
| | R2542 | RK73GH2A823D | MG RESISTOR | 82kΩ 1/10W D | 1 | |
| | R2543 | RK73GH2A153D | MG RESISTOR | 15kΩ 1/10W D | 1 | |
| | R2553 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2556 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2570 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2571 | RK73HH1J332D | MG RESISTOR | 3.3kΩ 1/16W D | 1 | |
| | R2572 | RK73HB1J681J | MG RESISTOR | 680Ω 1/16W J | 1 | |
| | R2573 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R2574 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R2575 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R2576 | RK73EB2E392J | MG RESISTOR | 3.9kΩ 1/4W J | 1 | |
| | R2590 | RK73HB1J104J | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R2591 | RK73HH1J223D | MG RESISTOR | 22kΩ 1/16W D | 1 | |
| | R2592 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R2593 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R2594 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2595 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R2596 | RK73HH1J473D | MG RESISTOR | 47kΩ 1/16W D | 1 | |
| | R2597 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2610 | RK73HH1J433D | MG RESISTOR | 43kΩ 1/16W D | 1 | |
| | R2611 | RK73HH1J913D | MG RESISTOR | 91kΩ 1/16W D | 1 | |
| | R2612 | RK73HH1J184D | MG RESISTOR | 180kΩ 1/16W D | 1 | |
| | R2613 | RK73HH1J434D | MG RESISTOR | 430kΩ 1/16W D | 1 | |
| | R2614 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R2615 | RK73HH1J153D | MG RESISTOR | 15kΩ 1/16W D | 1 | |
| | R2616 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R2617 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R2618 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R2619 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2710 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2711 | RK73HH1J103D | MG RESISTOR | 10kΩ 1/16W D | 1 | |
| | R2712 | RK73HB1J200J | MG RESISTOR | 20Ω 1/16W J | 1 | |
| | R2713 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R2714 | RK73HH1J123D | MG RESISTOR | 12kΩ 1/16W D | 1 | |
| | R2715 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R2716 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R2717 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2718 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R2719 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R2741 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2743 | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R2744 | RK73HH1J333D | MG RESISTOR | 33kΩ 1/16W D | 1 | |
| | R2745 | RK73HB1J200J | MG RESISTOR | 20Ω 1/16W J | 1 | |
| | R2746 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2747 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | |
| | R2748 | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D | 1 | |
| | R2749 | RK73HH1J222D | MG RESISTOR | 2.2kΩ 1/16W D | 1 | |
| | R2750 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R2751 | RK73EB2E151J | MG RESISTOR | 150Ω 1/4W J | 1 | |
| | R2752 | RZ73F0CH30LJ | RESISTOR | 0.03Ω 1/3W J | 1 | |
| | R2753 | RZ73F0CH30LJ | RESISTOR | 0.03Ω 1/3W J | 1 | |
| | R2754 | RZ73F0CH30LJ | RESISTOR | 0.03Ω 1/3W J | 1 | |
| | R2755 | RZ73F0CH30LJ | RESISTOR | 0.03Ω 1/3W J | 1 | |
| | R2756 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R2757 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R2758 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2759 | RK73HH1J102D | MG RESISTOR | 1kΩ 1/16W D | 1 | |
| | R2760 | RK73HH1J104D | MG RESISTOR | 100kΩ 1/16W D | 1 | |
| | R2761 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R2762 | RK73HB1J224J | MG RESISTOR | 220kΩ 1/16W J | 1 | |
| | R2763 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R2765 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2766 | RK73EB2E151J | MG RESISTOR | 150Ω 1/4W J | 1 | |
| | R2767 | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R2769 | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R2770 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R2771 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | L2000 | LB73G0ED-001 | CHIP FERRITE | | 1 | |
| | L2003 | LB73G0ED-001 | CHIP FERRITE | | 1 | |
| | L2006 | LB73G0ED-001 | CHIP FERRITE | | 1 | |
| | L2013 | LK73G0BE1R8K | M.CHIP INDUCTOR | | 1 | |
| | L2014 | LK73G0BE1R8K | M.CHIP INDUCTOR | | 1 | |
| | L2015 | LK73G0BE1R8K | M.CHIP INDUCTOR | | 1 | |
| | L2016 | LK73G0BE1R0K | M.CHIP INDUCTOR | | 1 | |
| | L2150 | LB73H0FJ-003 | CHIP FERRITE | | 1 | |
| | L2151 | LB73H0FJ-003 | CHIP FERRITE | | 1 | |
| | L2203 | LB73G0ED-004 | CHIP FERRITE | | 1 | |
| | L2340 | LR79Z0SA5R1N | CHIP INDUCTOR | | 1 | |
| | L2371 | LR79Z0SA5R1N | CHIP INDUCTOR | | 1 | |
| | L2400 | LR79Z0KD220M | CHIP INDUCTOR | | 1 | |
| | L2401 | LB73E0FU-004 | CHIP FERRITE | | 1 | |
| | L2710 | LR79Z0SA5R1N | CHIP INDUCTOR | | 1 | |
| | L2740 | LR79Z0FF100M | CHIP INDUCTOR | | 1 | |
| | A2200 | W0C-0414-00 | CIRCUIT MODULE | | 1 | |
| | CN2150 | EA720AP-2002A | W TO B CONNE | | 1 | |
| | CN2180 | EB760AA-1020A | B TO B CONNE | | 1 | |
| | CN2250 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN2280 | EC720AA-0512A | FFC FPC CONNE | | 1 | |
| | CN2300 | EC720AA-0512A | FFC FPC CONNE | | 1 | |
| | CN2330 | EC720AA-0516A | FFC FPC CONNE | | 1 | |
| | CN2490 | EC720AA-0550A | FFC FPC CONNE | | 1 | |
| | CN2760 | EA720AP-2005A | W TO B CONNE | | 1 | |
| ⚠ | F2422 | FZA10BF-1R0 | FUSE (CC) | | 1 | |
| | VA2150 | SDV1005A14//0 | VARISTOR | | 1 | |
| | VA2330 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA2331 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA2760 | SDV1005H26//0 | VARISTOR | | 1 | |
| | VA2761 | SDV1005H26//0 | VARISTOR | | 1 | |
| | X2000 | L7J-0052-00 | QUARTZ CRYSTAL | | 1 | |
| GPS PWB ASSY (XJ9-024K-00) <XJ9> | | | | | | |
| | IC1600 | --------- | MOS IC | NO SERVICE PART | 1 | |
| | IC1630 | MM3608A33NH | ANALOG IC | | 1 | |
| | IC1635 | MM3608A18NH | ANALOG IC | | 1 | |
| | Q1615 | SSM3J372RF | FET | | 1 | |
| | C1600 | CK73JXR1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C1601 | CC73JCH1H470J | C CAPACITOR | 47pF 50V J | 1 | |
| | C1602 | CC730CC1H3R3B | C CAPACITOR | 3.3pF 50V B | 1 | |
| | C1603 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1604 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1605 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1606 | CC73JCH1H270J | C CAPACITOR | 27pF 50V J | 1 | |
| | C1607 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1608 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | |
| | C1609 | CK73GXR1A475K | C CAPACITOR | 4.7uF 10V K | 1 | |
| | C1610 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1611 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1612 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | |
| | C1613 | CC73JCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C1614 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1615 | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K | 1 | |
| | C1616 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1617 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1618 | CC73JCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |
| | C1619 | CC73JCH1H120J | C CAPACITOR | 12pF 50V J | 1 | |
| | C1620 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1621 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1622 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1630 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1631 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1635 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1636 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C1753 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | C1754 | CK73JXR1H472K | C CAPACITOR | 4700pF 50V K | 1 | |
| | R1600 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1602 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1603 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1605 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1606 | RK73HB1J513J | MG RESISTOR | 51kΩ 1/16W J | 1 | |
| | R1607 | RK73HB1J243J | MG RESISTOR | 24kΩ 1/16W J | 1 | |
| | R1608 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1610 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R1611 | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J | 1 | |
| | R1612 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R1615 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R1616 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R1617 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R1618 | RK73HH1J133D | MG RESISTOR | 13kΩ 1/16W D | 1 | |
| | R1619 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | |
| | R1620 | RK73HH1J133D | MG RESISTOR | 13kΩ 1/16W D | 1 | |
| | R1621 | RK73HH1J752D | MG RESISTOR | 7.5kΩ 1/16W D | 1 | |
| | R1630 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1631 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1650 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | R1652 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | |
| | L1600 | LK73H0CM27NJ | M.CHIP INDUCTOR | | 1 | |
| | L1601 | LR79H0HU4N7B | CHIP INDUCTOR | | 1 | |
| | L1602 | LR73Z0AD4R7M | CHIP INDUCTOR | | 1 | |
| | L1603 | LB73H0DZ-001 | CHIP FERRITE | | 1 | |
| | CN1600 | EC720AA-0512A | FFC FPC CONNE | | 1 | |
| | FL1600 | L7K-0072-00 | FILTER | | 1 | |
| | J1600 | E5J-0023-00 | R.RECEPTACLE | | 1 | |
| | VA1600 | F0K-0265-00 | SURGE ABSORBER | | 1 | |
| | X1600 | L7H-0159-10 | TCXO | | 1 | |
| | X1601 | L7J-0095-00 | QUARTZ CRYSTAL | | 1 | |

HD TUNER PWB ASSY (XJM-035K-00) <XJM>

| | | | | | | |
|---|---|---|---|---|---|---|
| | IC1 | SI4763-A42-GM | MOS IC | | 1 | K0 |
| | IC2 | SI4613-A10-GM | MOS IC | | 1 | K0 |
| | IC3 | W3F-0442-00 | ROM IC | | 1 | K0 |
| | IC4 | MM3608A18NH | ANALOG IC | | 1 | K0 |
| | C2 | CC73HCH1H101J | C CAPACITOR | 100pF 50V J | 1 | K0 |
| | C3 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C4 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C5 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C6 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K0 |
| | C7 | CK73JXR1C473K | C CAPACITOR | 0.047uF 16V K | 1 | K0 |
| | C8 | CK73JXR1H102K | C CAPACITOR | 1000pF 50V K | 1 | K0 |
| | C9 | CC73JCH1H390J | C CAPACITOR | 39pF 50V J | 1 | K0 |
| | C10 | CC73JCH1H270J | C CAPACITOR | 27pF 50V J | 1 | K0 |
| | C11 | CC73JCH1H0R5C | C CAPACITOR | 0.5pF 50V C | 1 | K0 |
| | C15 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C16 | CC73JCH1H050C | C CAPACITOR | 5pF 50V C | 1 | K0 |
| | C18 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | K0 |
| | C19 | CK73JXR1C103K | C CAPACITOR | 0.01uF 16V K | 1 | K0 |
| | C20 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | K0 |
| | C21 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | K0 |
| | C22 | CC73JCH1E102J | C CAPACITOR | 1000pF 25V J | 1 | K0 |
| | C25 | CK73JXR1H682K | C CAPACITOR | 6800pF 50V K | 1 | K0 |
| | C26 | CK73JXR1H682K | C CAPACITOR | 6800pF 50V K | 1 | K0 |
| | C27 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | K0 |
| | C28 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | K0 |
| | C29 | CC73JCH1H060D | C CAPACITOR | 6pF 50V D | 1 | K0 |
| | C30 | CC73JCH1H060D | C CAPACITOR | 6pF 50V D | 1 | K0 |
| | C33 | CK73HXR1C105K | C CAPACITOR | 1uF 16V K | 1 | K0 |
| | C40 | CC73JCH1H020C | C CAPACITOR | 2pF 50V C | 1 | K0 |
| | C42 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | K0 |
| | C43 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | K0 |
| | C44 | CC73GCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C48 | CC73GCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C50 | CC73JCH1H0R5C | C CAPACITOR | 0.5pF 50V C | 1 | K0 |
| | C51 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C52 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C53 | CC73JCH1H0R5C | C CAPACITOR | 0.5pF 50V C | 1 | K0 |
| | C54 | CC73JCH1H0R5C | C CAPACITOR | 0.5pF 50V C | 1 | K0 |
| | C55 | CC73JCH1H101J | C CAPACITOR | 100pF 50V J | 1 | K0 |
| | C56 | CC73GCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C57 | CK73GXR1A475K | C CAPACITOR | 4.7uF 10V K | 1 | K0 |
| | C58 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K0 |
| | C59 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K0 |
| | C101 | CC73JCH1H220J | C CAPACITOR | 22pF 50V J | 1 | K0 |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C102 | CC73JCH1H220J | C CAPACITOR | 22pF 50V J | 1 | K0 |
| | C103 | CC73JCH1H220J | C CAPACITOR | 22pF 50V J | 1 | K0 |
| | C111 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | K0 |
| | C113 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | K0 |
| | C119 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | K0 |
| | C121 | CK73JXR1C104K | C CAPACITOR | 0.1uF 16V K | 1 | K0 |
| | C122 | CC73JCH1E102J | C CAPACITOR | 1000pF 25V J | 1 | K0 |
| | C123 | CC73JCH1H180J | C CAPACITOR | 18pF 50V J | 1 | K0 |
| | C124 | CC73JCH1H180J | C CAPACITOR | 18pF 50V J | 1 | K0 |
| | C125 | CC73JCH1H180J | C CAPACITOR | 18pF 50V J | 1 | K0 |
| | C127 | CK73JXR1A104K | C CAPACITOR | 0.1uF 10V K | 1 | K0 |
| | C128 | CC73JCH1H020C | C CAPACITOR | 2pF 50V C | 1 | K0 |
| | C129 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C131 | CC73JCH1H180J | C CAPACITOR | 18pF 50V J | 1 | K0 |
| | C143 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C144 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C146 | CK73JXR1C222K | C CAPACITOR | 2200pF 16V K | 1 | K0 |
| | C9002 | CK73GXR0J106K | C CAPACITOR | 10uF 6.3V K | 1 | K0 |
| | C9003 | CK73HXR1A105K | C CAPACITOR | 1uF 10V K | 1 | K0 |
| | C9004 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9005 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9006 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9007 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9009 | CK73JXR0J474K | C CAPACITOR | 0.47uF 6.3V K | 1 | K0 |
| | C9010 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | K0 |
| | C9011 | CC73JCH1H150J | C CAPACITOR | 15pF 50V J | 1 | K0 |
| | C9013 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9016 | CC73HCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9019 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9020 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | C9023 | CC73JCH1H010C | C CAPACITOR | 1pF 50V C | 1 | K0 |
| | R1 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R3 | RK73HB1J240J | MG RESISTOR | 24Ω 1/16W J | 1 | K0 |
| | R4 | RK73HB1J474J | MG RESISTOR | 470kΩ 1/16W J | 1 | K0 |
| | R5 | RK73HB1J474J | MG RESISTOR | 470kΩ 1/16W J | 1 | K0 |
| | R10 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K0 |
| | R11 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K0 |
| | R12 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R14 | RK73HB1J471J | MG RESISTOR | 470Ω 1/16W J | 1 | K0 |
| | R16 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R17 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R18 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R26 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R39 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | K0 |
| | R40 | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J | 1 | K0 |
| | R41 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R42 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R43 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R44 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R51 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | K0 |
| | R52 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | K0 |
| | R53 | RK73HB1J331J | MG RESISTOR | 330Ω 1/16W J | 1 | K0 |
| | R54 | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1 | K0 |
| | R60 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | K0 |
| | R61 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | K0 |
| | R62 | RK73EB2E000J | MG RESISTOR | 0Ω 1/4W J | 1 | K0 |
| | R103 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R104 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R105 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R107 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | K0 |
| | R108 | RK73HB1J330J | MG RESISTOR | 33Ω 1/16W J | 1 | K0 |
| | R109 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R110 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R111 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R112 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R114 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R115 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | K0 |
| | R116 | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J | 1 | K0 |
| | R121 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R122 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R123 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R124 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R127 | RK73HB1J122J | MG RESISTOR | 1.2kΩ 1/16W J | 1 | K0 |
| | R129 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R140 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | R141 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R142 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R143 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R144 | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J | 1 | K0 |
| | R145 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | K0 |
| | R155 | RK73HB1J470J | MG RESISTOR | 47Ω 1/16W J | 1 | K0 |
| | R166 | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J | 1 | K0 |
| | R9005 | RK73EB2E000J | MG RESISTOR | 0Ω 1/4W J | 1 | K0 |
| | R9007 | RK73EB2E000J | MG RESISTOR | 0Ω 1/4W J | 1 | K0 |
| | R9008 | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J | 1 | K0 |
| | L1 | LK73H0BUR18K | M.CHIP INDUCTOR | | 1 | K0 |
| | L2 | LK73G0BE82NK | M.CHIP INDUCTOR | | 1 | K0 |
| | L3 | LK73G0BER12K | M.CHIP INDUCTOR | | 1 | K0 |
| | L4 | LK73H0BU1R2K | M.CHIP INDUCTOR | | 1 | K0 |
| | L5 | LK73G0BE1R8K | M.CHIP INDUCTOR | | 1 | K0 |
| | L8 | LK73G0BER39K | M.CHIP INDUCTOR | | 1 | K0 |
| | L9 | LK73G0AS10NJ | M.CHIP INDUCTOR | | 1 | K0 |
| | L10 | L1K-0001-00 | BALUN TRANS | | 1 | K0 |

| MODEL | MARK | MODEL | MARK |
|---|---|---|---|
| KW-M788BH | K0 | KW-M780BT | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | L14 | LK73G0BE100K | M.CHIP INDUCTOR | | 1 | K0 |
| | L21 | LB73G0EB-001 | CHIP FERRITE | | 1 | K0 |
| | L22 | LB73G0EB-001 | CHIP FERRITE | | 1 | K0 |
| | L101 | LB73G0FK-001 | CHIP FERRITE | | 1 | K0 |
| | L9001 | LR73Z0AD4R7M | CHIP INDUCTOR | | 1 | K0 |
| | CN1 | EB740BH-0830B | B TO B CONNE | | 1 | K0 |
| | E1 | F1B-0107-00 | SHIELDING CASE | | 1 | K0 |
| | X1 | L7J-0021-00 | QUARTZ CRYSTAL | | 1 | K0 |