# PARTS LIST

## KD-A805J, KD-R800J, KD-R801E, KD-R801EX, KD-R801EY, KD-R801EU, KD-R805U, KD-R805UT, KD-R807EE

* All printed circuit boards and its assemblies are not available as service parts.

- Contents -


Exploded view of general assembly and parts list (Block No.M1) ---------- 3- 2
CD mechanism assembly and parts list (Block No.MB ---------- 3- 6
Electrical parts list (Block No.01~02) ---------- 3-11
Packing materials and accessories parts list (Block No.M3) ---------- 3-20

# Exploded view of general assembly and parts list

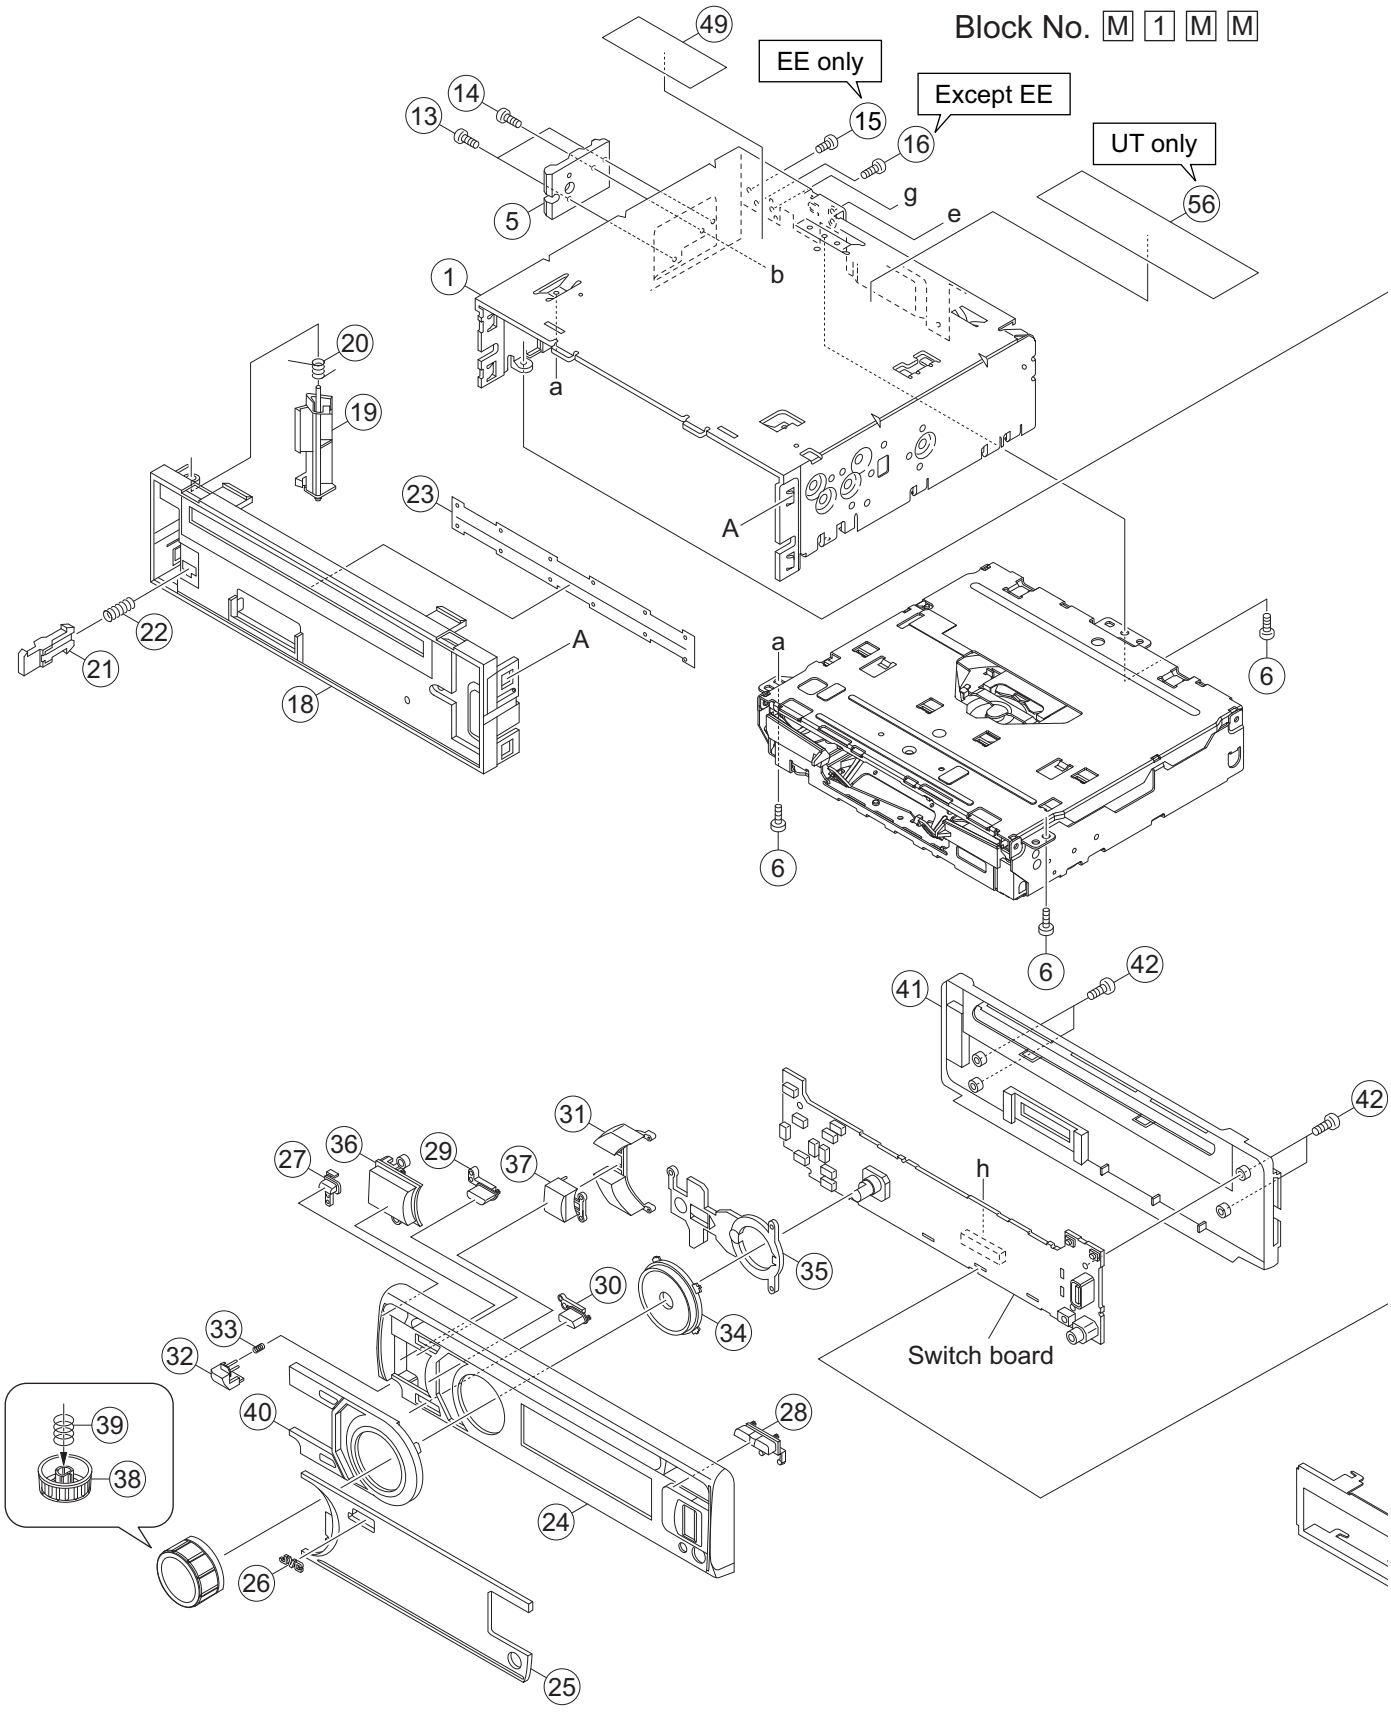

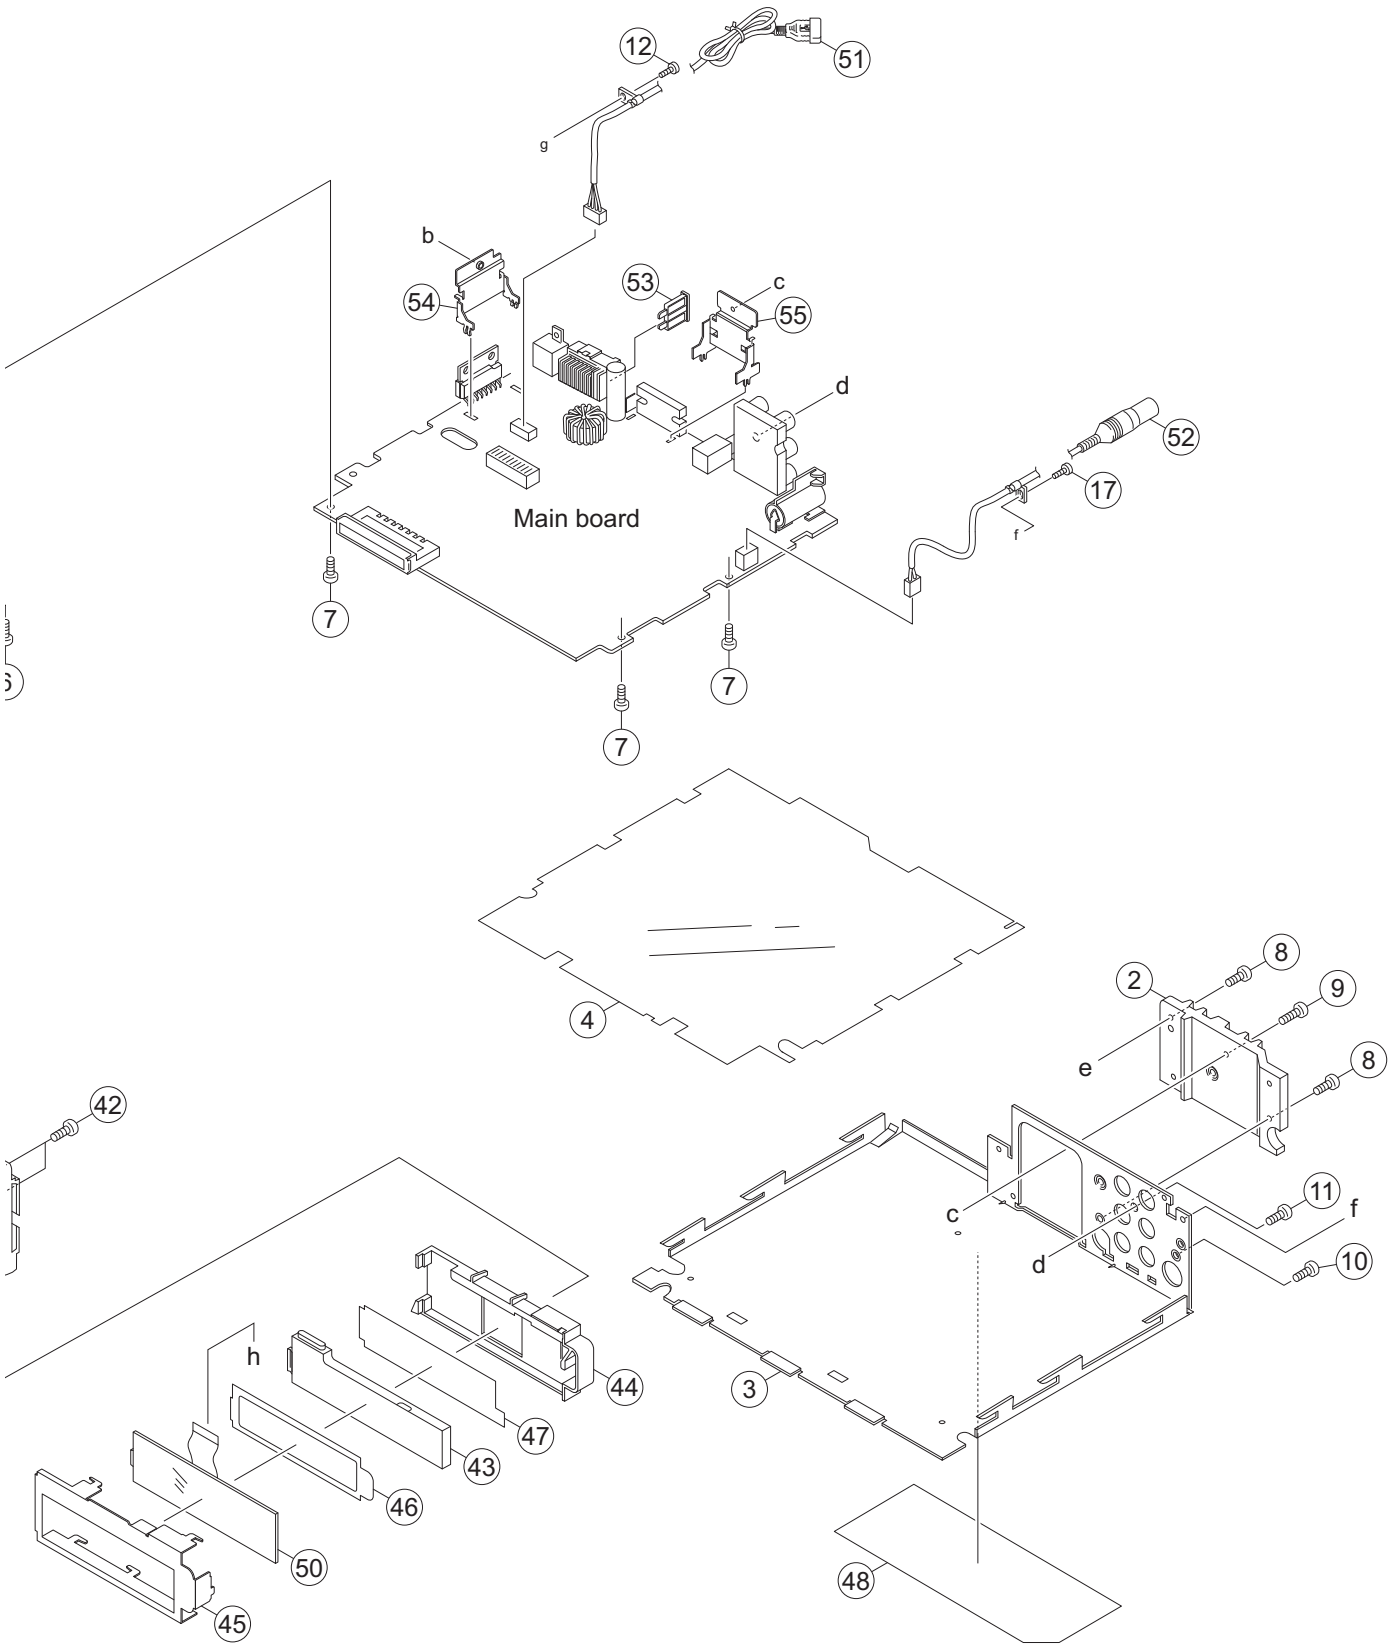


The parts without symbol number are not service.

# General Assembly

Block No. [M][1][M][M]

| ⚠ | Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|---|
| | 1 | GE10253-001A | TOP CHASSIS | | A805J,R800J,R801E,R801EX,R801EY,R801EU, R805U,R805UT |
| | 1 | GE10253-002A | TOP CHASSIS | | R807EE |
| | 2 | GE33234-001A | HEATSINK | | |
| | 3 | GE20232-005A | BOTTOM COVER | | A805J,R801E,R801EX,R801EY,R801EU |
| | 3 | GE20232-004A | BOTTOM COVER | | R800J,R805U,R805UT,R807EE |
| | 4 | GE32830-002A | INSULATOR | | |
| | 5 | GE40395-001A | SIDE PANEL | | |
| | 6 | QYSDST2604ZA | TAP SCREW | M2.6 x 4mm(x3) | |
| | 7 | GE40377-002A | SCREW | (x3) | |
| | 8 | GE40377-001A | SCREW | (x2) | |
| | 9 | QYSDST2610ZA | TAP SCREW | M2.6 x 10mm | |
| | 10 | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | |
| | 11 | QYSDSF2606ZA | TAP SCREW | M2.6 x 6mm | |
| | 12 | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | |
| | 13 | GE40377-002A | SCREW | (x2) | |
| | 14 | QYSDST2608ZA | TAP SCREW | M2.6 x 8mm | |
| | 15 | QYSDST2604ZA | TAP SCREW | M2.6 x 4mm | R807EE |
| | 16 | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | A805J,R800J,R801E,R801EX,R801EY,R801EU, R805U,R805UT |
| | 17 | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | |
| | 18 | GE10215-001A | FRONT CHASSIS | | |
| | 19 | GE32350-002A | LOCK LEVER | | |
| | 20 | GE40368-002A | TORSION SPRING | | |
| | 21 | GE32810-001A | RELEASE LEVER | | |
| | 22 | GE30999-004A | COMP.SPRING | | |
| | 23 | GE40400-001A | BLIND | | |
| | 24 | GE33592-020A | FRONT PANEL ASSY | | A805J |
| | 24 | GE33592-026A | FRONT PANEL ASSY | | R800J,R805U,R805UT |
| | 24 | GE33592-022A | FRONT PANEL ASSY | | R801E,R801EX,R801EY,R801EU |
| | 24 | GE33592-027A | FRONT PANEL ASSY | | R807EE |
| | 25 | GE33435-004A | FINDER ASSY | | A805J |
| | 25 | GE33435-016A | FINDER ASSY | | R800J |
| | 25 | GE33435-005A | FINDER ASSY | | R801E,R801EX,R801EY,R801EU |
| | 25 | GE33435-018A | FINDER ASSY | | R805U,R805UT |
| | 25 | GE33435-015A | FINDER ASSY | | R807EE |
| | 26 | GE40403-001A | JVC BADGE | | |
| | 27 | GE33433-001A | POWER BTN | | |
| | 28 | GE33529-001A | EJECT BTN | | |
| | 29 | GE33416-001A | SRC BUTTON | | |
| | 30 | GE33417-001A | DISP BUTTON | | R807EE |
| | 30 | GE33417-001A | DISP BUTTON | | A805J,R800J,R801E,R801EX,R801EY,R801EU, R805U,R805UT |
| | 31 | GE33418-001A | MENU BUTTON | | A805J |
| | 31 | GE33418-005A | MENU BUTTON | | R800J |
| | 31 | GE33418-002A | MENU BUTTON | | R801E,R801EX,R801EY,R801EU,R805U,R805UT |
| | 31 | GE33418-003A | MENU BUTTON | | R807EE |
| | 32 | GE33421-001A | DETACH BTN | | A805J,R800J,R801E,R801EX,R801EY,R801EU, R805U,R807EE |
| | 32 | GE33421-002A | DETACH BTN | | R805UT |
| | 33 | GE30999-006A | COMP.SPRING | | |
| | 34 | GE33424-001A | RIM LENS | | |
| | 35 | GE33425-001A | LIGHT GUIDE | | |
| | 36 | GE33438-001A | NAVI BTN ASSY | | |
| | 37 | GE40451-011A | BUTTON ASSY | | A805J |
| | 37 | GE40451-002A | BUTTON ASSY | | R800J,R801E,R801EX,R801EY,R801EU,R805U, R805UT |
| | 37 | GE40451-003A | BUTTON ASSY | | R807EE |
| | 38 | GE33704-003A | VOL KNOB ASSY | | A805J |
| | 38 | GE33704-005A | VOL KNOB ASSY | | R800J |
| | 38 | GE33704-001A | VOL KNOB ASSY | | R801E,R801EX,R801EY,R801EU,R805U,R805UT |
| | 38 | GE33704-002A | VOL KNOB ASSY | | R807EE |
| | 39 | GE40127-001A | KNOB SPRING | | |
| | 40 | GE33436-006A | SIDE COVER ASSY | | A805J |
| | 40 | GE33436-007A | SIDE COVER ASSY | | R800J,R801E,R801EX,R801EY,R801EU,R805U, R805UT |
| | 40 | GE33436-008A | SIDE COVER ASSY | | R807EE |
| | 41 | GE10252-002A | REAR COVER | | |
| | 42 | VKZ4777-010 | MINI SCREW | (x4) | |
| | 43 | GE33591-001A | LCD LENS | | |
| | 44 | GE33432-001A | LENS CASE | | |
| | 45 | GE33431-001A | LCD CASE | | |
| | 46 | GE40464-001A | LIGHTING SHEET | | |
| | 47 | GE40465-001A | LIGHTING SHT RW | | |
| | 48 | GE33602-001A | NAME PLATE | | A805J |

| ⚠ | Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|---|
| | 48 | GE33605-001A | NAME PLATE | | R800J |
| | 48 | GE33611-001A | NAME PLATE | | R801E,R801EX,R801EY,R801EU |
| | 48 | GE33608-001A | NAME PLATE | | R805U,R805UT |
| | 48 | GE33614-001A | NAME PLATE | | R807EE |
| | 49 | GE40442-001A | FCC RULE LABEL | | A805J,R800J |
| | 50 | QLD0584-001 | LCD MODULE | | |
| | 51 | QAM1077-002 | USB CABLE | | |
| | 52 | QAM1002-001 | MIC CABLE | | |
| ⚠ | 53 | QMFZ064-150-J1 | FUSE | 15A CN901 | |
| | 54 | GE40396-002A | REG BRACKET | IC901 | |
| | 55 | GE40354-001A | IC BRACKET | IC301 | |
| | 56 | GE31574-0A7A | UT LABEL | | R805UT |

# CD mechanism assembly and parts list

TN2007-1026

Block No. M B M M

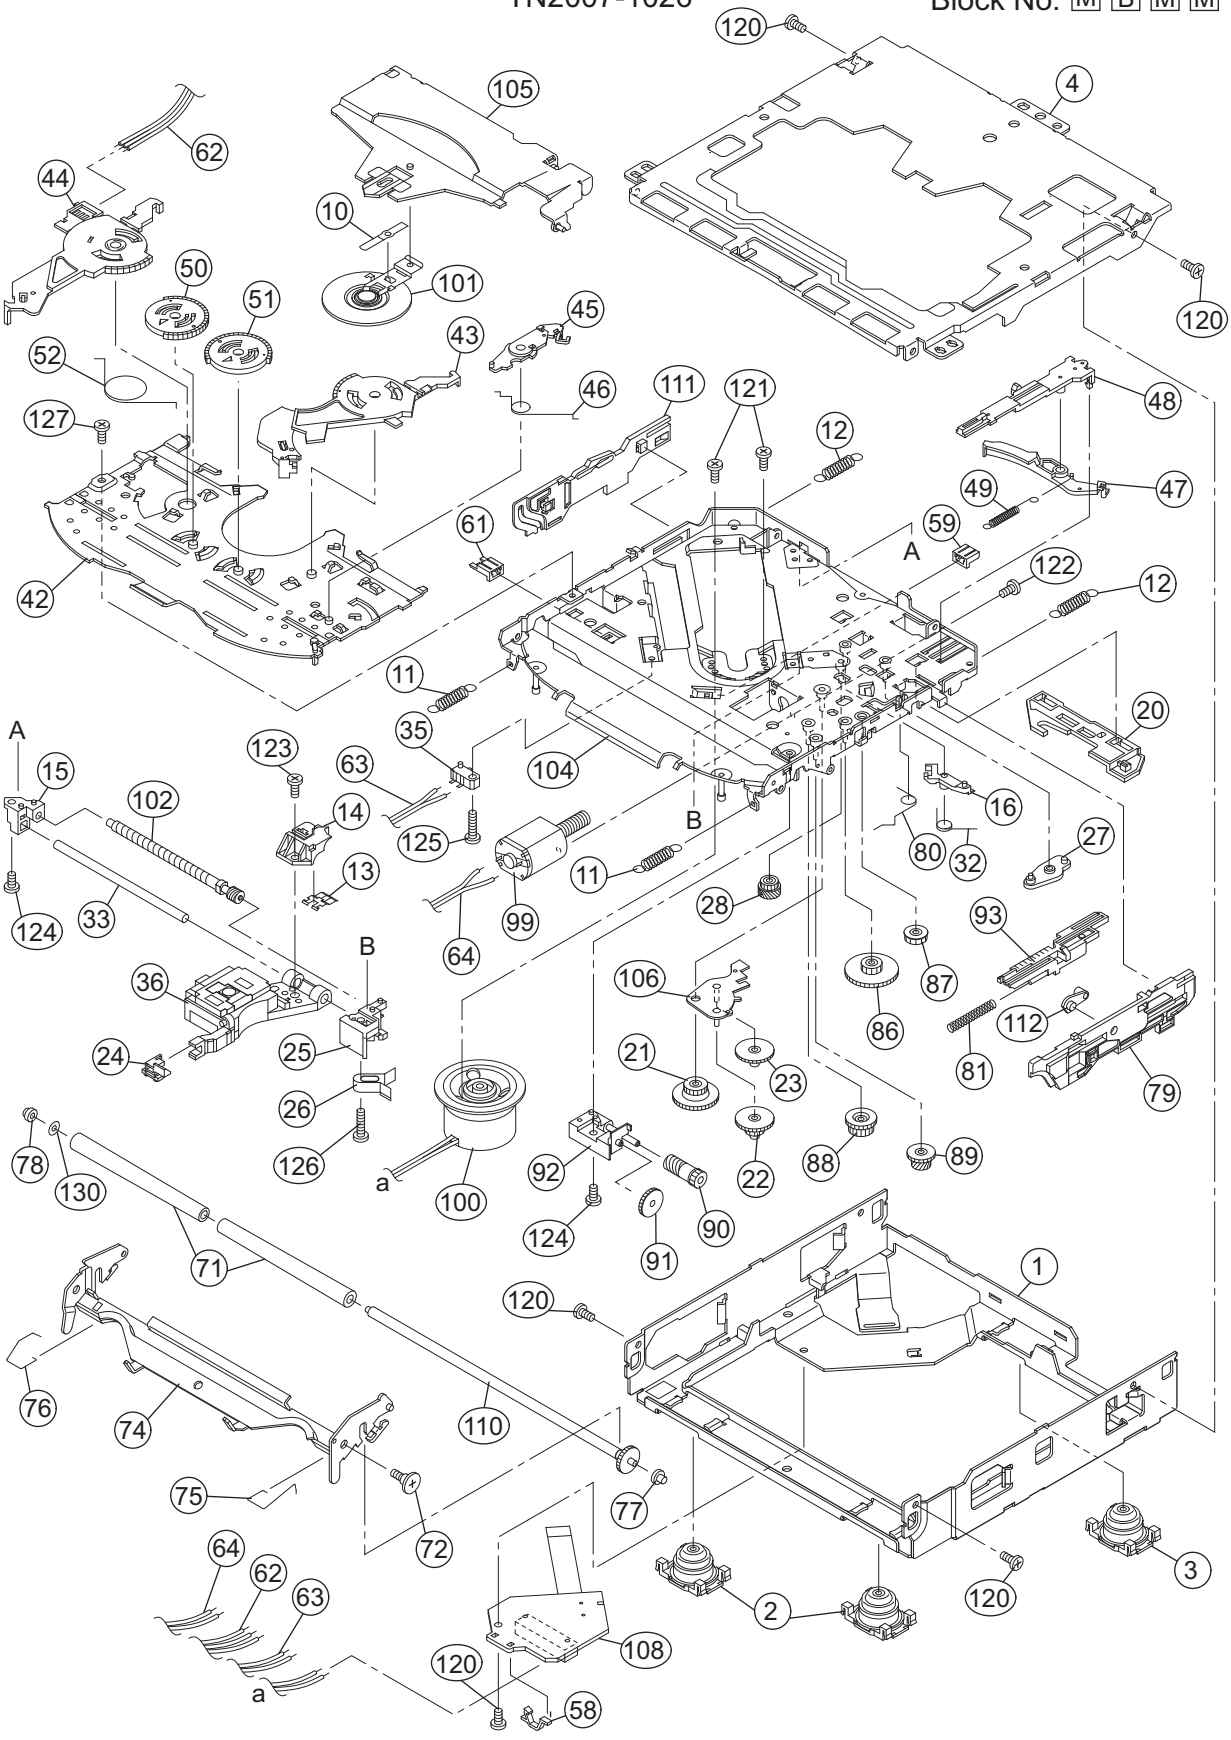

# CD mechanism

Block No. [M][B][M][M]

| ⚠ | Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|---|
| | 1 | 30350101T | FRAME | | |
| | 2 | 30350103T | DAMPER F | (x2) | |
| | 3 | 30350104T | DAMPER R | | |
| | 4 | 30350107T | TOP COVER | | |
| | 10 | 30320513T | CLAMPER SUB SPG | | |
| | 11 | 30350505T | FRONT SUS SPG | (x2) | |
| | 12 | 30350506T | REAR SUS SPRING | (x2) | |
| | 13 | 30350508T | FEED NUT SPP | | |
| | 14 | 30350509T | FEED SCREW HLDR | | |
| | 15 | 30350525T | PU SHAFT HLDR B | | |
| | 16 | 30350528T | LOCK LEVER | | |
| | 20 | 30350529T | LOCK PLATE | | |
| | 21 | 30350581T | CHANGE GEAR2 | | |
| | 22 | 30350582T | CHANGE GEAR 3A | | |
| | 23 | 30350583T | CHANGE GEAR 3B | | |
| | 24 | 30350535T | FEED SUB HOLDER | | |
| | 25 | 30350536T | PU SHAFT HLDR A | | |
| | 26 | 30350539T | FD THRUST SPP | | |
| | 27 | 30350542T | CHANGE ARM | | |
| | 28 | 30350580T | FEED GEAR 1 | | |
| | 32 | 30350554T | LOCK LEVER SP | | |
| | 33 | 30350555T | PU SHAFT | | |
| | 35 | 64010418T | PUSH SW P389-01 | | |
| | 36 | 69011629T | PICK UP | OPTIMA-727AD | |
| | 42 | 30350801T | TOP PLATE | | |
| | 43 | 30350802T | SELECT ARM R | | |
| | 44 | 30350803T | MODE SWICH | | |
| | 45 | 30350806T | SELECT LOCK ARM | | |
| | 46 | 30350807T | SPRING | | |
| | 47 | 30350808T | TRIGGER ARM | | |
| | 48 | 30350809T | TRG ARM BASE | | |
| | 49 | 30350810T | TRIGGER ARM SPR | | |
| | 50 | 30350811T | LINK GEAR L | | |
| | 51 | 30350812T | LINK GEAR R | | |
| | 52 | 30350813T | LINK GEAR SPR | | |
| | 58 | 19501403T | WIRE CLUMPER | | |
| | 59 | 30321013T | WIRE CLAMPER | | |
| | 61 | 30351001T | WIRE CLAMPER | | |
| | 62 | 30351008T | MODE SW WIRE | | |
| | 63 | 30351003T | REST SW WIRE | | |
| | 64 | 30351004T | LD WIRE | | |
| | 71 | 30321137T | LDG ROLLER | (x2) | |
| | 72 | 30321143T | COLLAR SCREW | | |
| | 74 | 30351101T | LOCK ARM | | |
| | 75 | 30351102T | LD ROLLER SPR R | | |
| | 76 | 30351103T | LD ROLLER SPR L | | |
| | 77 | 30351105T | ROLLER GUIDE R | | |
| | 78 | 30351106T | ROLLER GUIDE L | | |
| | 79 | 30351116T | CAM PLATE R (N) | | |
| | 80 | 30351111T | TR CONTROL SPR | | |
| | 81 | 30351113T | SPRING | | |
| | 86 | 30351122T | LOADING GEAR 1 | | |
| | 87 | 30351123T | LOADING GEAR 2 | | |
| | 88 | 30351128T | LOADING GEAR 3 | | |
| | 89 | 30351129T | LOADING GEAR 4 | | |
| | 90 | 30351140T | LOADING GEAR 5 | | |
| | 91 | 30351131T | LOADING GEAR 6 | | |
| | 92 | 30351133T | LD GEAR BRACKET | | |
| | 93 | 30351135T | PLATE | | |
| | 99 | 303505309T | MORTER ASSY | | |
| | 100 | 303505302T | SPINDLE MOTOR | | |
| | 101 | 303505303T | CLAMPER ASSY | | |
| | 102 | 303505304T | FEED SCREW ASSY | | |
| | 104 | 303505501T | CHASSIS RIVET | | |
| | 105 | 303505502T | CLAMPER ARM RVT | | |
| | 106 | 303505503T | RIVET ASSY | | |
| | 108 | 303510304T | BASE BOARD ASSY | | |
| | 110 | 303511301T | ROLLER SHAFT | | |
| | 111 | 303511302T | CAM PLATE L | | |
| | 112 | 303511501T | SLIDE HOOK RVT | | |
| | 120 | 9P0420037T | SCREW | (x5) | |
| | 121 | 9C0117187T | SCREW | (x2) | |
| | 122 | 9C0120207T | SCREW | | |
| | 123 | 9C4517506T | SCREW | | |

| ⚠ | Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|---|
| | 124 | 9P0420047T | SCREW | (x2) | |
| | 125 | 9P0420067T | SCREW | | |
| | 126 | 9P0420087T | SCREW | | |
| | 127 | 9C0420257T | SCREW | | |
| | 130 | 9W0513060T | HL WASHER | | |

# Grease point 1/2

grease

★ TNG-87
● TN-4456
▲ TNS-925R
※ GP-501MK

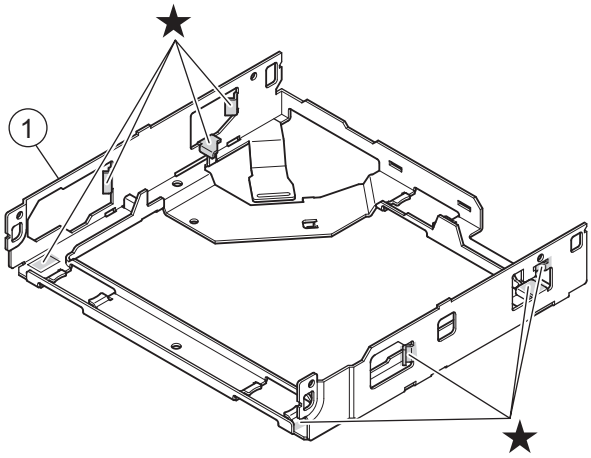


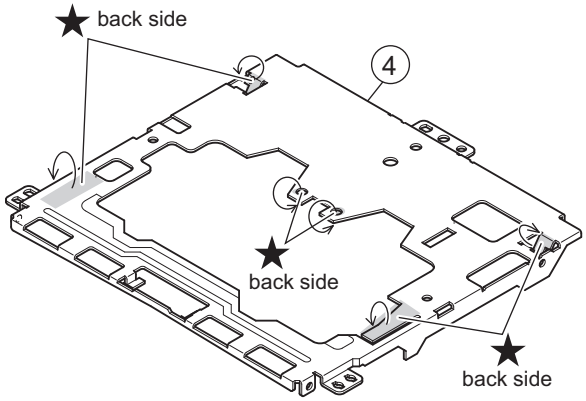


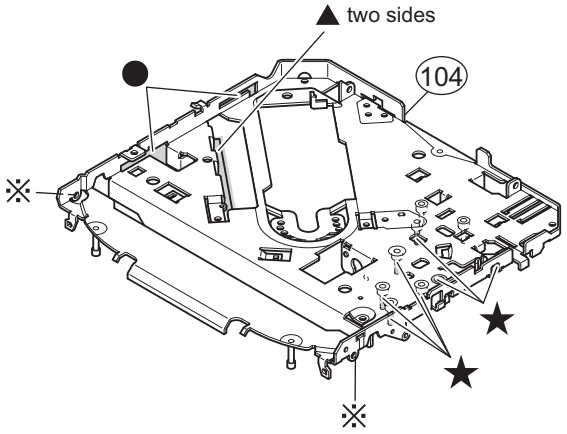





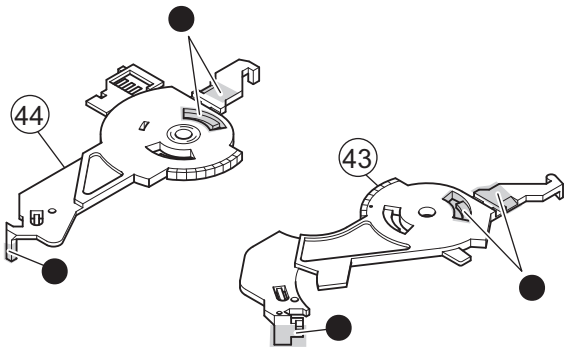


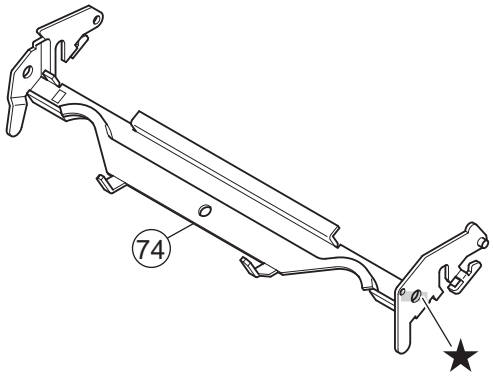

# Grease point 2/2

grease

- ★ TNG-87
- ● TN-4456
- ▲ TNS-925R
- ■ G-322

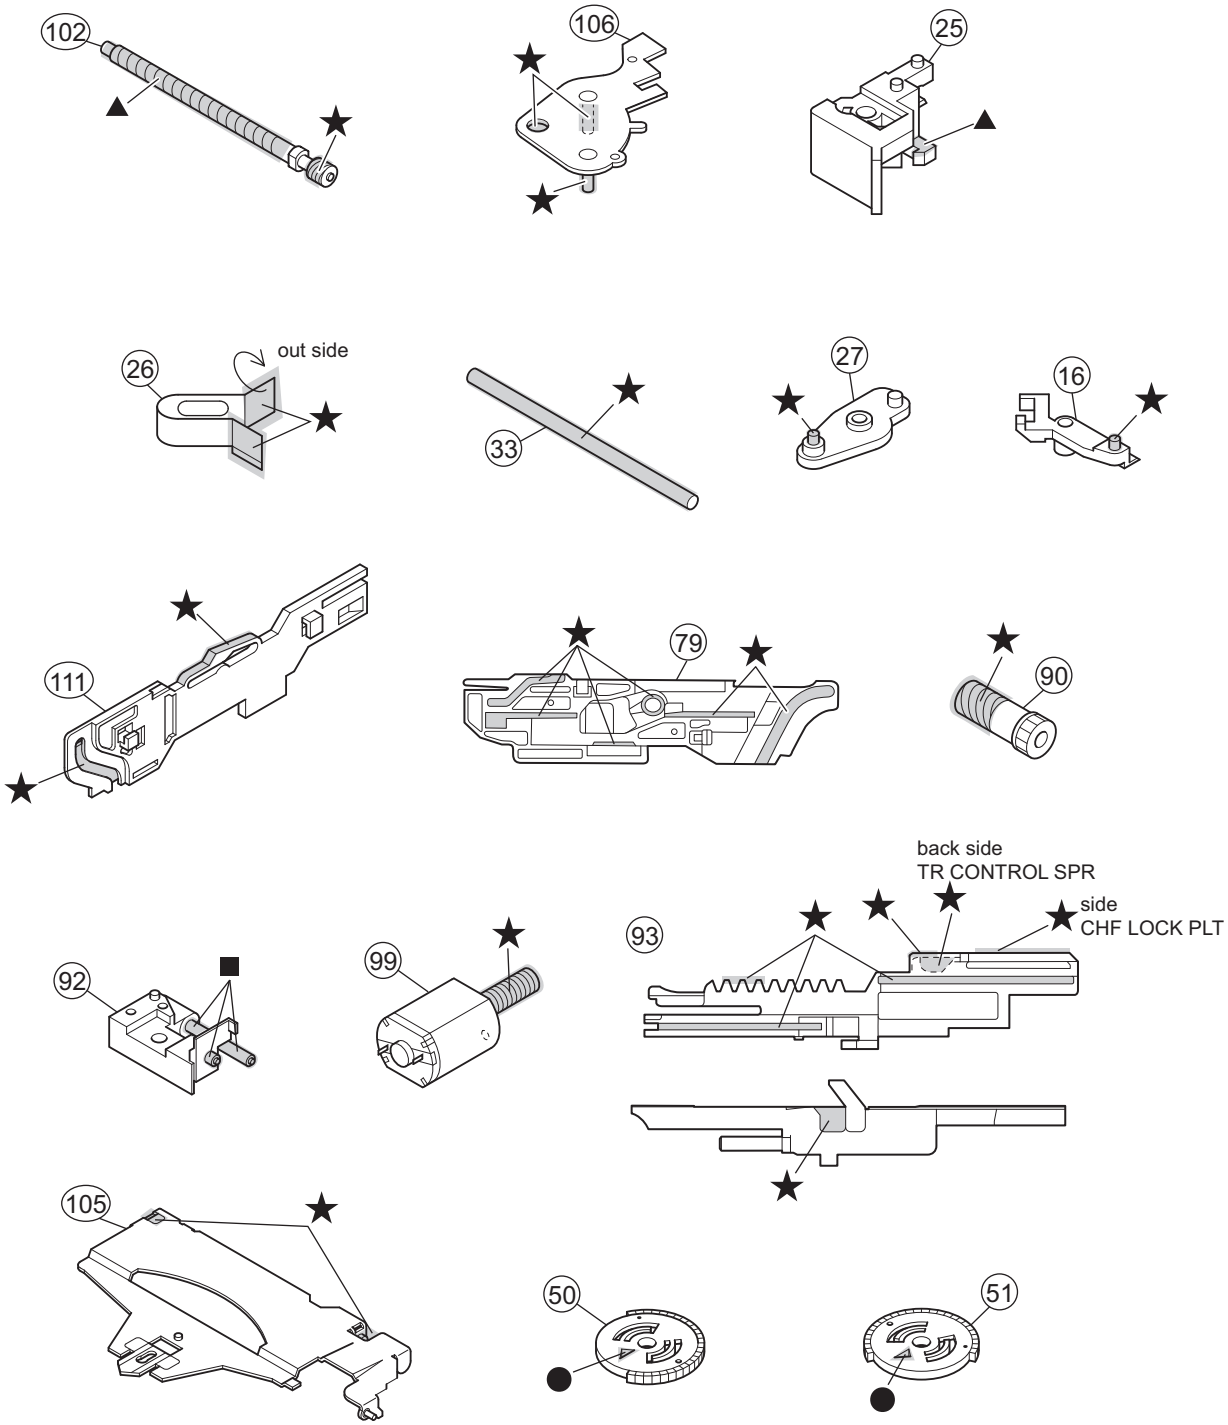

# Electrical parts list

## Main board

Block No. [0][1]

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| ⚠ IC1 | TEF6606T/V3-X | IC1 | | |
| IC71 | LC72725KM-X | IC | | R801E, R801EX, R801EY, R801EU, R807EE |
| IC161 | NJW1222V-X | IC | | |
| IC201 | NJM4565E-X | IC | | |
| IC271 | NJM2160BV-X | IC | | A805J |
| ⚠ IC301 | TDA7851A | IC | | |
| IC361 | NJM2792V-X | IC | | A805J |
| ⚠ IC401 | TCC8600 | IC | | |
| IC402 | M24256-BWMN6-X | IC(EEPROM) | | |
| IC441 | FSDG3080D006ABS | IC (PROGRAMED) | | A805J |
| IC441 | FSDG3081D006ABS | IC (PROGRAMED) | | R800J |
| IC441 | FSDG3083D105ABS | IC (PROGRAMED) | | R801E, R801EX, R801EY, R801EU |
| IC441 | FSDG3082D007ABS | IC (PROGRAMED) | | R805U |
| IC441 | FSDG3082D010ABS | IC (PROGRAMED) | | R805UT |
| IC441 | FSDG3084D027ABS | IC (PROGRAMED) | | R807EE |
| IC442 | V54C3128164VCI7 | IC | | |
| IC481 | MFI341S2162-X | IC | | |
| IC491 | TPS2052BD-X | IC | | |
| IC492 | NJM2878F4-21-X | IC | | |
| IC501 | MN6627551CB | IC | | |
| IC503 | PCM1780-X | IC | | |
| IC504 | 74LVC1G3157GW-X | IC | | |
| IC505 | 74LVC1G34GW-X | IC | | R801E, R801EX, R801EY, R801EU, R805U, R807EE |
| IC541 | LA6242H-X | IC | | |
| IC580 | NJM4580E-X | IC | | |
| ⚠ IC701 | JES1501 | IC(PROGRAMED) | | A805J, R800J, R805U, R805UT |
| ⚠ IC701 | JES1511 | IC(PROGRAMED) | | R801E, R801EX, R801EY, R801EU, R807EE |
| IC771 | LE24C162M-TLM-X | IC | | R801E, R801EX, R801EY, R801EU, R807EE |
| IC801 | 74AHCT126PW-X | IC | | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| ⚠ IC901 | AN34002A | REGULATOR IC | | |
| IC932 | NJM2878F4-33-X | IC | | |
| IC941 | LV5749V-X | IC | | |
| Q251 | KTD1304-X | TRANSISTOR | | |
| Q252 | RT1P141C-X | DIGI TRANSISTOR | | |
| Q252 or | UN2111-X | TRANSISTOR | | |
| Q322 | IMX9-W | PAIR TRANSISTOR | | |
| Q332 | IMX9-W | PAIR TRANSISTOR | | |
| Q501 | 2SA1530A/QR/-X | TRANSISTOR | | |
| Q541 | 2SA1705/ST/-T | TRANSISTOR | | |
| Q701 | 2SC3928A/QR/-X | TRANSISTOR | | |
| Q701 or | 2SC5845-X | TRANSISTOR | | |
| Q701 or | KTC3875/YG/-X | TRANSISTOR | | |
| Q704 | ISA1530AC1/QR/X | TRANSISTOR | | |
| Q704 or | 2SA2077-X | TRANSISTOR | | |
| Q781 | RT1P141C-X | DIGI TRANSISTOR | | |
| Q781 or | UN2111-X | TRANSISTOR | | |
| Q782 | KTD1304-X | TRANSISTOR | | |
| Q784 | RT1P141C-X | DIGI TRANSISTOR | | |
| Q784 or | UN2111-X | TRANSISTOR | | |
| Q841 | RT1N141C-X | DIGI TRANSISTOR | | |
| Q841 or | UN2211-X | TRANSISTOR | | |
| Q881 | RT1N141C-X | DIGI TRANSISTOR | | |
| Q881 or | UN2211-X | TRANSISTOR | | |
| Q941 | MCH6406-W | MOS TRANSISTOR | | |
| Q942 | MCH6406-W | MOS TRANSISTOR | | |
| Q976 | RT1N141C-X | DIGI TRANSISTOR | | |
| Q976 or | UN2211-X | TRANSISTOR | | |
| Q977 | ISA1530AC1/QR/X | TRANSISTOR | | |
| Q977 or | 2SA2077-X | TRANSISTOR | | |
| D1 | MA111-X | SI DIODE | | |
| D1 or | 1SS355W-X | DIODE | | |
| D2 | MA111-X | SI DIODE | | |
| D2 or | 1SS355W-X | DIODE | | |
| D251 | MA111-X | SI DIODE | | |
| D251 or | 1SS355W-X | DIODE | | |
| D252 | MA111-X | SI DIODE | | |
| D252 or | 1SS355W-X | DIODE | | |
| D253 | MA111-X | SI DIODE | | |
| D253 or | 1SS355W-X | DIODE | | |
| D321 | MA111-X | SI DIODE | | |
| D321 or | 1SS355W-X | DIODE | | |
| D331 | MA111-X | SI DIODE | | |
| D331 or | 1SS355W-X | DIODE | | |
| D341 | MA111-X | SI DIODE | | |
| D341 or | 1SS355W-X | DIODE | | |
| D351 | MA111-X | SI DIODE | | |
| D351 or | 1SS355W-X | DIODE | | |
| D411 | MA8033-X | Z DIODE | | |
| D411 or | UDZW3.3B-X | Z DIODE | | |
| D475 | NAF0029-001X | DIODE | | |
| D476 | NAF0029-001X | DIODE | | |
| D477 | NAF0029-001X | DIODE | | |
| D478 | NAF0029-001X | DIODE | | |
| D501 | GS1J-LTP-X | DIODE | | |
| D701 | MA8062/M/-X | Z DIODE | | |
| D701 or | UDZW6.2B-X | Z DIODE | | |
| D702 | MA8062/M/-X | Z DIODE | | |
| D702 or | UDZW6.2B-X | Z DIODE | | |
| D703 | MA8062/M/-X | Z DIODE | | |
| D703 or | UDZW6.2B-X | Z DIODE | | |
| D704 | MA8062/M/-X | Z DIODE | | |
| D704 or | UDZW6.2B-X | Z DIODE | | |
| D705 | MA8062/M/-X | Z DIODE | | |
| D705 or | UDZW6.2B-X | Z DIODE | | |
| D707 | MA8062/M/-X | Z DIODE | | |
| D707 or | UDZW6.2B-X | Z DIODE | | |
| D708 | MA8062/M/-X | Z DIODE | | |
| D708 or | UDZW6.2B-X | Z DIODE | | |
| D709 | MA8062/M/-X | Z DIODE | | |
| D709 or | UDZW6.2B-X | Z DIODE | | |
| D712 | MA8062/M/-X | Z DIODE | | A805J, R801E, R801EX, R801EY, R801EU |
| D712 or | UDZW6.2B-X | Z DIODE | | A805J, R801E, R801EX, R801EY, R801EU |
| D714 | MA8056/M/-X | Z DIODE | | |
| D714 or | UDZW5.6B-X | Z DIODE | | |
| D721 | MC2838-X | DIODE | | |
| D721 or | MA152WK-X | SI DIODE | | |
| D722 | MC2838-X | DIODE | | |
| D722 or | MA152WK-X | SI DIODE | | |
| D723 | MC2836-X | DIODE | | |
| D723 or | MA152WA-X | DIODE | | |
| D726 | MA8062/M/-X | Z DIODE | | |
| D726 or | UDZW6.2B-X | Z DIODE | | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| D727 | MA8062/M/-X | Z DIODE | | |
| D727 | or UDZW6.2B-X | Z DIODE | | |
| D728 | MA8062/M/-X | Z DIODE | | |
| D728 | or UDZW6.2B-X | Z DIODE | | |
| D729 | MA8062/M/-X | Z DIODE | | |
| D729 | or UDZW6.2B-X | Z DIODE | | |
| D781 | MA111-X | SI DIODE | | |
| D781 | or 1SS355W-X | DIODE | | |
| D782 | MA111-X | SI DIODE | | |
| D782 | or 1SS355W-X | DIODE | | |
| D784 | MA8110/M/-X | Z DIODE | | |
| D784 | or UDZW11B-X | Z DIODE | | |
| D785 | MA111-X | SI DIODE | | |
| D785 | or 1SS355W-X | DIODE | | |
| D851 | MA22F20-X | SB DIODE | | R805U, R805UT |
| D852 | MA22D23-X | SB DIODE | | R805U, R805UT |
| D852 | or CRS03-W | SB DIODE | | R805U, R805UT |
| D852 | or RB160M-30-X | SB DIODE | | R805U, R805UT |
| D901 | 1N5401-F64 | SI DIODE | | |
| D901 | or 1N5401-TU-15 | SI DIODE | | |
| D903 | GS1J-LTP-X | DIODE | | R801E, R801EX, R801EY, R801EU |
| D941 | MA22D23-X | SB DIODE | | |
| D941 | or CRS03-W | SB DIODE | | |
| D941 | or RB160M-30-X | SB DIODE | | |
| D971 | MA22F20-X | SB DIODE | | |
| D972 | MA22D39-X | SB DIODE | | |
| D5001 | MA8051/M/-X | Z DIODE | | |
| D5001 | or UDZW5.1B-X | SB DIODE | | |
| C1 | NDC31HJ-102X | C CAPACITOR | 1000pF 50V J | |
| C2 | NDC31HJ-7R0X | C CAPACITOR | 7pF 50V J | |
| C3 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | |
| C4 | NCB31AK-224X | C CAPACITOR | 0.22uF 10V K | |
| C5 | NDC31HJ-150X | C CAPACITOR | 15pF 50V J | |
| C6 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | |
| C10 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | |
| C11 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C12 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C13 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | |
| C14 | NCB31AK-224X | C CAPACITOR | 0.22uF 10V K | |
| C15 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C16 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C17 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C18 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C19 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C22 | NDCA1HJ-150W | C CAPACITOR | 15pF 50V J | |
| C23 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C24 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C25 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C26 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | |
| C30 | QEKJ1AM-227Z | E CAPACITOR | 220uF 10V M | |
| C31 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C33 | NDC31HJ-5R6X | C CAPACITOR | 5.6pF 50V J | |
| C71 | NDCA1HJ-561W | C CAPACITOR | 560pF 50V J | R801E, R801EX, R801EY, R801EU, R807EE |
| C72 | NCBA1CK-223W | C CAPACITOR | 0.022uF 16V K | R801E, R801EX, R801EY, R801EU, R807EE |
| C73 | QEKJ1HM-225Z | E CAPACITOR | 2.2uF 50V M | R801E, R801EX, R801EY, R801EU, R807EE |
| C74 | NDCA1HJ-330W | C CAPACITOR | 33pF 50V J | R801E, R801EX, R801EY, R801EU, R807EE |
| C75 | NDCA1HJ-330W | C CAPACITOR | 33pF 50V J | R801E, R801EX, R801EY, R801EU, R807EE |
| C76 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | R801E, R801EX, R801EY, R801EU, R807EE |
| C77 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | R801E, R801EX, R801EY, R801EU, R807EE |
| C78 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | R801E, R801EX, R801EY, R801EU, R807EE |
| C161 | QTE1H57-105Z | E CAPACITOR | 1uF 50V | |
| C162 | QTE1H64-225Z | E CAPACITOR | 2.2uF 50V | |
| C163 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C165 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C166 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C168 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C169 | NCBA1HK-332W | C CAPACITOR | 3300pF 50V K | |
| C171 | QTE1H57-105Z | E CAPACITOR | 1uF 50V | |
| C172 | QTE1H64-225Z | E CAPACITOR | 2.2uF 50V | |
| C173 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C175 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C179 | NCBA1HK-332W | C CAPACITOR | 3300pF 50V K | |
| C180 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C181 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C182 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C183 | NCB31AK-104X | C CAPACITOR | 0.1uF 10V K | |
| C185 | QTE1C57-476Z | E CAPACITOR | 47uF 16V | |
| C186 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | |
| C187 | NCB31EK-472X | C CAPACITOR | 4700pF 25V K | |
| C188 | QTE1A57-107Z | E CAPACITOR | 100uF 10V | |
| C191 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | |
| C202 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C231 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C232 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C233 | NDCA1HJ-681W | C CAPACITOR | 680pF 50V J | |
| C234 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C236 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | |
| C238 | NDCA1HJ-681W | C CAPACITOR | 680pF 50V J | |
| C239 | NCBA1AK-333W | C CAPACITOR | 0.033uF 10V K | |
| C240 | NCBA1AK-273W | C CAPACITOR | 0.027uF 10V K | |
| C241 | NCBA1AK-273W | C CAPACITOR | 0.027uF 10V K | |
| C242 | NDCA1HJ-220W | C CAPACITOR | 22pF 50V J | |
| C243 | NCBA1AK-333W | C CAPACITOR | 0.033uF 10V K | |
| C244 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | |
| C245 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C251 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | |
| C252 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | |
| C253 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C254 | NCB21AK-225X | C CAPACITOR | 2.2uF 10V K | |
| C271 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | A805J |
| C272 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | A805J |
| C273 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | A805J |
| C274 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | A805J |
| C275 | NCBA1HK-152W | C CAPACITOR | 1500pF 50V K | A805J |
| C301 | QFV91HJ-474Z | MF CAPACITOR | 0.47uF 50V J | |
| C302 | QFV91HJ-474Z | MF CAPACITOR | 0.47uF 50V J | |
| C306 | NEAF1EM-475X | E CAPACITOR | 4.7uF 25V M | |
| C310 | NDC31HJ-820X | C CAPACITOR | 82pF 50V J | |
| C311 | QFV91HJ-474Z | MF CAPACITOR | 0.47uF 50V J | |
| C312 | QFV91HJ-474Z | MF CAPACITOR | 0.47uF 50V J | |
| C315 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C316 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C317 | QTE1C57-476Z | E CAPACITOR | 47uF 16V | |
| C318 | NEAF1EM-475X | E CAPACITOR | 4.7uF 25V M | |
| C319 | NCB31EK-223X | C CAPACITOR | 0.022uF 25V K | |
| C320 | NCB31EK-223X | C CAPACITOR | 0.022uF 25V K | |
| C321 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C322 | NCBA1EK-472W | C CAPACITOR | 4700pF 25V K | |
| C323 | NCBA1EK-472W | C CAPACITOR | 4700pF 25V K | |
| C324 | NCBA1EK-472W | C CAPACITOR | 4700pF 25V K | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| C325 | NCBA1EK-472W | C CAPACITOR | 4700pF 25V K | |
| C327 | NDC31HJ-820X | C CAPACITOR | 82pF 50V J | |
| C330 | NCB31EK-103X | C CAPACITOR | 0.01uF 25V K | |
| C331 | NCB31EK-103X | C CAPACITOR | 0.01uF 25V K | |
| C361 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | A805J |
| C362 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | A805J |
| C365 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C366 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C367 | QEKJ1AM-227Z | E CAPACITOR | 220uF 10V M | A805J |
| C368 | QEKJ1AM-227Z | E CAPACITOR | 220uF 10V M | A805J |
| C369 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | A805J |
| C370 | NCBA1HK-152W | C CAPACITOR | 1500pF 50V K | A805J |
| C371 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | A805J |
| C372 | NCBA1HK-152W | C CAPACITOR | 1500pF 50V K | A805J |
| C381 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | A805J |
| C382 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | A805J |
| C385 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C386 | QEKJ1HM-475Z | E CAPACITOR | 4.7uF 50V M | |
| C387 | QEKJ1AM-227Z | E CAPACITOR | 220uF 10V M | |
| C388 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C402 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C403 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C404 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C405 | NCBA1HK-122W | C CAPACITOR | 1200pF 50V K | |
| C406 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C407 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | |
| C408 | NDC31HJ-330X | C CAPACITOR | 33pF 50V J | |
| C409 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C410 | NDCA1HJ-331W | C CAPACITOR | 330pF 50V J | |
| C411 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C412 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C413 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C414 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C415 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C416 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C417 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C418 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C419 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C420 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C421 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C422 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C424 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | |
| C437 | NCBA1AK-273W | C CAPACITOR | 0.027uF 10V K | |
| C440 | NCB31AK-154X | C CAPACITOR | 0.15uF 10V K | |
| C441 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C442 | NBE20JM-226X | TA E CAPACITOR | 22uF 6.3V M | |
| C443 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C444 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C445 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C446 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C447 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C448 | NBE20JM-226X | TA E CAPACITOR | 22uF 6.3V M | |
| C449 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C450 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C481 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C491 | NBE21CM-475X | TA E CAPACITOR | 4.7uF 16V M | |
| C492 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C493 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | |
| C495 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C497 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C501 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | |
| C502 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C503 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C504 | NCBA1HK-332W | C CAPACITOR | 3300pF 50V K | |
| C505 | NCBA1CK-223W | C CAPACITOR | 0.022uF 16V K | |
| C506 | NDCA1HJ-561W | C CAPACITOR | 560pF 50V J | |
| C507 | NDC31HJ-181X | C CAPACITOR | 180pF 50V J | |
| C508 | NCBA1CK-223W | C CAPACITOR | 0.022uF 16V K | |
| C509 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C510 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | |
| C512 | NCB31HK-822X | C CAPACITOR | 8200pF 50V K | |
| C513 | NCB31AK-334X | C CAPACITOR | 0.33uF 10V K | |
| C514 | NCBA1HK-332W | C CAPACITOR | 3300pF 50V K | |
| C515 | QEKJ0JM-107Z | E CAPACITOR | 100uF 6.3V M | |
| C516 | NDCA1HJ-820W | C CAPACITOR | 82pF 50V J | |
| C517 | NCB31AK-334X | C CAPACITOR | 0.33uF 10V K | |
| C518 | QEKJ0JM-227Z | E CAPACITOR | 220uF 6.3V M | |
| C519 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C520 | NDC31HJ-681X | C CAPACITOR | 680pF 50V J | |
| C521 | NCBA1CK-153W | C CAPACITOR | 0.015uF 16V K | |
| C522 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C523 | NCBA1HK-102W | C CAPACITOR | 1000pF 50V K | |
| C524 | NCBA1AK-823W | C CAPACITOR | 0.082uF 10V K | |
| C525 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C526 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C527 | NDCA1HJ-101W | C CAPACITOR | 100pF 50V J | |
| C528 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C529 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C530 | NCB31AK-334X | C CAPACITOR | 0.33uF 10V K | |
| C531 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C532 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | R801E, R801EX, R801EY, R801EU, R805U, R807EE |
| C541 | QEKJ1AM-227Z | E CAPACITOR | 220uF 10V M | |
| C542 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C543 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | |
| C544 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C545 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C546 | NCBA1CK-104W | C CAPACITOR | 0.1uF 16V K | |
| C547 | QEKJ0JM-227Z | E CAPACITOR | 220uF 6.3V M | |
| C548 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C549 | NCBA1HK-222W | C CAPACITOR | 2200pF 50V K | |
| C550 | NCBA1EK-682W | C CAPACITOR | 6800pF 25V K | |
| C551 | NCBA1HK-182W | C CAPACITOR | 1800pF 50V K | |
| C552 | NCBA1HK-122W | C CAPACITOR | 1200pF 50V K | |
| C553 | NCBA1CK-473W | C CAPACITOR | 0.047uF 16V K | |
| C554 | NCBA1CK-473W | C CAPACITOR | 0.047uF 16V K | |
| C556 | NCBA1CK-473W | C CAPACITOR | 0.047uF 16V K | |
| C557 | NCBA1CK-473W | C CAPACITOR | 0.047uF 16V K | |
| C558 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | |
| C559 | QEKJ0JM-476Z | E CAPACITOR | 47uF 6.3V M | |
| C580 | QTE1E57-475Z | E CAPACITOR | 4.7uF 25V | |
| C581 | NDCA1HJ-101W | C CAPACITOR | 100pF 50V J | |
| C582 | NDCA1HJ-151W | C CAPACITOR | 150pF 50V J | |
| C583 | QTE0J57-476Z | E CAPACITOR | 47uF 6.3V | |
| C584 | NCBA1HK-821W | C CAPACITOR | 820pF 50V K | |
| C590 | QTE1E57-475Z | E CAPACITOR | 4.7uF 25V | |
| C591 | NDCA1HJ-101W | C CAPACITOR | 100pF 50V J | |
| C592 | NDCA1HJ-151W | C CAPACITOR | 150pF 50V J | |
| C593 | QTE0J57-476Z | E CAPACITOR | 47uF 6.3V | |
| C594 | NCBA1HK-821W | C CAPACITOR | 820pF 50V K | |
| C596 | QTE1A57-107Z | E CAPACITOR | 100uF 10V | |
| C597 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C701 | NDCA1HJ-220W | C CAPACITOR | 22pF 50V J | |
| C702 | NDCA1HJ-270W | C CAPACITOR | 27pF 50V J | |
| C705 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C706 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C707 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C708 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C709 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C711 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | |
| C713 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C714 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C716 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C717 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C718 | NDCA1HJ-101W | C CAPACITOR | 100pF 50V J | A805J, R801E, R801EX, R801EY, R801EU |
| C720 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C724 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C725 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | |
| C726 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | |
| C732 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | |
| C771 | NCBA1AK-473W | C CAPACITOR | 0.047uF 10V K | R801E, R801EX, R801EY, R801EU, R807EE |
| C781 | QEKJ0JM-107Z | E CAPACITOR | 100uF 6.3V M | |
| C782 | NCBA1AK-823W | C CAPACITOR | 0.082uF 10V K | |
| C783 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C784 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| C801 | NCBA1CK-473W | C CAPACITOR | 0.047uF 16V K | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| C841 | QEKJ1HM-105Z | E CAPACITOR | 1uF 50V M | |
| C851 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | R805U, R805UT |
| C852 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | R805U, R805UT |
| C881 | NEAF1CM-226X | E CAPACITOR | 22uF 16V M | |
| C901 | QEZ0870-278 | E CAPACITOR | 2700uF | |
| C902 | QEKJ1HM-225Z | E CAPACITOR | 2.2uF 50V M | |
| C903 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | |
| C904 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | |
| C905 | QEKJ1CM-476Z | E CAPACITOR | 47uF 16V M | |
| C906 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C907 | QEKJ1AM-227Z | E CAPACITOR | 220uF 10V M | |
| C908 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | |
| C909 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | |
| C910 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | |
| C911 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | |
| C912 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C913 | QEKJ1CM-106Z | E CAPACITOR | 10uF 16V M | |
| C914 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | |
| C915 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | |
| C916 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C918 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C921 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | |
| C922 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | |
| C924 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | |
| C929 | NCBA1CK-103W | C CAPACITOR | 0.01uF 16V K | |
| C932 | QEKJ0JM-107Z | E CAPACITOR | 100uF 6.3V M | |
| C940 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | |
| C941 | NCJ11EK-106X-A | C CAPACITOR | 10uF 25V K | |
| C942 | NCJ11EK-106X-A | C CAPACITOR | 10uF 25V K | |
| C943 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | |
| C944 | NCBA1HK-102W | C CAPACITOR | 1000pF 50V K | |
| C945 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | |
| C946 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C947 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C948 | NDC31HJ-681X | C CAPACITOR | 680pF 50V J | |
| C949 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | |
| C971 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | |
| C992 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | |
| C993 | NDC31HJ-220X | C CAPACITOR | 22pF 50V J | |
| C5004 | QTE0J57-107Z | E CAPACITOR | 100uF 6.3V | |
| C5005 | NCBA1AK-104W | C CAPACITOR | 0.1uF 10V K | |
| C5006 | NCBA1CK-123W | C CAPACITOR | 0.012uF 16V K | |
| C5007 | QTE0J57-476Z | E CAPACITOR | 47uF 6.3V | |
| R1 | NRSA63J-474X | MG RESISTOR | 470kΩ 1/16W J | |
| R2 | NRSA63J-474X | MG RESISTOR | 470kΩ 1/16W J | |
| R3 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | |
| R4 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R5 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| R6 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R7 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R8 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| R11 | NRS181J-4R7X | MG RESISTOR | 4.7Ω 1/8W J | |
| R14 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R15 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R71 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R72 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R73 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R74 | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R81 | NRSA6AJ-752W | MG RESISTOR | 7.5kΩ 1/16W J | A805J, R800J |
| R81 | NRSA6AJ-682W | MG RESISTOR | 6.8kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R82 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | A805J, R800J |
| R82 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R91 | NRSA6AJ-752W | MG RESISTOR | 7.5kΩ 1/16W J | A805J, R800J |
| R91 | NRSA6AJ-682W | MG RESISTOR | 6.8kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R92 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | A805J, R800J |
| R92 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R164 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | |
| R165 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | |
| R166 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | |
| R167 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | |
| R168 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | |
| R173 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R175 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R176 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R202 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R230 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | |
| R231 | NRSA6AJ-122W | MG RESISTOR | 1.2kΩ 1/16W J | |
| R232 | NRSA6AJ-122W | MG RESISTOR | 1.2kΩ 1/16W J | |
| R233 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R234 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | |
| R235 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | |
| R237 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R238 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R239 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R240 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | |
| R241 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R242 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R243 | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J | |
| R260 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | |
| R261 | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J | |
| R262 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R263 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R264 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R271 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | A805J |
| R272 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | A805J |
| R301 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R302 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R305 | NRSA6AJ-273W | MG RESISTOR | 27kΩ 1/16W J | |
| R307 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R308 | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J | A805J |
| R311 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| R312 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R321 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R322 | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J | |
| R323 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R331 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R332 | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J | |
| R333 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R341 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R342 | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J | |
| R343 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R351 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R352 | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J | |
| R353 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R361 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | A805J |
| R362 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | A805J |
| R363 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R365 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | A805J |
| R366 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | A805J |
| R367 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R371 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R372 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R373 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R374 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| R381 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | A805J |
| R382 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | A805J |
| R383 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R385 | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J | A805J |
| R386 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | A805J |
| R387 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R403 | NRSA6AJ-680W | MG RESISTOR | 68Ω 1/16W J | |
| R404 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R405 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R406 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R407 | NRSA6AJ-680W | MG RESISTOR | 68Ω 1/16W J | |
| R408 | NRSA6AJ-680W | MG RESISTOR | 68Ω 1/16W J | |
| R409 | NRSA6AJ-680W | MG RESISTOR | 68Ω 1/16W J | |
| R410 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R411 | NRSA6AJ-152W | MG RESISTOR | 1.5kΩ 1/16W J | |
| R412 | NRSA6AJ-105W | MG RESISTOR | 1MΩ 1/16W J | |
| R413 | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J | |
| R414 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | |
| R416 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R417 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R418 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R419 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | |
| R420 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | |
| R421 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R426 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R427 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R428 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R434 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| R435 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R436 | NRSA6AJ-470W | MG RESISTOR | 47Ω 1/16W J | |
| R437 | NRSA6AJ-470W | MG RESISTOR | 47Ω 1/16W J | |
| R439 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | |
| R441 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R446 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R447 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R448 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R452 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R453 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R470 | NRSA6AJ-202W | MG RESISTOR | 2kΩ 1/16W J | |
| R471 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R472 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R473 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R474 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R475 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R476 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R477 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R478 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R479 | NRSA6AJ-202W | MG RESISTOR | 2kΩ 1/16W J | |
| R480 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R481 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R482 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R483 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R484 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R490 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | |
| R491 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | |
| R492 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | |
| R498 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | |
| R499 | NRSA6AJ-330W | MG RESISTOR | 33Ω 1/16W J | |
| R501 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R502 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | |
| R503 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R504 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R505 | NRSA6AJ-303W | MG RESISTOR | 30kΩ 1/16W J | |
| R506 | NRSA6AJ-393W | MG RESISTOR | 39kΩ 1/16W J | |
| R507 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R508 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R509 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R510 | NRSA6AJ-332W | MG RESISTOR | 3.3kΩ 1/16W J | |
| R511 | NRSA6AJ-332W | MG RESISTOR | 3.3kΩ 1/16W J | |
| R512 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R513 | NRSA63J-4R7X | MG RESISTOR | 4.7Ω 1/16W J | |
| R514 | NRSA6AJ-151W | MG RESISTOR | 150Ω 1/16W J | |
| R515 | NRSA6AJ-823W | MG RESISTOR | 82kΩ 1/16W J | |
| R516 | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J | |
| R517 | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J | |
| R518 | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J | |
| R519 | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J | |
| R520 | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J | |
| R521 | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J | |
| R522 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R523 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R524 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R526 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | A805J, R800J, R805UT |
| R541 | NRS181J-220X | MG RESISTOR | 22Ω 1/8W J | |
| R542 | NRS181J-220X | MG RESISTOR | 22Ω 1/8W J | |
| R543 | NRSA6AJ-512W | MG RESISTOR | 5.1kΩ 1/16W J | |
| R544 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | |
| R545 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R546 | NRSA6AJ-113W | MG RESISTOR | 11kΩ 1/16W J | |
| R547 | NRSA6AJ-562W | MG RESISTOR | 5.6kΩ 1/16W J | |
| R548 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R549 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R551 | NRSA6AJ-562W | MG RESISTOR | 5.6kΩ 1/16W J | |
| R552 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R553 | NRSA6AJ-332W | MG RESISTOR | 3.3kΩ 1/16W J | |
| R554 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R555 | NRSA6AJ-562W | MG RESISTOR | 5.6kΩ 1/16W J | |
| R556 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R557 | NRSA6AJ-273W | MG RESISTOR | 27kΩ 1/16W J | |
| R558 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R560 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R561 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | |
| R562 | NRSA6AJ-203W | MG RESISTOR | 20kΩ 1/16W J | |
| R563 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R564 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R580 | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| R583 | NRSA6AJ-243W | MG RESISTOR | 24kΩ 1/16W J | |
| R585 | NRSA6AJ-273W | MG RESISTOR | 27kΩ 1/16W J | |
| R586 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | |
| R587 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R588 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R589 | NRSA6AJ-152W | MG RESISTOR | 1.5kΩ 1/16W J | |
| R593 | NRSA6AJ-243W | MG RESISTOR | 24kΩ 1/16W J | |
| R595 | NRSA6AJ-273W | MG RESISTOR | 27kΩ 1/16W J | |
| R596 | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | |
| R597 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R598 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R599 | NRSA6AJ-152W | MG RESISTOR | 1.5kΩ 1/16W J | |
| R701 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R702 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R706 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | A805J, R805U, R805UT |
| R706 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | R807EE |
| R707 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | A805J, R800J |
| R707 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | R801E, R801EX, R801EY, R801EU |
| R708 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R709 | NRSA6AJ-123W | MG RESISTOR | 12kΩ 1/16W J | |
| R714 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | |
| R715 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R717 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R718 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R719 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R720 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R721 | NRSA6AJ-202W | MG RESISTOR | 2kΩ 1/16W J | |
| R722 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | |
| R731 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R733 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R734 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | |
| R735 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | |
| R736 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | |
| R737 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R738 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R739 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R740 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R743 | NRSA6AJ-122W | MG RESISTOR | 1.2kΩ 1/16W J | |
| R744 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R745 | NRSA6AJ-202W | MG RESISTOR | 2kΩ 1/16W J | |
| R748 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R749 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R751 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R752 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R753 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R754 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R755 | NRSA6AJ-106W | MG RESISTOR | 10MΩ 1/16W J | |
| R756 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R758 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R759 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R760 | NRSA6AJ-393W | MG RESISTOR | 39kΩ 1/16W J | |
| R761 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R762 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R763 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R764 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R766 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | A805J, R801E, R801EX, R801EY, R801EU |
| R767 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | A805J, R801E, R801EX, R801EY, R801EU |
| R768 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R771 | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R772 | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R773 | NRSA6AJ-203W | MG RESISTOR | 20kΩ 1/16W J | R801E, R801EX, R801EY, R801EU, R807EE |
| R776 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R777 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R778 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R781 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R782 | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | |
| R783 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | |
| R788 | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J | |
| R791 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | |
| R792 | NRSA6AJ-474W | MG RESISTOR | 470kΩ 1/16W J | |
| R795 | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J | |
| R801 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R802 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R803 | NRSA6AJ-682W | MG RESISTOR | 6.8kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R804 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| R805 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R806 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R807 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R808 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R809 | NRSA6AJ-682W | MG RESISTOR | 6.8kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R810 | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R811 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R812 | NRSA6AJ-392W | MG RESISTOR | 3.9kΩ 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R814 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| R841 | NRSA6AJ-332W | MG RESISTOR | 3.3kΩ 1/16W J | |
| R851 | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J | R805U, R805UT |
| R881 | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J | |
| R882 | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | |
| R901 | QRE142J-102X | C RESISTOR | 1kΩ 1/4W J | |
| R902 | NRSA02J-912X | MG RESISTOR | 9.1kΩ 1/10W J | |
| R903 | NRSA02J-472X | MG RESISTOR | 4.7kΩ 1/10W J | |
| R924 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R933 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R934 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R940 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R941 | NRSA6AJ-123W | MG RESISTOR | 12kΩ 1/16W J | |
| R942 | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J | |
| R943 | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J | |
| R944 | NRSA6AD-103W | MG RESISTOR | 10kΩ 1/16W D | |
| R945 | NRSA6AD-152W | MG RESISTOR | 1.5kΩ 1/16W D | |
| R946 | NRSA6AJ-202W | MG RESISTOR | 2kΩ 1/16W J | |
| R947 | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J | |
| R948 | NRSA63J-244X | MG RESISTOR | 240kΩ 1/16W J | |
| R971 | NRS181J-222X | MG RESISTOR | 2.2kΩ 1/8W J | |
| R972 | NRS181J-222X | MG RESISTOR | 2.2kΩ 1/8W J | |
| R976 | NRSA02J-273X | MG RESISTOR | 27kΩ 1/10W J | |
| R977 | NRSA02J-123X | MG RESISTOR | 12kΩ 1/10W J | |
| R991 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R5001 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | |
| R5007 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R5008 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R5009 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| R5010 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R5011 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R5012 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R5013 | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J | |
| R5015 | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J | |
| RA401 | NRZ0065-472X | MG RESISTOR | 4.7kΩ | |
| RA405 | NRZ0034-680W | NET RESISTOR | 68Ω 1/32W J x4 | |
| RA406 | NRZ0034-680W | NET RESISTOR | 68Ω 1/32W J x4 | |
| RA407 | NRZ0034-680W | NET RESISTOR | 68Ω 1/32W J x4 | |
| L1 | NQL093K-R47X | COIL | 0.47uH K | |
| L2 | NQL093K-1R8X | COIL | 1.8uH K | |
| L3 | NQL093K-R22X | COIL | 0.22uH K | |
| L4 | QQR1813-001 | COIL | | |
| L5 | NQL114K-561X | P COIL | 560uH K | |
| L6 | NQL114K-561X | P COIL | 560uH K | |
| L7 | NQL79GM-4R7X | COIL | 4.7uH M | |
| L8 | NQL093K-4R7X | COIL | 4.7uH K | |
| L31 | NQL093K-R47X | COIL | 0.47uH K | |
| L401 | NQL79GM-330X | COIL | 33uH M | |
| L402 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| L403 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| L407 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| L408 | NRSA63J-470X | MG RESISTOR | 47Ω 1/16W J | |
| L436 | NQL093K-R12X | COIL | 0.12uH K | |
| L437 | NQL093K-R12X | COIL | 0.12uH K | |
| L438 | NQL093K-1R8X | COIL | 1.8uH K | |
| L472 | NQR0536-001X | CHOKE COIL | | |
| L501 | NQL79GM-4R7X | COIL | 4.7uH M | |
| L504 | NQL093K-1R8X | COIL | 1.8uH K | A805J, R800J, R805UT |
| L504 | NRSA63J-151X | MG RESISTOR | 150Ω 1/16W J | R801E, R801EX, R801EY, R801EU, R805U, R807EE |
| L701 | NQL79GM-4R7X | COIL | 4.7uH M | |
| L702 | NQL79GM-4R7X | COIL | 4.7uH M | |
| L703 | NQL79GM-470X | COIL | 47uH M | |
| L720 | NQR0007-002X | FERRITE BEADS | | |
| L721 | NQR0007-002X | FERRITE BEADS | | |
| L722 | NQR0007-002X | FERRITE BEADS | | |
| L901 | QQR1809-001 | CHOKE COIL | | |
| L932 | NQLE74M-100X | COIL | 10uH M | |
| L941 | NQL71EM-220X | COIL | 22uH M | |
| L5002 | NQL79GM-470X | COIL | 47uH M | |
| BZ841 | QAN0023-001Z | BUZZER | | |
| CN202 | QGA2001C1-02 | CONNECTOR | W-B (1-2) | |
| CN472 | QGA2001C1-05 | CONNECTOR | W-B (1-5) | |
| CN501 | QGB2027MD-22 | CONNECTOR | B-B (1-22) | |
| CN701 | QGZ1101J1-24 | CONNECTOR | (1-24) | |
| CN702 | QNS0283-001 | STEERING REMOTE | | A805J, R801E, R801EX, R801EY, R801EU |
| CN901 | QNZ0607-001 | CAR CONNECTOR | | |
| F971 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| J1 | QNB0190-001 | ANT TERMINAL | | |
| J321 | QNN0839-001 | PIN JACK | | A805J |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| J321 | QNN0837-001 | PIN JACK | | R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT, R807EE |
| J801 | QNZ0095-001 | CONNECTOR | | A805J, R800J, R801E, R801EX, R801EY, R801EU, R805U, R805UT |
| K441 | NQR0502-001X | FERRITE BEADS | | |
| PP1 | QZW0010-001 | STYLE PIN | | |
| PP2 | QZW0010-001 | STYLE PIN | | |
| PP3 | QZW0010-001 | STYLE PIN | | |
| PP4 | QZW0010-001 | STYLE PIN | | |
| S703 | QSW0648-001Z | TACT SWITCH | | |
| X11 | QAX0928-001Z | CRYSTAL | | |
| X71 | QAX0926-001Z | CRYSTAL | | R801E, R801EX, R801EY, R801EU, R807EE |
| X402 | NAX0975-001X | CRYSTAL | | |
| X501 | QAX0893-001Z | CRYSTAL | | |
| X701 | QAX0916-001Z | CRYSTAL | | |
| X702 | QAX0401-001 | CRYSTAL | 32.768KHz | |

# Switch board

Block No. [0][2]

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| IC601 | NCP5623DTBR2G-X | IC | | |
| IC602 | S-80824CNNB-G-W | IC | | |
| IC602 or | IC-PST3424U-X | IC | | |
| IC661 | JES1541 | IC(PROGRAMED) | | |
| IC681 | NJL29H380A | REMOCON RCV | | |
| Q601 | ISA1530AC1/QR/X | TRANSISTOR | | |
| Q601 or | 2SA2077-X | TRANSISTOR | | |
| Q602 | ISA1530AC1/QR/X | TRANSISTOR | | |
| Q602 or | 2SA2077-X | TRANSISTOR | | |
| Q603 | 2SC3928A/QR/-X | TRANSISTOR | | |
| Q603 or | 2SC5845-X | TRANSISTOR | | |
| Q604 | 2SA2174G-X | TRANSISTOR | | |
| Q605 | UN2222-X | IC | | |
| Q606 | 2SA2174G-X | TRANSISTOR | | |
| Q607 | UN2222-X | IC | | |
| Q608 | 2SA2174G-X | TRANSISTOR | | |
| Q609 | UN2222-X | IC | | |
| Q610 | UNR9211G-X | TRANSISTOR | | |
| D602 | NSSM065T-X | LED | | |
| D603 | NSSM065T-X | LED | | |
| D604 | LHQ974/LM/-X | LED | | |
| D605 | LHQ974/LM/-X | LED | | |
| D606 | LHQ974/LM/-X | LED | | |
| D608 | NSSM065T-X | LED | | |
| D609 | NSSM065T-X | LED | | |
| D618 | MA8056/M/-X | Z DIODE | | |
| D618 or | UDZW5.6B-X | Z DIODE | | |
| D624 | MA111-X | SI DIODE | | |
| D624 or | 1SS355W-X | DIODE | | |
| D625 | MA8051/M/-X | Z DIODE | | |
| D625 or | UDZW5.1B-X | SB DIODE | | |
| D626 | MA8051/M/-X | Z DIODE | | |
| D626 or | UDZW5.1B-X | SB DIODE | | |
| D630 | MC2838-X | DIODE | | |
| D630 or | MA152WK-X | SI DIODE | | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| C601 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | |
| C604 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | |
| C605 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | |
| C606 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | |
| C607 | NCB20JK-106X | C CAPACITOR | 10uF 6.3V K | |
| C612 | NBE21CM-106X | TA E CAPACITOR | 10uF 16V M | |
| C614 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | |
| C616 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C624 | NBE20JM-106X | TA E CAPACITOR | 10uF 6.3V M | |
| C630 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | |
| C631 | NCB20JK-475X | C CAPACITOR | 4.7uF 6.3V K | |
| C632 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C649 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C651 | NCB20JK-475X | C CAPACITOR | 4.7uF 6.3V K | |
| C653 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C654 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C655 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C656 | NCB11EM-105X | C CAPACITOR | 1uF 25V M | |
| C657 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C658 | NCB11EM-105X | C CAPACITOR | 1uF 25V M | |
| C659 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C660 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C661 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C662 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C663 | NCJ31CK-105X-A | C CAPACITOR | 1uF 16V K | |
| C664 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V K | |
| C682 | NCB31EK-104X | C CAPACITOR | 0.1uF 25V K | |
| C688 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | |
| R601 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R602 | NRSA63J-681X | MG RESISTOR | 680Ω 1/16W J | |
| R603 | NRSA63J-681X | MG RESISTOR | 680Ω 1/16W J | |
| R604 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | |
| R605 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | |
| R606 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R607 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | |
| R608 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | |
| R609 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | |
| R610 | NRSA63J-680X | MG RESISTOR | 68Ω 1/16W J | |
| R611 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R612 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | |
| R613 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R614 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R615 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | |
| R616 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R617 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R618 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | |
| R619 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | |
| R620 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | |
| R621 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | |
| R622 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | |
| R624 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R625 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R626 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R627 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | |
| R628 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R629 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R632 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R633 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R634 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | |
| R635 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | |
| R637 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R647 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | |
| R648 | NRSA63J-911X | MG RESISTOR | 910Ω 1/16W J | |
| R649 | NRSA63J-911X | MG RESISTOR | 910Ω 1/16W J | |
| R650 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | |
| R651 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | |
| R652 | NRSA63J-162X | MG RESISTOR | 1.6kΩ 1/16W J | |
| R653 | NRS181J-621X | MG RESISTOR | 620Ω 1/8W J | |
| R654 | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | |
| R655 | NRS181J-331X | MG RESISTOR | 330Ω 1/8W J | |
| R657 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | |
| R658 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | |
| R659 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | |
| R661 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | |
| R662 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | |
| R663 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | |
| R664 | NRSA63J-182X | MG RESISTOR | 1.8kΩ 1/16W J | |

| ⚠ Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|
| R665 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | |
| R666 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | |
| R667 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | |
| R668 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | |
| R669 | NRSA63J-122X | MG RESISTOR | 1.2kΩ 1/16W J | |
| R670 | NRSA63J-182X | MG RESISTOR | 1.8kΩ 1/16W J | |
| R671 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | |
| R673 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R677 | NRSA63J-681X | MG RESISTOR | 680Ω 1/16W J | |
| R680 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | |
| R681 | NRSA63J-392X | MG RESISTOR | 3.9kΩ 1/16W J | |
| R682 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | |
| R686 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | |
| R687 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | |
| R689 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | |
| R691 | NRSA63F-154X | MG RESISTOR | 150kΩ 1/16W F | |
| R692 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | |
| R693 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | |
| R694 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | |
| R695 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | |
| R696 | NRSA63J-474X | MG RESISTOR | 470kΩ 1/16W J | |
| R697 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | |
| RA601 | NRZ0065-472X | MG RESISTOR | 4.7kΩ | |
| RA602 | NRZ0065-472X | MG RESISTOR | 4.7kΩ | |
| RA603 | NRZ0065-472X | MG RESISTOR | 4.7kΩ | |
| RA604 | NRZ0065-331X | NET RESISTOR | 330Ω | |
| RA605 | NRZ0065-331X | NET RESISTOR | 330Ω | |
| L601 | NQL79GM-470X | COIL | 47uH M | |
| L602 | NQR0536-001X | CHOKE COIL | | |
| CJ601 | QGZ1101K1-24 | CONNECTOR | (1-24) | |
| CN602 | QGF0522F3-33W | CONNECTOR | FFC/FPC (1-33) | |
| CN603 | QNZ1006-001 | USB JACK | | |
| J601 | QNS0215-001 | 3.5 JACK | | |
| JS686 | QSW1263-001 | ROTARY ENCODER | | |
| S601 | NSW0124-001X | TACT SW | | |
| S602 | NSW0316-001X | TACT SWITCH | | |
| S603 | NSW0316-001X | TACT SWITCH | | |
| S604 | NSW0316-001X | TACT SWITCH | | |
| S605 | NSW0316-001X | TACT SWITCH | | |
| S606 | NSW0316-001X | TACT SWITCH | | |
| S607 | NSW0316-001X | TACT SWITCH | | |
| S608 | NSW0316-001X | TACT SWITCH | | |
| S609 | NSW0316-001X | TACT SWITCH | | |
| S610 | NSW0316-001X | TACT SWITCH | | |
| S611 | NSW0316-001X | TACT SWITCH | | |
| S612 | NSW0316-001X | TACT SWITCH | | |
| X601 | NAX0752-001X | RESONATOR | | |

# Packing materials and accessories parts list

Block No. M 3 M M

No additional / supplemental order of WARRANTY CARDs are available.

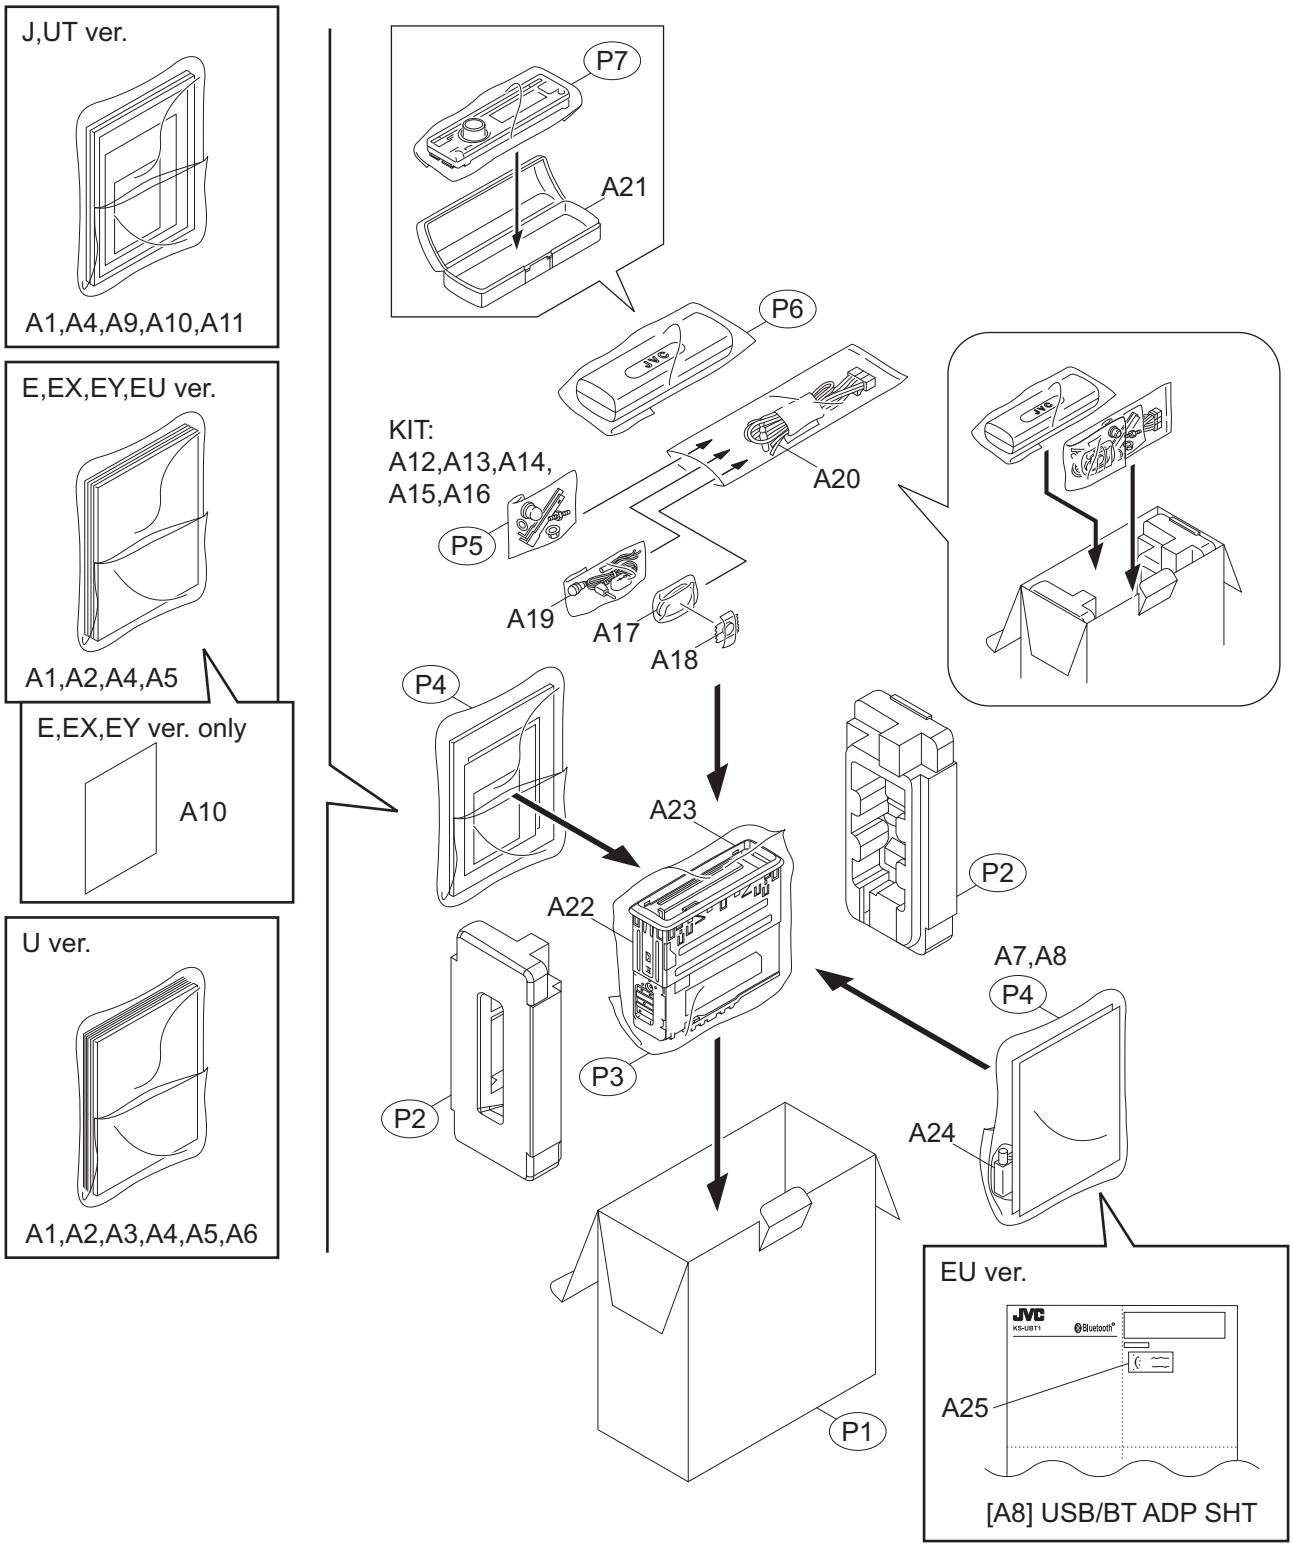


The parts without symbol number are not service.

# Packing and Accessories

Block No. [M][3][M][M]

| ⚠ | Symbol No. | Part No. | Part Name | Description | Local |
|---|---|---|---|---|---|
| | A 1 | GET0598-001A | INST BOOK | ENG FRE SPA | A805J,R800J |
| | A 1 | GET0600-001A | INST BOOK | GER FRE ITA | R801E |
| | A 1 | GET0600-003A | INST BOOK | ENG FRE | R801EX,R801EU |
| | A 1 | GET0600-006A | INST BOOK | ENG GER RUS GRE | R801EY |
| | A 1 | GET0599-001A | INST BOOK | ENG THA | R805U |
| | A 1 | GET0599-005A | INST BOOK | ENG CHI(TAIWAN) | R805UT |
| | A 1 | GET0601-001A | INST BOOK | ENG RUS UKR | R807EE |
| | A 2 | GET0600-002A | INST BOOK | SPA POR | R801E |
| | A 2 | GET0600-004A | INST BOOK | DUT SWE DAN FIN | R801EX |
| | A 2 | GET0600-007A | INST BOOK | POL CZE HUN | R801EY |
| | A 2 | GET0600-005A | INST BOOK | SPA RUS TUR PER | R801EU |
| | A 2 | GET0599-002A | INST BOOK | CHI(TAIWAN) ARA PER KOR | R805U |
| | A 3 | GET0599-003A | INST BOOK | RUS | R805U |
| | A 4 | GET0598-002A | INSTALL MANUAL | ENG FRE SPA | A805J,R800J |
| | A 4 | GET0600-008A | INSTALL MANUAL | GER FRE ITA | R801E |
| | A 4 | GET0600-010A | INSTALL MANUAL | ENG FRE | R801EX,R801EU |
| | A 4 | GET0600-013A | INSTALL MANUAL | ENG GER RUS GRE | R801EY |
| | A 4 | GET0599-006A | INSTALL MANUAL | ENG THA | R805U |
| | A 4 | GET0599-010A | INSTALL MANUAL | ENG CHI(TAIWAN) | R805UT |
| | A 4 | GET0601-002A | INSTALL MANUAL | ENG RUS UKR | R807EE |
| | A 5 | GET0600-009A | INSTALL MANUAL | SPA POR | R801E |
| | A 5 | GET0600-011A | INSTALL MANUAL | DUT SWE DAN FIN | R801EX |
| | A 5 | GET0600-014A | INSTALL MANUAL | POL CZE HUN | R801EY |
| | A 5 | GET0600-012A | INSTALL MANUAL | SPA RUS TUR PER | R801EU |
| | A 5 | GET0599-007A | INSTALL MANUAL | CHI(TAIWAN) ARA PER KOR | R805U |
| | A 6 | GET0599-008A | INSTALL MANUAL | RUS | R805U |
| | A 7 | LVT1672-001A | INST SHEET | | |
| | A 8 | GET0617-001A | USB/BT ADP SHT | | |
| | A 9 | BT-51044-1 | REGIS. CARD | | A805J,R800J |
| | A 10 | ---------- | WARRANTY CARD | BT-51029-3 | A805J |
| | A 10 | ---------- | WARRANTY CARD | BT-51018-6 | R800J |
| | A 10 | ---------- | WARRANTY CARD | BT-54038-1 | R801E,R801EX,R801EY,R807EE |
| | A 11 | ---------- | WARRANTY CARD | BT-52008-1 | A805J,R800J |
| | A 12 | VKZ4027-202 | PLUG NUT | | |
| | A 13 | GE40426-002A | MOUNT BOLT | | |
| | A 14 | VKZ4328-003 | LOCK NUT | | |
| | A 15 | QYWWS53A008ZA | WASHER | 0mm/5.3mm x | |
| | A 16 | GE40130-002A | HOOK | (x2) | |
| | A 17 | RM-RK50C | REMOCON UNIT | | |
| | A 18 | ---------- | LITHIUM BATTERY | | |
| | A 19 | QAN0096-001 | BT MIC | | |
| ⚠ | A 20 | QAM1143-001 | POWER CORD | | A805J,R800J |
| ⚠ | A 20 | QAM1149-001 | POWER CORD | | R801E,R801EX,R801EY,R801EU,R807EE |
| | A 20 | QAM1146-001 | 16P CORD ASSY | | R805U,R805UT |
| | A 21 | GE32320-001A | HARD CASE ASSY | | |
| | A 22 | GE20137-003A | MOUNTING SLEEVE | | |
| | A 23 | GE20235-001A | TRIM PLATE | | A805J,R800J,R805U,R805UT |
| | A 23 | GE20204-008A | TRIM PLATE | | R801E,R801EX,R801EY,R801EU,R807EE |
| | A 24 | QAU0526-001 | RF MODULE | | |
| | A 25 | GE40476-001A | BT LABEL(1187) | | R801EU |
| | KIT | SRW-MA372 | SCREW PARTS KIT | A12 A13 A14 A15 A16 | |
| | P 1 | GE33603-001A | CARTON | | A805J |
| | P 1 | GE33606-001A | CARTON | | R800J |
| | P 1 | GE33612-002A | CARTON | | R801E,R801EX,R801EY,R801EU |
| | P 1 | GE33609-001A | CARTON | | R805U,R805UT |
| | P 1 | GE33615-001A | CARTON | | R807EE |
| | P 2 | GE10237-001A | CUSHION | | A805J,R800J,R805U,R805UT |
| | P 2 | GE10238-001A | CUSHION | | R801E,R801EX,R801EY,R801EU,R807EE |
| | P 3 | QPC03004315PB | POLY BAG | 30cm x 43cm | |
| | P 4 | FSPG4002-001 | POLY BAG | (x2) | |
| | P 5 | QPA00801205 | POLY BAG | 8cm x 12cm | |
| | P 6 | QPA01003003 | POLY BAG | 10cm x 30cm | |
| | P 7 | QPC01002515 | POLY BAG | 10cm x 25cm | |