


EXPLODED VIEW / PARTS LIST


Main section

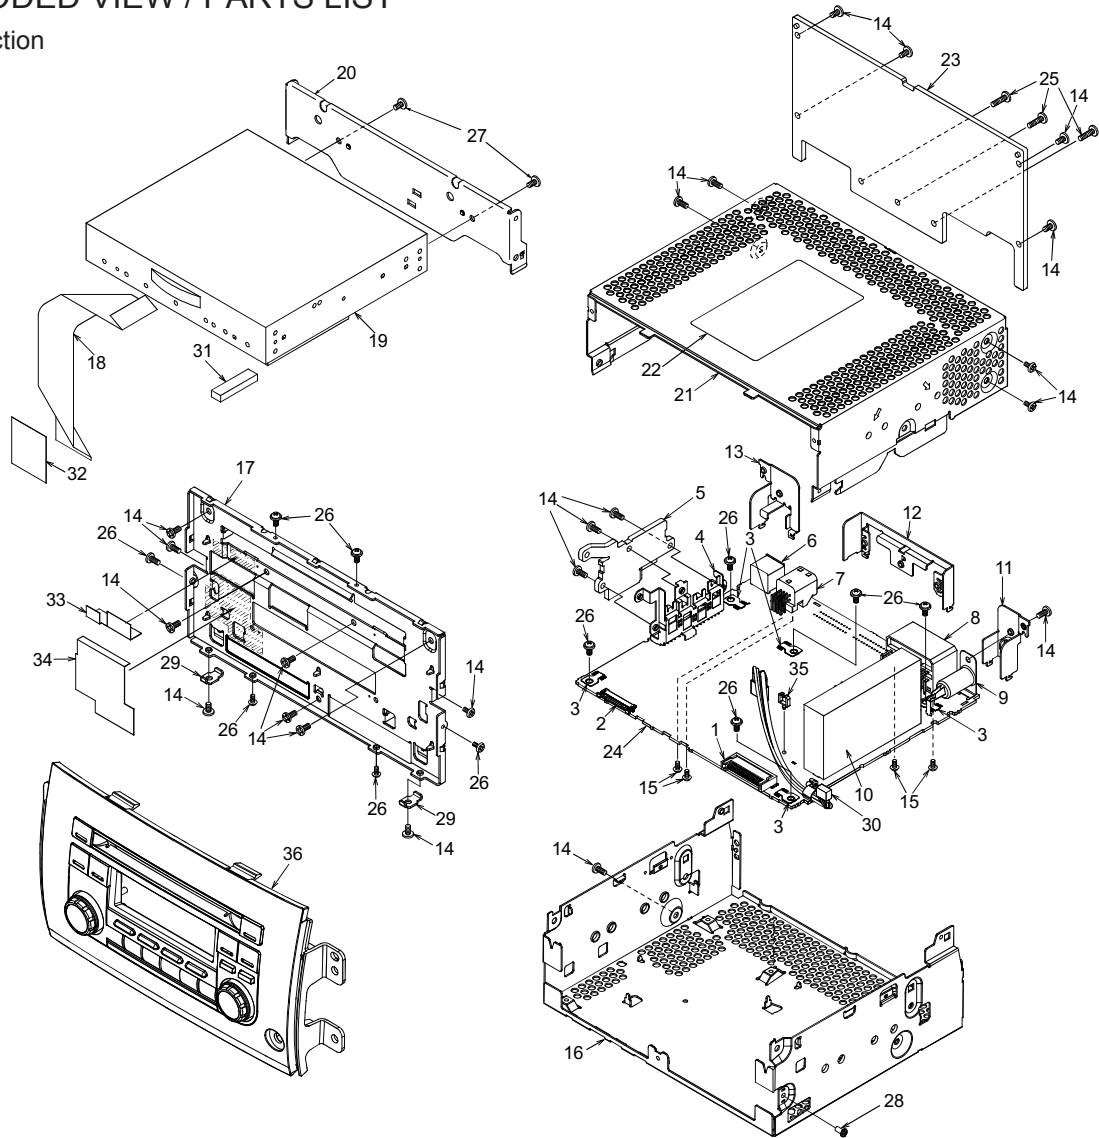

NO.	PART NO.	DESCRIPTION	Q'TY
1	076-3011-74	PLUG (24P)	1
2	074-1189-88	SOCKET (38P)	1
3	073-0762-90	TERMINAL	5
4	331-4126-00	TR HOLDER	1
5	313-1966-00	SUB HEAT SINK	1
6	074-1194-00	SOCKET (13P)	1
7	074-1302-08	SOCKET (8P)	1
8	074-4007-20	SOCKET (20P)	1
9	092-0702-50	ANT-RECEPT	1
10	941-0236-00	TUNER PACK	1
11	331-4549-00	ANT HOLDER	1
12	331-4548-00	IC HOLDER	1
13	331-4547-00	SOCKET HOLDER	1
14	714-2606-8B	MACHINE SCREW (M2.6x6)	22
15	778-3006-00	TAP SCREW (3x6)	4
16	311-1986-00	LOWER CASE	1
17	309-0819-01	ES PLATE	1
18	816-3034-50	FLAT WIRE	1
19	929-5026-82	CD-MECH-MODULE	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	331-4123-00	CD BRKT	1
21	310-1826-00	UPPER CASE	1
22	276-0597-08	SETPLATE	1
23	313-1962-00	HEAT SINK	1
24	-----	Main PWB	1
25	714-2610-89	MACHINE SCREW (M2.6x10)	3
26	716-0878-50	IT SCREW (M2.6x5)	11
27	714-2603-8B	MACHINE SCREW (M2.6x3)	2
28	780-2604-51	IT SCREW (M2.6x4)	1
29	331-4193-20	SU-PLATE	2
30	854-8264-50	EXTENSION LEAD	1
31	345-5994-00	CUSHION RUBBER	1
32	347-8738-00	PROTECTOR	1
33	347-8737-00	PROTECTOR	1
34	347-8746-00	PROTECTOR	1
35	335-3701-00	MINI SADDLE	1
36	-----	ESCUTCHEON SECTION (Refer to page 6)	1

Escutcheon section

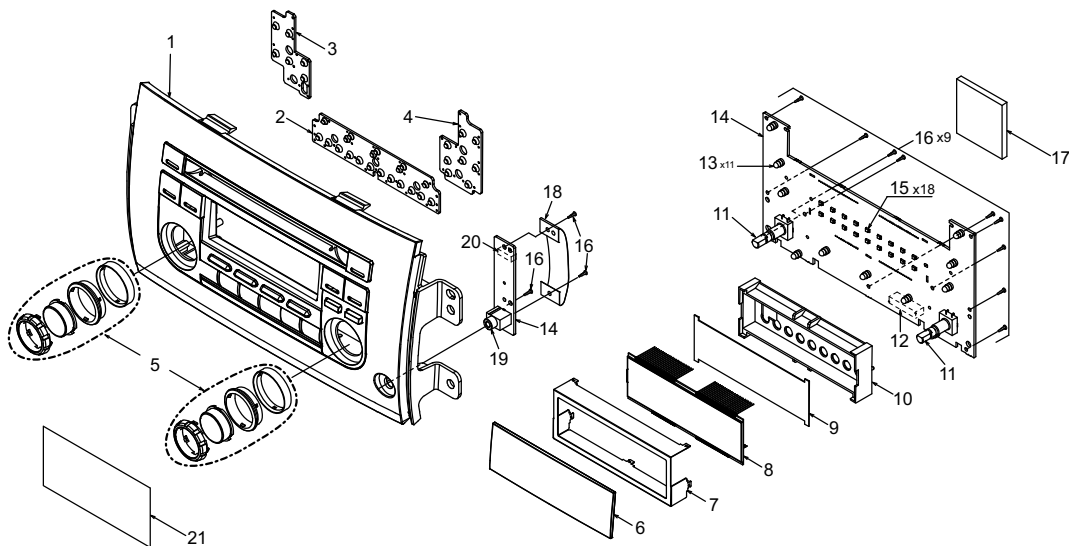

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8463-20	ES-ASSY	1
2	345-5589-10	RUBBER SW (F)	1
3	345-5590-00	RUBBER SW (L)	1
4	345-6350-00	RUBBER SW (R)	1
5	947-0602-00	KNOB Assy	2
6	373-1189-10	DIAL COVER	1
7	331-4817-00	LCD COVER	1
8	379-1429-50	INDICATOR (LCD)	1
9	335-8274-00	COLOR FILTER	1
10	335-8273-00	LCD HOLDER	1
11	016-0018-17	VR W/SHAFT	2

NO.	PART NO.	DESCRIPTION	Q'TY
12	074-3013-74	SOCKET (24P)	1
13	017-0508-00	PILOT LAMP (14V 40mA RED)	11
14	-----	Switch PWB	1
15	001-7094-91	LED (VFR1112H-TR)	18
16	716-0778-51	WAVE SCREW (2x6)	12
17	345-6006-00	PROTECTOR	1
18	345-6360-00	PROTECTOR	1
19	075-9024-00	MINI JACK	1
20	076-6020-05	SOCKET (5P)	1
21	347-8647-00	PROTECTOR	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-0702-50	ANT-RECEPT	C245	168-1042-78	16V 0.1uF K	C353	042-1562-15	10V 220uF
BL101	941-0236-00	AM/FM TUNER	C271	188-4763-38	16V 47uF	C354	166-2201-50	22pF CH
C108	166-8201-50	82pF CH	C273	043-0328-90	0.1uF	C355	166-2201-50	22pF CH
C121	166-1801-50	18pF CH	C274	189-2273-29	10V 220uF	C356	166-1007-50	10pF CH
C122	166-2211-50	220pF CH	C276	043-0328-90	0.1uF	C357	166-1007-50	10pF CH
C123	043-0554-90	25V 10uF	C301	178-1052-78	1uF	C358	188-1063-38	16V 10uF
C126	163-1063-35	16V 10uF	C302	178-1052-78	1uF	C359	188-1063-38	16V 10uF
C127	166-1007-50	10pF CH	C305	178-1052-78	1uF	C360	188-1063-38	16V 10uF
C129	168-2232-55	0.022uF K	C306	178-1052-78	1uF	C361	188-1063-38	16V 10uF
C130	168-2232-55	0.022uF K	C307	178-1052-78	1uF	C362	166-2201-50	22pF CH
C131	188-4763-38	16V 47uF	C308	178-1052-78	1uF	C363	163-1063-35	16V 10uF
C132	163-1063-35	16V 10uF	C309	168-3932-78	0.039uF K	C364	163-1063-35	16V 10uF
C133	168-2232-55	0.022uF K	C310	168-3932-78	0.039uF K	C365	168-1042-78	16V 0.1uF K
C138	168-1052-78	16V 1uF K	C311	188-2253-68	50V 2.2uF	C367	166-1007-50	10pF CH
C142	168-4732-78	0.047uF K	C312	188-2253-68	50V 2.2uF	C368	163-1063-35	16V 10uF
C143	168-4732-78	0.047uF K	C313	188-2253-68	50V 2.2uF	C369	166-2201-50	22pF CH
C144	043-0548-50	10V 2.2uF	C314	188-2253-68	50V 2.2uF	C370	163-1063-35	16V 10uF
C151	168-2232-55	0.022uF K	C318	168-1522-55	1500pF K	C371	166-1007-50	10pF CH
C153	168-2232-55	0.022uF K	C319	168-1522-55	1500pF K	C382	178-2242-78	0.22uF
C160	168-1042-78	16V 0.1uF K	C334	166-4711-50	470pF CH	C383	042-1624-00	16V 4700uF
C169	168-1522-55	1500pF K	C335	166-4711-50	470pF CH	C384	163-1063-35	16V 10uF
C212	188-4763-38	16V 47uF	C336	166-4711-50	470pF CH	C385	168-1042-78	16V 0.1uF K
C222	168-1042-78	16V 0.1uF K	C337	166-4711-50	470pF CH	C386	168-1042-78	16V 0.1uF K
C243	188-4763-38	16V 47uF	C346	188-1073-28	10V 100uF	C387	168-1042-78	16V 0.1uF K
C244	168-1042-78	16V 0.1uF K	C352	168-1042-78	16V 0.1uF K	C388	163-1053-65	50V 1uF

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C389	168-1042-78	16V 0.1uF K	D507	001-4301-25	HZU4.7B1	Q776	125-0025-92	RN2302
C391	168-1042-78	16V 0.1uF K	D508	001-0466-90	S5688B	Q776	125-0034-92	RT1P141M
C392	168-1042-78	16V 0.1uF K	D509	001-0504-36	HZS7 A1L	Q777	125-2027-91	DTC114EUA
C393	168-1042-78	16V 0.1uF K	D701	001-0424-31	MA4180	Q777	125-2032-92	RN1302
C394	168-1042-78	16V 0.1uF K	D702	001-0424-31	MA4180	Q777	125-2041-92	RT1N141M
C395	168-1032-55	0.01uF K	D703	001-0424-31	MA4180	Q791	192-4116-51	2SC4116 G,L
C396	163-1053-65	50V 1uF	D711	001-0466-90	S5688B	Q791	192-4155-51	2SC4155A S,T
C397	042-1624-00	16V 4700uF	D712	001-0466-90	S5688B	Q791	193-1819-50	2SD1819A-R,S
C398	163-1063-35	16V 10uF	D731	001-0466-90	S5688B	Q792	192-4116-51	2SC4116 G,L
C399	163-1053-65	50V 1uF	D761	001-0504-40	HZS7 B3L	Q792	192-4155-51	2SC4155A S,T
C400	166-2201-50	22pF CH	D771	001-0347-44	MA4082M	Q792	193-1819-50	2SD1819A-R,S
C401	166-3911-50	390pF CH	D801	001-0592-00	RM4Z	Q793	192-4116-51	2SC4116 G,L
C402	043-0570-90	16V 2.2uF K	D851	001-4301-68	HZU18B1	Q793	192-4155-51	2SC4155A S,T
C403	168-5632-78	16V 0.056uF K	IC104	051-3519-90	NJU7771F05-TE2	Q793	193-1819-50	2SD1819A-R,S
C404	043-0570-90	16V 2.2uF K	IC121	051-6212-18	LC72191JM-UC	Q821	190-2071-00	2SA2071
C405	188-1063-38	16V 10uF	IC241	051-3395-90	NJU7780U1-15-TE2	Q822	192-4116-51	2SC4116 G,L
C406	188-1073-28	10V 100uF	IC271	051-3333-00	NJM2396F05	Q822	192-4155-51	2SC4155A S,T
C407	168-1042-78	16V 0.1uF K	IC272	051-3366-00	NJM2396F08	Q822	193-1819-50	2SD1819A-R,S
C408	166-3911-50	390pF CH	IC351	051-3034-90	NJM4558V	R107	119-5131-15	1/10W 51k ohm
C409	043-0570-90	16V 2.2uF K	IC352	051-3034-90	NJM4558V	R121	119-4731-15	1/10W 47k ohm
C410	168-5632-78	16V 0.056uF K	IC381	051-2042-00	TA8275H	R123	119-0000-05	1/10W 0 ohm JW
C411	043-0570-90	16V 2.2uF K	IC391	051-2040-00	TA8276H	R125	119-0000-05	1/10W 0 ohm JW
C412	168-1042-78	16V 0.1uF K	IC401	051-5046-90	CL7639V20	R126	119-4731-15	1/10W 47k ohm
C413	043-0570-90	16V 2.2uF K	IC501	052-3227-10	M30624MHP-474GP	R127	119-4731-15	1/10W 47k ohm
C414	178-4732-78	0.047uF	IC502	051-0869-58	NJM2103M	R128	119-1011-15	1/10W 100 ohm
C415	178-2242-78	0.22uF	IC503	051-9402-68	BR93L56F-W	R129	119-4731-15	1/10W 47k ohm
C416	168-2232-55	0.022uF K	IC504	051-6600-58	HA12187FP	R130	119-0000-05	1/10W 0 ohm JW
C417	178-4742-78	0.47uF	IC741	051-3369-00	NJM2388F84	R131	119-0000-05	1/10W 0 ohm JW
C418	168-4722-55	4700pF K	J221	074-1189-88	38P	R132	119-1011-15	1/10W 100 ohm
C419	178-4742-78	0.47uF	J701	074-1194-00	13P CE-NET	R134	119-0000-05	1/10W 0 ohm JW
C420	168-4722-55	4700pF K	J721	074-1302-08	8P	R139	119-5621-15	1/10W 5.6k ohm
C421	178-4742-78	0.47uF	J801	074-4007-20	20P	R140	119-5621-15	1/10W 5.6k ohm
C422	168-4722-55	4700pF K	L104	010-2003-04	30uH	R221	119-4731-15	1/10W 47k ohm
C423	178-4742-78	0.47uF	L122	010-6009-76	22uH J	R271	119-4731-15	1/10W 47k ohm
C424	168-4722-55	4700pF K	L135	010-6009-76	22uH J	R275	119-0000-05	1/10W 0 ohm JW
C501	168-1042-78	16V 0.1uF K	L501	010-6009-76	22uH J	R301	119-1021-15	1/10W 1k ohm
C502	188-4763-18	6.3V 47uF	L502	010-6009-76	22uH J	R302	119-1021-15	1/10W 1k ohm
C503	168-1032-55	0.01uF K	L801	010-8026-00	210uH	R305	119-1021-15	1/10W 1k ohm
C504	168-1032-55	0.01uF K	P501	076-3011-74	24P	R306	119-1021-15	1/10W 1k ohm
C505	168-1032-55	0.01uF K	Q106	125-2026-91	UNR5211G	R307	119-1021-15	1/10W 1k ohm
C506	168-1042-78	16V 0.1uF K	Q107	125-2026-91	UNR5211G	R308	119-1021-15	1/10W 1k ohm
C507	188-1053-68	50V 1uF	Q391	125-2027-93	DTC144EUA	R309	119-1021-15	1/10W 1k ohm
C509	168-1022-55	1000pF K	Q502	190-2071-00	2SA2071	R310	119-1021-15	1/10W 1k ohm
C510	168-1022-55	1000pF K	Q503	192-4116-51	2SC4116 G,L	R311	119-5631-15	1/10W 56k ohm
C511	168-1042-78	16V 0.1uF K	Q503	192-4155-51	2SC4155A S,T	R312	119-5631-15	1/10W 56k ohm
C512	168-1032-55	0.01uF K	Q503	193-1819-50	2SD1819A-R,S	R313	119-5631-15	1/10W 56k ohm
C513	189-1073-29	10V 100uF	Q504	192-4116-51	2SC4116 G,L	R314	119-5631-15	1/10W 56k ohm
C514	168-1042-78	16V 0.1uF K	Q504	192-4155-51	2SC4155A S,T	R323	119-0000-05	1/10W 0 ohm JW
C515	166-1011-50	100pF CH	Q504	193-1819-50	2SD1819A-R,S	R324	119-0000-05	1/10W 0 ohm JW
C516	188-1063-38	16V 10uF	Q505	192-4116-51	2SC4116 G,L	R325	119-0000-05	1/10W 0 ohm JW
C517	042-0559-00	5.5V 0.1F	Q505	192-4155-51	2SC4155A S,T	R326	119-0000-05	1/10W 0 ohm JW
C722	168-1042-78	16V 0.1uF K	Q505	193-1819-50	2SD1819A-R,S	R351	119-8211-15	1/10W 820 ohm
C731	172-1041-15	0.1uF	Q506	193-2118-50	2SD2118F5 R,S	R352	119-1021-15	1/10W 1k ohm
C732	188-1053-68	50V 1uF	Q701	192-4116-51	2SC4116 G,L	R353	032-0140-50	1/10W 10k ohm F
C741	043-0328-90	0.1uF	Q701	192-4155-51	2SC4155A S,T	R354	032-0140-50	1/10W 10k ohm F
C744	188-1073-28	10V 100uF	Q701	193-1819-50	2SD1819A-R,S	R355	032-0140-50	1/10W 10k ohm F
C761	188-1063-38	16V 10uF	Q711	190-2071-00	2SA2071	R356	032-0140-50	1/10W 10k ohm F
C762	188-1063-38	16V 10uF	Q712	192-4116-51	2SC4116 G,L	R357	032-0140-50	1/10W 10k ohm F
C771	188-1073-28	10V 100uF	Q712	192-4155-51	2SC4155A S,T	R358	032-0140-50	1/10W 10k ohm F
C772	188-1063-38	16V 10uF	Q712	193-1819-50	2SD1819A-R,S	R359	032-0140-50	1/10W 10k ohm F
C791	188-4756-58	35V 4.7uF	Q761	192-5810-00	2SC5810 TE12L	R360	032-0140-50	1/10W 10k ohm F
C792	168-1042-78	16V 0.1uF K	Q762	125-0021-91	DTA114EUA	R362	032-0140-50	1/10W 10k ohm F
C811	172-1041-15	0.1uF	Q762	125-0025-92	RN2302	R363	032-0140-50	1/10W 10k ohm F
C821	188-1063-38	16V 10uF	Q762	125-0034-92	RT1P141M	R364	032-0140-50	1/10W 10k ohm F
CCT501	050-0140-54	1/32W 1k ohm x4J	Q763	125-2027-91	DTC114EUA	R365	032-0140-50	1/10W 10k ohm F
CCT504	050-0140-54	1/32W 1k ohm x4J	Q763	125-2032-92	RN1302	R368	032-0140-50	1/10W 10k ohm F
CCT505	050-0140-54	1/32W 1k ohm x4J	Q763	125-2041-92	RT1N141M	R370	032-0140-50	1/10W 10k ohm F
D106	001-0580-90	1SS352	Q771	192-5886-00	2SC5886	R371	032-0140-50	1/10W 10k ohm F
D381	001-0580-90	1SS352	Q775	192-4116-51	2SC4116 G,L	R372	032-0140-50	1/10W 10k ohm F
D391	001-0580-90	1SS352	Q775	192-4155-51	2SC4155A S,T	R381	119-0000-05	1/10W 0 ohm JW
D505	001-0580-90	1SS352	Q775	193-1819-50	2SD1819A-R,S	R382	119-1021-15	1/10W 1k ohm
D506	001-2403-90	M1F60	Q776	125-0021-91	DTA114EUA	R383	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R391	119-5631-15	1/10W 56k ohm	R535	119-1031-15	1/10W 10k ohm	R715	119-3321-15	1/10W 3.3k ohm
R392	119-1221-15	1/10W 1.2k ohm	R536	119-2221-15	1/10W 2.2k ohm	R726	119-1021-15	1/10W 1k ohm
R393	119-2221-15	1/10W 2.2k ohm	R537	119-1031-15	1/10W 10k ohm	R731	116-5621-15	1/4W 5.6k ohm
R394	119-2221-15	1/10W 2.2k ohm	R538	119-1031-15	1/10W 10k ohm	R732	116-4721-15	1/4W 4.7k ohm
R395	119-2221-15	1/10W 2.2k ohm	R539	119-1031-15	1/10W 10k ohm	R761	032-0092-56	1/8W 22k ohm F
R396	119-2221-15	1/10W 2.2k ohm	R540	119-4731-15	1/10W 47k ohm	R762	032-0092-31	1/8W 150k ohm F
R397	119-1031-15	1/10W 10k ohm	R541	119-5621-15	1/10W 5.6k ohm	R763	032-0092-51	1/8W 1k ohm F
R400	119-1031-15	1/10W 10k ohm	R542	119-2231-15	1/10W 22k ohm	R764	119-1221-15	1/10W 1.2k ohm
R401	119-2231-15	1/10W 22k ohm	R543	119-1031-15	1/10W 10k ohm	R773	116-1021-15	1/4W 1k ohm
R402	119-2021-15	1/10W 2k ohm	R544	119-4731-15	1/10W 47k ohm	R779	116-1821-15	1/4W 1.8k ohm
R403	119-2231-15	1/10W 22k ohm	R545	119-6831-15	1/10W 68k ohm	R780	117-1821-15	1/8W 1.8k ohm
R404	119-2021-15	1/10W 2k ohm	R546	119-1021-15	1/10W 1k ohm	R791	119-0000-05	1/10W 0 ohm JW
R405	119-0000-05	1/10W 0 ohm JW	R547	119-1021-15	1/10W 1k ohm	R792	116-4721-15	1/4W 4.7k ohm
R407	119-1031-15	1/10W 10k ohm	R548	119-1031-15	1/10W 10k ohm	R795	119-4721-15	1/10W 4.7k ohm
R408	119-2731-15	1/10W 27k ohm	R549	119-3341-15	1/10W 330k ohm	R796	116-5611-15	1/4W 560 ohm
R409	119-2731-15	1/10W 27k ohm	R550	032-0140-22	1/10W 68k ohm F	R797	119-4721-15	1/10W 4.7k ohm
R502	119-4721-15	1/10W 4.7k ohm	R551	032-0140-00	1/10W 56k ohm F	R798	119-4721-15	1/10W 4.7k ohm
R504	119-4721-15	1/10W 4.7k ohm	R552	117-6821-15	1/8W 6.8k ohm	R799	119-1831-15	1/10W 18k ohm
R505	119-1041-15	1/10W 100k ohm	R553	119-4731-15	1/10W 47k ohm	R801	119-0000-05	1/10W 0 ohm JW
R506	119-1041-15	1/10W 100k ohm	R554	119-4731-15	1/10W 47k ohm	R802	119-0000-05	1/10W 0 ohm JW
R507	119-4731-15	1/10W 47k ohm	R555	119-5621-15	1/10W 5.6k ohm	R821	116-4721-15	1/4W 4.7k ohm
R508	119-4731-15	1/10W 47k ohm	R556	119-1021-15	1/10W 1k ohm	R822	119-3321-15	1/10W 3.3k ohm
R510	119-4721-15	1/10W 4.7k ohm	R557	119-4731-15	1/10W 47k ohm	R823	119-1031-15	1/10W 10k ohm
R511	119-4721-15	1/10W 4.7k ohm	R558	119-1031-15	1/10W 10k ohm	R824	116-2221-15	1/4W 2.2k ohm
R512	119-4721-15	1/10W 4.7k ohm	R567	119-4731-15	1/10W 47k ohm	R825	116-2221-15	1/4W 2.2k ohm
R513	119-4721-15	1/10W 4.7k ohm	R569	119-4731-15	1/10W 47k ohm	R826	119-8221-15	1/10W 8.2k ohm
R514	119-1021-15	1/10W 1k ohm	R571	119-4731-15	1/10W 47k ohm	R901	119-0000-05	1/10W 0 ohm JW
R515	119-1041-15	1/10W 100k ohm	R574	119-4731-15	1/10W 47k ohm	R909	119-0000-05	1/10W 0 ohm JW
R516	119-1041-15	1/10W 100k ohm	R575	119-4731-15	1/10W 47k ohm	SUP101	060-0122-20	DSP-141N-S00B
R517	116-1001-15	1/4W 10 ohm	R577	119-4731-15	1/10W 47k ohm	TC121	004-1580-10	30pF GRN
R520	119-4731-15	1/10W 47k ohm	R578	119-4721-15	1/10W 4.7k ohm	TH711	002-0318-21	THERMISTOR
R522	119-4731-15	1/10W 47k ohm	R579	119-4721-15	1/10W 4.7k ohm	TM101	073-0762-90	TERMINAL
R525	119-0000-05	1/10W 0 ohm JW	R701	116-1211-15	1/4W 120 ohm	TM501	073-0762-90	TERMINAL
R527	119-4721-15	1/10W 4.7k ohm	R702	116-6801-15	1/4W 68 ohm	TM502	073-0762-90	TERMINAL
R528	032-0140-66	1/10W 220 ohm F	R703	119-2231-15	1/10W 22k ohm	TM801	073-0762-90	TERMINAL
R529	119-1031-15	1/10W 10k ohm	R704	119-2231-15	1/10W 22k ohm	TM802	073-0762-90	TERMINAL
R531	119-1031-15	1/10W 10k ohm	R711	116-2221-15	1/4W 2.2k ohm	X121	061-1066-00	7.2MHz
R532	119-4721-15	1/10W 4.7k ohm	R712	117-1031-15	1/8W 10k ohm	X501	060-1533-90	SCSTCE10M0G52-RO
R533	119-4721-15	1/10W 4.7k ohm	R713	116-2221-15	1/4W 2.2k ohm	PWB	039-3429-00	PWB(WITHOUT COMPONENT)
R534	119-1021-15	1/10W 1k ohm	R714	119-1031-15	1/10W 10k ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF K	IC100	051-6084-00	NJU6625FG1-03	R201	119-1841-15	1/10W 180k ohm
C100	168-1042-78	16V 0.1uF K	J1	075-9024-00	MINI-JACK	R202	119-1841-15	1/10W 180k ohm
C101	168-1042-78	16V 0.1uF K	J100	074-3013-74	24P	R203	119-1841-15	1/10W 180k ohm
C102	168-1042-78	16V 0.1uF K	L100	010-3406-66	22uH J	R925	119-2711-15	1/10W 270 ohm
C103	168-1042-78	16V 0.1uF K	LCD901	379-1429-50	INDICATOR (LCD)	R926	119-2711-15	1/10W 270 ohm
C104	168-1042-78	16V 0.1uF K	P1	076-6020-05	5P	R927	119-3011-15	1/10W 300 ohm
C105	178-1052-78	1uF	PL100	017-0508-00	14V 40mA (RED)	R928	119-2711-15	1/10W 270 ohm
D113	001-0580-90	1SS352	PL101	017-0508-00	14V 40mA (RED)	R929	119-2711-15	1/10W 270 ohm
D114	001-0580-90	1SS352	PL102	017-0508-00	14V 40mA (RED)	R930	119-3011-15	1/10W 300 ohm
D115	001-0580-90	1SS352	PL104	017-0508-00	14V 40mA (RED)	R931	119-2711-15	1/10W 270 ohm
D116	001-0580-90	1SS352	PL105	017-0508-00	14V 40mA (RED)	R932	119-2711-15	1/10W 270 ohm
D117	001-0580-90	1SS352	PL106	017-0508-00	14V 40mA (RED)	R933	119-3011-15	1/10W 300 ohm
D905	001-7094-91	VFR1112H-TR	PL107	017-0508-00	14V 40mA (RED)	R934	119-2711-15	1/10W 270 ohm
D906	001-7094-91	VFR1112H-TR	PL108	017-0508-00	14V 40mA (RED)	R935	119-2711-15	1/10W 270 ohm
D907	001-7094-91	VFR1112H-TR	PL109	017-0508-00	14V 40mA (RED)	R936	119-3011-15	1/10W 300 ohm
D908	001-7094-91	VFR1112H-TR	PL110	017-0508-00	14V 40mA (RED)	R937	119-2711-15	1/10W 270 ohm
D909	001-7094-91	VFR1112H-TR	PL111	017-0508-00	14V 40mA (RED)	R938	119-2711-15	1/10W 270 ohm
D910	001-7094-91	VFR1112H-TR	R1	119-0000-05	1/10W 0 ohm JW	R939	119-3011-15	1/10W 300 ohm
D911	001-7094-91	VFR1112H-TR	R116	119-0000-05	1/10W 0 ohm JW	R941	119-2711-15	1/10W 270 ohm
D912	001-7094-91	VFR1112H-TR	R117	119-0000-05	1/10W 0 ohm JW	R942	119-2711-15	1/10W 270 ohm
D913	001-7094-91	VFR1112H-TR	R119	119-0000-05	1/10W 0 ohm JW	R943	119-3011-15	1/10W 300 ohm
D915	001-7094-91	VFR1112H-TR	R120	119-0000-05	1/10W 0 ohm JW	TH901	002-0315-00	TN10-3U153JT
D916	001-7094-91	VFR1112H-TR	R121	119-4341-15	1/10W 430k ohm	TM100	073-0778-90	TERMINAL
D917	001-7094-91	VFR1112H-TR	R125	119-0000-05	1/10W 0 ohm JW	VR100	016-0018-17	ROTALY ENCODER
D918	001-7094-91	VFR1112H-TR	R126	119-0000-05	1/10W 0 ohm JW	VR101	016-0018-17	ROTALY ENCODER
D919	001-7094-91	VFR1112H-TR	R128	119-1021-15	1/10W 1k ohm	VR103	012-6004-63	470k ohm B VR
D920	001-7094-91	VFR1112H-TR	R129	119-1021-15	1/10W 1k ohm	PWB	039-3430-00	PWB(WITHOUT COMPONENTS)
D921	001-7094-91	VFR1112H-TR	R131	119-0000-05	1/10W 0 ohm JW			
D922	001-7094-91	VFR1112H-TR	R132	119-0000-05	1/10W 0 ohm JW			
D923	001-7094-91	VFR1112H-TR	R200	119-1841-15	1/10W 180k ohm			

929-5026-82



NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB	1
2	-----	CD PWB	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1868-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-20	BASE GEAR	1
15	621-0610-20	IDLE GEAR A	1
16	621-0611-20	IDLE GEAR B	1
17	621-0612-21	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-23	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-20	ROLLER GEAR B	1
25	621-0720-20	ROLLER GEAR C	1
26	621-0721-20	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-20	IDLE CASE	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-1729-20	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-0020-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	3
49	716-1670-01	SCREW(M2x4)	4
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	816-2542-01	FLAT WIRE	1
70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
74	966-1722-20	SH-RACK-ASSY	1
75	620-1866-20	DRIVE-PLATE	1
76	969-0071-30	PICKUP-ASSY	1
77	622-1570-21	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(BM1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	178-1052-78	1uF	C68	168-1042-78	16V 0.1uF	R20	119-5121-15	1/10W 5.1k ohm
C3	042-0627-90	16V 100uF	C69	042-1710-90	6.3V 100uF	R21	119-1031-15	1/10W 10k ohm
C4	168-1042-78	16V 0.1uF	C74	042-1709-90	6.3V 47uF	R22	119-2231-15	1/10W 22k ohm
C6	178-1052-78	1uF	C75	168-1042-78	16V 0.1uF	R23	119-5121-15	1/10W 5.1k ohm
C7	042-0560-85	6.3V 100uF	C77	168-1042-78	16V 0.1uF	R24	119-1031-15	1/10W 10k ohm
C8	178-1052-78	1uF	C78	168-1022-55	1000pF K	R25	119-1041-15	1/10W 100k ohm
C9	166-4711-50	470pF CH	C79	168-1022-55	1000pF K	R26	119-0000-05	1/10W 0 ohm JW
C10	168-4732-78	0.047uF K	C80	042-0423-20	10V-10uF	R27	119-4731-15	1/10W 47k ohm
C11	166-4711-50	470pF CH	C81	168-1042-78	16V 0.1uF	R29	119-5621-15	1/10W 5.6k ohm
C12	168-4732-78	0.047uF K	D1	001-1305-90	DAN217UT106	R30	119-2231-15	1/10W 22k ohm
C14	168-1042-78	16V 0.1uF	IC1	051-6733-10	TC94A70FG-005	R31	119-4731-15	1/10W 47k ohm
C15	166-1007-50	10pF CH	IC2	051-6079-80	BA5830FM-E2	R32	119-3341-15	1/10W 330k ohm
C16	166-1007-50	10pF CH	IC3	051-3395-90	NJU7780U1-15-TES	R33	119-1041-15	1/10W 100k ohm
C17	168-1042-78	16V 0.1uF	IC4	051-3396-90	NJM2386ADL3-33-TE1	R34	119-1041-15	1/10W 100k ohm
C18	168-2222-55	2200pF K	J1	074-1138-65	SOCKET (15P)	R35	119-1041-15	1/10W 100k ohm
C19	168-1042-78	16V 0.1uF	J2	074-1138-60	SOCKET (10P)	R36	119-1011-15	1/10W 100 ohm
C20	168-1042-78	16V 0.1uF	J3	074-1205-88	SOCKET (38P)	R38	119-1041-15	1/10W 100k ohm
C22	168-6822-55	6800pF K	L1	119-0000-05	1/10 0ohm JW	R39	119-0000-05	1/10W 0 ohm JW
C24	168-3332-78	0.033uF K	L2	119-0000-05	1/10 0ohm JW	R41	119-4721-15	1/10W 4.7k ohm
C25	168-3332-78	0.033uF K	L3	119-0000-05	1/10 0ohm JW	R42	119-4721-15	1/10W 4.7k ohm
C26	168-1042-78	16V 0.1uF	L4	010-3104-50	30ohm/100MHz	R44	119-4731-15	1/10W 47k ohm
C28	168-1042-78	16V 0.1uF	L5	010-3406-66	22uH J	R45	119-1031-15	1/10W 1k ohm
C29	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188 Q,R	R46	119-4731-15	1/10W 47k ohm
C30	168-1042-78	16V 0.1uF	Q1	190-2060-00	2SA2060-TE12L	R47	119-4731-15	1/10W 47k ohm
C31	168-1042-78	16V 0.1uF	Q2	198-3018-00	2SK3018	R48	119-1031-15	1/10W 10k ohm
C33	168-1042-78	16V 0.1uF	Q3	198-3018-00	2SK3018	R49	119-1031-15	1/10W 10k ohm
C34	168-1042-78	16V 0.1uF	Q4	192-4155-51	2SC4155A S,T	R50	119-2211-15	1/10W 220 ohm
C35	168-5622-55	5600pF K	Q5	198-3018-00	2SK3018	R51	119-1031-15	1/10W 10k ohm
C36	168-1042-78	16V 0.1uF	Q6	192-4155-51	2SC4155A S,T	R52	119-1031-15	1/10W 10k ohm
C37	168-5622-55	5600pF K	Q7	198-3018-00	2SK3018	R53	119-2211-15	1/10W 220 ohm
C38	166-6801-50	68pF	Q8	198-3018-00	2SK3018	R54	119-3331-15	1/10W 33k ohm
C39	168-1042-78	16V 0.1uF	R1	119-2211-15	1/10W 220 ohm	R55	119-4721-15	1/10W 4.7k ohm
C40	168-1532-55	0.015uF K	R2	117-6811-15	1/8W 680 ohm	R56	119-3331-15	1/10W 33k ohm
C41	168-1042-78	16V 0.1uF	R3	117-0000-05	1/8W 0 ohm JW	R57	119-4721-15	1/10W 4.7k ohm
C42	168-1032-55	0.01uF K	R4	119-1001-15	1/10W 10 ohm	R58	119-3331-15	1/10W 33k ohm
C43	168-1042-78	16V 0.1uF	R5	119-2731-15	1/10W 27k ohm	R59	119-4721-15	1/10W 4.7k ohm
C44	168-1042-78	16V 0.1uF	R6	119-2731-15	1/10W 27k ohm	R60	119-3331-15	1/10W 33k ohm
C46	168-1522-55	1500pF K	R7	119-2221-15	1/10W 2.2k ohm	R61	119-4721-15	1/10W 4.7k ohm
C47	168-3322-55	3300pF K	R8	119-2731-15	1/10W 27k ohm	R62	119-3331-15	1/10W 33k ohm
C48	168-1032-55	0.01uF K	R9	119-2731-15	1/10W 27k ohm	R63	119-4721-15	1/10W 4.7k ohm
C49	168-1042-78	16V 0.1uF	R10	119-1051-15	1/10W 1M ohm	R64	119-1051-15	1/10W 1M ohm
C54	168-1532-55	0.015uF K	R11	119-2211-15	1/10W 220 ohm	R65	119-4701-15	1/10W 47 ohm
C55	168-1042-78	16V 0.1uF	R13	119-8231-15	1/10W 82k ohm	R66	119-1051-15	1/10W 1M ohm
C56	168-1042-78	16V 0.1uF	R14	119-1531-15	1/10W 15k ohm	R68	119-1031-15	1/10W 10k ohm
C58	166-6097-50	6pF CH	R15	119-8231-15	1/10W 82k ohm	TM1	073-0768-90	TERMINAL
C59	166-4701-50	47pF CH	R16	119-4731-15	1/10W 47k ohm	X1	061-3534-90	16.92MHz
C60	168-1042-78	16V 0.1uF	R17	119-5121-15	1/10W 5.1k ohm	PWB	039-3205-01	PWB(WITHOUT COMPONENTS)
C63	168-1042-78	16V 0.1uF	R18	119-1031-15	1/10W 10k ohm			
C64	042-1709-90	6.3V 47uF	R19	119-0000-05	1/10W 0 ohm JW			
C66	168-1042-78	16V 0.1uF						

SENSOR PWB(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB-32-TR	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB-32-TR	PWB	039-1944-21	PWB(WITHOUT COMPONENTS)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			