


■ EXPLODED VIEW • PARTS LIST:


DCP Section

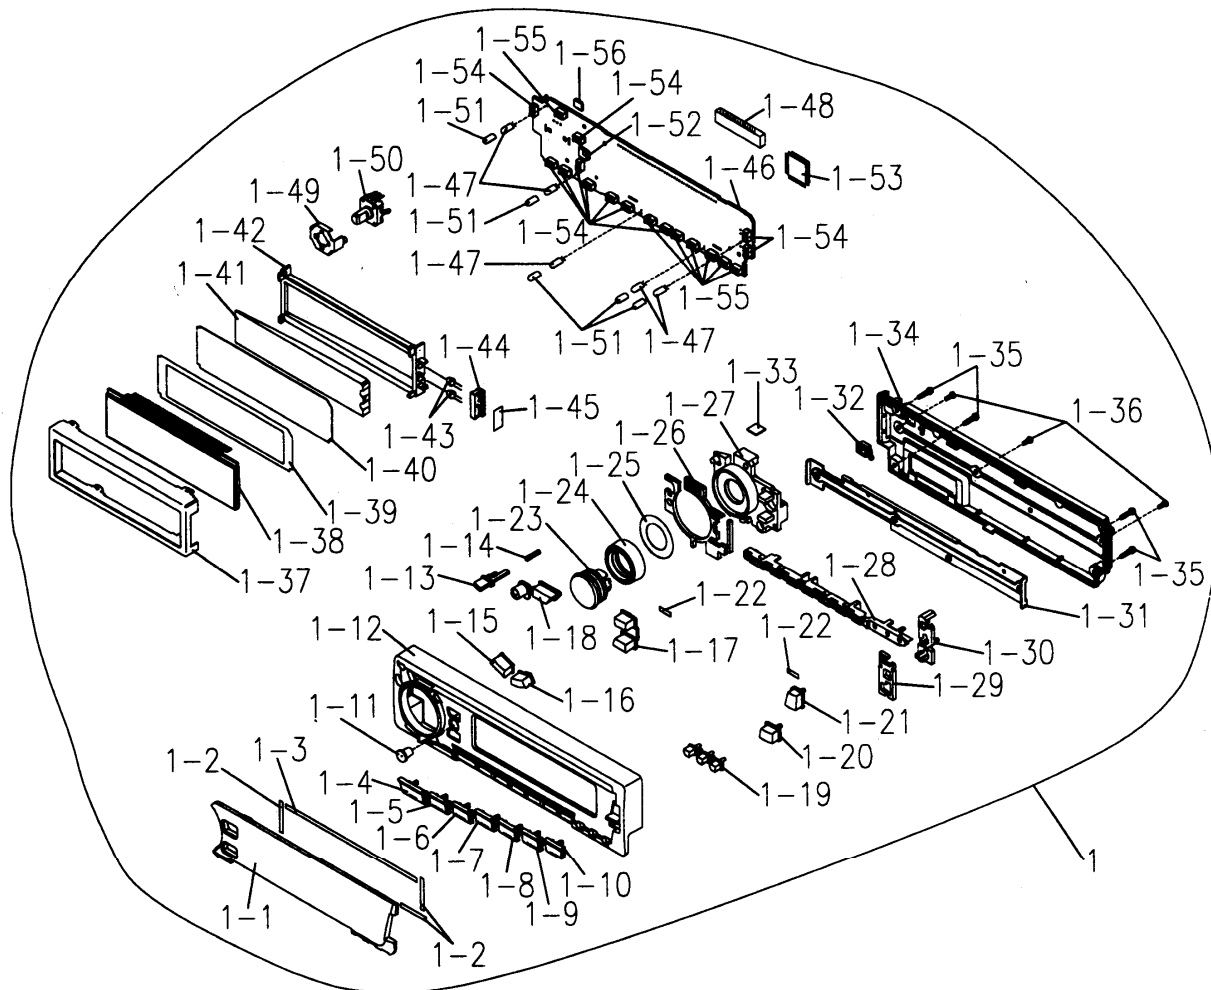

NO.	PARTS NO.	DESCRIPTION	QTY
1	DCP-340-600	DCP ASSY (PE-2385B)	1
	DCP-341-600	DCP ASSY (PE-2386B)	1
1-1	373-0952-00	DIAL-COVER (PE-2385B)	1
	373-0952-01	DIAL-COVER (PE-2386B)	1
1-2	347-6509-00	DOUBLE FACE	3
1-3	347-6505-00	DOUBLE FACE	1
1-4	382-6129-00	BUTTON (PE-2385B)	1
	382-6129-01	BUTTON (PE-2386B)	1
1-5	382-6130-00	BUTTON (PE-2385B)	1
	382-6130-01	BUTTON (PE-2386B)	1
1-6	382-6131-00	BUTTON (PE-2385B)	1
	382-6131-01	BUTTON (PE-2386B)	1
1-7	382-6132-00	BUTTON (PE-2385B)	1
	382-6132-01	BUTTON (PE-2386B)	1
1-8	382-6133-00	BUTTON (PE-2385B)	1
	382-6133-01	BUTTON (PE-2386B)	1
1-9	382-6134-00	BUTTON (PE-2385B)	1
	382-6134-01	BUTTON (PE-2386B)	1
1-10	382-6135-00	BUTTON (PE-2385B)	1
	382-6135-01	BUTTON (PE-2386B)	1
1-11	335-5828-00	IR-FILTER	1
1-12	370-5937-00	ESCUTCHEON (PE-2385B)	1
	370-5937-01	ESCUTCHEON (PE-2386B)	1
1-13	382-6138-00	BUTTON	1
1-14	750-3404-00	SPRING	1
1-15	382-6127-00	BUTTON (PE-2385B)	1
	382-6127-01	BUTTON (PE-2386B)	1
1-16	382-6126-00	BUTTON (PE-2385B)	1
	382-6126-01	BUTTON (PE-2386B)	1
1-17	382-6122-00	BUTTON (PE-2385B)	1
	382-6122-01	BUTTON (PE-2386B)	1
1-18	382-6128-00	BUTTON (PE-2385B)	1
	382-6128-01	BUTTON (PE-2386B)	1
1-19	382-6137-00	BUTTON	1
1-20	382-6125-01	BUTTON (PE-2385B)	1
	382-6125-03	BUTTON (PE-2386B)	1
1-21	382-6124-00	BUTTON (PE-2385B)	1
	382-6124-02	BUTTON (PE-2386B)	1

NO.	PARTS NO.	DESCRIPTION	QTY
1-22	347-6511-00	SHADE	2
1-23	380-5512-00	KNOB (PE-2385B)	1
	380-5512-01	KNOB (PE-2386B)	1
1-24	345-8553-00	RUBBER PART	1
1-25	347-6506-00	SHADE	1
1-26	345-8617-00	SPONGE	1
1-27	335-6518-00	ILLUMI PART	1
1-28	335-6517-00	ILLUMI PART	1
1-29	345-8616-00	SPONGE	1
1-30	335-6516-00	ILLUMI PART	1
1-31	331-2524-00	REAR-COVER-PLATE	1
1-32	382-5141-00	BUTTON	1
1-33	347-6525-00	SHADE	1
1-34	335-5837-01	REAR-COVER	1
1-35	716-0872-12	PAD SCREW	4
1-36	738-2035-17	PRECISION SCREW	3
1-37	331-2807-00	LCD COVER	1
1-38	379-1195-41	INDICATOR	1
1-39	347-6172-00	FILM	1
1-40	347-6173-00	SHADE	1
1-41	335-6211-00	LCD ILLUMI	1
1-42	335-6207-00	LCD HOLDER	1
1-43	001-7046-00	DIODE	2
1-44	335-6215-00	LED HOLDER	1
1-45	347-6510-00	SHADE	1
1-46	039-1890-01	SWITCH PWB (WITHOUT COMPONENT)	1
1-47	017-0444-00	PILOT LAMP (14V 50mA)	5
1-48	076-0535-01	PLUG	1
1-49	331-3133-00	JOG-SW-HOLDER	1
1-50	016-9900-81	VR W/SHAFT	1
1-51	345-4441-37	LAMP CAP	5
1-52	060-4008-00	IR-RECEIVE	1
1-53	051-6013-00	IC	1
1-54	013-6305-50	TACT SWITCH	11
1-55	013-6001-50	SWITCH	7
1-56	013-6510-50	ILLUMI SWITCH	1

Main Section

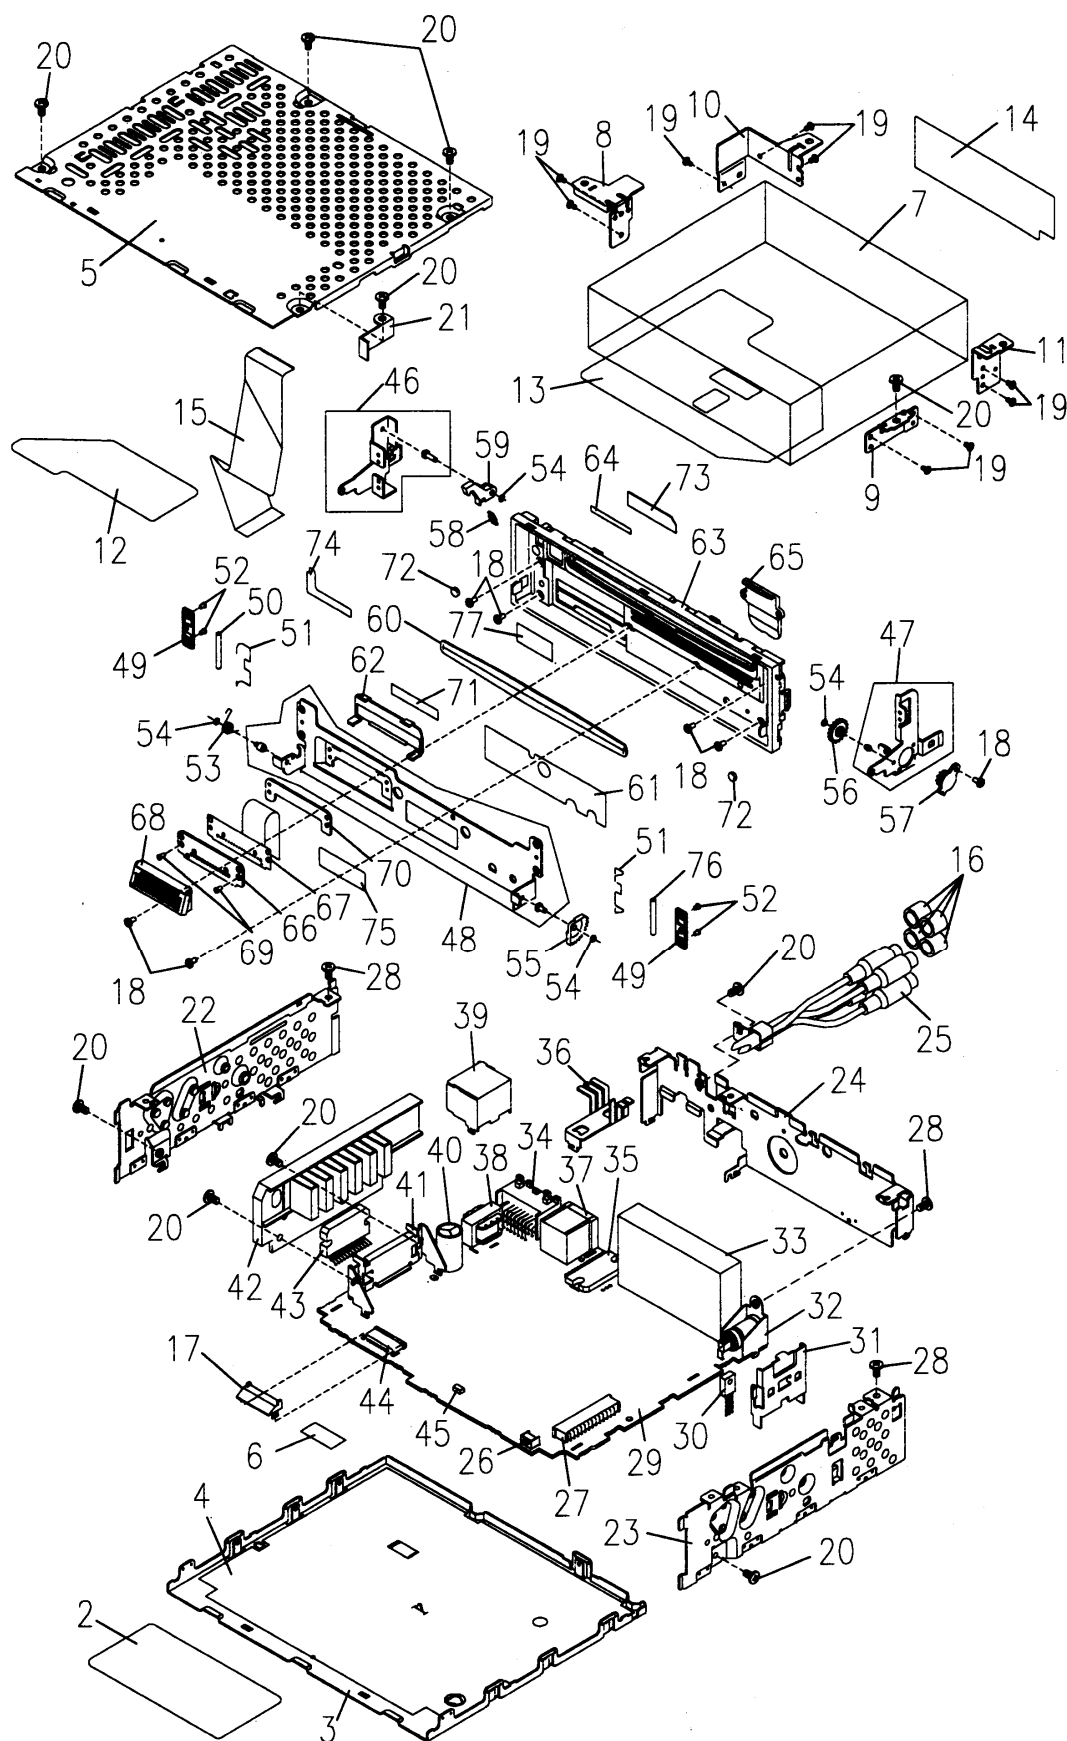

NO.	PARTS NO.	DESCRIPTION	QTY
2	286-9512-00	SETPLATE (PE2385B)	1
	286-9513-00	SETPLATE (PE2386B)	1
3	304-0460-01	LOWER-COVER	1
4	347-5918-00	INSULATOR	1
5	303-0472-00	UPPER-COVER	1
6	347-6215-00	SPACER FILM	1
7	929-0092-82	CD-MECH-MODULE	1
8	331-2491-00	CD-SUB-BRKT	1
9	331-2492-00	CD-SUB-BRKT	1
10	331-2493-00	CD-SUB-BRKT	1
11	331-2494-00	CD-SUB-BRKT	1
12	347-5416-00	INSULATOR	1
13	347-5916-02	INSULATOR	1
14	347-5215-00	INSULATOR	1
15	816-2391-00	FLATCABLE	1
16	345-3799-20	RUBBER CAP	4
17	335-6019-00	CN-COVER	1
18	780-2004-01	SCREW	7
19	716-0717-10	STEEL SCREW	9
20	731-3006-80	TAPTIGHT	10
21	331-2744-00	STOPPER	1
22	305-0274-01	SIDE-COVER(L)	1
23	305-0275-00	SIDE-COVER(R)	1
24	307-0626-01	REAR-COVER	1
25	855-5428-50	RCA PIN CORD	1
26	013-6100-00	SWITCH	1
27	074-1186-26	OUTLET SOCKET	1
28	714-3006-81	MACHINE SCREW	3
29	039-1889-00	MAIN PWB (WITHOUT COMPONENT)	1
30	103-2012-00	TRANSISTOR	1
31	313-1651-21	HEAT SINK	1
32	092-4000-50	ANT RECEPT	1
33	880-2087G	TUNER	1
34	074-1214-00	OUTLET SOCKET	1
35	051-3261-00	IC	1
36	313-1772-00	HEAT SINK	1
37	074-1126-10	OUTLET SOCKET	1
38	009-9006-60	CHOKE	1
39	331-2820-00	SHIELD CASE	1

NO.	PARTS NO.	DESCRIPTION	QTY
40	042-0447-00	ALUMI ELECTRO-C	1
41	331-2255-20	IC-HOLDER	1
42	313-1744-20	HEAT SINK	1
43	051-2031-11	IC	1
44	074-1198-68	OUTLET SOCKET	1
45	001-7011-95	DIODE	1
46	946-0071-01	ARM-L-ASSY	1
47	946-0072-01	ARM-R-ASSY	1
48	946-0070-02	HOLDER-ASSY	1
49	335-5821-01	SPING HOLDER	2
50	341-1704-20	ROLLER(LEFT)	1
51	750-3327-01	SPRING	2
52	738-1722-17	PRECISION SCREW	4
53	750-3342-00	SPRING	1
54	746-0761-00	WASHER	4
55	613-0684-00	FAN GEAR	1
56	613-0683-00	GEAR	1
57	613-0687-00	GEAR DAMPER	1
58	750-3341-00	SPRING	1
59	335-5820-00	HOOK	1
60	346-0114-01	LEATHER SHEET	1
61	290-7676-00	LABEL	1
62	335-5822-00	CN-COVER	1
63	370-5766-02	INNER-ES	1
64	347-5923-00	DOUBLE FACE	1
65	335-5817-00	ILLUMI PLATE	1
66	039-1306-00	DCP-PWB (WITHOUT COMPONENT)	1
67	039-1328-01	FPC (WITHOUT COMPONENT)	1
68	074-1145-02	OUTLET SOCKET	1
69	781-1735-00	SCREW	2
70	347-5935-00	SPACER	1
71	347-5919-00	SURGE PROTECT	1
72	345-8265-00	CUSHION	2
73	347-5920-00	COVER FILM	1
74	347-5941-00	HEAT-PROTECT	1
75	291-0078-00	STICKER	1
76	341-1710-00	ROLLER(RIGHT)	1
77	347-6356-00	DOUBLE FACE	1

■ ELECTRICAL PARTS LIST:

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 301	051-3261-00	BA4906	D 608	001-0466-01	S5688G	C 308	178-1032-78	25V 0.01 μ F
IC 501	051-5016-90	TDA7404	D 609	001-0466-01	S5688G	C 309	176-1011-00	50V 100PF
IC 601	051-2031-11	LA4743B	D 610	001-0330-00	1SS119	C 310	176-1011-00	50V 100PF
IC 701	051-7400-08	HD74LS07FP	D 701	001-0330-00	1SS119	C 401	183-1073-22	10V 100 μ F
IC 801	052-1914-20	μ PD178016AGC	D 702	001-0330-00	1SS119	C 402	183-1063-52	35V 10 μ F
Q 102	102-2712-51	2SC2712GL	D 802	001-7011-05	CL-150FG	C 404	183-1073-22	10V 100 μ F
Q 103	102-2712-51	2SC2712GL	D 803	001-0377-10	MA4030L	C 405	183-1063-52	35V 10 μ F
Q 108	125-2004-03	RN1403	D 804	001-0376-47	MTZ9.1JB	C 406	178-1532-78	25V 0.015 μ F
Q 301	102-2712-51	2SC2712GL	D 901	001-0330-00	1SS119	C 407	178-1532-78	25V 0.015 μ F
Q 303	102-2712-51	2SC2712GL	L 101	010-4007-00	5.6 μ H	C 408	178-1022-78	50V 1000PF
Q 304	102-2712-51	2SC2712GL	L 102	010-2230-14	2.2 μ H	C 409	178-1032-78	25V 0.01 μ F
Q 305	101-1237-00	2SB1237	L 103	010-2230-31	56 μ H	C 410	178-1032-78	25V 0.01 μ F
Q 306	125-0002-02	RN2402	L 505	010-2285-57		C 411	178-1032-78	25V 0.01 μ F
Q 307	125-0002-02	RN2402	L 601	009-9006-60	CHOKE	C 412	178-1022-78	50V 1000PF
Q 401	103-1858-00	2SD1858	L 701	010-2230-26	22 μ H	C 413	178-1022-78	50V 1000PF
Q 402	125-0002-02	RN2402	L 801	010-2230-38	220 μ H	C 501	178-1042-78	25V 0.1 μ F
Q 403	125-2004-06	RN1406	L 803	010-2230-26	22 μ H	C 502	178-1042-78	25V 0.1 μ F
Q 404	125-2004-06	RN1406	L 804	010-2230-14	2.2 μ H	C 503	183-1053-62	50V 1 μ F
Q 405	101-1243-00	2SB1243	X 801	061-1064-00	4.5MHz	C 504	183-1053-62	50V 1 μ F
Q 406	103-2012-00	2SD2012	C 101	176-2201-00	50V 22PF	C 505	183-1053-62	50V 1 μ F
Q 407	103-1858-00	2SD1858	C 102	178-1032-78	25V 0.01 μ F	C 506	183-1053-62	50V 1 μ F
Q 408	125-2004-02	RN1402	C 103	178-1032-78	25V 0.01 μ F	C 509	183-4763-32	16V 47 μ F
Q 501	103-1306-00	2SD1306	C 104	178-2232-78	25V 0.022 μ F	C 510	182-1063-33	16V 10 μ F
Q 502	103-1306-00	2SD1306	C 105	183-1073-22	10V 100 μ F	C 511	182-1063-33	16V 10 μ F
Q 503	103-1306-00	2SD1306	C 106	183-1073-22	10V 100 μ F	C 512	182-1063-33	16V 10 μ F
Q 504	103-1306-00	2SD1306	C 107	183-1073-22	10V 100 μ F	C 513	182-1063-33	16V 10 μ F
Q 601	125-0002-02	RN2402	C 108	176-1011-00	50V 100PF	C 514	183-1063-52	35V 10 μ F
Q 701	125-2004-02	RN1402	C 109	176-3311-00	50V 330PF	C 515	178-1022-78	50V 1000PF
Q 802	101-1243-00	2SB1243	C 110	178-1022-78	50V 1000PF	C 516	178-1022-78	50V 1000PF
Q 803	125-2004-02	RN1402	C 112	183-1053-62	50V 1 μ F	C 520	178-1022-78	50V 1000PF
Q 804	100-1162-00	2SA1162	C 113	176-1011-00	50V 100PF	C 521	178-1022-78	50V 1000PF
Q 805	103-1858-00	2SD1858	C 114	176-1011-00	50V 100PF	C 523	176-4711-00	50V 470PF
Q 806	100-1162-00	2SA1162	C 115	178-2732-78	25V 0.027 μ F	C 524	178-1022-78	50V 1000PF
Q 807	125-2004-02	RN1402	C 116	178-2732-78	25V 0.027 μ F	C 525	178-1022-78	50V 1000PF
Q 901	100-1162-00	2SA1162	C 118	178-2232-78	25V 0.022 μ F	C 601	172-2231-10	50V 0.022 μ F
D 301	001-0376-41	MTZ7.5JB	C 122	178-1032-78	25V 0.01 μ F	C 602	042-0447-00	16V 2200 μ F
D 302	001-0376-26	MTZ4.7JB	C 124	042-9002-01	50V 3.3 μ F (LN)	C 603	183-3343-62	50V 0.33 μ F
D 303	001-0466-01	S5688G	C 125	178-4722-78	50V 4700PF	C 604	183-2263-32	16V 22 μ F
D 306	001-0466-01	S5688G	C 126	178-6822-78	50V 6800PF	C 605	183-4763-32	16V 47 μ F
D 307	001-0330-00	1SS119	C 127	176-2201-00	50V 22PF	C 606	182-4746-63	50V 0.47 μ F
D 308	001-0330-00	1SS119	C 132	178-1032-78	25V 0.01 μ F	C 607	182-4746-63	50V 0.47 μ F
D 309	001-0330-00	1SS119	C 135	178-1032-78	25V 0.01 μ F	C 608	182-4746-63	50V 0.47 μ F
D 401	001-0376-32	MTZ5.6JB	C 136	178-1032-78	25V 0.01 μ F	C 609	182-4746-63	50V 0.47 μ F
D 402	001-0376-47	MTZ9.1JB	C 140	176-1011-00	50V 100PF	C 611	172-1041-10	50V 0.1 μ F
D 403	001-0330-00	1SS119	C 141	176-1011-00	50V 100PF	C 612	172-1041-10	50V 0.1 μ F
D 601	001-0592-00	RM4Z	C 143	176-2096-00	50V 2PF	C 613	172-1041-10	50V 0.1 μ F
D 602	001-0466-01	S5688G	C 301	178-1032-78	25V 0.01 μ F	C 614	172-1041-10	50V 0.1 μ F
D 603	001-0466-01	S5688G	C 302	172-1041-10	50V 0.1 μ F	C 619	176-1011-00	50V 100PF
D 604	001-0466-01	S5688G	C 303	172-1031-10	50V 0.01 μ F	C 701	178-4732-78	25V 0.047 μ F
D 605	001-0466-01	S5688G	C 304	176-1011-00	50V 100PF	C 801	176-2201-00	50V 22PF
D 606	001-0466-01	S5688G	C 305	183-1063-52	35V 10 μ F	C 802	176-2201-00	50V 22PF
D 607	001-0466-01	S5688G	C 307	176-1007-00	50V 10PF	C 803	178-4732-78	25V 0.047 μ F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 804	178-4732-78	25V 0.047 μ F	R 413	111-1221-91	1/4WSS 1.2K Ω	R 709	117-1031-10	1/10W 10K Ω
C 805	178-1032-78	25V 0.01 μ F	R 414	117-4731-10	1/10W 47K Ω	R 711	117-4731-10	1/10W 47K Ω
C 806	183-4763-32	16V 47 μ F	R 415	111-4711-91	1/4WSS 470 Ω	R 801	117-1041-10	1/10W 100K Ω
C 807	183-1073-22	10V 100 μ F	R 419	111-5611-91	1/4WSS 560 Ω	R 802	117-2221-10	1/10W 2.2K Ω
C 808	178-1032-78	25V 0.01 μ F	R 501	117-4721-10	1/10W 4.7K Ω	R 803	117-1031-10	1/10W 10K Ω
C 815	178-1042-78	25V 0.1 μ F	R 502	117-4721-10	1/10W 4.7K Ω	R 804	117-2221-10	1/10W 2.2K Ω
C 816	178-1022-78	50V 1000PF	R 503	117-1021-10	1/10W 1K Ω	R 805	117-1031-10	1/10W 10K Ω
C 817	176-1011-00	50V 100PF	R 504	117-1021-10	1/10W 1K Ω	R 806	117-1031-10	1/10W 10K Ω
C 818	178-1032-78	25V 0.01 μ F	R 505	117-1031-10	1/10W 10K Ω	R 807	117-1031-10	1/10W 10K Ω
C 820	178-4732-78	25V 0.047 μ F	R 506	117-1031-10	1/10W 10K Ω	R 808	117-1031-10	1/10W 10K Ω
C 822	178-1022-78	50V 1000PF	R 507	117-3311-10	1/10W 330 Ω	R 810	117-2231-10	1/10W 22K Ω
C 823	178-1022-78	50V 1000PF	R 508	117-3311-10	1/10W 330 Ω	R 811	117-1021-10	1/10W 1K Ω
R 102	117-1021-10	1/10W 1K Ω	R 509	117-1021-10	1/10W 1K Ω	R 812	117-1021-10	1/10W 1K Ω
R 105	117-4721-10	1/10W 4.7K Ω	R 510	117-1021-10	1/10W 1K Ω	R 814	117-1031-10	1/10W 10K Ω
R 106	117-1231-10	1/10W 12K Ω	R 511	117-1031-10	1/10W 10K Ω	R 818	117-4731-10	1/10W 47K Ω
R 111	117-1021-10	1/10W 1K Ω	R 512	117-1031-10	1/10W 10K Ω	R 819	117-1041-10	1/10W 100K Ω
R 112	117-1021-10	1/10W 1K Ω	R 513	117-3311-10	1/10W 330 Ω	R 820	117-1041-10	1/10W 100K Ω
R 113	117-5631-10	1/10W 56K Ω	R 514	117-3311-10	1/10W 330 Ω	R 821	117-2221-10	1/10W 2.2K Ω
R 116	117-2221-10	1/10W 2.2K Ω	R 515	117-4721-10	1/10W 4.7K Ω	R 822	117-1031-10	1/10W 10K Ω
R 117	117-2221-10	1/10W 2.2K Ω	R 516	117-4721-10	1/10W 4.7K Ω	R 823	117-2221-10	1/10W 2.2K Ω
R 121	117-4741-10	1/10W 470K Ω	R 517	117-4721-10	1/10W 4.7K Ω	R 824	111-1011-91	1/4WSS 100 Ω
R 122	117-1011-10	1/10W 100 Ω	R 518	117-4721-10	1/10W 4.7K Ω	R 825	111-1011-91	1/4WSS 100 Ω
R 301	117-4731-10	1/10W 47K Ω	R 519	117-4721-10	1/10W 4.7K Ω	R 826	117-1821-10	1/10W 1.8K Ω
R 302	117-2231-10	1/10W 22K Ω	R 520	117-4721-10	1/10W 4.7K Ω	R 827	117-1041-10	1/10W 100K Ω
R 303	117-2231-10	1/10W 22K Ω	R 524	117-1031-10	1/10W 10K Ω	R 828	117-2221-10	1/10W 2.2K Ω
R 305	117-2231-10	1/10W 22K Ω	R 602	117-1031-10	1/10W 10K Ω	R 829	117-4711-10	1/10W 470 Ω
R 308	117-4721-10	1/10W 4.7K Ω	R 604	117-1231-10	1/10W 12K Ω	R 830	117-1031-10	1/10W 10K Ω
R 309	117-4721-10	1/10W 4.7K Ω	R 605	117-4721-10	1/10W 4.7K Ω	R 831	117-1021-10	1/10W 1K Ω
R 311	111-3321-91	1/4WSS 3.3K Ω	R 606	117-4721-10	1/10W 4.7K Ω	R 832	117-1031-10	1/10W 10K Ω
R 312	117-1031-10	1/10W 10K Ω	R 607	117-4721-10	1/10W 4.7K Ω	R 833	117-2231-10	1/10W 22K Ω
R 313	117-4721-10	1/10W 4.7K Ω	R 608	117-4721-10	1/10W 4.7K Ω	R 834	117-4731-10	1/10W 47K Ω
R 314	117-1031-10	1/10W 10K Ω	R 610	117-4721-10	1/10W 4.7K Ω	R 901	117-1031-10	1/10W 10K Ω
R 318	117-1031-10	1/10W 10K Ω	R 701	117-4721-10	1/10W 4.7K Ω	R 902	117-4721-10	1/10W 4.7K Ω
R 402	117-1041-10	1/10W 100K Ω	R 702	117-4721-10	1/10W 4.7K Ω	R 903	117-4731-10	1/10W 47K Ω
R 403	117-1041-10	1/10W 100K Ω	R 703	117-1021-10	1/10W 1K Ω	SUP101	060-0122-91	DSP-141N
R 404	117-1041-10	1/10W 100K Ω	R 704	117-4721-10	1/10W 4.7K Ω	CN 101	074-1198-68	OUTLET SOCKET
R 406	117-4731-10	1/10W 47K Ω	R 705	117-1021-10	1/10W 1K Ω	CN 102	074-1214-00	OUTLET SOCKET
R 407	111-2291-91	1/4WSS 2.2 Ω	R 706	117-4721-10	1/10W 4.7K Ω	CN 105	074-1126-10	OUTLET SOCKET
R 408	111-2291-91	1/4WSS 2.2 Ω	R 707	117-1021-10	1/10W 1K Ω	CN 106	074-1186-26	OUTLET SOCKET
R 412	111-5611-91	1/4WSS 560 Ω	R 708	111-1001-91	1/4WSS 10 Ω	SW 301	013-6100-00	RESET SWITCH


Switch PWB (B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 101	051-6013-00	LC75854W	R 108	032-0092-80	1/10W 330Ω 1%	S 105	013-6001-50	SKQCAB
D 101	001-0529-41	MA8075M	R 109	032-0092-80	1/10W 330Ω 1%	S 106	013-6305-00	SKQMAH
D 102	001-0529-41	MA8075M	R 110	032-0092-80	1/10W 330Ω 1%	S 107	013-6305-00	SKQMAH
D 103	001-7046-00	NSPW310BS	R 111	032-0092-80	1/10W 330Ω 1%	S 108	013-6305-00	SKQMAH
D 104	001-7046-00	NSPW310BS	R 112	119-1021-10	1/16W 1KΩ	S 109	013-6001-50	SKQCAB
C 101	168-4732-78	25V 0.047 μF	R 113	119-1011-10	1/16W 100Ω	S 110	013-6001-50	SKQCAB
C 102	168-4732-78	25V 0.047 μF	R 114	119-1021-10	1/16W 1KΩ	S 111	013-6305-00	SKQMAH
C 103	168-1022-55	50V 1000PF	CN 107	076-0535-01	PLUG	S 112	013-6001-50	SKQCAB
C 104	168-4732-78	25V 0.047 μF	PL 101	017-0444-00	14V 50mA	S 113	013-6305-00	SKQMAH
C 105	042-0416-51	6.3V 10 μF	PL 102	017-0444-00	14V 50mA	S 114	013-6001-50	SKQCAB
R 101	119-2221-10	1/16W 2.2KΩ	PL 103	017-0444-00	14V 50mA	S 115	013-6305-00	SKQMAH
R 102	119-2221-10	1/16W 2.2KΩ	PL 104	017-0444-00	14V 50mA	S 116	013-6001-50	SKQCAB
R 103	119-2221-10	1/16W 2.2KΩ	PL 105	017-0444-00	14V 50mA	S 117	013-6305-00	SKQMAH
R 104	119-4731-10	1/16W 47KΩ	S 101	013-6001-50	SKQCAB	S 118	016-9900-81	SIM-026MT
R 105	119-1031-10	1/16W 10KΩ	S 102	013-6305-00	SKQMAH	S 119	013-6510-50	LUMI SWITCH
R 106	119-3921-10	1/16W 3.9KΩ	S 103	013-6305-00	SKQMAH	S 120	013-6305-00	SKQMAH
R 107	119-1241-10	1/16W 120KΩ	S 104	013-6305-00	SKQMAH	IR 101	060-4008-00	RS-171

■ EXPLODED VIEW:

CD mechanism section 929-0092-82(BB-CD)

Drive unit section

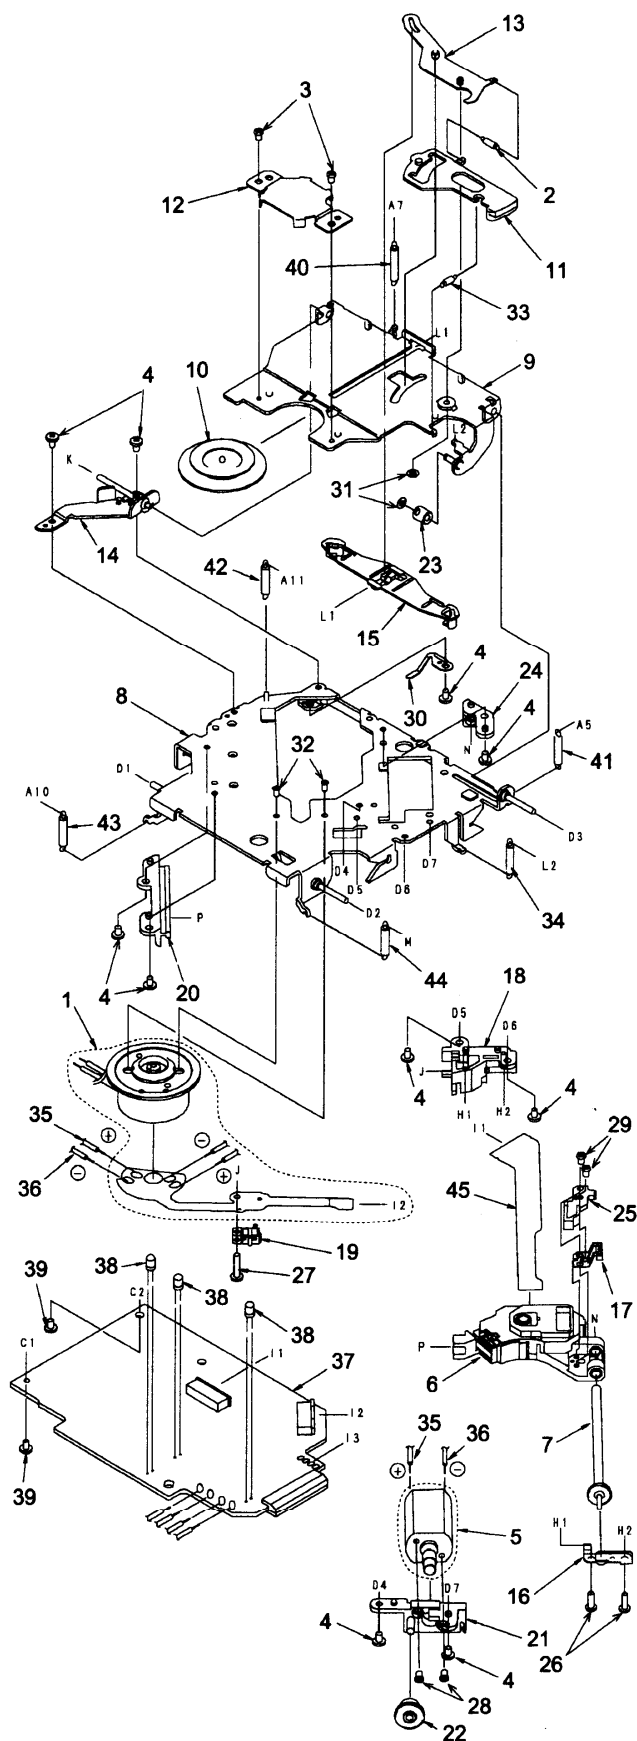

■ PARTS LIST:

CD mechanism section 929-0092-82(BB-CD)


Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Drive unit section

NO.	PARTS NO.	DESCRIPTION	QTY	NO.	PARTS NO.	DESCRIPTION	QTY
1	SMA-151-100	MOTOR ASSY (SPINDLE)	1	25	621-0375-00	SH-BASE	1
2	750-3098-00	L-LINK SPRING	1	26	716-0675-00	SCREW (M2x 5.5)	2
3	716-1468-00	SCREW (M2x 2.5)	2	27	716-1555-00	WAVE SCREW (φ2x 8)	1
4	716-2003-81	SCREW (M2x 3)	10	28	732-2004-11	SEMS SCREW (M2x 4)	2
5	SMA-146-100	MOTOR ASSY (SLED)	1	29	739-1735-17	PRECISION SCREW (M1.7x 3.5)	2
6	969-0008-00	PICK UP UNIT	1	30	620-0690-01	RATTLE PLATE	1
7	HBS-432-100	LS-GEAR ASSY	1	31	746-0761-00	WASHER	2
8	966-0447-07	DR-PLATE-ASSY	1	32	716-1733-00	SCREW (M1.7x 2.3)	2
9	966-0449-04	CLAMP-LINK-ASSY	1	33	750-3099-00	ES-SPRING	1
10	621-0205-02	CLAMPER RING	1	34	750-3097-03	CLAMPER SPRING	1
11	621-0251-03	LOCK LINK	1	35	816-2373-00	LEAD WIRE (WHT)	1
12	620-0198-03	CLAMPER PLATE	1	36	816-2372-00	LEAD WIRE (BLU)	1
13	966-0314-01	STOP LINK-ASSY	1	37	039-1732-01	CD PWB (WITHOUT COMPONENT)	1
14	966-0448-01	SIDE PLATE-ASSY	1	38	001-0563-00	LED	3
15	621-0252-03	DISC STOPPER	1	39	716-1670-00	SCREW (M2x 4)	2
16	620-0491-03	SPRING PLATE	1	40	750-3202-00	CENTER SPRING-B	1
17	966-0454-00	SCREW H-RACK-ASSY	1	41	750-3096-01	DR-SPRING R	1
18	621-0358-02	LS-HOLDER-F	1	42	750-3164-00	DR-SPRING LR	1
19	013-7100-00	SWITCH (LIMIT)	1	43	750-3188-00	DR-SPRING F-B	1
20	621-0357-03	PICK UP GUIDE	1	44	750-3201-00	DR-SPRING F-R	1
21	621-0253-02	MOTOR HOLDER	1	45	039-1587-00	FPC (WITHOUT COMPONENT)	1
22	621-0255-02	SECOND GEAR	1				
23	622-1073-02	CLAMPER ROLLER	1				
24	621-0359-02	LS-HOLDER-R	1				

MECH chassis section

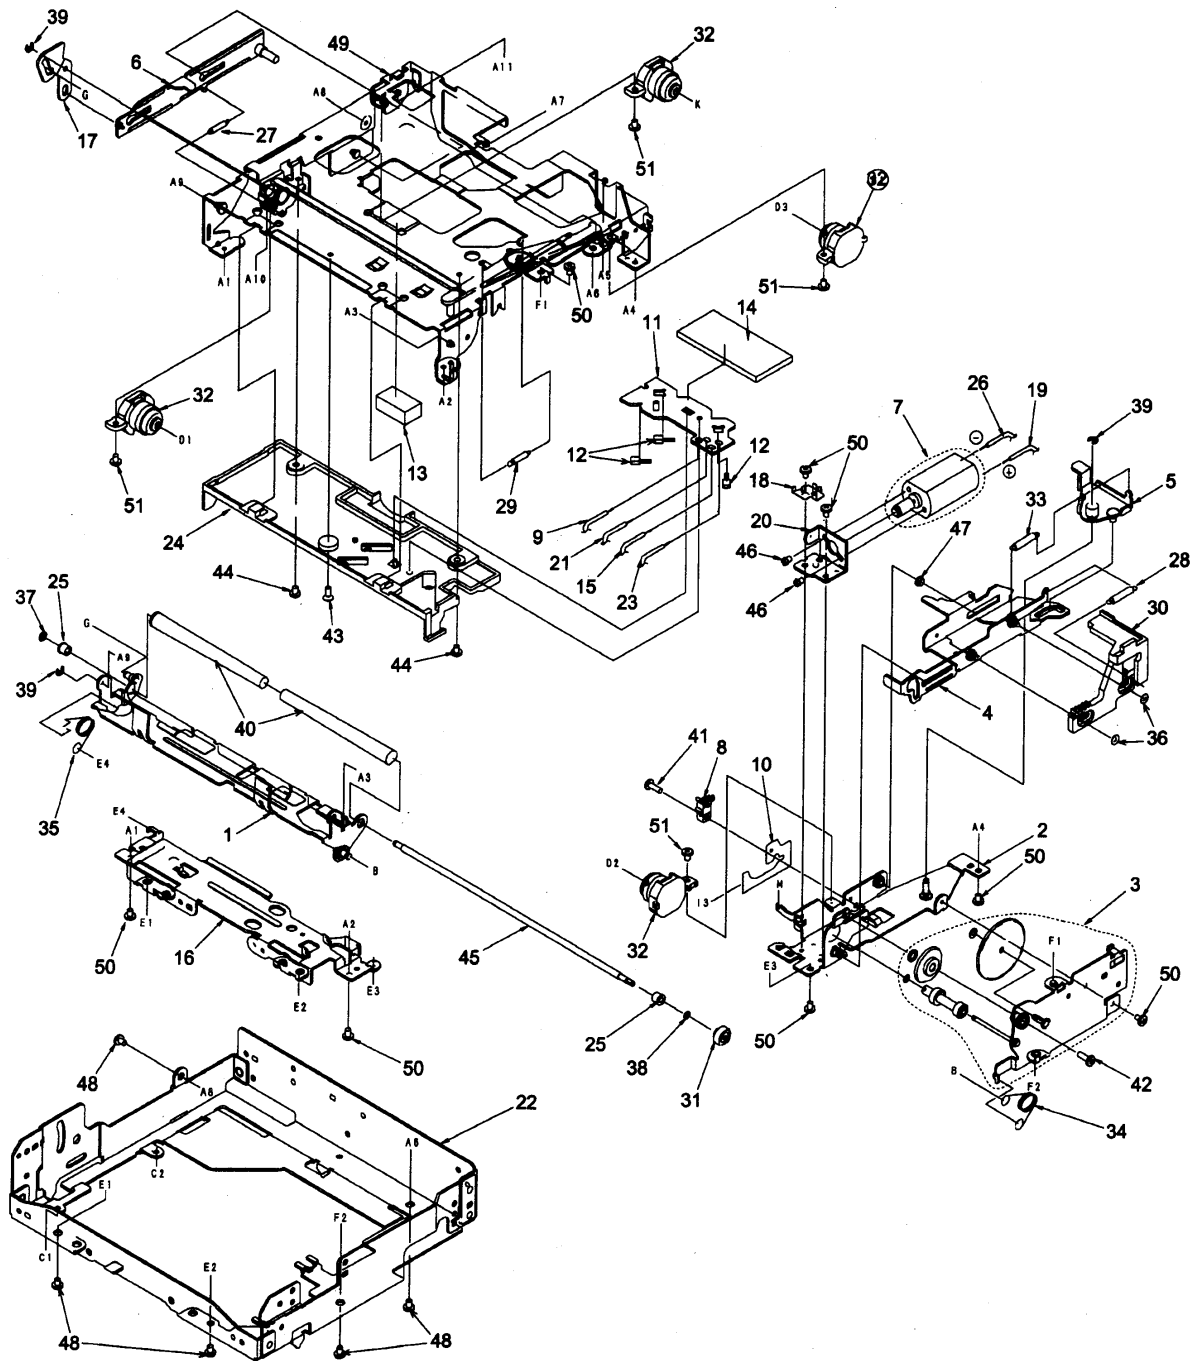

MECH chassis section

NO.	PARTS NO.	DESCRIPTION	QTY
1	966-0309-05	L-DISC-G-ASSY	1
2	966-0310-06	SHIFT-P-CH-ASSY	1
3	HBS-430-100	GEAR PLATE ASSY	1
4	966-0312-06	SHIFT-PLATE-ASSY	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1
7	SMA-147-100	MOTOR ASSY (LOADING)	1
8	013-3879-01	CHUCKING SWITCH	1
9	804-4910-60	VINYL-COAT-WIRE (YEL)	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1
12	060-0252-01	PHOTO-TR	3
13	345-7513-01	CLAMPER SHEET	1
14	345-7514-00	SENSOR PWB SHEET	1
15	802-4910-60	VINYL-COAT-WIRE (RED)	1
16	620-0485-04	FRONT PLATE	1
17	620-0488-01	S-L-LINK PLATE	1
18	620-0489-02	MOTOR PLATE	1
19	802-4904-60	VINYL-COAT-WIRE (RED)	1
20	620-0492-01	MOTOR BRACKET	1
21	801-4910-60	VINYL-COAT-WIRE (BRN)	1
22	620-0773-01	CD-MECH-BRKT	1
23	800-4910-60	VINYL-COAT-WIRE (BLK)	1
24	621-0402-01	U-DISC GUIDE-F	1
25	621-0243-02	ROLLER SLEEVE	2

NO.	PARTS NO.	DESCRIPTION	QTY
26	800-4904-60	VINYL-COAT-WIRE (BLK)	1
27	750-3189-00	SIDE-L-SPRING	1
28	750-3098-00	L-LINK SPRING	1
29	750-3094-00	S-ARM SPRING	1
30	621-0248-07	RACK GEAR	1
31	621-0249-02	ROLLER GEAR	1
32	629-0074-00	DAMPER	4
33	750-3092-03	SHIFT SPRING	1
34	750-3091-03	ROADING-SPRING-R	1
35	750-3090-02	ROADING-SPRING-L	1
36	746-0877-02	WASHER	2
37	746-0762-00	WASHER	1
38	746-0712-03	WASHER	1
39	743-1500-10	E-RING	3
40	621-0258-03	LOADING ROLLER	2
41	716-1742-00	SCREW (M2x 5)	1
42	716-1704-00	SCREW (M2x 7)	1
43	716-1677-00	SCREW (M2x 5)	1
44	716-1507-00	SCREW (M2x 3)	2
45	622-1072-05	ROLLER SHAFT	1
46	716-1468-00	SCREW (M2x 2.5)	2
47	622-1219-01	SHIFT ROLLER	1
48	714-2603-81	SCREW (M2.6x 3)	5
49	966-0308-11	CHASSIS ASSY	1
50	714-2003-81	SCREW (M2x 3)	8
51	716-1670-00	SCREW (M2x 4)	4

■ ELECTRICAL PARTS LIST:

CD mechanism section (B3)

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	163-1073-10	6.3V 100 μ F	C36	176-6801-00	68pF CH	R8	117-1041-10	1/10W 100K Ω
C3	178-1042-78	0.1 μ F	C37	176-2201-00	22pF CH	R9	117-1031-10	1/10W 10K Ω
C4	178-2222-78	2200pF	C38	178-1042-78	0.1 μ F	R10	117-4731-10	1/10W 47K Ω
C5	178-1042-78	0.1 μ F	C39	163-4763-05	4V 47 μ F	R12	117-4741-10	1/10W 470K Ω
C6	178-1042-78	0.1 μ F	C44	178-2242-78	0.22 μ F	R13	117-3331-10	1/10W 33K Ω
C7	178-1042-78	0.1 μ F	C45	178-2242-78	0.22 μ F	R14	117-3321-10	1/10W 3.3K Ω
C8	176-1501-00	15pF CH	C46	163-4763-10	6.3V 47 μ F	R15	117-1031-10	1/10W 10K Ω
C9	176-1501-00	15pF CH	C47	178-8222-78	8200pF	R16	117-3321-10	1/10W 3.3K Ω
C10	176-1201-00	12pF CH	C48	178-1042-78	0.1 μ F	R17	117-3321-10	1/10W 3.3K Ω
C11	178-1042-78	0.1 μ F	C50	163-1073-10	6.3V 100 μ F	R18	117-3321-10	1/10W 3.3K Ω
C13	178-1042-78	0.1 μ F	C51	178-1042-78	0.1 μ F	R19	117-3321-10	1/10W 3.3K Ω
C14	178-1042-78	0.1 μ F	C52	178-2232-78	0.022 μ F	R20	117-3321-10	1/10W 3.3K Ω
C15	178-1042-78	0.1 μ F	C54	176-2201-00	22pF CH	R21	117-2221-10	1/10W 2.2K Ω
C16	178-1042-78	0.1 μ F	C61	178-1042-78	0.1 μ F	R22	117-8211-10	1/10W 820K Ω
C17	163-1073-31	16V 100 μ F	C63	178-1042-78	0.1 μ F	R23	117-9131-10	1/10W 91K Ω
C18	176-4701-00	47pF CH	C64	178-1042-78	0.1 μ F	R24	117-1041-10	1/10W 100K Ω
C19	178-1532-78	0.015 μ F	C65	178-1042-78	0.1 μ F	R25	117-1041-10	1/10W 100K Ω
C20	178-1032-78	0.01 μ F	D4	001-0516-00	MA111	R26	117-1841-10	1/10W 180K Ω
C21	178-2722-78	2700pF	IC1	051-5704-00	TA2096FN	R27	117-1841-10	1/10W 180K Ω
C22	178-4722-78	4700pF	IC2	051-6342-00	TC9462F	R28	117-2211-10	1/10W 220 Ω
C23	178-1042-78	0.1 μ F	IC3	051-6045-08	BA5984FP	R29	117-2201-10	1/10W 22 Ω
C24	178-1042-78	0.1 μ F	J1	074-1138-66	16P	R30	117-1041-10	1/10W 100K Ω
C25	178-1042-78	0.1 μ F	J2	074-1138-06	6P	R31	117-1041-10	1/10W 100K Ω
C26	178-4712-78	470pF	L1	010-2155-93	10 μ H	R32	117-1041-10	1/10W 100K Ω
C27	178-4712-78	470pF	L3	010-2199-74	10 μ H J	R33	117-1041-10	1/10W 100K Ω
C28	178-4732-78	0.047 μ F	Q1	101-1188-50	2SB1188PQR	R34	117-1041-10	1/10W 100K Ω
C29	178-4732-78	0.047 μ F	R1	117-2211-10	1/10W 220 Ω	R35	117-2241-10	1/10W 220K Ω
C30	178-4732-78	0.047 μ F	R2	117-2211-10	1/10W 220 Ω	R36	117-1041-10	1/10W 100K Ω
C31	178-4732-78	0.047 μ F	R3	117-5611-10	1/10W 560 Ω	R37	117-1041-10	1/10W 100K Ω
C32	163-4763-05	4V 47 μ F	R4	117-5611-10	1/10W 560 Ω	R38	117-8231-10	1/10W 82K Ω
C33	163-4763-05	4V 47 μ F	R5	117-4711-10	1/10W 470 Ω	R39	117-1841-10	1/10W 180K Ω
C34	176-1801-00	18pF CH	R6	117-3311-10	1/10W 330 Ω	X1	061-3500-90	16.920MHz
C35	176-6097-00	6pF CH	R7	117-4721-10	1/10W 4.7K Ω			

Sensor PWB section (B4)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F	Q102	060-0252-01	PT4850F	Q103	060-0252-01	PT4850F

Chuckling SW PWB section (B5)

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit SW PWB (Motor assy/SMA-151-100) section (B6)

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11