



EXPLODED VIEW (CD MECHANISM)

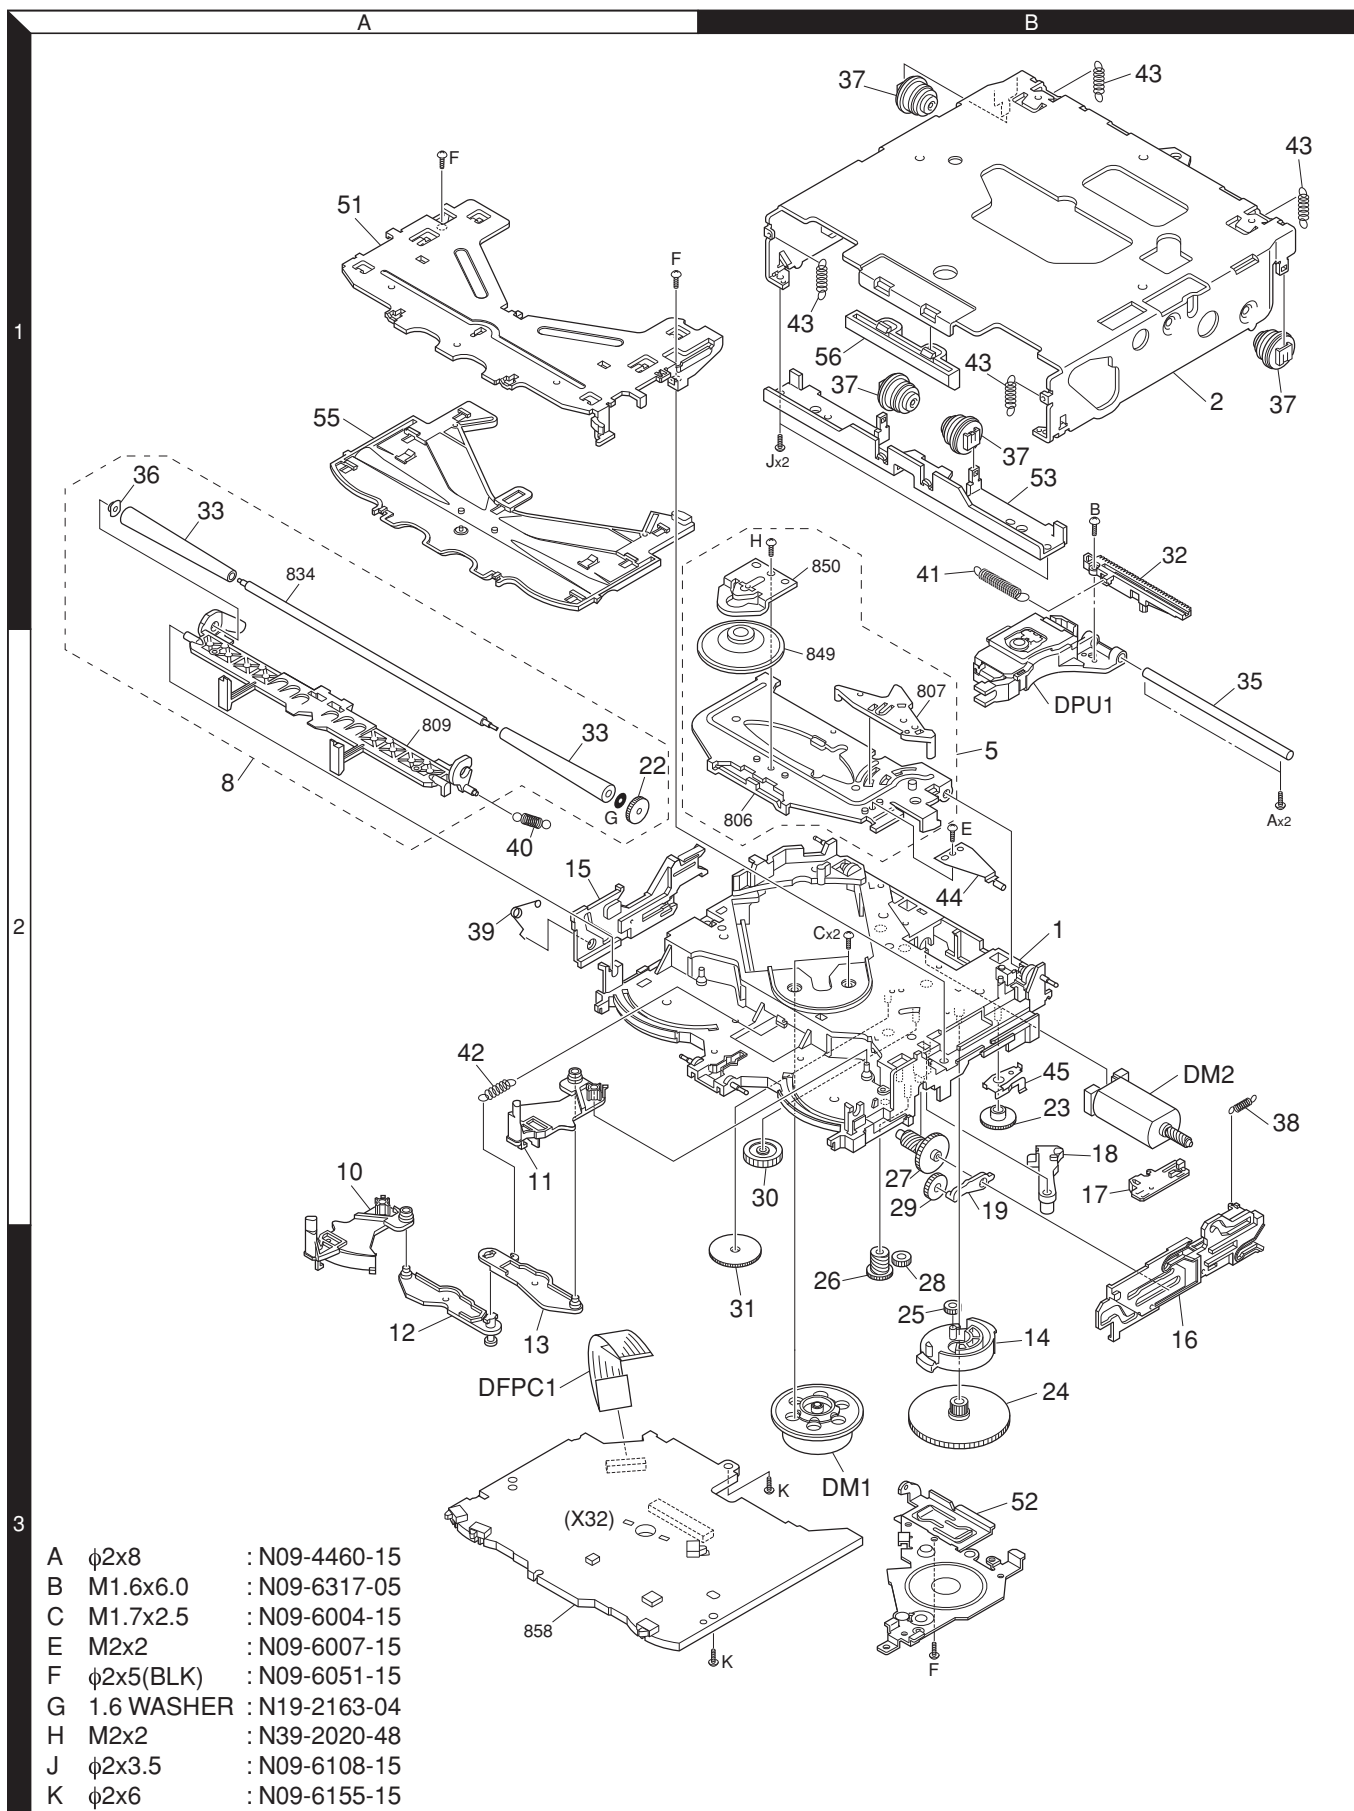

Parts with the exploded numbers larger than 700 are not supplied.

EXPLODED VIEW (UNIT)

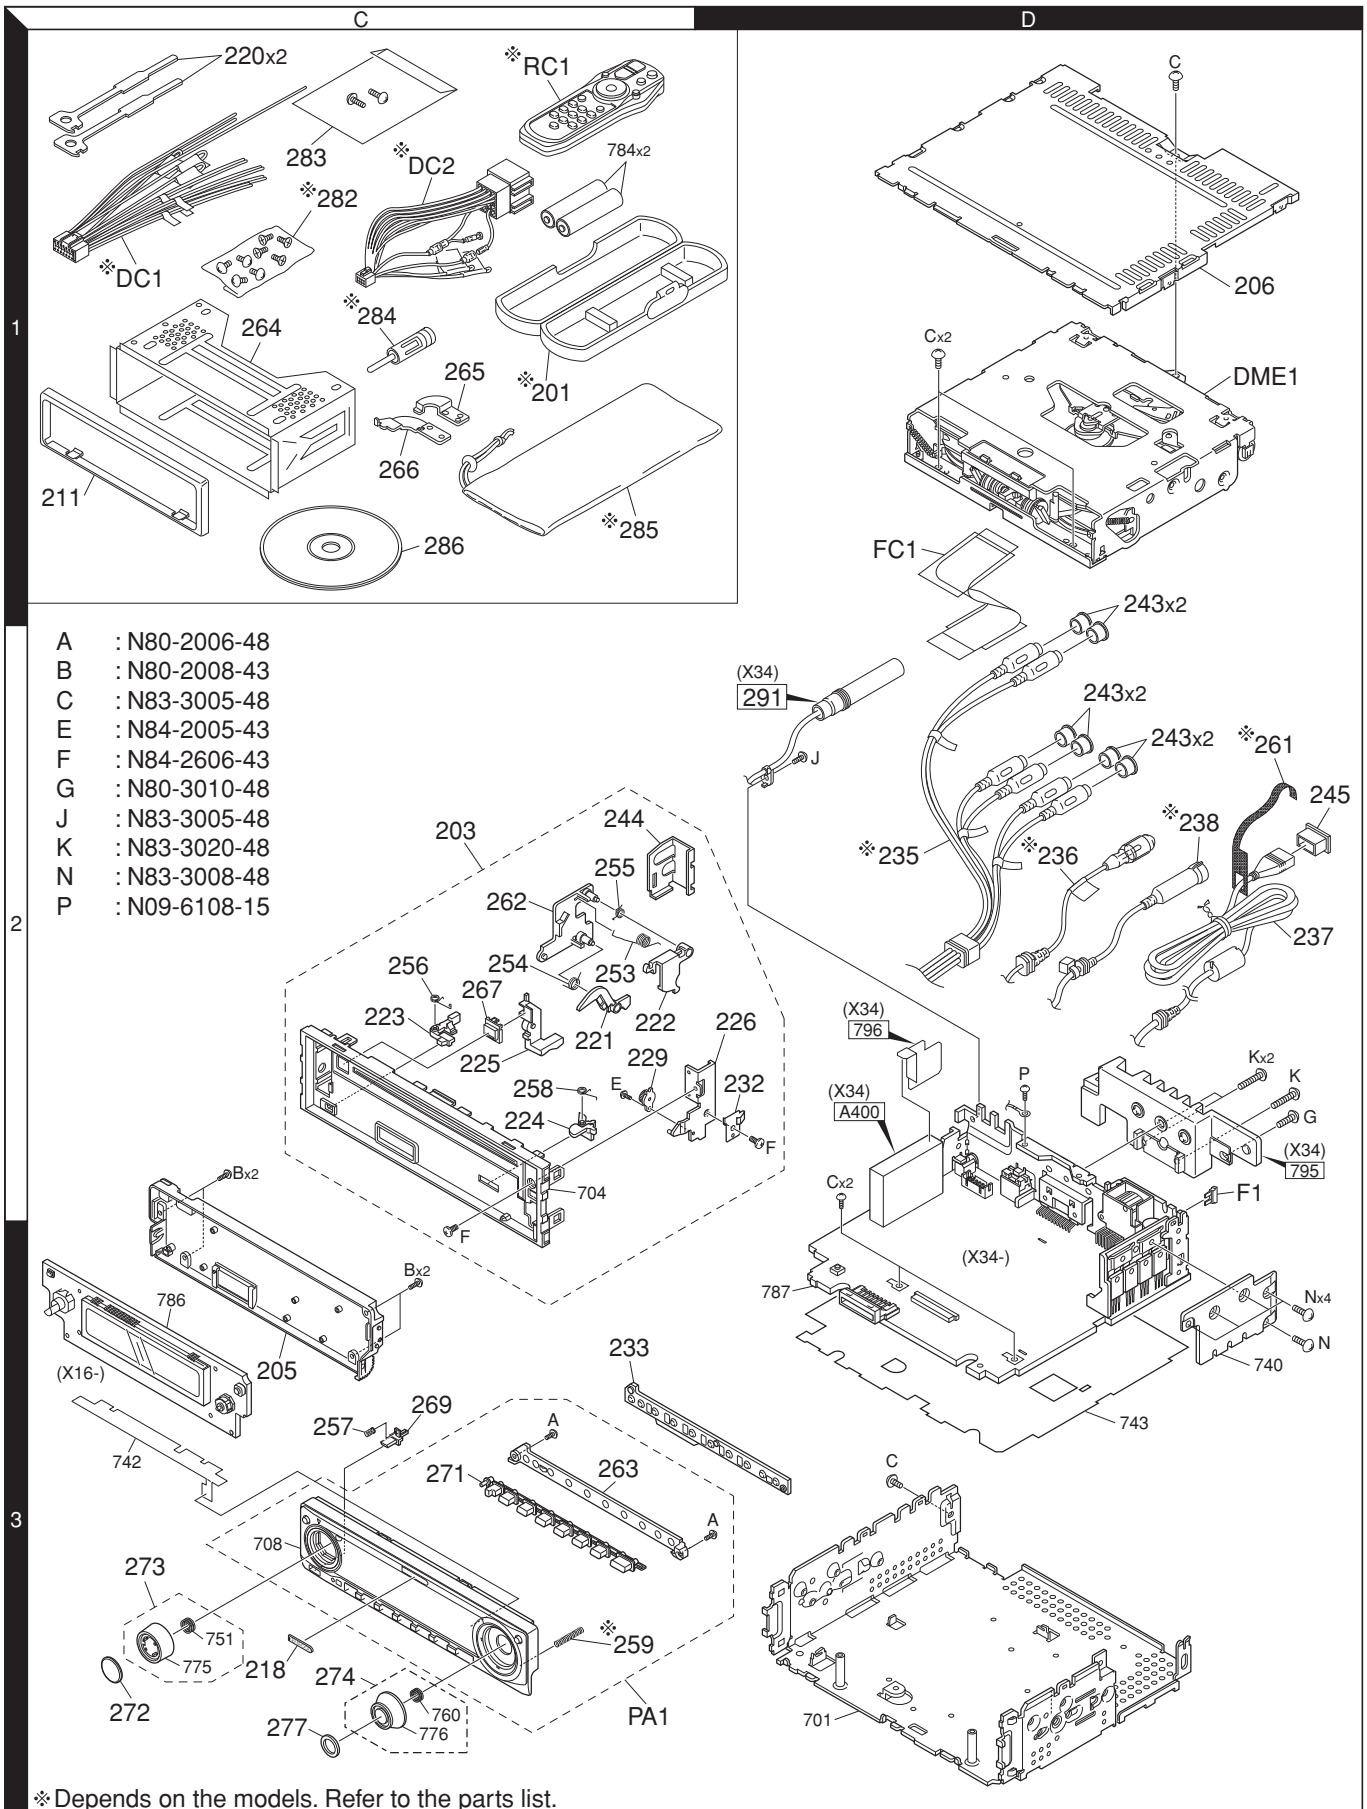

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KDC-MP735U/W7537U/W7537UY/X7006U/X791					
201	1C		A02-2736-03	PLASTIC CABINET ASSY	M1
203	2C		A22-3059-12	SUB PANEL ASSY	
205	3C	*	A46-1851-01	REAR COVER	
206	1D	*	A52-0886-02	TOP PLATE	
PA1	3C	*	A64-4019-01	PANEL ASSY	K
PA1	3C	*	A64-4020-01	PANEL ASSY	K1
PA1	3C	*	A64-4021-01	PANEL ASSY	E1E2
PA1	3C	*	A64-4022-01	PANEL ASSY	M1
RC1	1C	*	A70-2085-05	REMOTE CONTROLLER ASSY (RC-547)	KK1E2
RC1	1C	*	A70-2085-05	REMOTE CONTROLLER ASSY (RC-547)	M1
-		*	B46-0690-04	ID CARD	KK1
-		*	B46-0691-04	ID CARD	E1E2M1
-		*	B59-1872-00	SUB-INST. MANUAL (ENGLISH)	
-		*	B59-1873-00	SUB-INST. MANUAL (FRE.SPA.)	KK1E1
-		*	B59-1874-00	SUB-INST. MANUAL (GER.DUT.ITA.)	E1
-		*	B59-1875-00	SUB-INST. MANUAL (RUSSIAN)	E2
-		*	B59-1876-00	SUB-INST. MANUAL (ENG.T-CHI.)	M1
-		*	B64-3625-00	INST. MANUAL (ENGLISH)	KK1
-		*	B64-3626-00	INST. MANUAL (FRE.SPA.)	KK1
-		*	B64-3627-00	INST. MANUAL (ENG.T-CHI)	M1
-		*	B64-3628-00	INST. MANUAL (ARABIC)	M1
-		*	B64-3629-00	INST. MANUAL (ENGLISH)	E1E2
-		*	B64-3630-00	INST. MANUAL (FRE.GER.)	E1
-		*	B64-3631-00	INST. MANUAL (DUT.ITA.)	E1
-		*	B64-3632-00	INST. MANUAL (SPA.POR.)	E1
-		*	B64-3633-00	INST. MANUAL (RUSSIAN)	E2
211	1C		B07-3125-01	ESCUTCHEON	KE1E2
211	1C		B07-3125-01	ESCUTCHEON	M1
211	1C		B07-3126-01	ESCUTCHEON	K1
218	3C		B43-1518-04	BADGE	
220	1C		D10-4589-04	LEVER	
221	2C		D10-4865-03	LEVER (PUSH)	
222	2C		D10-4866-03	LEVER (HOOK)	
223	2C		D10-4867-04	LEVER (LOCK)	
224	2C		D10-4868-04	LEVER (DETECT)	
225	2C		D10-4869-03	LEVER (EJECT)	
226	2D		D10-4870-04	ARM ASSY	
229	2C		D39-0255-05	DAMPER	
232	2D		E29-2028-04	LEAD PLATE	
233	3C		E29-2090-03	CONDUCTIVE RUBBER	
235	2D	*	E30-6631-05	CORD WITH PINPLUG (3-PRE-GOLD)	K
235	2D	*	E30-6632-05	CORD WITH PINPLUG (3-PREOUT)	K1M1
235	2D	*	E30-6633-05	CORD WITH PINPLUG (2-PREOUT)	E1E2
236	2D	*	E30-6639-05	CORD WITH CONNECTOR (REMOTE)	KM1
237	2D	*	E30-6638-15	CORD WITH CONNECTOR (USB)	
238	2D	*	E30-6640-05	CORD WITH DIN CONNECTOR (OPEL)	E1E2
DC1	1C		E30-6408-05	DC CORD	KM1
DC1	1C		E30-6414-05	DC CORD	K1
DC2	1C		E30-6412-05	DC CORD	E1E2
FC1	1D		E39-0736-05	FLAT CABLE (24-PIN)	
243	2D		F29-0626-04	INSULATING COVER	
244	2C		F31-0716-04	REINFORCING HARDWARE	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
245	2D		F29-0637-04	INSULATING COVER (USB)	
F1	2D		F52-0023-05	FUSE (MINI BLADE TYPE) (10A)	
253	2C		G01-3246-04	TORSION COIL SPRING	
254	2C		G01-3247-04	TORSION COIL SPRING	
255	2C		G01-3248-04	TORSION COIL SPRING	
256	2C		G01-3249-04	TORSION COIL SPRING	
257	3C		G01-4611-04	COMPRESSION SPRING (REL)	
258	2C		G01-3270-04	TORSION COIL SPRING	
259	3C		G01-3291-04	COMPRESSION SPRING	KE1E2
259	3C		G01-3291-04	COMPRESSION SPRING	M1
-		*	H54-3856-03	ITEM CARTON CASE	K
-		*	H54-3857-03	ITEM CARTON CASE	K1
-		*	H54-3858-03	ITEM CARTON CASE	E1
-		*	H54-3859-03	ITEM CARTON CASE	E2
-		*	H54-3860-03	ITEM CARTON CASE	M1
261	2D	*	H30-0594-04	MAGIC TAPE	KK1
262	2C		J19-7049-03	HOLDER (ARM)	
263	3C		J19-7157-02	HOLDER	
264	1C		J22-0011-03	MOUNTING HARDWARE ASSY	
265	1C		J22-0258-04	MOUNTING HARDWARE (L)	
266	1C		J22-0259-04	MOUNTING HARDWARE (R)	
267	2C		K24-4282-04	PUSH KNOB (EJECT)	
269	3C		K24-4651-03	PUSH KNOB (RELEASE)	
271	3C		K25-1858-03	PUSH KNOB (PRESET)	K1E1E2
271	3C		K25-1858-03	PUSH KNOB (PRESET)	M1
271	3C	*	K25-1863-03	PUSH KNOB (PRESET)	K
272	3C		K28-0188-04	KEY TOP (VOL)	
273	3C		K28-0182-04	KNOB ASSY (VOL)	
274	3C	*	K28-0184-04	KNOB ASSY (FM/AM)	
277	3C	*	K28-0189-03	KEY TOP (FM/AM)	
282	1C		N99-1757-05	SCREW SET	KK1M1
283	1C		N99-1780-05	SCREW SET	
A	3C		N80-2006-48	PAN HEAD TAPTITE SCREW	
B	2C		N80-2008-43	PAN HEAD TAPTITE SCREW	
C	1D		N83-3005-48	PAN HEAD TAPTITE SCREW	
E	2C		N84-2005-43	PAN HEAD TAPTITE SCREW	
F	2D		N84-2606-43	PAN HEAD TAPTITE SCREW	
N	3D		N83-3008-48	PAN HEAD TAPTITE SCREW	
P	2D		N09-6108-15	TAPTITE SCREW (M2X3.5)	
284	1C		T90-0523-05	ANTENNA ADAPTOR	E1E2
285	1C		W01-1664-05	CARRYING CASE (EXCELON)	K
285	1C		W01-1691-05	CARRYING CASE	K1E1E2
286	1C	*	W01-1690-05	COMPACT DISC	
DME1	1D	*	X92-5870-00	MECHANISM ASSY (DXM-6C20W)	
SWITCH UNIT (X16-391x-xx)					
D1			B30-1566-05	LED (1608,RED)	K1E1E2
D1		*	B30-1766-05	LED	KM1
D2			B30-1565-05	LED (1608,PG)	E1E2
D4-6		*	B30-1766-05	LED	
D8			B30-1566-05	LED (1608,RED)	KM1
D8,9			B30-1566-05	LED (1608,RED)	K1E1E2

K : KDC-X791 **K1** : KDC-MP735U **M1** : KDC-X7006U **E1** : KDC-W7537U
(**E** : Europe **K** : North America **M** : Other Areas)

E2 : KDC-W7537UY

△ Indicates safety critical components.

PARTS LIST

SWITCH UNIT (X16-391x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
D9		*	B30-1766-05	LED	KM1	J1			E59-0851-05	RECTANGULAR PLUG	
D10			B30-1565-05	LED (1608,PG)	E1E2	L5			L40-3975-38	SMALL FIXED INDUCTOR (39NH)	E1E2
D11			B30-1566-05	LED (1608,RED)	K1E1E2	L9			L40-4775-38	SMALL FIXED INDUCTOR (47NH)	E1E2
D11		*	B30-1766-05	LED	KM1	X1			L78-1208-05	RESONATOR (6.6MHZ)	
D12			B30-1565-05	LED (1608,PG)	E1E2						
D13,14		*	B30-1766-05	LED		CP2			RK74HB1J223J	CHIP-COM 22K J 1/16W	
D16			B30-1566-05	LED (1608,RED)	K1E1E2	CP3			RK74GA1J223J	CHIP-COM 22K J 1/16W	
D16		*	B30-1766-05	LED	KM1	CP4			RK74HB1J472J	CHIP-COM 4.7K J 1/16W	
D17			B30-1565-05	LED (1608,PG)	E1E2	CP5			RK74GA1J332J	CHIP-COM 3.3K J 1/16W	
D18			B30-1566-05	LED (1608,RED)	K1E1E2	CP6			RK74GA1J473J	CHIP-COM 47K J 1/16W	
D18		*	B30-1766-05	LED	KM1	CP7			RK74HB1J473J	CHIP-COM 47K J 1/16W	
D19			B30-1565-05	LED (1608,PG)	E1E2	CP8			RK74GA1J331J	CHIP-COM 330 J 1/16W	
D20			B30-1566-05	LED (1608,RED)	K1E1E2	CP9-14			RK74HB1J331J	CHIP-COM 330 J 1/16W	
D20		*	B30-1766-05	LED	KM1	CP16			RK74HB1J331J	CHIP-COM 330 J 1/16W	
D21			B30-1565-05	LED (1608,PG)	E1E2	CP18			RK74HB1J331J	CHIP-COM 330 J 1/16W	
D24			B30-1566-05	LED (1608,RED)	K1E1E2	CP20			RK74GA1J101J	CHIP-COM 100 J 1/16W	
D24		*	B30-1766-05	LED	KM1	CP21			RK74HB1J331J	CHIP-COM 330 J 1/16W	
D25			B30-1565-05	LED (1608,PG)	E1E2	CP23			RK74HB1J101J	CHIP-COM 100 J 1/16W	
D26			B30-1566-05	LED (1608,RED)	K1E1E2	CP24			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
D26		*	B30-1766-05	LED	KM1	CP25			RK74HB1J332J	CHIP-COM 3.3K J 1/16W	
D27			B30-1565-05	LED (1608,PG)	E1E2	CP26			RK74HB1J223J	CHIP-COM 22K J 1/16W	
D28			B30-1566-05	LED (1608,RED)	K1E1E2	CP27			RK74HB1J101J	CHIP-COM 100 J 1/16W	
D28		*	B30-1766-05	LED	KM1	CP28			RK74GA1J101J	CHIP-COM 100 J 1/16W	
D29,30			B30-1565-05	LED (1608,PG)	E1E2	CP29			RK74HB1J101J	CHIP-COM 100 J 1/16W	
D30			B30-1565-05	LED (1608,PG)	KK1M1	CP30			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
C10			CK73GB1A105K	CHIP C 1.0UF K		CP31			RK74HB1J223J	CHIP-COM 22K J 1/16W	
C11,12			CK73GB1H332K	CHIP C 3300PF K	M1	CP34			RK74HB1J473J	CHIP-COM 47K J 1/16W	
C13			CK73GB0J475K	CHIP C 4.7UF K	M1	CP35			RK74GA1J223J	CHIP-COM 22K J 1/16W	
C15			CK73GB0J225K	CHIP C 2.2UF K	M1	CP36,37			RK74GA1J332J	CHIP-COM 3.3K J 1/16W	
C16-18			CK73GB1H103K	CHIP C 0.010UF K		R1			RK73EB2E821J	CHIP R 820 J 1/4W	
C20-23			CK73GB1H103K	CHIP C 0.010UF K		R2,3			RK73EB2E561J	CHIP R 560 J 1/4W	
C24,25			CK73GB1H473K	CHIP C 0.047UF K		R5-7			RK73EB2E561J	CHIP R 560 J 1/4W	KM1
C26,27			CK73GB1H103K	CHIP C 0.010UF K		R5-7			RK73EB2E681J	CHIP R 680 J 1/4W	K1E1E2
C28,29			CK73GB1A105K	CHIP C 1.0UF K		R8			RK73FB2B271J	CHIP R 270 J 1/8W	
C30			CK73GB1H103K	CHIP C 0.010UF K		R9			RK73GB2A333J	CHIP R 33K J 1/10W	M1
C31			CC73GCH1H221J	CHIP C 220PF J		R10			RK73GB2A512J	CHIP R 5.1K J 1/10W	M1
C32			CK73FB1A225K	CHIP C 2.2UF K		R11			RK73GB2A223J	CHIP R 22K J 1/10W	KK1E1
C33			CK73GB1H103K	CHIP C 0.010UF K		R11			RK73GB2A223J	CHIP R 22K J 1/10W	E2
C34			CK73GB1C224K	CHIP C 0.22UF K		R11,12			RK73GB2A223J	CHIP R 22K J 1/10W	M1
C35,36			CK73GB1H103K	CHIP C 0.010UF K		R13			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C37			C93-1218-05	CERAMIC 0.01UF K		R14			RK73GB2A103J	CHIP R 10K J 1/10W	M1
C38			CK73FB1A225K	CHIP C 2.2UF K		R15,16			RK73GB2A274J	CHIP R 270K J 1/10W	M1
C39			CK73FB0J106K	CHIP C 10UF K		R17			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C40			CK73GB1H104K	CHIP C 0.10UF K		R18			RK73GB2A473J	CHIP R 47K J 1/10W	
C41,42			CK73FB0J106K	CHIP C 10UF K		R19			RK73GB2A100J	CHIP R 10 J 1/10W	M1
C43			CC73GCH1H101J	CHIP C 100PF J		R20			RK73GB2A332J	CHIP R 3.3K J 1/10W	
C44			CK73GB1H104K	CHIP C 0.10UF K		R23,24			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C47			CC73GCH1H150J	CHIP C 15PF J	E1E2	R26			RK73GB2A223J	CHIP R 22K J 1/10W	
C48			CC73GCH1H470J	CHIP C 47PF J	E1E2	R27,28			RK73GB2A103J	CHIP R 10K J 1/10W	
C49			CC73GCH1H150J	CHIP C 15PF J	E1E2	R29			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C50			CC73GCH1H470J	CHIP C 47PF J	E1E2	R30			RK73GB2A223J	CHIP R 22K J 1/10W	
C56,57			CK73GB1H473K	CHIP C 0.047UF K		R33			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C78			CK73GB1A105K	CHIP C 1.0UF K		R34			RK73GB2A101J	CHIP R 100 J 1/10W	
C79			CK73GB1H104K	CHIP C 0.10UF K		R36			RK73GB2A101J	CHIP R 100 J 1/10W	
						R37			RK73GB2A473J	CHIP R 47K J 1/10W	

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U E2 : KDC-W7537UY
(E : Europe K : North America M : Other Areas)

△ Indicates safety critical components.

PARTS LIST

SWITCH UNIT (X16-391x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R38 R39-41 R42 R43,44 R45			RK73GB2A102J RK73GB2A473J RK73GB2A472J RK73PB2H3R3J RK73EB2E102J	CHIP R 1.0K J 1/10W CHIP R 47K J 1/10W CHIP R 4.7K J 1/10W CHIP R 3.3 J 1/2W CHIP R 1.0K J 1/4W	
R46-48 R47,48 R47,48 R49,50 R52			RK73EB2E101J RK73EB2E101J RK73EB2E101J RK73EB2E102J RK73GB2A223J	CHIP R 100 J 1/4W CHIP R 100 J 1/4W CHIP R 100 J 1/4W CHIP R 1.0K J 1/4W CHIP R 22K J 1/10W	M1 KK1E1 E2
R53 R54 R55 R56 R58			RK73GB2A222J RK73EB2E333J RK73GB2A473J RK73GB2A222J RK73GB2A222J	CHIP R 2.2K J 1/10W CHIP R 33K J 1/4W CHIP R 47K J 1/10W CHIP R 2.2K J 1/10W CHIP R 2.2K J 1/10W	
R59 R60 R61 R62 R64			RK73GB2A473J RK73FB2B180J RK73GB2A104J RK73PB2H2R7J RK73GB2A223J	CHIP R 47K J 1/10W CHIP R 18 J 1/8W CHIP R 100K J 1/10W CHIP R 2.7 J 1/2W CHIP R 22K J 1/10W	
R66 R66 R67 R67 R68			RK73EB2E561J RK73EB2E681J RK73EB2E821J RK73EB2E911J RK73GB2A333J	CHIP R 560 J 1/4W CHIP R 680 J 1/4W CHIP R 820 J 1/4W CHIP R 910 J 1/4W CHIP R 33K J 1/10W	KM1 K1E1E2 KM1 K1E1E2
R69 R70 R71 R77 W1,2			RK73GB2A223J RK73GB2A223J RK73GB2A102J RK73GB2A473J R92-2053-05	CHIP R 22K J 1/10W CHIP R 22K J 1/10W CHIP R 1.0K J 1/10W CHIP R 47K J 1/10W CHIP R 0 OHM J 1/8W	E1E2M1 KK1 M1
W4			R92-1252-05	CHIP R 0 OHM J 1/16W	
S2 S17 S19		*	S70-0901-05 S70-0051-15 S70-0942-05	TACT SWITCH TACT SWITCH TACT SWITCH	
S1			T99-0474-05	ROTARY ENCODER	
D32 ED1 ED1 IC1 IC1		*	DA204U JN12829A MN12829A MX231613TI3X9 MX233213TI4X0	DIODE FLUORESCENT INDICATOR TUBE FLUORESCENT INDICATOR TUBE ROM IC ROM IC	KK1 E1E2M1 E1E2M1 KK1
IC2 IC4 IC5 IC6 IC7		*	BA3830F 703134AGJ015A BD5237FVE PNA4S22M02KW 74LV08PW	ANALOGUE IC MICROCONTROLLER IC ANALOGUE IC ANALOGUE IC MOS-IC	M1
IC8 IC9 IC10 IC11 Q1,2		*	TC7WT126FU-F 74AHC1G32GW SI-3025KMNF SI-3033LUSNF 2SC4617	MOS-IC MOS-IC ANALOGUE IC ANALOGUE IC TRANSISTOR	
Q3 Q3-5 Q5			2SD2351(W) 2SD2351(W) 2SD2351(W)	TRANSISTOR TRANSISTOR TRANSISTOR	KK1M1 E1E2 KK1M1

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q6 Q7 Q8 Q9 Q10			2SB1689 2SA1774 DTC143ZE 2SC4617 2SA1774	TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR	
Q11 Q12 Q13			2SC2713-F 2SC4667-F 2SB1260	TRANSISTOR TRANSISTOR TRANSISTOR	
CD PLAYER UNIT (X32-5980-02) IN CD MECHA					
C1 C3 C21,22 C24 C26			CK73GB1A105K CK73GB0J475K CK73GB1H104K CK73GB1H104K CK73GB1H104K	CHIP C 1.0UF K CHIP C 4.7UF K CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 0.10UF K	
C31 C33 C34 C35 C36,37			CK73GB1C224K CK73GB1H472K CK73GB1H682K CK73GB1H102K CK73GB1H682K	CHIP C 0.22UF K CHIP C 4700PF K CHIP C 6800PF K CHIP C 1000PF K CHIP C 6800PF K	
C38 C39 C51 C52 C53			CK73GB1H471K CK73FB1A225K CK73FB0J106K CK73GB1A105K CK73GB1H223K	CHIP C 470PF K CHIP C 2.2UF K CHIP C 10UF K CHIP C 1.0UF K CHIP C 0.022UF K	
C54 C55 C56 C57 C58			CK73GB1H332K CK73GB1A334K CK73FB0J475K CK73GB1H104K CC73GCH1H681J	CHIP C 3300PF K CHIP C 0.33UF K CHIP C 4.7UF K CHIP C 0.10UF K CHIP C 680PF J	
C59 C60 C61 C62 C63			CK73GB1H104K CK73GB1H223K CC73GCH1H102J CK73GB1C823K CC73GCH1H102J	CHIP C 0.10UF K CHIP C 0.022UF K CHIP C 1000PF J CHIP C 0.082UF K CHIP C 1000PF J	
C64 C72 C74,75 C77,78 C81,82			CK73GB1A334K CK73GB1H104K CK73GB1H104K CK73GB1H104K CC73GCH1H150J	CHIP C 0.33UF K CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 15PF J	
C84 C85			CK73GB1A105K CK73GB1H102K	CHIP C 1.0UF K CHIP C 1000PF K	
CN1 CN2			E41-2612-05 E41-2083-15	FLAT CABLE CONNECTOR FLAT CABLE CONNECTOR	
X2			L77-2867-05	CRYSTAL RESONATOR (16.9344MHZ)	
CP1 CP2 CP4 CP11 R15			RK74GA1J222J RK74GA1J103J RK74GA1J101J RK74GA1J103J RK73GB2A103J	CHIP-COM 2.2K J 1/16W CHIP-COM 10K J 1/16W CHIP-COM 100 J 1/16W CHIP-COM 10K J 1/16W CHIP R 10K J 1/10W	
R16 R23 R24 R27			RK73GB2A102J RK73GB2A750J RK73GB2A101J RK73GB2A101J	CHIP R 1.0K J 1/10W CHIP R 75 J 1/10W CHIP R 100 J 1/10W CHIP R 100 J 1/10W	

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U
(E : Europe K : North America M : Other Areas)

E2 : KDC-W7537UY

△ Indicates safety critical components.

PARTS LIST

CD PLAYER UNIT (X32-5980-02) IN CD MECHA

Ref. No.	Add	New	Parts No.	Description	Destination
R31			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R32,33			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R34			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R37			RK73GB2A103J	CHIP R 10K J 1/10W	
R39			RK73GB2A103J	CHIP R 10K J 1/10W	
R41			RK73GB2A103J	CHIP R 10K J 1/10W	
R51			RK73GB2A103J	CHIP R 10K J 1/10W	
R52			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R53			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R54,55			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R56			RK73GB2A473J	CHIP R 47K J 1/10W	
R57			RK73GB2A273J	CHIP R 27K J 1/10W	
R58			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R59			RK73GB2A273J	CHIP R 27K J 1/10W	
R60,61			RK73GB2A153J	CHIP R 15K J 1/10W	
R62			RK73GB2A133J	CHIP R 13K J 1/10W	
R63			RK73GB2A183J	CHIP R 18K J 1/10W	
R64			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R65,66			RK73GB2A153J	CHIP R 15K J 1/10W	
R73			RK73GB2A910J	CHIP R 91 J 1/10W	
R74			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R75			RK73FB2B4R7J	CHIP R 4.7 J 1/8W	
R76			RK73GB2A104J	CHIP R 100K J 1/10W	
R77			RK73GB2A823J	CHIP R 82K J 1/10W	
R78			RK73GB2A821J	CHIP R 820 J 1/10W	
R79			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R82-85			RK73GB2A103J	CHIP R 10K J 1/10W	
R86			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R87			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R88,89			RK73GB2A103J	CHIP R 10K J 1/10W	
R91,92			RK73GB2A103J	CHIP R 10K J 1/10W	
R100			RK73GB2A225J	CHIP R 2.2M J 1/10W	
R102			RK73GB2A000JX	CHIP R 0.0 J 1/10W	
R103			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R105			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R108			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R110-112			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R131			RK73GB2A103J	CHIP R 10K J 1/10W	
S1,2			S68-0863-05	PUSH SWITCH	
S3			S68-0862-05	PUSH SWITCH	
D1			DAN202U	DIODE	
D2			MA2S784-F	DIODE	
D3			DAN202U	DIODE	
IC1		*	MN6627781KB	MOS-IC	
IC2			XC6219B332PR	ANALOGUE IC	
IC6			BA5824FP	ANALOGUE IC	
Q3			UM6K1N	DUAL FET	
Q6			2SB1295-E	TRANSISTOR	
Q7			2SB0970	TRANSISTOR	
Q8,9			DTC114YUA	DIGITAL TRANSISTOR	
ELECTRIC UNIT (X34-472x-xx)					
D650			B30-1710-05	LED (RED)	
C1			C90-6783-05	ELECTRO 3900 16WV	K1E1E2

Ref. No.	Add	New	Parts No.	Description	Destination
C1			C90-6783-05	ELECTRO 3900 16WV	M1
C1			C90-6784-05	ELECTRO 3900UF 16WV	K
C10			CE32BE1C221M	CHIP EL 220UF 16WV	
C11			CK73FB1C105K	CHIP C 1.0UF K	
C12			CK73GB1H104K	CHIP C 0.10UF K	
C20			CE32BE1C221M	CHIP EL 220UF 16WV	
C21			CK73GB1H103K	CHIP C 0.010UF K	
C22			CE32CL1C100M	CHIP EL 10UF 16WV	
C23			CE32CL0J101M	CHIP EL 100UF 6.3WV	
C30			CK73GB1A474K	CHIP C 0.47UF K	
C31			CE32BM1C101M	CHIP EL 100UF 16WV	
C40			CK73GB1H104K	CHIP C 0.10UF K	
C41			CK73GB1H103K	CHIP C 0.010UF K	
C42			CE32CL1C470M	CHIP EL 47UF 16WV	
C50,51			CK73GB1H104K	CHIP C 0.10UF K	
C60			CK73GB1C224K	CHIP C 0.22UF K	
C61,62			CK73GB1H104K	CHIP C 0.10UF K	
C64			CK73GB1H103K	CHIP C 0.010UF K	
C65			C93-1381-05	CHIP C 1UF K	
C66,67			C93-1382-05	CHIP C 1UF K	
C68			C93-1381-05	CHIP C 1UF K	
C69			C93-1382-05	CHIP C 1UF K	
C70			CK73FB1H224K	CHIP C 0.22UF K	
C71,72		*	C90-6834-05	ELECTRO 100UF 25WV	
C80			CK73GB1H102K	CHIP C 1000PF K	
C81,82		*	C90-6833-05	ELECTRO 220UF 10WV	
C83			CK73GB1H682K	CHIP C 6800PF K	
C84			CK73GB1H332K	CHIP C 3300PF K	
C85			CC73GCH1H680J	CHIP C 68PF J	
C86		*	C90-6834-05	ELECTRO 100UF 25WV	
C87-89			CK73GB1H104K	CHIP C 0.10UF K	
C92			CK73GB1H104K	CHIP C 0.10UF K	
C105			CE32BJ1C100M	CHIP EL 10UF 16WV	
C106,107			CK73GB1H102K	CHIP C 1000PF K	
C109			CK73FB0J106K	CHIP C 10UF K	
C110			CK73GB1A105K	CHIP C 1.0UF K	KK1M1
C111			CK73GB1H103K	CHIP C 0.010UF K	KK1M1
C112			CK73GB1A105K	CHIP C 1.0UF K	KK1M1
C122			CK73GB1H103K	CHIP C 0.010UF K	
C140			CK73GB1H103K	CHIP C 0.010UF K	
C170			CK73GB1H103K	CHIP C 0.010UF K	
C180			CK73FB1C105K	CHIP C 1.0UF K	
C181			CK73GB1H223K	CHIP C 0.022UF K	
C182-189			CC73GCH1H471J	CHIP C 470PF J	E1E2
C200			CE32BM1C221M	CHIP EL 220UF 16WV	
C201			CK73GB1A105K	CHIP C 1.0UF K	
C300-302			CK73GB1H104K	CHIP C 0.10UF K	
C310-312			CK73GB1H104K	CHIP C 0.10UF K	KK1
C313			CK73GB1A105K	CHIP C 1.0UF K	KK1
C320-323			CK73EB1A475K	CHIP C 4.7UF K	M1
C324			CK73GB1H103K	CHIP C 0.010UF K	M1
C325			CE32BJ1C100M	CHIP EL 10UF 16WV	M1
C326			CK73EB1A475K	CHIP C 4.7UF K	M1
C340,341			CC73GCH1H270J	CHIP C 27PF J	E1E2
C342			CE32BJ1C100M	CHIP EL 10UF 16WV	E1E2

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U
(E : Europe K : North America M : Other Areas)

E2 : KDC-W7537UY

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-472x-xx)

Ref. No.	Ad	New	Parts No.	Description	Desti- nation	Ref. No.	Ad	New	Parts No.	Description	Desti- nation
C343			CK73GB1H103K	CHIP C 0.010UF K	E1E2	C512			CE32BJ0J470M	CHIP EL 47UF 6.3WV	
C344			CK73FB1A225K	CHIP C 2.2UF K	E1E2	C513,514			CK73GB1H103K	CHIP C 0.010UF K	
C345			CC73GCH1H331J	CHIP C 330PF J	E1E2	C515	*		C92-1984-05	CHI C 10UF 63WV	E1E2
C346			CK73GB1H104K	CHIP C 0.10UF K	E1E2	C517,518			CC73GCH1H471J	CHIP C 470PF J	
C347			CC73GCH1H561J	CHIP C 560PF J	E1E2	C650-652			CK73GB1H103K	CHIP C 0.010UF K	
C350			CE32BJ1C220M	CHIP EL 22UF 16WV	KM1	C702			CK73GB1H104K	CHIP C 0.10UF K	
C351		*	C90-6835-05	ELECTRO 100UF 25WV	KM1	C703			CC73GCH1H070D	CHIP C 7.0PF D	
C352,353			CK73EB1E225K	CHIP C 2.2UF K	KM1	C705			CC73GCH1H070D	CHIP C 7.0PF D	
C354			CE32BJ1C220M	CHIP EL 22UF 16WV	KM1	C707,708			CK73FB0J106K	CHIP C 10UF K	
C355,356			CK73EB1E225K	CHIP C 2.2UF K	KM1	C711,712			CK73FB0J106K	CHIP C 10UF K	
C357			CK73GB1H223K	CHIP C 0.022UF K	KM1	C713			CK73GB1H104K	CHIP C 0.10UF K	
C358			CK73GB1H103K	CHIP C 0.010UF K	KM1	C714			CK73FB0J106K	CHIP C 10UF K	
C359,360			CK73EB1E225K	CHIP C 2.2UF K	KM1	C715			CC73GCH1H151J	CHIP C 150PF J	
C361-366			CE32BE1C100M	CHIP EL 10UF 16WV	K1	C716			CE32BE1C100M	CHIP EL 10UF 16WV	
C361-378			CE32BE1C100M	CHIP EL 10UF 16WV	KM1	C719			CK73GB1H104K	CHIP C 0.10UF K	
C361,362			CE32BE1C100M	CHIP EL 10UF 16WV	E1E2	C720			CC73GCH1H681J	CHIP C 680PF J	
C365,366			CE32BE1C100M	CHIP EL 10UF 16WV	E1E2	C722			CK73FB0J106K	CHIP C 10UF K	
C373-378			CE32BE1C100M	CHIP EL 10UF 16WV	K1	C723,724			CK73GB1A105K	CHIP C 1.0UF K	
C373,374			CE32BE1C100M	CHIP EL 10UF 16WV	E1E2	C725			CK73GB1H104K	CHIP C 0.10UF K	
C377,378			CE32BE1C100M	CHIP EL 10UF 16WV	E1E2	C726,727			CK73GB1A105K	CHIP C 1.0UF K	
C400-403			CK73GB1H103K	CHIP C 0.010UF K		C728			CC73GCH1H681J	CHIP C 680PF J	
C410,411			CK73FB1E474K	CHIP C 0.47UF K		C730			CE32BE1C100M	CHIP EL 10UF 16WV	
C412			CE32BJ0J470M	CHIP EL 47UF 6.3WV		C731			CC73GCH1H151J	CHIP C 150PF J	
C413			CK73GB1H103K	CHIP C 0.010UF K		C732,733			CK73GB1H473K	CHIP C 0.047UF K	
C420			CK73FB1E474K	CHIP C 0.47UF K		C736			CK73GB1A105K	CHIP C 1.0UF K	
C421			CE32BJ0J470M	CHIP EL 47UF 6.3WV		C737			CE32BJ1C100M	CHIP EL 10UF 16WV	
C422			CK73FB1E474K	CHIP C 0.47UF K		C739,740			CC73GCH1H120J	CHIP C 12PF J	
C423			CK73GB1H103K	CHIP C 0.010UF K		C741			CK73FB0J106K	CHIP C 10UF K	
C450,451			CK73FB1C105K	CHIP C 1.0UF K		C742-744			CK73GB1H103K	CHIP C 0.010UF K	
C452			CD04BM1A101M	ERECTRO 100UF 10WV	E1E2	C745			CC73GCH1H331J	CHIP C 330PF J	
C453-460			CC73GCH1H150J	CHIP C 15PF J		C747			CK73GB1H103K	CHIP C 0.010UF K	
C461-464			C90-6768-05	ELECTRO 0.22UF 16WV	KK1M1	C749			CK73FB0J106K	CHIP C 10UF K	
C461-464			C90-6781-05	ELECTRO 4.7UF 16WV	E1E2	C750-762			CK73GB1H103K	CHIP C 0.010UF K	
C465-472			CC73GCH1H150J	CHIP C 15PF J		C763			CK73GB1H104K	CHIP C 0.10UF K	
C475			C90-6765-05	ELECTRO 1UF 16WV	KK1M1	C764-768			CK73GB1H103K	CHIP C 0.010UF K	
C475			C90-6781-05	ELECTRO 4.7UF 16WV	E1E2	C773,774			CK73GB1H103K	CHIP C 0.010UF K	
C479			CK73GB1H103K	CHIP C 0.010UF K		C903			CC73GCH1H070D	CHIP C 7.0PF D	
C480,481			CE32BJ1H2R2M	CHIP EL 2.2UF 50WV		C905,906			CC73GCH1H070D	CHIP C 7.0PF D	
C482,483			CK73FB1E474K	CHIP C 0.47UF K		C908,909			CK73EB1E105K	CHIP C 1.0UF K	
C484,485			CC73GCH1H070D	CHIP C 7.0PF D		C911			CC73GCH1H070D	CHIP C 7.0PF D	
C486,487			CK73GB1A474K	CHIP C 0.47UF K	KK1M1	C912			CK73GB1H104K	CHIP C 0.10UF K	
C488			CK73FB1C105K	CHIP C 1.0UF K		C913			CC73GCH1H150J	CHIP C 15PF J	
C489-491			CE32BJ1H2R2M	CHIP EL 2.2UF 50WV		C916			CC73GCH1H070D	CHIP C 7.0PF D	
C492-495			CK73FB1C105K	CHIP C 1.0UF K	KK1M1	C917			CC73GCH1H150J	CHIP C 15PF J	
C492,493			CK73FB1C105K	CHIP C 1.0UF K	E1E2	C918			CC73GCH1H180J	CHIP C 18PF J	
C494,495			CK73FB1A335K	CHIP C 3.3UF K	E1E2	C919,920			CK73GB1H104K	CHIP C 0.10UF K	
C496			CK73GB1H103K	CHIP C 0.010UF K		C960-962			CK73GB1H104K	CHIP C 0.10UF K	
C497			CE32BE1C100M	CHIP EL 10UF 16WV		C964			CK73GB1H104K	CHIP C 0.10UF K	
C498			CE32BJ1C470M	CHIP EL 47UF 16WV		C970			CK73FB0J106K	CHIP C 10UF K	
C500,501			CC73GCH1H220J	CHIP C 22PF J		C971			CE32BJ1C100M	CHIP EL 10UF 16WV	E1E2
C502			CK73GB1H104K	CHIP C 0.10UF K		291	2D	*	E30-6637-05	CORD WITH PLUG (ANT)	
C503-506			CK73GB1H103K	CHIP C 0.010UF K		CN190		*	E41-2777-05	PIN ASSY	KE1E2
C508,509			CK73GB1H103K	CHIP C 0.010UF K		CN190		*	E41-2777-05	PIN ASSY	M1
C510			CK73GB1H102K	CHIP C 1000PF K		CN200		*	E41-2777-05	PIN ASSY	
C511			CK73GB1H103K	CHIP C 0.010UF K		CN300		*	E41-2352-05	FLAT CABLE CONNECTOR	

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U
(E : Europe K : North America M : Other Areas)

E2 : KDC-W7537UY

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-472x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
△ CN361			E41-2555-05	PIN ASSY		R62			RK73GB2A104J	CHIP R 100K J 1/10W	
J1			E58-0991-05	RECTANGULAR RECEPTACLE		R63			RK73GB2A473J	CHIP R 47K J 1/10W	
J410			E11-0625-05	PHONE JACK (LGY6502-0900)		R64			RK73PB2H102J	CHIP R 1.0K J 1/2W	
J420			E56-0855-05	CYLINDRICAL RECEPTACLE		R65			RK73GB2A473J	CHIP R 47K J 1/10W	
J650			E58-0992-05	RECTANGULAR RECEPTACLE		R66	*		RK73GH2A9311D	CHIP R 9.31K D 1/10W	
△ L1		*	L33-2365-05	CHOKE COIL ASSY		R67			RK73GH2A434D	CHIP R 430K D 1/10W	
L60			L33-2288-05	SMALL FIXED INDUCTOR		R68			RK73GB2A103J	CHIP R 10K J 1/10W	
L61		*	L92-0639-05	CHIP FERRITE		R73			RK73FB2B222J	CHIP R 2.2K J 1/8W	
L80			L33-2296-05	SMALL FIXED INDUCTOR		R74			RK73GB2A473J	CHIP R 47K J 1/10W	
L81			L33-2229-05	SMALL FIXED INDUCTOR		R75			RK73GB2A104J	CHIP R 100K J 1/10W	
L200			L92-0616-05	CHIP FERRITE		R80			RK73GH2A753D	CHIP R 75K D 1/10W	
L350			L41-2205-33	SMALL FIXED INDUCTOR (22UH)	KM1	R81			RK73GH2A103D	CHIP R 10K D 1/10W	
L505			L41-4795-33	SMALL FIXED INDUCTOR (4.7UH)		R82,83			RK73GB2A154J	CHIP R 150K J 1/10W	
L700			L92-0615-05	CHIP FERRITE		R84			RK73GH2A103D	CHIP R 10K D 1/10W	
L930-937			L92-0365-05	CHIP FERRITE	E1E2	R85			RK73GH2A753D	CHIP R 75K D 1/10W	
X340			L77-2002-05	CRYSTAL RESONATOR	E1E2	R86			RK73GH2A823D	CHIP R 82K D 1/10W	
X501			L78-0872-05	RESONATOR (12MHZ)		R87			RK73GH2A114D	CHIP R 110K D 1/10W	
X502			L77-2880-05	CRYSTAL RESONATOR		R88			RK73GH2A683D	CHIP R 68K D 1/10W	
X700			L77-2880-05	CRYSTAL RESONATOR		R100			RK73FB2B1R0J	CHIP R 1.0 J 1/8W	
X701			L77-2908-05	CRYSTAL RESONATOR (12.000MHZ)		R102			RK73FB2B183J	CHIP R 18K J 1/8W	
G	2D		N80-3010-48	PAN HEAD TAPTITE SCREW		R103			RK73GB2A473J	CHIP R 47K J 1/10W	
J	2D		N83-3005-48	PAN HEAD TAPTITE SCREW		R106			RK73GB2A103J	CHIP R 10K J 1/10W	
K	2D		N83-3020-48	PAN HEAD TAPTITE SCREW		R107			RK73GB2A102J	CHIP R 1.0K J 1/10W	KK1M1
CP190			RK74HB1J101J	CHIP-COM 100 J 1/16W	E1E2	R110			RK73GH2A512D	CHIP R 5.1K D 1/10W	E1E2
CP210,211			RK74GA1J101J	CHIP-COM 100 J 1/16W		R110			RK73GH2A682D	CHIP R 6.8K D 1/10W	KK1M1
CP310			RK74GA1J101J	CHIP-COM 100 J 1/16W	KK1	R111			RK73GH2A472D	CHIP R 4.7K D 1/10W	
CP420			RK74GA1J101J	CHIP-COM 100 J 1/16W		R112			RK73GB2A102J	CHIP R 1.0K J 1/10W	
CP421			RK74HB1J101J	CHIP-COM 100 J 1/16W		R114			RK73EB2E332J	CHIP R 3.3K J 1/4W	E1E2
CP501			RK74GA1J101J	CHIP-COM 100 J 1/16W		R114			RK73PB2H102J	CHIP R 1.0K J 1/2W	KK1M1
CP502			RK74HB1J102J	CHIP-COM 1.0K J 1/16W		R115			RK73GB2A563J	CHIP R 56K J 1/10W	KK1M1
CP503			RK74GA1J101J	CHIP-COM 100 J 1/16W		R116			RK73GB2A101J	CHIP R 100 J 1/10W	
CP504			RK74GA1J472J	CHIP-COM 4.7K J 1/16W		R117			RK73GB2A473J	CHIP R 47K J 1/10W	
CP505-507			RK74GA1J101J	CHIP-COM 100 J 1/16W		R118-121			RK73GB2A103J	CHIP R 10K J 1/10W	
CP700			RK74HB1J330J	CHIP-COM 33 J 1/16W		R126			RK73GB2A183J	CHIP R 18K J 1/10W	
CP701			RK74HB1J101J	CHIP-COM 100 J 1/16W		R127			RK73FB2B203J	CHIP R 20K J 1/8W	
CP703-711			RK74HB1J330J	CHIP-COM 33 J 1/16W		R128			RK73GB2A104J	CHIP R 100K J 1/10W	
CP714-717			RK74HB1J330J	CHIP-COM 33 J 1/16W		R129			RK73EB2E473J	CHIP R 47K J 1/4W	
CP720			RK74HB1J223J	CHIP-COM 22K J 1/16W		R130			R92-5088-05	CHIP R 3.3K J 3/4W	
R10			RK73GH2A432D	CHIP R 4.3K D 1/10W		R131			RK73GB2A393J	CHIP R 39K J 1/10W	
R11			RK73GH2A243D	CHIP R 24K D 1/10W		R132			RK73FB2B683J	CHIP R 68K J 1/8W	
R12			RK73FB2B221J	CHIP R 220 J 1/8W		R140			RK73FB2B472J	CHIP R 4.7K J 1/8W	
R20			RK73FB2B203J	CHIP R 20K J 1/8W		R141,142			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R21			RK73GB2A223J	CHIP R 22K J 1/10W		R150			RK73GB2A223J	CHIP R 22K J 1/10W	KK1M1
R22			RK73FB2B272J	CHIP R 2.7K J 1/8W		R151,152			RK73PB2H221J	CHIP R 220 J 1/2W	KK1M1
R30			RK73FB2B152J	CHIP R 1.5K J 1/8W		R153			RK73FB2B472J	CHIP R 4.7K J 1/8W	
R40,41			RK73PB2H1R0J	CHIP R 1.0 J 1/2W		R160			RK73FB2B561J	CHIP R 560 J 1/8W	KE1E2
R42			RK73FB2B223J	CHIP R 22K J 1/8W		R160			RK73FB2B561J	CHIP R 560 J 1/8W	M1
R43			RK73GB2A105J	CHIP R 1.0M J 1/10W		R161			RK73EB2E102J	CHIP R 1.0K J 1/4W	KE1E2
R44,45			RK73GB2A104J	CHIP R 100K J 1/10W		R161			RK73EB2E102J	CHIP R 1.0K J 1/4W	M1
R46			RK73FB2B431J	CHIP R 430 J 1/8W		R170			RK73GB2A473J	CHIP R 47K J 1/10W	
R50			RK73FB2B182J	CHIP R 1.8K J 1/8W		R171			RK73GB2A104J	CHIP R 100K J 1/10W	
R51			RK73GB2A472J	CHIP R 4.7K J 1/10W		R172			RK73EB2E103J	CHIP R 10K J 1/4W	
R52			RK73GB2A473J	CHIP R 47K J 1/10W		R180			RK73GB2A104J	CHIP R 100K J 1/10W	
R61			RK73PB2H1R0J	CHIP R 1.0 J 1/2W		R181			RK73EB2E103J	CHIP R 10K J 1/4W	
						R182			RK73GB2A222J	CHIP R 2.2K J 1/10W	

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U E2 : KDC-W7537UY
(E : Europe K : North America M : Other Areas)

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-472x-xx)

Ref. No.	Ad	New	Parts No.	Description	Destination	Ref. No.	Ad	New	Parts No.	Description	Destination
R190			RK73EB2E102J	CHIP R 1.0K J 1/4W	KE1E2	R410,411			RK73GB2A123J	CHIP R 12K J 1/10W	
R190			RK73EB2E102J	CHIP R 1.0K J 1/4W	M1	R412,413			RK73EB2E100J	CHIP R 10 J 1/4W	
R191-193			RK73EB2E471J	CHIP R 470 J 1/4W	E1E2	R414			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R194			RK73GB2A222J	CHIP R 2.2K J 1/10W		R415			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R195			RK73GB2A104J	CHIP R 100K J 1/10W		R420			RK73EB2E432J	CHIP R 4.3K J 1/4W	
R200			RK73GB2A101J	CHIP R 100 J 1/10W		R421,422			RK73EB2E101J	CHIP R 100 J 1/4W	
R210,211			RK73GB2A104J	CHIP R 100K J 1/10W		R423			RK73EB2E432J	CHIP R 4.3K J 1/4W	
R214			RK73GB2A101J	CHIP R 100 J 1/10W		R424,425			RK73EB2E101J	CHIP R 100 J 1/4W	
R215			RK73GB2A104J	CHIP R 100K J 1/10W		R426			RK73EB2E100J	CHIP R 10 J 1/4W	
R300,301			RK73GB2A153J	CHIP R 15K J 1/10W		R427			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R302			RK73PB2H2R2J	CHIP R 2.2 J 1/2W		R428			RK73EB2E100J	CHIP R 10 J 1/4W	
R303			RK73GB2A101J	CHIP R 100 J 1/10W		R429,430			RK73EB2E101J	CHIP R 100 J 1/4W	
R310,311			RK73GB2A102J	CHIP R 1.0K J 1/10W	KK1	R431			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R312			RK73GH2A111D	CHIP R 110 D 1/10W	KK1	R432-434			RK73GB2A104J	CHIP R 100K J 1/10W	
R313			RK73GH2A241D	CHIP R 240 D 1/10W	KK1	R435			RK73GB2A101J	CHIP R 100 J 1/10W	
R320,321			RK73GB2A334J	CHIP R 330K J 1/10W	M1	R440			RK73GB2A104J	CHIP R 100K J 1/10W	
R322			RK73GB2A473J	CHIP R 47K J 1/10W	M1	R441			RK73GB2A101J	CHIP R 100 J 1/10W	
R323			RK73GB2A333J	CHIP R 33K J 1/10W	M1	R442			RK73GB2A104J	CHIP R 100K J 1/10W	
R324			RK73GB2A473J	CHIP R 47K J 1/10W	M1	R450			RK73GB2A103J	CHIP R 10K J 1/10W	KK1M1
R325			RK73GB2A821J	CHIP R 820 J 1/10W	M1	R450			RK73GB2A243J	CHIP R 24K J 1/10W	E1E2
R326			RK73GB2A104J	CHIP R 100K J 1/10W	M1	R451			RK73GB2A104J	CHIP R 100K J 1/10W	KK1M1
R327			RK73GB2A102J	CHIP R 1.0K J 1/10W	M1	R452			RK73GB2A221J	CHIP R 220 J 1/10W	E1E2
R328			RK73GB2A473J	CHIP R 47K J 1/10W	M1	R452			RK73GB2A331J	CHIP R 330 J 1/10W	KK1M1
R329			RK73GB2A103J	CHIP R 10K J 1/10W	M1	R453			RK73GB2A273J	CHIP R 27K J 1/10W	
R330			RK73GB2A1R0J	CHIP R 1.0 J 1/10W	M1	R454			RK73GB2A470J	CHIP R 47 J 1/10W	
R331			RK73GB2A103J	CHIP R 10K J 1/10W	M1	R455			RK73GB2A223J	CHIP R 22K J 1/10W	E1E2
R333			RK73EB2E103J	CHIP R 10K J 1/4W	M1	R457			RK73GB2A121J	CHIP R 120 J 1/10W	E1E2
R340-342			RK73GB2A222J	CHIP R 2.2K J 1/10W	E1E2	R457			RK73GB2A151J	CHIP R 150 J 1/10W	KK1M1
R343			RK73GB2A102J	CHIP R 1.0K J 1/10W	E1E2	R458-461			RK73GB2A680J	CHIP R 68 J 1/10W	
R344			RK73GB2A223J	CHIP R 22K J 1/10W	E1E2	R466			RK73GB2A100J	CHIP R 10 J 1/10W	E1E2
R345			RK73GB2A222J	CHIP R 2.2K J 1/10W	E1E2	R468			RK73GB2A683J	CHIP R 68K J 1/10W	E1E2
R346			RK73GB2A512J	CHIP R 5.1K J 1/10W	E1E2	R469			RK73GB2A104J	CHIP R 100K J 1/10W	KK1M1
R350			RK73GB2A182J	CHIP R 1.8K J 1/10W	KM1	R469			RK73GB2A333J	CHIP R 33K J 1/10W	E1E2
R351			RK73GB2A750J	CHIP R 75 J 1/10W	KM1	R470			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R352			RK73GB2A272J	CHIP R 2.7K J 1/10W	KM1	R471			RK73GB2A473J	CHIP R 47K J 1/10W	
R353			RK73GB2A470J	CHIP R 47 J 1/10W	KM1	R480,481			RK73GB2A101J	CHIP R 100 J 1/10W	
R354			RK73GB2A752J	CHIP R 7.5K J 1/10W	KM1	R482,483			RK73GB2A103J	CHIP R 10K J 1/10W	
R355			RK73GB2A563J	CHIP R 56K J 1/10W	KM1	R486-489			RK73GB2A470J	CHIP R 47 J 1/10W	
R356			RK73GB2A274J	CHIP R 270K J 1/10W	KM1	R490			RK73EB2E2R2J	CHIP R 2.2 J 1/4W	
R357			RK73GB2A470J	CHIP R 47 J 1/10W	KM1	R500,501			RK73GB2A103J	CHIP R 10K J 1/10W	
R358			RK73GB2A103J	CHIP R 10K J 1/10W	KM1	R502			RK73GB2A104J	CHIP R 100K J 1/10W	
R359,360			RK73GB2A913J	CHIP R 91K J 1/10W	KM1	R503			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R361-366			RK73GB2A361J	CHIP R 360 J 1/10W	KK1M1	R505,506			RK73GB2A104J	CHIP R 100K J 1/10W	
R361,362			RK73GB2A361J	CHIP R 360 J 1/10W	E1E2	R507			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R365,366			RK73GB2A361J	CHIP R 360 J 1/10W	E1E2	R508,509			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R367-372			RK73GB2A223J	CHIP R 22K J 1/10W	KK1M1	R512-514			RK73GB2A104J	CHIP R 100K J 1/10W	
R367,368			RK73GB2A223J	CHIP R 22K J 1/10W	E1E2	R515,516			RK73GB2A471J	CHIP R 470 J 1/10W	
R371,372			RK73GB2A223J	CHIP R 22K J 1/10W	E1E2	R517-519			RK73GB2A104J	CHIP R 100K J 1/10W	
R373-378			RK73GB2A103J	CHIP R 10K J 1/10W	KM1	R520			RK73GB2A101J	CHIP R 100 J 1/10W	
R379-384			RK73GB2A104J	CHIP R 100K J 1/10W	KM1	R522			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R385-390			RK73GB2A123J	CHIP R 12K J 1/10W	KM1	R525			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R391-396			RK73GB2A820J	CHIP R 82 J 1/10W	KM1	R526,527			RK73GB2A104J	CHIP R 100K J 1/10W	
R401			RK73GB2A223J	CHIP R 22K J 1/10W		R528			RK73GB2A223J	CHIP R 22K J 1/10W	KE1E2
R402			RK73FB2B821J	CHIP R 820 J 1/8W		R528			RK73GB2A223J	CHIP R 22K J 1/10W	M1
R403,404			RK73GB2A471J	CHIP R 470 J 1/10W		R528-530			RK73GB2A223J	CHIP R 22K J 1/10W	K1

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U
(E : Europe K : North America M : Other Areas)

E2 : KDC-W7537UY

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-472x-xx)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
R529			RK73GB2A473J	CHIP R 47K J 1/10W	KM1	R749			RK73GB2A515J	CHIP R 5.1M J 1/10W	
R530			RK73GB2A223J	CHIP R 22K J 1/10W	KE1M1	R750			RK73GB2A100J	CHIP R 10 J 1/10W	
R530			RK73GB2A473J	CHIP R 47K J 1/10W	E2	R751,752			RK73GB2A101J	CHIP R 100 J 1/10W	
R540			RK73GB2A223J	CHIP R 22K J 1/10W	E1E2	R753			RK73GB2A153J	CHIP R 15K J 1/10W	
R540			RK73GB2A473J	CHIP R 47K J 1/10W	M1	R754			RK73GB2A101J	CHIP R 100 J 1/10W	
R541,542			RK73GB2A104J	CHIP R 100K J 1/10W		R755,756			RK73GB2A470J	CHIP R 47 J 1/10W	
R543			RK73GB2A223J	CHIP R 22K J 1/10W		R758			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R544			RK73GB2A222J	CHIP R 2.2K J 1/10W		R759-762			RK73GB2A223J	CHIP R 22K J 1/10W	
R545-548			RK73EB2E101J	CHIP R 100 J 1/4W		R764,765			RK73GB2A223J	CHIP R 22K J 1/10W	
R549			RK73EB2E102J	CHIP R 1.0K J 1/4W		R766			RK73GB2A430J	CHIP R 43 J 1/10W	
R550			RK73EB2E472J	CHIP R 4.7K J 1/4W		R767			RK73GB2A223J	CHIP R 22K J 1/10W	
R551			RK73EB2E102J	CHIP R 1.0K J 1/4W		R768			RK73GB2A680J	CHIP R 68 J 1/10W	
R552			RK73GB2A473J	CHIP R 47K J 1/10W		R769			RK73GB2A104J	CHIP R 100K J 1/10W	
R553			RK73GB2A223J	CHIP R 22K J 1/10W		R770			RK73GB2A223J	CHIP R 22K J 1/10W	
R554			R92-3418-05	CHIP R 0.47 J 1/2W		R771			RK73GB2A820J	CHIP R 82 J 1/10W	
R555			RK73GB2A154J	CHIP R 150K J 1/10W	E1E2	R772			RK73GB2A750J	CHIP R 75 J 1/10W	
R556			RK73GB2A1R0J	CHIP R 1.0 J 1/10W		R773			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R557			RK73FB2B4R7J	CHIP R 4.7 J 1/8W	E1E2	R774			RK73GB2A750J	CHIP R 75 J 1/10W	
R650			RK73GB2A471J	CHIP R 470 J 1/10W		R775			RK73GB2A153J	CHIP R 15K J 1/10W	
R651			RK73GB2A104J	CHIP R 100K J 1/10W		R776			RK73GB2A330J	CHIP R 33 J 1/10W	
R652,653			RK73GB2A102J	CHIP R 1.0K J 1/10W		R777			RK73GB2A153J	CHIP R 15K J 1/10W	
R654			RK73GB2A473J	CHIP R 47K J 1/10W		R778			RK73GB2A330J	CHIP R 33 J 1/10W	
R655			RK73GB2A241J	CHIP R 240 J 1/10W		R779,780			RK73GB2A101J	CHIP R 100 J 1/10W	
R702			RK73GB2A473J	CHIP R 47K J 1/10W		R781			RK73GB2A104J	CHIP R 100K J 1/10W	
R703			RK73GB2A515J	CHIP R 5.1M J 1/10W		R782-786			RK73GB2A101J	CHIP R 100 J 1/10W	
R704			RK73GB2A101J	CHIP R 100 J 1/10W		R787			RK73GB2A104J	CHIP R 100K J 1/10W	
R705			RK73GB2A473J	CHIP R 47K J 1/10W		R788			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R706			RK73GB2A123J	CHIP R 12K J 1/10W		R789			RK73GB2A104J	CHIP R 100K J 1/10W	
R707			RK73GB2A473J	CHIP R 47K J 1/10W		R790			RK73GB2A100J	CHIP R 10 J 1/10W	
R708			RK73GB2A102J	CHIP R 1.0K J 1/10W		R791,792			RK73GB2A104J	CHIP R 100K J 1/10W	
R709,710			RK73GB2A473J	CHIP R 47K J 1/10W		R793,794			RK73GB2A101J	CHIP R 100 J 1/10W	
R711			RK73GH2A562D	CHIP R 5.6K D 1/10W		R795			RK73GB2A820J	CHIP R 82 J 1/10W	
R712			RK73GB2A103J	CHIP R 10K J 1/10W		R796			RK73GB2A101J	CHIP R 100 J 1/10W	
R713			RK73GH2A822D	CHIP R 8.2K D 1/10W		R797			RK73GB2A103J	CHIP R 10K J 1/10W	
R714			RK73GH2A752D	CHIP R 7.5K D 1/10W		R798			RK73GB2A101J	CHIP R 100 J 1/10W	
R717			RK73GB2A680J	CHIP R 68 J 1/10W		R799			RK73GB2A750J	CHIP R 75 J 1/10W	
R718,719			RK73GB2A473J	CHIP R 47K J 1/10W		R800-804			RK73GB2A101J	CHIP R 100 J 1/10W	
R720			RK73GH2A104D	CHIP R 100K D 1/10W		R805,806			RK73GB2A100J	CHIP R 10 J 1/10W	
R721			RK73GB2A473J	CHIP R 47K J 1/10W		R807-815			RK73GB2A223J	CHIP R 22K J 1/10W	
R722			RK73GB2A101J	CHIP R 100 J 1/10W		R816			RK73GB2A680J	CHIP R 68 J 1/10W	
R723,724			RK73GB2A473J	CHIP R 47K J 1/10W		R817			RK73GB2A101J	CHIP R 100 J 1/10W	
R725			RK73GB2A102J	CHIP R 1.0K J 1/10W		R818			RK73GB2A680J	CHIP R 68 J 1/10W	
R729			RK73GB2A103J	CHIP R 10K J 1/10W		R819			RK73GB2A750J	CHIP R 75 J 1/10W	
R731			RK73GH2A822D	CHIP R 8.2K D 1/10W		R850			RK73GB2A1R0J	CHIP R 1.0 J 1/10W	
R732			RK73GH2A752D	CHIP R 7.5K D 1/10W		R900-902			RK73GB2A560J	CHIP R 56 J 1/10W	
R734			RK73GH2A562D	CHIP R 5.6K D 1/10W		R904,905			RK73GB2A101J	CHIP R 100 J 1/10W	
R735,736			RK73GB2A223J	CHIP R 22K J 1/10W		R906			RK73GB2A100J	CHIP R 10 J 1/10W	
R738,739			RK73GB2A222J	CHIP R 2.2K J 1/10W		R907			RK73GB2A101J	CHIP R 100 J 1/10W	
R740			RK73GB2A101J	CHIP R 100 J 1/10W		R908-911			RK73GB2A100J	CHIP R 10 J 1/10W	
R741,742			RK73GB2A222J	CHIP R 2.2K J 1/10W		R950			RK73GB2A163J	CHIP R 16K J 1/10W	KK1M1
R743			RK73GB2A223J	CHIP R 22K J 1/10W		R951			RK73GB2A273J	CHIP R 27K J 1/10W	KK1M1
R744,745			RK73GB2A330J	CHIP R 33 J 1/10W		R952			RK73GB2A104J	CHIP R 100K J 1/10W	KK1M1
R746			RK73GB2A101J	CHIP R 100 J 1/10W		R953			RK73GB2A102J	CHIP R 1.0K J 1/10W	KK1M1
R747			RK73GB2A223J	CHIP R 22K J 1/10W		R954			RK73GH2A472D	CHIP R 4.7K D 1/10W	KK1M1
R748			RK73GB2A100J	CHIP R 10 J 1/10W		R955			RK73GH2A113D	CHIP R 11K D 1/10W	KK1M1

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U E2 : KDC-W7537UY
(E : Europe K : North America M : Other Areas)

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-472x-xx)

Ref. No.	Added	New	Parts No.	Description	Destination	Ref. No.	Added	New	Parts No.	Description	Destination
R960-962 R963 R973 R974 R975			RK73GB2A100J RK73GB2A131J RK73GB2A104J RK73GB2A473J RK73GB2A123J	CHIP R 10 J 1/10W CHIP R 130 J 1/10W CHIP R 100K J 1/10W CHIP R 47K J 1/10W CHIP R 12K J 1/10W	KK1M1 KK1M1 KK1M1	D350 D351 D361,362 D379-384 D410-412			UDZS11B UDZS5.6B MC2846 AVRM1608180M6A UDZS6.8B	ZENER DIODE ZENER DIODE DIODE VARISTOR ZENER DIODE	KM1 KM1 KM1
R976 R977 R978 R979 R980			RK73GB2A103J RK73GB2A391J RK73GB2A432J RK73GB2A103J RK73GB2A102J	CHIP R 10K J 1/10W CHIP R 390 J 1/10W CHIP R 4.3K J 1/10W CHIP R 10K J 1/10W CHIP R 1.0K J 1/10W	KK1M1 E1E2 E1E2 E1E2 E1E2	D420-428 D450,451 D480,481 D484-486 D500			UDZS6.2B MC2846 UDZS5.6B MC2846 MC2846	ZENER DIODE DIODE ZENER DIODE DIODE DIODE	
R982 R983-986 W140 W340 W361-366			RK73GB2A242J RK73GB2A103J R92-1252-05 R92-1252-05 R92-1252-05	CHIP R 2.4K J 1/10W CHIP R 10K J 1/10W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W	E1E2 E1E2 E1E2 E1E2 K1	D501-506 D903 IC10 IC60 IC80			UDZS6.2B UDZS6.8B M5237ML-CF0J LT3467A BD9302FP	ZENER DIODE ZENER DIODE ANALOGUE IC ANALOGUE IC ANALOGUE IC	E1E2
W361,362 W365,366 W450 W511 W702			R92-1252-05 R92-1252-05 R92-1252-05 R92-1252-05 R92-1252-05	CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W	E1E2 E1E2 E1E2 KK1M1	IC100 IC101 IC102 IC140 IC300		*	NJM4565V-ZB TA75S558F-F 74AHC1G32GW TPD1018F-F MIC2026-1YM	ANALOGUE IC ANALOGUE IC MOS-IC ANALOGUE IC MOS-IC	KK1M1 KK1M1
W704,705 W901 W914,915 W966,967 W970			R92-1252-05 R92-1252-05 R92-1252-05 R92-2053-05 R92-2052-05	CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/16W CHIP R 0 OHM J 1/8W CHIP R 0 OHM J 1/10W	KK1M1 E1E2	IC310 IC320 IC340 IC350 IC361-363			MMA6261QR2 NJM4565V-ZB LC72725KV ICL7660SIBAZ NJM4565V-ZB	ANALOGUE IC ANALOGUE IC ANALOGUE IC ANALOGUE IC ANALOGUE IC	KK1 M1 E1E2 KM1 KM1
W980-983			R92-1252-05	CHIP R 0 OHM J 1/16W	E1E2	IC450 IC450 IC480 IC500 IC510			E-TDA7850A TB2903HQ E-TDA7415CB * 30624MGPB44GP S-80836CNCB-J	ANALOGUE IC ANALOGUE IC ANALOGUE IC MICROCONTROLLER IC MOS-IC	E1E2 KK1M1
S650 S651			S74-0822-05 S70-0931-05	MICRO SWITCH TACT SWITCH		IC520 IC530 IC701 IC702 IC703			BR24L04FV-W * 74HC2G02DP WM8716SEDS/R 341S2094 * AK4117	ROM IC MOS-IC MOS-IC MICROPROCESSOR IC MOS-IC	
D1 D20 D21 D30 D40			S2V60-5009F46 RB160L-40 UDZS5.6B UDZS8.2B UDZS5.6B	DIODE DIODE ZENER DIODE ZENER DIODE ZENER DIODE		IC704 IC705 IC708 IC709,710 IC711			NJM4565V-ZB TAR5S50-F SI-3033KMS TC7WT126FU-F * TCC760	ANALOGUE IC ANALOGUE IC ANALOGUE IC MOS-IC MOS-IC	
D50 D61-63 D70 D80 D81			HZU11(B1)-E RB060L-40 HZU16(B1)-E NSQ03A04G SFPB-54VNF	ZENER DIODE DIODE ZENER DIODE DIODE DIODE		IC712 IC714 IC715 IC716 IC717			74LV08PW * IC42S164007TIG * A29L80AUV4X9F * R1114N181B-TR TAR5S33-F	MOS-IC DRAM IC ROM IC ANALOGUE IC (1.8V LF) ANALOGUE IC	
D100 D102-104 D102,103 D120 D121,122			UDZS16B MC2846 MC2846 MC2846 UDZS6.8B	ZENER DIODE DIODE DIODE DIODE ZENER DIODE	KK1M1 E1E2	Q10 Q11,12 Q20 Q21 Q22			2SB1565 UMC2N 2SB1565 2SD2351(W) 2SA1577	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	
D123 D140,141 D150,151 D160 D160			UDZS6.2B 1SR154-400 1SR154-400 UDZS5.6B UDZS5.6B	ZENER DIODE DIODE DIODE ZENER DIODE ZENER DIODE	KE1E2 M1	Q23 Q30 Q31 Q32 Q40			DTC124EUA 2SB1565 2SC4081 UMC2N 2SB1565	DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	
D170 D190 D190,191 D200,201 D320			UDZS4.7B STZ6.2N STZ6.2N AVRL1613R3FTA DA204U	ZENER DIODE ZENER DIODE ZENER DIODE VARISTOR DIODE	KM1 E1E2 M1						

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U
(E : Europe K : North America M : Other Areas)

E2 : KDC-W7537UY

△ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-472x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q41			2SD2351(W)	TRANSISTOR		13	3A		D10-4909-03	ARM	
Q42			UMD12N	TRANSISTOR		14	3B		D10-4915-03	ARM	
Q43			2SD2351(W)	TRANSISTOR		15	2A		D10-4916-23	SLIDER	
Q50			2SB1184	TRANSISTOR		16	3B		D10-4914-12	SLIDER	
Q51			2SC4081	TRANSISTOR		17	2B		D10-4588-13	SLIDER	
Q52			UMC2N	TRANSISTOR		18	2B		D10-4917-04	ARM	
Q60			2SB1184	TRANSISTOR		19	2B		D10-4596-24	ARM	
Q61			2SD2351(W)	TRANSISTOR		22	2A		D13-2151-04	GEAR	
Q70			2SB1449(R)-E	TRANSISTOR		23	2B		D13-2152-04	GEAR	
Q71		*	2SC5053	TRANSISTOR		24	3B		D13-2153-04	GEAR	
Q72			UMC2N	TRANSISTOR		25	3B		D13-2154-04	GEAR	
Q80			UMG2N	TRANSISTOR		26	3B		D13-2155-04	WORM	
Q81,82			DTC143TUA	DIGITAL TRANSISTOR		27	2B		D13-2156-14	GEAR	
Q100			2SB1188(R)	TRANSISTOR		28	3B		D13-2157-04	GEAR	
Q101			2SC4081	TRANSISTOR		29	2B		D13-2158-04	GEAR	
Q103			2SC4081	TRANSISTOR	E1E2	30	2B		D13-2168-04	GEAR	
Q103-105			2SC4081	TRANSISTOR	KK1M1	31	3B		D13-2171-04	GEAR	
Q120			2SC4081	TRANSISTOR		32	1B		D13-2400-13	RACK (GEAR)	
Q122,123			2SC4081	TRANSISTOR		33	2A		D14-0759-04	ROLLER	
Q150			2SB1184	TRANSISTOR	KK1M1	35	2B		D21-2382-04	SHAFT	
Q151			DTC114YUA	DIGITAL TRANSISTOR	KK1M1	36	1A		D23-0954-04	RETAINER	
Q160			DTA123JK	DIGITAL TRANSISTOR	KE1E2	37	1B		D39-0246-05	DAMPER	
Q160			DTA123JK	DIGITAL TRANSISTOR	M1						
Q180			RT1N441M	TRANSISTOR		38	2B		G01-3072-04	EXTENSION SPRING	
Q320			2SC4617	TRANSISTOR	M1	39	2A		G01-3073-04	TORSION COIL SPRING	
Q350			2SB1184	TRANSISTOR	KM1	40	2A		G01-3074-04	EXTENSION SPRING	
Q351			2SC4081	TRANSISTOR	KM1	41	1B		G01-4615-04	EXTENSION SPRING	
Q352,353			2SA1576A	TRANSISTOR	KM1	42	2A		G01-3076-04	EXTENSION SPRING	
Q354			2SC4081	TRANSISTOR	KM1	43	1B		G01-3077-14	EXTENSION SPRING	
Q356,357			2SC4081	TRANSISTOR	KM1	44	2B		G02-1399-04	FLAT SPRING	
Q358			2SA1576A	TRANSISTOR	KM1	45	2B		G02-1547-04	FLAT SPRING	
Q361,362			DTA124EUA	DIGITAL TRANSISTOR		51	1A		J22-0473-21	MOUNTING HARDWARE	
Q363-368			DTC143TUA	DIGITAL TRANSISTOR	KK1M1	52	3B		J22-0474-12	MOUNTING HARDWARE	
Q363,364			DTC143TUA	DIGITAL TRANSISTOR	E1E2	53	1B		J22-0519-03	MOUNTING HARDWARE	
Q367,368			DTC143TUA	DIGITAL TRANSISTOR	E1E2	55	1A	*	J90-1138-41	GUIDE	
Q400			2SB1689	TRANSISTOR		56	1B		J90-1023-03	GUIDE	
Q401			DTC124EUA	DIGITAL TRANSISTOR		DFPC1	3A	*	J86-0039-05	FPC (LEAD FREE)	
Q500			RT1N441M	TRANSISTOR		A	2B		N09-4460-15	TAPTITE SCREW (PT2X8)	
Q501			2SA1576A	TRANSISTOR		B	1B		N09-6317-05	TAPTITE SCREW (1.6X6.0)	
Q650			DTC114YUA	DIGITAL TRANSISTOR		C	2B		N09-6004-15	MACHINE SCREW (M1.7X2.5)	
Q700			RT1P144M	TRANSISTOR		E	2B		N09-6007-15	MACHINE SCREW (M2X2)	
Q704			RT1P144M	TRANSISTOR		F	1A		N09-6051-15	TAPTITE SCREW (PT2X5)	
Q706			DTC114YUA	DIGITAL TRANSISTOR		G	2A		N19-2163-04	FLAT WASHER (1.6X6X0.25)	
TH450			PRF18BE471QS2	POSITIVE RESISTOR		H	1B		N39-2020-48	PAN HEAD MACHINE SCREW (M2X2)	
A400	2D	*	X86-4040-11	FRONT-END UNIT	KK1M1	J	1B		N09-6108-15	TAPTITE SCREW (M2X3.5)	
A400	2D	*	X86-4042-70	FRONT-END UNIT	E1E2	K	3B		N09-6155-15	SEMS (TAPTITE SCREW) (PT2X6)	
MECHANISM ASSY (X92-5870-00) DXM-6C20W						DM1	3B		T42-1066-14	DC MOTOR (SPINDLE)	
1	2B		A10-5328-11	CHASSIS		DM2	2B		T42-1067-14	DC MOTOR (LOADING/SLED)	
2	1B	*	A10-5329-11	CHASSIS		DPU1	2B		X93-2130-01	OPTICAL PICKUP ASSY	
5	2B		D10-4910-13	ARM ASSY							
8	2A	*	D10-4911-13	LEVER ASSY							
10	2A		D10-4906-33	ARM							
11	2A		D10-4907-33	ARM							
12	3A		D10-4908-03	ARM							

K : KDC-X791 K1 : KDC-MP735U M1 : KDC-X7006U E1 : KDC-W7537U E2 : KDC-W7537UY
(E : Europe K : North America M : Other Areas)

△ Indicates safety critical components.