


PACKING

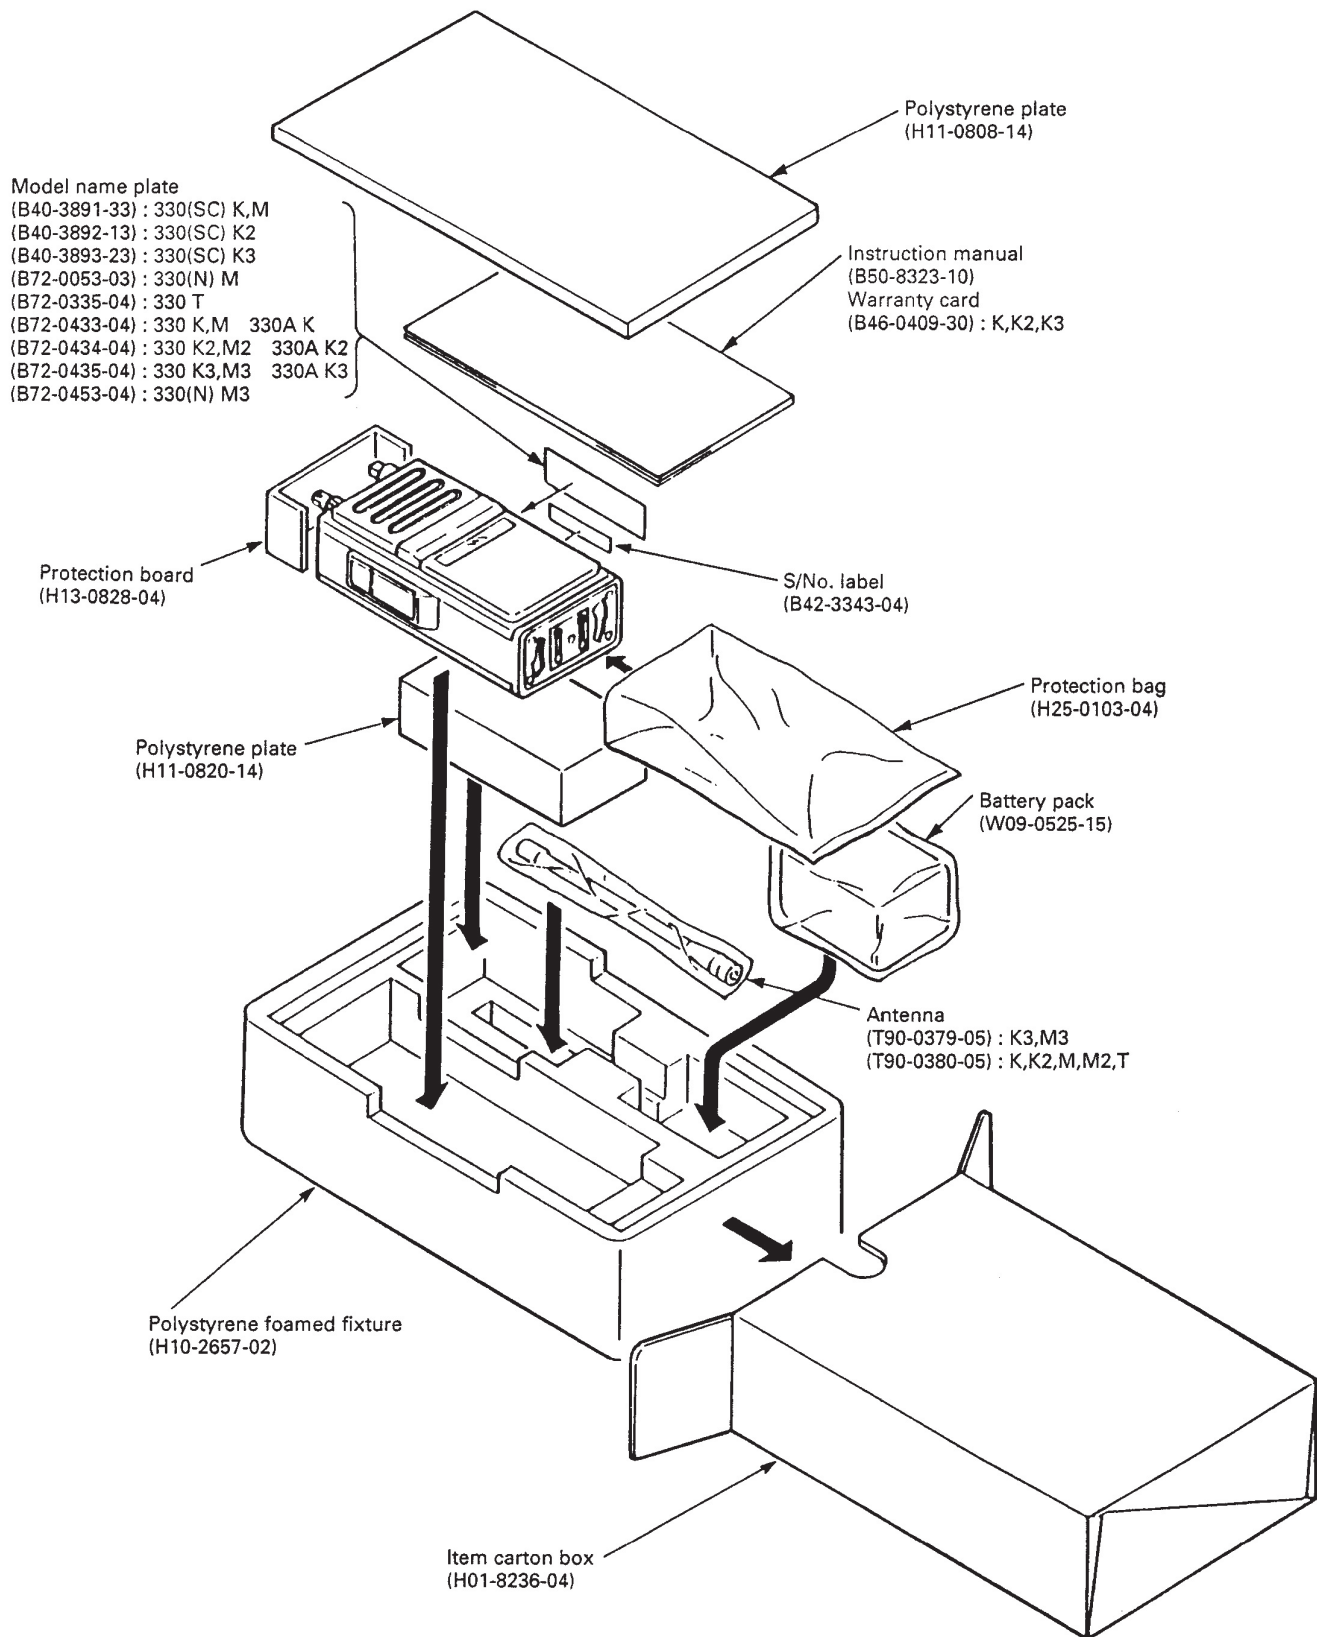

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TK-330/330(N)/330A/330(SC)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
TK-330/330(N)/330A/330(SC)						
1	2A		A02-0865-23	CASE ASSY(FRONT)		B
1	2A		A02-0868-13	CASE ASSY(FRONT)		A
1	2A		A02-0868-13	CASE ASSY(FRONT)		C
1	2A		A02-0868-13	CASE ASSY(FRONT)		D
3	3B		A02-0871-02	CASE(REAR)		
4	2B		A13-0685-11	FRAME		
5	2A		A20-2700-13	PANEL ASSY		
6	3A		A21-1531-03	DRESSING PANEL		A
6	3A		A21-1531-03	DRESSING PANEL		B
6	3A		A21-1531-03	DRESSING PANEL		D
6	3A		A21-1533-03	DRESSING PANEL		C
7	2A		A22-0761-04	SUB PANEL		
8	2B		A40-0618-05	BOTTOM PLATE		
			B10-1116-04	FRONT GLASS		B
			B40-3891-33	MODEL NAME PLATE	KM	B
			B40-3892-13	MODEL NAME PLATE	K2	B
			B40-3893-23	MODEL NAME PLATE	K3	B
			B42-3343-04	S/NO LABEL(REDIO)		
			B46-0409-30	WARRANTY CARD	KK2K3	
			B50-8323-10	INSTRUCTION MANUAL		
			B72-0053-03	MODEL NAME PLATE	M	D
			B72-0335-04	MODEL NAME PLATE	T	A
			B72-0433-04	MODEL NAME PLATE	KM	A
			B72-0433-04	MODEL NAME PLATE	K	C
			B72-0434-04	MODEL NAME PLATE	K2	C
			B72-0434-04	MODEL NAME PLATE	K2M2	A
			B72-0435-04	MODEL NAME PLATE	K3	C
			B72-0435-04	MODEL NAME PLATE	K3M3	A
10	3A		B72-0453-03	MODEL NAME PLATE	M3	D
C101			B30-0872-05	LED(TX/BUSY)		
			CC73FCH1H020C	CHIP C 2.0PF C		
			D10-0603-04	PTT LEVER ASSY		
13	2B		D10-0601-05	RELEASE LEVER		
15	2B		D10-0604-03	PTT LEVER		
16	2A		D32-0411-04	STOPPER(CH SW)		
			E23-0622-04	TERMINAL(CONTROL UNIT)		
			E31-3483-15	CONNECTING WIRE(VOL-TX.RX)		
			E31-3485-25	CONNECTING WIRE(MIC-TX.RX)		
			E31-3489-05	CONNECTING WIRE(SP/MIC-CONT)		
			E33-1884-15	FINISHED WIRE SET(POWER SUPPLY)		
18	2A		E06-0153-14	ANT RECEPTACLE		
19	2A		E08-1272-05	MIC RECEPTACLE		
20	2B		E23-0474-14	TERMINAL(POWER OUTSIDE)		
21	2B		E23-0617-04	TERMINAL(POWER INSIDE)		
22	2B		E23-0618-04	TERMINAL(SQUARE NUT)		
24	2A		E31-3484-25	CONNECTING WIRE(ANT-TX.RX)		
25	2B		E31-3486-05	CONNECTING WIRE(CONT-TX.RX)		
			F12-0417-04	SHEET	T	A
			F15-0662-04	SHADE(LCD)		
			F20-1027-04	INSULATING SHEET(FUSE)		
			F20-1032-04	INSULATING SHEET		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TK-330/330(N)/330A/330(SC)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
27	2B		F07-0871-03	COVER(PTT)		
28	2A		F07-0885-03	COVER		
29	3B		F10-1392-04	SHIELDING PLATE(TX.RX)		
30	1B		F10-1393-04	SHIELDING PLATE(CONT.)		
31	2B		F11-1125-13	SHIELDING COVER(CONT.)		
32	1A		F19-0650-04	BLIND PLATE(MIC)		
33	3B		F20-1018-04	INSULATING SHEET(TX.RX)		
34	1B		F20-1019-04	INSULATING SHEET(CONT.)		
35	1A		F20-1033-04	INSULATING SHEET(MIC UNIT)		
36	2B		F29-0438-05	INSULATOR(CASE,BOTTOM PLATE)		
37	3A		F29-0439-05	INSULATOR(VOL)		
38	3B	*	F20-1099-04	INSULATING SHEET(TX.RX)	T	A
39	3B	*	F10-2018-04	SHIELDING PLATE(TX.RX)	T	A
		*	G02-0595-04	LEAF SPRING(FINAL MODULE)		
		*	G02-0724-04	LEAF SPRING(FINAL MODULE)	T	A
		*	G02-0725-04	LEAF SPRING(DRIVE-FRAME)	T	A
			G10-0655-04	NON-WOVEN FABRIC(SHIELDING PLA)		
			G10-0690-04	FELT		
			G13-0938-04	CUSHION(COVER)	T	A
			G13-0946-04	CUSHION(IF)	T	A
			G13-0947-04	CUSHION(PLL)	T	A
			G13-1307-04	CUSHION(REAR-SHIELD)	T	A
			G13-1320-04	CUSHION(VOL)	K3M3	
40	2B		G01-0844-04	COIL SPRING(RELEASE LEVER)		
41	3A		G02-0505-05	D SPRING(CH)		
42	3A		G02-0588-14	LEAF SPRING(VCO-FRAME)		
43	3A		G09-0418-05	D SPRING(VOL)		
46	2B		G11-0617-04	CUSHION(TERMINAL)		
47	2A		G13-0901-04	CUSHION(FPC)		
49	3A		G53-0557-04	PACKING(TOGGLE SW)		
50	2B		G53-0558-04	PACKING(BOTTOM PLATE)		
51	2A		G53-0559-04	PACKING(MIC RECEPTACLE)		
52	1A		G53-0567-14	PACKING(CASE FRONT)		
53	3B		G53-0568-14	PACKING(CASE REAR)		
			H01-8236-04	ITEM CARTON BOX		
			H10-2657-02	POLYSTYRENE FOAMED FIXTURE		
			H11-0808-14	POLYSTYRENE PLATE		
			H13-0828-04	PROTECTION BOARD		
			H25-0103-04	PROTECTION BAG(125X250)		
			J21-4135-04	LEAD HOLDER		
			J25-6678-05	FLEXIBLE PC BOARD(MIC-CONT.)		
55	1A		J21-4188-14	MOUNTING HARDWARE(SPEAKER)		
56	2B		J21-4259-04	MOUNTING HARDWARE(FINAL MODULE)		
57	2B		J21-4260-04	MOUNTING HARDWARE		
58	2A		J21-4283-04	MOUNTING HARDWARE(MIC)		
59	2A		J25-6677-05	FLEXIBLE PC BOARD(PANEL-CONT.)		
61	1A		J39-0434-04	SPACER(MIC)		
62	2B		J69-0313-05	Ø RING(POWER SUPPLY)		
63	2A		J69-0314-05	Ø RING(LED)		
64	2A		J69-0315-05	Ø RING(PANEL)		
65	2B		J69-0316-05	Ø RING(BOTTOM PLATE)		
67	3A		K29-3160-14	KEY TOP	B	
			K29-3161-04	KNOB(VOL)		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TK-330/330(N)/330A/330(SC)
MIC UNIT (X42-3020-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
68	3A		K29-3162-14	KNØB(CH)		
L101			L34-0895-05	COIL		
70	3A		N14-0533-04	NUT(VOL)		
71	3A		N14-0541-14	NUT(ANT)		
72	2A		N14-0542-04	NUT(CH)		
73	2A		N15-1050-41	FLAT WASHER(TOGGLE SW)		A
73	2A		N15-1050-41	FLAT WASHER(TOGGLE SW)		B
73	2A		N15-1050-41	FLAT WASHER(TOGGLE SW)		D
A	3A, 3B		N35-2608-60	BINDING SCREW(2.6X10)		
B	2A		N09-2028-05	SCREW(2X3.5) COVER		
C	2B		N38-2680-41	SCREW(2.6X8) BOTTOM PLATE		
D	2B		N09-2053-05	SCREW(2X3) TERMINAL		
E	1B		N30-2604-41	PAN HEAD MACHINE SCREW(2.6X4)		
F	1B, 3B		N30-2606-41	PAN HEAD MACHINE SCREW(2.6X6)		
G	2A, 2B		N32-2606-41	FLAT HEAD MACHINE SCREW(2.6X6)		
H	2A		N39-2035-45	PAN HEAD MACHINE SCREW(2X3.5)		
I	1A		N89-2004-41	BINDING HEAD TAPTITE SCREW		
J	1A		N89-2005-41	BINDING HEAD TAPTITE SCREW		
S4/VR1	2A		R05-3442-05	POTENTIOMETER(10K, SW+VOL/OFF)		
S1	2A		S44-1412-05	TOGGLE SWITCH(QT)		
S2	2A		S44-1412-05	TOGGLE SWITCH(T.SW)		A
S2	2A		S44-1412-05	TOGGLE SWITCH(T.SW)		B
S2	2A		S44-1412-05	TOGGLE SWITCH(T.SW)		D
S3	2A		S29-1440-05	ROTARY SWITCH(CHANNEL)		
S5	2A		S29-1440-05	ROTARY SWITCH(GROUP)		C
			T90-0379-05	ANTENNA(400-450MHZ)	K3M3	
			T90-0380-05	ANTENNA(450-520MHZ)	KK2MM2	
			T90-0380-05	ANTENNA(450-520MHZ)	T	
77	1A		T07-0256-05	LOUDSPEAKER(FULLRANGE)		
78	1A		T91-0381-05	MICROPHONE(ECM)		
			W09-0525-15	BATTERY PACK(7.2V 1000MAH)		
			X52-3150-20	SIGNALING UNIT		B
80	1A		X42-3020-10	MIC UNIT		
82	1B		X53-3210-13	CONTROL UNIT		A
82	1B		X53-3210-14	CONTROL UNIT		B
82	1B		X53-3210-15	CONTROL UNIT		C
83	2B, 3B		X57-3290-10	TX-RX UNIT	KM	
83	2B, 3B		X57-3290-11	TX-RX UNIT	K2M2	
83	2B, 3B		X57-3290-12	TX-RX UNIT	K3M3	
83	2B, 3B		X57-3290-23	TX-RX UNIT	M	D
83	2B, 3B		X57-3290-24	TX-RX UNIT	M3	D
83	2B, 3B		X57-3290-51	TX-RX UNIT	T	
			212-2016-05	PLASTIC TUBE		
MIC UNIT (X42-3020-10)						
			T91-0381-05	MICROPHONE(ECM)		
C1			CC73FCH1H470J	CHIP C 47PF J		
C2			CK73FB1E473K	CHIP C 0.047UF K		
R1			RK73FB2A222J	CHIP R 2.2K J 1/10W		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

SIGNALING UNIT (X52-3150-XX)

CONTROL UNIT (X53-3210-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
SIGNALING UNIT (X52-3150-XX) -20 : KDM-4 -21 : KDM-4(A)						
A1			A33-0411-04	REFLECTOR(LCD)		
LCD1			B38-0315-05	LCD(FTD-8936)		
PL1 ,2			B30-0873-05	LAMP(5V 75MA)		
C1 ,2			CC73FCH1H101J	CHIP C 100PF J		
C3			C92-0004-05	ELECTRO 1.0UF 16WV		
C4			CK73FB1H102K	CHIP C 1000PF K		
C5			C92-0004-05	ELECTRO 1.0UF 16WV		
C6			CK73FB1H102K	CHIP C 1000PF K		
C7			C92-0501-05	CHIP-TAN 1.5UF 6.3WV		
C8 -10			CK73FB1H102K	CHIP C 1000PF K		
C11 -14			CC73FCH1H101J	CHIP C 100PF J		
C15			CK73FB1H471K	CHIP C 470PF K		
A2			E29-0480-04	CONNECTOR(LCD)		
WI			E31-6015-15	CONNECTING WIRE(6P)		
A3			J21-4258-04	MOUNTING HARDWARE(LCD)		
L1			L40-1001-48	SMALL FIXED INDUCTOR(10UH)		
X1			L78-0052-05	CERAMIC OSC(800KHZ)		
R1			RK73FB2A104J	CHIP R 100K J 1/10W		
R2			RK73FB2A124J	CHIP R 120K J 1/10W		
R3			RK73FB2A104J	CHIP R 100K J 1/10W		
R4			RK73FB2A471J	CHIP R 470 J 1/10W		
R5			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R6			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R7			RK73FB2A104J	CHIP R 100K J 1/10W		
R8			RK73FB2A473J	CHIP R 47K J 1/10W		
R9			RK73EB2B470J	CHIP R 47 J 1/8W		
R10 -12			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R13			RK73FB2A101J	CHIP R 100 J 1/10W		
R14 -17			RK73FB2A473J	CHIP R 47K J 1/10W		
R18			RK73EB2B470J	CHIP R 47 J 1/8W		
R19 ,20			R92-0670-05	CHIP R 0 OHM		
R21			RK73FB2A224J	CHIP R 220K J 1/10W		
IC1			HD404618A43FS	IC(MICROPROCESSOR)		
IC2 ,3			AK93C46F	IC(1K EEPROM)		
IC4			S-81250HG-RD	IC(VOLTAGE REGULATOR/ +5V)		
IC5			S-8054HN-CB	IC(VOLTAGE DETECTOR)		
IC6 ,7			CAT35C104KI	IC(4K EEPROM) 100CH)		
Q1			DTC114YK	DIGITAL TRANSISTOR		
Q2			FMG5	DIGITAL TRANSISTOR		
Q3			DTC114YK	DIGITAL TRANSISTOR		
Q4			2SC2712(Y)	DIGITAL TRANSISTOR		
CONTROL UNIT (X53-3210-XX) -13 : TK-330/330(N) -14 : TK-330(SC) -15 : TK-330A						
C1			C92-0004-05	ELECTRO 1.0UF 16WV		
C2 ,3			CK73FB1H103K	CHIP C 0.010UF K		
C4			CK73EB1H683K	CHIP C 0.068UF K		
C5			CK73EB1H104K	CHIP C 0.10UF K		
C6			CK73FB1H682K	CHIP C 6800PF K		
C7			CK73FB1H332K	CHIP C 3300PF K		
C8			CK73FB1H333K	CHIP C 0.033UF K		
C9			C92-0004-05	ELECTRO 1.0UF 16WV		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-3210-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C10			CC73FB1H103K	CHIP C 0.01UF K		
C11			CK73FF1E104Z	CHIP C 0.1UF Z		
C12			C92-0002-05	CHIP TAN 0.22UF 35WV		
C13			C92-0004-05	ELECTRO 1.0UF 16WV		
C14 ,15			CK73FB1H183K	CHIP C 0.018UF K		
C16			CK73FB1H103K	CHIP C 0.010UF K		
C17 ,18			CK73FB1H682K	CHIP C 6800PF K		
C19			C92-0004-05	ELECTRO 1.0UF 16WV		
C20			CC73FB1H102K	CHIP C 1000PF K		
C21 ,22			CK73FB1H103K	CHIP C 0.010UF K		
C23			CK73FB1H102K	CHIP C 1000PF K		
C24			CK73FB1H103K	CHIP C 0.010UF K		
C25			CK73FB1H473K	CHIP C 0.047UF K		
C26			CK73FB1H103K	CHIP C 0.010UF K		
C27 ,28			CC73FCH1H330J	CHIP C 33PF J		
C29			CK73FB1H223K	CHIP C 0.022UF K		
C30			CK73FB1H103K	CHIP C 0.010UF K		
C31			C92-0511-05	CHIP TAN 0.15UF 35WV		
C32			C92-0004-05	ELECTRO 1.0UF 16WV		
C33			CK73FB1H103K	CHIP C 0.010UF K		
C34 ,35			CK73FB1H102K	CHIP C 1000PF K		
C36			CK73FSL1H471J	CHIP C 470PF J		
C37			C92-0004-05	ELECTRO 1.0UF 16WV		
C38 -41			CK73FSL1H471J	CHIP C 470PF J		
C48 ,49			CK73FB1H102K	CHIP C 1000PF K		
C50 ,51			CC73FSL1H471J	CHIP C 47PF J		
C52			CK73FB1H102K	CHIP C 1000PF K		
C53			CC73FSL1H471J	CHIP C 47PF J		
C54			C91-0507-05	CHIP-TAN 4.7UF 6.3WV		
C55 ,56			CK73FB1H102K	CHIP C 1000PF K		
C58			CK73FB1H152K	CHIP C 1500PF K		
C59			CK73FB1H102K	CHIP C 1000PF K		
C60 ,61			CK73FCH1H101J	CHIP C 100PF J		
C63			CK73FB1H102K	CHIP C 1000PF K		
A1			J30-0563-05	SPACER		
J1			E40-5181-05	PIN CONNECTOR(4P)		
J2			E40-5183-05	PIN CONNECTOR(6P)		
J3			E40-5237-05	FPC CONNECTOR(10P)		
J4			E40-5255-05	FPC CONNECTOR(18P)		
J5			E40-5285-05	FPC CONNECTOR(24P)		
X1			L77-1403-05	CRYSTAL RESONATOR(10MHZ)		
R1			R92-0679-05	CHIP R 0 OHM		
R3 ,4			R92-0670-05	CHIP R 0 OHM		
R5 -16			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R17			RK73FB2A103J	CHIP R 10K J 1/10W		
R18			R92-0670-05	CHIP R 0 OHM		
R19			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R20			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R21			RK73FB2A123J	CHIP R 12K J 1/10W		
R22			RK73FB2A225J	CHIP R 2.2M J 1/10W		
R23			RK73FB2A684J	CHIP R 680K J 1/10W		
R24			RK73FB2A103J	CHIP R 10K J 1/10W		
R25			RK73FB2A273J	CHIP R 27K J 1/10W		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-3210-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R26			RK73FB2A104J	CHIP R 100K J 1/10W		
R27			RK73FB2A623J	CHIP R 62K J 1/10W		
R28			RK73FB2A683J	CHIP R 68K J 1/10W		
R29			RK73FB2A433J	CHIP R 43K J 1/10W		
R30			RK73FB2A104J	CHIP R 100K J 1/10W		
R31 ,32			RK73FB2A623J	CHIP R 62K J 1/10W		
R33			RK73FB2A103J	CHIP R 10K J 1/10W		
R34			R92-0670-05	CHIP R 0 OHM		
R35			R92-0670-05	CHIP R 0 OHM		A
R35			R92-0670-05	CHIP R 0 OHM		C
R35			R92-0670-05	CHIP R 0 OHM		D
R36 ,37			RK73FB2A124J	CHIP R 120K J 1/10W		
R38			RK73FB2A183J	CHIP R 18K J 1/10W		
R39 ,40			RK73FB2A623J	CHIP R 62K J 1/10W		
R41			RK73FB2A473J	CHIP R 47K J 1/10W		
R42			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R43			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R44			RK73FB2A333J	CHIP R 33K J 1/10W		
R45			R92-0670-05	CHIP R 0 OHM		
R46			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R47			RK73FB2A333J	CHIP R 33K J 1/10W		
R48 -52			RK73FB2A473J	CHIP R 47K J 1/10W		
R53			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R54			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R55			RK73FB2A683J	CHIP R 68K J 1/10W		
R56			R92-0679-05	CHIP R 0 OHM		
R57			RK73FB2A683J	CHIP R 68K J 1/10W		
R58 ,59			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R60			RK73FB2A473J	CHIP R 47K J 1/10W		
R61			RK73FB2A183J	CHIP R 18K J 1/10W		
R62 -64			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R65			RK73FB2A101J	CHIP R 100 J 1/10W		
R66			RK73FB2A681J	CHIP R 680 J 1/10W		
R67			RK73FB2A821J	CHIP R 820 J 1/10W		
R68 -77			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R78			R90-0710-05	MULTI-COMP 47KX9		
R79 -83			RK73FB2A473J	CHIP R 47K J 1/10W		
R84			R90-0708-05	MULTI-COMP 1KX5		
R85 -91			RK73FB2A473J	CHIP R 47K J 1/10W		
R92			RK73FB2A104J	CHIP R 100K J 1/10W		
R93			RK73FB2A225J	CHIP R 2.2M J 1/10W		
R94			RK73FB2A100J	CHIP R 10 J 1/10W		
R95			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R96			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R97			RK73FB2A103J	CHIP R 10K J 1/10W		
R98 ,99			RK73FB2A473J	CHIP R 47K J 1/10W		
R100-102			R92-0670-05	CHIP R 0 OHM		
R103			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R104			RK73FB2A100J	CHIP R 10 J 1/10W		
R105			R92-0670-05	CHIP R 0 OHM		
R106			R92-0670-05	CHIP R 0 OHM		A
R106			R92-0670-05	CHIP R 0 OHM		D
R107			R92-0670-05	CHIP R 0 OHM		A
R107			R92-0670-05	CHIP R 0 OHM		B
R107			R92-0670-05	CHIP R 0 OHM		O

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

CONTROL UNIT (X53-3210-XX)

TX-RX UNIT (X57-3290-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R109-111 R112 R113 R114 R115			R92-0670-05 R92-0679-05 RK73FB2A104J R92-0670-05 RK73FB2A335J	CHIP R 0 0HM CHIP R 0 0HM CHIP R 100K J 1/10W CHIP R 0 0HM CHIP R 3.3M J 1/10W		
D1 D2 D3 -8 D9 IC1			DAN202K HSM88AS 02CZ9.1(X,Y) 02CZ10(X,Y) M37450M4-535FP	CHIP DIODE CHIP DIODE CHIP ZENER DIODE CHIP ZENER DIODE IC(MICROPROCESSOR)		
IC2 IC2 IC3 IC4 IC5 ,6			S-81250HG-RD SCI7710YBS S-8054HN-CB NJM4558M LM2904M	IC(VOLTAGE REGULATOR/ +5V) IC(VOLTAGE REGULATOR) +5V) IC(VOLTAGE DETECTOR) IC(OP AMP X2) IC(OP AMP X2)		
IC5 ,6 IC7 IC7 IC8 IC9			NJM2904M NMC93CS66N*J NM93CS66EN NMC93CS66EN TC4S66F	IC(OP AMP X2) IC(EEPROM) IC(4K EEPROM) IC(IC(4K EEPROM)) IC(BILATERAL SWITCH)		
Q1 Q2 Q3 Q4 Q5			FMC5 FMC2 FMC5 DTC363EK 2SD1246(S,T)	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR		
Q6 Q7			FMC5 FMA1	DIGITAL TRANSISTOR DIGITAL TRANSISTOR		
TX-RX UNIT (X57-3290-XX) -10: K,M -11: K2,M2 -12: K3,M3 -23: 330(N) M -24: 330(N) M3 -51: 330 T						
C1 C2 C3 C4 ,5 C6			CK73FB1H102K C90-2048-05 CK73FB1H102K CK73FB1H103K C92-0002-05	CHIP C 1000PF K ELECTRO 6.8UF 6.3WV CHIP C 1000PF K CHIP C 0.010UF K CHIP TAN 0.22UF 35WV		
C7 C8 C9 -13 C14 C15			CK73FB1H102K CK73FB1H103K CK73FB1H102K C92-0005-05K CK73FB1H102K	CHIP C 1000PF K CHIP C 0.010UF K CHIP C 1000PF K CHIP-TAN 2.2UF 6.3WV CHIP C 1000PF K		
C17 ,18 C19 ,20 C21 -23 C24 C25			CK73FB1H102K CK73FB1H103K CK73FB1H102K C92-0005-05 CK73FB1H102K	CHIP C 1000PF K CHIP C 0.010UF K CHIP C 1000PF K ELECTRO 2.2UF 6.3WV CHIP C 1000PF K		
C26 C27 C28 C29 C30			CE04NW0J220M CK73FB1H102K C92-0005-05 CK73FB1H102K C92-0005-05	ELECTRO 22UF 6.3WV CHIP C 1000PF K ELECTRO 2.2UF 6.3WV CHIP C 1000PF K ELECTRO 2.2UF 6.3WV		
C31 C32 C33 C34 -36 C37			CC73FCH1H030C CK73FB1H103K C92-0009-05 CK73FB1H102K CC73FCH1H100D	CHIP C 3PF C CHIP C 0.010UF K CHIP TAN 4.7UF 10WV CHIP C 1000PF K CHIP C 10PF D		
C38			CK73FB1H102K	CHIP C 1000PF K		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-3290-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C39			C92-0509-05	TANTAL 10UF 6.3WV		
C40			CK73FB1H103K	CHIP C 0.010UF K	KMT	
C40			CK73FB1H103K	CHIP C 0.010UF K	K2M2	
C40			CK73FF1E104Z	CHIP C 0.1UF Z	K3M3	
C41			CK73FB1H103K	CHIP C 0.010UF K		
C42			CK73FB1H102K	CHIP C 1000PF K		
C43			CC73FCH1H030C	CHIP C 3PF C	KMT	
C43			CC73FCH1H030C	CHIP C 3PF C	K2M2	
C43			CC73FCH1H050C	CHIP C 5PF C	K3M3	
C44 , 45			CK73FB1H102K	CHIP C 1000PF K		
C46 , 47			CK73FB1H103K	CHIP C 0.010UF K		
C48			C90-2041-05	ERECTRO 10UF 10WV		
C49			CK73FB1H103K	CHIP C 0.010UF K		
C50			CK73FB1H102K	CHIP C 1000PF K		
C51			C90-2041-05	ERECTRO 10UF 10WV		
C52			CK73FB1H103K	CHIP C 0.010UF K		
C53			CK73FB1H102K	CHIP C 1000PF K		
C54			C90-2041-05	ERECTRO 10UF 10WV		
C55			CK73FB1H103K	CHIP C 0.010UF K		
C56 -58			CK73FB1H102K	CHIP C 1000PF K		
C59			CC73FCH1H020C	CHIP C 2.0PF C	K2M2	
C59			CK73FCH1H040C	CHIP C 4PF C	K3M3	
C60			CC73FCH1H030C	CHIP C 3PF C	KMT	
C60			CC73FCH1H040C	CHIP C 4PF C	K2M2	
C60			CC73FCH1H090D	CHIP C 9PF D	K3M3	
C61			CK73FCH1H151J	CHIP C 150PF J		
C62			CK73FB1H102K	CHIP C 1000PF K		
C63			CC73FCH1H020C	CHIP C 2.0PF C	KMT	
C63			CC73FCH1H020C	CHIP C 2.0PF C	K2M2	
C63			CC73FCH1H050C	CHIP C 5PF C	K3M3	
C64			CC73FB1H102K	CHIP C 1000PF K		
C65			CC73FCH1H010C	CHIP C 1PF C	K3M3	
C65			CC73FCH1H020C	CHIP C 2.0PF C	K2M2	
C65			CC73FCH1H030C	CHIP C 3PF C	KMT	
C66			CC73FCH1H0R5C	CHIP C 0.5PF C	K2M2	
C66			CC73FCH1H0R5C	CHIP C 0.5PF C	K3M3	
C67			CC73FCH1H040C	CHIP C 4PF C	K2M2	
C67			CC73FCH1H050C	CHIP C 5PF C	KMT	
C67			CC73FCH1H060C	CHIP C 6.0PF C	K3M3	
C68			CC73FCH1H030C	CHIP C 3PF C	K2M2	
C68			CC73FCH1H040C	CHIP C 4PF C	KMT	
C68			CC73FCH1H050C	CHIP C 5PF C	K3M3	
C69			CK73FB1H102K	CHIP C 1000PF K		
C70			CK73FB1H103K	CHIP C 0.010UF K		
C71			CK73FB1H102K	CHIP C 1000PF K		
C72			CC73FCH1H020C	CHIP C 2.0PF C	K3M3	
C72			CC73FCH1H100D	CHIP C 10PF D	KMT	
C72			CC73FCH1H100D	CHIP C 10PF D	K2M2	
C73			CC73FCH1H080D	CHIP C 8PF D	K3M3	
C73			CC73FCH1H220J	CHIP C 22PF J	KMT	
C73			CC73FCH1H470J	CHIP C 47PF J	K2M2	
C74			CK73FB1H102K	CHIP C 1000PF K		
C75			CK73FB1H103K	CHIP C 0.010UF K		
C76			CK73FB1H102K	CHIP C 1000PF K		
C77 , 78			CK73FB1H103K	CHIP C 0.010UF K		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-3290-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C79 C80 C81 C82 ,83 C84			C92-0512-05 CK73FB1H103K C92-0002-05 C90-2052-05 CK73FB1H102K	CHIP-TAN 1.0UF 16WV CHIP C 0.010UF K CHIP TAN 0.22UF 35WV ELECTRO 68UF 10WV CHIP C 1000PF K		
C85 C85 C85 C86 C87			CC73FCH1H010C CC73FCH1H020C CC73FCH1H030C CK73FB1H102K CC73FCH1H040C	CHIP C 1PF C CHIP C 2.0PF C CHIP C 3PF C CHIP C 1000PF K CHIP C 4PF C	K2M2 KMT K3M3 KMT	
C87 C87 C88 C88 C89			CC73FCH1H040C CC73FCH1H050C CC73FCH1H0R5C CC73FCH1H0R5C CC73FCH1H070D	CHIP C 4PF C CHIP C 5PF C CHIP C 0.5PF C CHIP C 0.5PF C CHIP C 7PF D	K2M2 K3M3 KMT K2M2 KMT	
C89 C89 C90 C90 C90			CC73FCH1H070D CC73FCH1H100D CC73FCH1H020C CC73FCH1H020C CC73FCH1H040C	CHIP C 7PF D CHIP C 10PF D CHIP C 2.0PF C CHIP C 2.0PF C CHIP C 4PF C	K2M2 K3M3 K2M2 K3M3 KMT	
C91 C91 C91 C92 ,93 C94			CC73FCH1H070D CC73FCH1H070D CC73FCH1H100D CK73EB1E104K C91-0753-05	CHIP C 7PF D CHIP C 7PF D CHIP C 10PF D CHIP C 0.10UF K CHIP C 470PF K	KMT K2M2 K3M3	
C95 C201			CC73FCH1H010C CK73FB1H102K	CHIP C 1PF C CHIP C 1000PF K	KMT	
J1 J2 ,3 J4			E33-1885-05 E40-5244-05 E04-0174-05 E23-0621-05	FINISHED WIRE SET PIN CONNECTOR(24P) RF COAXIAL CABLE RECEPTACLE TERMINAL(1P)		
F201			F10-1395-04 F12-0418-14 F06-4025-05 J30-0555-04	SHIELDING PLATE(FINAL MODULE) INSULATING SHEET(FINAL MODULE) FUSE(4A) SPACER(POWER MODULE)		
L1 L2 L3 L4 L5			L40-4792-48 L33-0680-05 L40-1092-48 L34-1183-05 L34-0895-05	SMALL FIXED INDUCTOR(4.7UH) CHOKE COIL SMALL FIXED INDUCTOR(1UH) COIL COIL		
L6 L6 L6 L7 L7			L79-0862-05 L79-0864-05 L79-0866-05 L40-1572-48 L40-1872-48	FILTER(465MHZ) FILTER(500MHZ) FILTER(415MHZ) SMALL FIXED INDUCTOR(15NH) SMALL FIXED INDUCTOR(18NH)	KMT K2M2 K3M3 K2M2 KMT	
L7 L8 L8 L8 L9			L40-4772-48 L40-1072-48 L40-1572-48 L40-2272-48 L79-0863-05	SMALL FIXED INDUCTOR(47NH) SMALL FIXED INDUCTOR(10NH) SMALL FIXED INDUCTOR(15NH) SMALL FIXED INDUCTOR(22NH) FILTER(465MHZ)	K3M3 K3M3 KMT K2M2 KMT	
L9 L9 L10			L79-0865-05 L79-0867-05 L40-2772-48	FILTER(500MHZ) FILTER(415MHZ) SMALL FIXED INDUCTOR(27NH)	K2M2 K3M3 K2M2	

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-3290-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
L10			L40-4772-48	SMALL FIXED INDUCTOR(47NH)	KMT	
L10			L40-8272-48	SMALL FIXED INDUCTOR(82NH)	K3M3	
L11			L40-2272-48	SMALL FIXED INDUCTOR(22NH)	KMT	
L11			L40-3372-48	SMALL FIXED INDUCTOR(33NH)	K2M2	
L11			L40-8272-48	SMALL FIXED INDUCTOR(82NH)	K3M3	
L12			L34-1264-05	COIL	K3M3	
L12			L34-1266-05	COIL	KMT	
L12			L34-1266-05	COIL	K2M2	
L13			L34-1266-05	COIL		
L14			L40-1072-48	COIL(10NH)	KMT	
L14			L40-1072-48	COIL(10NH)	K2M2	
L14			L40-1272-48	COIL(12NH)	K3M3	
L15		*	L92-0133-05	CORE	T	
X1			L77-1404-25	TCXO(12.5MHZ)		
R1 -3			R92-0679-05	CHIP R 0 OHM		
R4			RK73FB2A473J	CHIP R 47K J 1/10W		
R5			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R6			RK73FB2A103J	CHIP R 10K J 1/10W		
R7			R92-0679-05	CHIP R 0 OHM		
R8			R92-0670-05	CHIP R 0 OHM		
R9			R92-0679-05	CHIP R 0 OHM		
R10			RK73FB2A473J	CHIP R 47K J 1/10W		
R11			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R12 ,13			R92-0679-05	CHIP R 0 OHM		
R14			RK73EB2B100J	CHIP R 10 J 1/8W		
R15 ,16			RK73FB2A103J	CHIP R 10K J 1/10W		
R17			RK73FB2A471J	CHIP R 470 J 1/10W		
R18			R92-0670-05	CHIP R 0 OHM		
R19 ,20			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R21			RK73FB2A473J	CHIP R 47K J 1/10W		
R22 ,23			R92-0679-05	CHIP R 0 OHM		
R24			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R25			RK73FB2A103J	CHIP R 10K J 1/10W		
R26			RK73FB2A100J	CHIP R 10 J 1/10W		
R27			RK73FB2A101J	CHIP R 100 J 1/10W		
R28			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R29 -31			RK73FB2A103J	CHIP R 10K J 1/10W		
R32			R92-0670-05	CHIP R 0 OHM		
R33			RK73FB2A473J	CHIP R 47K J 1/10W		
R34 ,35			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R36			RK73FB2A473J	CHIP R 47K J 1/10W		
R37			RK73FB2A103J	CHIP R 10K J 1/10W		
R38			RK73FB2A273J	CHIP R 27K J 1/10W		
R39 ,40			R92-0679-05	CHIP R 0 OHM		
R41 -43			RK73FB2A821J	CHIP R 820 J 1/10W		
R44			RK73FB2A180J	CHIP R 18 J 1/10W		
R45 ,46			RK73FB2A271J	CHIP R 270 J 1/10W		
R47			RK73FB2A153J	CHIP R 15K J 1/10W		
R48			RK73FB2A273J	CHIP R 27K J 1/10W		
R49			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R49			RK73FB2A471J	CHIP R 470 J 1/10W	T	
R50 ,51			RK73FB2A333J	CHIP R 33K J 1/10W		
R52			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R52			RK73FB2A821J	CHIP R 820 J 1/10W	T	

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-3290-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R53 ,54			RK73FB2A101J	CHIP R 100 J 1/10W	MM3 T	D
R55			RD14BB2C102J	RD 1.0K J 1/6W		
R55			RD14BB2C102J	RD 1.0K J 1/6W		
R56			R92-0679-05	CHIP R 0 0HM		
R57			RK73FB2A103J	CHIP R 10K J 1/10W		
R57			RK73FB2A103J	CHIP R 10K J 1/10W	T MM3	B C D
R57			RK73FB2A103J	CHIP R 10K J 1/10W		
R57			RK73FB2A183J	CHIP R 18K J 1/10W		
R57			RK73FB2A183J	CHIP R 18K J 1/10W		
R58			RK73FB2A822J	CHIP R 8.2K J 1/10W		
R59 ,60			R92-1219-05	CHIP R 2.2 J 1/2W		
R61			R92-0670-05	CHIP R 0 0HM		
R62			R92-0679-05	CHIP R 0 0HM		
R63			R92-0670-05	CHIP R 0 0HM		
R64			R92-0679-05	CHIP R 0 0HM		
R65			RK73FB2A103J	CHIP R 10K J 1/10W	K2M2	
R66			RK73FB2A560J	CHIP R 56 J 1/10W		
VR1 ,2			R12-1442-05	TRIMMING POT.(2.2K)		
VR3 -6			R12-3445-05	TRIMMING POT.(47K)		
W1			R92-1061-05	JUMPER REST 0 0HM		
W2 ,3			E33-1905-15	FINISHED WIRE SET		
D1			DAN202K	CHIP DIODE		
D2			DAP202(K)	CHIP DIODE		
D3			DAN202K	CHIP DIODE		
D4			HSM88AS	CHIP DIODE		
D5			HSM2693	CHIP DIODE	K2M2	
D6 ,7			HSM88AS	CHIP DIODE	K2M2 K3M3 KMT	
IC1			AFL24F3300E12	IC(SPLATER FILTER))		
IC2			M57786HA	IC(POWER MODULE)		
IC2			M57786LA	IC(POWER MODULE)		
IC2			M57786MA	IC(POWER MODULE)		
IC3			KCE02	IC(AF BPF)		
Q1			2SA1362(Y)	TRANSISTOR		
Q2			DTC144EK	DIGITAL TRANSISTOR		
Q3			2SA1362(Y)	TRANSISTOR		
Q4			DTC144EK	DIGITAL TRANSISTOR		
Q5			2SA1362(Y)	TRANSISTOR		
Q6			2SA1162(Y)	TRANSISTOR		
Q7			2SA1213(Y)	TRANSISTOR		
Q8			2SC2712(Y)	TRANSISTOR		
Q9			2SC2712(GR)	TRANSISTOR		
Q10			FMG2	TRANSISTOR		
Q11			2SC3838KZB(N)	TRANSISTOR		
Q12			2SC4093	TRANSISTOR		
Q13			3SK140(GR)	FET		
Q14			DTA144EK	DIGITAL TRANSISTOR		
Q15			2SA1162(Y)	TRANSISTOR	T MM3	D
Q16 ,17			DTC144EK	DIGITAL TRANSISTOR		
Q18			DTC144EK	DIGITAL TRANSISTOR		
Q18			DTC144EK	DIGITAL TRANSISTOR		
TH1			157-101-53019	THERMISTER(100)		
A1			X59-3570-10	SUB UNIT(AVR)		
A2			X59-3580-10	SUB UNIT(SW)		
A3			X59-3520-10	SUB UNIT(MIC AMP)		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-3290-XX)

IF (X58-3530-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
A4			X58-3540-10	SUB UNIT(VCO F1)	KMT	
A4			X58-3540-11	SUB UNIT(VCO F2)	K2M2	
A4			X58-3540-12	SUB UNIT(VCO F3)	K3M3	
A5			X58-3550-10	SUB UNIT(PLL)		
A6		*	X58-3930-50	SUB UNIT(DRIVE)	T	
A6			X59-3540-10	SUB UNIT(DRIVE)	KMK2M2	
A6			X59-3540-12	SUB UNIT(DRIVE)	K3M3	
A7			X58-3560-10	SUB UNIT(ANT SW)	KMT	
A7			X58-3560-11	SUB UNIT(ANT SW)	K2M2	
A7			X58-3560-12	SUB UNIT(ANT SW)	K3M3	
A8			X59-3590-10	SUB UNIT(APC)		
A9			X58-3530-10	SUB UNIT(IF)		A
A9			X58-3530-10	SUB UNIT(IF)		B
A9			X58-3530-10	SUB UNIT(IF)		C
A9			X58-3530-21	SUB UNIT(IF:NARROW)	T	
A9			X58-3530-21	SUB UNIT(IF:NARROW)	MM3	D
A10			X59-3560-10	SUB UNIT(AF PA)		
IF (X58-3530-XX) -10 : TK-330(F) M,M2,M3,E -21 : TK-330(NF), TK-330(F) T -61 : TK-330(EF)						
C1			CC73GCH1H010C	CHIP C 1PF C		A
C1			CC73GCH1H010C	CHIP C 1PF C		B
C1			CC73GCH1H010C	CHIP C 1PF C		C
C1			CC73GCH1H040C	CHIP C 4PF C	T	
C1			CC73GCH1H040C	CHIP C 4PF C	MM3	D
C2			CC73GCH1H050C	CHIP C 5PF C		
C3			CC73FCH1H220J	CHIP C 22PF J		
C4			CC73GCH1H120J	CHIP C 12PF J		
C5			CC73GCH1H070D	CHIP C 7PF D		A
C5			CC73GCH1H070D	CHIP C 7PF D		B
C5			CC73GCH1H070D	CHIP C 7PF D		C
C5			CC73GCH1H180J	CHIP C 18PF J	T	
C5			CC73GCH1H180J	CHIP C 18PF J	MM3	D
C6			CC73GCH1H010C	CHIP C 1PF C		A
C6			CC73GCH1H010C	CHIP C 1PF C		B
C6			CC73GCH1H010C	CHIP C 1PF C		C
C6			CC73GCH1H040C	CHIP C 4PF C	T	
C6			CC73GCH1H040C	CHIP C 4PF C	MM3	D
C7 ,8			CC73GB1H103K	CHIP C 0.01UF K		
C9			CC73GB1H472K	CHIP C 4700PF K		
C10 ,11			CK73EB1E104K	CHIP C 0.10UF K		
C12			CK73GB1H103K	CHIP C 0.01UF K		
C13			C92-0501-05	CHIP-TAN 1.5UF 6.3WV		
C14			CK73GB1H103K	CHIP C 0.01UF K		
C15			CC73GCH1H101J	CHIP C 100PF J		
C16 -19			CK73GB1H103K	CHIP C 0.01UF K		
C20			CK73EB1E103K	CHIP C 0.010UF K		
C21			CK73GB1H472K	CHIP C 4700PF K		
C22			C92-0003-05	CHIP TAN 0.47UF 25WV	KMK2M2	
C22			C92-0003-05	CHIP TAN 0.47UF 25WV	K3M3	
C22			C92-0004-05	ELECTRO 1.0UF 16WV	T	
C22			C92-0004-05	ELECTRO 1.0UF 16WV	MM3	D
C23			CK73GB1H103K	CHIP C 0.01UF K		
C24 -26			CK73GB1H102K	CHIP C 1000PF K		
J1 ,2			E40-5337-05	PIN CONNECTOR(5P)		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

IF (X58-3530-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
A1			F11-1126-04	SHIELDING CASE		
			G13-0945-04	CUSHION		
L1			L34-4114-05	COIL(32.1MHZ)		
L2			L34-4015-05	COIL		
X1			L77-1399-05	CRYSTAL RESONATOR(31.645MHZ)		
XF1			L72-0373-05	CERAMIC FILTER(CFZM455D)		A
XF1			L72-0373-05	CERAMIC FILTER(CFZM455D)		B
XF1			L72-0373-05	CERAMIC FILTER(CFZM455D)		C
XF1			L72-0379-05	CERAMIC FILTER(CFZM455G)	T	
XF1			L72-0379-05	CERAMIC FILTER(CFZM455G)	MM3	D
XF2			L71-0289-05	CRYSTAL FILTER(32.1MHZ/7.5KHZ)		A
XF2			L71-0289-05	CRYSTAL FILTER(32.1MHZ/7.5KHZ)		B
XF2			L71-0289-05	CRYSTAL FILTER(32.1MHZ/7.5KHZ)		C
XF2			L71-0413-05	CRYSTAL FILTER(32.1MHZ/3.75KHZ)		
XF2			L71-0413-05	CRYSTAL FILTER(32.1MHZ/3.75KHZ)	MM3	D
R1			RK73GB1J122J	CHIP R 1.2K J 1/16W		A
R1			RK73GB1J122J	CHIP R 1.2K J 1/16W		B
R1			RK73GB1J122J	CHIP R 1.2K J 1/16W		C
R1			RK73GB1J471J	CHIP R 470 J 1/16W	MM3	D
R1			RK73GB1J471J	CHIP R 470 J 1/16W	T	
R2			RK73GB1J101J	CHIP R 100 J 1/16W		
R3			RK73GB1J394J	CHIP R 390K J 1/16W		
R4			RK73GB1J121J	CHIP R 120 J 1/16W		
R5			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R6			RK73GB1J153J	CHIP R 15K J 1/16W	KMK2M2	
R6			RK73GB1J153J	CHIP R 15K J 1/16W	K3M3	
R6			RK73GB1J223J	CHIP R 22K J 1/16W	T	
R6			RK73GB1J223J	CHIP R 22K J 1/16W	MM3	D
R7			RK73GB1J562J	CHIP R 5.6K J 1/16W		
R8			RK73GB1J184J	CHIP R 180K J 1/16W	KMK2M2	
R8			RK73GB1J184J	CHIP R 180K J 1/16W	K3M3	
R8			RK73GB1J474J	CHIP R 470K J 1/16W	T	
R8			RK73GB1J474J	CHIP R 470K J 1/16W	MM3	D
R9			RK73GB1J333J	CHIP R 33K J 1/16W		
R10			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R11			RK73GB1J561J	CHIP R 560 J 1/16W		
R12			RK73GB1J394J	CHIP R 390K J 1/16W		
R13			RK73GB1J823J	CHIP R 82K J 1/16W		
R14			RK73FB2A223J	CHIP R 22K J 1/10W		
R15			RK73FB2A473J	CHIP R 47K J 1/10W		
R16			RK73GB1J122J	CHIP R 1.2K J 1/16W		A
R16			RK73GB1J122J	CHIP R 1.2K J 1/16W		B
R16			RK73GB1J122J	CHIP R 1.2K J 1/16W		C
R16			RK73GB1J471J	CHIP R 470 J 1/16W	MM3	D
R16			RK73GB1J471J	CHIP R 470 J 1/16W	T	
R17			RK73GB1J184J	CHIP R 180K J 1/16W		
R18			RK73GB1J561J	CHIP R 560 J 1/16W		
D1			DA204U	CHIP DIODE		
D2			MA110	CHIP DIODE		
IC1			MC3361D	IC(FM IF SYSTEM)		
Q1			2SC4215(Y)	TRANSISTOR		
Q2			2SC4116(Y)	TRANSISTOR		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

IF (X58-3530-XX)

VCO (X58-3540-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
TH1			157-153-45001	THERMISTOR(15K)		
VCO (X58-3540-XX) -10 : 330 K,K2,K3,M,M2,M3, 330(SC), 330A -21 : 330 T, 330(N)						
C1			CK73GB1H102M	CHIP C 1000PF M		
C2			CC73GCH1H010C	CHIP C 1PF C		
C3			CC73GCH1H270J	CHIP C 27PF J	K3M3	
C3			CC73GCH1H470J	CHIP C 47PF J	KMT	
C3			CC73GCH1H560J	CHIP C 56PF J	K2M2	
C4			CC73GCH1H080D	CHIP C 8PF D	K3M3	
C4			CC73GCH1H100D	CHIP C 10PF D	K2M2	
C4			CC73GCH1H120J	CHIP C 12PF J	KMT	
C5			CC73GCH1H100D	CHIP C 10PF D	KMT	
C5			CC73GCH1H100D	CHIP C 10PF D	K2M2	
C5			CC73GCH1H120J	CHIP C 12PF J	K3M3	
C6 ,7			CC73GCH1H220C	CHIP C 22PF C		
C8			CC73GCH1H030C	CHIP C 3PF C		
C9			CC73GB1H102M	CHIP C 1000PF M		
C10			CC73GCH1H390J	CHIP C 39PF J	KMT	
C10			CC73GCH1H390J	CHIP C 39PF J	K2M2	
C10			CC73GCH1H470J	CHIP C 47PF J	K3M3	
C11			CC73GCH1H070D	CHIP C 7PF D	KMT	
C11			CC73GCH1H080D	CHIP C 8PF D	K2M2	
C11			CC73GCH1H120J	CHIP C 12PF J	K3M3	
C12			CC73GCH1H060D	CHIP C 6PF D	K2M2	
C12			CC73GCH1H100D	CHIP C 10PF D	KMT	
C12			CC73GCH1H100D	CHIP C 10PF D	K3M3	
C13 ,14			CC73GCH1H050C	CHIP C 5PF C	KMT	
C13 ,14			CC73GCH1H050C	CHIP C 5PF C	K2M2	
C13 ,14			CC73GCH1H150J	CHIP C 15PF J	K3M3	
C15			CC73GCH1H030C	CHIP C 3PF C		
C16 ,17			CC73GB1H102M	CHIP C 1000PF M		
C18			CC73GCH1H010C	CHIP C 1PF C		
C19			CC73GCH1H040C	CHIP C 4PF C		
C20 ,21			CC73GB1H102M	CHIP C 1000PF M		
C22			CC73GCH1H040C	CHIP C 4PF C		
C23			CC73GCH1H030C	CHIP C 3PF C	KMT	
C23			CC73GCH1H030C	CHIP C 3PF C	K3M3	
C23			CC73GCH1H040C	CHIP C 4PF C	K2M2	
CN1 ,2			E40-5212-05	PIN CONNECTOR(5P)		
A1			F11-1127-04	SHIELDING COVER		
L1 ,2			L40-8282-48	SMALL FIXED INDUCTOR(820NH)		
L3 ,4			L40-1092-48	SMALL FIXED INDUCTOR(1.0UH)		
L5			L34-2337-05	COIL		
L6			L34-2344-05	COIL	KMT	
L6			L34-2344-05	COIL	K2M2	
L6			L34-2345-05	COIL	K3M3	
L7 ,8			L40-4782-48	SMALL FIXED INDUCTOR(470NH)		
L9 ,10			L40-2272-48	SMALL FIXED INDUCTOR(22NH)		
R1			RK73GB1J184J	CHIP R 180K J 1/16W		
R2			RK73GB1J104J	CHIP R 100K J 1/16W		
R3			RK73GB1J100J	CHIP R 10 J 1/16W		
R4			RK73GB1J101J	CHIP R 100 J 1/16W	KMT	
R4			RK73GB1J101J	CHIP R 100 J 1/16W	K3M3	

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

VCO (X58-3540-XX)

PLL (X58-3550-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R4 R5 R6 R7 R8			RK73GB1J560J RK73GB1J100J RK73GB1J472J RK73GB1J470J RK73GB1J103J	CHIP R 56 J 1/16W CHIP R 10 J 1/16W CHIP R 4.7K J 1/16W CHIP R 47 J 1/16W CHIP R 10K J 1/16W	K2M2	
R9 R10 R11 R12 R13			RK73GB1J104J RK73GB1J100J RK73GB1J101J RK73GB1J103J RK73GB1J103J	CHIP R 100K J 1/16W CHIP R 10 J 1/16W CHIP R 100 J 1/16W CHIP R 10K J 1/16W CHIP R 10K J 1/16W		
R14 R15 R16			RK73GB1J101J RK73GB1J103J RK73GB1J000J	CHIP R 100 J 1/16W CHIP R 10K J 1/16W CHIP R 0.0 J 1/16W		
D1 D2 D3 ,4 Q1 ,2 Q3			MA366 1T33C MA366 2SK508NV(K52) FMG4	CHIP DIODE CHIP DIODE CHIP DIODE CHIP FET. DIGITAL TRANSISTOR		
Q4 ,5			2SC4083(N,P)	CHIP TRANSISTOR		
PLL (X58-3550-10)						
C1 C3 C4 C5 C6			CC73FCH1H100D CK73FB1H102K CK73FB1H103K CK73FB1H102K C92-0004-05	CHIP C 10PF D CHIP C 1000PF K CHIP C 0.010UF K CHIP C 1000PF K ELECTRO 1.0UF 16WV		
C7 C8 C9 C10 C11			C92-0001-05 C92-0004-05 CK73FB1H103K CK73FB1H102K C92-0005-05	CHIP TAN 0.1UF 35WV ELECTRO 1.0UF 16WV CHIP C 0.010UF K CHIP C 1000PF K ELECTRO 2.2UF 6.3WV		
C12 C13 C15 C16			CK73EB1H223K CC73FCH1H101J CK73FB1H102K CC73FCH1H101J	CHIP C 0.022UF K CHIP C 100PF J CHIP C 1000PF K CHIP C 100PF J		
CN1 ,2			E40-5212-05	PIN CONNECTOR(5P)		
A1			F11-1128-04	SHIELDING COVER		
L1			L40-4792-48	SMALL FIXED INDUCTOR(4.7UH)		
R1 R2 -4 R5 -7 R8 R9			R92-0670-05 RK73FB2A102J RK73FB2A103J R92-0670-05 RK73FB2A100J	CHIP R 0 OHM CHIP R 1.0K J 1/10W CHIP R 10K J 1/10W CHIP R 0 OHM CHIP R 10 J 1/10W		
R10 R11 R13 R14 R15			RK73FB2A472J RK73FB2A103J RK73FB2A102J RK73FB2A562J RK73FB2A472J	CHIP R 4.7K J 1/10W CHIP R 10K J 1/10W CHIP R 1.0K J 1/10W CHIP R 5.6K J 1/10W CHIP R 4.7K J 1/10W		
R16 R17 R18 R19 R20			RK73FB2A562J RK73FB2A472J RK73FB2A102J RK73GB1J561J RK73FB2A102J	CHIP R 5.6K J 1/10W CHIP R 4.7K J 1/10W CHIP R 1.0K J 1/10W CHIP R 560 J 1/16W CHIP R 1.0K J 1/10W		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

PLL (X58-3550-10)

ANT SW (X58-3560-XX)

MIC AMP (X59-3520-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R21			R92-0670-05	CHIP R 0 OHM		
IC1			MB1504F	IC(PLL)FREQ SYNTHESIZER)		
IC2			TC4581F	IC(UNLOCK COMPALETER)		
Q1			2SA1162(Y)	CHIP TRANSISTOR		
Q2			2SA1312(GR)	CHIP TRANSISTOR		
Q3			2SC3324(G)	CHIP TRANSISTOR		
ANT SW (X58-3560-XX) -10 : K,M,T -11 : K2,M2 -12 : K3,M3						
C1 ,2			CK73FB1H102K	CHIP C 1000PF K		
C3			CK73FCH1H050C	CHIP C 5.0PF C		
C4			CC73FCH1H040C	CHIP C 4PF C		
C5			CK73FB1H102K	CHIP C 1000PF K		
C6			CC73FCH1H050C	CHIP C 5PF C	K2M2	
C6			CC73FCH1H060D	CHIP C 6PF D	KMT	
C6			CC73FCH1H070D	CHIP C 7PF D	K3M3	
C7			CC73FCH1H070D	CHIP C 7PF D	K2M2	
C7			CC73FCH1H090D	CHIP C 9PF D	KMT	
C7			CC73FCH1H120J	CHIP C 12PF J	K3M3	
C8			CK73FB1H102K	CHIP C 1000PF K		
J1 -9			E23-0471-05	TERMINAL		
J11 -14			E23-0471-05	TERMINAL		
			F11-1146-04	SHIELDING CASE		
			F20-1031-04	INSULATING SHEET		
			G13-0660-04	CUSHION		
L1			L40-1092-48	SMALL FIXED INDUCTOR(1UH)		
L2			L34-1053-05	COIL		
L3			L34-1212-05	COIL		
D1			MI808	CHIP DIODE		
D2			HSK277	CHIP DIODE		
D3 ,4			MI808	CHIP DIODE		
D5			HSK277	CHIP DIODE		
MIC AMP (X59-3520-10)						
C1 ,2			CK73FB1H332K	CHIP C 3300PF K		
C3			CC73FCH1H820J	CHIP C 82PF J		
C4 ,5			C92-0004-05	ELECTRO 1.0UF 16WV		
C6			CC73FCH1H820J	CHIP C 82PF J		
C7			C92-0004-05	ELECTRO 1.0UF 16WV		
C8 -10			CK73FB1H102K	CHIP C 1000PF K		
C11			C92-0004-05	ELECTRO 1.0UF 16WV		
			E23-0471-05	TERMINAL		
R1 ,2			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R3			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R4			RK73FB2A224J	CHIP R 220K J 1/10W		
R5			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R6			RK73FB2A122J	CHIP R 1.2K J 1/10W		
R7			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R8			RK73FB2A224J	CHIP R 220K J 1/10W		
R9			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R10			RK73FB2A223J	CHIP R 22K J 1/10W		
R11			RK73FB2A820J	CHIP R 82 J 1/10W		
R12			R92-0670-05	CHIP R 0 OHM		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

※ New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

MIC AMP (X59-3520-10)

DRIVE (X59-3540-XX)/(X58-3930-50)

AF PA (X59-3560-10)

AVR (X59-3570-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
IC1 TH1			NJM4560M 157-252-43001	IC(OP AMP X2) THERMISTOR(25K)		
DRIVE (X59-3540-XX) -10 : K,K2,M,M2 -12 : K3,M3 (X58-3930-50) : T						
C1 C2 ,3 C4 C4 C4			CC73FCH1H030C CK73FB1H102K CC73FCH1H040C CC73FCH1H050C CC73FCH1H050C	CHIP C 3PF C CHIP C 1000PF K CHIP C 4PF C CHIP C 5PF C CHIP C 5PF C	K3M3 KMT K2M2	
C5 ,6 C7 C7 C7 C8 ,9			CK73FB1H102K CC73FCH1H040C CC73FCH1H060D CC73FCH1H060D CK73FB1H102K	CHIP C 1000PF K CHIP C 4PF C CHIP C 6PF D CHIP C 6PF D CHIP C 1000PF K	K3M3 KMT K2M2	
			E23-0471-05 F10-2019-04	TERMINAL SHIELDING COVER(DRIVE UNIT)	T	
L1 L2 ,3			L40-1072-48 L40-1872-48	SMALL FIXED INDUCTOR(10NH) SMALL FIXED INDUCTOR(18NH)		
R1 R2 R3 R4 R5			RK73FB2A271J RK73FB2A180J RK73FB2A271J RK73FB2A152J RK73FB2A332J	CHIP R 270 J 1/10W CHIP R 18 J 1/10W CHIP R 270 J 1/10W CHIP R 1.5K J 1/10W CHIP R 3.3K J 1/10W		
R6 R7 R8 R9 R10			RK73FB2A560J R92-0670-05 RK73FB2A561J RK73FB2A152J RK73FB2A270J	CHIP R 56 J 1/10W CHIP R 0 OHM CHIP R 560 J 1/10W CHIP R 1.5K J 1/10W CHIP R 27 J 1/10W		
R11			RK73FB2A220J	CHIP R 22 J 1/10W		
D1 Q1 Q2			DA204K 2SC3356 2SC3357	CHIP DIODE CHIP TRANSISTOR CHIP TRANSISTOR		
AF PA (X59-3560-10)						
C1 ,2 C3 ,4 C5 C6 C7			CK73FB1H103K CK73EB1E104K CK73FB1H103K C92-0003-05 CK73FB1H103K	CHIP C 0.010UF K CHIP C 0.10UF K CHIP C 0.010UF K CHIP TAN 0.47UF 25WV CHIP C 0.010UF K		
			E23-0471-05	TERMINAL		
R1 R2 R3 R4 R5			RK73FB2A101J RK73FB2A102J RK73FB2A562J R92-0670-05 R92-1220-05	CHIP R 100 J 1/10W CHIP R 1.0K J 1/10W CHIP R 5.6K J 1/10W CHIP R 0 OHM CHIP R 1 OHM		
IC1 Q1 Q2			NJM2073M 2SA1213(Y) DTC144EK	IC(AF POWER AMP) CHIP TRANSISTOR DIGITAL TRANSISTOR		
AVR (X59-3570-10)						
C1 -3 C4			CK73FB1H103K CK73FB1H102K	CHIP C 0.010UF K CHIP C 1000PF K		
			E23-0471-05	TERMINAL		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

AVR (X59-3570-10)

SW (X59-3580-10)

APC (X59-3590-10)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
IC1 Q1			LA5005M FMC5	IC(VOLTAGE REGULATOR/ +5V) DIGITAL TRANSISTOR		
SW (X59-3580-10)						
C1 ,2			CK73FB1H103K E23-0471-05	CHIP C 0.010UF K TERMINAL		
S1 ,2			S40-1420-05	TAKT SWITCH		
APC (X59-3590-10)						
C1 -7 C8 C9 C10 C11 ,12			CK73FB1H102K CC73FCH1H151J C92-0005-05 C92-0004-05 CK73FB1H102K	CHIP C 1000PF K CHIP C 150PF J ELECTRO 2.2UF 6.3WV ELECTRO 1.0UF 16WV CHIP C 1000PF K		
			E23-0471-05	TERMINAL		
R1 R2 R3 R4 R5			R92-0670-05 RK73FB2A103J RK73FB2A223J RK73FB2A683J R92-1218-05	CHIP R 0 OHM CHIP R 10K J 1/10W CHIP R 22K J 1/10W CHIP R 68K J 1/10W CHIP R 0.1 J 1/2W		
R6 R7 R8 ,9 R10 R11 -13			RK73FB2A222J RK73FB2A124J RK73FB2A102J RK73FB2A103J RK73FB2A821J	CHIP R 2.2K J 1/10W CHIP R 120K J 1/10W CHIP R 1.0K J 1/10W CHIP R 10K J 1/10W CHIP R 820 J 1/10W		
R14 VR1 ,2			R92-0679-05 R12-3461-05	CHIP R 0 OHM TRIMMING POT.(10K)		
D1 IC1 Q1 Q2 Q3 -5 Q6			02CZ3.9(Y,Z) LM301AD 2SA1162(Y) 2SB1182F5(Q) DTC114YK DTA143BK	CHIP ZENNER DIODE IC(OP AMP) CHIP TRANSISTOR CHIP TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR		

L:Scandinavia

K:USA

P:Canada

A : TK-330 K,K2,K3,M,M2,M3,T

C : TK-330A K,K2,K3

Y:PX(Far East, Hawaii)

T:England

E:Europe

B : TK-330(SC) K,K2,K3,M

D : TK-330(N) M,M3

Y:AAFES(Europe)

X:Australia

M:Other Areas

⚠ indicates safety critical components.