


EXPLODED VIEW / PARTS LIST

DCP section

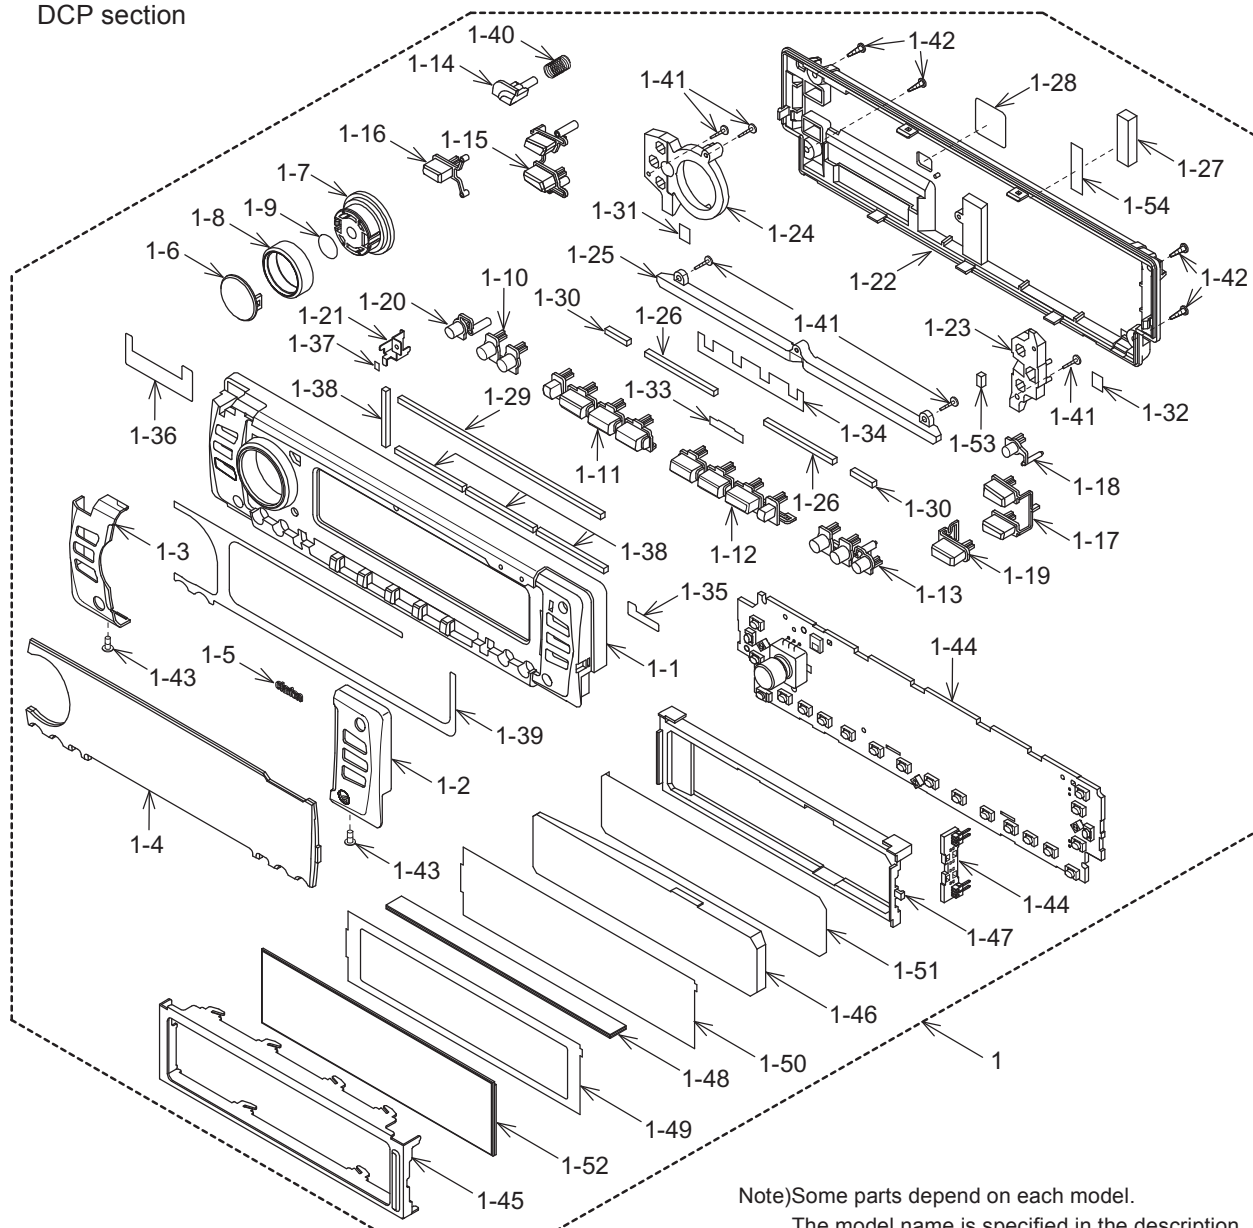

Note) Some parts depend on each model.

The model name is specified in the description.

DCP ASSY includes a DCP CASE(335-6035-20).

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-463-600 DCP-471-800	DCP ASSY(PE2632B) DCP ASSY(PE2632K)	1
1-1	370-6079-01 370-6079-00	ESCUTCHEON(PE2632B) ESCUTCHEON(PE2632K)	1
1-2	371-5775-07 371-5775-08	FACE PANEL(R)(PE2632B) FACE PANEL(R)(PE2632K)	1
1-3	371-5776-06 371-5776-00	FACE PANEL(L)(PE2632B) FACE PANEL(L)(PE2632K)	1
1-4	373-1019-07 373-1019-09	DIAL-CVR(PE2632B) DIAL-CVR(PE2632K)	1
1-5	378-0537-00	BADGE(CLARION)	1
1-6	380-5581-00	KNOB	1
1-7	380-5582-00	INNER KNOB	1
1-8	345-5364-00	RUBBER RING	1
1-9	347-6988-00	DOUBLE FACE	1
1-10	382-6840-00	BUTTON(FF/FB)	1
1-11	382-6841-01 382-6841-00	BUTTON(PE2632B) BUTTON(PE2632K)	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-12	382-6842-03 382-6842-00	BUTTON(PE2632B) BUTTON(PE2632K)	1
1-13	382-6843-01	BUTTON(T/D/2)	1
1-14	382-6844-01 382-6844-00	BUTTON(REL)(PE2632B) BUTTON(REL)(PE2632K)	1
1-15	382-6845-00	BUTTON(FNC/BND)	1
1-16	382-6846-00	BUTTON(A-M)	1
1-17	382-6847-00	BUTTON(SR/COL)	1
1-18	382-6848-00	BUTTON(OPEN)	1
1-19	382-6849-01	BUTTON(ISR)	1
1-20	382-6850-00	BUTTON	1
1-21	331-3780-00	EARTH PLATE	1
1-22	335-6899-00	REAR CVR	1
1-23	335-7088-00	ILLUMI PLATE(L)	1
1-24	335-7089-00	ILLUMI PLATE(R)	1
1-25	335-7090-00	ILLUMI PLATE	1

DXZ845MC
DXZ846MC

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	039-2409-00	FPC(WITHOUT COMPONENT)	1	21	347-6527-00	CUSHION	1
2	074-1278-01	OUTLET SOKET(DCP)	1	22	347-6528-00	INSULATER	1
3	291-0102-00	STICKER	1	23	370-5935-07	ESCUTCHEON	1
4	309-0772-02	FRONT PLATE	1	24	613-0717-00	INPUT GEAR	1
5	331-3115-01	DCP HOLDER	1	25	613-0719-00	ARM GEAR	1
6	331-3117-01	LEVER-UP(R)	1	26	613-0720-00	HUS-GEAR	1
7	331-3118-01	LEVER-LO(R)	1	27	716-0872-00	PAD SCREW(M1.7 x 5)	4
8	331-3119-00	LEVER-LO(L)	1	28	716-1468-20	SCREW(M2 x 2.5)	10
9	331-3120-00	LEVER-UP(L)	1	29	716-1715-02	DECO-SCREW(M2)	11
10	335-6499-00	CN-CVR	1	30	716-1758-00	PAD SCREW(phi2 x 5)	2
11	335-6505-00	ILLUMI PLATE	1	31	746-0768-20	WASHER(phi4.3/1.6)	4
12	335-6903-00	ARM-CVR(L)	1	32	750-3303-20	SPRING(ARM)	1
13	335-6904-00	ARM-CVR(R)	1	33	750-3304-20	SPRING(GEAR)	1
14	335-7176-00	HOOK	1	34	750-3431-02	SPRING(HOOK)	1
15	341-1740-00	ROLLER(ARM)	1	35	750-3432-00	SPRING(MOTOR)	1
16	341-1802-00	SHAFT	1	36	750-3457-00	SPRING	1
17	345-8265-00	CUSHION	1	37	854-4380-01	EXTENSION LEAD	1
18	345-8627-00	CUSHION	1	38	946-0079-01	GEAR-BOX ASSY	1
19	346-0150-02	LEATHER SHEET	1	39	947-0513-02	T-LIM-GEAR-ASSY	1
20	347-6275-00	FILM	1	40	634-0023-00	MOTOR-ASSY	1


Main section

Exploded view on next page.


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-463-600 DCP-471-800	DCP ASSY(PE2632B) DCP ASSY(PE2632K)	1	29	331-2744-00	STOPPER	1
2	-----	INNER-ES-SECTION	1	30	331-3324-01	MECH-BRKT(R)	1
3	-----	MAIN PWB	1	31	331-3688-00	MECH-BRKT(F)	1
4	880-2090B	AM/FM TUNER	1	32	331-3699-00	SD-LOW-CASE	1
5	074-1194-00	OUTLET SOCKET(CeNET)	1	33	331-3700-00	SD-UP-CASE	1
6	074-1214-00	OUTLET SOCKET(16P)	1	34	345-3799-20	RUBBER PART	10
7	092-4000-51	ANT-RECEPT	1	35	345-5318-00	CUSHION	1
8	305-0274-01	SIDE-CVR(L)	1	36	345-8701-00	CUSHION	1
9	305-0275-00	SIDE-CVR(R)	1	37	347-5918-00	INSULATOR	1
10	307-0616-05	REAR-CVR	1	38	347-6215-00	SPACER-FILM	1
11	313-1651-21	HEAT SINK	1	39	347-6245-00	FILM	1
12	313-1844-00	HEAT SINK	1	40	347-6536-00	PROTECT SHEET	1
13	313-1845-00	HEAT SINK	1	41	347-6705-00	INSULATOR	1
14	313-1885-00	HEAT SINK	1	42	347-6821-00	SPCER FILM	2
15	331-2255-20	IC-HOLDER	1	43	347-7017-00	DOUBLE FACE	1
16	331-3378-00	SW-HOLDER	1	44	347-7018-00	INSULATOR	1
17	335-0833-01	LEAD HOLDER	2	45	714-2603-80	MACHINE SCREW(M2.6 x 3)	7
18	335-3700-00	MINI-SADDLE	1	46	716-0717-10	STEEL SCREW(M2.3 x 3)	2
19	714-3006-81	MACHINE SCREW(M3 x 6)	4	47	716-0878-00	IT-SCREW(M2.6 x 5)	4
20	731-3006-80	TAPTIGHT(M3 x 6)	1	48	731-3006-80	TAPTIGHT(M3 x 6)	7
21	731-3008-87	TAPTIGHT(M3 x 8)	2	49	780-2005-00	SCREW(M2 x 5)	2
22	800-0708-50	VINYL-COAT-WIRE	1	50	816-2626-50	FLAT WIRE(CD)	1
23	855-5489-50	RCA PIN CORD(AUX2CH)	1	51	816-2639-00	FLAT WIRE(SLOT)	1
24	855-5490-50	RCA PIN CORD(2-ZONE)	1	52	854-4568-50	EXTENSION LEAD(SLOT)	1
25	855-5491-50	RCA PIN CORD(6CH)	1	53	929-0600-80	CD MECHANISM	1
26	-----	SLOT PWB	1	54	948-0688-00	MEMORY CARD(128MB)	1
27	303-0472-06	UPPER-CVR	1	55	345-5441-00	HEAT RUBBER	1
28	304-0460-01	LOWER-CVR	1	56	286-6350-00 286-6387-00 286-6388-00	SETPLATE(PE2632B) SETPLATE(PE2632KA) SETPLATE(PE2632KB)	1

DXZ845MC
DXZ846MC

Main section

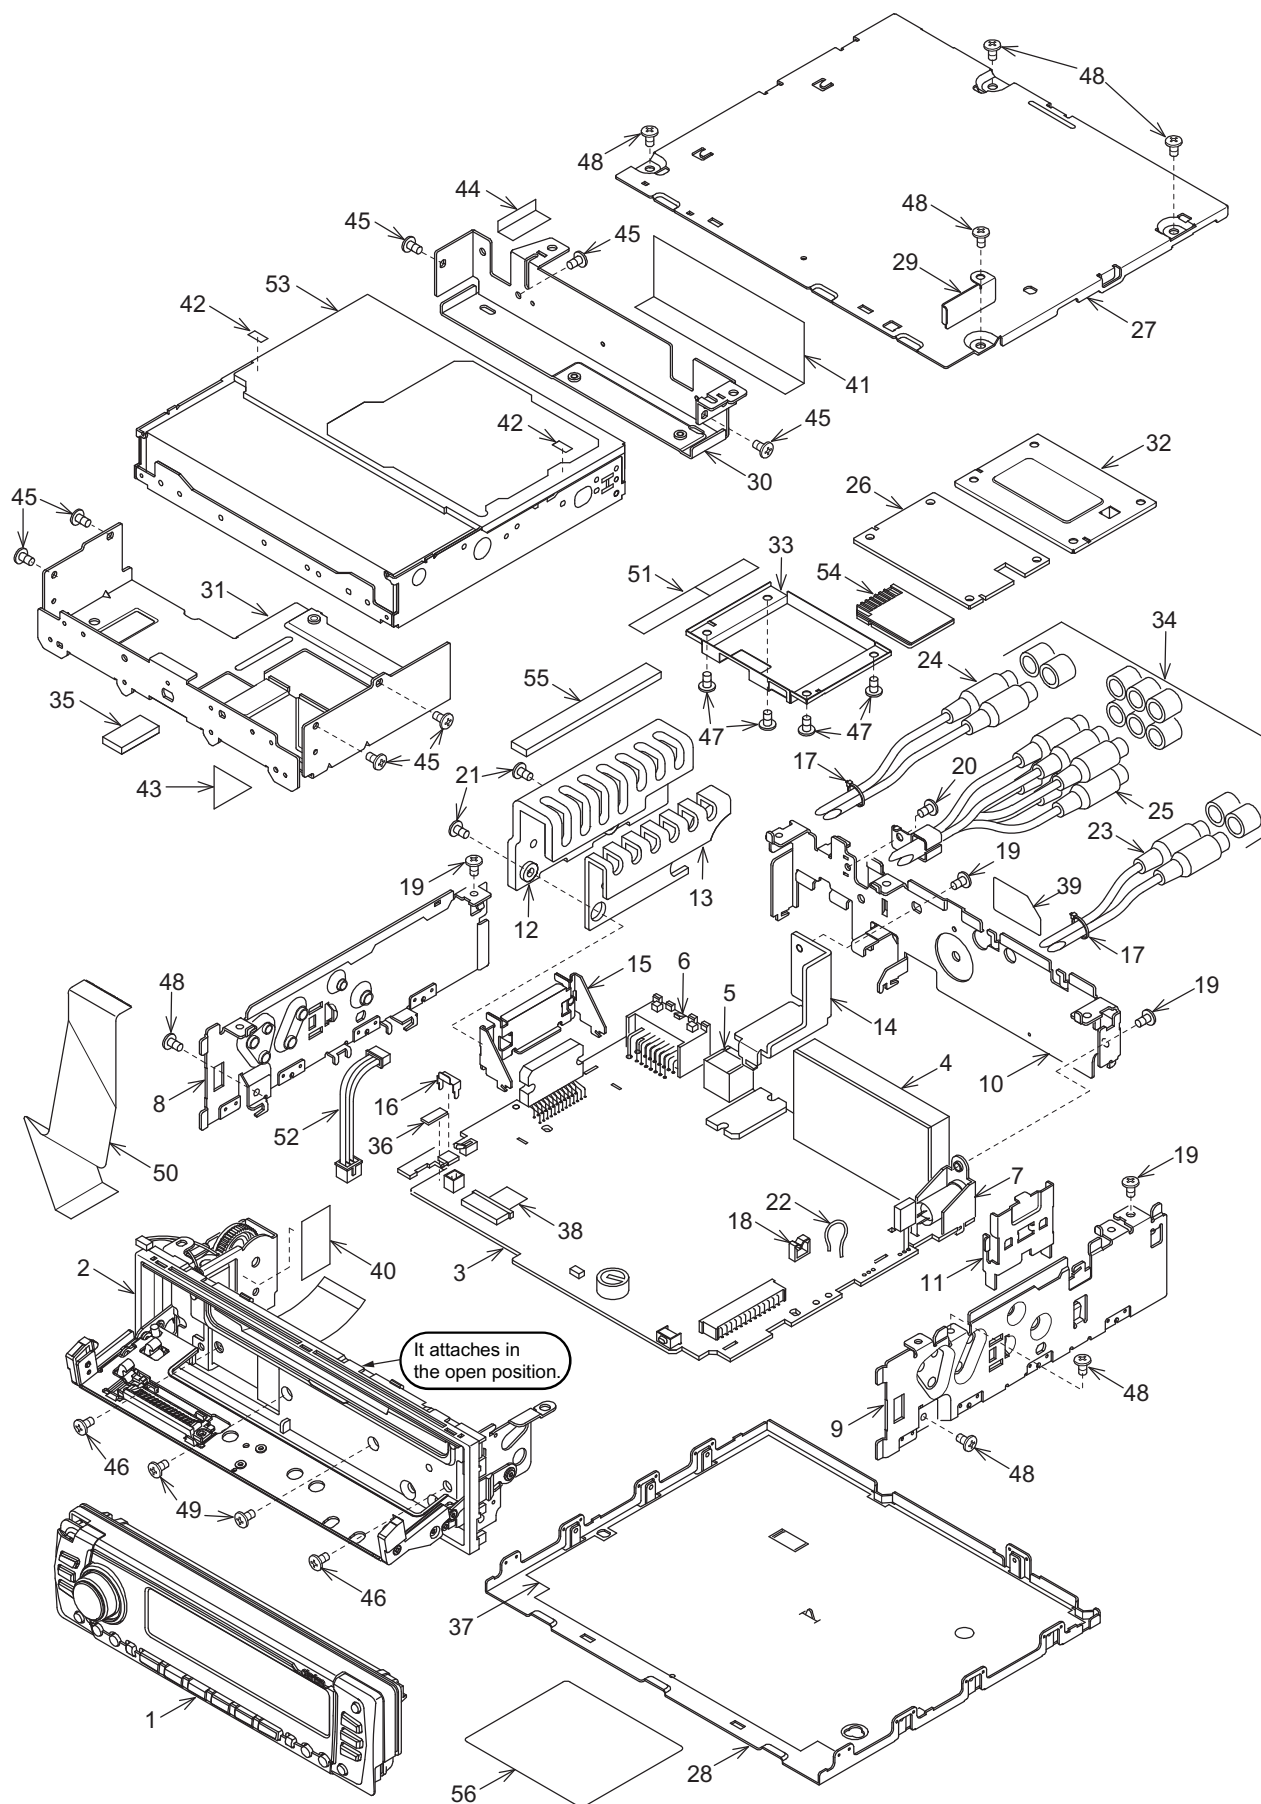

CD mechanism section (929-0600-80)

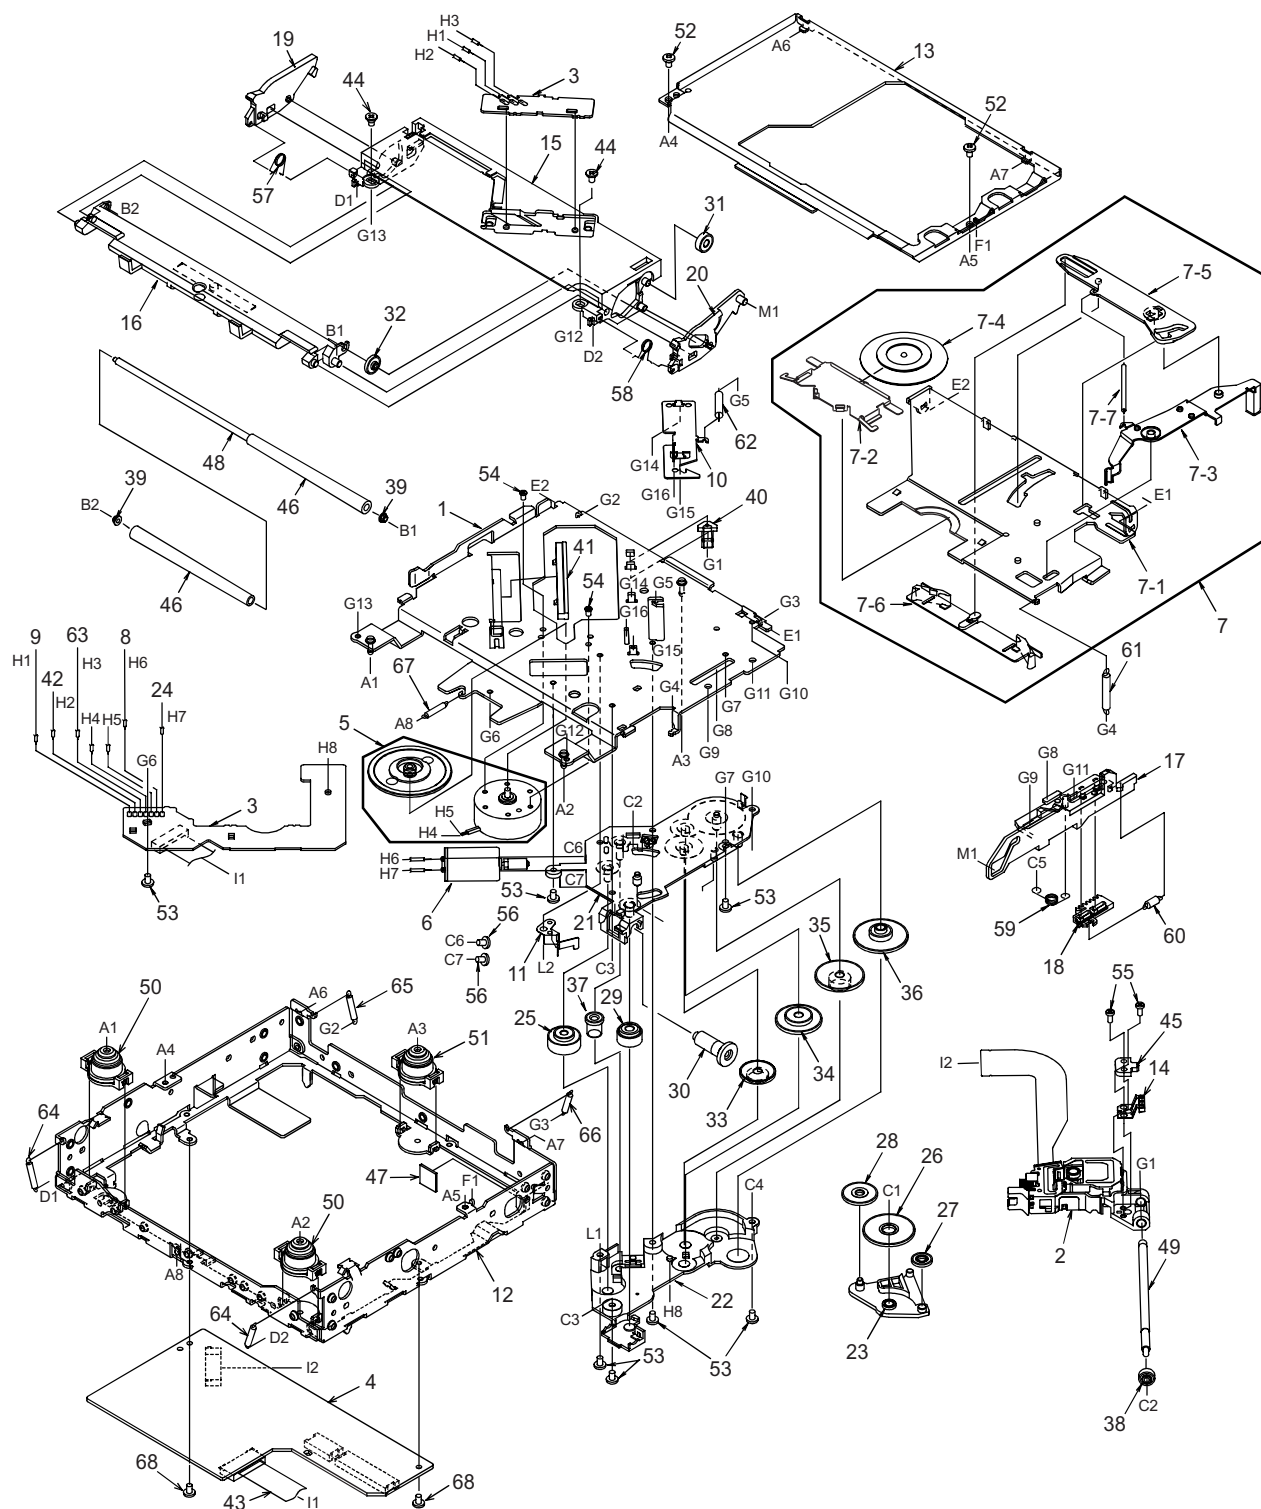

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0065-31	PICK UP UNIT	1
3	-----	LED PWB	1
4	-----	CD PWB	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	HBS-524-100	CLAMPER SUB ASSY	1
7-1	620-1022-25	CLAMPER LINK	1

NO.	PART NO.	DESCRIPTION	Q'TY
7-2	620-1023-23	CLAMPER PLATE	1
7-3	620-1024-23	SENSOR ARM	1
7-4	621-0708-20	CLAMPER RING	1
7-5	621-0626-21	STOPPER LINK	1
7-6	621-0627-21	DISC STOPPER	1
7-7	750-3471-20	SENSOR SPRING	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1

DXZ845MC
DXZ846MC

NO.	PART NO.	DESCRIPTION	Q'TY
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1585-21	LOWER CHASSIS	1
13	620-1028-23	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-27	UPPER GUIDE	1
16	621-0718-21	ROLLER GUIDE	1
17	621-0600-26	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM L	1
20	621-0603-25	LOCK ARM R	1
21	621-0724-21	GEAR BASE	1
22	621-0605-22	GEAR COVER	1
23	621-0723-20	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1
30	621-0719-20	ROLLER GEAR B	1
31	621-0720-20	ROLLER GEAR C	1
32	621-0721-20	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	POWER GEAR B	1
35	621-0618-20	POWER GEAR C	1
36	621-0619-20	POWER GEAR D	1
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-0623-23	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE(PUR)	1
43	816-2624-50	FLAT WIRE(10P)	1
44	716-3473-00	IT SCREW(M2 x 3)	2
45	621-0709-20	SH-BASE	1
46	621-0629-20	LOADING ROLLER	2
47	345-8704-20	CUSHION RUBBER	1
48	622-1660-20	ROLLER SHAFT	1
49	624-0018-01	LEAD SCREW	1
50	629-0086-20	DAMPER F	2
51	629-0087-20	DAMPER R	1
52	714-2003-81	MACHINE SCREW(M2 x 3)	2
53	716-1507-00	SCREW(M2 x 3)	7
54	716-1733-00	SCREW(M1.7 x 2.3)	2
55	716-3469-00	SCREW(phi3 x 4)	2
56	716-3446-00	SCREW(M1.4 x 2.5)	2
57	750-3465-21	ROLLER SPRING L	1
58	750-3466-20	ROLLER SPRING R	1
59	750-3467-21	SHIFT SPRING	1
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE(BLU)	1
64	750-3472-21	DR-SPRING F	2
65	750-3473-20	DR-SPRING RA	1
66	750-3474-20	DR-SPRING RB	1
67	750-3475-21	DR-SPRING C	1
68	716-1670-00	SCREW(M2 x 4)	2

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note)Some parts depend on each model.

The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT	C230	042-1631-50	10V 100uF L	C553	187-2253-65	50V 2.2uF
BL1	880-2090B	AM/FM TUNER	C245	168-1042-78	16V 0.1uF	C554	178-1052-78	1uF
C1	168-2232-55	0.022uF	C246	168-1042-78	16V 0.1uF	C555	178-1052-78	1uF
C4	187-1053-65	50V 1uF	C247	043-0505-50	6.3V2.2uF	C556	163-3353-65	50V3.3uF
C5	168-2732-55	16V 0.027uF	C300	168-3322-55	3300pF	C557	163-3363-25	10V33uF
C6	168-2732-55	16V 0.027uF	C301	168-3322-55	3300pF	C558	178-1052-78	1uF
C7	187-4763-35	16V 47uF	C302	187-2253-65	50V 2.2uF	C559	168-2222-55	2200pF
C8	168-2232-55	0.022uF	C303	187-2253-65	50V 2.2uF	C560	168-2222-55	2200pF
C9	168-2232-55	0.022uF	C304	168-1022-55	1000pF	C561	168-2222-55	2200pF
C10	168-6822-55	6800pF	C305	168-1022-55	1000pF	C562	168-2222-55	2200pF
C11	042-1631-50	10V 100uF L	C306	163-2253-65	50V2.2uF	C563	168-2222-55	2200pF
C12	042-1631-50	10V 100uF L	C307	163-2253-65	50V2.2uF	C564	187-2253-65	50V 2.2uF
C16	168-1042-78	16V 0.1uF	C308	163-1063-35	16V10uF	C565	168-2222-55	2200pF
C18	163-1053-65	50V1uF	C309	163-1063-35	16V10uF	C566	187-2253-65	50V 2.2uF
C20	163-4763-15	6.3V47uF	C310	163-1063-35	16V10uF	C567	168-3322-55	3300pF
C22	166-1011-50	100pF CH	C311	163-1063-35	16V10uF	C568	168-6832-78	0.068uF
C23	166-1011-50	100pF CH	C312	168-4732-78	0.047uF	C569	168-3322-55	3300pF
C24	166-3311-50	330pF CH	C313	168-4732-78	0.047uF	C570	168-6832-78	0.068uF
C25	166-1501-50	15pF CH	C314	163-1053-65	50V1uF	C571	168-1032-55	0.01uF
C26	166-1501-50	15pF CH	C450	187-2263-15	6.3V 22uF	C572	168-1032-55	0.01uF
C28	168-1532-55	0.015uF	C451	187-2263-15	6.3V 22uF	C573	168-1022-55	1000pF
C29	168-2232-55	0.022uF	C452	187-2263-15	6.3V 22uF	C574	168-1022-55	1000pF
C55	166-2201-50	22pF CH	C453	187-2263-15	6.3V 22uF	C575	168-1022-55	1000pF
C66	166-2201-50	22pF CH	C454	187-2263-15	6.3V 22uF	C600	168-1032-55	0.01uF
C67	168-1032-55	0.01uF	C455	187-2263-15	6.3V 22uF	C601	042-0576-00	5.5V0.1F
C68	168-2232-55	0.022uF	C458	187-2263-15	6.3V 22uF	C602	168-1022-55	1000pF
C100	187-2263-15	6.3V 22uF	C459	187-2263-15	6.3V 22uF	C603	168-1032-55	0.01uF
C101	187-2263-15	6.3V 22uF	C500	187-2253-65	50V 2.2uF	C604	042-1505-80	25V 1uF
C102	187-2263-15	6.3V 22uF	C501	163-2253-65	50V2.2uF	C605	042-1577-00	6.3V 100uF
C103	187-2263-15	6.3V 22uF	C502	163-2253-65	50V2.2uF	C607	168-1032-55	0.01uF
C104	043-0506-50	0.1uF	C505	187-2253-65	50V 2.2uF	C608	168-1032-55	0.01uF
C105	178-2242-78	0.22uF	C506	163-2253-65	50V2.2uF	C609	168-4732-78	0.047uF
C106	178-2242-78	0.22uF	C507	163-2253-65	50V2.2uF	C612	187-1063-35	16V 10uF
C107	178-2242-78	0.22uF	C508	187-1063-35	16V 10uF	C619	168-1022-55	1000pF
C108	178-2242-78	0.22uF	C509	187-1073-35	16V 100uF	C621	166-1011-50	100pF CH
C109	043-0506-50	0.1uF	C510	168-1042-78	16V 0.1uF	C622	166-1011-50	100pF CH
C110	043-0506-50	0.1uF	C512	168-2222-55	2200pF	C623	166-1011-50	100pF CH
C111	043-0506-50	0.1uF	C513	166-1007-50	10pF CH	C630	166-1011-50	100pF CH
C112	042-1334-75	16V 47uF	C516	168-2222-55	2200pF	C633	166-1007-50	10pF CH
C113	042-1334-74	16V 22uF	C517	166-1007-50	10pF CH	C635	166-1011-50	100pF CH
C114	043-0506-50	0.1uF	C518	168-2222-55	2200pF	C902	166-1011-50	100pF CH
C115	043-0506-50	0.1uF	C519	168-2222-55	2200pF	C903	168-1022-55	1000pF
C116	043-0506-50	0.1uF	C521	187-1063-35	16V 10uF	C904	168-1032-55	0.01uF
C117	042-0560-56	50V3.3uF	C522	187-1063-35	16V 10uF	D100	001-0466-90	S5688B
C118	043-0506-50	0.1uF	C523	168-1042-78	16V 0.1uF	D101	001-0466-90	S5688B
C136	168-1032-55	0.01uF	C524	168-1042-78	16V 0.1uF	D102	001-0466-90	S5688B
C137	166-4711-50	470pF CH	C526	187-1063-35	16V 10uF	D103	001-0466-90	S5688B
C138	166-4711-50	470pF CH	C527	168-1042-78	16V 0.1uF	D104	001-0466-90	S5688B
C139	166-4711-50	470pF CH	C529	168-1042-78	16V 0.1uF	D105	001-0466-90	S5688B
C140	166-4711-50	470pF CH	C530	168-1042-78	16V 0.1uF	D106	001-0466-90	S5688B
C141	166-4711-50	470pF CH	C531	189-2273-21	10V 220uF	D107	001-0466-90	S5688B
C142	166-4711-50	470pF CH	C532	187-1063-35	16V 10uF	D201	001-0592-00	RM4Z
C143	166-4711-50	470pF CH	C533	188-2253-67	50V 2.2uF	D202	001-1310-00	KDS160
C144	166-4711-50	470pF CH	C534	188-2253-67	50V 2.2uF	D204	001-1310-00	KDS160
C200	172-2231-15	0.022uF	C535	166-1007-50	10pF CH	D205	001-1310-00	KDS160
C201	042-1545-00	16V 2200uF	C536	166-1007-50	10pF CH	D206	001-1310-00	KDS160
C203	187-1063-35	16V 10uF	C537	188-2253-67	50V 2.2uF	D207	001-0466-90	S5688B
C205	187-4763-35	16V 47uF	C538	188-2253-67	50V 2.2uF	D208	001-1310-00	KDS160
C206	187-1073-35	16V 100uF	C539	168-1042-78	16V 0.1uF	D209	001-0466-91	S5688G
C207	188-1063-37	16V 10uF	C540	168-1042-78	16V 0.1uF	D210	001-0466-91	S5688G
C208	163-2263-35	16V22uF	C541	188-1063-37	16V 10uF	D211	001-0466-91	S5688G
C209	163-2263-15	6.3V22uF	C542	168-1042-78	16V 0.1uF	D212	001-0347-32	MA4056M
C210	187-2263-35	16V 22uF	C543	168-1042-78	16V 0.1uF	D213	001-0504-45	HZS9B1L
C212	187-2273-15	6.3V 220uF	C545	187-1063-35	16V 10uF	D214	001-1310-00	KDS160
C213	042-1631-50	10V 100uF L	C546	187-1063-35	16V 10uF	D215	001-0347-38	MA4068M
C214	187-2273-15	6.3V 220uF	C547	187-1063-35	16V 10uF	D500	001-1310-00	KDS160
C216	042-1631-50	10V 100uF L	C548	187-1063-35	16V 10uF	D501	001-1310-00	KDS160
C217	187-1063-35	16V 10uF	C549	178-3342-78	0.33uF	D504	001-0529-41	MA8075-M
C219	166-1011-50	100pF CH	C550	187-1063-35	16V 10uF	D505	001-1310-00	KDS160
C220	168-1042-78	16V 0.1uF	C551	187-1063-35	16V 10uF	D506	001-1310-00	KDS160
C221	187-1063-35	16V 10uF	C552	188-2253-67	50V 2.2uF	D507	001-1310-00	KDS160

DXZ845MC
DXZ846MC

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D508	001-1310-00	KDS160	Q227	125-4014-90	KSD2020	R224	116-3911-15	1/8W 390 ohm
D600	001-1310-00	KDS160	Q232	125-0199-92	KRA102S	R225	119-1031-15	1/16W 10k ohm
D602	001-7062-90	RBR111C	Q233	125-2199-93	KRC103S	R226	116-1221-15	1/8W 1.2k ohm
D603	001-1310-00	KDS160	Q450	125-4012-90	KTD1304	R227	119-1031-15	1/16W 10k ohm
IC1	051-6201-90	LC72146M	Q451	125-4012-90	KTD1304	R228	116-1221-15	1/8W 1.2k ohm
IC101	051-2052-00	LA47534	Q452	125-4012-90	KTD1304	R229	116-1521-15	1/8W 1.5k ohm
IC200	051-3297-10	BA4916-V2	Q453	125-4012-90	KTD1304	R230	116-2211-15	1/8W 220 ohm
IC201	051-3325-90	NJM2880U33	Q454	125-4012-90	KTD1304	R238	119-1031-15	1/16W 10k ohm
IC230	051-1014-08	TA7291F	Q455	125-4012-90	KTD1304	R244	116-3911-15	1/8W 390 ohm
IC302	051-0350-93	NJM4558M	Q458	125-4012-90	KTD1304	R245	119-1021-15	1/16W 1k ohm
IC501	051-5030-90	M61523FP-D60T	Q459	125-4012-90	KTD1304	R308	032-0140-89	1/4W 47k ohm F
IC503	051-0350-93	NJM4558M	Q502	125-4010-90	KTC3875S	R309	032-0140-89	1/4W 47k ohm F
IC504	051-5834-90	UPC5701GR-028-8JG-E2	Q503	125-2199-96	KRC106S	R310	032-0140-89	1/4W 47k ohm F
			Q506	125-0199-96	KRA106S	R311	032-0140-89	1/4W 47k ohm F
IC509	051-5020-90	M61508FP	Q508	125-2199-96	KRC106S	R312	032-0140-89	1/4W 47k ohm F
IC510	051-5835-90	MZ01	Q509	125-2199-93	KRC103S	R313	032-0140-89	1/4W 47k ohm F
IC600	052-3387-00	M30622MGP-114GP	Q512	125-0199-96	KRA106S	R314	032-0140-89	1/4W 47k ohm F
IC601	051-5437-08	S-80821CNMC-B8G-T2	Q514	125-2199-96	KRC106S	R315	032-0140-89	1/4W 47k ohm F
			Q515	125-2199-93	KRC103S	R316	119-1041-15	1/16W 100k ohm
IC602	051-6600-58	HA12187FP-EL	Q601	125-2199-93	KRC103S	R317	119-1021-15	1/16W 1k ohm
IC603	051-5443-08	BD4850G	Q602	125-2199-93	KRC103S	R318	119-1021-15	1/16W 1k ohm
J201	074-1214-00	16P	Q603	125-3004-90	KTA1504S	R319	119-1041-15	1/16W 100k ohm
J600	074-1194-00	13P CeNET	R1	119-1021-15	1/16W 1k ohm	R320	119-8221-15	1/16W 8.2k ohm
J601	074-1198-68	18P	R7	119-1231-15	1/16W 12k ohm	R450	119-2231-15	1/16W 22k ohm
J604	076-0312-02	2P	R8	119-1031-15	1/16W 10k ohm	R451	119-2231-15	1/16W 22k ohm
J605	076-0312-03	3P	R9	119-4741-15	1/16W 470k ohm	R452	119-2231-15	1/16W 22k ohm
J900	074-1138-70	20P	R10	119-2221-15	1/16W 2.2k ohm	R453	119-2231-15	1/16W 22k ohm
L1	010-2275-53	220uH	R14	119-5631-15	1/16W 56k ohm	R454	119-2231-15	1/16W 22k ohm
L52	010-4046-00	30uH	R15	119-1031-15	1/16W 10k ohm	R455	119-2231-15	1/16W 22k ohm
L200	010-2230-14	2.2uH	R16	119-2221-15	1/16W 2.2k ohm	R458	119-3311-15	1/16W 330 ohm
L201	010-8024-00	CHOKE	R18	119-1031-15	1/16W 10k ohm	R459	119-3311-15	1/16W 330 ohm
L202	010-2230-19	5.6uH	R19	119-1031-15	1/16W 10k ohm	R460	119-3311-15	1/16W 330 ohm
L301	010-3105-62	MMZ1608S102CT	R21	119-1021-15	1/16W 1k ohm	R461	119-3311-15	1/16W 330 ohm
L302	010-3105-62	MMZ1608S102CT	R24	119-1521-15	1/16W 1.5k ohm	R462	119-3311-15	1/16W 330 ohm
L303	010-3105-62	MMZ1608S102CT	R25	119-1521-15	1/16W 1.5k ohm	R463	119-3311-15	1/16W 330 ohm
L304	010-3105-62	MMZ1608S102CT	R26	119-1031-15	1/16W 10k ohm	R466	119-1021-15	1/16W 1k ohm
L305	010-3105-62	MMZ1608S102CT	R27	119-1021-15	1/16W 1k ohm	R467	119-1021-15	1/16W 1k ohm
L306	010-3105-62	MMZ1608S102CT	R28	119-1021-15	1/16W 1k ohm	R468	119-1021-15	1/16W 1k ohm
L401	010-3406-66	22UH	R29	119-1021-15	1/16W 1k ohm	R470	119-2231-15	1/16W 22k ohm
L501	010-3406-66	22UH	R30	119-1041-15	1/16W 100k ohm	R471	119-2231-15	1/16W 22k ohm
L502	010-3406-66	22UH	R32	119-0000-05	1/16W 0 ohm JW	R472	119-3311-15	1/16W 330 ohm
L503	010-3105-62	MMZ1608S102CT	R33	119-0000-05	1/16W 0 ohm JW	R473	119-3311-15	1/16W 330 ohm
L504	010-3105-62	MMZ1608S102CT	R83	119-2221-15	1/16W 2.2k ohm	R474	119-1021-15	1/16W 1k ohm
L505	010-3105-62	MMZ1608S102CT	R84	119-0000-05	1/16W 0 ohm JW	R475	119-1021-15	1/16W 1k ohm
L506	010-3105-62	MMZ1608S102CT	R100	119-1231-15	1/16W 12k ohm	R476	119-0000-05	1/16W 0 ohm JW
L510	010-3105-62	MMZ1608S102CT	R101	119-2291-15	1/16W 2.2 ohm	R477	119-0000-05	1/16W 0 ohm JW
L511	010-3105-62	MMZ1608S102CT	R102	119-2291-15	1/16W 2.2 ohm	R491	119-0000-05	1/16W 0 ohm JW
L512	010-3105-62	MMZ1608S102CT	R103	119-2291-15	1/16W 2.2 ohm	R492	119-0000-05	1/16W 0 ohm JW
L513	010-3105-62	MMZ1608S102CT	R104	119-2291-15	1/16W 2.2 ohm	R493	119-0000-05	1/16W 0 ohm JW
L602	010-3107-50	2.2uH	R105	119-2291-15	1/16W 2.2 ohm	R494	119-0000-05	1/16W 0 ohm JW
L603	010-3107-50	2.2uH	R106	119-1031-15	1/16W 10k ohm	R495	119-0000-05	1/16W 0 ohm JW
L604	010-3107-50	2.2uH	R107	119-2291-15	1/16W 2.2 ohm	R496	119-0000-05	1/16W 0 ohm JW
L608	010-3406-54	2.2uH	R108	119-2291-15	1/16W 2.2 ohm	R497	119-0000-05	1/16W 0 ohm JW
L609	010-3103-64	MMZ1628Y152BT	R109	119-2291-15	1/16W 2.2 ohm	R498	119-0000-05	1/16W 0 ohm JW
Q6	125-3004-90	KTA1504S	R110	119-1021-15	1/16W 1k ohm	R500	119-1021-15	1/16W 1k ohm
Q7	125-3004-90	KTA1504S	R111	119-1021-15	1/16W 1k ohm	R501	119-1021-15	1/16W 1k ohm
Q8	125-2199-93	KRC103S	R112	119-1021-15	1/16W 1k ohm	R502	119-1021-15	1/16W 1k ohm
Q200	193-1858-00	2SD1858	R113	119-1021-15	1/16W 1k ohm	R503	119-1021-15	1/16W 1k ohm
Q201	125-2199-96	KRC106S	R200	119-1041-15	1/16W 100k ohm	R504	119-4721-15	1/16W 4.7k ohm
Q202	190-1298-00	2SA1298	R201	119-8231-15	1/16W 82k ohm	R505	119-4721-15	1/16W 4.7k ohm
Q203	125-4010-90	KTC3875S	R202	119-5621-15	1/16W 5.6k ohm	R507	119-4711-15	1/16W 470 ohm
Q204	125-3004-90	KTA1504S	R203	119-3311-15	1/16W 330 ohm	R508	119-4711-15	1/16W 470 ohm
Q211	125-2199-96	KRC106S	R204	119-5631-15	1/16W 56k ohm	R509	119-4711-15	1/16W 470 ohm
Q212	125-0199-96	KRA106S	R205	119-1031-15	1/16W 10k ohm	R510	119-4711-15	1/16W 470 ohm
Q213	125-2199-93	KRC103S	R206	119-1031-15	1/16W 10k ohm	R511	119-4711-15	1/16W 470 ohm
Q214	125-3004-90	KTA1504S	R207	119-1021-15	1/16W 1k ohm	R512	119-4711-15	1/16W 470 ohm
Q215	125-4014-90	KSD2020	R208	119-4731-15	1/16W 47k ohm	R518	119-0000-05	1/16W 0 ohm JW
Q216	125-2199-93	KRC103S	R209	119-1531-15	1/16W 15k ohm	R522	119-1021-15	1/16W 1k ohm
Q217	191-1237-00	2SB1237	R210	119-1031-15	1/16W 10k ohm	R523	119-8221-15	1/16W 8.2k ohm
Q218	125-2199-93	KRC103S	R211	119-4731-15	1/16W 47k ohm	R524	119-2231-15	1/16W 22k ohm
Q219	191-1237-00	2SB1237	R212	119-2221-15	1/16W 2.2k ohm	R525	119-0000-05	1/16W 0 ohm JW
Q220	103-2012-00	2SD2012	R213	119-2221-15	1/16W 2.2k ohm	R526	119-1021-15	1/16W 1k ohm
Q221	125-0199-92	KRA102S	R220	119-3321-15	1/16W 3.3k ohm	R527	119-1041-15	1/16W 100k ohm
Q222	125-2199-93	KRC103S	R221	119-1031-15	1/16W 10k ohm	R528	119-0000-05	1/16W 0 ohm JW

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R530	119-3931-15	1/16W 39k ohm	R563	119-4731-15	1/16W 47k ohm	R626	119-1011-15	1/16W 100 ohm
R531	119-4721-15	1/16W 4.7k ohm	R564	119-4721-15	1/16W 4.7k ohm	R627	119-1811-15	1/16W 180 ohm
R532	119-4721-15	1/16W 4.7k ohm	R565	119-1031-15	1/16W 10k ohm	R628	119-1811-15	1/16W 180 ohm
R534	119-4721-15	1/16W 4.7k ohm	R566	119-1031-15	1/16W 10k ohm	R629	119-1811-15	1/16W 180 ohm
R536	119-1021-15	1/16W 1k ohm	R567	119-4731-15	1/16W 47k ohm	R630	119-0000-05	1/16W 0 ohm JW
R537	119-1221-15	1/16W 1.2k ohm	R568	119-4721-15	1/16W 4.7k ohm	R631	116-1021-15	1/8W 1k ohm
R538	119-1241-15	1/16W 120k ohm	R569	119-0000-05	1/16W 0 ohm JW	R632	119-1031-15	1/16W 10k ohm
R539	119-4721-15	1/16W 4.7k ohm	R570	119-0000-05	1/16W 0 ohm JW	R633	119-0000-05	1/16W 0 ohm JW
R540	119-1831-15	1/16W 18k ohm	R571	119-1021-15	1/16W 1k ohm	R634	119-0000-05	1/16W 0 ohm JW
R541	119-1831-15	1/16W 18k ohm	R572	119-1541-15	1/16W 150k ohm	R635	119-1041-15	1/16W 100k ohm
R542	119-1021-15	1/16W 1k ohm	R573	119-1031-15	1/16W 10k ohm	R636	119-0000-05	1/16W 0 ohm JW
R543	119-8221-15	1/16W 8.2k ohm	R574	119-1021-15	1/16W 1k ohm	R637	119-0000-05	1/16W 0 ohm JW
R544	119-0000-05	1/16W 0 ohm JW	R600	119-3321-15	1/16W 3.3k ohm	R638	119-1041-15	1/16W 100k ohm
R545	119-1011-15	1/16W 100 ohm	R601	119-4731-15	1/16W 47k ohm	R639	119-0000-05	1/16W 0 ohm JW
R546	119-1011-15	1/16W 100 ohm	R602	119-4721-15	1/16W 4.7k ohm	R640	119-0000-05	1/16W 0 ohm JW
R547	119-0000-05	1/16W 0 ohm JW	R603	116-6801-15	1/8W 68 ohm	R641	119-0000-05	1/16W 0 ohm JW
R548	119-0000-05	1/16W 0 ohm JW	R604	119-1031-15	1/16W 10k ohm	R642	119-0000-05	1/16W 0 ohm JW
R549	119-4741-15	1/16W 470k ohm	R605	119-1031-15	1/16W 10k ohm	R643	119-0000-05	1/16W 0 ohm JW
R550	119-3341-15	1/16W 330k ohm	R606	119-5621-15	1/16W 5.6k ohm	R647	119-1041-15	1/16W 100k ohm
R551	119-2741-15	1/16W 270k ohm	R607	119-1031-15	1/16W 10k ohm	R677	119-1031-15	1/16W 10k ohm
R552	119-1041-15	1/16W 100k ohm	R611	119-0000-05	1/16W 0 ohm JW (For PE2632B only)	R678	119-1031-15	1/16W 10k ohm
R553	119-1041-15	1/16W 100k ohm	R612	119-0000-05	1/16W 0 ohm JW (For PE2632K only)	R679	119-0000-05	1/16W 0 ohm JW
R554	119-1831-15	1/16W 18k ohm	R613	119-0000-05	1/16W 0 ohm JW	S600	013-6103-00	TSHB-2V
R555	119-1021-15	1/16W 1k ohm	R615	119-4721-15	1/16W 4.7k ohm	S602	013-7106-00	TKR00120670MM
R556	119-1021-15	1/16W 1k ohm	R616	119-4721-15	1/16W 4.7k ohm	S603	013-7206-50	SPPB530701
R557	119-1021-15	1/16W 1k ohm	R617	119-4721-15	1/16W 4.7k ohm	SUP51	060-0122-20	DSP-141N-S00B
R558	119-1021-15	1/16W 1k ohm	R620	119-0000-05	1/16W 0 ohm JW	X1	061-1066-00	7.2MHz
R559	119-1021-15	1/16W 1k ohm	R621	119-0000-05	1/16W 0 ohm JW	X601	060-1533-90	10MHZ
R560	119-1021-15	1/16W 1k ohm	R622	119-2231-15	1/16W 22k ohm	PWB	039-2461-00	PWB(WITHOUT COMPONENT)
R561	119-1031-15	1/16W 10k ohm						
R562	119-1031-15	1/16W 10k ohm						

Slot PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C290	168-1032-55	0.01uF	R292	119-4731-15	1/16W 47k ohm	R298	119-4701-15	1/16W 47 ohm
D290	001-2601-90	MA728-TX	R293	119-4731-15	1/16W 47k ohm	R299	119-1011-15	1/16W 100 ohm
J901	074-8001-00	OUTLET SOCKET	R294	119-4731-15	1/16W 47k ohm	TM901	073-0762-90	TERMINAL
J902	074-1158-57	7P	R295	119-4731-15	1/16W 47k ohm	TM902	073-0762-90	TERMINAL
P901	076-0488-03	3P	R296	119-4731-15	1/16W 47k ohm	PWB	039-2463-00	PWB(WITHOUT COMPONENT)
R291	119-4731-15	1/16W 47k ohm	R297	119-1011-15	1/16W 100 ohm			

Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C705	168-1042-78	16V 0.1uF	IC701	051-6073-00	NJU6538FG1	R721	119-1031-15	1/16W 10k ohm
C706	042-0423-97	16V10uF	IR701	060-4017-90	RS-671	R722	119-1011-15	1/16W 100 ohm
C707	042-0423-97	16V10uF	LCD701	379-1285-51	INDICATOR	R723	119-1031-15	1/16W 10k ohm
C708	168-1042-78	16V 0.1uF	P701	076-0647-00	16P	R724	119-1011-15	1/16W 100 ohm
C709	042-0423-97	16V10uF	P702	076-0708-02	2P	R725	119-1031-15	1/16W 10k ohm
C710	042-0423-97	16V10uF	P703	076-0708-02	2P	R726	119-1031-15	1/16W 10k ohm
C711	042-0397-50	16V1uF TAN	Q701	125-4012-90	KTD1304	R727	119-1031-15	1/16W 10k ohm
C712	042-0397-50	16V1uF TAN	Q702	125-4012-90	KTD1304	R728	119-1031-15	1/16W 10k ohm
C713	042-0397-50	16V1uF TAN	Q705	125-3004-90	KTA1504S	R740	119-4711-15	1/16W 470 ohm
C714	042-0397-50	16V1uF TAN	Q706	125-4010-90	KTC3875S	R741	119-4711-15	1/16W 470 ohm
C715	042-0397-50	16V1uF TAN	Q708	125-0199-93	KRA103S	R742	119-4711-15	1/16W 470 ohm
D701	001-0529-29	MA8051-M	Q709	125-2199-93	KRC103S	R753	119-4721-15	1/16W 4.7k ohm
D703	001-0529-41	MA8075-M	Q710	125-3007-90	KTA1298	R762	119-1031-15	1/16W 10k ohm
D704	001-0529-41	MA8075-M	Q711	125-4010-90	KTC3875S	R763	119-6821-15	1/16W 6.8k ohm
D705	001-0529-41	MA8075-M	Q712	125-2199-96	KRC106S	R764	119-1031-15	1/16W 10k ohm
D708	001-7076-90	HSMF-A255MZ0J1	Q713	125-2199-96	KRC106S	R765	119-1031-15	1/16W 10k ohm
D709	001-7076-90	HSMF-A255MZ0J1	Q714	125-2199-96	KRC106S	R766	119-8211-15	1/16W 820 ohm
D710	001-7076-90	HSMF-A255MZ0J1	R701	119-1011-15	1/16W 100 ohm	R767	119-8211-15	1/16W 820 ohm
D711	001-7076-90	HSMF-A255MZ0J1	R702	119-1021-15	1/16W 1k ohm	R768	119-6811-15	1/16W 680 ohm
D712	001-7076-90	HSMF-A255MZ0J1	R703	119-1041-15	1/16W 100k ohm	R769	119-6811-15	1/16W 680 ohm
D721	001-1310-00	KDS160	R704	119-3921-15	1/16W 3.9k ohm	R770	119-8211-15	1/16W 820 ohm
D722	001-1310-00	KDS160	R712	119-3331-15	1/16W 33k ohm	R771	119-8211-15	1/16W 820 ohm
D723	001-1310-00	KDS160	R713	119-1031-15	1/16W 10k ohm	R772	119-6811-15	1/16W 680 ohm
D724	001-1310-00	KDS160	R714	119-1031-15	1/16W 10k ohm	R773	119-6811-15	1/16W 680 ohm
D725	001-1310-00	KDS160	R715	119-1031-15	1/16W 10k ohm	R774	119-8211-15	1/16W 820 ohm
D726	001-1310-00	KDS160	R716	119-1031-15	1/16W 10k ohm	R775	119-8211-15	1/16W 820 ohm
D727	001-1310-00	KDS160	R718	119-1021-15	1/16W 1k ohm	R777	119-4711-15	1/16W 470 ohm
D728	001-1310-00	KDS160	R719	119-1021-15	1/16W 1k ohm	R778	119-5611-15	1/16W 560 ohm
D729	001-1310-00	KDS160	R720	119-1011-15	1/16W 100 ohm	R781	119-4711-15	1/16W 470 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R782	119-5611-15	1/16W 560 ohm	S707	013-6507-50	LS8J2M-T	S717	013-6507-50	LS8J2M-T
R785	119-4711-15	1/16W 470 ohm	S708	013-6507-50	LS8J2M-T	S718	013-6507-50	LS8J2M-T
R786	119-5611-15	1/16W 560 ohm	S709	013-6507-50	LS8J2M-T	S719	013-6507-50	LS8J2M-T
S701	013-6507-50	LS8J2M-T	S710	013-6507-50	LS8J2M-T	S720	013-6507-50	LS8J2M-T
S702	013-6507-50	LS8J2M-T	S711	013-6507-50	LS8J2M-T	S721	013-6507-50	LS8J2M-T
S703	013-6507-50	LS8J2M-T	S712	013-6518-50	LS9T2M-2SR/PG	S722	013-6507-50	LS8J2M-T
S704	013-6507-50	LS8J2M-T	S713	013-6507-50	LS8J2M-T	S723	016-9900-85	ENCODER-SW
S705	013-6507-50	LS8J2M-T	S714	013-6507-50	LS8J2M-T	PWB	039-2462-00	PWB(WITHOUT COMPONENT)
S706	013-6507-50	LS8J2M-T	S715	013-6507-50	LS8J2M-T			

CD PWB(B4) section : CD mechanism


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-4732-78	0.047uF	C77	163-2273-05	4V220uF	Q3	131-1188-50	2SB1188PQR
C2	046-3922-58	3900pF	C78	168-1045-56	0.1uF	Q4	190-1586-50	2SA1586Y,G
C3	046-3332-78	0.033uF	C80	168-1045-56	0.1uF	Q5	125-2004-92	RN1402
C4	045-2201-50	22pF	C81	168-1045-56	0.1uF	Q50	125-2004-92	RN1402
C5	045-3901-50	39pF	C82	178-1052-78	1uF	R1	033-3341-15	1/10W 330k ohm
C6	168-4732-78	0.047uF	C83	046-4722-58	4700pF	R2	033-4741-15	1/10W 470k ohm
C7	045-2096-50	2pF	C84	178-1052-78	1uF	R3	033-1521-15	1/10W 1.5k ohm
C8	042-0416-52	10V10uF TAN	C85	046-1032-78	0.01uF	R4	033-3321-15	1/10W 3.3k ohm
C9	042-0416-52	10V10uF TAN	C86	168-1045-56	0.1uF	R5	033-4721-15	1/10W 4.7k ohm
C10	046-5622-58	5600pF	C87	168-1045-56	0.1uF	R6	117-1001-15	1/8W 10 ohm
C11	178-1052-78	1uF	C88	045-1011-50	100pF	R7	033-2251-15	1/10W 2.2M ohm
C12	163-1073-05	4V100uF	C89	045-1011-50	100pF	R8	033-6831-15	1/10W 68k ohm
C13	178-1052-78	1uF	C90	046-1032-78	0.01uF	R9	033-1021-15	1/10W 1k ohm
C14	168-1045-56	0.1uF	C91	046-1032-78	0.01uF	R10	033-3331-15	1/10W 33k ohm
C15	046-6822-58	6800pF	C92	168-1045-56	0.1uF	R11	033-1231-15	1/10W 12k ohm
C16	046-3332-78	0.033uF	C93	046-1032-78	0.01uF	R12	033-1231-15	1/10W 12k ohm
C17	178-2242-78	0.22uF	C94	045-1201-50	12pF	R14	033-6831-15	1/10W 68k ohm
C18	168-4732-78	0.047uF	C95	168-1045-56	0.1uF	R17	033-1811-15	1/10W 180 ohm
C19	045-1511-50	150pF	C96	163-4763-05	4V47uF	R30	033-1011-15	1/10W 100 ohm
C20	046-2212-58	220pF	C97	042-0416-52	10V10uF TAN	R31	033-6811-15	1/10W 680 ohm
C21	178-1052-78	1uF	C98	168-1045-56	0.1uF	R32	033-6811-15	1/10W 680 ohm
C22	046-4722-58	4700pF	C99	046-1032-78	0.01uF	R33	033-2211-15	1/10W 220 ohm
C23	163-1073-05	4V100uF	CCT1	050-0145-54	1/10W 47k ohm x4	R35	033-3311-15	1/10W 330 ohm
C30	168-1045-56	0.1uF	CCT2	050-0145-54	1/10W 47k ohm x4	R36	033-5631-15	1/10W 56k ohm
C31	163-1073-05	4V100uF	CCT3	050-0146-53	1/10W 100k ohm x2	R37	033-8231-15	1/10W 82k ohm
C32	046-1032-78	0.01uF	CCT4	050-0146-53	1/10W 100k ohm x2	R38	033-5631-15	1/10W 56k ohm
C33	046-1032-78	0.01uF	CCT5	050-0146-55	1/10W 68k ohm x2	R39	033-3331-15	1/10W 33k ohm
C34	168-1045-56	0.1uF	CCT6	050-0145-54	1/10W 47k ohm x4	R40	033-8221-15	1/10W 8.2k ohm
C35	168-1045-56	0.1uF	CCT8	050-0146-53	1/10W 100k ohm x2	R41	033-1031-15	1/10W 10k ohm
C36	046-1022-58	1000pF	CCT9	050-0145-54	1/10W 47k ohm x4	R42	033-2731-15	1/10W 27k ohm
C37	042-0416-52	10V10uF TAN	D1	001-2610-90	RB480KTL	R43	033-1031-15	1/10W 10k ohm
C38	046-4722-58	4700pF	D2	001-2610-90	RB480KTL	R44	033-1531-15	1/10W 15k ohm
C39	178-2242-78	0.22uF	D3	001-0367-91	1SS226	R45	033-5621-15	1/10W 5.6k ohm
C40	168-1045-56	0.1uF	D4	001-2610-90	RB480KTL	R46	033-4741-15	1/10W 470k ohm
C41	046-2232-78	0.022uF	IC1	051-5709-90	AN8399SA-E1	R47	033-1541-15	1/10W 150k ohm
C42	046-6812-58	680pF	IC2	051-6393-00	MN6627482WB	R48	033-2241-15	1/10W 220k ohm
C43	046-1022-58	1000pF	IC3	051-6062-08	BA5996FM-E2	R50	117-6811-15	1/8W 680 ohm
C50	168-1045-56	0.1uF	IC4	051-7221-58	SN74AHC1G04HD	R51	033-1031-15	1/10W 10k ohm
C51	045-1011-50	100pF	IC5	052-5056-00	MN102H60KCK	R52	033-1031-15	1/10W 10k ohm
C52	046-1522-58	1500pF	IC6	051-6372-00	TMS320DA150P	R53	033-1031-15	1/10W 10k ohm
C53	046-1522-58	1500pF	IC7	051-3314-90	TA48S033F	R54	033-1031-15	1/10W 10k ohm
C54	046-6812-58	680pF	IC8	051-3315-90	TPS76316DBVR	R55	033-8221-15	1/10W 8.2k ohm
C55	163-1073-35	16V100uF	IC9	051-5442-08	BD4826G	R56	033-1041-15	1/10W 100k ohm
C56	168-1045-56	0.1uF	IC10	051-9814-00	MBM29DL800BA-90PFTN	R57	033-1011-15	1/10W 100 ohm
C57	046-1022-58	1000pF	IC11	051-7519-08	SN74LV273APWR	R62	033-1041-15	1/10W 100k ohm
C60	045-1801-50	18pF	IC12	051-7519-08	SN74LV273APWR	R63	033-1041-15	1/10W 100k ohm
C61	045-1801-50	18pF	IC13	051-7239-38	SN74AHCT08PWR	R66	119-4741-15	1/10W 470k ohm
C62	046-1032-78	0.01uF	IC14	051-9330-00	K4S641632F-TC60	R82	033-3311-15	1/10W 330 ohm
C63	168-1045-56	0.1uF	IC15	051-7518-08	SN74LV139APWR	R83	033-1211-15	1/10W 120 ohm
C64	168-1045-56	0.1uF	IC16	051-7203-48	SN74LV74APW	R84	033-0000-05	1/10W 0 ohm
C65	168-1045-56	0.1uF	IC17	051-3263-90	NJU7200U33	R94	033-1041-15	1/10W 100k ohm
C66	046-1032-78	0.01uF	IC18	051-7222-48	SN74AHC1G08D	R95	033-2231-15	1/10W 22k ohm
C67	168-1045-56	0.1uF	J1	074-1138-65	15P	R96	033-1021-15	1/10W 1k ohm
C68	046-1032-78	0.01uF	J2	074-1138-60	10P	R97	033-4721-15	1/10W 4.7k ohm
C70	168-1045-56	0.1uF	J3	074-1237-70	20P	TM1	073-0768-90	TERMINAL
C71	168-1045-56	0.1uF	J4	074-1138-57	7P	X1	060-1535-90	16.934MHz
C72	168-1045-56	0.1uF	Q1	125-0002-92	RN2402	X2	060-1535-90	16.934MHz
C75	046-1032-78	0.01uF	Q2	125-2004-92	RN1402	PWB	039-2439-20	PWB(WITHOUT COMPONENT)
C76	168-1045-56	0.1uF						

LED PWB(B5) section


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q2	060-4015-90	PS1192H
D2	001-7058-90	AN1105W-RR	S1	013-7414-50	CHUCKING
J1	074-1138-60	10P	S2	013-7413-50	LIMIT
Q1	060-4015-90	PS1192H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)

CONNECTOR LAYOUT

Rear view

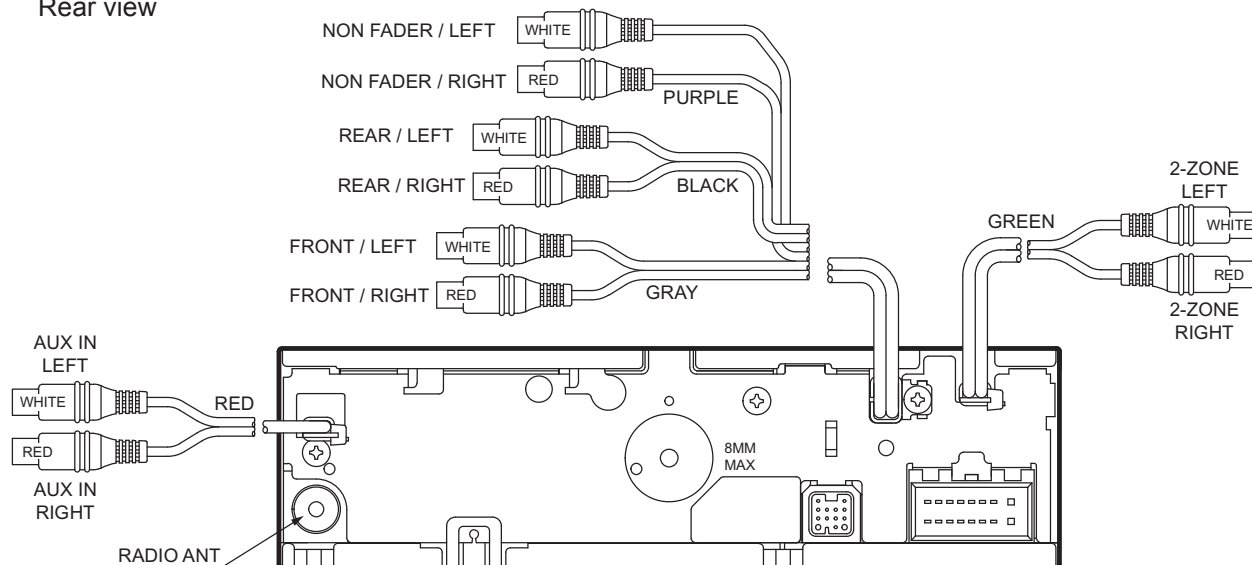


J600 (CeNET)



No.	Description
1	GND
2	BACK UP
3	L-CH(+)
4	N.C.
5	N.C.
6	BUS(+)
7	R-CH(+)
8	R-CH(-)
9	SYS-ACC
10	BUS(-)
11	L-CH(-)
12	ILLUMI
13	N.C.

No.	Description	No.	Description
1	SP R/L(+)	2	SP R/L(-)
3	SP F/L(-)	4	PHONE INT
5	SP F/L(+)	6	ACC
7	SP F/R(+)	8	AUTO ANT
9	SP F/R(-)	10	REMOTE
11	SP R/R(+)	12	ILLUMI
13	SP R/R(-)	14	BACK UP(BUS)
15	BACK UP	16	GND

J201



EXTENSION LEAD
854-6349-50

