


Exploded view of general assembly and parts list


■ MAIN BODY UPPER SIDE

Block No.M1MM

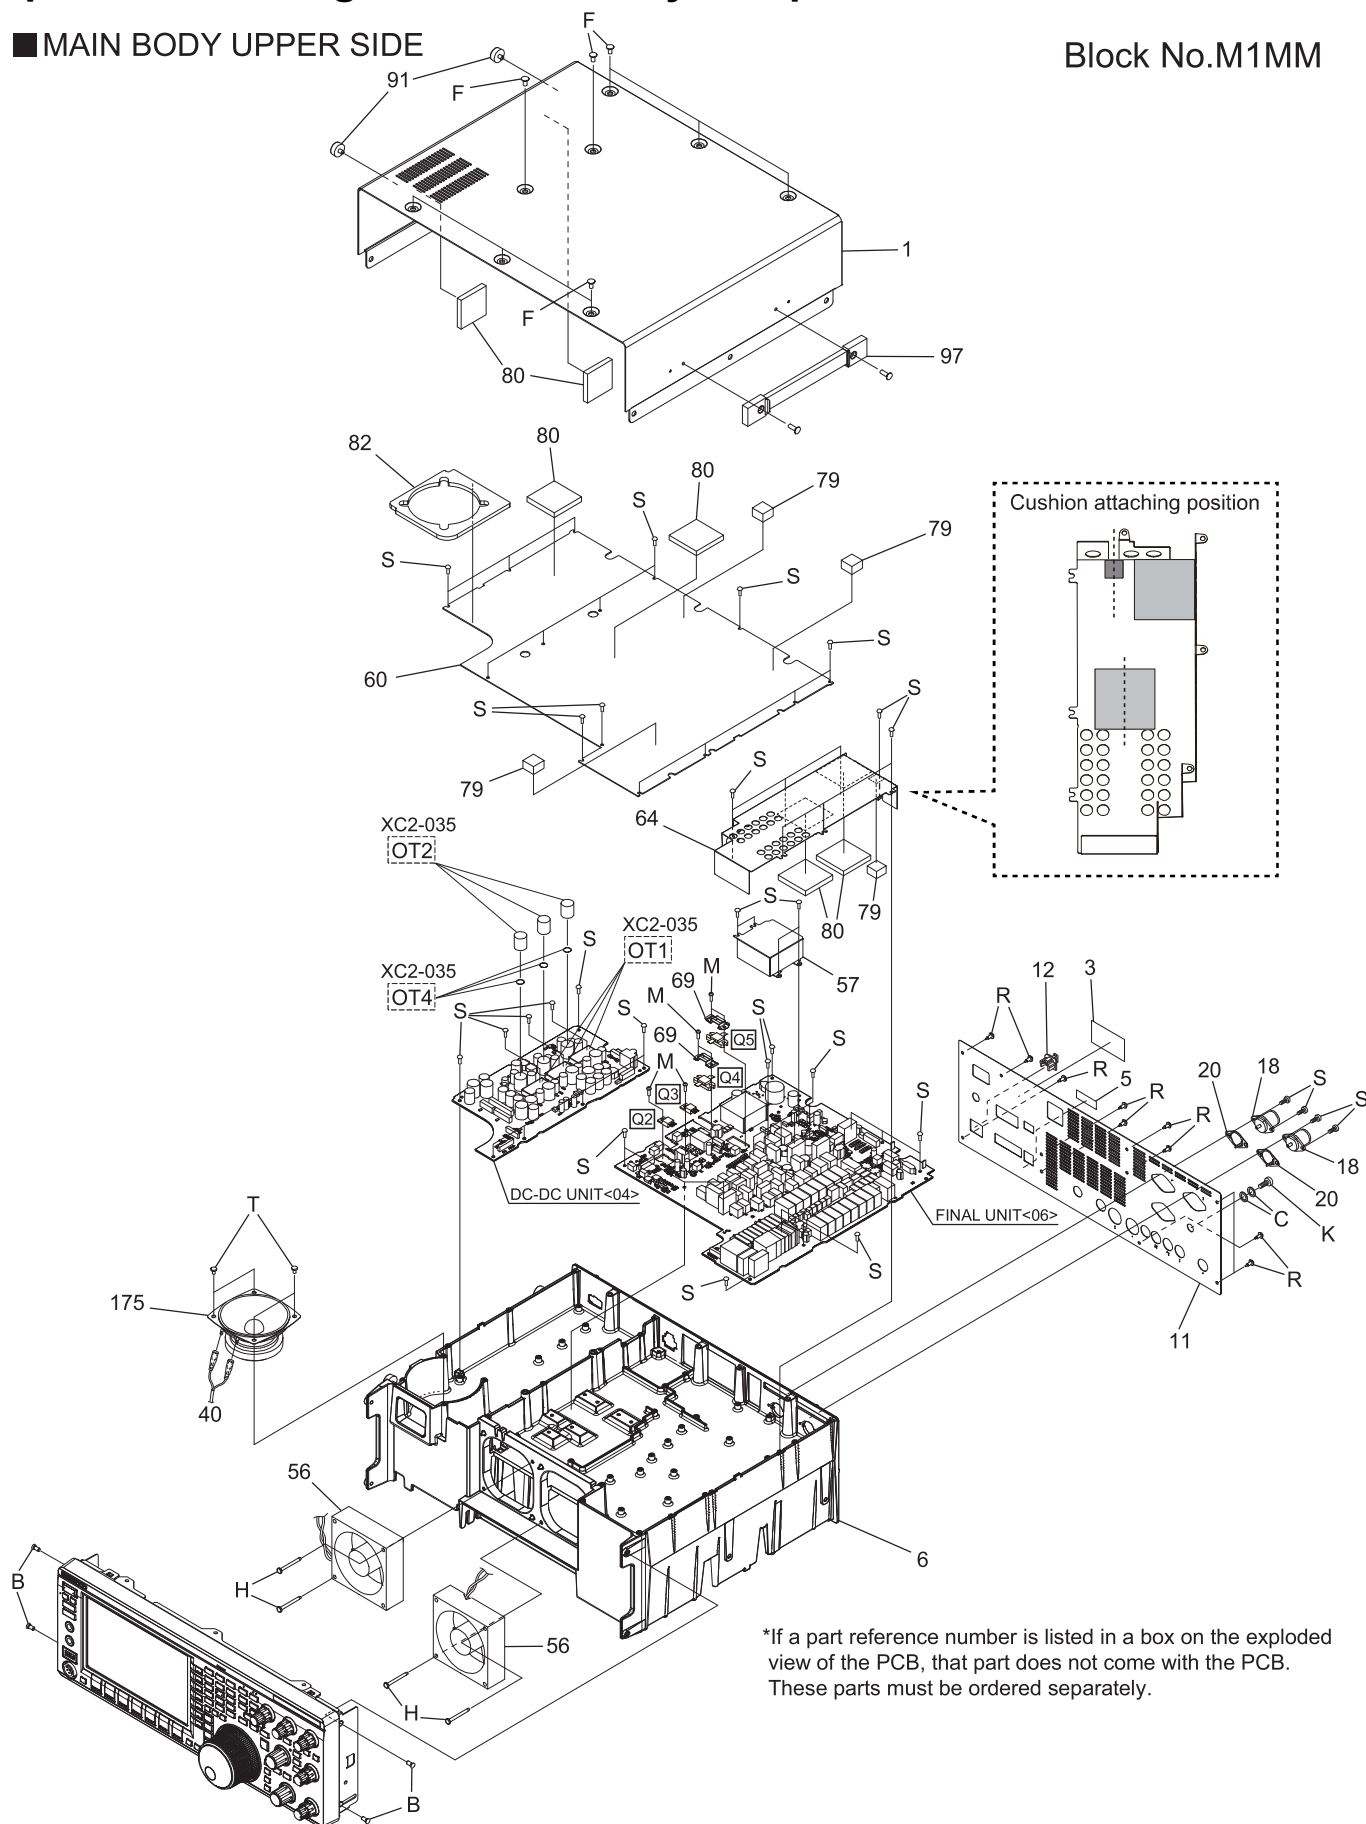


*If a part reference number is listed in a box on the exploded view of the PCB, that part does not come with the PCB. These parts must be ordered separately.


■ MAIN BODY LOWER SIDE

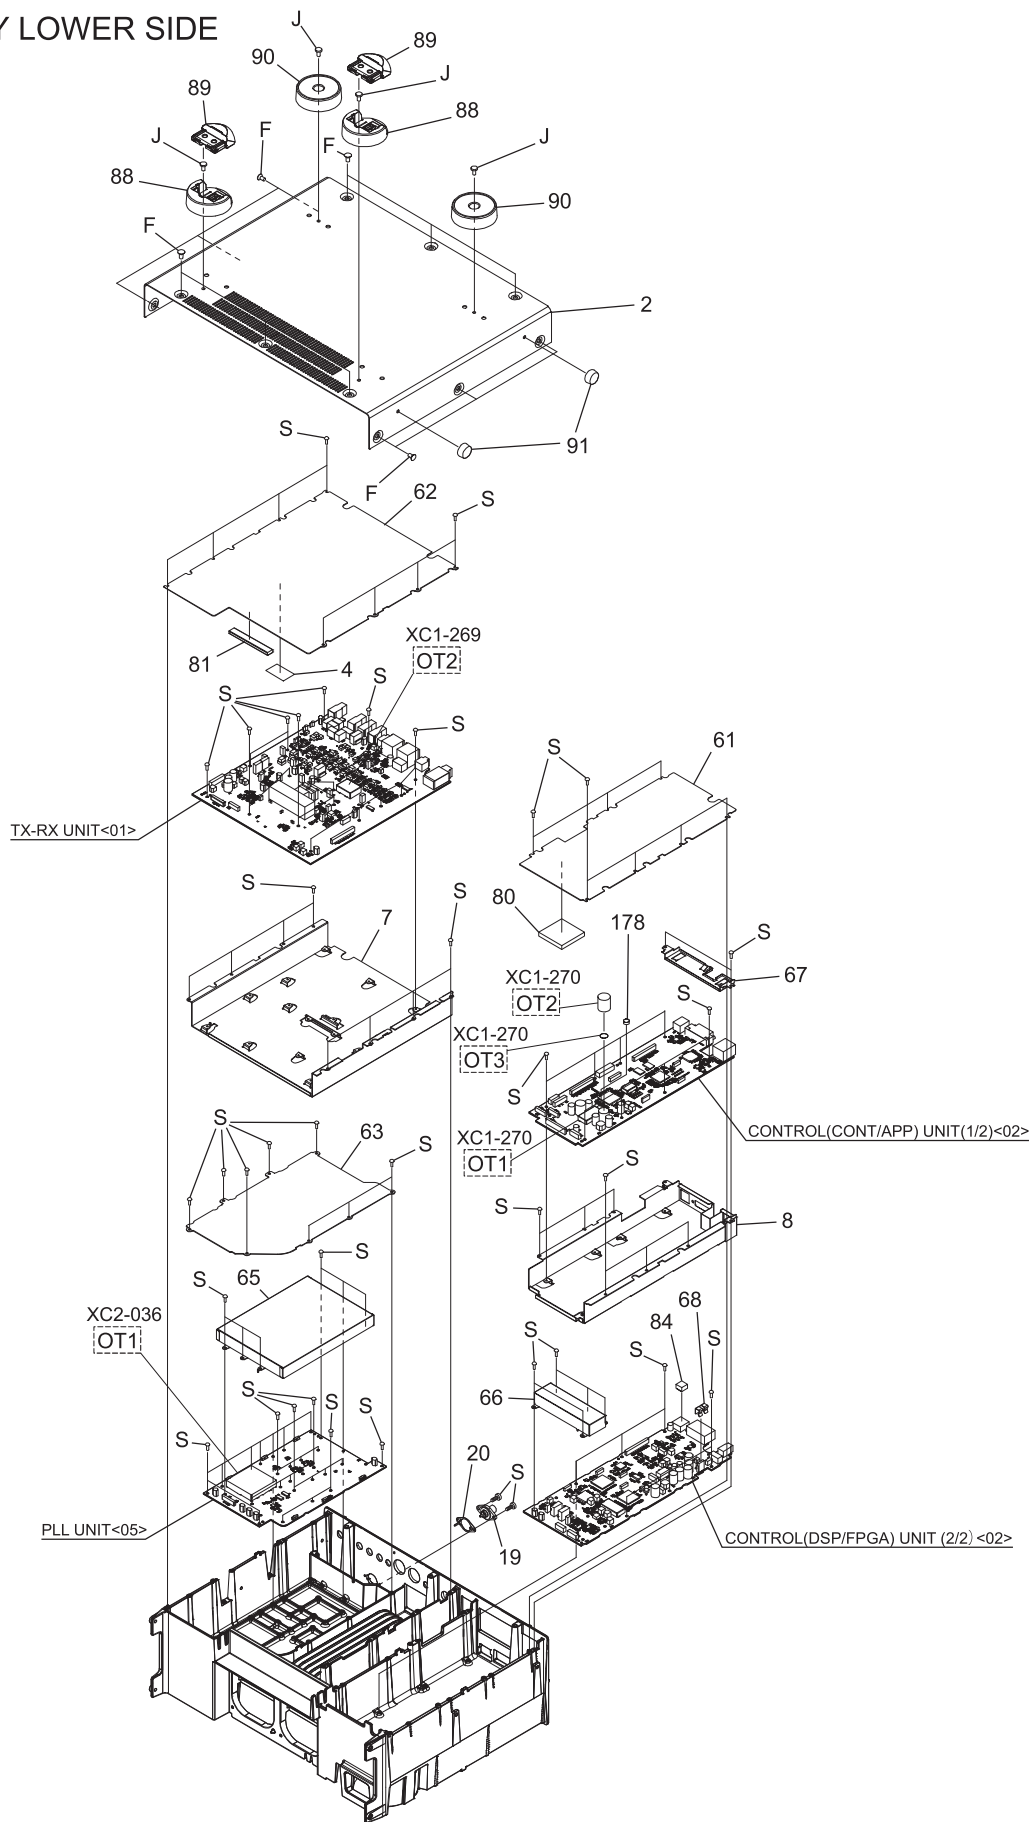


■ PANEL 1/2

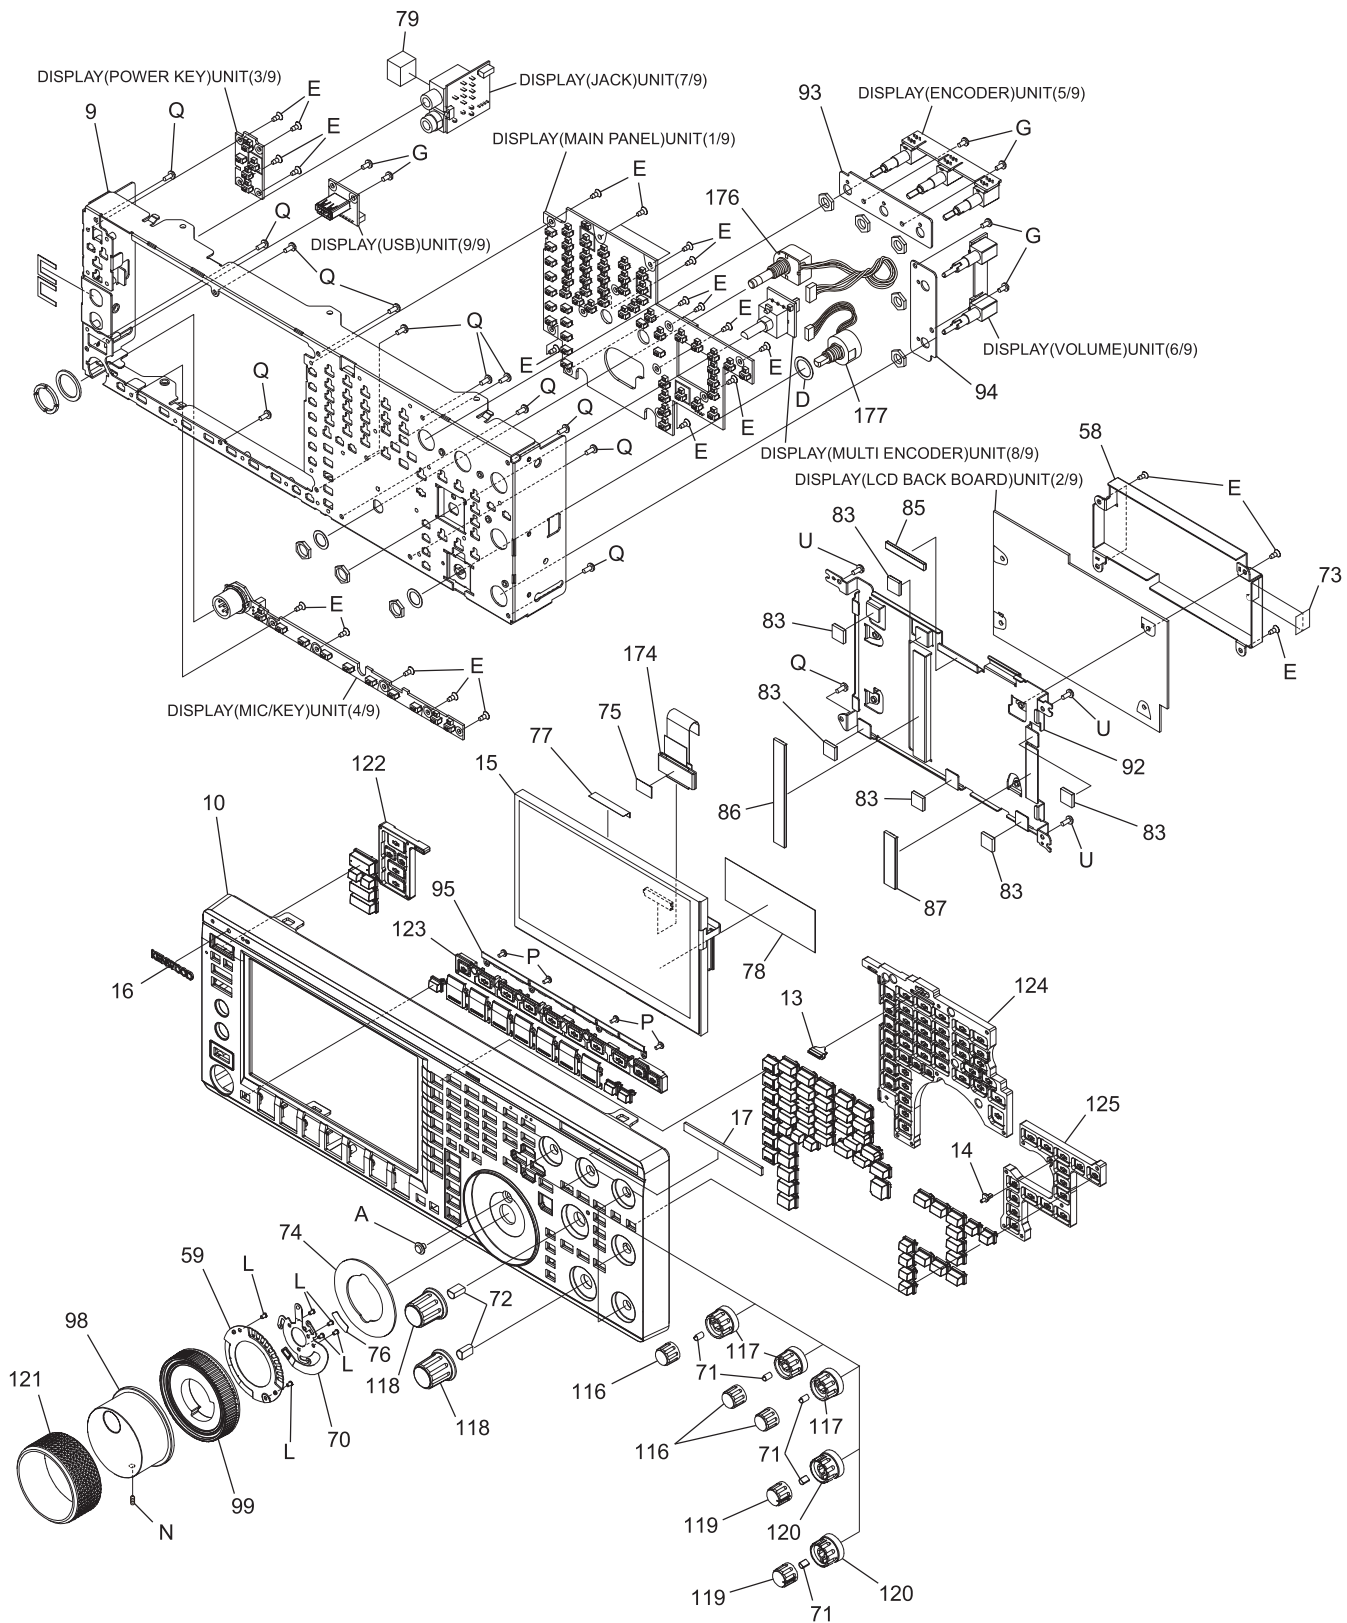


■ PANEL 2/2

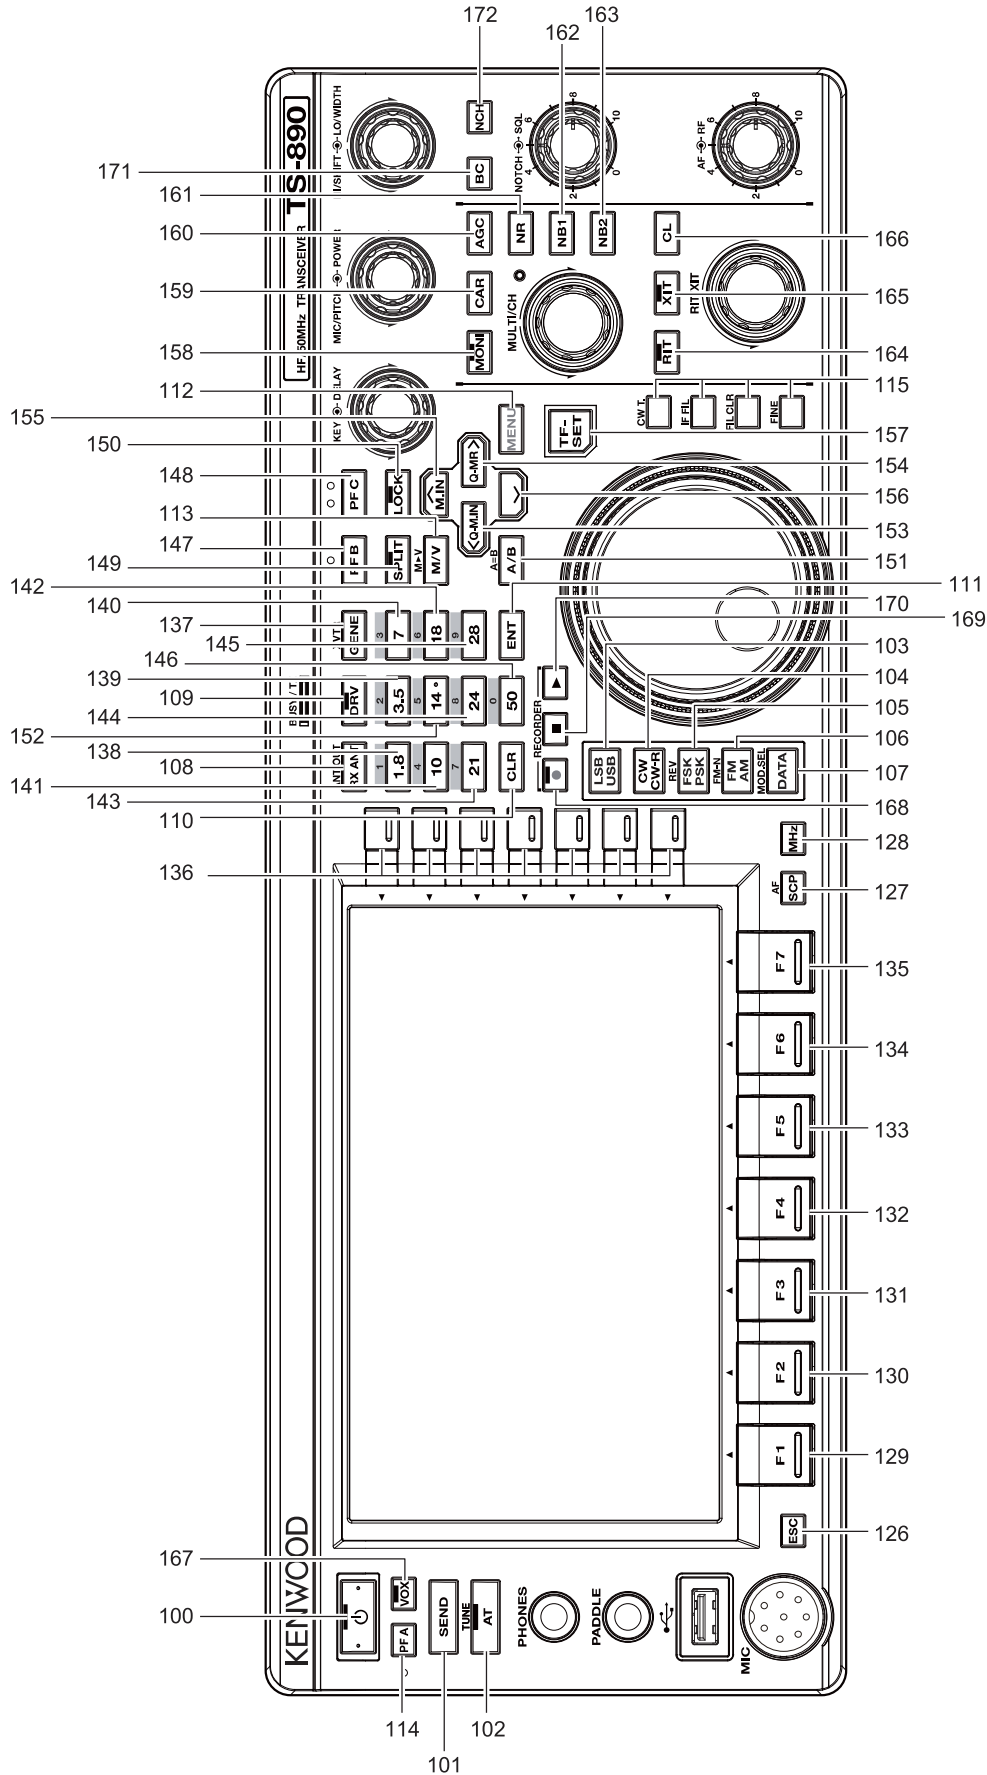

■ WIRING - UPPER SIDE, PANEL

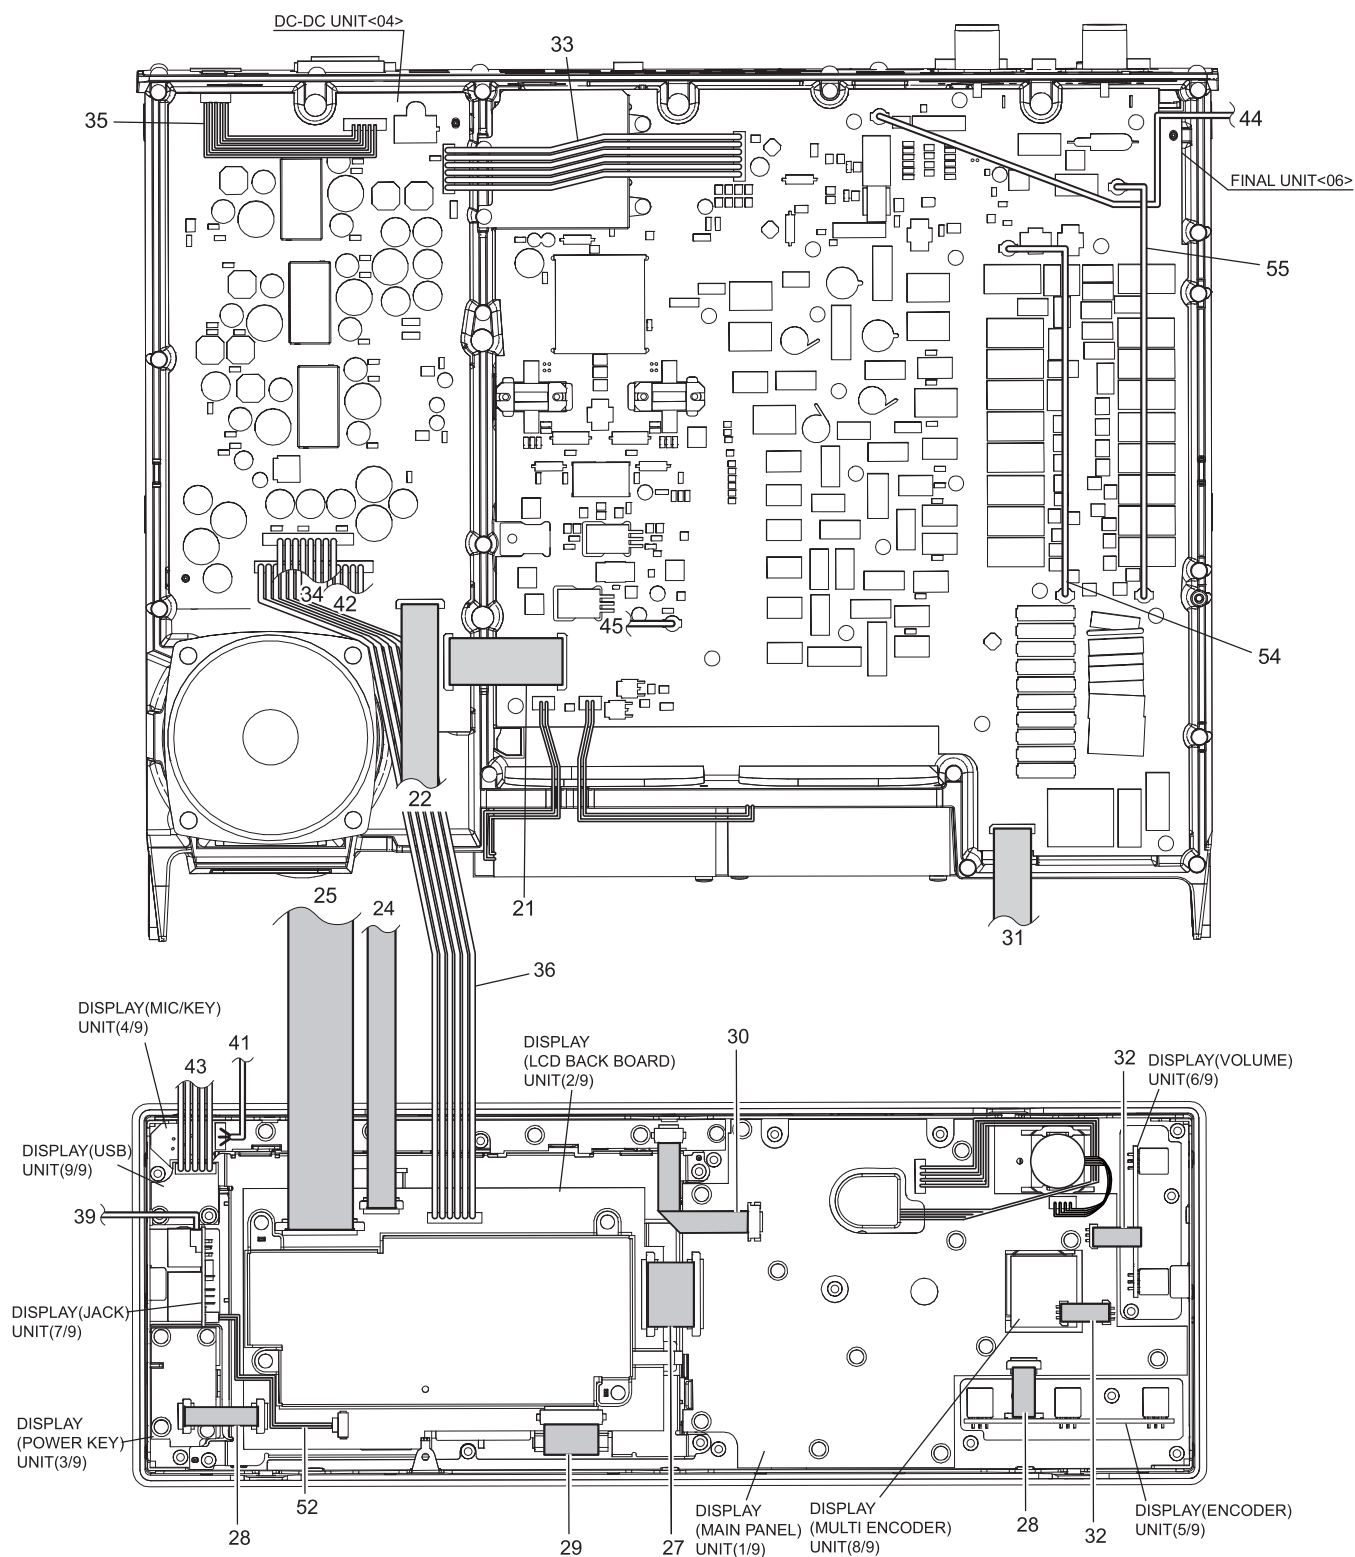

■ WIRING - LOWER SIDE

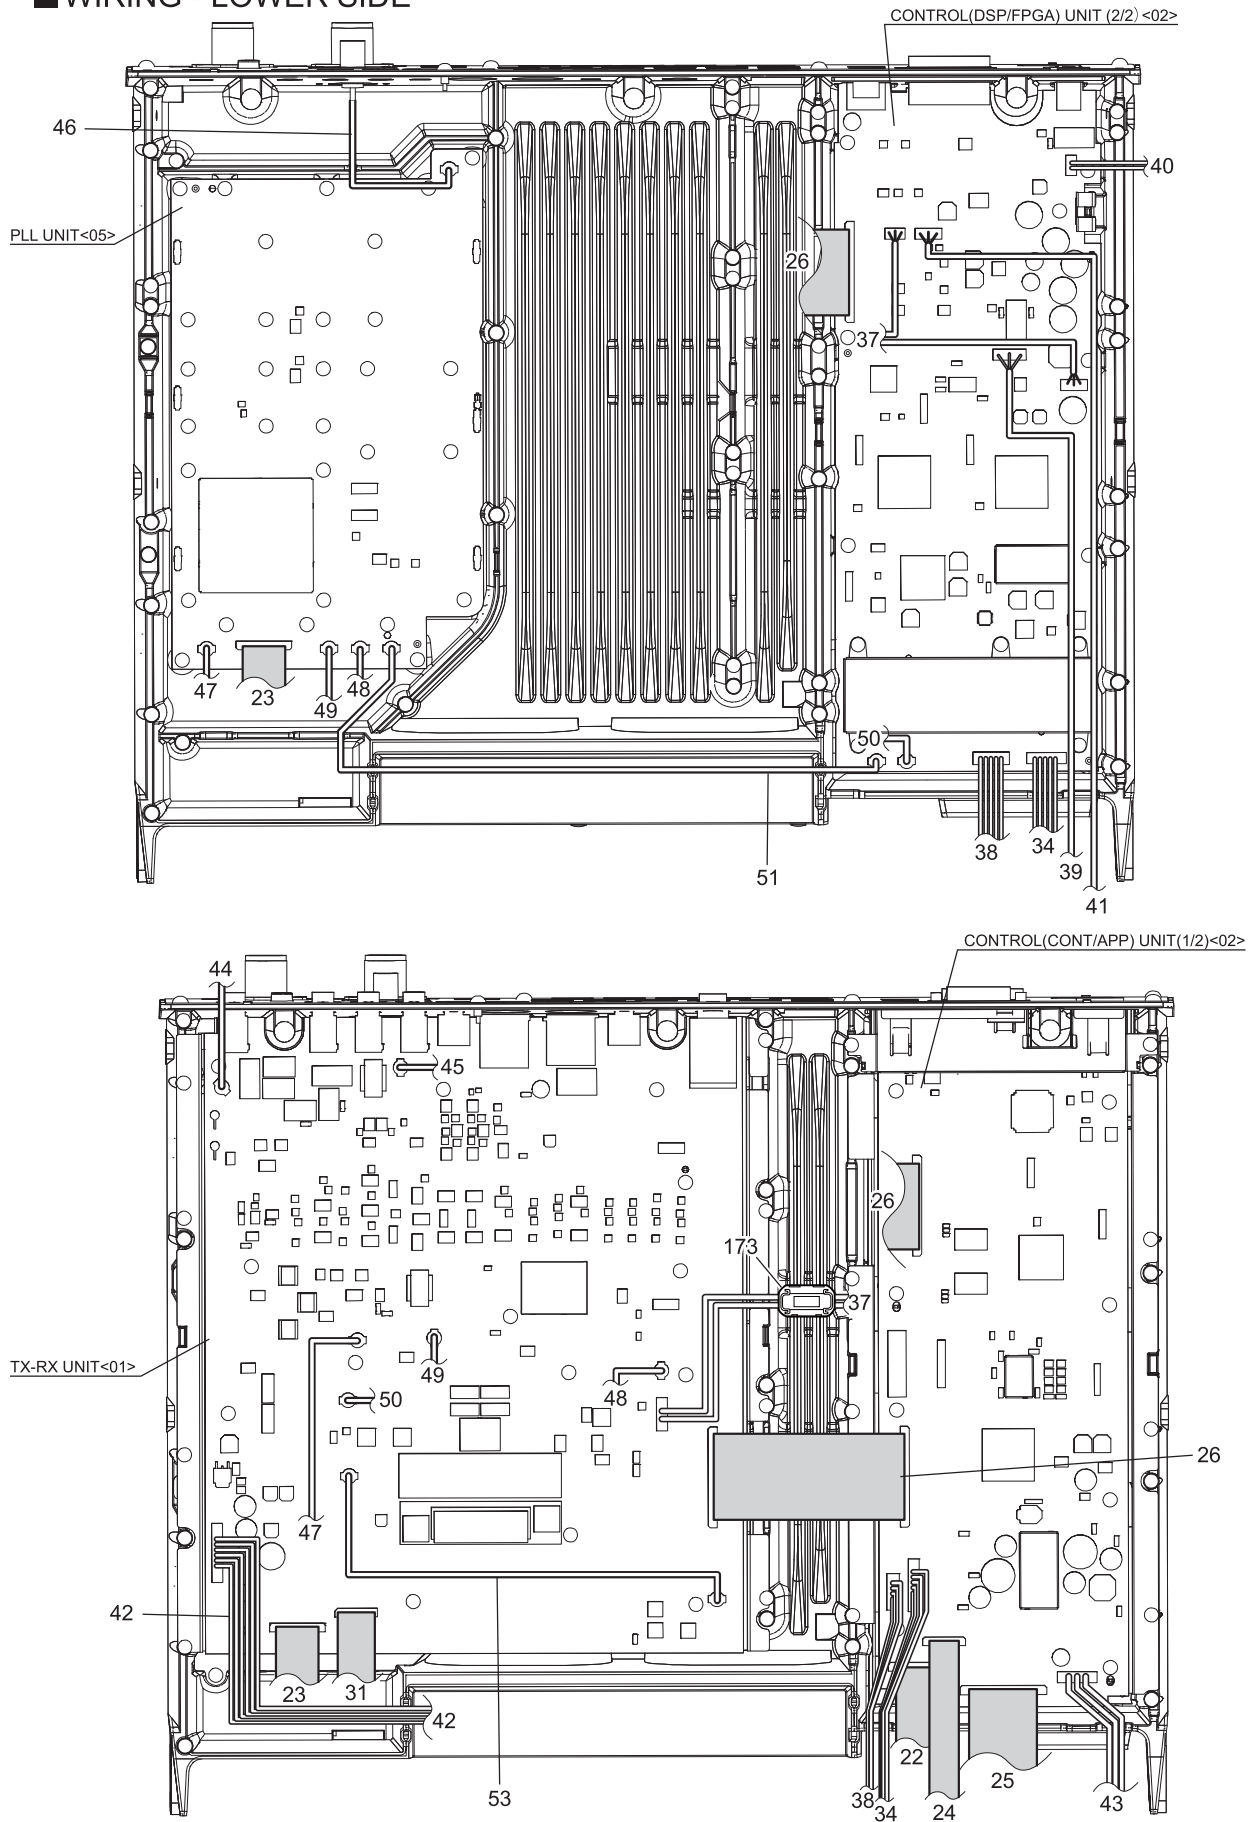

General assembly

Block No. [M][1][M][M]


Symbol No.	Part No.	Part Name	Description	Local
1	A0B-0029-00	M.CABINET	UPPER	890SK
2	A0B-0030-00	M.CABINET	LOWER	
3	B4A-1237-00	NAME PLATE	JKY PRINTING	
4	B42-5898-04	STICKER	TXRX	
5	B42-7070-04	STANDARD LABEL	FCC	
6	-----	CHASSIS		
7	-----	FRAME	TXRX	
8	-----	FRAME	CONTROL	
9	-----	SUB PANEL		
10	A6C-0086-00	PANEL		
11	B0B-0012-00	DRESSING PLATE	REAR PANEL	
12	B0K-0100-00	CAP	LAN	
13	B11-1898-03	ILL.GUIDE	TX_BUSY	
14	B11-1899-03	ILL.GUIDE	MULTI	
15	B3H-0100-00	LCD ASSY	EDT_7inch	
16	B43-0336-04	BADGE	KENWOOD	
17	B4D-0057-00	BADGE	TS-890	
18	E04-0167-15	C.RECEPTACLE-M	ANT(x2)	
19	E04-0454-15	C.RECEPTACLE-BN	BNC	
20	E23-1164-24	EARTH LUG	ANT/BNC(x3)	
21	E3G-0069-00	FFC WIRE	DCDC-FINAL	
22	E3G-0070-00	FFC WIRE	DCDC-CONT	
23	E3G-0071-00	FFC WIRE	TXRX-PLL	
24	E3G-0072-00	FFC WIRE	CONT-PANEL	
25	E3G-0073-00	FFC WIRE	CONT-PANEL	
26	E3G-0074-00	FFC WIRE	CONT-TXRX, CONT-DSP(x2)	
27	E3G-0076-00	FFC WIRE	LCD-PANEL	
28	E3G-0077-00	FFC WIRE	LCD-PWR KEY, PANEL-ENC(x2)	
29	E3G-0079-00	FFC WIRE	LCD-LCD ASSY	
30	E3G-0080-00	FFC WIRE	PANEL-MIC	
31	E3G-0081-00	FFC WIRE	FINAL-TXRX	
32	E3G-0082-00	FFC WIRE	PANEL-MULTI, PANEL-VOL(x2)	
33	E3K-0330-00	LEAD.WIRE W.C.	DCDC-FINAL	
34	E3K-0331-00	LEAD.WIRE W.C.	DCDC-CONT/DSP	
35	E3K-0332-00	LEAD.WIRE W.C.	DCDC-EXT.AT	
36	E3K-0333-00	LEAD.WIRE W.C.	DCDC-PANEL	
37	E3K-0334-10	LEAD.WIRE W.C.	TXRX-DSP	
38	E3K-0336-00	LEAD.WIRE W.C.	CONT-DSP	
39	E3K-0337-00	LEAD.WIRE W.C.	DSP-PHONES	
40	E3K-0338-00	LEAD.WIRE W.C.	DSP-SP	
41	E3K-0339-00	LEAD.WIRE W.C.	DSP-MIC	
42	E3K-0340-00	LEAD.WIRE W.C.	DCDC-TXRX	
43	E3K-0341-00	LEAD.WIRE W.C.	CONT-USB	
44	E3K-0342-00	L.WIRE W.M.PLUG	FINAL-TXRX	
45	E3K-0343-00	L.WIRE W.M.PLUG	FINAL-TXRX	
46	E3K-0344-00	L.WIRE W.M.PLUG	EXT.REF-PLL	
47	E3K-0345-00	L.WIRE W.M.PLUG	TXRX-PLL	
48	E3K-0346-00	L.WIRE W.M.PLUG	TXRX-PLL	
49	E3K-0347-00	L.WIRE W.M.PLUG	TXRX-PLL	
50	E3K-0348-00	L.WIRE W.M.PLUG	TXRX-DSP	
51	E3K-0349-00	L.WIRE W.M.PLUG	DSP-PLL	
52	E3K-0350-00	LEAD.WIRE W.C.	PANEL-PHONES	
53	E3K-0379-00	L.WIRE W.M.PLUG	TXRX-TXRX	
54	E3K-0423-00	L.WIRE W.M.PLUG	FINAL-FINAL	
55	E3K-0424-00	L.WIRE W.M.PLUG	FINAL-FINAL	
56	F09-1309-05	FANMOTOR	FINAL 80x80X25(x2)	
57	-----	SHIELDING COVER	DC-IN	
58	-----	SHIELDING COVER	7INCH NOISE	
59	F10-3198-13	SHIELDING PLATE	MAIN-TORQUE	
60	-----	SHIELDING PLATE	FINAL-TOP	
61	-----	SHIELDING PLATE	CONTROL	
62	-----	SHIELDING PLATE	TXRX	
63	-----	SHIELDING PLATE	LO	
64	-----	SHIELDING COVER	AT	
65	-----	SHIELDING COVER	LO	
66	-----	SHIELDING COVER	DSP SCOPE IF	
67	-----	SHIELDING COVER	CONT DVI UPPER	
68	G02-0791-24	FLAT SPRING	AUDIO IC	
69	G02-1860-04	EARTH SPRING	FINAL-FET(x2)	
70	G02-1869-13	FLAT SPRING	MAIN-TORQUE	
71	G02-0505-05	KNOB SPRING	INNER-KNOB(x5)	
72	G09-0405-05	KNOB SPRING	MULTI, RIT(x2)	
73	G10-1348-04	FIBROUS SHEET	LCD SHIELD BURR	
74	G10-1836-04	FIBROUS SHEET	MAIN-TORQUE	
75	G11-4520-04	SHEET	PANEL CORE	
76	G11-4621-04	SHEET	MAIN-KNOB	
77	G1B-0367-00	SHEET	TA	
78	G1B-0368-00	SHEET	TA	
79	G13-1888-04	CUSHION	PANEL 6.5D PHONE JACK(x5)	

△ Symbol No.	Part No.	Part Name	Description	Local
80	G13-2343-04	CUSHION	CONT & FINAL PLATE(x7)	
81	G13-2435-04	CONDUCT CUSHION	TXRX	
82	G1D-0298-00	CUSHION	SP	
83	G1D-0302-00	CUSHION	LCD REAR(x6)	
84	G1D-0311-00	CONDUCT CUSHION	USB-A	
85	G1D-0313-00	CONDUCT CUSHION	LCD_5x34	
86	G1D-0314-00	CONDUCT CUSHION	LCD_10x80	
87	G1D-0315-00	CONDUCT CUSHION	LCD_10x40	
88	J02-1310-12	FOOT	FRONT-BASE(x2)	
89	J02-1311-12	FOOT	FRONT-LEVER(x2)	
90	J02-1312-13	FOOT	REAR(x2)	
91	J0B-0014-00	FOOT	SIDE(x4)	
92	J2B-0384-00	MOUNTING	LCD	
93	J2B-0385-00	MOUNTING	3ENC	
94	J2B-0386-00	MOUNTING	2VOL	
95	J2B-0387-00	MOUNTING	FUNCTION_KEY	
-	J61-0307-05	WIRE BAND	(x3)	
97	K01-0427-15	HANDLE		
98	K21-1109-13	KNOB	MAIN-UPPER	
99	K21-1110-03	KNOB	MAIN-LOWER	
100	K29-9514-02	BUTTON KNOB	A-POWER	
101	K29-9516-02	BUTTON KNOB	B-SEND	
102	K29-9517-02	BUTTON KNOB	B-AT	
103	K29-9529-02	BUTTON KNOB	D-LSB/USB	
104	K29-9530-02	BUTTON KNOB	D-CW/CW-R	
105	K29-9531-02	BUTTON KNOB	D-FSK/PSK	
106	K29-9532-02	BUTTON KNOB	D-FM/AM	
107	K29-9533-02	BUTTON KNOB	D-DATA	
108	K29-9538-01	BUTTON KNOB	F-RX_ANT	
109	K29-9539-01	BUTTON KNOB	F-DRV	
110	K29-9549-01	BUTTON KNOB	F-CLR	
111	K29-9551-01	BUTTON KNOB	F-ENT	
112	K29-9554-01	BUTTON KNOB	F-MENU	
113	K29-9555-01	BUTTON KNOB	F-M/V	
114	K29-9570-02	BUTTON KNOB	M-PF A	
115	K29-9574-12	BUTTON KNOB	M-PLATING(x4)	
116	K29-9577-03	KNOB	HI/LO-INNER(x3)	
117	K29-9578-13	KNOB	HI/LO-OUTER(x3)	
118	K29-9579-02	KNOB	MULTI, RIT(x2)	
119	K29-9580-03	KNOB	VR-BIG-IN(x2)	
120	K29-9581-13	KNOB	VR-BIG-OUT(x2)	
121	K29-9582-13	KNOB RING	MAIN KNOB	
122	K2K-0310-00	KEY TOP	KEY-AREA-1	
123	K2K-0311-00	KEY TOP	KEY-AREA-2	
124	K2K-0312-00	KEY TOP	KEY-AREA-3	
125	K2K-0313-00	KEY TOP	KEY-AREA-4	
126	K2K-0315-00	BUTTON KNOB	N-ESC	
127	K2K-0316-00	BUTTON KNOB	N-SCP	
128	K2K-0317-00	BUTTON KNOB	N-MHz	
129	K2K-0318-00	BUTTON KNOB	O-F1	
130	K2K-0319-00	BUTTON KNOB	O-F2	
131	K2K-0320-00	BUTTON KNOB	O-F3	
132	K2K-0321-00	BUTTON KNOB	O-F4	
133	K2K-0322-00	BUTTON KNOB	O-F5	
134	K2K-0323-00	BUTTON KNOB	O-F6	
135	K2K-0324-00	BUTTON KNOB	O-F7	
136	K2K-0325-00	BUTTON KNOB	P-FUNC_TFT(x7)	
137	K2K-0326-00	BUTTON KNOB	F-GENE	
138	K2K-0327-00	BUTTON KNOB	F-1.8 (1)	
139	K2K-0328-00	BUTTON KNOB	F-3.5 (2)	
140	K2K-0329-00	BUTTON KNOB	F-7 (3)	
141	K2K-0330-00	BUTTON KNOB	F-10 (4)	
142	K2K-0331-00	BUTTON KNOB	F-18 (6)	
143	K2K-0332-00	BUTTON KNOB	F-21 (7)	
144	K2K-0333-00	BUTTON KNOB	F-24 (8)	
145	K2K-0334-00	BUTTON KNOB	F-28 (9)	
146	K2K-0335-00	BUTTON KNOB	F-50 (0)	
147	K2K-0336-00	BUTTON KNOB	F-PF_B	
148	K2K-0337-00	BUTTON KNOB	F-PF_C	
149	K2K-0338-00	BUTTON KNOB	F-SPLIT	
150	K2K-0339-00	BUTTON KNOB	F-LOCK	
151	K2K-0340-00	BUTTON KNOB	F-A/B	
152	K2K-0341-00	BUTTON KNOB	G-14	
153	K2K-0342-00	BUTTON KNOB	Q-< Q-MIN	
154	K2K-0343-00	BUTTON KNOB	R-Q-MR >	
155	K2K-0344-00	BUTTON KNOB	K-UP_M-IN	
156	K2K-0345-00	BUTTON KNOB	L-DOWN	
157	K2K-0346-00	BUTTON KNOB	H2-TF-SET	
158	K2K-0347-00	BUTTON KNOB	S-MONI	
159	K2K-0348-00	BUTTON KNOB	S-CAR	
160	K2K-0349-00	BUTTON KNOB	S-AGC	
161	K2K-0350-00	BUTTON KNOB	S-NR	
162	K2K-0351-00	BUTTON KNOB	S-NB1	

△ Symbol No.	Part No.	Part Name	Description	Local
163	K2K-0352-00	BUTTON KNOB	S-NB2	
164	K2K-0353-00	BUTTON KNOB	S-RIT	
165	K2K-0354-00	BUTTON KNOB	S-XIT	
166	K2K-0355-00	BUTTON KNOB	S-CL	
167	K2K-0356-00	BUTTON KNOB	M2-VOX	
168	K2K-0357-00	BUTTON KNOB	M2-●(REC)	
169	K2K-0358-00	BUTTON KNOB	M2-□(STOP)	
170	K2K-0359-00	BUTTON KNOB	M2-△(PLAY)	
171	K2K-0360-00	BUTTON KNOB	M2-BC	
172	K2K-0361-00	BUTTON KNOB	M2-NCH	
173	L79-1417-05	LINE FILTER		
174	L92-0493-05	FERRITE CORE	LCD FFC	
175	T07-0797-05	SPEAKER		
176	W02-1836-15	ENCODER	MAIN	
177	W02-3727-05	ENCODER	RIT	
178	W09-0971-05	LITHIUM CELL	COTROL UNIT	
A	N09-6602-05	SPECIAL SCREW	PANEL	
B	N09-6617-05	SPECIAL SCREW	SUB PANEL TO CHASSIS(x4)	
C	N15-1040-48	FLAT WASHER	GND(x2)	
D	N19-0673-15	SPECIAL WASHER	FRONT OF RIT-ENCODER	
E	N33-2606-43	O.HEAD M.SCREW	SW PCB(x25)	
F	N33-4008-43	O.HEAD M.SCREW	CABINET(x20)	
G	N35-2604-43	BI.HEAD M.SCREW	ENC & VOL PLATE, USB(x6)	
H	N35-3030-48	BI.HEAD M.SCREW	FAN(x4)	
J	N35-4006-43	BI.HEAD M.SCREW	FOOT(x4)	
K	N35-4010-48	BI.HEAD M.SCREW	GND	
L	N38-2030-48	P.HEAD M.SCREW	MAIN KNOB(x6)	
M	N67-2608-48	P.H.SEMS SCREW	FET(x6)	
N	N77-3006-43	H.S.H.SET SCREW	MAIN KNOB	
P	N82-2004-43	BI.HEAD T.SCREW	MOUNTING OF FUNC-KEY(x4)	
Q	N82-2605-48	BI.HEAD T.SCREW	SUBPANEL, MOUNTING OF LCD(x13)	
R	N87-2606-43	BR.HEAD T.SCREW	DRESSING PLATE(x10)	
S	N87-2608-48	BR.HEAD T.SCREW	PCB(x162)	
T	N87-3005-43	BR.HEAD T.SCREW	SP(x4)	
U	N82-2606-43	BI.HEAD T.SCREW	SUBPANEL, MOUNTING OF LCD(x3)	
-	XC1-269J-00	TX-RX UNIT		890SK
-	XC1-270K-01	CONTROL UNIT	SERVICE UNIT	890SK
-	XC1-271J-00	DISPLAY UNIT		
-	XC2-035J-00	DC-DC UNIT		
-	XC2-036J-00	PLL UNIT		890SK
-	XC3-062J-00	FINAL UNIT		890SK
-	XC1-269E-01	TX-RX UNIT		890SE
-	XC1-270E-01	CONTROL UNIT	SERVICE UNIT	890SE
-	XC2-036E-01	PLL UNIT		890SE
-	XC3-062E-01	FINAL UNIT		890SE

Packing materials and accessories parts list

Block No.M2MM

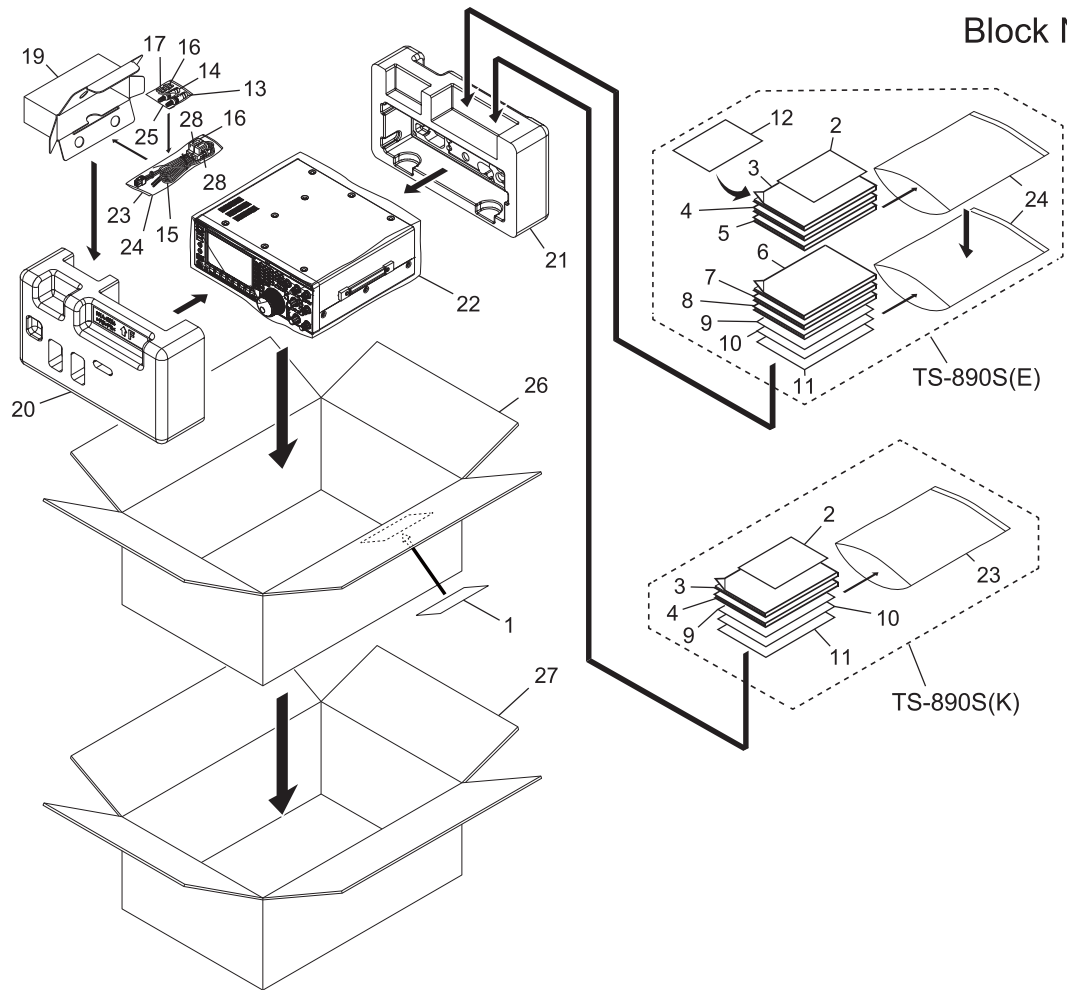

Packing and accessories

Block No. [M][2][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	B4J-0024-20	LABEL FOR PKG	E TYPE	890SE
2	-----	WARRANTY CARD	K TYPE	890SK
2	-----	WARRANTY CARD	E TYPE	890SE
3	B5A-2215-00	INST.MANUAL	ENGLISH	
4	B5A-2216-00	INST.MANUAL	FRENCH	
5	B5A-2217-00	INST.MANUAL	SPANISH	890SE
6	B5A-2218-00	INST.MANUAL	GERMAN	890SE
7	B5A-2219-00	INST.MANUAL	ITALIAN	890SE
8	B5A-2220-00	INST.MANUAL	DUTCH	890SE
9	B5C-0003-00	SCH.DIAGRAM	ACC	
10	B5C-0004-00	SCH.DIAGRAM	ACC	
11	B5C-0005-00	SCH.DIAGRAM	ACC	
12	-----	PAMPHLET		890SE
13	E07-0751-25	DIN PLUG	7P, ACC	
14	E07-1351-25	DIN PLUG	13P, ACC	
15	E30-3489-35	DC CORD	ACC	
16	FZB10AX-250	BLADE FUSE	25A(x2)	
17	FZB10AU-4R0	BLADE FUSE	4A-MINI, ACC	
19	H02-0638-03	INNER CARTON	FOR ACC	
20	H1A-0224-00	PS FOAM FIXTURE	FRONT	
21	H1A-0225-00	PS FOAM FIXTURE	REAR	
22	H2A-0012-00	PROTECT COVER	FOR BODY	
23	H25-2433-04	PROTECTION BAG	MANUAL, DC CORD(x2)	890SK
24	H25-2433-04	PROTECTION BAG	MANUAL, DC CORD(x3)	890SE
25	H2F-0141-00	PROTECTION BAG	FUSE, DIN	
26	H5A-1615-00	ITEM CARTON		
27	H6A-1480-00	OUTER CARTON		
28	B42-7003-04	RATING LABEL	DC CORD(x2)	890SE

Electrical parts list

TX-RX UNIT

XC1-269J-00(TS-890S(K))
XC1-269E-01(TS-890S(E))

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	BA2904FVM	IC		
IC551	CD74HC4094M96	IC		
IC552	CD74HC4094M96	IC		
IC553	R2A20168SA	IC		
IC554	CD74HC4094M96	IC		
IC555	CD74HC4094M96	IC		
IC556	BU2508FV	IC		
IC557	CD74HC4094M96	IC		
IC558	R2A20168SA	IC		
IC559	ADR3433ARJZ	IC		
IC601	BA06CC0FP	IC		
IC602	SN74CBT3257PW	IC		
IC801	BA2904FVM	IC		
IC802	BA4580RFVM	IC		
IC803	TC4W53FUF	IC		
IC1001	BA2904FVM	IC		
IC1002	BA2904FVM	IC		
IC1003	BA2904FVM	IC		
IC1004	BA2904FVM	IC		
IC1005	BA2904FVM	IC		
IC1201	NJM2594V-ZB	IC		
Q1	LTC014EEBFS8	DIGI TRANSISTOR		
Q2	LTC043ZEBFS8	DIGI TRANSISTOR		
Q3	2SAR512P5	TRANSISTOR		
Q4	LTC043ZEBFS8	DIGI TRANSISTOR		
Q5	RE1L002SN	FET		
Q7	RE1L002SN	FET		
Q9	2SC4617/R/	TRANSISTOR		
Q10	LTC043ZEBFS8	DIGI TRANSISTOR		
Q11	RE1L002SN	FET		
Q201	LTC023YEBFS8	TRANSISTOR		
Q202	SSM3K15AMFVF	FET		
Q203	2SC4617/R/	TRANSISTOR		
Q204	2SA1586(Y,GR)F	TRANSISTOR		
Q205	LTC024EUBFS8	DIGI TRANSISTOR		
Q206	SSM3K15AMFVF	FET		
Q207	LTC023YEBFS8	TRANSISTOR		
Q208	LTC023YEBFS8	TRANSISTOR		
Q209	2SB1694	TRANSISTOR		
Q210	SSM3K15AMFVF	FET		
Q211	2SD1757K/QRS/	TRANSISTOR		
Q212	LTC043ZEBFS8	DIGI TRANSISTOR		
Q281	LTC043ZEBFS8	DIGI TRANSISTOR		
Q282	2SAR512P5	TRANSISTOR		
Q283	LTC014EEBFS8	DIGI TRANSISTOR		
Q284	RE1L002SN	FET		
Q285	2SAR512P5	TRANSISTOR		
Q301	LTC043ZEBFS8	DIGI TRANSISTOR		
Q302	LTC043ZEBFS8	DIGI TRANSISTOR		
Q303	LTC043ZEBFS8	DIGI TRANSISTOR		
Q304	LTC043ZEBFS8	DIGI TRANSISTOR		
Q305	LTC043ZEBFS8	DIGI TRANSISTOR		
Q306	LTC043ZEBFS8	DIGI TRANSISTOR		
Q307	LTC043ZEBFS8	DIGI TRANSISTOR		
Q308	LTC043ZEBFS8	DIGI TRANSISTOR		
Q309	LTC043ZEBFS8	DIGI TRANSISTOR		
Q310	LTC043ZEBFS8	DIGI TRANSISTOR		
Q311	LTC043ZEBFS8	DIGI TRANSISTOR		
Q312	LTC043ZEBFS8	DIGI TRANSISTOR		
Q313	LTC043ZEBFS8	DIGI TRANSISTOR		
Q314	LTC043ZEBFS8	DIGI TRANSISTOR		
Q315	LTC043ZEBFS8	DIGI TRANSISTOR		
Q316	LTC043ZEBFS8	DIGI TRANSISTOR		
Q317	LTC043ZEBFS8	DIGI TRANSISTOR		
Q318	LTC043ZEBFS8	DIGI TRANSISTOR		
Q601	LTC043ZEBFS8	DIGI TRANSISTOR		
Q602	2SB1694	TRANSISTOR		
Q603	RE1L002SN	FET		
Q604	2SC5551AF	TRANSISTOR		
Q605	2SB1694	TRANSISTOR		
Q606	LTC043ZEBFS8	DIGI TRANSISTOR		
Q607	LSCR523EBFS8	TRANSISTOR		
Q610	LTC043ZEBFS8	DIGI TRANSISTOR		
Q611	2SC5551AF	TRANSISTOR		
Q612	LTC023YEBFS8	TRANSISTOR		
Q701	LTC043ZEBFS8	DIGI TRANSISTOR		
Q702	LTA014EEBFS8	DIGI TRANSISTOR		
Q703	2SC4617/R/	TRANSISTOR		
Q704	2SC4617/R/	TRANSISTOR		
Q705	2SC4617/R/	TRANSISTOR		
Q706	2SC4617/R/	TRANSISTOR		
Q707	2SC4617/R/	TRANSISTOR		
Q708	2SC4617/R/	TRANSISTOR		
Q709	RE1L002SN	FET		
Q710	2SC4617/R/	TRANSISTOR		
Q711	LSCR523EBFS8	TRANSISTOR		
Q712	2SC4617/R/	TRANSISTOR		
Q713	LTA014EEBFS8	DIGI TRANSISTOR		
Q714	LTC043ZEBFS8	DIGI TRANSISTOR		
Q715	LTC043ZEBFS8	DIGI TRANSISTOR		
Q801	LTC043ZEBFS8	DIGI TRANSISTOR		
Q802	LTC043ZEBFS8	DIGI TRANSISTOR		
Q803	LTC043ZEBFS8	DIGI TRANSISTOR		
Q804	LTC043ZEBFS8	DIGI TRANSISTOR		
Q805	LTC043ZEBFS8	DIGI TRANSISTOR		
Q806	2SC4725	TRANSISTOR		
Q807	3SK293F	FET		
Q808	LTC043ZEBFS8	DIGI TRANSISTOR		
Q809	LTC043ZEBFS8	DIGI TRANSISTOR		
Q811	2SC5551AF	TRANSISTOR		
Q812	2SC5551AF	TRANSISTOR		
Q813	LTC043ZEBFS8	DIGI TRANSISTOR		
Q1001	SSM3K15AMFVF	FET		
Q1002	2SC4617/R/	TRANSISTOR		
Q1003	2SC4617/R/	TRANSISTOR		
Q1004	LTC043ZEBFS8	DIGI TRANSISTOR		
Q1005	LTC043ZEBFS8	DIGI TRANSISTOR		
Q1101	SSM3K15AMFVF	FET		
Q1102	SSM3K15AMFVF	FET		
Q1103	DTB143EK	DIGI TRANSISTOR		
Q1104	2SC5551AF	TRANSISTOR		
Q1105	SSM3K15AMFVF	FET		
Q1106	SSM3K15AMFVF	FET		
Q1107	DTB143EK	DIGI TRANSISTOR		
Q1108	DTB143EK	DIGI TRANSISTOR		
Q1109	SSM3K15AMFVF	FET		
Q1110	DTB143EK	DIGI TRANSISTOR		890SE
Q1111	SSM3K15AMFVF	FET		890SE
Q1201	3SK293F	FET		
Q1202	3SK293F	FET		
Q1203	3SK293F	FET		
Q1204	DTB143EK	DIGI TRANSISTOR		
Q1205	SSM3K15AMFVF	FET		
Q1206	DTB143EK	DIGI TRANSISTOR		890SE
Q1207	SSM3K15AMFVF	FET		890SE
Q1208	RE1L002SN	FET		
Q1209	2SC4726/PQ/	TRANSISTOR		
Q1281	2SC4726/PQ/	TRANSISTOR		
D1	1SS400SM	DIODE		
D2	1SS400SM	DIODE		
D3	UDZV6.2B	ZENER DIODE		
D4	UDZV6.2B	ZENER DIODE		
D5	1SS400SM	DIODE		
D6	1SS400SM	DIODE		
D7	1SS400SM	DIODE		
D8	1SS400SM	DIODE		
D9	CES388	SCHOTTKY DIODE		
D10	1SS226-F	DIODE		
D11	1SS226-F	DIODE		
D12	1SS400SM	DIODE		
D13	DAN217WM	DIODE		
D14	EDZV18B	ZENER DIODE		
D15	EDZV4.3B	ZENER DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
D16	1SS400SM	DIODE		
D17	UDZV6.2B	ZENER DIODE		
D18	UDZV6.2B	ZENER DIODE		
D19	CES388	SCHOTTKY DIODE		
D20	CES388	SCHOTTKY DIODE		
D101	EDZV18B	ZENER DIODE		
D102	EDZV18B	ZENER DIODE		
D103	EDZV18B	ZENER DIODE		
D209	1SS400SM	DIODE		
D210	1SS400SM	DIODE		
D211	RB706F-40	DIODE		
D212	1SS400SM	DIODE		
D213	CSA70-401L	SURGE ABSORBER		
D214	1SS400SM	DIODE		
D215	1SS400SM	DIODE		
D216	1SS400SM	DIODE		
D217	L8103R	DIODE		
D218	MMSD103T1G	DIODE		
D219	MMSD103T1G	DIODE		
D220	L8103R	DIODE		
D221	RN142SM	DIODE		
D222	RN142SM	DIODE		
D224	RN142SM	DIODE		
D301	RN142SM	DIODE		
D302	RN142SM	DIODE		
D303	RN142SM	DIODE		
D304	RN142SM	DIODE		
D305	RN142SM	DIODE		
D306	RN142SM	DIODE		
D307	RN142SM	DIODE		
D308	RN142SM	DIODE		
D309	RN142SM	DIODE		
D310	RN142SM	DIODE		
D311	RN142SM	DIODE		
D312	RN142SM	DIODE		
D313	RN142SM	DIODE		
D314	RN142SM	DIODE		
D315	RN142SM	DIODE		
D316	RN142SM	DIODE		
D317	RN142SM	DIODE		
D318	RN142SM	DIODE		
D319	RN142SM	DIODE		
D320	RN142SM	DIODE		
D321	RN142SM	DIODE		
D322	RN142SM	DIODE		
D323	RN142SM	DIODE		
D324	RN142SM	DIODE		
D325	RN142SM	DIODE		
D326	RN142SM	DIODE		
D327	RN142SM	DIODE		
D328	RN142SM	DIODE		
D329	RN142SM	DIODE	890SE	
D330	RN142SM	DIODE	890SE	
D331	RN142SM	DIODE		
D332	RN142SM	DIODE		
D333	RN142SM	DIODE		
D334	RN142SM	DIODE		
D335	RN142SM	DIODE	890SE	
D336	RN142SM	DIODE	890SE	
D337	RN142SM	DIODE		
D338	RN142SM	DIODE		
D601	RN142SM	DIODE		
D602	RN142SM	DIODE		
D603	RR1LAM4S	DIODE		
D604	RN142SM	DIODE		
D606	RN142SM	DIODE		
D607	RN142SM	DIODE		
D608	RN142SM	DIODE		
D609	RN142SM	DIODE		
D610	RN142SM	DIODE		
D611	RN142SM	DIODE		
D612	RN142SM	DIODE		
D613	RN142SM	DIODE		
D614	RN142SM	DIODE		
D615	1SS400SM	DIODE		
D701	RB706F-40	DIODE		
D702	1SS400SM	DIODE		
D703	1SS400SM	DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
D704	RN142SM	DIODE		
D705	RN142SM	DIODE		
D706	RN142SM	DIODE		
D707	RN142SM	DIODE		
D801	RN142SM	DIODE		
D802	RN142SM	DIODE		
D803	RN142SM	DIODE		
D804	RN142SM	DIODE		
D806	RN142SM	DIODE		
D808	RN142SM	DIODE		
D809	RN142SM	DIODE		
D810	RN142SM	DIODE		
D811	RN142SM	DIODE		
D812	RN142SM	DIODE		
D813	RN142SM	DIODE		
D814	RN142SM	DIODE		
D815	RN142SM	DIODE		
D816	RN142SM	DIODE		
D817	RN731V	DIODE		
D818	RB706F-40	DIODE		
D819	RB706F-40	DIODE		
D820	RN142SM	DIODE		
D1001	EDZV6.2B	ZENER DIODE		
D1002	1SS400SM	DIODE		
D1005	1SS400SM	DIODE		
D1006	1SS400SM	DIODE		
D1007	1SS400SM	DIODE		
D1008	UDZV3.3B	ZENER DIODE		
D1009	1SS400SM	DIODE		
D1010	RB520SM-30	DIODE		
D1011	RB520SM-30	DIODE		
D1012	1SS400SM	DIODE		
D1101	EDZV18B	ZENER DIODE		
D1102	EDZV18B	ZENER DIODE		
D1103	RN142SM	DIODE		
D1104	RN142SM	DIODE		
D1105	RN142SM	DIODE		
D1106	RN142SM	DIODE		
D1107	RN142SM	DIODE		890SE
D1108	1SS400SM	DIODE		
D1109	1SS400SM	DIODE		890SE
D1110	RN142SM	DIODE		
D1111	RN142SM	DIODE		890SE
D1112	RN142SM	DIODE		
D1201	RN142SM	DIODE		
D1204	RN142SM	DIODE		
D1205	RN142SM	DIODE		890SE
D1206	RN142SM	DIODE		890SE
D1207	RN142SM	DIODE		
D1208	RN731V	DIODE		
D1209	RN731V	DIODE		
D1210	RN731V	DIODE		
D1211	RN731V	DIODE		
D1212	DA204U	MULTIPLE DIODE		
D1213	RN142SM	DIODE		
D1291	RN142SM	DIODE		
C2	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C4	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C6	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C8	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C9	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C12	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C13	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C14	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C15	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C17	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C18	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C44	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C46	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C47	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C48	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C57	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C61	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C62	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C66	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C67	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C68	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C73	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C222	CC73GCH1H090B	C CAPACITOR	9pF 50V B	890SE
C75	CK73GB1E105K	C CAPACITOR	1uF 25V K		C223	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C78	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C224	CC73GCH1H220G	C CAPACITOR	22pF 50V G	890SK
C80	CD04BQ1C471M	E CAPACITOR	470uF 16V M		C224	CC73GCH1H270G	C CAPACITOR	27pF 50V G	890SE
C82	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C225	CC73GCH1H020B	C CAPACITOR	2pF 50V B	
C83	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C226	CC73GCH1H040B	C CAPACITOR	4pF 50V B	890SK
C84	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C227	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C85	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C228	CC73GCH1H560G	C CAPACITOR	56pF 50V G	890SK
C86	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C228	CC73GCH1H470G	C CAPACITOR	47pF 50V G	890SE
C87	CK73GB1E474K	C CAPACITOR	0.47uF 25V K		C229	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C88	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C230	CC73GCH1H120G	C CAPACITOR	12pF 50V G	890SK
C89	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C230	CC73GCH1H220G	C CAPACITOR	22pF 50V G	890SE
C90	CK73GB1E474K	C CAPACITOR	0.47uF 25V K		C231	CC73GCH1H020B	C CAPACITOR	2pF 50V B	890SE
C91	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C232	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C92	CC73GCH1H471J	C CAPACITOR	470pF 50V J		C233	CC73GCH1H180G	C CAPACITOR	18pF 50V G	890SK
C93	CK73GBB1H472K	C CAPACITOR	4700pF 50V K		C234	CK73EB1H104K	C CAPACITOR	0.1uF 50V K	
C94	CC73GCH1H471J	C CAPACITOR	470pF 50V J		C235	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C95	CK73GBB1H472K	C CAPACITOR	4700pF 50V K		C236	CK73EB1H104K	C CAPACITOR	0.1uF 50V K	
C96	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C237	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C97	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C238	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C98	C93-1823-05	C CAPACITOR	1000pF 630V		C239	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C99	C93-1823-05	C CAPACITOR	1000pF 630V		C240	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C100	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C241	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C101	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C242	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C102	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C243	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C103	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C245	CC73GCH1H182J	C CAPACITOR	1800pF 50V J	
C104	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C246	CC73GCH1H152J	C CAPACITOR	1500pF 50V J	
C106	CD04AZ1V101M	E CAPACITOR	100uF 35V M		C247	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C108	CK73GB1E105K	C CAPACITOR	1uF 25V K		C249	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C110	CK73GXR1E475K	C CAPACITOR	4.7uF 25V K		C250	CC73GCH1H222J	C CAPACITOR	2200pF 50V J	
C111	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C251	CC73FCH1H472J	C CAPACITOR	4700pF 50V J	
C112	CK73GBB1H473K	C CAPACITOR	0.047uF 50V K		C252	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C114	CK73GXR1E475K	C CAPACITOR	4.7uF 25V K		C254	CC73GCH1H222J	C CAPACITOR	2200pF 50V J	
C117	CK73GB1E105K	C CAPACITOR	1uF 25V K		C258	CC73GCH1H050B	C CAPACITOR	5pF 50V B	890SE
C118	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C259	CC73GCH1H150G	C CAPACITOR	15pF 50V G	890SE
C120	CK73GXR1E475K	C CAPACITOR	4.7uF 25V K		C281	CE32CL1C220M	E CAPACITOR	22uF 16V M	
C121	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C282	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C122	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C283	CE32CL1C220M	E CAPACITOR	22uF 16V M	
C123	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C284	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C124	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C301	CC73GCH1H121J	C CAPACITOR	120pF 50V J	
C125	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C302	CC73GCH1H121J	C CAPACITOR	120pF 50V J	
C126	CK73GBB1H472K	C CAPACITOR	4700pF 50V K		C303	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C127	CC73GCH1H471J	C CAPACITOR	470pF 50V J		C304	CC73GCH1H121J	C CAPACITOR	120pF 50V J	
C128	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C305	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C129	CK73GB1E474K	C CAPACITOR	0.47uF 25V K		C307	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C130	CK73GBB1H472K	C CAPACITOR	4700pF 50V K		C309	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C131	CC73GCH1H471J	C CAPACITOR	470pF 50V J		C310	CC73GCH1H820J	C CAPACITOR	82pF 50V J	
C132	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C311	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C133	CK73GB1E474K	C CAPACITOR	0.47uF 25V K		C312	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C134	CC73GCH1H101J	C CAPACITOR	100pF 50V J		C313	CC73GCH1H271J	C CAPACITOR	270pF 50V J	
C135	CC73GCH1H101J	C CAPACITOR	100pF 50V J		C314	CC73GCH1H222J	C CAPACITOR	2200pF 50V J	
C146	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C315	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C150	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C316	CC73GCH1H120G	C CAPACITOR	12pF 50V G	
C151	CC73GCH1H100B	C CAPACITOR	10pF 50V B		C317	CC73GCH1H121J	C CAPACITOR	120pF 50V J	
C152	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C318	CC73GCH1H331J	C CAPACITOR	330pF 50V J	
C201	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C319	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C202	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C320	CC73GCH1H820J	C CAPACITOR	82pF 50V J	
C203	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C321	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C204	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C322	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C205	CK73GBB1H222K	C CAPACITOR	2200pF 50V K		C323	CC73GCH1H220G	C CAPACITOR	22pF 50V G	
C206	CC730DP2J030C	C CAPACITOR	3.0pF 630V C		C324	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C207	C93-1880-05	C CAPACITOR	22pF 630V		C325	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C208	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C329	CC73GCH1H561J	C CAPACITOR	560pF 50V J	
C209	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C330	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C210	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C331	CC73GCH1H180G	C CAPACITOR	18pF 50V G	
C211	CC73GCH1H820J	C CAPACITOR	82pF 50V J		C333	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C212	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C334	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C214	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C335	CC73GCH1H220G	C CAPACITOR	22pF 50V G	
C215	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C336	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C216	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C337	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	
C217	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C338	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C218	CC73GCH1H220G	C CAPACITOR	22pF 50V G	890SK	C339	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C218	CC73GCH1H120G	C CAPACITOR	12pF 50V G	890SE	C340	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C219	CC73GCH1H080B	C CAPACITOR	8pF 50V B	890SK	C341	CC73GCH1H821J	C CAPACITOR	820pF 50V J	
C219	CC73GCH1H150G	C CAPACITOR	15pF 50V G	890SE	C342	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C221	CC73GCH1H560G	C CAPACITOR	56pF 50V G	890SK	C343	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C221	CC73GCH1H390G	C CAPACITOR	39pF 50V G	890SE	C344	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C222	CC73GCH1H020B	C CAPACITOR	2pF 50V B	890SK	C346	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C348	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C433	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C352	CC73GCH1H820J	C CAPACITOR	82pF 50V J		C435	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C353	CC73GCH1H270G	C CAPACITOR	27pF 50V G		C436	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C354	CC73GCH1H182J	C CAPACITOR	1800pF 50V J		C438	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C355	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C441	CC73GCH1H121J	C CAPACITOR	120pF 50V J	890SE
C356	CC73GCH1H152J	C CAPACITOR	1500pF 50V J		C442	CC73GCH1H271J	C CAPACITOR	270pF 50V J	
C357	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C443	CC73GCH1H150G	C CAPACITOR	15pF 50V G	
C358	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C444	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C359	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C445	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C360	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C446	CC73GCH1H221J	C CAPACITOR	220pF 50V J	890SE
C361	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C447	CC73GCH1H181J	C CAPACITOR	180pF 50V J	890SE
C362	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C449	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C363	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C450	CC73GCH1H120G	C CAPACITOR	12pF 50V G	
C364	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C454	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C365	CC73GCH1H221J	C CAPACITOR	220pF 50V J		C455	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C366	CC73GCH1H222J	C CAPACITOR	2200pF 50V J		C456	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C367	CK73GB1E105K	C CAPACITOR	1uF 25V K		C457	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C368	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C458	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	890SE
C369	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C459	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	890SE
C370	CC73GCH1H151J	C CAPACITOR	150pF 50V J		C460	CC73GCH1H331J	C CAPACITOR	330pF 50V J	
C371	CC73GCH1H331J	C CAPACITOR	330pF 50V J		C461	CC73GCH1H271J	C CAPACITOR	270pF 50V J	
C372	CC73GCH1H180G	C CAPACITOR	18pF 50V G		C462	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C373	CC73GCH1H150G	C CAPACITOR	15pF 50V G		C463	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C374	CC73GCH1H220G	C CAPACITOR	22pF 50V G		C466	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C375	CC73GCH1H180G	C CAPACITOR	18pF 50V G		C467	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C376	CC73GCH1H150G	C CAPACITOR	15pF 50V G		C468	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C377	CC73GCH1H150G	C CAPACITOR	15pF 50V G		C469	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C378	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K		C470	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	890SE
C379	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C471	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	890SE
C380	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C472	CC73GCH1H820J	C CAPACITOR	82pF 50V J	
C381	CC73GCH1H151J	C CAPACITOR	150pF 50V J		C473	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C382	CC73GCH1H121J	C CAPACITOR	120pF 50V J		C474	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C383	CC73GCH1H180G	C CAPACITOR	18pF 50V G		C475	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C384	CC73GCH1H101J	C CAPACITOR	100pF 50V J		C477	CC73GCH1H270G	C CAPACITOR	27pF 50V G	890SE
C386	CC73GCH1H470G	C CAPACITOR	47pF 50V G		C478	CC73GCH1H121J	C CAPACITOR	120pF 50V J	890SE
C388	CC73GCH1H220G	C CAPACITOR	22pF 50V G		C479	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C389	CC73GCH1H220G	C CAPACITOR	22pF 50V G		C480	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C390	CC73GCH1H470G	C CAPACITOR	47pF 50V G		C481	CC73GCH1H330G	C CAPACITOR	33pF 50V G	
C391	CC73GCH1H270G	C CAPACITOR	27pF 50V G		C482	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C392	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C484	CC73GCH1H101J	C CAPACITOR	100pF 50V J	890SE
C393	CC73GCH1H471J	C CAPACITOR	470pF 50V J		C485	CC73GCH1H150G	C CAPACITOR	15pF 50V G	
C395	CC73GCH1H150G	C CAPACITOR	15pF 50V G		C487	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C396	CC73GCH1H180G	C CAPACITOR	18pF 50V G		C488	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C397	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C489	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C398	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C490	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C399	CC73GCH1H152J	C CAPACITOR	1500pF 50V J		C491	CC73GCH1H390G	C CAPACITOR	39pF 50V G	890SE
C400	CC73GCH1H561J	C CAPACITOR	560pF 50V J		C492	CC73GCH1H330G	C CAPACITOR	33pF 50V G	890SE
C401	CC73GCH1H391J	C CAPACITOR	390pF 50V J		C493	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C402	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C494	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C403	CK73GB1E105K	C CAPACITOR	1uF 25V K		C495	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C404	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C496	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C405	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C497	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	890SE
C406	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C498	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	890SE
C407	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C499	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C408	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C500	CC73GCH1H151J	C CAPACITOR	150pF 50V J	890SE
C409	CC73GCH1H331J	C CAPACITOR	330pF 50V J		C501	CC73GCH1H080B	C CAPACITOR	8pF 50V B	
C410	CC73GCH1H271J	C CAPACITOR	270pF 50V J		C502	CC73GCH1H150G	C CAPACITOR	15pF 50V G	
C411	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C503	CC73GCH1H120G	C CAPACITOR	12pF 50V G	
C412	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C504	CC73GCH1H181J	C CAPACITOR	180pF 50V J	890SE
C413	CK73GB1E105K	C CAPACITOR	1uF 25V K		C505	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C414	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C507	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C415	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C508	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C416	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C509	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C417	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C510	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C418	CC73GCH1H391J	C CAPACITOR	390pF 50V J		C511	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	890SE
C419	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C512	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	890SE
C420	CC73GCH1H221J	C CAPACITOR	220pF 50V J		C513	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C421	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C514	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C422	CC73GCH1H561J	C CAPACITOR	560pF 50V J		C515	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C423	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C516	CC73GCH1H390G	C CAPACITOR	39pF 50V G	890SE
C424	CC73GCH1H221J	C CAPACITOR	220pF 50V J		C517	CC73GCH1H390G	C CAPACITOR	39pF 50V G	890SE
C425	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C518	CC73GCH1H330G	C CAPACITOR	33pF 50V G	890SE
C427	CK73GB1E105K	C CAPACITOR	1uF 25V K		C523	CC73GCH1H121J	C CAPACITOR	120pF 50V J	890SE
C428	CC73GCH1H152J	C CAPACITOR	1500pF 50V J		C524	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C429	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C525	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C430	CC73GCH1H152J	C CAPACITOR	1500pF 50V J		C526	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C431	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C527	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C432	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C528	CC73GCH1H121J	C CAPACITOR	120pF 50V J	890SE

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C529	CC73GCH1H181J	C CAPACITOR	180pF 50V J	890SE	C635	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C531	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		C636	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C532	CC73GCH1H821J	C CAPACITOR	820pF 50V J		C637	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C533	CC73GCH1H220G	C CAPACITOR	22pF 50V G		C638	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C538	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C639	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C539	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C640	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C540	CC73GCH1H221J	C CAPACITOR	220pF 50V J		C641	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C541	CC73GCH1H271J	C CAPACITOR	270pF 50V J		C642	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C542	CC73GCH1H050B	C CAPACITOR	5pF 50V B		C643	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C543	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C644	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C645	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C547	CC73GCH1H120G	C CAPACITOR	12pF 50V G		C646	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C549	CC73GCH1H220G	C CAPACITOR	22pF 50V G		C647	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C551	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C648	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C552	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C649	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C553	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C650	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C554	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C651	CC73GCH1H331J	C CAPACITOR	330pF 50V J	
C555	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C652	CC73GCH1H331J	C CAPACITOR	330pF 50V J	
C556	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C653	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C557	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C655	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C558	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C656	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C559	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C657	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C560	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C658	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C561	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C659	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C563	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C661	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C564	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C664	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C565	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C665	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C569	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C666	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C570	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C667	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C571	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C669	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C572	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C673	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C573	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C674	CC73GCH1H010B	C CAPACITOR	1pF 50V B	
C574	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C675	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C575	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C679	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C576	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C680	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C577	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C682	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C578	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C683	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C579	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C685	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C580	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C686	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C581	CK73FB1C106K	C CAPACITOR	10uF 16V K		C687	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C582	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C688	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C583	CK73GB1E105K	C CAPACITOR	1uF 25V K		C689	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C584	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C690	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C585	CK73GB1E105K	C CAPACITOR	1uF 25V K		C691	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C588	CC73GCH1H331J	C CAPACITOR	330pF 50V J		C692	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C589	CC73GCH1H390G	C CAPACITOR	39pF 50V G		C693	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C590	CC73GCH1H101J	C CAPACITOR	100pF 50V J		C694	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C591	CC73GCH1H181J	C CAPACITOR	180pF 50V J		C695	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C601	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C696	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C602	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C698	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C603	CC73GCH1H100B	C CAPACITOR	10pF 50V B		C700	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C604	CK73GB1E105K	C CAPACITOR	1uF 25V K		C701	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C605	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C702	CC73GCH1H020B	C CAPACITOR	2pF 50V B	
C607	CC73GCH1H101J	C CAPACITOR	100pF 50V J		C704	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C608	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C705	CE32CL1C470M	E CAPACITOR	47uF 16V M	
C609	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C706	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C610	CK73GB1E105K	C CAPACITOR	1uF 25V K		C707	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C611	CK73GB1E105K	C CAPACITOR	1uF 25V K		C708	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C612	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C709	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C613	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C710	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C614	CK73GB1E105K	C CAPACITOR	1uF 25V K		C711	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C615	C93-1875-05	C CAPACITOR	22uF 25V		C713	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C617	CK73GB1E105K	C CAPACITOR	1uF 25V K		C714	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C618	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C715	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C619	CE32CL1C470M	E CAPACITOR	47uF 16V M		C716	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C620	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C717	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C622	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C719	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C623	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C720	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C624	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C721	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C625	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C722	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C627	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C723	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C628	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C724	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C629	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C727	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C630	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C728	CK73GBB1H473K	C CAPACITOR	0.047uF 50V K	
C631	CC73GCH1H060B	C CAPACITOR	6pF 50V B		C729	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C632	CC73GCH1H182J	C CAPACITOR	1800pF 50V J		C730	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C633	CC73GCH1H152J	C CAPACITOR	1500pF 50V J		C731	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C634	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C732	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C734	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C735	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C737	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C738	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C739	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C740	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C741	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C743	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C744	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C745	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C746	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C748	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C749	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C750	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C751	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C752	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C753	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C758	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C759	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C760	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C761	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C762	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C764	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C802	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C803	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C804	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C805	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C806	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C807	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C808	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C809	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C811	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C812	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C813	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C814	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C815	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C816	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C817	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C821	CC73GCH1H070B	C CAPACITOR	7pF 50V B	
C822	CC73GCH1H050B	C CAPACITOR	5pF 50V B	
C823	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C824	CC73GCH1H090B	C CAPACITOR	9pF 50V B	
C825	CC73GCH1H010B	C CAPACITOR	1pF 50V B	
C830	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C831	CC73GCH1H070B	C CAPACITOR	7pF 50V B	
C832	CC73GCH1H050B	C CAPACITOR	5pF 50V B	
C834	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C835	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C836	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C837	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C838	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C839	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C840	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C842	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C843	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C844	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C845	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C846	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C847	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C848	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C849	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C851	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C852	CC73GCH1H120G	C CAPACITOR	12pF 50V G	
C853	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C854	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C855	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C856	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C857	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C858	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C859	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C860	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C861	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C862	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C863	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C864	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C865	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C866	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C867	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C868	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C869	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C870	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C871	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C872	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C875	CC73GCH1H080B	C CAPACITOR	8pF 50V B	
C877	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C879	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C882	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C884	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C885	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C886	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C888	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C889	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C891	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C892	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C893	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C894	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C895	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C896	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C897	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C900	CC73GCH1H560G	C CAPACITOR	56pF 50V G	
C902	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	
C903	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C904	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C905	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C906	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C907	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	
C908	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C909	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C910	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C914	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C915	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C917	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C918	CC73GCH1H680G	C CAPACITOR	68pF 50V G	
C919	CC73GCH1H181J	C CAPACITOR	180pF 50V J	
C921	CC73GCH1H122J	C CAPACITOR	1200pF 50V J	
C924	CC73GCH1H270G	C CAPACITOR	27pF 50V G	
C925	CC73GCH1H390G	C CAPACITOR	39pF 50V G	
C926	CC73GCH1H220G	C CAPACITOR	22pF 50V G	890SE
C927	CC73GCH1H150G	C CAPACITOR	15pF 50V G	890SE
C928	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C929	CC73GCH1H270G	C CAPACITOR	27pF 50V G	
C930	CC73GCH1H150G	C CAPACITOR	15pF 50V G	890SE
C931	CC73GCH1H150G	C CAPACITOR	15pF 50V G	890SE
C1001	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1002	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1003	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C1004	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1005	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1007	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1008	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	
C1009	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1010	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C1011	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C1012	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1013	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1014	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1015	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1016	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1017	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1018	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1019	CE32CL1V4R7M	E CAPACITOR	4.7uF 35V M	
C1020	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C1021	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1022	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1023	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	
C1024	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1025	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1027	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1028	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1029	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1030	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1031	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1032	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1033	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C1034	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1035	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1036	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C1241	CC73GCH1H030B	C CAPACITOR	3pF 50V B	
C1037	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C1242	CC73GCH1H4R5B	C CAPACITOR	4.5pF 50V B	890SE
C1101	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1243	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1102	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1244	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C1103	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C1249	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1104	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C1250	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C1105	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C1252	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	
C1106	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C1253	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C1108	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C1254	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1109	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C1255	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1111	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1256	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C1112	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1257	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1113	CE32CL1V4R7M	E CAPACITOR	4.7uF 35V M		C1259	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1114	CC73GCH1H330G	C CAPACITOR	33pF 50V G		C1261	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1115	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C1263	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1116	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C1264	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1117	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C1266	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1118	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1267	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1120	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C1268	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C1121	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C1269	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1122	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE	C1270	CC73GCH1H820J	C CAPACITOR	82pF 50V J	
C1123	CC73GCH1H050B	C CAPACITOR	5pF 50V B		C1271	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1124	CC73GCH1H390G	C CAPACITOR	39pF 50V G		C1272	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1126	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1273	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1128	CC73GCH1H121J	C CAPACITOR	120pF 50V J		C1274	CC73GCH1H050B	C CAPACITOR	5pF 50V B	
C1129	CC73GCH1H680G	C CAPACITOR	68pF 50V G		C1276	CC73GCH1H820J	C CAPACITOR	82pF 50V J	
C1130	CC73GCH1H121J	C CAPACITOR	120pF 50V J	890SE	C1277	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1131	CC73GCH1H470G	C CAPACITOR	47pF 50V G		C1281	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1132	CC73GCH1H390G	C CAPACITOR	39pF 50V G		C1282	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1133	CC73GCH1H330G	C CAPACITOR	33pF 50V G	890SE	C1283	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1134	CC73GCH1H100B	C CAPACITOR	10pF 50V B		C1284	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1135	CC73GCH1H680G	C CAPACITOR	68pF 50V G		C1285	CC73GCH1H121J	C CAPACITOR	120pF 50V J	
C1136	CC73GCH1H050B	C CAPACITOR	5pF 50V B		C1286	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C1138	CC73GCH1H270G	C CAPACITOR	27pF 50V G		C1287	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C1139	CC73GCH1H270G	C CAPACITOR	27pF 50V G	890SE	C1288	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1142	CC73GCH1H390G	C CAPACITOR	39pF 50V G		C1289	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1143	CC73GCH1H330G	C CAPACITOR	33pF 50V G	890SE	C1290	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1145	CC73GCH1H390G	C CAPACITOR	39pF 50V G		C1292	CC73GCH1H120G	C CAPACITOR	12pF 50V G	890SE
C1147	CC73GCH1H680G	C CAPACITOR	68pF 50V G		C1295	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C1148	CC73GCH1H121J	C CAPACITOR	120pF 50V J	890SE	C1296	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1151	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C1300	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1152	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE	TC201	C0F-0010-00	TRIM CAPACITOR		890SE
C1153	CE32CL1V4R7M	E CAPACITOR	4.7uF 35V M		TC202	C0F-0010-00	TRIM CAPACITOR		890SE
C1154	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		TC203	C0F-0010-00	TRIM CAPACITOR		
C1155	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		TC204	C0F-0010-00	TRIM CAPACITOR		
C1156	CC73GCH1H100B	C CAPACITOR	10pF 50V B		TC601	C0F-0010-00	TRIM CAPACITOR		
C1157	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		TC602	C0F-0010-00	TRIM CAPACITOR		
C1159	CC73GCH1H100B	C CAPACITOR	10pF 50V B		TC1101	C0F-0010-00	TRIM CAPACITOR		
C1201	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		TC1102	C0F-0010-00	TRIM CAPACITOR		890SE
C1202	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		TC1103	C0F-0010-00	TRIM CAPACITOR		
C1203	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		TC1104	C0F-0010-00	TRIM CAPACITOR		890SE
C1204	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		TC1105	C0F-0010-00	TRIM CAPACITOR		
C1205	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		TC1106	C0F-0010-00	TRIM CAPACITOR		890SE
C1206	CC73GCH1H102J	C CAPACITOR	1000pF 50V J						
C1207	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		R5	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C1208	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		R6	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1209	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R7	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C1210	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R8	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1211	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R9	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1213	CC73GCH1H390G	C CAPACITOR	39pF 50V G		R10	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1216	CC73GCH1H471J	C CAPACITOR	470pF 50V J		R11	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1219	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R12	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1220	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R13	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1222	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R15	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1223	CK73GB1E105K	C CAPACITOR	1uF 25V K		R16	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1224	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		R17	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1225	CC73GCH1H102J	C CAPACITOR	1000pF 50V J		R18	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1226	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R19	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1228	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R20	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1229	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R21	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1230	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE	R22	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1232	CC73GCH1H150G	C CAPACITOR	15pF 50V G	890SE	R23	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1233	CC73GCH1H090B	C CAPACITOR	9pF 50V B		R24	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1234	CC73GCH1H060B	C CAPACITOR	6pF 50V B	890SE	R25	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1235	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R26	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1236	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE	R27	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1237	CC73GCH1H030B	C CAPACITOR	3pF 50V B		R28	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
C1238	CC73GCH1H4R5B	C CAPACITOR	4.5pF 50V B	890SE	R29	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R30	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R32	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R33	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R34	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R35	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R36	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R37	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R38	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R39	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R40	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R41	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R42	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R44	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R45	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R46	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R47	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R49	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R50	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R51	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R52	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R53	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R55	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R56	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R57	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R58	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R60	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R61	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R62	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R63	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R64	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R65	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R66	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R67	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R68	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R69	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R70	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R71	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R73	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R74	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R75	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R76	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R77	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R78	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R79	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R80	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R81	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R82	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R83	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R84	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R85	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	
R86	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R87	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R88	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R89	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R90	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R91	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	
R92	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R93	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R94	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R95	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R96	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R97	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R98	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R99	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R100	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R102	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R103	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R106	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R107	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R108	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R109	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R110	RK73GB2A392J	MG RESISTOR	3.9kΩ 1/10W J	
R111	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R112	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R113	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	
R114	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R115	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R117	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R118	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R119	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R120	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	
R121	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	
R122	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R123	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R124	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	
R125	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R126	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	
R127	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R128	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R129	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R130	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R132	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R134	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R135	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R136	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R137	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R202	RK73FB2B104J	MG RESISTOR	100kΩ 1/8W J	
R205	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R206	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R207	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R208	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R209	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R210	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	
R211	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R212	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	
R213	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	
R214	RK73EB2E470J	MG RESISTOR	47Ω 1/4W J	
R215	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	
R216	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R217	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R218	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R219	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R220	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R221	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R222	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R223	RK73FB2B680J	MG RESISTOR	68Ω 1/8W J	
R224	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R225	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R281	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R282	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R283	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R284	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R286	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R287	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R288	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R301	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R302	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R303	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R304	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R305	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R306	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R307	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R308	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R309	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R310	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R311	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R312	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R313	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R314	RK73EB2E330J	MG RESISTOR	33Ω 1/4W J	
R315	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R316	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R317	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R318	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R319	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R320	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	
R321	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	
R322	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R323	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R324	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R325	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R326	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R327	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	
R328	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R329	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R330	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R604	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R331	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R605	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R332	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R606	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R333	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R608	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R334	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R609	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	
R335	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R612	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	
R336	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R613	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R337	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R614	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	
R338	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R615	RK73FB2B390J	MG RESISTOR	39Ω 1/8W J	
R339	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R616	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R340	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R617	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	
R341	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R618	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R342	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R619	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R343	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R620	RK73EB2E121J	MG RESISTOR	120Ω 1/4W J	
R344	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R621	RK73EB2E121J	MG RESISTOR	120Ω 1/4W J	
R345	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R623	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R346	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R626	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R347	RK73EB2E560J	MG RESISTOR	56Ω 1/4W J		R627	RK73FB2B271J	MG RESISTOR	270Ω 1/8W J	
R348	RK73EB2E560J	MG RESISTOR	56Ω 1/4W J		R628	RK73FB2B271J	MG RESISTOR	270Ω 1/8W J	
R349	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R629	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R350	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R630	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	
R351	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R631	RK73GH2A122D	MG RESISTOR	1.2kΩ 1/10W D	
R352	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R632	RK73GH2A561D	MG RESISTOR	560Ω 1/10W D	
R353	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	890SE	R633	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R354	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	890SE	R634	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	
R355	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R635	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	
R356	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R636	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	
R357	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R638	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R358	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R639	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R359	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R640	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R360	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R641	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R361	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R642	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R362	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J		R643	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R363	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	890SE	R644	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R364	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	890SE	R645	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R365	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	890SE	R646	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R366	RK73FB2B330J	MG RESISTOR	33Ω 1/8W J	890SE	R647	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R367	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R650	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R368	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R651	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R369	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R652	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R370	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J		R653	RK73GB2A180J	MG RESISTOR	18Ω 1/10W J	
R371	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	890SE	R654	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R372	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	890SE	R655	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R389	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J		R656	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R390	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J		R657	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R391	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J		R658	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R392	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	890SE	R660	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R393	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	890SE	R661	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	
R394	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	890SE	R663	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R395	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	890SE	R665	RK73GB2A392J	MG RESISTOR	3.9kΩ 1/10W J	
R396	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R666	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R397	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R667	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	
R551	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R668	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R552	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R669	RK73GB2A8R2J	MG RESISTOR	8.2Ω 1/10W J	
R553	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R670	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	
R554	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R672	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R555	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R673	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R556	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R674	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R557	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R680	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R558	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R681	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R559	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R704	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R560	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R705	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R561	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R706	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R562	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R707	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R563	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R709	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R564	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R710	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R565	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R711	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R566	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R712	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R567	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R713	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R568	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R714	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R569	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R716	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R570	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R717	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R571	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R718	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R572	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R719	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R573	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R574	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R722	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R601	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J		R723	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R602	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J		R724	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R726	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R727	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R728	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R729	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R730	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	
R731	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	
R732	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R733	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R734	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R735	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R736	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R737	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R738	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R739	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	
R740	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R741	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R743	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R744	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	
R745	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R747	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	
R748	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	
R749	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R750	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	
R751	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	
R752	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	
R753	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	
R801	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	890SK
R804	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	890SE
R808	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R809	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R810	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R812	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R814	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R816	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R817	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R821	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R822	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R823	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R824	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R828	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R829	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R830	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R831	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R832	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R833	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R834	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R835	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R836	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	
R837	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	
R838	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R839	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R840	RK73GB2A561J	MG RESISTOR	560Ω 1/10W J	
R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R842	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R843	RK73GB2A563J	MG RESISTOR	56kΩ 1/10W J	
R845	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R846	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R847	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R848	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R849	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R850	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R851	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R853	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R854	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R857	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R858	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R859	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R860	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	
R861	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R863	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	
R864	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R866	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R867	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	
R868	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R871	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R873	RK73GB2A270J	MG RESISTOR	27Ω 1/10W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R874	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R877	RK73GB2A561J	MG RESISTOR	560Ω 1/10W J	
R878	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R879	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	
R881	RK73GB2A8R2J	MG RESISTOR	8.2Ω 1/10W J	
R882	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R883	RK73GB2A8R2J	MG RESISTOR	8.2Ω 1/10W J	
R884	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R886	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R887	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R888	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R891	RK73GB2A180J	MG RESISTOR	18Ω 1/10W J	
R892	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R894	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R895	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R900	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R901	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R903	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R904	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R905	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R906	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R907	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R908	RK73GB2A563J	MG RESISTOR	56kΩ 1/10W J	
R909	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R911	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R912	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R913	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R920	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R1001	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
R1002	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1004	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	
R1005	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R1006	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	
R1007	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1008	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1009	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	
R1010	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R1011	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R1012	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1013	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1014	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1015	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	
R1016	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1017	RK73GB2A823J	MG RESISTOR	82kΩ 1/10W J	
R1018	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1019	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J	
R1020	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1021	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1022	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1023	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1024	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1025	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	
R1026	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R1027	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R1028	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1029	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	
R1030	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R1031	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1032	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	
R1033	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1034	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R1035	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R1036	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1037	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R1038	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R1039	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1040	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1041	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R1042	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R1043	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1044	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R1046	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1048	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R1049	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1050	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1053	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R1054	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R1055	RK73GB2A274J	MG RESISTOR	270kΩ 1/10W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1057	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J		R1219	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J	
R1058	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		R1220	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J	
R1059	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J		R1221	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1060	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J		R1223	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1062	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R1224	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1063	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R1227	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R1064	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R1228	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R1066	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R1231	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1067	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1232	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R1068	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1233	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1069	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1234	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1070	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1235	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R1071	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J		R1236	RK73GB2A184J	MG RESISTOR	180kΩ 1/10W J	
R1072	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1237	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R1073	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J		R1238	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
R1074	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1239	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1075	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J		R1242	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1076	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J		R1243	RK73GB2A680J	MG RESISTOR	68Ω 1/10W J	890SE
R1077	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J		R1244	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R1078	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J		R1245	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	890SE
R1079	RK73GB2A394J	MG RESISTOR	390kΩ 1/10W J		R1246	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1080	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1247	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	890SE
R1081	RK73GB2A184J	MG RESISTOR	180kΩ 1/10W J		R1250	RK73GB2A180J	MG RESISTOR	18Ω 1/10W J	
R1082	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J		R1251	RK73GB2A180J	MG RESISTOR	18Ω 1/10W J	890SE
R1083	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R1252	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1084	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R1254	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	
R1101	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J		R1255	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	
R1102	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J		R1256	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	
R1103	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J		R1257	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1104	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1258	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1105	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1259	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R1106	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1260	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1107	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J		R1261	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R1108	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1262	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R1109	RK73GB2A6R8J	MG RESISTOR	6.8Ω 1/10W J		R1264	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1110	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J		R1265	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	
R1111	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J		R1267	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R1112	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J		R1268	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R1113	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J		R1269	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1114	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R1272	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	
R1115	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J		R1273	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R1116	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R1275	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1117	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J		R1277	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1118	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J		R1278	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1119	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R1280	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R1120	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	890SE	R1281	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R1121	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R1282	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R1122	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	890SE	R1284	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R1123	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1285	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1124	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R1286	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1125	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	890SE	R1287	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R1126	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J		R1288	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R1127	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R1289	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R1128	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		R1290	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1129	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1291	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R1130	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	890SE	R1293	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R1131	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1294	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R1132	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J		R1295	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R1133	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R1296	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R1134	RK73GB2A180J	MG RESISTOR	18Ω 1/10W J		R1297	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R1135	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J		R1298	RK73GB2A561J	MG RESISTOR	560Ω 1/10W J	
R1136	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J		R1299	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R1201	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J		R1300	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R1202	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R1301	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R1203	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		R1302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R1204	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J		R1303	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	890SE
R1205	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J		R1304	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	
R1206	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J		R1305	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R1207	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J		R1306	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	
R1208	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J		R1307	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J	
R1209	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J		R1308	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R1210	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J						
R1213	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J		L1	LR73Z0AE100J	CHIP INDUCTOR		
R1214	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		L2	LR73Z0AE100J	CHIP INDUCTOR		
R1215	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		L3	LR79Z0PM100M	CHIP INDUCTOR		
R1216	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J		L4	L33-1557-05	CHOKE COIL		
R1217	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		L5	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	
R1218	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J		L6	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	

△ Symbol No.	Part No.	Part Name	Description	Local
L7	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	
L8	LB73G0AM-004	CHIP FERRITE		
L9	LB73G0AM-004	CHIP FERRITE		
L10	LR77Z0AA101J	CHIP INDUCTOR	100uH	
L11	LR77Z0AA101J	CHIP INDUCTOR	100uH	
L12	LB73G0AM-004	CHIP FERRITE		
L13	LR73Z0AE1R0J	CHIP INDUCTOR		
L14	LR73Z0AE101J	CHIP INDUCTOR		
L15	LB73G0AM-004	CHIP FERRITE		
L16	LR73Z0AE101J	CHIP INDUCTOR		
L17	LB73G0AM-004	CHIP FERRITE		
L18	LR73Z0AE1R2J	CHIP INDUCTOR		
L201	LR73Z0AE101J	CHIP INDUCTOR		
L202	LR73Z0AE101J	CHIP INDUCTOR		
L203	LR73Z0AE101J	CHIP INDUCTOR		
L204	LR73Z0AE101J	CHIP INDUCTOR		
L205	L39-1594-05	TOROIDAL COIL		
L206	LR73Z0AE101J	CHIP INDUCTOR		
L207	LR73Z0AE101J	CHIP INDUCTOR		
L208	L34-4616-05	AIR CORE COIL		890SK
L208	L34-4614-05	AIR CORE COIL		890SE
L209	L34-4616-05	AIR CORE COIL		890SK
L209	L34-4614-05	AIR CORE COIL		890SE
L210	LR73Z0AE100J	CHIP INDUCTOR		
L211	L34-4616-05	AIR CORE COIL		890SK
L211	L34-4614-05	AIR CORE COIL		890SE
L212	L33-0695-05	CHOKE COIL		
L214	L3E-0048-00	COIL		
L216	L34-4615-05	AIR CORE COIL		
L217	L33-0695-05	CHOKE COIL		
L218	L3E-0048-00	COIL		
L220	L33-0695-05	CHOKE COIL		
L221	L41-5698-64	CHIP INDUCTOR		
L226	L41-6898-64	CHIP INDUCTOR		890SE
L227	L41-6898-64	CHIP INDUCTOR		890SE
L302	L34-4614-05	AIR CORE COIL		
L303	L41-3988-60	CHIP INDUCTOR		
L304	L41-3988-60	CHIP INDUCTOR		
L305	L41-3388-60	CHIP INDUCTOR		
L306	L41-2788-60	CHIP INDUCTOR		
L309	LR79Z0CXR82G	CHIP INDUCTOR		
L310	L41-2288-60	CHIP INDUCTOR		
L311	L41-1888-60	CHIP INDUCTOR		
L312	L41-6898-64	CHIP INDUCTOR		
L313	LR79Z0CXR75G	CHIP INDUCTOR		
L314	L34-4615-05	AIR CORE COIL		
L315	L34-4615-05	AIR CORE COIL		
L316	L41-6898-64	CHIP INDUCTOR		
L317	L41-5688-60	CHIP INDUCTOR		
L318	L41-3988-60	CHIP INDUCTOR		
L319	L41-3988-60	CHIP INDUCTOR		
L320	L34-4615-05	AIR CORE COIL		
L321	L34-4616-05	AIR CORE COIL		
L322	L41-2288-60	CHIP INDUCTOR		
L323	L41-1098-60	CHIP INDUCTOR		
L324	L41-1505-08	CHIP INDUCTOR		
L325	L41-4798-60	CHIP INDUCTOR		
L326	L41-1898-60	CHIP INDUCTOR		
L327	L41-1298-60	CHIP INDUCTOR		
L328	LR79Z0CX3R3G	CHIP INDUCTOR		
L329	L41-2298-60	CHIP INDUCTOR		
L330	L41-1898-60	CHIP INDUCTOR		
L331	L41-1898-60	CHIP INDUCTOR		
L332	L41-1598-60	CHIP INDUCTOR		
L333	L33-0695-05	CHOKE COIL		
L334	L41-4798-60	CHIP INDUCTOR		
L335	L41-4798-60	CHIP INDUCTOR		
L336	LR79Z0CX3R3G	CHIP INDUCTOR		
L337	L41-6888-60	CHIP INDUCTOR		
L338	L41-1298-60	CHIP INDUCTOR		
L339	L41-1505-08	CHIP INDUCTOR		
L340	L33-0695-05	CHOKE COIL		
L341	L41-4788-60	CHIP INDUCTOR		
L342	L41-3988-60	CHIP INDUCTOR		
L343	L41-3988-60	CHIP INDUCTOR		
L344	L34-4616-05	AIR CORE COIL		
L345	L34-4616-05	AIR CORE COIL		
L348	L41-4798-60	CHIP INDUCTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
L349	L41-1898-60	CHIP INDUCTOR		
L350	L41-1298-60	CHIP INDUCTOR		
L351	L34-4615-05	AIR CORE COIL		
L352	L34-4614-05	AIR CORE COIL		
L353	L33-0695-05	CHOKE COIL		
L354	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L355	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L356	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L357	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L358	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	890SE
L359	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	890SE
L360	L41-3978-60	CHIP INDUCTOR		
L361	L41-3378-60	CHIP INDUCTOR		
L362	L41-1288-60	CHIP INDUCTOR		
L363	L34-4614-05	AIR CORE COIL		
L364	LR79Z0CM28NG	CHIP INDUCTOR	28nH	
L365	L34-4614-05	AIR CORE COIL		
L366	L41-3978-60	CHIP INDUCTOR		
L367	L41-3378-60	CHIP INDUCTOR		
L368	L34-4614-05	AIR CORE COIL		
L370	L34-4613-05	AIR CORE COIL		890SE
L371	L34-4612-05	AIR CORE COIL		890SE
L372	L41-3978-60	CHIP INDUCTOR		
L373	L41-3378-60	CHIP INDUCTOR		
L374	L34-4610-15	AIR CORE COIL		
L376	LR79Z0CM22NG	CHIP INDUCTOR	22nH	890SE
L377	LR79Z0CM17N5G	CHIP INDUCTOR		890SE
L378	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L379	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L380	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L381	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L382	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	890SE
L383	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	890SE
L384	L41-3978-60	CHIP INDUCTOR		
L385	L41-3378-60	CHIP INDUCTOR		
L386	L34-4614-05	AIR CORE COIL		
L388	L34-4613-05	AIR CORE COIL		890SE
L389	L34-4612-05	AIR CORE COIL		890SE
L390	LR79Z0CX3R3G	CHIP INDUCTOR		
L601	L33-0695-05	CHOKE COIL		
L602	L41-6878-60	CHIP INDUCTOR		
L603	L39-1556-05	TOROIDAL COIL		
L604	L33-0695-05	CHOKE COIL		
L605	LR73Z0AE100J	CHIP INDUCTOR		
L606	L41-1588-60	CHIP INDUCTOR		
L607	L33-0695-05	CHOKE COIL		
L608	L3E-0048-00	COIL		
L609	L34-4615-05	AIR CORE COIL		
L610	L3E-0048-00	COIL		
L611	L39-1554-15	TOROIDAL COIL		
L612	LR73Z0AE100J	CHIP INDUCTOR		
L613	LR73Z0AE101J	CHIP INDUCTOR		
L614	L39-1554-15	TOROIDAL COIL		
L615	L39-1554-15	TOROIDAL COIL		
L617	L41-1898-60	CHIP INDUCTOR		
L618	L41-5688-60	CHIP INDUCTOR		
L620	LR79Z0CXR82G	CHIP INDUCTOR		
L621	LR79Z0CXR82G	CHIP INDUCTOR		
L622	LR79Z0CXR82G	CHIP INDUCTOR		
L623	LR79Z0CXR82G	CHIP INDUCTOR		
L625	LR73Z0AE101J	CHIP INDUCTOR		
L626	LR73Z0AE101J	CHIP INDUCTOR		
L627	LR73Z0AE8R2J	CHIP INDUCTOR		
L634	LK73G0AQ8R2K	M.CHIP INDUCTOR		
L635	LR73Z0AE101J	CHIP INDUCTOR		
L636	LR73Z0AE101J	CHIP INDUCTOR		
L637	LR73Z0AE101J	CHIP INDUCTOR		
L638	L41-1298-60	CHIP INDUCTOR		
L639	LR73Z0AE101J	CHIP INDUCTOR		
L640	LR73Z0AE101J	CHIP INDUCTOR		
L641	L41-1298-60	CHIP INDUCTOR		
L643	LR73Z0AE101J	CHIP INDUCTOR		
L644	LR73Z0AE101J	CHIP INDUCTOR		
L645	LR73Z0AE101J	CHIP INDUCTOR		
L701	LR73Z0AER12J	CHIP INDUCTOR		
L702	L41-1005-44	CHIP INDUCTOR		
L703	LR73Z0AE4R7J	CHIP INDUCTOR		
L704	LR73Z0AER22J	CHIP INDUCTOR		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
L705	LR73Z0AE470J	CHIP INDUCTOR			L1284	LR73Z0AE100J	CHIP INDUCTOR		
L706	L1D-0009-00	ADJUST TRANS			CN1	EC710AJ-1013A	FFC FPC CONNE		
L707	LR73Z0AE470J	CHIP INDUCTOR			CN2	EC710AM-0530A	FFC FPC CONNE		
L708	L1D-0009-00	ADJUST TRANS			CN3	EC710AM-0560A	FFC FPC CONNE		
L709	L1D-0009-00	ADJUST TRANS			CN4	E40-6531-05	PIN ASSY		
L710	L3K-0069-00	TOROIDAL COIL			CN201	E04-0491-05	PIN SOCKET		
L711	L3K-0069-00	TOROIDAL COIL			CN301	E40-5487-05	PIN ASSY		
L712	LR73Z0AE101J	CHIP INDUCTOR			CN302	E40-5487-05	PIN ASSY		
L801	LR73Z0AE101J	CHIP INDUCTOR			CN601	E40-6852-05	PIN ASSY		
L802	LR73Z0AE101J	CHIP INDUCTOR			CN602	E04-0491-05	PIN SOCKET		
L803	LR73Z0AE101J	CHIP INDUCTOR			CN603	E04-0491-05	PIN SOCKET		
L804	LR73Z0AE101J	CHIP INDUCTOR			CN701	E04-0491-05	PIN SOCKET		
L805	LR73Z0AE101J	CHIP INDUCTOR			CN702	E04-0491-05	PIN SOCKET		
L806	LR73Z0AE5R6J	CHIP INDUCTOR			CN806	E04-0491-05	PIN SOCKET		
L807	LR73Z0AE6R8J	CHIP INDUCTOR			CN807	E40-6527-05	PIN ASSY		
L808	LR73Z0AE8R2J	CHIP INDUCTOR			CN811	E6J-0016-00	SOCKET		
L812	LK73G0AQ5R6K	M.CHIP INDUCTOR	6.8uH		CN812	E6J-0016-00	SOCKET		
L814	LK73G0AQ6R8K	M.CHIP INDUCTOR			CN813	E6J-0016-00	SOCKET		
L816	LK73G0AQ8R2K	M.CHIP INDUCTOR			CN814	E6J-0016-00	SOCKET		
L818	LR73Z0AE101J	CHIP INDUCTOR			CN815	E6J-0016-00	SOCKET		
L819	LR73Z0AE101J	CHIP INDUCTOR			CN816	E6J-0016-00	SOCKET		
L820	LR73Z0AE101J	CHIP INDUCTOR			CN1101	E04-0491-05	PIN SOCKET		
L821	LR73Z0AE101J	CHIP INDUCTOR			CN1203	E04-0491-05	PIN SOCKET		
L822	LR73Z0AE101J	CHIP INDUCTOR			F1	F53-0371-05	FUSE		
L823	LR73Z0AE101J	CHIP INDUCTOR			F201	F53-0363-05	FUSE		
L824	LR73Z0AE4R7J	CHIP INDUCTOR			F601	F53-0363-05	FUSE		
L825	LR73Z0AE101J	CHIP INDUCTOR			J1	E11-0705-15	PHONE JACK		
L828	L39-1597-05	TOROIDAL COIL			J2	E11-0455-15	3.5D PHONE JACK		
L829	LR73Z0AE100J	CHIP INDUCTOR			J3	E06-0752-15	DIN SOCKET		
L830	LR73Z0AE101J	CHIP INDUCTOR			J4	E56-0408-15	DIN SOCKET		
L831	LR73Z0AE101J	CHIP INDUCTOR			J5	E11-0455-15	3.5D PHONE JACK		
L832	L39-1598-05	TOROIDAL COIL			J201	E13-0166-25	PIN JACK		
L834	LR73Z0AE101J	CHIP INDUCTOR			J202	E13-0166-25	PIN JACK		
L836	L39-1255-15	TOROIDAL COIL			J203	E13-0166-25	PIN JACK		
L837	LR73Z0AE100J	CHIP INDUCTOR			J1101	E13-0166-25	PIN JACK		
L838	LR73Z0AE101J	CHIP INDUCTOR			K1	S51-1420-05	RELAY		
L839	LR73Z0AE100J	CHIP INDUCTOR			K201	S76-0424-05	RELAY		
L1103	LR73Z0AE470J	CHIP INDUCTOR			K202	S76-0483-05	RELAY		
L1104	L3K-0069-00	TOROIDAL COIL			K203	S76-0483-05	RELAY		
L1106	LR73Z0AE101J	CHIP INDUCTOR			K204	S76-0424-05	RELAY		
L1107	LR73Z0AE101J	CHIP INDUCTOR			K205	S76-0483-05	RELAY		
L1108	LR73Z0AE101J	CHIP INDUCTOR		890SE	K206	S76-0483-05	RELAY		
L1109	LR79Z0MW47NG	CHIP INDUCTOR			K601	S76-0483-05	RELAY		
L1110	LR79Z0MW68NG	CHIP INDUCTOR			OT1	E18-0254-05	SOCKET		
L1111	LR79Z0MWR27G	CHIP INDUCTOR			OT2	-----	SHIELDING CASE		
L1112	LR79Z0MWR15G	CHIP INDUCTOR		890SE	TH803	157-102-65001	N THERMISTOR		
L1113	LR79Z0MW1R5J	CHIP INDUCTOR			TH1261	157-102-65001	N THERMISTOR		
L1114	LR79Z0MW1R5J	CHIP INDUCTOR		890SE	XF601	L7B-0032-00	MCF		
L1115	LR79Z0MWR27G	CHIP INDUCTOR			XF801	L7B-0031-00	MCF		
L1116	LR79Z0MWR15G	CHIP INDUCTOR		890SE	XF802	L7B-0032-00	MCF		
L1117	LR79Z0MW1R5J	CHIP INDUCTOR			XF803	L7B-0029-00	CRYSTAL FILTER		
L1118	LR79Z0MW1R5J	CHIP INDUCTOR		890SE	XF804	L7B-0030-00	CRYSTAL FILTER		
L1119	LR79Z0MWR27G	CHIP INDUCTOR			XF1201	L7B-0044-00	MCF		
L1120	LR79Z0MWR15G	CHIP INDUCTOR		890SE	XF1202	L7B-0045-00	MCF		890SE
L1121	LR73Z0AE101J	CHIP INDUCTOR							
L1122	LR73Z0AE101J	CHIP INDUCTOR		890SE					
L1123	L33-0695-05	CHOKE COIL							
L1200	LR79Z0JG39NG	CHIP INDUCTOR							
L1201	L3K-0069-00	TOROIDAL COIL							
L1202	LR73Z0AE101J	CHIP INDUCTOR							
L1203	L39-1255-15	TOROIDAL COIL							
L1204	L39-1255-15	TOROIDAL COIL							
L1205	LK73G0ASR10J	M.CHIP INDUCTOR	0.1uH						
L1208	LR79Z0MW1R5J	CHIP INDUCTOR							
L1210	LR79Z0MWR33G	CHIP INDUCTOR							
L1212	LR79Z0MW56NG	CHIP INDUCTOR							
L1213	LR79Z0MWR10G	CHIP INDUCTOR		890SE					
L1214	LR79Z0MWR27G	CHIP INDUCTOR							
L1215	LR79Z0MWR47G	CHIP INDUCTOR		890SE					
L1218	LR79Z0MWR27G	CHIP INDUCTOR							
L1220	LR73Z0AE470J	CHIP INDUCTOR							
L1222	LR73Z0AE101J	CHIP INDUCTOR							
L1223	LR73Z0AE101J	CHIP INDUCTOR							
L1224	LR79Z0MWR47G	CHIP INDUCTOR		890SE					
L1225	LR79Z0MWR15G	CHIP INDUCTOR							
L1281	LR73Z0AE470J	CHIP INDUCTOR							
L1282	LR79Z0MW2R2J	CHIP INDUCTOR							
L1283	LR79Z0MW1R0G	CHIP INDUCTOR							

CONTROL UNIT

XC1-270K-01(TS-890S(K))

XC1-270E-01(TS-890S(E))

***Note : This part cannot be replaced. Therefore,
this part is not supplied as a service part.**

Block No. [0][2]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	-----	IC	*Note	
IC2	-----	IC	*Note	
IC3	-----	IC	*Note	
IC4	BU4829FVE	IC		
IC101	F56104VDFKGYA	IC		
IC166	XC6118N31BMRG	IC		
IC167	HD74LV2G34AUS	IC		
IC168	HD74LV2G34AUS	IC		
IC169	TC7WT125FUF	IC		
IC171	R2223T	IC		
IC172	TC7SH17FUJC	IC		
IC181	S25C256A0IJ84	IC		
IC182	TC74VHC4052AK	IC		
IC183	TC74VHC4052AK	IC		
IC184	TC74VHC373FT	IC		
IC185	TC74VHC373FT	IC		
IC186	TC74VHC373FT	IC		
IC187	TC74VHC373FT	IC		
IC188	TC74VHC373FT	IC		
IC189	TC74VHC373FT	IC		
IC401	E29LV32CB70TI	IC		
IC402	TC74VHC373FT	IC		
IC403	TC74VHC373FT	IC		
IC404	TC7WU04FK-F	IC		
IC405	-----	IC	*Note	
IC406	-----	IC	*Note	
IC407	-----	IC	*Note	
IC408	AK4387ET	IC		
IC409	WM8782ASEDSRV	IC		
IC410	BA2115FVM	IC		
IC411	BA2115FVM	IC		
IC412	BA2115FVM	IC		
IC413	-----	IC	*Note	
IC414	TC7SZ04FEJC	IC		
IC415	TC7SZ08FE	IC		
IC701	ADV7125KSTZ50	IC		
IC702	TC7WT126FU-F	IC		
IC703	AD9889BBSTZ80	IC		
IC704	TC74VCX541FK	IC		
IC705	TC74VCX541FK	IC		
IC706	TC74VCX541FK	IC		
IC801	BD6516F	IC		
IC802	-----	IC	*Note	
IC803	-----	IC	*Note	
IC804	-----	IC	*Note	
IC805	-----	IC	*Note	
IC806	PCM2903C	IC		
IC807	TC7SZ08FE	IC		
IC808	TC7SZ08FE	IC		
IC809	-----	IC	*Note	
IC810	BU7295HFV	IC		
IC811	-----	IC	*Note	
IC812	-----	IC	*Note	
IC901	-----	IC	*Note	
IC902	TC7MBL3126CFT	IC		
IC903	TC7MBL3126CFT	IC		
IC951	-----	IC	*Note	
IC952	-----	IC	*Note	
IC1001	-----	IC	*Note	
IC1002	-----	IC	*Note	
IC1003	-----	IC	*Note	
IC1100	F2136ACNFKGZA	IC		
IC1101	ADM3202ARUZ	IC		
IC1200	-----	IC	*Note	
IC1201	E29LV32CB70TI	IC		
IC1202	TC74VHC373FT	IC		
IC1203	TC74VHC373FT	IC		
IC1300	-----	IC	*Note	

△ Symbol No.	Part No.	Part Name	Description	Local
IC1301	E29LV32CB70TI	IC		
IC1302	TC74VHC373FT	IC		
IC1303	TC74VHC373FT	IC		
IC1400	-----	IC	*Note	
IC1401	W25Q16JVSSIQ	IC		
IC1402	TC7WU04FK-F	IC		
IC1403	TC74LCX244FK	IC		
IC1404	-----	IC	*Note	
IC1405	TC7WU04FK-F	IC		
IC1500	TC7WU04FK-F	IC		
IC1501	-----	IC	*Note	
IC1502	-----	IC	*Note	
IC1503	-----	IC	*Note	
IC1600	AK4387ET	IC		
IC1601	PCM4202DB	IC		
IC1602	AK4387ET	IC		
IC1603	AK4396VF	IC		
IC1604	AK4387ET	IC		
IC1605	WM8782ASEDSRV	IC		
IC1606	AK4387ET	IC		
IC1607	BA2115FVM	IC		
IC1608	BA2115FVM	IC		
IC1609	BA2115FVM	IC		
IC1610	BA2115FVM	IC		
IC1611	NJM2732V	IC		
IC1612	NJM2732V	IC		
IC1613	NJM2732V	IC		
IC1614	BA4580RFVM	IC		
IC1615	BA4580RFVM	IC		
IC1616	LA4425A-E	IC		
IC1617	BA2115FVM	IC		
IC1618	BH2227FV	IC		
IC1619	NJM2172V-ZB	IC		
IC1620	NJM2732V	IC		
IC1621	NJM2732V	IC		
IC1622	NJM2768BM-ZB	IC		
IC1623	NJM2732V	IC		
IC1624	NJM2732V	IC		
IC1625	BA2115FVM	IC		
IC1626	BA2115FVM	IC		
IC1627	BA2115FVM	IC		
IC1628	BA2115FVM	IC		
IC1629	BA4580RFVM	IC		
IC1630	TC74VHC4052AK	IC		
Q401	SSM3K15AMFVF	FET		
Q402	SSM3J36TU	FET		
Q403	LTC043TEBFS8	DIGI TRANSISTOR		
Q701	TPC6111-F	FET		
Q702	LTC043TEBFS8	DIGI TRANSISTOR		
Q801	LTC014EEBFS8	DIGI TRANSISTOR		
Q802	LTC014EEBFS8	DIGI TRANSISTOR		
Q803	LTC014EEBFS8	DIGI TRANSISTOR		
Q804	RE1C001ZP	FET		
Q805	RE1C001ZP	FET		
Q806	RE1C001ZP	FET		
Q807	LTC014EEBFS8	DIGI TRANSISTOR		
Q808	TPC6111-F	FET		
Q809	RE1C001ZP	FET		
Q810	LTC014EEBFS8	DIGI TRANSISTOR		
Q901	TPC6111-F	FET		
Q902	LTC014EEBFS8	DIGI TRANSISTOR		
Q903	LTC043TEBFS8	DIGI TRANSISTOR		
Q904	LTC014EEBFS8	DIGI TRANSISTOR		
Q951	TPC6111-F	FET		
Q952	LTC043TEBFS8	DIGI TRANSISTOR		
Q953	TPC6111-F	FET		
Q954	LTC043TEBFS8	DIGI TRANSISTOR		
Q955	TPC6111-F	FET		
Q956	LTC043TEBFS8	DIGI TRANSISTOR		
Q1001	TPC6111-F	FET		
Q1002	LTC014EEBFS8	DIGI TRANSISTOR		
Q1100	RE1C001ZP	FET		
Q1101	EMD12	TRANSISTOR		
Q1102	LTC014EEBFS8	DIGI TRANSISTOR		
Q1103	SSM3J36TU	FET		
Q1104	LTC043TEBFS8	DIGI TRANSISTOR		
Q1500	2SC5551AF	TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q1501	LTC043ZEBFS8	DIGI TRANSISTOR			C10	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
Q1502	LTA043EEBFS8	DIGI TRANSISTOR			C11	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
Q1504	LTC043ZEBFS8	DIGI TRANSISTOR			C12	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
Q1505	LTA043EEBFS8	DIGI TRANSISTOR			C13	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
Q1507	LTC043ZEBFS8	DIGI TRANSISTOR			C14	CK73EBB1H474K	C CAPACITOR	0.47uF 50V K	
Q1508	LTC043ZEBFS8	DIGI TRANSISTOR			C16	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
Q1509	LTC043ZEBFS8	DIGI TRANSISTOR			C17	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
Q1510	LTC043ZEBFS8	DIGI TRANSISTOR			C18	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
Q1511	2SC5551AF	TRANSISTOR			C19	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
Q1512	2SC5108F/Y/	TRANSISTOR			C20	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
Q1600	2SC5566-E	TRANSISTOR			C21	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
Q1601	2SB1694	TRANSISTOR			C22	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
Q1602	LTC043ZEBFS8	DIGI TRANSISTOR			C23	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
Q1604	2SB1694	TRANSISTOR			C24	CK73FB1C106K	C CAPACITOR	10uF 16V K	
Q1605	LTC043ZEBFS8	DIGI TRANSISTOR			C25	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
Q1606	LTA043ZEBFS8	DIGI TRANSISTOR			C26	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
Q1607	LTC043ZEBFS8	DIGI TRANSISTOR			C27	CK73GB1E105K	C CAPACITOR	1uF 25V K	
Q1608	LTA043ZEBFS8	DIGI TRANSISTOR			C28	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
Q1609	LTC043ZEBFS8	DIGI TRANSISTOR			C29	CE32BQJ221M	E CAPACITOR	220uF 6.3V M	
D1	RB080LAM-30	SCHOTTKY DIODE			C30	CE32BQJ221M	E CAPACITOR	220uF 6.3V M	
D2	RR1LAM4S	DIODE			C31	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D3	EDZV6.2B	ZENER DIODE			C32	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D101	RB531SM-30	DIODE			C33	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D102	RB531SM-30	DIODE			C34	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D103	RB531SM-30	DIODE			C35	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D104	RB520SM-30	DIODE			C36	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D171	RB520SM-30	DIODE			C37	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D401	RB531SM-30	DIODE			C38	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D701	1SS226-F	DIODE			C39	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D702	1SS226-F	DIODE			C40	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D703	1SS226-F	DIODE			C41	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D704	LXES15AAA1133	VARISTOR			C42	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D705	LXES15AAA1133	VARISTOR			C43	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D706	LXES15AAA1133	VARISTOR			C44	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D707	LXES15AAA1133	VARISTOR			C45	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D708	LXES15AAA1133	VARISTOR			C46	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D709	LXES15AAA1133	VARISTOR			C47	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D710	LXES15AAA1133	VARISTOR			C48	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D711	LXES15AAA1133	VARISTOR			C49	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D712	LXES15AAA1133	VARISTOR			C63	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D713	LXES15AAA1133	VARISTOR			C64	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D801	LXES15AAA1133	VARISTOR			C65	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D802	LXES15AAA1133	VARISTOR			C66	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D901	LXES15AAA1133	VARISTOR			C67	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D902	LXES15AAA1133	VARISTOR			C68	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D903	LXES15AAA1133	VARISTOR			C69	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D904	LXES15AAA1133	VARISTOR			C70	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D905	LXES15AAA1133	VARISTOR			C71	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
D906	LXES15AAA1133	VARISTOR			C72	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D907	LXES15AAA1133	VARISTOR			C73	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D908	LXES15AAA1133	VARISTOR			C74	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1050	RB531SM-30	DIODE			C75	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1100	RB501VM-40	SCHOTTKY DIODE			C76	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D1500	RN262CS	DIODE			C77	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1501	RN262CS	DIODE			C78	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D1502	RN262CS	DIODE			C79	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1503	RN262CS	DIODE			C80	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D1504	RN142SM	DIODE			C81	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1505	RN142SM	DIODE			C82	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D1506	RN142SM	DIODE			C83	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1507	RN142SM	DIODE			C84	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D1508	RN142SM	DIODE			C85	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
D1509	RN142SM	DIODE			C86	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
D1510	RN142SM	DIODE			C87	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1511	RN142SM	DIODE			C88	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1601	1SS400SM	DIODE			C89	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D1603	1SS400SM	DIODE			C90	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1	CD04BQ1E331M	E CAPACITOR	330uF 25V M		C91	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C2	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C92	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C3	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C93	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C4	CD04BQ1E331M	E CAPACITOR	330uF 25V M		C94	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C5	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C95	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C6	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C96	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C7	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C98	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C8	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C100	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C9	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C101	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
					C102	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
					C103	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C486	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C742	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C487	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C743	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C488	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C744	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C489	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C745	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C490	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C746	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C491	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C747	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C492	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C748	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C493	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C749	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C494	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C750	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C495	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C751	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C496	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C752	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C497	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C753	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C498	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C754	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C499	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C755	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C500	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C756	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C501	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C757	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C502	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C758	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C503	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C759	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C504	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C760	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C505	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C761	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C506	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C762	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C507	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C763	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C508	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C764	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C509	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C765	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C510	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C766	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C511	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C767	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C512	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C768	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C513	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C769	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C514	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C770	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C515	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C771	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C516	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C772	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C517	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C773	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C518	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C774	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C519	CC73HCH1H220J	C CAPACITOR	22pF 50V J		C775	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C520	CC73HCH1H220J	C CAPACITOR	22pF 50V J		C801	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C521	CC73HCH1H220J	C CAPACITOR	22pF 50V J		C803	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C522	CC73HCH1H220J	C CAPACITOR	22pF 50V J		C804	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C523	CK73FB1C106K	C CAPACITOR	10uF 16V K		C805	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C524	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C806	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C525	CK73HBB1H222K	C CAPACITOR	2200pF 50V K		C807	C90-6990-05	E CAPACITOR	220uF 10V	
C526	CC73HCH1H331J	C CAPACITOR	330pF 50V J		C808	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C527	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C809	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C528	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C810	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C529	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C811	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C530	CC73HCH1H331J	C CAPACITOR	330pF 50V J		C812	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
C531	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C813	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C532	CK73HBB1H182K	C CAPACITOR	1800pF 50V K		C814	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C533	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C815	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C534	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C816	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C535	CC73HCH1H331J	C CAPACITOR	330pF 50V J		C817	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C536	CK73HBB1H182K	C CAPACITOR	1800pF 50V K		C818	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C537	CK73HBB1H222K	C CAPACITOR	2200pF 50V K		C819	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C538	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C820	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C539	CC73HCH1H331J	C CAPACITOR	330pF 50V J		C821	CC73HCH1H180J	C CAPACITOR	18pF 50V G	
C540	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C822	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C541	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C823	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C542	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C824	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C543	CK73FB1C106K	C CAPACITOR	10uF 16V K		C825	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C544	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C826	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C545	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C827	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C546	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C828	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C547	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C829	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C548	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C830	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C549	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C831	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C550	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C832	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C551	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C833	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C552	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C834	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C553	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C835	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C554	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C836	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C555	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C838	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C556	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C839	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C710	CC73HCH1H030C	C CAPACITOR	3pF 50V C		C840	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C736	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C841	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C737	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C842	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C738	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C843	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C739	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C844	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C740	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C845	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C741	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C846	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C847	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C848	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C849	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C850	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C851	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C852	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C853	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C854	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C855	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C856	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C857	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C858	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C859	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C901	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C902	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C903	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C904	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C905	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C906	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C907	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C908	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C909	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C910	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C911	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C912	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C913	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C914	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C915	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C920	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C921	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C922	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C923	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C924	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	
C954	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C955	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C956	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C957	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C958	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C959	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C960	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C961	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C962	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C963	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C964	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C965	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C966	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1001	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1002	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C1003	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1004	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1005	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C1006	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1007	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1008	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C1009	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1010	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1011	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1012	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1013	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1014	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1015	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1016	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1017	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1050	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1051	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1052	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1053	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1054	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1055	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1056	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1057	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1058	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1059	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1060	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1061	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1062	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1063	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1064	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C1065	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1066	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1067	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1068	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1069	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1070	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1073	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1074	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1075	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1076	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1077	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1078	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1079	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1090	C90-6990-05	E CAPACITOR	220uF 10V	
C1091	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1092	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1093	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1100	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1101	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C1102	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C1103	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1104	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1105	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1106	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1107	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1108	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1109	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1110	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1111	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1112	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1113	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1114	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1115	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1116	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1120	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1150	CE32BQ0J221M	E CAPACITOR	220uF 6.3V M	
C1151	CE32BQ0J221M	E CAPACITOR	220uF 6.3V M	
C1152	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1153	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1154	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1155	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1156	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1157	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1158	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1159	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1160	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1161	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1162	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1163	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1164	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1165	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1166	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1168	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C1169	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1170	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1171	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1172	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1173	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1200	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1201	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1202	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1203	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1204	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1205	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1206	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1207	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1208	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1209	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1210	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1211	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1212	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1213	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1214	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1215	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1216	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1224	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1225	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1226	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C1526	CC73GCH1H820G	C CAPACITOR	82pF 50V G	
C1527	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C1528	CC73GCH1H101G	C CAPACITOR	100pF 50V G	
C1529	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C1530	CC73GCH1H101G	C CAPACITOR	100pF 50V G	
C1531	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C1532	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1533	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1534	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1535	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C1536	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1537	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1538	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C1539	CC73GCH1H101G	C CAPACITOR	100pF 50V G	
C1540	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C1541	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C1542	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C1543	CC73GCH1H101G	C CAPACITOR	100pF 50V G	
C1544	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C1545	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1546	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C1547	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1548	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1549	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C1550	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C1551	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C1552	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C1553	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C1554	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C1555	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C1556	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1557	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1558	CC73HCH1H390J	C CAPACITOR	39pF 50V J	
C1559	CC73GCH1H681J	C CAPACITOR	680pF 50V J	
C1560	CC73GCH1H681J	C CAPACITOR	680pF 50V J	
C1561	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1562	CC73HCH1H390J	C CAPACITOR	39pF 50V J	
C1563	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1564	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1565	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1566	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1567	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1568	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1569	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1570	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1571	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1572	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C1573	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1574	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1575	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C1576	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C1577	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1578	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1579	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1580	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1581	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C1582	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C1583	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C1584	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C1585	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C1586	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1587	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1588	CE32BQJ221M	E CAPACITOR	220uF 6.3V M	
C1589	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1590	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1591	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1592	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1593	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1594	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1595	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1596	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1598	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C1599	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C1601	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C1602	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1603	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1604	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1605	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C1606	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1607	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1608	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1609	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1611	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1612	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C1613	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1614	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1616	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1617	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1619	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
C1620	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1621	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1622	CK73EXR1A476K	C CAPACITOR	47uF 10V K	
C1626	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1627	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1628	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1629	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1630	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1631	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1632	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1633	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1634	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1637	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1638	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1639	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1640	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1641	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1642	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1645	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1646	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1647	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1648	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1649	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1650	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1652	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1653	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1654	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1655	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1656	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1657	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1658	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1659	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1664	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1665	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1666	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1667	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1668	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1669	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1670	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C1671	CK73HBB1H182K	C CAPACITOR	1800pF 50V K	
C1672	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C1673	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C1674	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C1675	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1676	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1677	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1679	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C1680	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C1681	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C1682	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C1686	CC73GCH1H680J	C CAPACITOR	68pF 50V J	
C1704	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C1705	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1706	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1707	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1708	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C1709	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1710	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C1711	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C1712	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1713	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1714	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1715	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1716	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C1717	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C1718	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1719	CC73HCH1H561J	C CAPACITOR	560pF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1720	CC73HCH1H820J	C CAPACITOR	82pF 50V J		C1821	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C1721	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1822	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C1722	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1823	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C1724	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1824	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C1730	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1825	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1731	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1826	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1732	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1827	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1733	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C1828	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1734	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C1830	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1735	CC73HCH1H681J	C CAPACITOR	680pF 50V J		C1831	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1736	CC73HCH1H681J	C CAPACITOR	680pF 50V J		C1832	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C1737	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1834	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1739	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1835	CE32CL1C470M	E CAPACITOR	47uF 16V M	
C1740	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1836	CD04AZ1V101M	E CAPACITOR	100uF 35V M	
C1741	CC73HCH1H560J	C CAPACITOR	56pF 50V J		C1837	CE32CL1C470M	E CAPACITOR	47uF 16V M	
C1742	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1840	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1743	CC73HCH1H821J	C CAPACITOR	820pF 50V J		C1842	CD04AZ1V101M	E CAPACITOR	100uF 35V M	
C1744	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1844	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C1745	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1845	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1746	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1846	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1750	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1847	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C1751	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1848	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1752	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1850	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C1753	CC73HCH1H151J	C CAPACITOR	150pF 50V J		C1851	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C1754	CC73HCH1H151J	C CAPACITOR	150pF 50V J		C1852	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C1755	CK73HBB1H182K	C CAPACITOR	1800pF 50V K		C1853	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C1756	CK73HBB1H182K	C CAPACITOR	1800pF 50V K		C1854	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1757	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1855	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C1759	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1856	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C1760	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1857	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1761	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1858	CC73HCH1H681J	C CAPACITOR	680pF 50V J	
C1762	CC73HCH1H821J	C CAPACITOR	820pF 50V J		C1859	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C1763	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1860	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C1764	CK73HBB1H182K	C CAPACITOR	1800pF 50V K		C1861	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C1765	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1862	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C1766	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1863	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1767	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C1864	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1768	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1865	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1769	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C1866	CK73HBB1H122K	C CAPACITOR	1200pF 50V K	
C1770	CK73HB1A684K	C CAPACITOR	0.68uF 10V K		C1867	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1773	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		C1868	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1774	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1869	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C1775	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C1870	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1780	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1871	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1781	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1872	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1782	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1873	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C1783	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		C1874	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C1784	CK73HBB1H682K	C CAPACITOR	6800pF 50V K		C1875	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1785	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C1877	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1791	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1878	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1792	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1880	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
C1793	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1881	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1795	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1882	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1796	CE32CL1C470M	E CAPACITOR	47uF 16V M		C1883	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1797	CK73GB1E105K	C CAPACITOR	1uF 25V K		C1884	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1798	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C1885	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1799	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1886	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1800	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1887	CK73HBB1H182K	C CAPACITOR	1800pF 50V K	
C1801	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1888	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1802	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1889	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1803	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		C1890	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1804	CK73HBB1H272K	C CAPACITOR	2700pF 50V K		C1891	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
C1805	CK73HBB1H272K	C CAPACITOR	2700pF 50V K		C1892	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1806	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K		C1893	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1807	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1894	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C1808	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1895	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C1809	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1896	CK73HBB1H182K	C CAPACITOR	1800pF 50V K	
C1810	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K		C1897	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1811	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1898	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1812	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C1899	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1813	CK73HBB1H272K	C CAPACITOR	2700pF 50V K		C1900	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C1814	CK73HBB1H682K	C CAPACITOR	6800pF 50V K		C1901	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C1815	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C1902	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
C1816	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C1903	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1817	CK73HBB1H332K	C CAPACITOR	3300pF 50V K		C1904	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C1818	CE32CL1H47R7M	E CAPACITOR	4.7uF 50V M		C1905	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
C1819	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C1906	CC73HCH1H391J	C CAPACITOR	390pF 50V J	
C1820	CD04AZ1E471M	E CAPACITOR	470uF 25V M		C1907	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1908	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		R71	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C1909	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R72	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C1910	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R73	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C1911	CC73HCH1H331J	C CAPACITOR	330pF 50V J		R74	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C1912	CK73HBB1H222K	C CAPACITOR	2200pF 50V K		R75	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C1913	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R76	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
C1914	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		R77	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
C1915	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R78	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C1916	CC73HCH1H821J	C CAPACITOR	820pF 50V J		R79	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C1917	CC73HCH1H821J	C CAPACITOR	820pF 50V J		R81	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
C1918	CK73HBB1H332K	C CAPACITOR	3300pF 50V K		R82	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
TC1500	C0F-0010-00	TRIM CAPACITOR			R101	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
TC1502	C0F-0010-00	TRIM CAPACITOR			R103	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
					R104	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1	R92-3625-05	RESISTOR	0.1Ω 0.33W		R105	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R2	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R106	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R3	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R107	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R4	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R108	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R5	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R109	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R6	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R110	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R111	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R8	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R112	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R9	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R113	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R11	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R114	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R12	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R115	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R13	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R116	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R14	RK73GB2A184J	MG RESISTOR	180kΩ 1/10W J		R117	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R16	RK73GH2A823D	MG RESISTOR	82kΩ 1/10W D		R118	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R17	RK73GH2A153D	MG RESISTOR	15kΩ 1/10W D		R119	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R18	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R120	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R19	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R122	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R20	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R123	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R21	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R124	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R22	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R125	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R23	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R126	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R24	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R127	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R25	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R128	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R130	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R27	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R131	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R28	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R133	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R134	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R30	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R135	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R31	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R137	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R32	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R138	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R33	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R139	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R34	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R140	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R35	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R141	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R36	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R142	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R143	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R144	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R39	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R145	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R146	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R41	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R147	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R42	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R148	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R43	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J		R149	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R44	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R150	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R45	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R151	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R46	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R153	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R49	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R154	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R50	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	890SE	R155	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R51	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R156	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R53	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R157	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R54	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R158	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R55	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R161	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R56	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R162	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R57	R92-0150-05	JUMPER RESISTOR	0.003Ω 2W	890SE	R163	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R58	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R164	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R60	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R61	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R167	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R62	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R168	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R63	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R170	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R64	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R171	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R65	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R172	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R66	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R173	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R67	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R174	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R68	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R175	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R69	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R176	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R70	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R177	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R179	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R453	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R180	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J		R454	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R181	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R455	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R182	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R456	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R183	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R457	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R184	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R458	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R185	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R459	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R189	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R460	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R190	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R461	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R191	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R462	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R192	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R463	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R193	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R464	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R195	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R465	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R196	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R466	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R197	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R467	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R198	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R468	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R201	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R469	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R202	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R470	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R203	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R471	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R204	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R472	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R205	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R473	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R206	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R474	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R208	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		R475	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R209	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R476	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R210	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R477	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R211	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R478	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R212	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R479	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R213	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R480	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R215	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R481	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R216	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R482	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R217	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R483	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R484	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R221	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R485	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R222	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R486	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R224	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R487	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R227	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	890SK	R488	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R228	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	890SE	R489	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R411	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R490	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R413	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R491	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R414	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R492	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R415	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R493	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R416	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R494	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R417	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R495	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R418	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R496	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R419	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R497	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R420	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R498	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R421	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R499	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R422	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R500	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R423	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R501	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R424	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R502	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R425	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R503	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R426	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R504	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R427	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R505	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R428	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R506	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R429	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R507	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R430	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R508	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R431	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R509	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R432	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R510	RK73GH2A102D	MG RESISTOR	1kΩ 1/10W D	
R433	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R511	RK73GH2A102D	MG RESISTOR	1kΩ 1/10W D	
R434	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R512	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R435	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R513	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R436	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R514	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R437	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R515	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R438	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R516	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R439	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R517	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R440	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R518	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R441	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R519	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R442	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R521	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R443	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R522	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R444	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R523	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R445	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R524	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R446	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R525	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R447	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R526	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R448	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R527	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R449	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R528	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R450	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R529	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R451	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R530	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R452	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R531	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R740	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J		R861	RK73GH2A123D	MG RESISTOR	12kΩ 1/10W D	
R741	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J		R862	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R742	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J		R863	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R743	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R864	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R744	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R865	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R745	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R866	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R746	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R867	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R747	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R868	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R748	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R873	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R749	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R874	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R750	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R875	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R751	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R882	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R752	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R883	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R753	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R884	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R754	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R885	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R755	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R886	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R756	RK73GH2A8870D	MG RESISTOR	887Ω 0.1W D		R887	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R757	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J		R888	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R758	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R889	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R759	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R890	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R801	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R910	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R804	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J		R911	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R805	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J		R912	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R806	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J		R913	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R807	RK73GB2A330J	MG RESISTOR	33Ω 1/10W J		R914	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R808	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R915	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R809	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R916	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R810	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R917	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R811	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R918	RK73GH2A1212D	MG RESISTOR	12.1kΩ 0.1W D	
R812	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R919	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R813	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R920	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R814	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R921	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R815	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R922	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R816	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R923	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R817	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R924	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R818	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R925	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R819	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R926	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R820	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R927	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R821	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R928	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R822	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R929	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R823	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R959	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R824	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R960	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R825	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R961	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R826	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J		R962	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R827	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R963	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R828	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R964	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R829	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R965	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R830	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J		R966	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R831	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R967	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R832	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R969	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R833	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R972	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R834	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R974	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R835	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R975	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R836	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R976	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R837	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R977	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R838	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R978	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R839	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R979	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R840	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R980	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R841	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R981	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R842	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R982	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R843	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R983	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R844	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R984	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R845	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R985	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R846	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R986	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R847	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R987	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R848	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R988	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R849	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R989	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R850	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R990	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R851	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1001	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R852	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R1002	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R853	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R1003	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R854	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R1004	RK73EB2E1R2J	MG RESISTOR	1.2Ω 1/4W J	
R855	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1005	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R856	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1006	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R857	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1007	RK73EB2E1R2J	MG RESISTOR	1.2Ω 1/4W J	
R858	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1008	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R859	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J		R1009	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R860	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1010	RK73EB2E1R2J	MG RESISTOR	1.2Ω 1/4W J	

(No.RA067<Rev.001>)3-37

△ Symbol No.	Part No.	Part Name	Description	Local
R1448	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1449	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1450	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1451	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1452	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R1453	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1454	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1455	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1456	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1457	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1458	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1459	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1460	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1461	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1471	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R1472	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	
R1477	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1478	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	
R1480	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1481	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1482	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1483	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R1501	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1503	RK73FB2B470J	MG RESISTOR	47Ω 1/8W J	
R1505	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R1506	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1507	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1509	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1511	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1512	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1513	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1514	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R1515	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R1516	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R1517	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R1518	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1519	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	
R1520	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R1521	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1522	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1523	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1524	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1525	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	
R1526	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R1527	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	
R1528	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	
R1529	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R1530	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	
R1531	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R1532	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R1533	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R1534	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R1535	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R1536	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R1537	RK73HB1J3R3J	MG RESISTOR	3.3Ω 1/16W J	
R1538	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R1539	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
R1540	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R1541	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R1542	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1543	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R1544	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R1545	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R1546	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1547	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1548	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R1549	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R1550	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R1551	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R1552	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R1554	RK73HH1J560D	MG RESISTOR	56Ω 1/16W D	
R1555	RK73HH1J181D	MG RESISTOR	180Ω 1/16W D	
R1556	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	
R1557	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	
R1558	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	
R1559	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	
R1560	RK73HH1J560D	MG RESISTOR	56Ω 1/16W D	
R1561	RK73HH1J181D	MG RESISTOR	180Ω 1/16W D	

△ Symbol No.	Part No.	Part Name	Description	Local
R1562	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	
R1563	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	
R1564	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1565	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R1566	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1567	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1568	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1569	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1570	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1571	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1572	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1573	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1574	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1575	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1576	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1577	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1578	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1579	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1580	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1581	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1582	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1583	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1584	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1585	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1587	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1588	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1589	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1590	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1591	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R1592	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R1593	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R1594	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R1600	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1601	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1602	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1603	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1605	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1606	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1607	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1610	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1611	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1612	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R1613	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1614	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1615	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1616	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1617	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1618	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1619	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1620	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	
R1621	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1622	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1623	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1624	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1625	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1626	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1627	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1628	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1630	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1631	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1632	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1635	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1636	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1637	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R1638	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R1639	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1640	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R1641	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1642	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1643	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1644	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1645	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1646	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1647	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1648	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1649	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1650	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R1651	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1652	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1740	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1653	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1741	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1654	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R1742	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1655	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R1743	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1656	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R1744	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1658	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1745	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1659	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1746	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1660	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1747	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1663	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1748	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1664	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1749	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1665	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R1750	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1666	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J		R1751	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1667	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R1752	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1668	RK73HB1J477J	MG RESISTOR	4.7Ω 1/16W J		R1753	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1669	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R1754	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R1670	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1755	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R1671	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1756	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1672	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R1757	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1673	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R1758	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R1674	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		R1759	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1675	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R1760	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1676	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R1761	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R1677	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1762	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R1678	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1763	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1679	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R1764	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1680	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R1765	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1682	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1766	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1683	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1767	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R1684	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R1770	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1687	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1771	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1688	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1772	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1689	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1773	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1690	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1774	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1691	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1775	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1692	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1778	RK73HB1J222D	MG RESISTOR	2.2kΩ 1/16W D	
R1693	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1779	RK73HB1J472D	MG RESISTOR	4.7kΩ 1/16W D	
R1694	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R1784	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1695	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R1787	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R1696	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1788	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1697	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R1789	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1698	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R1790	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
R1700	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1791	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1701	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1792	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1702	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R1793	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1703	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1794	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1704	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R1795	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R1705	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R1796	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1706	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		R1797	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1707	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1798	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1708	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1799	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R1709	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R1800	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1710	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J		R1801	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R1711	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R1802	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	
R1712	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R1803	RK73HB1J273J	MG RESISTOR	2.7kΩ 1/16W J	
R1713	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J		R1804	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R1714	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R1805	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R1715	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1806	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R1716	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R1807	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1720	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R1809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R1721	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R1810	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R1722	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1811	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R1723	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1812	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R1724	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R1813	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	
R1725	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R1814	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R1726	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R1815	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1727	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R1816	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R1728	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R1817	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R1729	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R1818	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1730	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J		R1819	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R1731	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1820	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1732	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R1821	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1733	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1822	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R1734	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R1826	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1735	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J		R1827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R1736	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J		R1829	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	
R1737	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R1830	RK73EB2E680J	MG RESISTOR	68Ω 1/4W J	
R1738	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R1832	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R1739	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R1833	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R1834	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		L4	L79-1947-05	FILTER		
R1835	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L5	LB73G0AM-004	CHIP FERRITE		
R1836	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L6	LB73G0AM-004	CHIP FERRITE		
R1840	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		L7	LB73G0AM-004	CHIP FERRITE		
R1841	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L8	LB73G0AM-004	CHIP FERRITE		
R1842	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		L401	L79-1947-05	FILTER		
R1843	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		L402	L79-1947-05	FILTER		
R1844	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		L403	L79-1947-05	FILTER		
R1845	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L404	LB73G0AM-004	CHIP FERRITE		
R1846	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L405	LB73G0AM-004	CHIP FERRITE		
R1847	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L406	LB73G0AM-004	CHIP FERRITE		
R1848	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L407	LB73G0AM-004	CHIP FERRITE		
R1849	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L408	L7K-0034-00	LC FILTER		
R1850	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L410	LB73G0AM-004	CHIP FERRITE		
R1851	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L411	L7K-0034-00	LC FILTER		
R1852	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J		L701	L92-0494-05	CHIP FERRITE		
R1853	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L702	L92-0494-05	CHIP FERRITE		
R1854	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L703	L92-0494-05	CHIP FERRITE		
R1855	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L704	L92-0494-05	CHIP FERRITE		
R1856	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L705	L41-8275-32	CHIP INDUCTOR		
R1857	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L706	L41-8275-33	CHIP INDUCTOR		
R1858	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L707	L41-8275-33	CHIP INDUCTOR		
R1859	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L708	L41-8275-33	CHIP INDUCTOR		
R1860	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L709	L41-8275-33	CHIP INDUCTOR		
R1861	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L710	L41-8275-33	CHIP INDUCTOR		
R1862	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L711	L41-8275-33	CHIP INDUCTOR		
R1863	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L712	LB73G0AM-004	CHIP FERRITE		
R1864	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L713	LB73G0AM-004	CHIP FERRITE		
R1865	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L714	L92-0490-05	CHIP FERRITE		
R1866	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L715	L7K-0071-00	LC FILTER		
R1870	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L716	L7K-0071-00	LC FILTER		
R1871	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L717	L7K-0071-00	LC FILTER		
R1872	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L718	L7K-0071-00	LC FILTER		
R1873	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L719	L7K-0071-00	LC FILTER		
R1874	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L720	L7K-0071-00	LC FILTER		
R1875	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L721	L7K-0071-00	LC FILTER		
R1876	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L722	L7K-0071-00	LC FILTER		
R1877	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L723	L7K-0071-00	LC FILTER		
R1878	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L724	L7K-0071-00	LC FILTER		
R1879	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L725	L7K-0071-00	LC FILTER		
R1880	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L726	L7K-0071-00	LC FILTER		
R1881	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L727	L7K-0071-00	LC FILTER		
R1882	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L728	L7K-0071-00	LC FILTER		
R1883	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L729	L7K-0071-00	LC FILTER		
R1884	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L730	L7K-0071-00	LC FILTER		
R1885	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L731	L7K-0071-00	LC FILTER		
R1890	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L732	L7K-0071-00	LC FILTER		
R1891	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L733	L7K-0071-00	LC FILTER		
R1892	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L734	LB73G0AM-004	CHIP FERRITE		
R1893	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L802	LB73G0AM-004	CHIP FERRITE		
R1894	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L805	LB73G0AM-004	CHIP FERRITE		
R1895	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L806	LB73G0AM-004	CHIP FERRITE		
R1896	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L807	LB73G0AM-004	CHIP FERRITE		
R1897	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L808	LB73G0AM-004	CHIP FERRITE		
R1898	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L809	LB73G0AM-004	CHIP FERRITE		
R1899	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L901	LB73G0AM-004	CHIP FERRITE		
R1900	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L902	L33-3033-05	CHOKE COIL		
R1901	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L903	L33-3033-05	CHOKE COIL		
R1902	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		L1001	LB73G0AM-004	CHIP FERRITE		
R1903	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		L1002	LB73G0AM-004	CHIP FERRITE		
R1904	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L1003	L79-1947-05	FILTER		
R1905	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		L1004	L79-1947-05	FILTER		
R1906	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		L1005	L79-1947-05	FILTER		
R1907	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L1006	LB73G0AM-004	CHIP FERRITE		
R1908	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J		L1050	LB73G0AM-004	CHIP FERRITE		
R1910	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		L1100	LB73G0AM-004	CHIP FERRITE		
R1911	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		L1202	LB73G0BF-003	CHIP FERRITE		
R1912	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		L1203	L79-1947-05	FILTER		
R1913	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		L1302	LB73G0BF-003	CHIP FERRITE		
R1914	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J		L1303	L79-1947-05	FILTER		
R1915	RN73GH1J330D	MF RESISTOR	33Ω 0.063W D		L1400	L79-1947-05	FILTER		
R1916	RN73GH1J330D	MF RESISTOR	33Ω 0.063W D		L1401	L79-1947-05	FILTER		
R1917	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		L1402	L79-1947-05	FILTER		
R1918	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		L1405	L7K-0034-00	LC FILTER		
L1	L33-3001-05	CHOKE COIL			L1406	L7K-0070-00	LC FILTER		
L2	LR19E0BA220M	LEADED INDUCTOR	22uH		L1407	L7K-0034-00	LC FILTER		
L3	L33-1595-05	CHOKE COIL			L1408	L7K-0070-00	LC FILTER		
					L1500	LR77Z0AA1R0J	CHIP INDUCTOR	1uH	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
L1502	L39-1597-05	TOROIDAL COIL			CN1604	E40-6527-05	PIN ASSY		
L1503	LR77Z0AAR15J	CHIP INDUCTOR	0.15uH		CP1	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1504	LR77Z0AAR82J	CHIP INDUCTOR	0.82uH		CP2	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1505	LR77Z0AAR82J	CHIP INDUCTOR	0.82uH		CP3	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1506	LR77Z0AAR82J	CHIP INDUCTOR	0.82uH		CP4	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1507	L39-1586-05	TOROIDAL COIL			CP5	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1508	L39-1586-05	TOROIDAL COIL			CP6	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1509	LR77Z0AAR15J	CHIP INDUCTOR	0.15uH		CP7	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1510	LR77Z0AA1R2J	CHIP INDUCTOR	1.2uH		CP8	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1511	LR77Z0AAR39J	CHIP INDUCTOR	0.39uH		CP9	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1512	LR77Z0AAR68J	CHIP INDUCTOR	0.68uH		CP10	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1513	LR77Z0AAR39J	CHIP INDUCTOR	0.39uH		CP11	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1514	LR77Z0AA1R2J	CHIP INDUCTOR	1.2uH		CP12	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1515	LR77Z0AA1R0J	CHIP INDUCTOR	1uH		CP13	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1516	LR77Z0AA1R0J	CHIP INDUCTOR	1uH		CP14	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1517	LR77Z0AA1R0J	CHIP INDUCTOR	1uH		CP15	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1518	L41-1015-33	CHIP INDUCTOR			CP16	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1519	L41-1015-33	CHIP INDUCTOR			CP17	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1520	L41-1015-33	CHIP INDUCTOR			CP18	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1521	L41-1098-60	CHIP INDUCTOR			CP19	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1522	LR73Z0AE101J	CHIP INDUCTOR			CP20	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1523	LR73Z0AE101J	CHIP INDUCTOR			CP21	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1524	L41-1098-60	CHIP INDUCTOR			CP25	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1525	LR77Z0AA1R0J	CHIP INDUCTOR	1uH		CP26	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1526	LR77Z0AAR15J	CHIP INDUCTOR	0.15uH		CP27	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1527	LR77Z0AAR15J	CHIP INDUCTOR	0.15uH		CP28	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1528	L79-1947-05	FILTER			CP29	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1529	L79-1947-05	FILTER			CP30	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1530	L79-1947-05	FILTER			CP31	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
L1531	LB73G0AM-004	CHIP FERRITE			CP32	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1533	LR77Z0AAR12J	CHIP INDUCTOR			CP33	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1534	LR77Z0AAR39J	CHIP INDUCTOR	0.39uH		CP34	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
L1535	LR77Z0AAR12J	CHIP INDUCTOR			CP102	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
L1600	LR79Z0PM100M	CHIP INDUCTOR			CP113	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
L1602	LB73G0AM-004	CHIP FERRITE			CP124	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L1603	L41-1005-39	CHIP INDUCTOR			CP133	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
L1604	L41-1005-39	CHIP INDUCTOR			CP135	RK74HA1J100J	NET RESISTOR	10Ω 1/16W J	
L1605	L41-1005-39	CHIP INDUCTOR			CP405	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
L1606	LB73G0AM-004	CHIP FERRITE			CP406	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
L1607	LB73G0AM-004	CHIP FERRITE			CP407	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
L1608	LB73G0AM-004	CHIP FERRITE			CP408	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
L1609	L33-1597-05	CHOKE COIL			CP409	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
L1610	L41-1005-32	CHIP INDUCTOR			CP410	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
L1611	L41-1005-32	CHIP INDUCTOR			CP412	RK74HA1J680J	NET RESISTOR	68Ω 1/16W J	
L1612	LB73G0AM-004	CHIP FERRITE			CP414	RK74HA1J680J	NET RESISTOR	68Ω 1/16W J	
L1613	LB73G0AM-004	CHIP FERRITE			CP415	RK74HA1J151J	NET RESISTOR	150Ω 1/16W J	
L1615	LR77Z0AA470J	CHIP INDUCTOR	47uH		CP416	RK74HA1J151J	NET RESISTOR	150Ω 1/16W J	
L1616	LB73G0AM-004	CHIP FERRITE			CP419	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	
L1620	LB73G0AM-004	CHIP FERRITE			CP420	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	
L1621	LB73G0AM-004	CHIP FERRITE			CP421	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
L1701	LB73G0AM-004	CHIP FERRITE			CP423	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	
L1702	LB73G0AM-004	CHIP FERRITE			CP424	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	
L1703	LB73G0BF-003	CHIP FERRITE			CP425	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
L1704	LB73G0BF-003	CHIP FERRITE			CP426	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CN1	E40-6530-05	PIN ASSY			CP428	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
CN2	E41-1686-05	PIN ASSY			CP429	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
CN3	EC710AM-0522A	FFC FPC CONNE			CP431	RK74HA1J680J	NET RESISTOR	68Ω 1/16W J	
CN4	EC710AM-0520A	FFC FPC CONNE			CP432	RK74HA1J680J	NET RESISTOR	68Ω 1/16W J	
CN5	EC710AM-0560A	FFC FPC CONNE			CP433	RK74HA1J000J	NET RESISTOR	0Ω 1/16W J	
CN6	EC710AM-0560A	FFC FPC CONNE			CP434	RK74HA1J151J	NET RESISTOR	150Ω 1/16W J	
CN171	J19-5386-05	HOLDER			CP435	RK74HA1J680J	NET RESISTOR	68Ω 1/16W J	
CN201	E40-6727-05	F.C.CONNECTOR			CP437	RK74HA1J220J	NET RESISTOR	22Ω 1/16W J	
CN405	E40-6914-05	F.C.CONNECTOR			CP701	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CN701	EC710AM-0549A	FFC FPC CONNE			CP702	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CN801	E40-6528-05	PIN ASSY			CP703	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CN1001	E40-6528-05	PIN ASSY			CP704	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CN1002	E41-1686-05	PIN ASSY			CP705	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CN1050	EC710AM-0560A	FFC FPC CONNE			CP706	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1100	E40-6914-05	F.C.CONNECTOR			CP707	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1500	E04-0491-05	PIN SOCKET			CP708	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1501	E04-0491-05	PIN SOCKET			CP709	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1502	E40-6852-05	PIN ASSY			CP710	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1503	E40-6852-05	PIN ASSY			CP711	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1600	E40-6526-05	PIN ASSY			CP712	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1601	E40-6525-05	PIN ASSY			CP713	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1602	E40-6526-05	PIN ASSY			CP714	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CN1603	E40-6525-05	PIN ASSY			CP715	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
					CP716	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
CP717	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP718	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP1100	RK74HA1J000J	NET RESISTOR	0Ω 1/16W J	
CP1101	RK74HA1J000J	NET RESISTOR	0Ω 1/16W J	
CP1102	RK74HA1J000J	NET RESISTOR	0Ω 1/16W J	
CP1200	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
CP1201	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
CP1202	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
CP1203	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP1204	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP1205	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP1206	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP1207	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP1300	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
CP1301	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
CP1302	RK74HA1J470J	NET RESISTOR	47Ω 1/16W J	
CP1303	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP1304	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP1305	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP1306	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP1307	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
F401	F53-0360-05	FUSE		
F701	F53-0317-15	FUSE		
F702	F53-0317-15	FUSE		
F801	F53-0317-15	FUSE		
F901	F53-0317-15	FUSE		
F951	F53-0367-05	FUSE		
F952	F53-0317-15	FUSE		
F953	F53-0317-15	FUSE		
F1001	F53-0367-05	FUSE		
F1101	F53-0360-05	FUSE		
J701	E58-0548-15	R.RECEPTACLE		
J801	E58-0537-05	R.RECEPTACLE		
J901	E5J-0153-00	R.RECEPTACLE		
J1050	E68-0424-05	JACK OTHERS		
J1100	E58-0529-05	SUB SOCKET D		
J1600	E1B-0001-00	3.5D PHONE JACK		
K1600	S76-0424-05	RELAY		
K1601	S76-0424-05	RELAY		
OT1	-----	SHIELDING CASE		
OT2	-----	SHIELDING COVER		
OT3	G11-4535-04	SHEET		
X101	L7J-0161-00	QUARTZ CRYSTAL		
X171	L77-1802-05	QUARTZ CRYSTAL		
X401	L7J-0162-00	QUARTZ CRYSTAL		
X402	L7J-0168-00	QUARTZ CRYSTAL		
X801	L7J-0163-00	QUARTZ CRYSTAL		
X802	L7J-0167-00	QUARTZ CRYSTAL		
X901	L7J-0164-00	QUARTZ CRYSTAL		
X1100	L7J-0165-00	QUARTZ CRYSTAL		
X1200	L7J-0166-00	QUARTZ CRYSTAL		
X1300	L7J-0166-00	QUARTZ CRYSTAL		
X1400	L7H-0084-00	TCXO		

DISPLAY UNIT

XC1-271J-00

***Note : This part cannot be replaced. Therefore, this part is not supplied as a service part.**

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	F3651KDFCKHAA	IC		
IC2	TC7SET125FUJC	IC		
IC3	BU33TD2WNVX	IC		
IC501	TC7SZ08FE	IC		
IC502	BA00DD0WHFP	IC		
IC504	-----	IC	*Note	
IC650	TC7SZ04FEJC	IC		
Q22	LTC043ZEBFS8	DIGI TRANSISTOR		
Q23	LTC043ZEBFS8	DIGI TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q24	LTC043ZEBFS8	DIGI TRANSISTOR		
Q25	LTC043ZEBFS8	DIGI TRANSISTOR		
Q27	LTC014YEBFS8	DIGI TRANSISTOR		
Q28	TPC6111-F	FET		
Q31	LTC014YEBFS8	DIGI TRANSISTOR		
Q33	LTC014YEBFS8	DIGI TRANSISTOR		
Q34	LTC014YEBFS8	DIGI TRANSISTOR		
Q35	LTC014YEBFS8	DIGI TRANSISTOR		
Q36	LTC014YEBFS8	DIGI TRANSISTOR		
Q37	LTC014YEBFS8	DIGI TRANSISTOR		
Q38	LTC014YEBFS8	DIGI TRANSISTOR		
Q39	LTC014YEBFS8	DIGI TRANSISTOR		
Q40	LTC043ZEBFS8	DIGI TRANSISTOR		
Q41	LTC014YEBFS8	DIGI TRANSISTOR		
Q502	2SA2018	TRANSISTOR		
Q503	2SA2018	TRANSISTOR		
Q504	2SC5585	TRANSISTOR		
Q505	2SC5585	TRANSISTOR		
Q506	LTA014YEBFS8	DIGI TRANSISTOR		
Q507	LSCR523UBFS8	TRANSISTOR		
D1	RB531SM-30	DIODE		
D2	RB531SM-30	DIODE		
D3	RB531SM-30	DIODE		
D4	RB531SM-30	DIODE		
D5	RB531SM-30	DIODE		
D6	RB531SM-30	DIODE		
D7	RB531SM-30	DIODE		
D11	B30-2352-05	LED		
D13	B30-2352-05	LED		
D14	B30-2351-05	LED		
D15	B30-2352-05	LED		
D16	B30-2352-05	LED		
D17	B30-2351-05	LED		
D18	B30-2350-05	LED		
D22	B30-2352-05	LED		
D28	B30-2352-05	LED		
D29	MINISMD C05002F	VARISTOR		
D30	1SS355VM	DIODE		
D503	LXES15AAA1133	VARISTOR		
D504	LXES15AAA1133	VARISTOR		
D505	LXES15AAA1133	VARISTOR		
D506	LXES15AAA1133	VARISTOR		
D700	RB531SM-30	DIODE		
D701	RB531SM-30	DIODE		
D703	RB531SM-30	DIODE		
D704	RB531SM-30	DIODE		
D705	RB531SM-30	DIODE		
D706	B30-2350-05	LED		
D707	B30-2350-05	LED		
D708	B30-2352-05	LED		
D709	B30-2352-05	LED		
D710	B30-2352-05	LED		
C2	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C15	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C16	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C17	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C18	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C20	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C21	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C22	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C23	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C24	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C25	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C26	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C27	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C28	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C29	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C30	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C31	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C32	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C33	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C34	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C35	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C36	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C37	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C38	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C39	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C591	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C40	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C592	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C41	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C593	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C42	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C596	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C74	CE32BM1E101M	E CAPACITOR	100uF 25V M		C597	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C75	CE32BM1E101M	E CAPACITOR	100uF 25V M		C608	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C76	CK73GB1E105K	C CAPACITOR	1uF 25V K		C618	CE32BM1E101M	E CAPACITOR	100uF 25V M	
C77	CK73GB1E105K	C CAPACITOR	1uF 25V K		C620	CE32BM1E101M	E CAPACITOR	100uF 25V M	
C79	CK73GB1E474K	C CAPACITOR	0.47uF 25V K		C621	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C80	CK73GB1E474K	C CAPACITOR	0.47uF 25V K		C646	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C81	CK73EXR1E226K	C CAPACITOR	22uF 25V K		C647	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C82	CK73GB1E105K	C CAPACITOR	1uF 25V K		C648	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C83	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C649	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C84	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C650	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C85	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C651	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C86	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C652	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C87	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C702	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C88	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C703	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C89	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C704	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C90	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C705	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C91	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C706	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C92	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C707	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C93	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C708	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C94	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C709	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C95	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C710	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C109	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C711	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C110	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C712	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C111	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C713	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C112	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C714	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C113	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C715	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C114	CK73HBB1H102K	C CAPACITOR	1000pF 50V K						
C119	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		R5	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C120	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		R7	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
C121	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R9	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
C122	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R10	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
C123	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R11	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C124	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R12	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C125	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R13	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
C126	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R14	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C127	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R15	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C128	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R16	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C129	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R17	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C130	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R18	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C131	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R19	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C132	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		R24	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C526	CC73HCH1H330J	C CAPACITOR	33pF 50V J		R25	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C528	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R29	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C529	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R30	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C530	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R35	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C531	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R36	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C553	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R37	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C555	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R38	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C556	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R39	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C557	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R40	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C559	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R41	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C560	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R42	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C561	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R43	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C562	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R44	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
C563	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R45	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C564	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R46	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C565	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C566	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		R49	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
C567	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R50	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
C568	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R51	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
C569	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R52	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
C570	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R53	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
C571	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R55	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
C580	CK73GB1E105K	C CAPACITOR	1uF 25V K		R56	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	
C581	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R57	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
C582	CK73GB1E105K	C CAPACITOR	1uF 25V K		R58	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	
C583	CK73GB1E105K	C CAPACITOR	1uF 25V K		R60	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	
C584	CK73FB1C106K	C CAPACITOR	10uF 16V K		R61	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	
C585	CK73FB1C106K	C CAPACITOR	10uF 16V K		R62	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
C586	CK73FB1C106K	C CAPACITOR	10uF 16V K		R67	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C587	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		R75	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C588	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R102	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
C589	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R107	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
C590	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R108	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R660	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		J701	E1B-0025-00	PHONE JACK		
R661	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D		J702	E06-0858-25	C.RECEPTACLE-RO		
R662	RK73HH1J682D	MG RESISTOR	6.8kΩ 1/16W D		J703	E58-0549-05	R.RECEPTACLE		
R663	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		OT1	E23-1176-14	EARTH LUG		
R664	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J		S7	S70-0439-15	TACTILE PUSH SW		
R666	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		S8	S70-0439-15	TACTILE PUSH SW		
R667	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		S9	S70-0439-15	TACTILE PUSH SW		
R700	RK73PB2H220J	MG RESISTOR	22Ω 1/2W J		S10	S70-0439-15	TACTILE PUSH SW		
R701	RK73PB2H220J	MG RESISTOR	22Ω 1/2W J		S11	S70-0439-15	TACTILE PUSH SW		
R702	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		S12	S70-0439-15	TACTILE PUSH SW		
R703	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		S13	S70-0439-15	TACTILE PUSH SW		
R705	RK73FB2B470J	MG RESISTOR	47Ω 1/8W J		S14	S70-0439-15	TACTILE PUSH SW		
R706	RK73FB2B470J	MG RESISTOR	47Ω 1/8W J		S15	S70-0439-15	TACTILE PUSH SW		
R707	RK73FB2B470J	MG RESISTOR	47Ω 1/8W J		S16	S70-0439-15	TACTILE PUSH SW		
R708	RK73FB2B470J	MG RESISTOR	47Ω 1/8W J		S17	S70-0439-15	TACTILE PUSH SW		
R709	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J		S18	S70-0439-15	TACTILE PUSH SW		
R710	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J		S19	S70-0439-15	TACTILE PUSH SW		
R711	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J		S20	S70-0439-15	TACTILE PUSH SW		
R712	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J		S21	S70-0439-15	TACTILE PUSH SW		
R713	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		S22	S70-0439-15	TACTILE PUSH SW		
R714	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		S23	S70-0439-15	TACTILE PUSH SW		
VR700	R31-0677-15	V RESISTOR			S24	S70-0439-15	TACTILE PUSH SW		
VR701	R31-0677-15	V RESISTOR			S25	S70-0439-15	TACTILE PUSH SW		
L1	LR79Z0PM101M	CHIP INDUCTOR			S26	S70-0439-15	TACTILE PUSH SW		
L2	L92-0641-05	FERRITE CORE			S27	S70-0439-15	TACTILE PUSH SW		
L3	LR79Z0PM100M	CHIP INDUCTOR			S28	S70-0439-15	TACTILE PUSH SW		
L4	LB73G0AM-004	CHIP FERRITE			S29	S70-0439-15	TACTILE PUSH SW		
L501	L33-3022-05	CHOKE COIL			S30	S70-0439-15	TACTILE PUSH SW		
L503	LB73G0AM-004	CHIP FERRITE			S31	S70-0439-15	TACTILE PUSH SW		
L505	L41-1001-62	CHIP INDUCTOR			S32	S70-0439-15	TACTILE PUSH SW		
L506	LB73H0EY-003	CHIP FERRITE			S33	S70-0439-15	TACTILE PUSH SW		
L507	LB73G0AM-004	CHIP FERRITE			S34	S70-0439-15	TACTILE PUSH SW		
L508	L79-1974-05	FILTER			S35	S70-0439-15	TACTILE PUSH SW		
L509	L92-0490-05	CHIP FERRITE			S36	S70-0439-15	TACTILE PUSH SW		
L700	L41-1085-33	CHIP INDUCTOR			S37	S70-0439-15	TACTILE PUSH SW		
L701	L41-1085-33	CHIP INDUCTOR			S38	S70-0439-15	TACTILE PUSH SW		
L702	L41-1085-33	CHIP INDUCTOR			S39	S70-0439-15	TACTILE PUSH SW		
L703	LB73G0AK-001	CHIP FERRITE			S40	S70-0439-15	TACTILE PUSH SW		
L704	LB73G0AK-001	CHIP FERRITE			S41	S70-0439-15	TACTILE PUSH SW		
L705	LB73G0AK-001	CHIP FERRITE			S42	S70-0439-15	TACTILE PUSH SW		
L706	LB73G0AK-001	CHIP FERRITE			S43	S70-0439-15	TACTILE PUSH SW		
L707	LB73G0AK-001	CHIP FERRITE			S44	S70-0439-15	TACTILE PUSH SW		
L708	LB73G0AK-001	CHIP FERRITE			S45	S70-0439-15	TACTILE PUSH SW		
L709	LB73G0AK-001	CHIP FERRITE			S46	S70-0439-15	TACTILE PUSH SW		
L710	LB73G0AK-001	CHIP FERRITE			S47	S70-0439-15	TACTILE PUSH SW		
L711	LB73G0AM-004	CHIP FERRITE			S48	S70-0439-15	TACTILE PUSH SW		
L712	LB73G0AK-001	CHIP FERRITE			S49	S70-0439-15	TACTILE PUSH SW		
L713	LB73G0AM-004	CHIP FERRITE			S50	S70-0439-15	TACTILE PUSH SW		
CN2	EC710AM-0545A	FFC FPC CONNE			S51	S70-0439-15	TACTILE PUSH SW		
CN3	E40-6727-05	F.C.CONNECTOR			S52	S70-0439-15	TACTILE PUSH SW		
CN4	EC720AK-0515A	FFC FPC CONNE			S53	S70-0439-15	TACTILE PUSH SW		
CN5	EC710AM-0513A	FFC FPC CONNE			S54	S70-0439-15	TACTILE PUSH SW		
CN6	E40-6527-05	PIN ASSY			S55	S70-0439-15	TACTILE PUSH SW		
CN7	E41-1684-05	PIN ASSY			S56	S70-0439-15	TACTILE PUSH SW		
CN8	EC710AJ-1006A	FFC FPC CONNE			S57	S70-0439-15	TACTILE PUSH SW		
CN9	EC710AJ-1006A	FFC FPC CONNE			S58	S70-0439-15	TACTILE PUSH SW		
CN500	EC710AM-0545A	FFC FPC CONNE			S59	S70-0439-15	TACTILE PUSH SW		
CN501	E40-6529-05	PIN ASSY			S60	S70-0439-15	TACTILE PUSH SW		
CN502	EC710AM-0520A	FFC FPC CONNE			S61	S70-0439-15	TACTILE PUSH SW		
CN504	EC710AM-0549A	FFC FPC CONNE			S62	S70-0439-15	TACTILE PUSH SW		
CN505	E41-2332-05	F.C.CONNECTOR			S63	S70-0439-15	TACTILE PUSH SW		
CN507	EC720AA-0540A	FFC FPC CONNE			S700	S70-0439-15	TACTILE PUSH SW		
CN508	EC710AM-0513A	FFC FPC CONNE			S701	S70-0439-15	TACTILE PUSH SW		
CN509	E41-2741-05	PIN ASSY			S702	S70-0439-15	TACTILE PUSH SW		
CN513	E23-1325-05	TERMINAL			S703	S70-0439-15	TACTILE PUSH SW		
CN700	E41-1642-05	PIN ASSY			S704	S70-0439-15	TACTILE PUSH SW		
CN702	E40-6526-05	PIN ASSY			S705	S70-0439-15	TACTILE PUSH SW		
CN703	EC720AA-0515A	FFC FPC CONNE	15P		S706	S70-0439-15	TACTILE PUSH SW		
CN704	EC720AA-0513A	FFC FPC CONNE			S707	S70-0439-15	TACTILE PUSH SW		
CN705	EC710AJ-1006A	FFC FPC CONNE			S708	S70-0439-15	TACTILE PUSH SW		
CN706	EC720AJ-1006B	FFC FPC CONNE			S709	W02-3772-05	ENCODER		
CN707	EC710AM-0513A	FFC FPC CONNE			S710	W02-3772-05	ENCODER		
CN708	E40-6528-05	PIN ASSY			S711	W02-3772-05	ENCODER		
CN709	E41-2741-05	PIN ASSY			S712	T9K-0027-00	ROTARY ENCODER		
F1	F53-0317-15	FUSE			S713	S70-0439-15	TACTILE PUSH SW		
J700	E11-0705-15	PHONE JACK			S714	S70-0439-15	TACTILE PUSH SW		
					S715	S70-0439-15	TACTILE PUSH SW		
					S716	S70-0439-15	TACTILE PUSH SW		

△ Symbol No.	Part No.	Part Name	Description	Local
S717	S70-0439-15	TACTILE PUSH SW		
S718	S70-0439-15	TACTILE PUSH SW		
X1	L7J-0161-00	QUARTZ CRYSTAL		

DC-DC UNIT

XC2-035J-00

***Note : This part cannot be replaced. Therefore, this part is not supplied as a service part.**

Block No. [0][4]

△ Symbol No.	Part No.	Part Name	Description	Local
IC100	-----	IC	*Note	
IC120	-----	IC	*Note	
IC140	-----	IC	*Note	
IC401	BA00DD0WHFP	IC		
Q20	LSCR523EBFS8	TRANSISTOR		
Q23	2SD2704K	TRANSISTOR		
Q24	2SA1037AK	TRANSISTOR		
Q25	2SD2704K	TRANSISTOR		
Q160	LTC014EEBFS8	DIGI TRANSISTOR		
Q161	RP1A090ZP	TRANSISTOR		
D20	EDZV16B	ZENER DIODE		
D100	RB080LAM-30	SCHOTTKY DIODE		
D101	1SS226-F	DIODE		
D102	EDZV12B	ZENER DIODE		
D103	EDZV3.9B	ZENER DIODE		
D120	RB080LAM-30	SCHOTTKY DIODE		
D140	RB080LAM-30	SCHOTTKY DIODE		
D225	DA221WM	DIODE		
D226	DA221WM	DIODE		
C1	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C2	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C10	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C11	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C12	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C13	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C16	CD04BQ1E471M	E CAPACITOR	470uF 25V M	
C17	CD04BQ1E471M	E CAPACITOR	470uF 25V M	
C20	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C21	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C22	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C23	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C100	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C101	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C102	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C103	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C104	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C105	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C106	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C107	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C109	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C110	CK73EBB1H474K	C CAPACITOR	0.47uF 50V K	
C112	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C113	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C114	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C115	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C116	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C117	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C118	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C120	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C121	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C122	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C123	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C124	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C125	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C126	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C127	CD04AY1E470M	E CAPACITOR	47uF 25V M	
C128	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C129	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C130	CK73EBB1H474K	C CAPACITOR	0.47uF 50V K	
C131	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	
C132	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C133	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C134	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C135	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C136	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C137	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C138	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C139	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	
C140	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C141	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C142	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C143	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C144	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C145	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C146	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C147	CD04AY1E470M	E CAPACITOR	47uF 25V M	
C148	CD04AY1E470M	E CAPACITOR	47uF 25V M	
C149	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C150	CK73EBB1H474K	C CAPACITOR	0.47uF 50V K	
C151	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C152	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C153	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C154	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C155	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C156	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C157	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C158	CD04BQ1E331M	E CAPACITOR	330uF 25V M	
C159	CD04BQ1E471M	E CAPACITOR	470uF 25V M	
C162	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C163	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C164	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C165	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C166	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C167	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C168	CD04BQ1E471M	E CAPACITOR	470uF 25V M	
C169	CD04BQ1E471M	E CAPACITOR	470uF 25V M	
C170	CD04BQ1E471M	E CAPACITOR	470uF 25V M	
C174	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C175	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C176	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C177	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C178	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C179	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C180	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C181	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C182	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C183	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C184	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C185	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C186	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C187	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C188	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C189	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C190	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C191	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C192	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C193	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C194	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C195	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C196	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C197	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C198	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C199	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C200	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C201	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C206	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C225	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C226	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C227	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C228	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C300	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C301	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C302	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C303	CK73EXR1E226K	C CAPACITOR	22uF 25V K	
C320	CK73EXR1E226K	C CAPACITOR	22uF 25V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C321	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R159	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C322	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R160	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C323	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R161	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C340	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R162	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
C341	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R163	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
C342	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R164	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
C343	CK73EXR1E226K	C CAPACITOR	22uF 25V K		R167	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C401	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R168	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
C402	CK73GB1E105K	C CAPACITOR	1uF 25V K		R169	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
C403	CD04AY1E470M	E CAPACITOR	47uF 25V M		R170	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
C404	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		R171	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
C407	CD04AZ1V101M	E CAPACITOR	100uF 35V M		R172	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
					R173	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R3	RK73FB2B100J	MG RESISTOR	10Ω 1/8W J		R174	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R8	R92-3625-05	RESISTOR	0.1Ω 0.33W		R175	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R9	R92-3625-05	RESISTOR	0.1Ω 0.33W		R176	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R10	R92-3625-05	RESISTOR	0.1Ω 0.33W		R177	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R20	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R178	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R21	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R179	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R100	R92-3625-05	RESISTOR	0.1Ω 0.33W		R181	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R101	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R182	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R102	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R183	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R103	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R184	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R104	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R185	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R105	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R186	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R106	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R187	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R107	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		R188	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R108	RK73GB2A184J	MG RESISTOR	180kΩ 1/10W J		R189	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R109	RK73GH2A124D	MG RESISTOR	120kΩ 1/10W D		R190	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R110	RK73GH2A133D	MG RESISTOR	13kΩ 1/10W D		R191	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R111	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R192	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R112	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R193	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R113	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R194	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R114	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R195	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R115	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R196	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R116	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		R197	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R117	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R198	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R118	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J		R205	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R119	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J		R307	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R120	R92-3625-05	RESISTOR	0.1Ω 0.33W		R327	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R121	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R347	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R122	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R401	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R123	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R403	RK73HH1J362D	MG RESISTOR	3.6kΩ 1/16W D	
R124	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		R404	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	
R125	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J						
R126	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J		L1	L33-1595-05	CHOKE COIL		
R127	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		L2	L33-1595-05	CHOKE COIL		
R128	RK73GB2A184J	MG RESISTOR	180kΩ 1/10W J		L3	L33-1598-05	CHOKE COIL		
R129	RK73GH2A823D	MG RESISTOR	82kΩ 1/10W D		L100	LR19E0BA330M	LEADED INDUCTOR		
R130	RK73GH2A153D	MG RESISTOR	15kΩ 1/10W D		L101	LR19E0BA470L	LEADED INDUCTOR	47uH	
R131	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L102	L33-1595-05	CHOKE COIL		
R132	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L103	L33-0695-05	CHOKE COIL		
R133	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L104	L33-0695-05	CHOKE COIL		
R134	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L105	L33-1598-05	CHOKE COIL		
R135	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L120	L33-3001-05	CHOKE COIL		
R136	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J		L121	LR19E0BA220M	LEADED INDUCTOR	22uH	
R137	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		L122	L33-1595-05	CHOKE COIL		
R138	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L140	L33-3001-05	CHOKE COIL		
R139	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L141	LR19E0BA220M	LEADED INDUCTOR	22uH	
R140	R92-3625-05	RESISTOR	0.1Ω 0.33W		L142	L33-1595-05	CHOKE COIL		
R141	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		L190	L33-1595-05	CHOKE COIL		
R142	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		L220	LR77Z0AA100J	CHIP INDUCTOR	10uH	
R143	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J		L221	LR77Z0AA100J	CHIP INDUCTOR	10uH	
R144	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J						
R145	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		CN1	E40-6529-05	PIN ASSY		
R146	R92-3625-05	RESISTOR	0.1Ω 0.33W		CN103	EC710AM-0528A	FFC FPC CONNE		
R147	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J		CN104	E40-6535-05	PIN ASSY		
R148	RK73GB2A184J	MG RESISTOR	180kΩ 1/10W J		CN105	E40-6529-05	PIN ASSY		
R149	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D		CN106	E40-6531-05	PIN ASSY		
R150	RK73GH2A123D	MG RESISTOR	12kΩ 1/10W D		CN107	EC710AM-0522A	FFC FPC CONNE		
R151	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		CN225	J13-0605-05	FUSE HOLDER		
R152	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		CN226	E40-6528-05	PIN ASSY		
R153	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		F4	FZA10BV-5R0	FUSE (CC)		
R154	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		F7	F53-0388-05	FUSE		
R155	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		F8	F53-0407-05	FUSE(UL/CSA)		
R156	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		F9	F53-0407-05	FUSE(UL/CSA)		
R157	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		F10	F53-0388-05	FUSE		
R158	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		OT1	-----	SHIELDING CASE	(x3)	

△ Symbol No.	Part No.	Part Name	Description	Local
OT2	-----	SHIELDING COVER	(x3)	
OT3	FZB10AU-4R0	BLADE FUSE	F225	
OT4	G11-4535-04	SHEET	(x3)	
OT5	N82-3008-48	BI.HEAD T.SCREW		

PLL UNIT

XC2-036J-00(TS-890S(K))

XC2-036E-01(TS-890S(E))

***Note : This part cannot be replaced. Therefore, this part is not supplied as a service part.**

Block No. [0][5]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	BU7242FVM	IC		
IC51	BU7242FVM	IC		
IC52	BU33UC3WG	IC		
IC101	-----	IC	*Note	
IC201	-----	IC	*Note	
IC241	-----	IC	*Note	
IC511	TC7WZ74FKJC	IC		890SE
IC512	TC7WZ74FKJC	IC		
IC513	TC7WZ86FKJC	IC		
IC514	TC7WZ74FKJC	IC		
IC515	TC7WZ08FKJC	IC		
IC516	TC7WZ74FKJC	IC		
IC601	AD9835BRUZ	IC		
IC721	-----	IC	*Note	
IC821	BU7242FVM	IC		
IC851	TC7WT125FUF	IC		
IC852	TC7WT125FUF	IC		
IC853	CD74HC4094M96	IC		
IC854	CD74HC4094M96	IC		
IC901	-----	IC	*Note	
IC912	-----	IC	*Note	
IC922	-----	IC	*Note	
Q1	2SC4617/R/	TRANSISTOR		
Q2	2SC4617/R/	TRANSISTOR		
Q3	2SC4617/R/	TRANSISTOR		
Q6	LTC043ZEBFS8	DIGI TRANSISTOR		
Q7	LTA014EEBFS8	DIGI TRANSISTOR		
Q51	2SC4617/R/	TRANSISTOR		
Q52	LTA014EEBFS8	DIGI TRANSISTOR		
Q53	LTC043ZEBFS8	DIGI TRANSISTOR		
Q101	2SC4617/R/	TRANSISTOR		
Q102	2SC4617/R/	TRANSISTOR		
Q181	2SC5551AF	TRANSISTOR		
Q201	LTC043ZEBFS8	DIGI TRANSISTOR		
Q241	2SC5551AF	TRANSISTOR		
Q242	LTC043ZEBFS8	DIGI TRANSISTOR		
Q243	LTC043ZEBFS8	DIGI TRANSISTOR		
Q251	2SC5551AF	TRANSISTOR		
Q271	LTC043ZEBFS8	DIGI TRANSISTOR		
Q272	LTA014EEBFS8	DIGI TRANSISTOR		
Q274	LTC043ZEBFS8	DIGI TRANSISTOR		
Q275	LTA014EEBFS8	DIGI TRANSISTOR		
Q277	LTC043ZEBFS8	DIGI TRANSISTOR		
Q278	LTA014EEBFS8	DIGI TRANSISTOR		
Q280	LTC043ZEBFS8	DIGI TRANSISTOR		
Q281	LTA014EEBFS8	DIGI TRANSISTOR		
Q283	LTC043ZEBFS8	DIGI TRANSISTOR		
Q284	LTA014EEBFS8	DIGI TRANSISTOR		
Q286	LTC043ZEBFS8	DIGI TRANSISTOR		
Q287	LTA014EEBFS8	DIGI TRANSISTOR		
Q289	LTC043ZEBFS8	DIGI TRANSISTOR		
Q290	LTA014EEBFS8	DIGI TRANSISTOR		
Q292	LTC043ZEBFS8	DIGI TRANSISTOR		
Q293	LTA014EEBFS8	DIGI TRANSISTOR		
Q295	LTC043ZEBFS8	DIGI TRANSISTOR		
Q296	LTA014EEBFS8	DIGI TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q298	LTC043ZEBFS8	DIGI TRANSISTOR		
Q299	LTA014EEBFS8	DIGI TRANSISTOR		
Q501	2SC4617/R/	TRANSISTOR		890SE
Q502	LTC043ZEBFS8	DIGI TRANSISTOR		890SE
Q503	2SC4617/R/	TRANSISTOR		
Q504	LTC043ZEBFS8	DIGI TRANSISTOR		
Q541	2SC4617/R/	TRANSISTOR		
Q542	2SC4617/R/	TRANSISTOR		
Q601	2SC4617/R/	TRANSISTOR		
Q603	2SC4617/R/	TRANSISTOR		
Q651	2SC4617/R/	TRANSISTOR		
Q652	2SC4617/R/	TRANSISTOR		
Q701	2SC4617/R/	TRANSISTOR		890SE
Q702	LTC043ZEBFS8	DIGI TRANSISTOR		
Q703	LTC043ZEBFS8	DIGI TRANSISTOR		
Q704	LTA014EEBFS8	DIGI TRANSISTOR		
Q705	SSM3K15AMFVF	FET		
Q706	LTA014EEBFS8	DIGI TRANSISTOR		890SE
Q707	LTA014EEBFS8	DIGI TRANSISTOR		
Q721	2SC4617/R/	TRANSISTOR		
Q751	2SC4617/R/	TRANSISTOR		
Q786	2SC4617/R/	TRANSISTOR		
Q801	2SC4617/R/	TRANSISTOR		
Q841	2SC5585	TRANSISTOR		
Q842	2SC4617/R/	TRANSISTOR		
Q843	LTC043ZEBFS8	DIGI TRANSISTOR		
D1	CSA70-401L	SURGE ABSORBER		
D2	UDZV3.3B	ZENER DIODE		
D3	UDZV3.3B	ZENER DIODE		
D4	RN262CS	DIODE		
D5	RN262CS	DIODE		
D6	RB706F-40	DIODE		
D51	RN262CS	DIODE		
D52	RN262CS	DIODE		
D101	RN262CS	DIODE		
D102	RN262CS	DIODE		
D103	RN262CS	DIODE		
D104	RN262CS	DIODE		
D105	CES388	SCHOTTKY DIODE		
D271	RN262CS	DIODE		
D272	RN262CS	DIODE		
D273	RN262CS	DIODE		
D274	RN262CS	DIODE		
D275	RN262CS	DIODE		
D276	RN262CS	DIODE		
D277	RN262CS	DIODE		
D278	RN262CS	DIODE		
D279	RN262CS	DIODE		
D280	RN262CS	DIODE		
D281	RN262CS	DIODE		
D282	RN262CS	DIODE		
D283	RN262CS	DIODE		
D284	RN262CS	DIODE		
D285	RN262CS	DIODE		
D286	RN262CS	DIODE		
D287	RN262CS	DIODE		
D288	RN262CS	DIODE		
D289	RN262CS	DIODE		
D290	RN262CS	DIODE		
D651	RN262CS	DIODE		
D701	RN262CS	DIODE		890SE
D721	CES388	SCHOTTKY DIODE		
D752	1SV323F	VARI CAP DIODE		
C1	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C2	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C3	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C4	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C5	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C6	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C7	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C8	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C9	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C10	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C11	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C12	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C13	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C14	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C150	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C15	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C151	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C16	CC73HCH1H271J	C CAPACITOR	270pF 50V J		C152	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C17	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C153	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C18	CC73HCH1H471J	C CAPACITOR	470pF 50V J		C181	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C19	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C182	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C20	CC73HCH1H271J	C CAPACITOR	270pF 50V J		C183	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C21	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C184	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C22	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C185	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C23	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C186	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C24	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C187	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C25	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C188	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C26	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C189	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C27	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C190	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C28	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C191	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C29	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C201	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C30	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C202	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C31	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C203	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C32	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C204	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C33	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C205	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C53	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C206	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C54	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C207	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C55	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C208	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C56	CC73HCH1H150G	C CAPACITOR	15pF 50V G		C209	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C57	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C211	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C58	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C213	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C59	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C214	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C60	CC73HCH1H181J	C CAPACITOR	180pF 50V J		C215	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C62	CC73HCH1H271J	C CAPACITOR	270pF 50V J		C216	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C64	CC73HCH1H181J	C CAPACITOR	180pF 50V J		C217	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C67	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C218	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C68	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C219	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C69	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C220	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C70	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C221	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C71	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C222	CK73GB1A475K	C CAPACITOR	4.7uF 10V K	
C72	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C223	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C73	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C224	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C74	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C225	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C76	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C226	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C77	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C237	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C79	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C238	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C83	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K		C239	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C101	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C240	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C102	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C241	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C103	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C242	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C104	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C243	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C105	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C247	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C106	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C248	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C107	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C250	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C108	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C251	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C109	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C252	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C110	CC73HCH1H391J	C CAPACITOR	390pF 50V J		C253	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C111	CC73HCH1H151J	C CAPACITOR	150pF 50V J		C254	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C114	CC73HCH1H391J	C CAPACITOR	390pF 50V J		C255	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C115	CC73HCH1H151J	C CAPACITOR	150pF 50V J		C257	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C120	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C258	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C121	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C259	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C122	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C261	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C123	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C262	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C124	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		C264	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C126	CK73HB1A224K	C CAPACITOR	0.22uF 10V K		C266	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C127	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C267	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C128	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C268	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C129	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C271	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C130	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C273	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C131	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C274	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C132	CK73FB1C106K	C CAPACITOR	10uF 16V K		C275	CC73HCH1H681J	C CAPACITOR	680pF 50V J	
C133	CK73FB1C106K	C CAPACITOR	10uF 16V K		C276	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C134	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C277	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C135	CK73GBB1A824K	C CAPACITOR	0.82uF 10V K		C278	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	
C136	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C279	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C138	CK73FB1C106K	C CAPACITOR	10uF 16V K		C280	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	
C141	CK73HBB1C823K	C CAPACITOR	0.082uF 16V K		C281	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C145	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C282	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C146	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C283	CC73HCH1H681J	C CAPACITOR	680pF 50V J	
C147	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C286	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C148	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C287	CC73HCH1H390J	C CAPACITOR	39pF 50V J	
C149	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C288	CC73HCH1H331J	C CAPACITOR	330pF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local
C289	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C290	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C291	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C292	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C293	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C295	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C296	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C297	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C298	CC73HCH1H561J	C CAPACITOR	560pF 50V J	
C299	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C300	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C301	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C302	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C303	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C304	CC73HCH1H561J	C CAPACITOR	560pF 50V J	
C305	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C308	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C309	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C310	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C311	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C312	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C313	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C314	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C315	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C317	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C318	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C319	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C320	CC73HCH1H391J	C CAPACITOR	390pF 50V J	
C321	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C322	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C323	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C324	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C325	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C326	CC73HCH1H391J	C CAPACITOR	390pF 50V J	
C327	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C330	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C331	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C332	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C333	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C334	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C335	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C336	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C337	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C339	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C340	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C341	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C342	CC73HCH1H561J	C CAPACITOR	560pF 50V J	
C343	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C344	CC73HCH1H681J	C CAPACITOR	680pF 50V J	
C345	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C346	CC73HCH1H561J	C CAPACITOR	560pF 50V J	
C347	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C350	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C351	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C352	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C353	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C354	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C355	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C356	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C357	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C358	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C359	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C361	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C362	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C363	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C364	CC73HCH1H561J	C CAPACITOR	560pF 50V J	
C365	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C366	CC73HCH1H681J	C CAPACITOR	680pF 50V J	
C367	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C368	CC73HCH1H561J	C CAPACITOR	560pF 50V J	
C369	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C372	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C373	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C374	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C375	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C376	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C377	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C378	CC73HCH1H121J	C CAPACITOR	120pF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local
C379	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C380	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C381	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C382	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C383	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C384	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C385	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C386	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C387	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C388	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C389	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C390	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C391	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C392	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C393	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C394	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C395	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C396	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C397	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C398	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C399	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C400	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C401	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C403	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C404	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C405	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C406	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C407	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C408	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C409	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C410	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C411	CC73HCH1H560J	C CAPACITOR	56pF 50V J	
C412	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C413	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C414	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C415	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C416	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C417	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C418	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C419	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C420	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C421	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C422	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C423	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C425	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C426	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C427	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C428	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C429	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C430	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C431	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C432	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C433	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C434	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C435	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C436	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C437	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C438	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C439	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C440	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C441	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C442	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C443	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C444	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C445	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C447	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C448	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C449	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C450	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C451	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C452	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C453	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C454	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C455	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C456	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C457	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C458	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C459	CC73HCH1H150G	C CAPACITOR	15pF 50V G	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C460	CC73HCH1H680J	C CAPACITOR	68pF 50V J		C549	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C461	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C550	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C462	CC73HCH1H680J	C CAPACITOR	68pF 50V J		C551	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C463	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C552	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C464	CC73HCH1H680J	C CAPACITOR	68pF 50V J		C553	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C465	CC73HCH1H150G	C CAPACITOR	15pF 50V G		C554	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C466	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C555	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C467	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C556	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C469	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C557	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C470	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C558	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C471	CC73HCH1H820J	C CAPACITOR	82pF 50V J		C559	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C472	CC73HCH1H680J	C CAPACITOR	68pF 50V J		C601	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C473	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C602	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C474	CC73HCH1H820J	C CAPACITOR	82pF 50V J		C603	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C475	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C604	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C476	CC73HCH1H820J	C CAPACITOR	82pF 50V J		C605	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C477	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C606	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C478	CC73HCH1H680J	C CAPACITOR	68pF 50V J		C607	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C479	CC73HCH1H820J	C CAPACITOR	82pF 50V J		C608	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C480	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C609	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C481	CC73HCH1H090B	C CAPACITOR	9pF 50V B		C611	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C482	CC73HCH1H560J	C CAPACITOR	56pF 50V J		C612	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C483	CC73HCH1H070B	C CAPACITOR	7pF 50V B		C613	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C484	CC73HCH1H560J	C CAPACITOR	56pF 50V J		C614	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C485	CC73HCH1H070B	C CAPACITOR	7pF 50V B		C615	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K	
C486	CC73HCH1H560J	C CAPACITOR	56pF 50V J		C619	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C487	CC73HCH1H090B	C CAPACITOR	9pF 50V B		C620	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C488	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C621	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C489	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C622	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C490	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C623	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C501	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	890SE	C624	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C502	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	890SE	C625	CK73HBB1H182K	C CAPACITOR	1800pF 50V K	
C503	CC73HCH1H471J	C CAPACITOR	470pF 50V J	890SE	C626	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C504	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	890SE	C627	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C505	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	890SE	C628	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C506	CC73HCH1H330J	C CAPACITOR	33pF 50V J	890SE	C629	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C507	CC73HCH1H560J	C CAPACITOR	56pF 50V J	890SE	C630	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C508	CC73HCH1H560J	C CAPACITOR	56pF 50V J	890SE	C651	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C509	CC73HCH1H330J	C CAPACITOR	33pF 50V J	890SE	C652	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C510	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	890SE	C653	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C511	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K	890SE	C654	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C512	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	890SE	C655	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C513	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C656	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C514	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C657	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C515	CC73HCH1H471J	C CAPACITOR	470pF 50V J		C658	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C516	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C659	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C517	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C660	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C518	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C661	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C519	CC73HCH1H560J	C CAPACITOR	56pF 50V J		C662	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C520	CC73HCH1H560J	C CAPACITOR	56pF 50V J		C663	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C521	CC73HCH1H330J	C CAPACITOR	33pF 50V J		C664	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C522	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C665	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C523	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K		C666	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C524	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C667	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C525	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C668	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C526	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE	C669	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C527	CC73HCH1H560J	C CAPACITOR	56pF 50V J	890SE	C670	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C528	CC73HCH1H101J	C CAPACITOR	100pF 50V J	890SE	C671	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C529	CC73HCH1H101J	C CAPACITOR	100pF 50V J	890SE	C672	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C530	CC73HCH1H560J	C CAPACITOR	56pF 50V J	890SE	C673	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C531	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE	C674	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C532	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K		C675	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C533	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C676	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C534	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C692	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C535	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K		C701	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C536	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K		C702	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C537	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C703	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C538	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C704	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C539	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K		C705	CC73HCH1H151J	C CAPACITOR	150pF 50V J	890SE
C540	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C706	CC73HCH1H220J	C CAPACITOR	22pF 50V J	890SE
C541	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C707	CC73HCH1H221J	C CAPACITOR	220pF 50V J	890SE
C542	CC73HCH1H151J	C CAPACITOR	150pF 50V J		C708	CC73HCH1H220J	C CAPACITOR	22pF 50V J	890SE
C543	CC73HCH1H271J	C CAPACITOR	270pF 50V J		C709	CC73HCH1H221J	C CAPACITOR	220pF 50V J	890SE
C544	CC73HCH1H271J	C CAPACITOR	270pF 50V J		C710	CC73HCH1H220J	C CAPACITOR	22pF 50V J	890SE
C545	CC73HCH1H151J	C CAPACITOR	150pF 50V J		C711	CC73HCH1H151J	C CAPACITOR	150pF 50V J	890SE
C546	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C712	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C547	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C713	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C548	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K		C714	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE

△ Symbol No.	Part No.	Part Name	Description	Local
C715	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C722	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C723	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C724	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C725	CC73HCH1H391J	C CAPACITOR	390pF 50V J	
C726	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C727	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C729	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C731	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C732	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	
C733	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C734	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C735	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C736	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C737	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C738	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C739	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C740	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C751	CC73HCH1H821J	C CAPACITOR	820pF 50V J	
C752	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C753	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C755	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C758	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C759	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C760	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C761	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C762	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C765	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C766	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C768	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C786	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C787	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C788	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C789	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C790	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C791	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C792	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C793	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C794	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C795	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C801	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C802	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C803	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C804	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C805	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C806	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C807	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C808	CC73HCH1H331J	C CAPACITOR	330pF 50V J	
C809	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C810	CC73HCH1H181J	C CAPACITOR	180pF 50V J	
C813	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C821	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C822	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C823	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C841	CE32BM1C101M	E CAPACITOR	100uF 16V M	
C842	CE32BM1C101M	E CAPACITOR	100uF 16V M	
C843	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C844	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C845	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C848	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C851	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C852	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C853	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C854	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	
C873	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C875	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C902	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C904	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C907	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C909	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C911	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C913	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C915	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C916	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C918	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C921	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C923	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C925	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C927	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C928	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C930	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C931	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C941	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C942	CK73FB1C106K	C CAPACITOR	10uF 16V K	
R1	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R5	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R6	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R8	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R9	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R10	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R11	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R12	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R13	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R14	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R15	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R16	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R17	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R21	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R22	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R23	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R24	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R25	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R26	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R27	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R28	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R30	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R31	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R32	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R51	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R52	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	
R53	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R54	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R59	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R61	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R63	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R64	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R65	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R66	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R67	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J	
R68	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R69	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R71	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R73	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R74	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R75	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R101	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R102	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R103	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R104	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R105	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R106	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R107	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R108	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R109	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R110	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R111	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R112	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R113	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R115	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R116	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R117	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R118	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R119	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R120	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R121	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R122	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R123	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R124	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R125	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R126	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R127	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R128	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R129	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	
R130	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R131	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R132	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R306	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R135	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R308	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R136	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		R309	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R137	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R310	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R139	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R311	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R181	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R312	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R182	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R314	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R183	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R315	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R186	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R316	RK73HB1J150J	MG RESISTOR	15Ω 1/16W J	
R187	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		R317	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R188	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R318	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R189	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R320	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R201	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J		R321	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R202	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R322	RK73HB1J150J	MG RESISTOR	15Ω 1/16W J	
R203	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R323	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R204	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R324	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R205	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R326	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R206	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J		R327	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R207	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R328	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	
R208	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R329	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R209	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R330	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R210	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R331	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R211	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R341	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R212	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J		R342	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R229	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R343	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R230	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R344	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R231	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R345	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R232	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		R346	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R233	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R347	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R234	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R348	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R235	RK73GB2A270J	MG RESISTOR	27Ω 1/10W J		R349	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R236	RK73GB2A270J	MG RESISTOR	27Ω 1/10W J		R350	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R237	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J		R501	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	890SE
R238	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J		R502	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	890SE
R240	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R503	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	890SE
R241	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R504	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	890SE
R242	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R505	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	890SE
R243	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R506	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	890SE
R244	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R507	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	890SE
R245	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R508	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	890SE
R250	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R509	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	890SE
R251	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R510	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	890SE
R252	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		R511	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	890SE
R253	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		R512	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	890SE
R254	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R513	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R255	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J		R514	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R256	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J		R515	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R259	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R516	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R260	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R517	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	
R272	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R518	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R273	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		R519	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R274	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J		R520	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R275	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		R521	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R276	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R524	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R278	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R529	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R279	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J		R530	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R280	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J		R533	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R281	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J		R534	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R282	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R535	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R284	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R536	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R285	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R537	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R286	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R538	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R287	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R542	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R288	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R543	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R290	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R544	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R291	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R545	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R292	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J		R546	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R293	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R547	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R294	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R548	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R296	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R549	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R297	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R550	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R298	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J		R551	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R299	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R552	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R300	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R601	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R302	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R602	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R303	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R603	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R304	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J		R604	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R305	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R605	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R606	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R786	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R607	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R787	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R608	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R788	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R609	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R789	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R611	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R790	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R612	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R791	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R613	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R792	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R614	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R793	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R615	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J		R801	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R621	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R802	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R622	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R803	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R623	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R804	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R624	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R805	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R625	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J		R806	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R627	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R807	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R628	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J		R809	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R629	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R810	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R630	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J		R811	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R632	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		R821	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R651	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R823	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R652	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R824	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R653	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R825	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R654	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R826	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R655	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J		R828	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R656	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R841	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R657	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R842	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R658	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R843	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R659	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R844	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R660	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R851	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R661	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J		R852	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R662	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R853	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R663	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R854	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R664	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J		R855	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R665	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R856	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R666	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R857	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R667	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J		R858	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R677	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J		R871	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R701	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	890SE	R872	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R702	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	890SE	R873	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R703	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	890SE	R875	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R704	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	890SE	R876	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R705	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	890SE	R877	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R706	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	890SE	R878	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R707	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	890SE	R879	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R708	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	890SE	R880	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R709	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	890SE	R881	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R711	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R882	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R712	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R883	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R715	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	890SE	R884	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R722	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R885	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R724	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R886	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R725	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R888	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R726	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R889	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R727	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J		R991	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	890SK
R728	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R994	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	890SE
R729	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J						
R731	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J		L1	LR73Z0AER33J	CHIP INDUCTOR		
R732	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L2	LR73Z0AE2R7J	CHIP INDUCTOR		
R733	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L3	LR73Z0AER18J	CHIP INDUCTOR		
R734	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		L4	LR73Z0AE2R7J	CHIP INDUCTOR		
R735	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		L5	LR73Z0AER33J	CHIP INDUCTOR		
R736	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L6	LR73Z0AE100J	CHIP INDUCTOR		
R737	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J		L7	LR73Z0AER82J	CHIP INDUCTOR		
R751	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L8	LR73Z0AER82J	CHIP INDUCTOR		
R752	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J		L9	LR73Z0AE100J	CHIP INDUCTOR		
R753	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J		L10	LR73Z0AE100J	CHIP INDUCTOR		
R754	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		L51	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	
R755	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L52	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	
R756	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L54	LR73Z0AE100J	CHIP INDUCTOR		
R757	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J		L55	LR73Z0AE100J	CHIP INDUCTOR		
R758	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L101	LR73Z0AE100J	CHIP INDUCTOR		
R759	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L102	LR73Z0AE330J	CHIP INDUCTOR		
R760	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L103	LR73Z0AE1R0J	CHIP INDUCTOR		
R761	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		L104	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	
R762	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		L107	LR73Z0AE330J	CHIP INDUCTOR		
R763	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		L108	LR73Z0AE1R0J	CHIP INDUCTOR		
R764	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L109	LR73Z0AE1R0J	CHIP INDUCTOR		
R773	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L112	LR73Z0AE1R0J	CHIP INDUCTOR		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
L181	LR73Z0AER22J	CHIP INDUCTOR			L340	LR79Z0JG82NG	CHIP INDUCTOR		
L182	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH		L341	LR79Z0JG82NG	CHIP INDUCTOR		
L183	LR77Z0AAR12J	CHIP INDUCTOR			L342	LR79Z0JG68NG	CHIP INDUCTOR		
L184	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH		L343	LR79Z0JGR10G	CHIP INDUCTOR		
L201	LR77Z0AA47NJ	CHIP INDUCTOR	47nH		L344	LR79Z0JG68NG	CHIP INDUCTOR		
L241	LR77Z0AA47NJ	CHIP INDUCTOR	47nH		L345	LR79Z0JG68NG	CHIP INDUCTOR		
L243	LR79Z0JG56NG	CHIP INDUCTOR			L346	LR79Z0JG82NG	CHIP INDUCTOR		
L244	LR79Z0MW1R5J	CHIP INDUCTOR			L347	LR79Z0JG47NG	CHIP INDUCTOR		
L245	LR79Z0MW1R5J	CHIP INDUCTOR			L348	LR79Z0JG56NG	CHIP INDUCTOR		
L251	LR79Z0JG82NG	CHIP INDUCTOR			L349	LR79Z0JG56NG	CHIP INDUCTOR		
L252	LR79Z0MW1R5J	CHIP INDUCTOR			L350	LR79Z0JG47NG	CHIP INDUCTOR		
L253	LR79Z0MW1R5J	CHIP INDUCTOR			L351	LR73Z0AE100J	CHIP INDUCTOR		
L254	LR73Z0AE100J	CHIP INDUCTOR			L501	LR73Z0AER22J	CHIP INDUCTOR		890SE
L255	LR79Z0JG82NG	CHIP INDUCTOR			L502	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	890SE
L271	LR79Z0MW1R5J	CHIP INDUCTOR			L503	LR77Z0AAR12J	CHIP INDUCTOR		890SE
L272	LR79Z0MW1R2J	CHIP INDUCTOR			L504	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	890SE
L273	LR79Z0MW1R2J	CHIP INDUCTOR			L505	LR73Z0AER22J	CHIP INDUCTOR		
L274	LR79Z0MW1R5J	CHIP INDUCTOR			L506	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	
L276	LR79Z0MWR68G	CHIP INDUCTOR			L507	LR77Z0AAR12J	CHIP INDUCTOR		
L277	LR79Z0MWR47G	CHIP INDUCTOR			L508	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	
L278	LR79Z0MWR68G	CHIP INDUCTOR			L509	LR73Z0AE100J	CHIP INDUCTOR		
L279	LR79Z0MW1R0G	CHIP INDUCTOR			L511	LR73Z0AE100J	CHIP INDUCTOR		890SE
L280	LR79Z0MWR82G	CHIP INDUCTOR			L526	LR73Z0AER18J	CHIP INDUCTOR		890SE
L281	LR79Z0MWR82G	CHIP INDUCTOR			L527	LR73Z0AER22J	CHIP INDUCTOR		890SE
L282	LR79Z0MW1R0G	CHIP INDUCTOR			L528	LR73Z0AER18J	CHIP INDUCTOR		890SE
L284	LR79Z0MWR56G	CHIP INDUCTOR			L541	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	
L285	LR79Z0MWR39G	CHIP INDUCTOR			L542	LR73Z0AER56J	CHIP INDUCTOR		
L286	LR79Z0MWR39G	CHIP INDUCTOR			L543	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	
L287	LR79Z0MWR68G	CHIP INDUCTOR			L544	LR73Z0AE100J	CHIP INDUCTOR		
L288	LR79Z0MWR56G	CHIP INDUCTOR			L545	LR77Z0AA68NJ	CHIP INDUCTOR	68nH	
L289	LR79Z0MWR56G	CHIP INDUCTOR			L546	LR73Z0AER56J	CHIP INDUCTOR		
L290	LR79Z0MWR68G	CHIP INDUCTOR			L547	LR77Z0AA47NJ	CHIP INDUCTOR	47nH	
L292	LR79Z0MWR39G	CHIP INDUCTOR			L548	LR73Z0AER56J	CHIP INDUCTOR		
L293	LR79Z0JHR27G	CHIP INDUCTOR			L549	LR77Z0AA68NJ	CHIP INDUCTOR	68nH	
L294	LR79Z0JHR27G	CHIP INDUCTOR			L601	LR73Z0AER22J	CHIP INDUCTOR		
L295	LR79Z0MWR39G	CHIP INDUCTOR			L602	LR73Z0AER22J	CHIP INDUCTOR		
L296	LR79Z0JHR33G	CHIP INDUCTOR			L603	LR73Z0AE100J	CHIP INDUCTOR		
L297	LR79Z0MWR39G	CHIP INDUCTOR			L604	LR73Z0AE100J	CHIP INDUCTOR		
L299	LR79Z0JHR33G	CHIP INDUCTOR			L605	LR73Z0AE100J	CHIP INDUCTOR		
L300	LR79Z0JHR27G	CHIP INDUCTOR			L606	LR73Z0AER39J	CHIP INDUCTOR		
L301	LR79Z0JHR22G	CHIP INDUCTOR			L607	LR73Z0AE3R3J	CHIP INDUCTOR		
L302	LR79Z0JHR27G	CHIP INDUCTOR			L608	LR73Z0AER22J	CHIP INDUCTOR		
L303	LR79Z0JHR27G	CHIP INDUCTOR			L609	LR73Z0AE3R3J	CHIP INDUCTOR		
L304	LR79Z0JHR22G	CHIP INDUCTOR			L610	LR73Z0AER39J	CHIP INDUCTOR		
L305	LR79Z0JHR27G	CHIP INDUCTOR			L651	LR73Z0AER22J	CHIP INDUCTOR		
L307	LR79Z0JHR27G	CHIP INDUCTOR			L652	LR77Z0AA39NJ	CHIP INDUCTOR	39nH	
L308	LR79Z0JHR22G	CHIP INDUCTOR			L653	LR79Z0JHR27G	CHIP INDUCTOR		
L309	LR79Z0JGR18G	CHIP INDUCTOR			L654	LR77Z0AA22NJ	CHIP INDUCTOR	22nH	
L310	LR79Z0JHR27G	CHIP INDUCTOR			L655	LR79Z0JHR27G	CHIP INDUCTOR		
L311	LR79Z0JHR33G	CHIP INDUCTOR			L656	LR77Z0AA39NJ	CHIP INDUCTOR	39nH	
L312	LR79Z0JHR27G	CHIP INDUCTOR			L657	LR73Z0AER22J	CHIP INDUCTOR		
L313	LR79Z0JHR27G	CHIP INDUCTOR			L658	LR77Z0AA47NJ	CHIP INDUCTOR	47nH	
L314	LR79Z0JHR33G	CHIP INDUCTOR			L659	LR79Z0JGR18G	CHIP INDUCTOR		
L315	LR79Z0JGR18G	CHIP INDUCTOR			L660	LR77Z0AA27NJ	CHIP INDUCTOR	27nH	
L316	LR79Z0JHR22G	CHIP INDUCTOR			L661	LR79Z0JHR22G	CHIP INDUCTOR		
L317	LR79Z0JHR22G	CHIP INDUCTOR			L662	LR77Z0AA27NJ	CHIP INDUCTOR	27nH	
L318	LR79Z0JGR18G	CHIP INDUCTOR			L663	LR79Z0JGR18G	CHIP INDUCTOR		
L319	LR79Z0JHR27G	CHIP INDUCTOR			L664	LR77Z0AA47NJ	CHIP INDUCTOR	47nH	
L320	LR79Z0JGR18G	CHIP INDUCTOR			L665	LR73Z0AE100J	CHIP INDUCTOR		
L321	LR79Z0JGR18G	CHIP INDUCTOR			L675	LR73Z0AE100J	CHIP INDUCTOR		
L322	LR79Z0JHR27G	CHIP INDUCTOR			L701	LR73Z0AE100J	CHIP INDUCTOR		890SE
L323	LR79Z0JGR12G	CHIP INDUCTOR			L702	LR77Z0AA68NJ	CHIP INDUCTOR	68nH	890SE
L324	LR79Z0JGR18G	CHIP INDUCTOR			L703	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	890SE
L325	LR79Z0JGR18G	CHIP INDUCTOR			L704	LR77Z0AA47NJ	CHIP INDUCTOR	47nH	890SE
L326	LR79Z0JGR12G	CHIP INDUCTOR			L705	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	890SE
L327	LR79Z0JGR18G	CHIP INDUCTOR			L706	LR77Z0AA47NJ	CHIP INDUCTOR	47nH	890SE
L328	LR79Z0JGR12G	CHIP INDUCTOR			L707	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	890SE
L329	LR79Z0JGR12G	CHIP INDUCTOR			L708	LR77Z0AA68NJ	CHIP INDUCTOR	68nH	890SE
L330	LR79Z0JGR18G	CHIP INDUCTOR			L709	LR73Z0AE100J	CHIP INDUCTOR		890SE
L331	LR79Z0JG82NG	CHIP INDUCTOR			L721	LR73Z0AE330J	CHIP INDUCTOR		
L332	LR79Z0JGR12G	CHIP INDUCTOR			L722	LR73Z0AER22J	CHIP INDUCTOR		
L333	LR79Z0JGR12G	CHIP INDUCTOR			L723	LR73Z0AE1R0J	CHIP INDUCTOR		
L334	LR79Z0JG82NG	CHIP INDUCTOR			L724	LR73Z0AE1R0J	CHIP INDUCTOR		
L335	LR79Z0JGR10G	CHIP INDUCTOR			L751	LR73Z0AER22J	CHIP INDUCTOR		
L336	LR79Z0JG68NG	CHIP INDUCTOR			L786	LR73Z0AER22J	CHIP INDUCTOR		
L337	LR79Z0JG68NG	CHIP INDUCTOR			L787	LR73Z0AER22J	CHIP INDUCTOR		
L338	LR79Z0JGR10G	CHIP INDUCTOR			L788	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	
L339	LR79Z0JG68NG	CHIP INDUCTOR			L801	LR73Z0AER47J	CHIP INDUCTOR	0.47uH	

△ Symbol No.	Part No.	Part Name	Description	Local
L802	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	
L803	LR73Z0AER56J	CHIP INDUCTOR		
L804	LR77Z0AA56NJ	CHIP INDUCTOR	56nH	
L805	LR73Z0AER56J	CHIP INDUCTOR		
L806	LR77Z0AAR10J	CHIP INDUCTOR	0.1uH	
CN1	E04-0491-05	PIN SOCKET		
CN300	E04-0491-05	PIN SOCKET		
CN600	E04-0491-05	PIN SOCKET		
CN650	E04-0491-05	PIN SOCKET		
CN800	E04-0491-05	PIN SOCKET		
CN870	EC710AM-0530A	FFC FPC CONNE		
CN991	E23-1280-05	TERMINAL		
CN992	E23-1280-05	TERMINAL		
CN993	E23-1280-05	TERMINAL		
CN994	E23-1280-05	TERMINAL		
CN995	E23-1280-05	TERMINAL		
CN996	E23-1280-05	TERMINAL		
F921	F53-0367-05	FUSE		
F922	F53-0367-05	FUSE		
OT1	-----	SHIELDING COVER		
X51	L7H-0099-00	TCXO		
X101	L7H-0087-00	VCXO		
X751	L7J-0172-00	QUARTZ CRYSTAL		

FINAL UNIT

XC3-062J-00(TS-890S(K))

XC3-062E-01(TS-890S(E))

Block No. [0][6]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	INA193AIDBVT	IC		
IC2	BA2904FVM	IC		
IC3	BA2904FVM	IC		
IC4	BA2904FVM	IC		
IC101	TC7SHU04FJC	IC		
IC102	TC7SHU04FJC	IC		
IC103	TA75S393F-F	IC		
IC104	TC7WH74FUJC	IC		
IC501	CD74HC4094M96	IC		
IC502	CD74HC4094M96	IC		
IC503	CD74HC4094M96	IC		
IC504	CD74HC4094M96	IC		
IC505	CD74HC4094M96	IC		
IC506	CD74HC4094M96	IC		
Q2	RD06HHF1-502	FET		
Q3	RD16HHF1-502	FET		
Q4	RD100HHF1C502	FET		
Q5	RD100HHF1C502	FET		
Q7	DTB143EK	DIGI TRANSISTOR		
Q101	CPH3910	FET		
Q102	CPH3910	FET		
Q301	2SC4617/R/	TRANSISTOR		
Q302	2SAR512P5	TRANSISTOR		
Q303	2SD2153/VW/	TRANSISTOR		
Q304	DTB143EK	DIGI TRANSISTOR		
Q305	LTC024EUBFS8	DIGI TRANSISTOR		
Q501	DTD113ZU	TRANSISTOR		
Q502	DTD113ZU	TRANSISTOR		
Q503	DTD113ZU	TRANSISTOR		
Q504	DTD113ZU	TRANSISTOR		
Q505	DTD113ZU	TRANSISTOR		
Q506	DTD113ZU	TRANSISTOR		
Q507	DTD113ZU	TRANSISTOR		
Q508	DTD113ZU	TRANSISTOR		
Q509	DTD113ZU	TRANSISTOR		
Q510	DTD113ZU	TRANSISTOR		
Q511	DTD113ZU	TRANSISTOR		
Q512	DTD113ZU	TRANSISTOR		
Q513	DTD113ZU	TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q514	DTD113ZU	TRANSISTOR		
Q515	DTD113ZU	TRANSISTOR		
Q516	DTD113ZU	TRANSISTOR		
Q517	DTD113ZU	TRANSISTOR		
Q518	DTD113ZU	TRANSISTOR		
Q519	DTD113ZU	TRANSISTOR		
Q520	DTD113ZU	TRANSISTOR		
Q521	SSM3K15AMFVF	FET		
Q522	SSM3K15AMFVF	FET		
Q523	SSM3K15AMFVF	FET		
Q524	SSM3K15AMFVF	FET		
Q525	DTD113ZU	TRANSISTOR		
Q526	DTD113ZU	TRANSISTOR		
Q527	DTD113ZU	TRANSISTOR		
Q528	DTD113ZU	TRANSISTOR		
Q529	DTD113ZU	TRANSISTOR		
Q530	DTD113ZU	TRANSISTOR		
Q531	DTD113ZU	TRANSISTOR		
Q532	DTD113ZU	TRANSISTOR		
Q534	DTD113ZU	TRANSISTOR		
Q535	DTD113ZU	TRANSISTOR		
Q536	DTD113ZU	TRANSISTOR		
Q537	DTD113ZU	TRANSISTOR		
Q538	DTD113ZU	TRANSISTOR		
Q539	DTD113ZU	TRANSISTOR		
Q540	DTD113ZU	TRANSISTOR		
Q541	SSM3K15AMFVF	FET		
Q542	SSM3K15AMFVF	FET		
Q601	RRH140P03	FET		
Q602	DTC123YE	TRANSISTOR		
Q603	2SAR573D3	TRANSISTOR		
Q604	2SCR533P5	TRANSISTOR		
Q605	2SAR573D3	TRANSISTOR		
Q606	DTC123YE	TRANSISTOR		
Q607	DTC123YE	TRANSISTOR		
Q608	DTC123YE	TRANSISTOR		
D1	DAN222WM	DIODE ARRAY		
D2	DAN222WM	DIODE ARRAY		
D3	1SS400SM	DIODE		
D5	Z5W27VJ	ZENER DIODE		
D101	DAN222WM	DIODE ARRAY		
D102	DAN222WM	DIODE ARRAY		
D103	DAN222WM	DIODE ARRAY		
D104	DAN222WM	DIODE ARRAY		
D105	DAN222WM	DIODE ARRAY		
D106	DAN222WM	DIODE ARRAY		
D107	DAN222WM	DIODE ARRAY		
D108	DAN222WM	DIODE ARRAY		
D109	DAN222WM	DIODE ARRAY		
D110	DAN222WM	DIODE ARRAY		
D111	RB706F-40	DIODE		
D112	RB706F-40	DIODE		
D113	RB480Y-90	DIODE		
D114	RB480Y-90	DIODE		
D301	1SS400SM	DIODE		
D302	L8104	DIODE		
D303	1SS400SM	DIODE		
D304	EDZV6.2B	ZENER DIODE		
D305	L8104	DIODE		
D306	L8104	DIODE		
D307	L8104	DIODE		
D308	DAN222WM	DIODE ARRAY		
D309	DAN222WM	DIODE ARRAY		
D310	DSA301LA	DIODE		
D403	DAN222WM	DIODE ARRAY		
D404	DAN222WM	DIODE ARRAY		
D405	DAN222WM	DIODE ARRAY		
D406	DAN222WM	DIODE ARRAY		
D407	DAN222WM	DIODE ARRAY		
D408	DAN222WM	DIODE ARRAY		
D409	DAN222WM	DIODE ARRAY		
D410	DAN222WM	DIODE ARRAY		
D411	DAN222WM	DIODE ARRAY		
D412	DAN222WM	DIODE ARRAY		
D413	DAN222WM	DIODE ARRAY		
D414	DAN222WM	DIODE ARRAY		
D415	DAN222WM	DIODE ARRAY		

890SE

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
D416	DAN222WM	DIODE ARRAY			C89	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
D417	DAN222WM	DIODE ARRAY			C91	C93-1900-05	C CAPACITOR	1000pF 630V	
D418	DAN222WM	DIODE ARRAY			C92	C93-1900-05	C CAPACITOR	1000pF 630V	
D419	DAN222WM	DIODE ARRAY			C93	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
D420	DAN222WM	DIODE ARRAY			C94	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
D600	UDZV5.6B	ZENER DIODE			C95	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
D601	UDZV3.6B	ZENER DIODE			C108	CC730DP2J070D	C CAPACITOR	7.0pF 630V D	
D602	DAN222WM	DIODE ARRAY			C110	C93-1877-05	C CAPACITOR	12pF 630V	
C15	CD04BQ1H220M	E CAPACITOR	22uF 50V M		C111	CC730DP2J050C	C CAPACITOR	5.0pF 630V C	
C16	CD04AY1E470M	E CAPACITOR	47uF 25V M		C113	CD04AY1E470M	E CAPACITOR	47uF 25V M	
C17	CD04BQ1H220M	E CAPACITOR	22uF 50V M		C114	C93-1876-05	C CAPACITOR	10pF 630V	890SE
C18	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C115	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C19	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C116	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C20	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C117	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	890SE
C21	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C118	CC730DP2J090D	C CAPACITOR	9.0pF 630V D	890SE
C22	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C119	C93-1877-05	C CAPACITOR	12pF 630V	890SE
C23	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C120	C93-1883-05	C CAPACITOR	39pF 630V	890SE
C24	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C121	C93-1878-05	C CAPACITOR	15pF 630V	890SE
C25	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C122	C93-1876-05	C CAPACITOR	10pF 630V	890SE
C26	CK73GB1E105K	C CAPACITOR	1uF 25V K		C123	C93-1884-05	C CAPACITOR	47pF 630V	890SE
C27	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C124	C93-1878-05	C CAPACITOR	15pF 630V	890SE
C28	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C125	C93-1876-05	C CAPACITOR	10pF 630V	890SE
C29	CC73GCH1H820J	C CAPACITOR	82pF 50V J		C126	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C30	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C127	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C31	CK73GB1E105K	C CAPACITOR	1uF 25V K		C128	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C32	C93-1807-05	C CAPACITOR	0.01uF 100V		C129	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C33	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C130	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C34	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C131	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C36	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C132	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C37	C93-1882-05	C CAPACITOR	33pF 630V		C133	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C38	C93-1807-05	C CAPACITOR	0.01uF 100V		C134	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C39	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C135	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C40	C93-1807-05	C CAPACITOR	0.01uF 100V		C136	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C41	C93-1807-05	C CAPACITOR	0.01uF 100V		C137	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C42	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C138	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C43	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C139	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C44	CD04BQ1E471M	E CAPACITOR	470uF 25V M		C140	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C45	CK73GB1E105K	C CAPACITOR	1uF 25V K		C141	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C46	CK73EB1H104K	C CAPACITOR	0.1uF 50V K		C142	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C47	CK73EB1H104K	C CAPACITOR	0.1uF 50V K		C143	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C48	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C144	CC730DP2J080D	C CAPACITOR	8.0pF 630V D	890SE
C49	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C145	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C50	CK73GB1E105K	C CAPACITOR	1uF 25V K		C146	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C51	CM73F2H271J	MICA CAPACITOR	270pF 500V J		C147	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C52	CM73F2H271J	MICA CAPACITOR	270pF 500V J		C148	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C53	CM73F2H151J	MICA CAPACITOR	150pF 500V J		C149	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C54	CM73F2H151J	MICA CAPACITOR	150pF 500V J		C150	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C55	CM73F2H151J	MICA CAPACITOR	150pF 500V J		C151	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C56	C93-1901-05	C CAPACITOR	0.22uF 250V		C152	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C57	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C153	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C58	CK73EBB1E225K	C CAPACITOR	2.2uF 25V K		C154	CC730DP2J080D	C CAPACITOR	8.0pF 630V D	
C59	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C155	C93-1887-05	C CAPACITOR	82pF 630V	
C60	C93-1807-05	C CAPACITOR	0.01uF 100V		C157	C93-1888-05	C CAPACITOR	100pF 630V	
C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C158	C93-1888-05	C CAPACITOR	100pF 630V	
C62	C93-1900-05	C CAPACITOR	1000pF 630V		C159	C93-1893-05	C CAPACITOR	270pF 630V	
C63	CC730DP2J030C	C CAPACITOR	3.0pF 630V C		C160	C93-1880-05	C CAPACITOR	22pF 630V	
C64	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C161	C93-1893-05	C CAPACITOR	270pF 630V	
C65	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C162	CC730DP2J080D	C CAPACITOR	8.0pF 630V D	
C66	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C163	C93-1883-05	C CAPACITOR	39pF 630V	
C67	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C164	C93-1885-05	C CAPACITOR	56pF 630V	
C68	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C165	CC730DP2J090D	C CAPACITOR	9.0pF 630V D	
C69	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C166	C93-1895-05	C CAPACITOR	390pF 630V	
C70	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C167	C93-1893-05	C CAPACITOR	270pF 630V	
C71	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C168	C93-1884-05	C CAPACITOR	47pF 630V	
C72	CK73GB1E105K	C CAPACITOR	1uF 25V K		C169	C93-1893-05	C CAPACITOR	270pF 630V	
C73	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C170	C93-1885-05	C CAPACITOR	56pF 630V	
C74	CK73GB1E105K	C CAPACITOR	1uF 25V K		C171	C93-1889-05	C CAPACITOR	120pF 630V	
C75	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C172	C93-1888-05	C CAPACITOR	100pF 630V	
C76	CK73GB1E105K	C CAPACITOR	1uF 25V K		C173	C93-1882-05	C CAPACITOR	33pF 630V	
C77	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C174	C93-1883-05	C CAPACITOR	39pF 630V	
C78	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		C175	C93-1876-05	C CAPACITOR	10pF 630V	
C79	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C176	C93-1885-05	C CAPACITOR	56pF 630V	
C80	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C177	C93-1888-05	C CAPACITOR	100pF 630V	
C81	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C178	CC730DP2J151J	C CAPACITOR	150pF 630V J	
C82	CC73GCH1H470J	C CAPACITOR	47pF 50V J		C179	CC730DP2J151J	C CAPACITOR	150pF 630V J	
C83	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K		C180	CC730DP2J151J	C CAPACITOR	150pF 630V J	
C86	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C181	CC730DP2J561J	C CAPACITOR	560pF 630V J	
					C182	C93-1886-05	C CAPACITOR	68pF 630V	

△ Symbol No.	Part No.	Part Name	Description	Local
C183	C93-1882-05	C CAPACITOR	33pF 630V	
C184	C93-1878-05	C CAPACITOR	15pF 630V	
C185	C93-1878-05	C CAPACITOR	15pF 630V	
C186	C93-1887-05	C CAPACITOR	82pF 630V	
C187	C93-1879-05	C CAPACITOR	18pF 630V	
C188	C93-1879-05	C CAPACITOR	18pF 630V	
C189	C93-1885-05	C CAPACITOR	56pF 630V	
C190	C93-1886-05	C CAPACITOR	68pF 630V	
C191	C93-1900-05	C CAPACITOR	1000pF 630V	
C192	CC730DP2J561J	C CAPACITOR	560pF 630V J	
C193	C93-1900-05	C CAPACITOR	1000pF 630V	
C194	C93-1894-05	C CAPACITOR	330pF 630V	
C195	C93-1892-05	C CAPACITOR	220pF 630V	
C196	CC730DP2J080D	C CAPACITOR	8.0pF 630V D	
C197	C93-1884-05	C CAPACITOR	47pF 630V	
C198	C93-1900-05	C CAPACITOR	1000pF 630V	
C199	C93-1884-05	C CAPACITOR	47pF 630V	
C200	C93-1893-05	C CAPACITOR	270pF 630V	
C201	C93-1892-05	C CAPACITOR	220pF 630V	
C202	CC730DP2J561J	C CAPACITOR	560pF 630V J	
C203	C93-1888-05	C CAPACITOR	100pF 630V	
C204	C93-1885-05	C CAPACITOR	56pF 630V	
C205	C93-1884-05	C CAPACITOR	47pF 630V	
C206	C93-1889-05	C CAPACITOR	120pF 630V	
C207	C93-1877-05	C CAPACITOR	12pF 630V	
C208	C93-1889-05	C CAPACITOR	120pF 630V	
C209	C93-1885-05	C CAPACITOR	56pF 630V	
C210	C93-1885-05	C CAPACITOR	56pF 630V	
C211	C93-1886-05	C CAPACITOR	68pF 630V	
C212	C93-1886-05	C CAPACITOR	68pF 630V	
C213	C93-1887-05	C CAPACITOR	82pF 630V	
C214	C93-1888-05	C CAPACITOR	100pF 630V	
C215	C93-1888-05	C CAPACITOR	100pF 630V	
C216	CC730DP2J040C	C CAPACITOR	4.0pF 630V C	
C217	C93-1881-05	C CAPACITOR	27pF 630V	
C218	C93-1884-05	C CAPACITOR	47pF 630V	
C219	C93-1881-05	C CAPACITOR	27pF 630V	
C220	C93-1878-05	C CAPACITOR	15pF 630V	
C221	C93-1896-05	C CAPACITOR	470pF 630V	
C222	C93-1889-05	C CAPACITOR	120pF 630V	
C223	C93-1893-05	C CAPACITOR	270pF 630V	
C224	C93-1893-05	C CAPACITOR	270pF 630V	
C225	C93-1882-05	C CAPACITOR	33pF 630V	
C226	C93-1900-05	C CAPACITOR	1000pF 630V	
C227	C93-1893-05	C CAPACITOR	270pF 630V	
C228	C93-1893-05	C CAPACITOR	270pF 630V	
C229	C93-1882-05	C CAPACITOR	33pF 630V	
C230	C93-1879-05	C CAPACITOR	18pF 630V	
C231	C93-1884-05	C CAPACITOR	47pF 630V	
C232	CC730DP2J151J	C CAPACITOR	150pF 630V J	
C233	C93-1881-05	C CAPACITOR	27pF 630V	
C234	C93-1887-05	C CAPACITOR	82pF 630V	
C235	CC730DP2J080D	C CAPACITOR	8.0pF 630V D	
C236	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C237	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C238	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C239	CC730DP2J020C	C CAPACITOR	2.0pF 630V C	
C240	CC73GCH1H560J	C CAPACITOR	56pF 50V J	
C241	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C242	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C243	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C244	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C245	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C246	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C247	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C248	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C249	CC730DP2J020C	C CAPACITOR	2.0pF 630V C	
C250	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	
C251	CC73GCH1H680J	C CAPACITOR	68pF 50V J	
C252	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C253	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C254	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C255	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C256	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C257	C93-1876-05	C CAPACITOR	10pF 630V	890SE
C258	C93-1882-05	C CAPACITOR	33pF 630V	
C259	C93-1882-05	C CAPACITOR	33pF 630V	
C260	CC730DP2J080D	C CAPACITOR	8.0pF 630V D	

△ Symbol No.	Part No.	Part Name	Description	Local
C265	CC73GCH1H471J	C CAPACITOR	470pF 50V J	
C302	C93-1877-05	C CAPACITOR	12pF 630V	
C308	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C309	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	
C310	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C312	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C313	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C314	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C315	C93-1900-05	C CAPACITOR	1000pF 630V	
C316	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C317	C93-1901-05	C CAPACITOR	0.22uF 250V	
C318	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C319	C93-1902-05	C CAPACITOR	1uF 50V	
C320	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C321	C93-1873-05	C CAPACITOR	10000pF 630V	
C322	C93-1873-05	C CAPACITOR	10000pF 630V	
C323	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C324	C93-1900-05	C CAPACITOR	1000pF 630V	
C325	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C326	C93-1873-05	C CAPACITOR	10000pF 630V	
C327	C93-1873-05	C CAPACITOR	10000pF 630V	
C328	C93-1873-05	C CAPACITOR	10000pF 630V	
C329	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C330	C93-1901-05	C CAPACITOR	0.22uF 250V	
C331	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C332	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C333	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C334	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C335	C93-1902-05	C CAPACITOR	1uF 50V	
C336	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C337	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	
C338	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C339	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C340	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C341	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C342	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C343	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C344	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C345	C93-1873-05	C CAPACITOR	10000pF 630V	
C346	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C347	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C349	C93-1873-05	C CAPACITOR	10000pF 630V	
C350	C93-1873-05	C CAPACITOR	10000pF 630V	
C351	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C352	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C353	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C354	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C355	C93-1876-05	C CAPACITOR	10pF 630V	
C356	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C357	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C409	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C410	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C411	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C412	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C413	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C414	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C415	C91-3115-05	HV CAPACITOR	10pF 2kV	
C416	C91-3115-05	HV CAPACITOR	10pF 2kV	
C417	C91-3115-05	HV CAPACITOR	10pF 2kV	
C418	C91-3115-05	HV CAPACITOR	10pF 2kV	
C419	C91-3115-05	HV CAPACITOR	10pF 2kV	
C420	C91-3115-05	HV CAPACITOR	10pF 2kV	
C421	C91-3115-05	HV CAPACITOR	10pF 2kV	
C422	C91-3115-05	HV CAPACITOR	10pF 2kV	
C423	C91-3115-05	HV CAPACITOR	10pF 2kV	
C424	C91-3115-05	HV CAPACITOR	10pF 2kV	
C425	C91-3115-05	HV CAPACITOR	10pF 2kV	
C426	C91-3115-05	HV CAPACITOR	10pF 2kV	
C427	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C428	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C429	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C430	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C431	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C432	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C433	C91-3115-05	HV CAPACITOR	10pF 2kV	
C434	C91-3115-05	HV CAPACITOR	10pF 2kV	
C435	C91-3115-05	HV CAPACITOR	10pF 2kV	
C436	C91-3115-05	HV CAPACITOR	10pF 2kV	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C437	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C551	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C438	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C552	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C439	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C553	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C440	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C554	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C441	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C555	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C442	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C556	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C443	C91-3126-15	HV CAPACITOR	10pF 3kV		C557	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C444	C91-3126-15	HV CAPACITOR	10pF 3kV		C558	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C445	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C559	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C446	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C601	CD04AZ1E471M	E CAPACITOR	470uF 25V M	
C447	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C602	CK73GB1C474K	C CAPACITOR	0.47uF 16V K	
C448	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C603	C93-1896-05	C CAPACITOR	470pF 630V	
C449	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C604	C93-1901-05	C CAPACITOR	0.22uF 250V	
C450	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C605	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C451	C91-3127-15	HV CAPACITOR	18pF 3kV		C606	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C452	C91-3127-15	HV CAPACITOR	18pF 3kV		C607	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	
C453	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C608	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C454	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C609	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C455	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C610	CD04AY1E470M	E CAPACITOR	47uF 25V M	
C456	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C611	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C457	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C612	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C458	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C613	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C459	C91-3127-15	HV CAPACITOR	18pF 3kV		C614	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C460	C91-3127-15	HV CAPACITOR	18pF 3kV		C615	CK73GB1C474K	C CAPACITOR	0.47uF 16V K	
C461	C91-3127-15	HV CAPACITOR	18pF 3kV		C617	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C462	C91-3127-15	HV CAPACITOR	18pF 3kV		C618	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C463	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C619	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C464	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C620	CD04AZ1V101M	E CAPACITOR	100uF 35V M	
C465	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C621	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C466	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C622	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C467	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C623	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C468	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C624	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C469	C91-3123-05	HV CAPACITOR	150pF 3kV		C625	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C470	C91-3123-05	HV CAPACITOR	150pF 3kV		C626	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C471	C91-3123-05	HV CAPACITOR	150pF 3kV		C627	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C472	C91-3123-05	HV CAPACITOR	150pF 3kV		C628	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	
C473	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C629	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C474	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C630	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C475	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C631	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C476	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C632	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C477	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C633	CC73GCH1H221J	C CAPACITOR	220pF 50V J	
C478	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C634	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C479	C91-3123-05	HV CAPACITOR	150pF 3kV		C635	CC73GCH1H221J	C CAPACITOR	220pF 50V K	
C480	C91-3123-05	HV CAPACITOR	150pF 3kV		C636	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C481	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C637	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C482	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C638	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C483	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C639	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C484	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		C640	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C485	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		TC101	C0F-0010-00	TRIM CAPACITOR		
C486	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K						
C487	C91-3123-05	HV CAPACITOR	150pF 3kV		R14	RK73GH2A563D	MG RESISTOR	56kΩ 1/10W D	
C488	C91-3123-05	HV CAPACITOR	150pF 3kV		R15	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
C489	C91-3123-05	HV CAPACITOR	150pF 3kV		R16	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
C490	C91-3123-05	HV CAPACITOR	150pF 3kV		R17	RK73GB2A680J	MG RESISTOR	68Ω 1/10W J	
C491	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R18	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
C492	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R19	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
C493	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R20	R92-3625-05	RESISTOR	0.1Ω 0.33W	
C494	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R21	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
C495	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R22	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	
C496	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R23	RK73EB2E5R6J	MG RESISTOR	5.6Ω 1/4W J	
C501	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R24	R92-3625-05	RESISTOR	0.1Ω 0.33W	
C502	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R25	R92-3625-05	RESISTOR	0.1Ω 0.33W	
C503	CK73GBB1H102K	C CAPACITOR	1000pF 50V K		R26	RK73PB2H681J	MG RESISTOR	680Ω 1/2W J	
C504	CC73GCH1H100B	C CAPACITOR	10pF 50V B		R27	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
C505	CC73GCH1H100B	C CAPACITOR	10pF 50V B		R28	RS16AB3A151J	OMF RESISTOR	150Ω 1W J	
C506	CC73GCH1H100B	C CAPACITOR	10pF 50V B		R29	RS16AB3A151J	OMF RESISTOR	150Ω 1W J	
C507	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R30	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
C508	CC73GCH1H221J	C CAPACITOR	220pF 50V J		R31	RK73FB2B223J	MG RESISTOR	22kΩ 1/8W J	
C509	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R32	RK73FB2B223J	MG RESISTOR	22kΩ 1/8W J	
C510	CC73GCH1H221J	C CAPACITOR	220pF 50V J		R33	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	
C511	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R34	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	
C512	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R35	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	
C513	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K		R36	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	
C514	CC73GCH1H221J	C CAPACITOR	220pF 50V J		R37	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	
C515	CC73GCH1H100B	C CAPACITOR	10pF 50V B		R38	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	
C516	CC73GCH1H100B	C CAPACITOR	10pF 50V B		R39	RS14DB3D180J	OMF RESISTOR	18Ω 2W J	
C517	CC73GCH1H100B	C CAPACITOR	10pF 50V B		R40	RS14DB3D180J	OMF RESISTOR	18Ω 2W J	
C518	CC73GCH1H221J	C CAPACITOR	220pF 50V J		R41	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R42	RS14DB3A4R7J	OMF RESISTOR	4.7Ω 1W J	
R43	R92-3636-05	RESISTOR	0.003Ω 1W	
R44	R92-3636-05	RESISTOR	0.003Ω 1W	
R45	R92-3636-05	RESISTOR	0.003Ω 1W	
R46	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	
R47	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	
R48	RK73FB2B121J	MG RESISTOR	120Ω 1/8W J	
R49	RK73FB2B121J	MG RESISTOR	120Ω 1/8W J	
R50	RK73FB2B121J	MG RESISTOR	120Ω 1/8W J	
R51	RK73FB2B121J	MG RESISTOR	120Ω 1/8W J	
R52	RK73GH2A103D	MG RESISTOR	10kΩ 1/10W D	
R53	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R54	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J	
R55	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	
R56	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R57	RK73GB2A392J	MG RESISTOR	3.9kΩ 1/10W J	
R58	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	
R59	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R61	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R64	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R65	RK73GH2A152D	MG RESISTOR	1.5kΩ 1/10W D	
R66	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	
R67	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
R68	RK73PB2H681J	MG RESISTOR	680Ω 1/2W J	
R69	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R70	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R71	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	
R72	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R73	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	
R74	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R75	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R76	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	
R77	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R78	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R79	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R80	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	
R81	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	
R82	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	
R83	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R90	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R91	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R92	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R93	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	
R96	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	890SK
R97	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	890SK
R103	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	
R104	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	
R105	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	
R106	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R107	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R108	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R109	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R110	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R111	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R112	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R113	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R114	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R115	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R116	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R117	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R118	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R119	RK73PB2H330J	MG RESISTOR	33Ω 1/2W J	
R120	RK73PB2H330J	MG RESISTOR	33Ω 1/2W J	
R121	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	
R122	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	
R123	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R125	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R126	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R127	RK73PB2H750J	MG RESISTOR	75Ω 1/2W J	
R128	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R129	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R130	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R131	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R132	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R133	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R134	RK73PB2H330J	MG RESISTOR	33Ω 1/2W J	
R135	RK73PB2H330J	MG RESISTOR	33Ω 1/2W J	
R137	RK73PB2H750J	MG RESISTOR	75Ω 1/2W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R140	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R141	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R301	R92-0150-05	JUMPER RESISTOR	0.003Ω 2W	
R302	R92-0150-05	JUMPER RESISTOR	0.003Ω 2W	
R303	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	
R304	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	
R305	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	
R306	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
R307	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	
R308	RK73PB2H6R8J	MG RESISTOR	6.8Ω 1/2W J	
R309	RK73PB2H6R8J	MG RESISTOR	6.8Ω 1/2W J	
R310	RK73PB2H6R8J	MG RESISTOR	6.8Ω 1/2W J	
R311	RK73PB2H6R8J	MG RESISTOR	6.8Ω 1/2W J	
R312	RK73FB2B473J	MG RESISTOR	47kΩ 1/8W J	
R313	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R314	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	
R315	RS14DB3A1R0J	OMF RESISTOR	1.0Ω 1W J	
R316	RS14DB3A1R0J	OMF RESISTOR	1.0Ω 1W J	
R317	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	
R318	RK73FB2B104J	MG RESISTOR	100kΩ 1/8W J	
R319	RK73FB2B104J	MG RESISTOR	100kΩ 1/8W J	
R320	RK73FB2B104J	MG RESISTOR	100kΩ 1/8W J	
R321	RK73FB2B104J	MG RESISTOR	100kΩ 1/8W J	
R324	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R325	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R330	RK73FB2B820J	MG RESISTOR	82Ω 1/8W J	
R331	RK73FB2B820J	MG RESISTOR	82Ω 1/8W J	
R414	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R416	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R417	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R418	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R419	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R420	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R421	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R422	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R423	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R424	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R425	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R426	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R427	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R428	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R429	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R430	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R431	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R432	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R433	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R434	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R435	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R436	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R437	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R438	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R439	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R440	RK73FB2B560J	MG RESISTOR	56Ω 1/8W J	
R501	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R502	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R503	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R504	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R505	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R506	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R507	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R508	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R509	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R510	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R511	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R512	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R513	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R514	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R515	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	
R516	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R607	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R608	RK73PB2H1R0J	MG RESISTOR	1Ω 1/2W J	
R609	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	
R610	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R611	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	
R612	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	
R622	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	
R623	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	
R624	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R625	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		L302	L3D-0054-00	CHOKE COIL		
R626	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		L303	L41-4705-33	CHIP INDUCTOR		
R627	RK73PB2H2R2J	MG RESISTOR	2.2Ω 1/2W J		L305	LR79Z0PM100M	CHIP INDUCTOR		
R628	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		L308	L34-1232-15	AIR CORE COIL		
R629	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J		L403	LR79Z0PM100M	CHIP INDUCTOR		
R630	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J		L404	L39-1440-15	TOROIDAL COIL		
R634	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J		L405	L39-1440-15	TOROIDAL COIL		
R635	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		L406	L34-4633-05	AIR CORE COIL		
R636	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J		L407	L34-4630-05	AIR CORE COIL		
R637	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J		L408	L34-4490-05	AIR CORE COIL		
R638	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J		L409	L34-4490-05	AIR CORE COIL		
R639	RK73PB2H271J	MG RESISTOR	270Ω 1/2W J		L410	L34-4628-05	AIR CORE COIL		
R640	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J		L411	L34-4490-05	AIR CORE COIL		
R701	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	890SK	L412	L39-1568-05	TOROIDAL COIL		
R704	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	890SE	L413	L3E-0042-00	AIR CORE COIL		
R705	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L415	L3E-0043-00	AIR CORE COIL		
R706	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J		L601	L39-1550-05	TOROIDAL COIL		
					L603	L92-0641-05	FERRITE CORE		
L5	LB73F0BW-002	CHIP FERRITE			L604	L92-0641-05	FERRITE CORE		
L6	LB73F0BW-002	CHIP FERRITE			L605	LR73Z0AE470J	CHIP INDUCTOR		
L7	L33-1552-05	CHIP INDUCTOR			L606	LR73Z0AE470J	CHIP INDUCTOR		
L8	LR77Z0AA12NJ	CHIP INDUCTOR	12nH		L607	LR79Z0PM100M	CHIP INDUCTOR		
L9	L92-0641-05	FERRITE CORE			L608	LR73Z0AE470J	CHIP INDUCTOR		
L10	L92-0641-05	FERRITE CORE							
L11	L39-1434-25	TOROIDAL COIL			CN1	E04-0491-05	PIN SOCKET		
L12	L3K-0096-00	TOROIDAL COIL			CN301	E04-0491-05	PIN SOCKET		
L13	L34-4928-05	COIL			CN302	E23-1310-05	TEST TERMINAL		
L16	L41-4705-33	CHIP INDUCTOR			CN303	E23-1310-05	TEST TERMINAL		
L17	L39-1569-05	TOROIDAL COIL			CN304	E04-0491-05	PIN SOCKET		
L18	LR73Z0AE470J	CHIP INDUCTOR			CN305	E04-0491-05	PIN SOCKET		
L20	L34-4606-15	AIR CORE COIL			CN401	E04-0491-05	PIN SOCKET		
L21	L39-0421-04	COIL			CN402	E04-0491-05	PIN SOCKET		
L24	LR73Z0AE470J	CHIP INDUCTOR			CN601	E41-1683-05	PIN ASSY		
L25	L34-1231-15	AIR CORE COIL			CN602	E41-1683-05	PIN ASSY		
L101	L34-4925-15	AIR CORE COIL			CN603	EC710AM-0528A	FFC FPC CONNE		
L102	L39-1456-15	TOROIDAL COIL			CN604	E40-6529-05	PIN ASSY		
L103	L34-1282-05	AIR CORE COIL			CN605	EC710AJ-1013A	FFC FPC CONNE		
L104	L3E-0049-00	AIR CORE COIL			F601	F53-0404-05	FUSE(UL/CSA)		
L105	L39-1259-15	TOROIDAL COIL			F602	FZA10BV-5R0	FUSE (CC)		
L106	L39-1547-05	TOROIDAL COIL			F603	FZA10BV-5R0	FUSE (CC)		
L107	L34-1282-05	AIR CORE COIL			K101	S51-1420-05	RELAY		
L108	L39-1457-15	TOROIDAL COIL			K102	S51-1420-05	RELAY		
L109	L39-1457-15	TOROIDAL COIL			K103	S76-0423-05	RELAY		
L110	L39-1221-15	TOROIDAL COIL			K104	S76-0423-05	RELAY		
L111	L39-1519-15	TOROIDAL COIL			K105	S76-0423-05	RELAY		
L112	L39-1570-05	TOROIDAL COIL			K106	S76-0423-05	RELAY		
L113	L39-1549-05	TOROIDAL COIL			K107	S76-0423-05	RELAY		
L114	L39-1260-15	TOROIDAL COIL			K108	S76-0423-05	RELAY		
L115	L39-1546-05	TOROIDAL COIL			K109	S76-0423-05	RELAY		
L116	L39-1405-15	TOROIDAL COIL			K110	S51-1420-05	RELAY		
L117	L39-1457-15	TOROIDAL COIL			K111	S76-0423-05	RELAY		
L118	L39-1221-15	TOROIDAL COIL			K112	S76-0423-05	RELAY		
L119	L34-4925-15	AIR CORE COIL			K113	S76-0423-05	RELAY		
L120	L34-1281-05	AIR CORE COIL			K114	S76-0423-05	RELAY		
L121	L39-1456-15	TOROIDAL COIL			K115	S76-0423-05	RELAY		
L122	L3E-0050-00	AIR CORE COIL			K116	S76-0423-05	RELAY		
L123	L34-1231-15	AIR CORE COIL			K117	S51-1420-05	RELAY		
L124	L3K-0075-00	TOROIDAL COIL			K118	S76-0423-05	RELAY		
L125	L39-1442-05	TOROIDAL COIL			K119	S51-1420-05	RELAY		890SE
L126	L39-1443-05	TOROIDAL COIL			K120	S51-1420-05	RELAY		890SE
L127	L34-4652-05	AIR CORE COIL		890SE	K301	S76-0424-05	RELAY		
L128	L3E-0040-00	AIR CORE COIL		890SE	K302	S76-0424-05	RELAY		
L129	L3K-0074-00	TOROIDAL COIL		890SE	K303	S76-0472-05	RELAY		
L130	L41-4705-33	CHIP INDUCTOR		890SE	K304	S76-0472-05	RELAY		
L131	L41-4705-33	CHIP INDUCTOR			K403	S7G-0010-00	MAGNETIC RELAY		
L132	L41-4705-33	CHIP INDUCTOR			K404	S7G-0010-00	MAGNETIC RELAY		
L133	L41-4705-33	CHIP INDUCTOR			K405	S76-0480-05	RELAY		
L134	L41-4705-33	CHIP INDUCTOR			K406	S76-0480-05	RELAY		
L135	L41-4705-33	CHIP INDUCTOR			K407	S7G-0010-00	MAGNETIC RELAY		
L136	L41-4705-33	CHIP INDUCTOR			K408	S76-0480-05	RELAY		
L137	L41-4705-33	CHIP INDUCTOR			K409	S76-0480-05	RELAY		
L138	L41-4705-33	CHIP INDUCTOR			K410	S7G-0010-00	MAGNETIC RELAY		
L139	L41-4705-33	CHIP INDUCTOR			K411	S76-0480-05	RELAY		
L140	L33-0695-05	CHOKE COIL			K412	S76-0480-05	RELAY		
L141	LR79Q0CW222J	CHIP INDUCTOR			K413	S7G-0010-00	MAGNETIC RELAY		
L142	LR73Z0AE470J	CHIP INDUCTOR			K414	S76-0480-05	RELAY		
L143	LR73Z0AER47J	CHIP INDUCTOR	0.47uH		K415	S76-0480-05	RELAY		
L301	L41-4705-33	CHIP INDUCTOR			K416	S7G-0010-00	MAGNETIC RELAY		

△ Symbol No.	Part No.	Part Name	Description	Local
K417	S76-0480-05	RELAY		
K418	S76-0480-05	RELAY		
K419	S7G-0010-00	MAGNETIC RELAY		
K420	S76-0480-05	RELAY		
K421	S76-0480-05	RELAY		
K422	S7G-0010-00	MAGNETIC RELAY		
K423	S76-0480-05	RELAY		
K424	S76-0480-05	RELAY		
K425	S7G-0010-00	MAGNETIC RELAY		
K426	S76-0480-05	RELAY		
K427	S76-0480-05	RELAY		
K428	S7G-0010-00	MAGNETIC RELAY		
TH1	NCP18XH103F0S	N THERMISTOR		
W1	E37-1480-05	L.WIRE W.TER.		