


pin 33 : NC : - : Not in use.
pin 34 : NC : - : Not in use.
pin 35 : NC : - : Not in use.
pin 36 : NC : - : Not in use.
pin 37 : NC : - : Not in use.
pin 38 : nRESET : IN : CP reset(active low).
pin 39 : VSS : - : Supply voltage, negative terminal.
pin 40 : VCC : - : Supply voltage positive terminal.

EXPLODED VIEW / PARTS LIST

CD mechanism section: 929-5016-80


* The exploded view is on page 9

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB	1	39	621-1750-20	POWER GEAR C	1
2	966-1743-21	DRIVE-PLT-ASSY	1	40	621-1751-20	POWER GEAR D	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1	41	621-1752-20	DISC STOPPER	1
4	SMA-197-100	SLED MOTOR-ASSY	1	42	621-1753-20	CLAMPER RING	1
5	345-5476-20	CUSHION RUBBER	1	43	621-1754-20	GEAR BASE	1
6	620-1023-23	CLAMPER PLATE	1	44	622-1571-21	ROLLER SHAFT	1
7	620-1026-21	SPRING PLATE	1	45	624-0020-00	LEAD SCREW	1
8	620-1596-23	CLAMPER LINK	1	46	629-0081-21	DAMPER F	2
9	620-1598-22	UPPER CHASSIS	1	47	629-0082-21	DAMPER R	1
10	620-1752-20	SENSOR ARM	1	48	716-1507-01	SCREW(M2x3)	1
11	620-1753-20	ID-LOCK PLATE	1	49	716-1670-01	SCREW(M2x4)	4
12	620-1766-20	LOWER CHASSIS	1	50	716-1733-01	SCREW(M1.7x2.3)	2
13	621-0608-21	SECOND GEAR	1	51	716-3469-01	SCREW(1.7x4)	2
14	621-0609-20	BASE GEAR	1	52	716-3473-01	SCREW(M2x3)	1
15	621-0610-20	IDLE GEAR A	1	53	716-3551-00	SCREW(M1.4x2.5)	2
16	621-0611-20	IDLE GEAR B	1	54	750-7865-20	SHIFT SPRING	1
17	621-0612-21	ROLLER GEAR A	1	55	750-7866-20	RACK SPRING	1
18	621-0620-20	THREAD GEAR A	1	56	750-7867-20	CLAMPER SPRING	1
19	621-0621-20	THREAD GEAR B	1	57	750-7868-20	ID-LOCK SPRING	1
20	621-0623-23	LS-HOLDER	1	58	750-7869-20	SENSOR SPRING	1
21	621-0624-22	GUIDE RAIL	1	59	750-7870-20	DR-SPRING F	2
22	621-0711-21	LOADING ROLLER	2	60	750-7871-20	DR-SPRING RA	1
23	621-0718-21	ROLLER GUIDE	1	61	750-7872-20	DR-SPRING RB	1
24	621-0719-20	ROLLER GEAR	1	62	750-7873-20	DR-SPRING C	1
25	621-0720-20	ROLLER GEAR C	1	63	750-6797-20	ROLLER SPRING L	1
26	621-0721-20	ROLLER GEAR D	1	64	750-6798-20	ROLLER SPRING R	1
27	621-0728-20	STOPPER LINK	1	65	714-2003-8B	SCREW(M2x3)	2
28	621-1719-20	IDLE CASE	1	66	780-2025-00	SCREW(M2x2.5)	3
29	621-1726-20	ROLLER SLEEVE	2	67	781-1730-00	SCREW(M1.7x3)	1
30	621-1729-20	SH-BASE	1	68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
31	621-1742-20	UPPER GUIDE	1	69	969-0071-30	PICKUP-ASSY	1
32	621-1743-20	SHIFT LEVER	1	70	816-2590-00	SPECIAL LEAD(GRN)	1
33	621-1744-20	RACK	1	71	816-2591-00	SPECIAL LEAD(YEL)	1
34	621-1745-20	LOCK ARM L	1	72	816-2592-00	SPECIAL LEAD(BLUE)	1
35	621-1746-20	LOCK ARM R	1	73	816-2593-00	SPECIAL LEAD(PUR)	1
36	621-1747-20	GEAR COVER	1	74	966-1722-20	SH-RACK-ASSY	1
37	621-1748-20	POWER GEAR A	1	75	816-2624-50	FLAT WIRE	1
38	621-1749-20	POWER GEAR B	1				

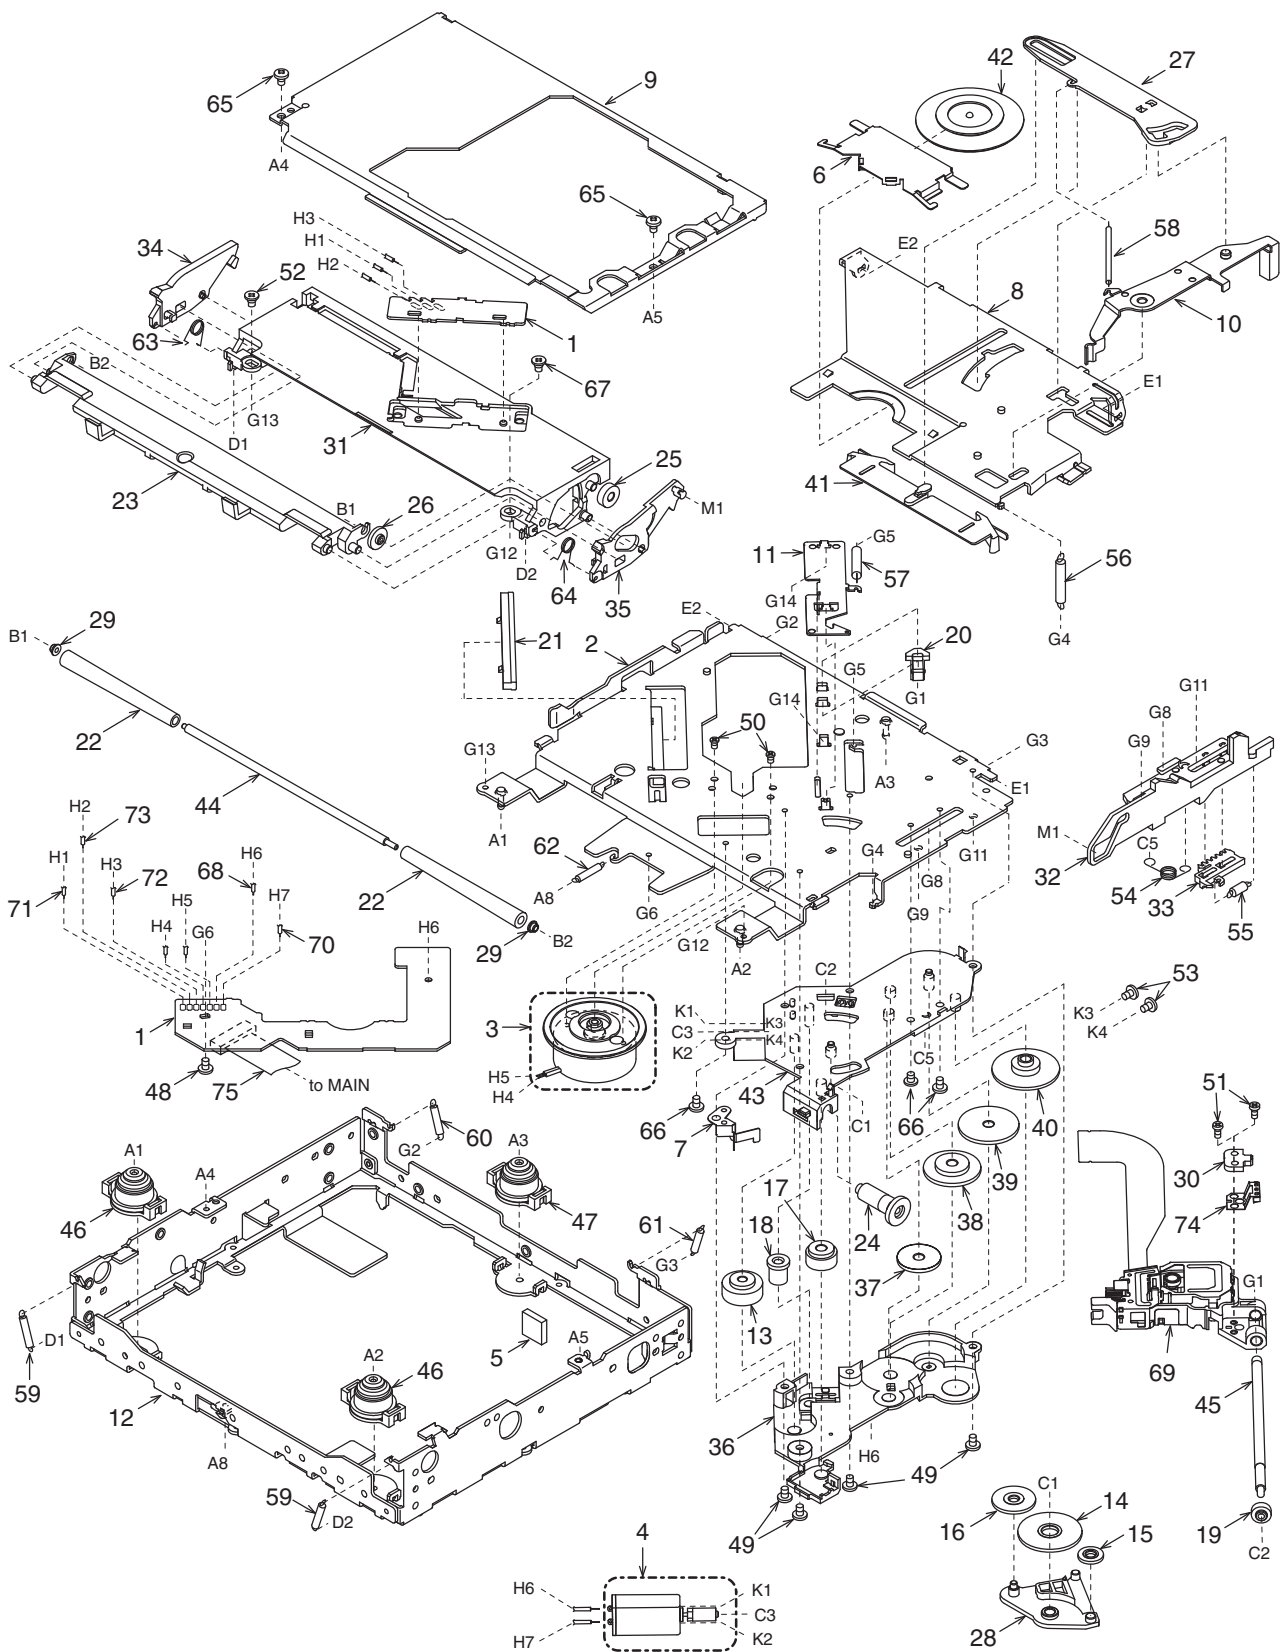


EXPLODED VIEW / PARTS LIST

DCP section

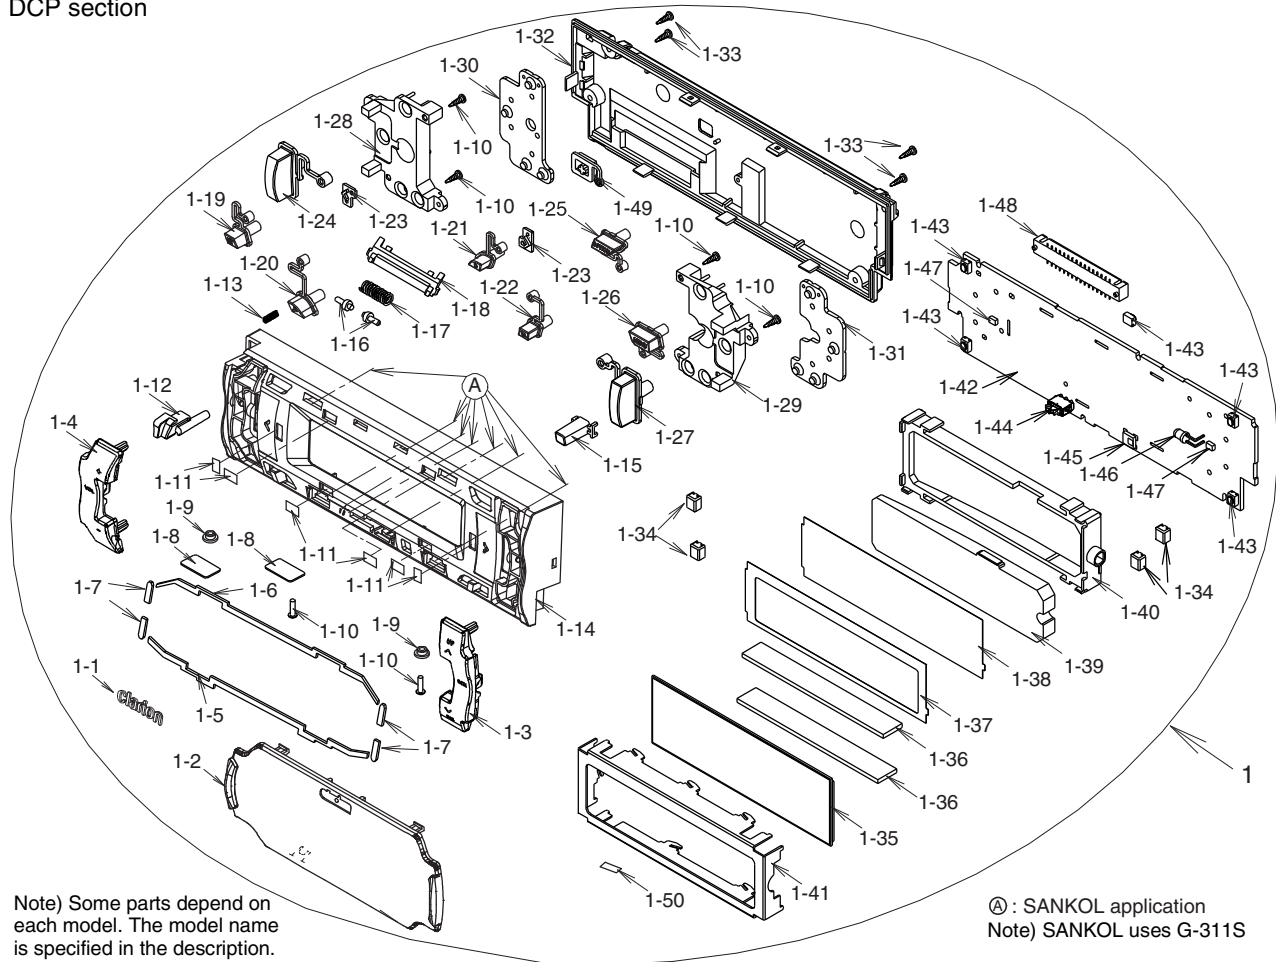

NO	PART NO	DESCRIPTION	Q'TY	NO	PART NO	DESCRIPTION	Q'TY
1	DCP-608-600	DCP ASSY(PE-3044B-A)	1	1-24	382-8175-00	BUTTON	1
	DCP-630-800	DCP ASSY(PE-3044K-A/B)	1	1-25	382-8176-01	BUTTON	1
1-1	335-7724-00	BRAND	1	1-26	382-8179-01	BUTTON	1
1-2	373-1125-22	SEEK PANEL(PE-3044B-A)	1	1-27	382-8177-00	BUTTON	1
	373-1125-23	SEEK PANEL(PE-3044K-A/B)	1	1-28	335-7997-00	ILLUMI PLATE	1
1-3	382-8178-00	BUTTON	1	1-29	335-7996-00	ILLUMI PLATE	1
1-4	382-8171-00	BUTTON	1	1-30	345-5979-00	RUBBER KEY	1
1-5	347-8246-00	LEATHER SHEET	1	1-31	345-5980-00	RUBBER KEY	1
1-6	347-8245-00	LEATHER SHEET	1	1-32	335-7998-00	REAR CVR	1
1-7	347-8208-00	LEATHER SHEET	4	1-33	716-0872-62	SCREW(M1.7x8)	4
1-8	347-8210-00	TRIM CVR	2	1-34	345-5983-00	RUBBER SPACER	4
1-9	335-8004-01	ROLLER	2	1-35	379-1382-51	INDICATOR(LCD)	1
1-10	716-0872-51	SCREW(M1.7x6)	6	1-36	345-5981-00	RUBBER CONNECTOR	2
1-11	347-8251-00	FILM	6	1-37	347-8152-00	BLACK FILM	1
1-12	382-8170-00	REL BUTTON	1	1-38	347-8153-00	FILM	1
1-13	750-6720-00	SPRING	1	1-39	335-7999-00	ILLUMI PLATE	1
1-14	370-6262-11	ESCUTCHEON(PE-3044B-A)	1	1-40	335-8000-00	LCD HOLDER	1
	370-6262-12	ESCUTCHEON(PE-3044K-A/B)	1	1-41	331-4378-00	LCD CVR	1
1-15	335-7984-00	IR FILTER	1	1-42	-----	SWITCH PWB	1
1-16	335-7989-00	SPRING CAP	2	1-43	013-6524-50	SWITCH	5
1-17	750-6856-00	SPRING	1	1-44	013-7419-00	SWITCH	1
1-18	335-7992-00	SPRING CVR	1	1-45	060-4017-90	IR RECEIVER	1
1-19	382-8172-01	BUTTON	1	1-46	001-7046-01	DIODE	1
1-20	382-8173-01	BUTTON	1	1-47	001-7040-91	LED	2
1-21	382-8180-01	BUTTON	1	1-48	076-0647-00	PLUG	1
1-22	382-8174-03	BUTTON	1	1-49	382-8343-00	BUTTON	1
1-23	335-7985-01	INDICATOR-A	2	1-50	347-7280-00	SPACER	1


Inner Escutcheon section

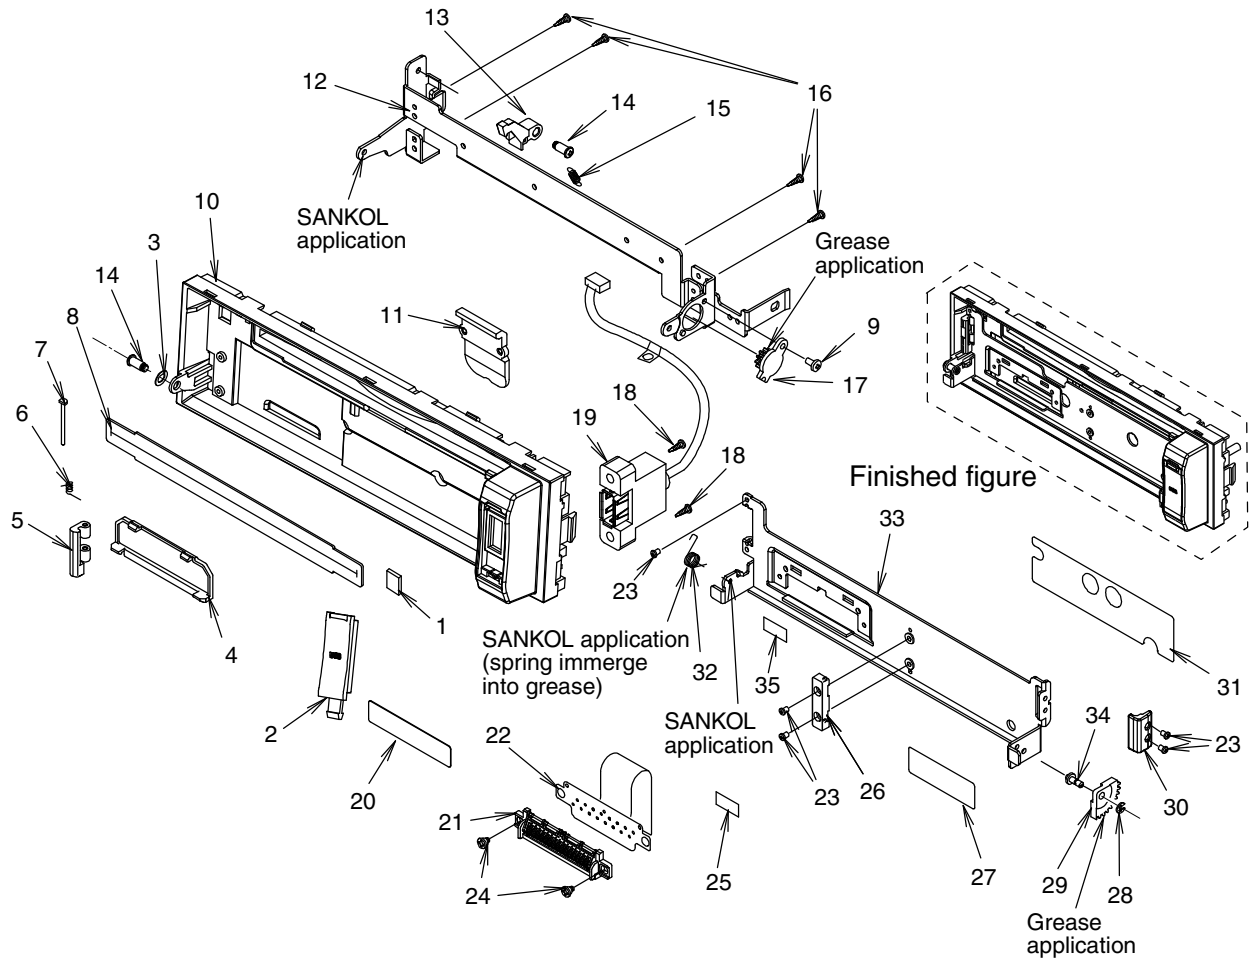

Note) SANKOL uses CFD-409Z, Grease uses G-311S.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	345-6048-00	CUSHION	1	19	855-0612-51	USB CABLE	1
2	335-8330-00	USB-CAP	1	20	347-7008-00	FPC SUPPORT	1
3	347-8232-00	SHADE	1	21	074-1278-01	OUTLET SOCKET(16P)	1
4	335-6499-00	CN-CVR	1	22	039-1862-01	INNER ES FPC (WITHOUT COMPONENT)	1
5	335-6501-01	HOOK DCP	1	23	738-1722-1H	PRECISION SCREW(M1.7x2)	5
6	750-3454-00	SPRING	1	24	716-3444-50	SCREW(M1.7x0.35)	2
7	341-1764-00	SHAFT	1	25	347-6356-00	DOUBLE FACE	1
8	346-0097-00	LEATHER SHEET	1	26	335-6502-00	SLIDER	1
9	780-2004-51	SCREW(M2 x 4)	1	27	291-0092-00	STICKER	1
10	370-6263-02	INNER-ES	1	28	743-1500-1B	E-RING	1
11	335-6886-00	ILLUMI PLATE	1	29	613-0684-00	FAN GEAR	1
12	331-4380-00	FRONT PLATE	1	30	335-8001-00	HOOK	1
13	335-7369-01	HOOK	1	31	290-0168-00	LABEL	1
14	716-3546-51	SCREW(M2x0.4)	2	32	750-3342-21	SPRING	1
15	750-3341-00	SPRING	1	33	331-4379-00	DCP HOLDER	1
16	716-0872-51	SCREW(M1.7x6)	4	34	341-1830-00	SHAFT	1
17	613-0730-00	GEAR DAMPER	1	35	347-7576-00	SPACER	1
18	716-0778-52	SCREW(M2x8)	2				

Main section

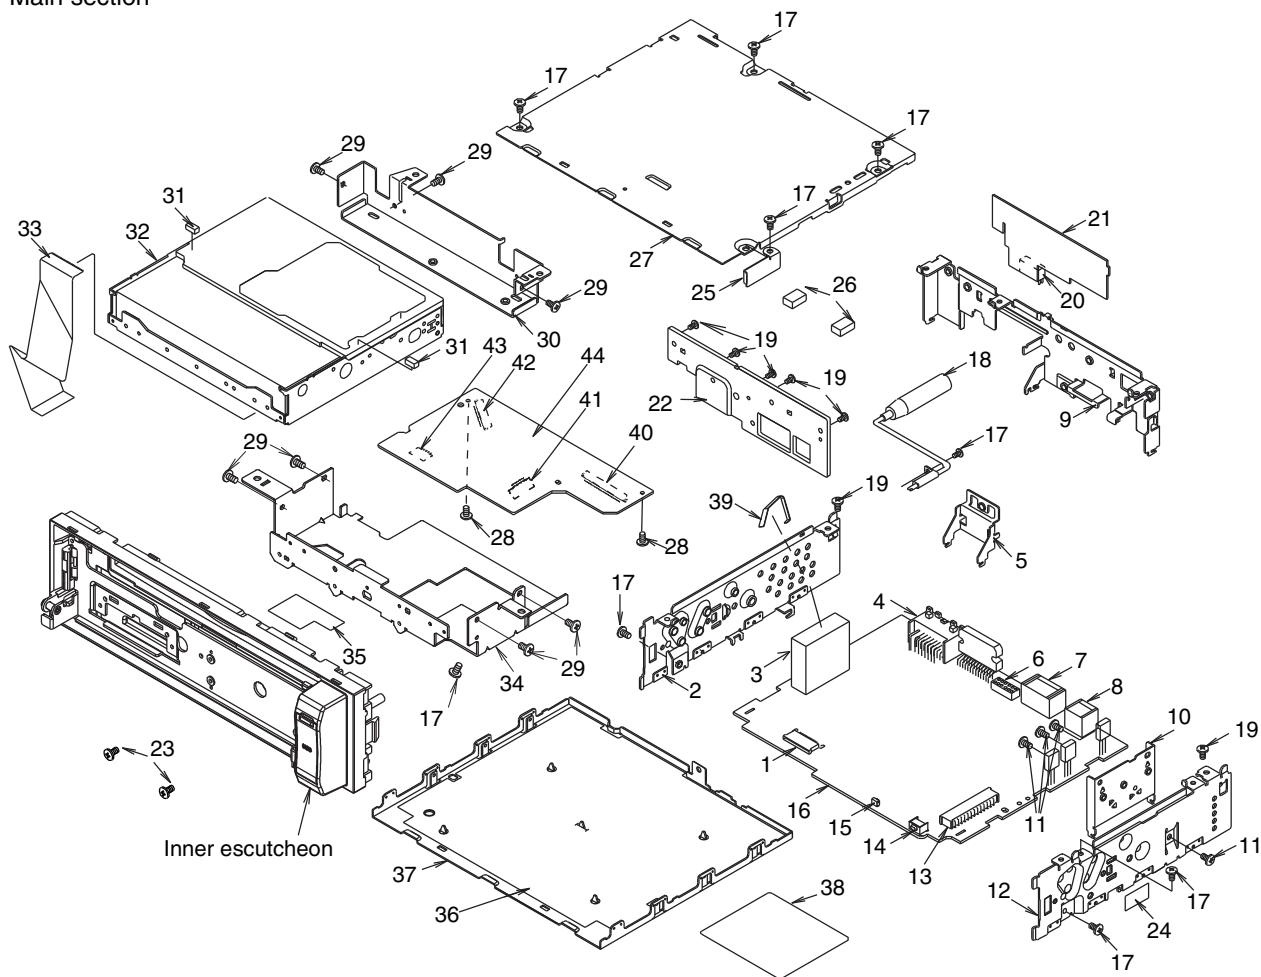

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	074-2244-68	OUTLET SOCKET	1	24	347-7580-10	SHADE	1
2	305-0336-01	SIDE-CVR(L)	1	25	331-4073-00	STOPPER	1
3	880-2091E	TUNER	1	26	347-7581-10	CUSHION	2
4	074-1214-50	OUTLET SOCKET(16P)	1	27	303-0472-07	UPPER CVR	1
5	331-3954-00	IC-HOLDER	1	28	716-1670-01	SCREW(M2x4)	2
6	076-0368-16	PLUG(16P)	1	29	714-2603-8B	MACHINE SCREW(M2.6 x 3)	7
7	076-6003-18	PLUG(18P)	1	30	331-4376-00	MECH-BRKT(R)	1
8	074-1194-00	OUTLET SOCKET(Ce-NET)	1	31	347-6821-00	SPCER FILM	2
9	307-0723-01	REAR-CVR	1	32	929-5016-80	CD-MECH MODULE	1
10	313-1924-00	HEAT SINK	1	33	816-4026-50	FLAT WIRE	1
11	714-3005-8B	MACHINE SCREW(M3 x 5)	4	34	331-4367-02	MECH BRKT(F)	1
12	305-0337-00	SIDE-CVR(R)	1	35	347-8250-00	DOUBLE FACE	1
13	074-1138-79	OUTLET SOCKET(20P)	1	36	347-7578-10	INSULATOR	1
14	013-6100-00	TACT SWITCH	1	37	304-0483-00	LOWER-CVR	1
15	001-7062-90	DIODE	1	38	276-0382-00	SETPLATE(PE-3044B-A)	1
16	-----	MAIN PWB	1		276-0415-00	SETPLATE(PE-3044K-A)	1
17	731-3006-8B	TAPTIGHT(M3 x 6)	9		276-0416-00	SETPLATE(PE-3044K-B)	1
18	092-2215-50	ANT-RECEPT	1	39	331-4312-01	EARTH PLATE	1
19	714-3006-8B	MACHINE SCREW(M3 x 6)	7	40	074-1228-79	OUTLET SOCKET(29P)	1
20	074-0898-16	OUTLET SOCKET(16P)	1	41	074-1138-60	OUTLET SOCKET(10P)	1
21	-----	D/D PWB	1	42	074-1138-65	OUTLET SOCKET(15P)	1
22	313-1923-00	HEAT SINK	1	43	076-0478-55	OUTLET SOCKET(5P)	1
23	780-2607-52	SCREW(M2.6 x 7)	2	44	-----	MECH PWB	1

ELECTRICAL PARTS LIST

Main PWB (B1) section

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-2215-50	ANT-RECEPT	C314	043-1804-90	0.1uF	C378	043-1601-90	100pF
BL1	880-2091E	TUNER	C315	043-1735-90	100pF	C378	045-1011-50	100pF
C2	043-1719-90	22pF	C316	043-1735-90	100pF	C379	043-1735-90	100pF
C3	042-1631-50	10V 100uF	C317	043-1735-90	100pF	C380	043-1735-90	100pF
C4	043-1802-90	0.01uF	C319	178-4742-78	0.47uF	C600	042-1563-71	16V 100uF
C5	043-1821-90	0.022pF	C320	043-1824-91	0.22pF	C601	043-1804-90	0.1uF
C7	043-1800-90	1000pF	C320	168-2245-79	0.22pF	C602	163-2263-35	16V 22uF
C8	187-4763-15	6.3V 47uF	C321	043-1735-90	100pF	C603	043-1841-90	0.047pF
C9	043-1608-90	0.1uF	C322	042-0654-52	6.3V 10uF	C604	043-1735-90	100pF
C9	046-1042-78	0.1uF	C323	043-1802-90	0.01uF	C605	042-1563-71	16V 100uF
C10	043-1804-90	0.1uF	C324	043-1804-90	0.1uF	C606	163-1063-35	16V 10uF
C11	043-1739-90	150pF	C325	043-0552-90	6.3V 47uF	C607	043-1606-90	1000pF
C12	043-1735-90	100pF	C326	042-1505-80	25V 1uF	C607	046-1022-58	1000pF
C13	043-1735-90	100pF	C327	043-1824-91	0.22pF	C608	187-4763-35	16V 47uF
C14	043-1800-90	1000pF	C327	168-2245-79	0.22pF	C609	043-1602-90	18pF
C15	043-0552-90	6.3V 47uF	C329	043-0540-00	6.3V 10uF	C609	045-1801-50	18pF
C101	042-1715-00	16V 3300pF	C330	043-1841-90	0.047pF	C610	043-1603-90	22pF
C102	172-1041-15	0.1uF	C331	043-1608-90	0.1uF	C610	045-2201-50	22pF
C104	042-0654-52	6.3V 10uF	C331	046-1042-78	0.1uF	C611	043-1804-90	0.1uF
C105	042-0654-52	6.3V 10uF	C332	163-2273-25	10V 220 uF	C613	187-4763-35	16V 47uF
C106	042-0654-52	6.3V 10uF	C334	043-1711-90	10pF	C614	043-1821-90	0.022pF
C107	042-0654-52	6.3V 10uF	C335	043-1824-91	0.22pF	C616	172-4731-15	0.047uF
C108	042-0654-52	6.3V 10uF	C335	168-2245-79	0.22pF	C617	042-1576-00	5.5V 0.1uF
C109	042-0654-52	6.3V 10uF	C337	043-1606-90	1000pF	C618	042-1577-00	6.3V 100uF
C110	163-2253-65	50V 2.2uF	C337	046-1022-58	1000pF	C619	043-1802-90	0.01uF
C114	178-4742-78	0.47uF	C338	043-1606-90	1000pF	C621	043-1607-90	0.01uF
C115	178-4742-78	0.47uF	C338	046-1022-58	1000pF	C621	046-1032-78	0.01uF
C116	178-4742-78	0.47uF	C340	043-1751-90	470pF	C624	043-1824-91	0.22pF
C117	178-4742-78	0.47uF	C342	043-1819-90	2200pF	C624	168-2245-79	0.22pF
C118	043-1751-90	470pF	C343	043-1711-90	10pF	C625	043-1608-90	0.1uF
C119	163-1053-65	50V 1uF	C344	043-0540-02	16V 1uF	C625	046-1042-78	0.1uF
C120	163-1063-35	16V 10uF	C345	043-1819-90	2200pF	C626	187-1063-35	16V 10uF
C121	043-1751-90	470pF	C346	043-1819-90	2200pF	C628	043-1804-90	0.1uF
C122	043-1751-90	470pF	C347	043-1802-90	0.01uF	C629	163-3363-25	25V 33uF
C123	043-1751-90	470pF	C350	043-0540-00	6.3V 10uF	C630	043-1804-90	0.1uF
C124	043-1804-90	0.1uF	C351	043-1751-90	470pF	C631	043-1802-90	0.01uF
C125	043-1751-90	470pF	C352	043-1819-90	2200pF	C632	043-1804-90	0.1uF
C126	043-1751-90	470pF	C353	043-1819-90	2200pF	C633	043-1606-90	1000pF
C127	043-1751-90	470pF	C354	043-1819-90	2200pF	C633	046-1022-58	1000pF
C128	043-1751-90	470pF	C355	043-1804-90	0.1uF	C634	163-1063-35	16V 10uF
C129	043-1751-90	470pF	C356	043-1606-90	1000pF	C635	043-1735-90	100pF
C130	043-1751-90	470pF	C356	046-1022-58	1000pF	C637	043-1804-90	0.1uF
C131	043-1751-90	470pF	C357	043-1741-90	180pF	C638	043-1802-90	0.01uF
C132	043-1751-90	470pF	C357	166-1811-50	50V 180pF	C639	189-1083-12	6.3V 1000pF
C133	043-1800-90	1000pF	C358	043-0551-90	6.3V 4.7uF	C901	043-1802-90	0.01uF
C138	043-1800-90	1000pF	C359	043-0551-90	6.3V 4.7uF	C902	042-1563-71	16V 100uF
C139	043-1800-90	1000pF	C360	043-1800-90	1000pF	C903	043-1804-90	0.1uF
C301	178-4742-78	0.47uF	C361	042-0654-52	6.3V 10uF	C904	042-1505-82	16V 10uF
C302	043-0540-00	6.3V 10uF	C362	043-0551-90	6.3V 4.7uF	C905	043-1608-90	0.1uF
C303	163-1073-15	6.3V 100pF	C365	043-1804-90	0.1uF	C905	046-1042-78	0.1uF
C304	043-1601-90	100pF	C366	043-1735-90	100pF	C906	043-1804-90	0.1uF
C304	045-1011-50	100pF	C368	043-1608-90	0.1uF	C907	043-1608-90	0.1uF
C305	043-1601-90	100pF	C368	046-1042-78	0.1uF	C907	046-1042-78	0.1uF
C305	045-1011-50	100pF	C369	043-0551-90	6.3V 4.7uF	C908	042-0654-52	6.3V 10uF
C306	163-1063-35	16V 10uF	C370	042-0654-52	6.3V 10uF	C909	163-1073-35	16V 100pF
C307	163-1063-35	16V 10uF	C371	043-1608-90	0.1uF	C910	043-1608-90	0.1uF
C308	163-1063-35	16V 10uF	C371	046-1042-78	0.1uF	C910	046-1042-78	0.1uF
C309	163-1063-35	16V 10uF	C372	042-0654-52	6.3V 10uF	C911	163-1063-35	16V 10uF
C310	043-1804-90	0.1uF	C373	043-1608-90	0.1uF	C912	042-1563-71	16V 100uF
C311	043-1606-90	1000pF	C373	046-1042-78	0.1uF	C913	042-0654-50	6.3V 22uF
C311	046-1022-58	1000pF	C374	043-0552-90	6.3V 47uF	C914	042-0654-50	6.3V 22uF
C312	043-1606-90	1000pF	C375	043-1601-90	100pF	C915	042-0654-50	6.3V 22uF
C312	046-1022-58	1000pF	C375	045-1011-50	100pF	C916	042-0654-50	6.3V 22uF
C313	043-1606-90	1000pF	C377	043-1608-90	0.1uF	C917	042-0654-50	6.3V 22uF
C313	046-1022-58	1000pF	C377	046-1042-78	0.1uF	C918	042-0654-50	6.3V 22uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C919	043-1804-90	0.1uF	L102	010-3105-67	1k ohm/100MHz	Q109	125-0034-96	RT1P436M
C920	043-1723-90	33pF	L103	010-3105-67	1k ohm/100MHz	Q110	125-2027-95	DTC143ZUA-T106
C920	166-3301-50	33pF	L104	010-3105-67	1k ohm/100MHz	Q110	125-2041-96	RT1N436M
C921	043-1735-90	100pF	L105	010-3105-67	1k ohm/100MHz	Q112	192-4081-00	2SC4081-T106-Q,R,S
C922	043-1735-90	100pF	L106	010-3105-67	1k ohm/100MHz	Q112	192-4155-49	2SC4155A
C923	043-1723-90	33pF	L107	010-3105-67	1k ohm/100MHz	Q600	125-4015-90	KTC2026
C923	166-3301-50	33pF	L301	010-3112-91	1.5k ohm/100MHz	Q601	198-0302-50	2SK302
C924	043-1735-90	100pF	L303	010-3112-90	1k ohm/100MHz	Q602	190-1576-00	2SA1576A T106
C925	043-1735-90	100pF	L305	010-3112-90	1k ohm/100MHz	Q602	125-3014-90	ISA1602A
C926	043-1804-90	0.1uF	L306	010-3112-90	1k ohm/100MHz	Q603	125-2027-92	DTC124EUA-T106
C927	043-0264-59	2700pF	L308	010-3112-91	1.5k ohm/100MHz	Q603	125-2041-93	RT1N241M
C928	043-0264-59	2700pF	L309	010-3112-91	1.5k ohm/100MHz	Q606	125-2027-92	DTC124EUA-T106
C929	043-0264-51	2200pF	L310	010-3112-91	1.5k ohm/100MHz	Q606	125-2041-93	RT1N241M
C930	043-0264-51	2200pF	L311	010-3112-91	1.5k ohm/100MHz	Q607	191-1197-50	2SB1197K
C931	043-0264-51	2200pF	L312	010-3112-91	1.5k ohm/100MHz	Q607	190-1365-50	2SA1365
C932	043-0264-51	2200pF	L313	010-3112-91	1.5k ohm/100MHz	Q608	125-4015-90	KTC2026
C933	043-1802-90	0.01uF	L314	010-3112-91	1.5k ohm/100MHz	Q609	125-2027-92	DTC124EUA-T106
C934	187-1063-35	16V 10uF	L315	010-3112-91	1.5k ohm/100MHz	Q609	125-2041-93	RT1N241M
D1	001-1310-00	KDS160	L316	010-3112-91	1.5k ohm/100MHz	Q612	125-4014-90	KTC2020D
D101	001-0592-61	1N5404	L317	010-3112-91	1.5k ohm/100MHz	Q615	125-2027-91	DTC114EUA-T106
D102	001-0466-91	S5688G	L318	010-3105-67	1k ohm/100MHz	Q615	125-2041-92	RT1N141M
D103	001-1310-00	KDS160	L319	010-3105-67	1k ohm/100MHz	Q616	190-1576-00	2SA1576A T106
D104	001-1310-00	KDS160	L320	010-3112-90	1k ohm/100MHz	Q616	125-3014-90	ISA1602A
D105	001-4301-43	HZU8.2B1	L321	010-3105-67	1k ohm/100MHz	Q617	101-0941-00	2SB941
D130	001-1310-00	KDS160	L322	010-3105-67	1k ohm/100MHz	Q618	125-0025-93	RN2303-TE85L
D340	001-4301-28	HZU5.1B	L323	010-3112-90	1k ohm/100MHz	Q618	125-0034-93	RT1P241M
D600	001-0401-47	HZS9C1	L324	010-3112-90	1k ohm/100MHz	Q619	190-1576-00	2SA1576A T106
D601	001-0504-47	HZS9B3L	L325	010-3112-90	1k ohm/100MHz	Q619	125-3014-90	ISA1602A
D602	001-0504-45	HZS9B1L	L326	010-3112-91	1.5k ohm/100MHz	Q620	190-1576-00	2SA1576A T106
D603	001-0504-33	HZS6B2L	L377	010-3112-91	1.5k ohm/100MHz	Q620	125-3014-90	ISA1602A
D604	001-7062-90	RBR1111C	L601	010-3112-90	1k ohm/100MHz	Q621	192-4081-00	2SC4081-T106-Q,R,S
D605	001-0644-90	MA113	L602	010-6025-00	10uH	Q621	192-4155-49	2SC4155A
D606	001-0644-90	MA113	L901	010-3112-91	1.5k ohm/100MHz	Q622	192-4081-00	2SC4081-T106-Q,R,S
D607	001-1310-00	KDS160	L902	010-3112-91	1.5k ohm/100MHz	Q622	192-4155-49	2SC4155A
D608	001-2601-90	MA728	L903	010-3112-91	1.5k ohm/100MHz	Q623	125-0025-93	RN2303-TE85L
D609	001-1310-00	KDS160	L904	010-3112-91	1.5k ohm/100MHz	Q623	125-0034-93	RT1P241M
D610	001-0466-91	S5688G	L905	010-3112-91	1.5k ohm/100MHz	Q624	125-2027-92	DTC124EUA-T106
D611	001-4301-26	HZU4.7B2	L906	010-3112-91	1.5k ohm/100MHz	Q624	125-2041-93	RT1N241M
D612	001-1310-00	KDS160	L907	010-3112-91	1.5k ohm/100MHz	Q625	125-2027-92	DTC124EUA-T106
D613	001-1310-00	KDS160	L908	010-3105-67	1k ohm/100MHz	Q625	125-2041-93	RT1N241M
D614	001-0466-91	S5688G	L909	010-3105-67	1k ohm/100MHz	Q626	131-1260-00	2SB1260
D615	001-4301-44	HZU8.2B2	L910	010-3105-67	1k ohm/100MHz	Q627	190-1576-00	2SA1576A T106
D616	001-0644-90	MA113	L911	010-3105-67	1k ohm/100MHz	Q627	125-3014-90	ISA1602A
D619	001-2601-90	MA728	L912	010-3105-67	1k ohm/100MHz	Q628	125-2027-92	DTC124EUA-T106
IC1	051-1905-91	AN77L05M	L913	010-3105-67	1k ohm/100MHz	Q628	125-2041-93	RT1N241M
IC101	051-2056-00	TB2913HQ	L914	010-3105-67	1k ohm/100MHz	Q629	131-1260-00	2SB1260
IC301	-----	SAF7730HN219	L915	010-3112-91	1.5k ohm/100MHz	Q631	125-4015-90	KTC2026
IC603	052-3979-10	M30873MHB-710GP	L917	010-3112-91	1.5k ohm/100MHz	Q632	190-1576-00	2SA1576A T106
IC604	051-3335-90	AN77L04M	L918	010-3105-67	1k ohm/100MHz	Q632	125-3014-90	ISA1602A
IC605	051-9402-68	BR93L58F-WE2	L925	010-6027-00	COIL	Q633	125-2027-95	DTC143ZUA-T106
IC606	051-5437-58	R3111N211A	Q1	125-7005-90	PHK04P02T	Q633	125-2041-96	RT1N436M
IC606	051-5437-08	S-80821AN	Q2	191-1197-50	2SB1197K	Q635	125-0025-93	RN2303-TE85L
IC607	051-6600-90	LA2335M	Q2	190-1365-50	2SA1365	Q635	125-0034-93	RT1P241M
IC608	051-3406-90	NJM2078M	Q3	125-2027-95	DTC143ZUA-T106	Q636	192-4081-00	2SC4081-T106-Q,R,S
IC901	051-6730-90	WM8766	Q3	125-2041-96	RT1N436M	Q636	192-4155-49	2SC4155A
IC902	051-3026-90	NJM4580V	Q4	125-2027-95	DTC143ZUA-T106	Q641	125-9015-92	RN4902
IC903	051-3026-90	NJM4580V	Q4	125-2041-96	RT1N436M	Q642	125-9015-92	RN4902
IC904	051-3026-90	NJM4580V	Q5	190-1576-00	2SA1576A T106	Q801	125-2027-95	DTC143ZUA-T106
J101	074-1214-50	16P	Q5	125-3014-90	ISA1602A	Q801	125-2041-96	RT1N436M
J102	076-6003-18	18P	Q101	125-4012-90	KTD1304	Q901	125-4012-90	KTD1304
J601	074-2244-68	18P	Q102	125-4012-90	KTD1304	Q902	125-4012-90	KTD1304
J604	074-1194-00	13P	Q103	125-4012-90	KTD1304	Q903	125-4012-90	KTD1304
J605	074-1138-79	20P	Q104	125-4012-90	KTD1304	Q904	125-4012-90	KTD1304
J606	076-0368-16	16P	Q105	125-4012-90	KTD1304	Q905	125-4012-90	KTD1304
L1	010-2003-04	30uH(Variable)	Q106	125-4012-90	KTD1304	Q906	125-2027-92	DTC124EUA-T106
L2	010-2279-50	4.7uH	Q108	125-2027-92	DTC124EUA-T106	Q906	125-2041-93	RT1N241M
L3	010-2279-50	4.7uH	Q108	125-2041-93	RT1N241M	Q907	125-0021-95	DTA143ZUA-T106
L101	010-8038-01	30uH	Q109	125-0021-95	DTA143ZUA-T106	Q907	125-0034-96	RT1P436M

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q908	125-4012-90	KTD1304	R111	119-1021-15	1/10W 1k ohm	R643	116-1801-15	1/4WS 18 ohm
R3	119-1041-15	1/10W 100k ohm	R112	119-1021-15	1/10W 1k ohm	R644	119-1041-15	1/10W 100k ohm
R6	119-1031-15	1/10W 10k ohm	R113	119-3311-15	1/10W 330 ohm	R645	033-4731-15	1/16W 47k ohm
R7	119-1031-15	1/10W 10k ohm	R114	119-3311-15	1/10W 330 ohm	R646	119-1031-15	1/10W 10k ohm
R8	033-1031-15	1/16W 10k ohm	R115	119-3311-15	1/10W 330 ohm	R647	116-1591-15	1/4WS 1.5k ohm
R10	033-1021-15	1/16W 1k ohm	R116	119-3311-15	1/10W 330 ohm	R648	119-4731-15	1/10W 47k ohm
R11	033-1031-15	1/16W 10k ohm	R117	119-3311-15	1/10W 330 ohm	R649	116-1591-15	1/4WS 1.5k ohm
R16	033-1021-15	1/16W 1k ohm	R118	119-3311-15	1/10W 330 ohm	R650	033-3321-15	1/16W 3.3k ohm
R17	119-0000-05	1/10W 0 ohm JW	R119	119-2231-15	1/10W 22k ohm	R651	033-1531-15	1/16W 15k ohm
R18	119-0000-05	1/10W 0 ohm JW	R120	119-2231-15	1/10W 22k ohm	R652	119-3321-15	1/10W 3.3k ohm
R22	033-1831-15	1/16W 18k ohm	R121	119-2231-15	1/10W 22k ohm	R653	033-4711-15	1/16W 470 ohm
R23	119-1031-15	1/10W 10k ohm	R122	119-2231-15	1/10W 22k ohm	R654	119-2231-15	1/10W 22k ohm
R24	033-1831-15	1/16W 18k ohm	R123	119-2231-15	1/10W 22k ohm	R655	033-1051-15	1/16W 1M ohm
R25	119-0000-05	1/10W 0 ohm JW	R124	119-2231-15	1/10W 22k ohm	R657	116-1591-15	1/4WS 1.5k ohm
R26	119-0000-05	1/10W 0 ohm JW	R133	116-1521-15	1/4W 1.5k ohm	R658	033-2231-15	1/16W 22k ohm
R27	119-1831-15	1/10W 18k ohm	R134	119-1021-15	1/10W 1k ohm	R659	033-1031-15	1/16W 10k ohm
R28	119-3331-15	1/10W 33k ohm	R135	119-1021-15	1/10W 1k ohm	R660	116-1591-15	1/4WS 1.5k ohm
R29	119-1831-15	1/10W 18k ohm	R136	119-1021-15	1/10W 1k ohm	R661	116-6801-15	1/4WS 68 ohm
R30	119-3331-15	1/10W 33k ohm	R137	119-1021-15	1/10W 1k ohm	R662	033-1041-15	1/16W 100k ohm
R31	119-3331-15	1/10W 33k ohm	R145	032-0140-50	1/10W 10k ohm(F)	R663	033-1031-15	1/16W 10k ohm
R32	119-1831-15	1/10W 18k ohm	R151	033-2231-15	1/16W 22k ohm	R664	119-4731-15	1/10W 47k ohm
R33	119-3331-15	1/10W 33k ohm	R337	033-1041-15	1/16W 100k ohm	R665	119-4731-15	1/10W 47k ohm
R34	119-1831-15	1/10W 18k ohm	R341	033-1041-15	1/16W 100k ohm	R666	116-1221-15	1/4W 1.2k ohm
R35	119-0000-05	1/10W 0 ohm JW	R355	119-1021-15	1/10W 1k ohm	R667	032-0140-66	1/10W 220 ohm(F)
R36	119-1031-15	1/10W 10k ohm	R361	119-1021-15	1/10W 1k ohm	R668	032-0140-67	1/10W 3.3k ohm(F)
R37	119-1031-15	1/10W 10k ohm	R364	119-7501-15	1/10W 75 ohm	R669	033-4711-15	1/16W 470 ohm
R39	119-2201-15	1/10W 22 ohm	R450	033-1021-15	1/16W 1k ohm	R670	033-4721-15	1/16W 4.7k ohm
R40	119-0000-05	1/10W 0 ohm JW	R600	119-1011-15	1/10W 100 ohm	R671	032-0140-56	1/10W 12k ohm(F)
R41	119-1001-15	1/10W 10 ohm	R601	033-1031-15	1/16W 10k ohm	R672	119-4721-15	1/10W 4.7k ohm
R42	119-0000-05	1/10W 0 ohm JW	R602	119-2231-15	1/10W 22k ohm	R673	033-1031-15	1/16W 10k ohm
R43	119-0000-05	1/10W 0 ohm JW	R603	119-3921-15	1/10W 3.9k ohm	R674	033-1031-15	1/16W 10k ohm
R44	119-0000-05	1/10W 0 ohm JW	R604	119-1031-15	1/10W 10k ohm	R675	116-1221-15	1/4W 1.2k ohm
R45	119-4721-15	1/10W 4.7k ohm	R605	116-4711-15	1/4WS 470 ohm	R678	119-0000-05	1/10W 0 ohm JW
R46	119-4721-15	1/10W 4.7k ohm	R606	116-4711-15	1/4WS 470 ohm	R680	119-1031-15	1/10W 10k ohm
R49	119-0000-05	1/10W 0 ohm JW	R607	033-1031-15	1/16W 10k ohm	R681	119-0000-05	1/10W 0 ohm JW
R50	119-0000-05	1/10W 0 ohm JW	R608	116-1811-15	1/4WS 180 ohm	R682	119-0000-05	1/10W 0 ohm JW
R51	119-0000-05	1/10W 0 ohm JW	R609	033-2221-15	1/16W 2.2k ohm	R690	119-4731-15	1/10W 47k ohm
R52	119-0000-05	1/10W 0 ohm JW	R610	033-1031-15	1/16W 10k ohm	R691	119-1031-15	1/10W 10k ohm
R54	033-1001-15	1/16W 10 ohm	R612	116-3311-15	1/4WS 330 ohm	R695	119-1031-15	1/10W 10k ohm
R55	119-0000-05	1/10W 0 ohm JW	R613	119-1031-15	1/10W 10k ohm	R696	119-0000-05	1/10W 0 ohm JW
R56	033-1021-15	1/16W 1k ohm			(PE-3044K-A/B)	R697	033-4731-15	1/16W 47k ohm
R59	119-1011-15	1/10W 100 ohm	R614	119-1031-15	1/10W 10k ohm	R698	033-1041-15	1/16W 100k ohm
R60	119-1031-15	1/10W 10k ohm			(PE-3044B-A)	R903	033-4721-15	1/16W 4.7k ohm
R64	119-0000-05	1/10W 0 ohm JW	R616	119-0000-05	1/10W 0 ohm JW	R904	033-5611-15	1/16W 560 ohm
R67	119-0000-05	1/10W 0 ohm JW	R617	119-2231-15	1/10W 22k ohm	R905	033-5611-15	1/16W 560 ohm
R68	033-1011-15	1/16W 100 ohm	R620	119-1031-15	1/10W 10k ohm	R906	033-5611-15	1/16W 560 ohm
R69	119-1031-15	1/10W 10k ohm			(PE-3044B-A)	R907	033-4711-15	1/16W 470 ohm
R70	033-1011-15	1/16W 100 ohm	R621	119-1031-15	1/10W 10k ohm	R908	033-4711-15	1/16W 470 ohm
R71	033-1031-15	1/16W 10k ohm			(PE-3044K-A/B)	R909	033-5611-15	1/16W 560 ohm
R72	033-1011-15	1/16W 100 ohm	R622	119-1031-15	1/10W 10k ohm	R910	033-4721-15	1/16W 4.7k ohm
R73	119-0000-05	1/10W 0 ohm JW	R623	033-1811-15	1/16W 180 ohm	R911	033-3301-15	1/16W 33 ohm
R74	033-1031-15	1/16W 10k ohm	R624	033-1031-15	1/16W 10k ohm	R912	032-0140-50	1/10W 10k ohm(F)
R75	033-1031-15	1/16W 10k ohm	R625	119-4721-15	1/10W 4.7k ohm	R913	032-0140-50	1/10W 10k ohm(F)
R77	119-0000-05	1/10W 0 ohm JW	R626	119-4721-15	1/10W 4.7k ohm	R914	032-0140-50	1/10W 10k ohm(F)
R78	119-1031-15	1/10W 10k ohm	R628	119-1011-15	1/10W 100 ohm	R915	032-0140-50	1/10W 10k ohm(F)
R79	033-4721-15	1/16W 4.7k ohm	R629	033-1011-15	1/16W 100 ohm	R916	032-0140-50	1/10W 10k ohm(F)
R80	119-1011-15	1/10W 100 ohm	R630	119-1011-15	1/10W 100 ohm	R917	032-0140-50	1/10W 10k ohm(F)
R81	119-0000-05	1/10W 0 ohm JW	R631	033-1011-15	1/16W 100 ohm	R918	032-0140-03	1/10W 220k ohm(F)
R82	119-1011-15	1/10W 100 ohm	R633	033-1021-15	1/16W 1k ohm	R919	032-0140-22	1/10W 68k ohm(F)
R86	033-0000-05	0.5A 0 ohm	R634	033-1041-15	1/16W 100k ohm	R920	032-0140-22	1/10W 68k ohm(F)
R87	033-0000-05	0.5A 0 ohm	R635	033-4711-15	1/16W 470 ohm	R921	032-0140-03	1/10W 220k ohm(F)
R90	119-0000-05	1/10W 0 ohm JW	R636	033-1031-15	1/16W 10k ohm	R922	032-0140-22	1/10W 68k ohm(F)
R101	119-1031-15	1/10W 10k ohm	R637	033-1031-15	1/16W 10k ohm	R923	032-0140-22	1/10W 68k ohm(F)
R102	033-3331-15	1/16W 33k ohm	R638	033-1031-15	1/16W 10k ohm	R926	119-8211-15	1/10W 820 ohm
R103	033-1021-15	1/16W 1k ohm	R639	033-5621-15	1/16W 5.6k ohm	R927	119-1221-15	1/10W 1.2k ohm
R104	033-5621-15	1/16W 5.6k ohm	R640	033-4721-15	1/16W 4.7k ohm	R932	119-0000-05	1/10W 0 ohm JW
R108	119-4721-15	1/10W 4.7k ohm	R641	033-1031-15	1/16W 10k ohm	R933	119-0000-05	1/10W 0 ohm JW
R110	119-1021-15	1/10W 1k ohm	R642	033-1041-15	1/16W 100k ohm	R934	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R935	032-0140-62	1/10W 1k ohm(F)	R964	032-0140-62	1/10W 1k ohm(F)	R981	119-2731-15	1/10W 27k ohm
R937	119-0000-05	1/10W 0 ohm JW	R965	032-0140-62	1/10W 1k ohm(F)	R982	033-0000-05	0.5A 0 ohm
R939	032-0140-62	1/10W 1k ohm(F)	R966	032-0140-62	1/10W 1k ohm(F)	R983	033-0000-05	0.5A 0 ohm
R940	119-0000-05	1/10W 0 ohm JW	R967	032-0140-98	1/10W 330 ohm(F)	R984	033-0000-05	0.5A 0 ohm
R943	119-0000-05	1/10W 0 ohm JW	R968	032-0140-98	1/10W 330 ohm(F)	R985	033-0000-05	0.5A 0 ohm
R944	032-0140-79	1/10W 2.7k ohm(F)	R969	032-0140-98	1/10W 330 ohm(F)	R986	033-0000-05	0.5A 0 ohm
R945	032-0140-79	1/10W 2.7k ohm(F)	R970	032-0140-98	1/10W 330 ohm(F)	R987	033-0000-05	0.5A 0 ohm
R946	032-0140-79	1/10W 2.7k ohm(F)	R971	032-0140-98	1/10W 330 ohm(F)	R6004	119-0000-05	1/10W 0 ohm JW
R947	033-0000-05	0.5A 0 ohm	R972	032-0140-98	1/10W 330 ohm(F)	S601	013-6100-00	SWITCH
R948	032-0140-79	1/10W 2.7k ohm(F)	R973	033-1021-15	1/16W 1k ohm	SUP1	060-8057-90	CSA20-141N-T
R950	033-4721-15	1/16W 4.7k ohm	R974	033-1021-15	1/16W 1k ohm	X301	061-3537-90	41.6MHz
R952	033-0000-05	0.5A 0 ohm	R975	033-1021-15	1/16W 1k ohm	X601	060-1533-90	10MHz
R954	119-0000-05	1/10W 0 ohm JW	R976	119-2731-15	1/10W 27k ohm	X602	061-1056-00	32.768kHz
R955	033-0000-05	0.5A 0 ohm	R977	119-2731-15	1/10W 27k ohm	PWB	039-3053-02	PWB(WITHOUT COMPONENT)
R961	032-0140-62	1/10W 1k ohm(F)	R978	119-2731-15	1/10W 27k ohm			
R962	032-0140-62	1/10W 1k ohm(F)	R979	119-2731-15	1/10W 27k ohm			
R963	032-0140-62	1/10W 1k ohm(F)	R980	119-2731-15	1/10W 27k ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C601	043-1608-90	0.1uF	D605	001-7046-01	DIODE	R608	116-1811-15	1/4WS 180 ohm
C601	046-1042-78	0.1uF	D610	001-4301-35	HZU6.2B2	R609	033-4721-15	1/16W 4.7k ohm
C602	043-1608-90	0.1uF	D611	001-4301-35	HZU6.2B2	R610	033-1041-15	1/16W 100k ohm
C602	046-1042-78	0.1uF	D715	001-7040-91	DIODE	R612	119-3911-15	1/10W 390 ohm
C603	043-1608-90	0.1uF	D716	001-2601-90	MA728	R614	119-3911-15	1/10W 390 ohm
C603	046-1042-78	0.1uF	D737	001-7040-91	DIODE	R620	033-1031-15	1/16W 10k ohm
C604	043-1608-90	0.1uF	IC601	051-6089-00	NJU6539	R622	119-3311-15	1/10W 330 ohm
C604	046-1042-78	0.1uF	IR601	060-4017-90	RS-671	R625	033-3921-15	1/16W 3.9k ohm
C605	043-1608-90	0.1uF	LCD1	379-1382-51	INDICATOR(LCD)	R628	119-0000-05	1/10W 0 ohm JW
C605	046-1042-78	0.1uF	P601	076-0647-00	16P	R630	119-0000-05	1/10W 0 ohm JW
C606	043-1608-90	0.1uF	Q601	125-2027-92	DTC124EUA-T106	R631	119-0000-05	1/10W 0 ohm JW
C606	046-1042-78	0.1uF	Q601	125-2041-93	RT1N241M	S609	013-6524-50	TACT SWITCH
C607	043-1608-90	0.1uF	Q604	125-2027-95	DTC143ZUA-T106	S610	013-6524-50	TACT SWITCH
C607	046-1042-78	0.1uF	Q604	125-2041-96	RT1N436M	S611	013-6524-50	TACT SWITCH
C608	042-0423-97	16V 10uF	Q605	125-0034-93	RT1P241M	S612	013-6524-50	TACT SWITCH
C609	042-0423-97	16V 10uF	Q606	125-2027-95	DTC143ZUA-T106	S613	013-7419-00	SWITCH
C610	042-0423-97	16V 10uF	Q606	125-2041-96	RT1N436M	S614	013-6524-50	TACT SWITCH
C611	178-4742-78	0.47uF	R605	033-1241-15	1/16W 120k ohm	PWB	039-3052-00	PWB(WITHOUT COMPONENT)
C612	178-4742-78	0.47uF	R606	033-1011-15	1/16W 100 ohm			
D603	001-0529-29	MA8051M	R607	033-1021-15	1/16W 1k ohm			

D/D PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C502	042-1563-71	16V 100uF	D507	001-0529-57	MA8120H	R502	119-1031-15	1/10W 10k ohm
C503	043-1804-90	0.1uF	D508	001-2635-90	D1FJ10	R506	119-1031-15	1/10W 10k ohm
C505	042-1563-71	16V 100uF	FIL501	060-3116-55	CKD510JB1H102ST	R507	119-4701-15	1/10W 47 ohm
C506	043-1804-90	0.1uF	FIL502	060-3116-55	CKD510JB1H102ST	R508	032-0140-90	1/10W 560 ohm F
C507	043-0510-51	25V 10uF	FIL503	060-3115-52	CKD510JB1H102ST	R509	032-0164-50	1/10W 0.1 ohm F
C508	043-1800-90	1000pF	IC501	051-3924-90	MD1424R	R510	032-0164-50	1/10W 0.1 ohm F
C510	043-1800-90	1000pF	J501	074-0898-16	16P	R511	119-1001-15	1/10W 10 ohm
C511	043-1841-90	0.047uF	L501	010-3600-90	2k ohm/100MHz	R512	119-5631-15	1/10W 56k ohm
C512	043-1802-90	0.01uF	L504	010-3041-90	10uH	R513	119-1811-15	1/10W 180 ohm
C513	163-1073-35	16V 100uF	L505	010-3108-53	330 ohm/100MHz	R514	119-1811-15	1/10W 180 ohm
C514	042-1697-00	10V 680uF	L506	010-2275-50	33uH	R516	032-0140-53	1/10W 2.2k ohm F
C517	043-1800-90	1000pF	L507	010-2275-50	33uH	R521	119-1051-15	1/10W 1M ohm
C521	043-1804-90	0.1uF	Q501	125-2027-92	DTC124EUA-T106	R522	119-1031-15	1/10W 10k ohm
C523	163-2263-35	16V 22uF	Q501	125-2041-93	RT1N241M	R523	032-0140-15	1/10W 6.8k ohm F
C524	163-3363-45	16V 33uF	Q502	190-1576-00	2SA1576A-T106	R527	119-1041-15	1/10W 100k ohm
C525	163-2263-35	16V 22uF	Q502	125-3014-90	ISA1602A	R529	119-3321-15	1/10W 3.3k ohm
C526	163-3363-45	16V 33uF	Q503	192-2873-00	2SC2873	R530	119-3321-15	1/10W 3.3k ohm
D502	001-0608-90	D1FS4	Q504	125-2027-92	DTC124EUA-T106	T501	007-1180-00	SRW13EPC
D504	001-0507-90	DAP202K	Q504	125-2041-93	RT1N241M	PWB	039-3046-00	PWB(WITHOUT COMPONENT)
D505	001-0529-57	MA8120H	Q506	125-3010-90	KTA1666			
D506	001-2635-90	D1FJ10	R501	119-1031-15	1/10W 10k ohm			

MECH PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	043-1804-90	0.1uF	C82	043-1804-90	0.1uF	R27	033-4731-15	1/16W 47k ohm
C3	042-0636-50	6.3V 100uF	C83	043-1804-90	0.1uF	R28	033-2231-15	1/16W 22k ohm
C4	043-1804-90	0.1uF	C89	043-1613-90	0.033uF	R29	033-2231-15	1/16W 22k ohm
C5	163-1073-35	16V 100uF	C90	043-1804-90	0.1uF	R30	033-4731-15	1/16W 47k ohm
C6	163-1073-35	16V 100uF	C91	163-1063-35	16V 10uF	R31	033-3341-15	1/16W 330k ohm
C7	168-1052-78	1uF	C92	163-1063-35	16V 10uF	R33	033-5621-15	1/16W 5.6k ohm
C8	163-1063-35	16V 10uF	C93	043-1600-90	10pF	R35	033-1011-15	1/16W 100 ohm
C9	168-1052-78	1uF	C94	043-1600-90	10pF	R36	033-1021-15	1/16W 1k ohm
C10	042-0423-21	10V 22uF TAN	C97	043-1804-90	0.1uF	R37	033-1021-15	1/16W 1k ohm
C11	042-0560-85	6.3V 100uF	C98	043-1804-90	0.1uF	R39	033-4731-15	1/16W 47k ohm
C12	043-0552-90	6.3V 47uF	C99	043-1804-90	0.1uF	R40	033-4731-15	1/16W 47k ohm
C13	043-1804-90	0.1uF	C100	043-1600-90	10pF	R41	033-6831-15	1/16W 68k ohm
C14	043-1804-90	0.1uF	C101	043-1600-90	10pF	R42	033-6831-15	1/16W 68k ohm
C15	168-1052-78	1uF	C102	043-1804-90	0.1uF	R43	033-2211-15	1/16W 220 ohm
C16	168-1052-78	1uF	C103	043-1607-90	0.01uF	R44	033-0000-05	0.5A 0 ohm
C17	042-0423-21	10V 22uF TAN	C104	043-1706-90	5pF	R45	033-0000-05	0.5A 0 ohm
C20	043-1614-90	470pF	C105	043-1706-90	5pF	R46	033-4731-15	1/16W 47k ohm
C21	043-1841-90	0.047uF	CCT1	050-0140-57	1/32W 10k ohm x4	R51	033-4721-15	1/16W 4.7k ohm
C22	043-1614-90	470pF	CCT2	050-0140-54	1/32W 1k ohm x4	R52	033-4721-15	1/16W 4.7k ohm
C23	043-1841-90	0.047uF	D1	001-0367-91	1SS226TE85L	R53	033-1041-15	1/16W 100k ohm
C24	043-1713-90	12pF	D900	060-8078-00	EZAEG3A50AV	R57	033-1041-15	1/16W 100k ohm
C25	043-1713-90	12pF	D901	060-8078-00	EZAEG3A50AV	R59	033-4731-15	1/16W 47k ohm
C26	043-1804-90	0.1uF	D903	001-4316-16	LM3Z3V9T1G	R60	033-1041-15	1/16W 100k ohm
C27	043-1611-90	2200pF	IC1	051-6079-80	BA5830FM	R61	033-1041-15	1/16W 100k ohm
C28	043-1804-90	0.1uF	IC2	052-3981-10	TMP92CD28AFG	R62	033-4731-15	1/16W 47k ohm
C30	043-1617-90	6800pF	IC3	051-6733-20	TC94A70FG-010	R63	033-0000-05	0.5A 0 ohm
C31	043-1804-90	0.1uF	IC5	051-6926-90	BD2051AFJ	R64	033-4731-15	1/16W 47k ohm
C32	043-1804-90	0.1uF	IC7	051-5418-08	S-80827CNMC	R65	033-4731-15	1/16W 47k ohm
C33	043-1613-90	0.033uF	IC7	051-5418-18	BD4827G	R66	033-0000-05	0.5A 0 ohm
C34	043-1804-90	0.1uF	IC8	051-6928-90	341S2094	R67	033-0000-05	0.5A 0 ohm
C35	043-1804-90	0.1uF	IC997	051-7226-08	TC7SH00FU	R68	033-0000-05	0.5A 0 ohm
C37	043-1804-90	0.1uF	IC998	051-3536-90	AP2121AK-1.5TRE1	R69	033-1041-15	1/16W 100k ohm
C38	042-0423-20	10V 10uF	IC999	051-3536-90	AP2121AK-1.5TRE1	R71	033-2211-15	1/16W 220 ohm
C39	043-1804-90	0.1uF	J101	074-1228-79	29P	R72	033-2211-15	1/16W 220 ohm
C40	043-1804-90	0.1uF	J201	074-1138-65	15P	R74	033-1041-15	1/16W 100k ohm
C41	043-1804-90	0.1uF	J301	074-1138-60	10P	R75	033-1041-15	1/16W 100k ohm
C42	043-1804-90	0.1uF	L1	010-3105-67	COIL	R76	033-2211-15	1/16W 220 ohm
C43	043-1804-90	0.1uF	L8	010-3105-69	COIL	R78	033-2211-15	1/16W 220 ohm
C44	043-1607-90	0.01uF	P2	076-0478-55	5P	R79	033-1051-15	1/16W 1M ohm
C45	043-1605-90	68pF	Q4	190-2060-00	2SA2060	R80	033-1051-15	1/16W 1M ohm
C46	043-1804-90	0.1uF	Q5	191-1197-50	2SA1365	R81	033-4701-15	1/16W 47 ohm
C47	043-1610-90	0.015uF	Q6	125-2027-92	DTC124EUA-T106	R82	033-0000-05	0.5A 0 ohm
C48	043-1804-90	0.1uF	Q6	125-2041-93	RT1N241M	R86	033-4731-15	1/16W 47k ohm
C49	043-1607-90	0.01uF	Q7	191-1197-50	2SA1365	R87	033-4731-15	1/16W 47k ohm
C50	043-1804-90	0.1uF	Q8	125-2027-92	DTC124EUA-T106	R88	033-4731-15	1/16W 47k ohm
C51	043-1804-90	0.1uF	Q8	125-2041-93	RT1N241M	R89	033-4731-15	1/16W 47k ohm
C52	043-1609-90	1500pF	R1	033-5621-15	1/16W 5.6k ohm	R92	033-1031-15	1/16W 10k ohm
C53	043-1612-90	3300pF	R2	033-1031-15	1/16W 10k ohm	R93	033-1221-15	1/16W 1.2k ohm
C54	043-1607-90	0.01uF	R3	117-6811-15	1/10W 680 ohm	R94	033-1031-15	1/16W 10k ohm
C56	043-1804-90	0.1uF	R4	033-1051-15	1/16W 1M ohm	R95	033-1041-15	1/16W 100k ohm
C57	043-1610-90	0.015uF	R6	033-1021-15	1/16W 1k ohm	R96	033-1531-15	1/16W 15k ohm
C60	043-1604-90	47pF	R7	117-1001-15	1/10W 10 ohm	R97	033-1531-15	1/16W 15k ohm
C61	043-1804-90	0.1uF	R8	033-0000-05	0.5A 0 ohm	R98	033-2701-15	1/16W 27 ohm
C62	043-1804-90	0.1uF	R9	033-0000-05	0.5A 0 ohm	R99	033-2701-15	1/16W 27 ohm
C63	043-1804-90	0.1uF	R10	033-8231-15	1/16W 82k ohm	R103	033-1031-15	1/16W 10k ohm
C64	043-1804-90	0.1uF	R11	032-0140-88	1/16W 100k ohm(F)	R110	033-0000-05	0.5A 0 ohm
C65	042-0423-21	10V 22uF TAN	R12	033-1531-15	1/16W 15k ohm	R111	033-0000-05	0.5A 0 ohm
C66	043-1804-90	0.1uF	R13	033-8231-15	1/16W 82k ohm	R114	033-1031-15	1/16W 10k ohm
C67	043-1804-90	0.1uF	R15	033-2731-15	1/16W 27k ohm	R115	033-1221-15	1/16W 1.2k ohm
C70	168-1052-78	1uF	R16	033-4731-15	1/16W 47k ohm	R116	033-0000-05	0.5A 0 ohm
C72	168-1052-78	1uF	R17	033-2731-15	1/16W 27k ohm	R117	033-0000-05	0.5A 0 ohm
C73	043-1804-90	0.1uF	R18	033-2211-15	1/16W 220 ohm	R118	033-0000-05	0.5A 0 ohm
C74	043-1804-90	0.1uF	R19	033-2731-15	1/16W 27k ohm	R119	033-1041-15	1/16W 100k ohm
C78	043-1804-90	0.1uF	R20	033-2731-15	1/16W 27k ohm	R124	033-4731-15	1/16W 47k ohm
C79	043-1804-90	0.1uF	R21	033-2221-15	1/16W 2.2k ohm	R203	033-0000-05	0.5A 0 ohm
C80	043-1804-90	0.1uF	R22	033-1051-15	1/16W 1M ohm	R205	033-0000-05	0.5A 0 ohm
C81	043-1804-90	0.1uF	R24	033-2211-15	1/16W 220 ohm	R206	033-0000-05	0.5A 0 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R207	033-0000-05	0.5A 0 ohm	R215	033-0000-05	0.5A 0 ohm	X1	061-3534-90	16.92MHz
R208	033-0000-05	0.5A 0 ohm	R216	033-0000-05	0.5A 0 ohm	X2	061-3559-90	9MHz
R209	033-0000-05	0.5A 0 ohm	R218	033-0000-05	0.5A 0 ohm	X3	061-3522-90	32.768kHz
R210	119-0000-05	1/10W 0 ohm JW	R219	033-0000-05	0.5A 0 ohm	X4	061-3522-90	32.768kHz
R213	033-0000-05	0.5A 0 ohm	R324	033-1021-15	1/16W 1k ohm	PWB	039-3214-00	PWB(WITHOUT COMPONENT)
R214	033-0000-05	0.5A 0 ohm	TM101	073-0768-90	TERMINAL			

CD mechanism section: 929-5016-80

SENSOR PWB(B5) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB	PWB	039-2675-20	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			

INNER ES FPC(B6) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J1000	074-1278-01	SOCKET(16P)	PWB	039-1862-01	PWB(WITHOUT COMPONENT)