


EXPLODED VIEW • PARTS LIST

Escutcheon section

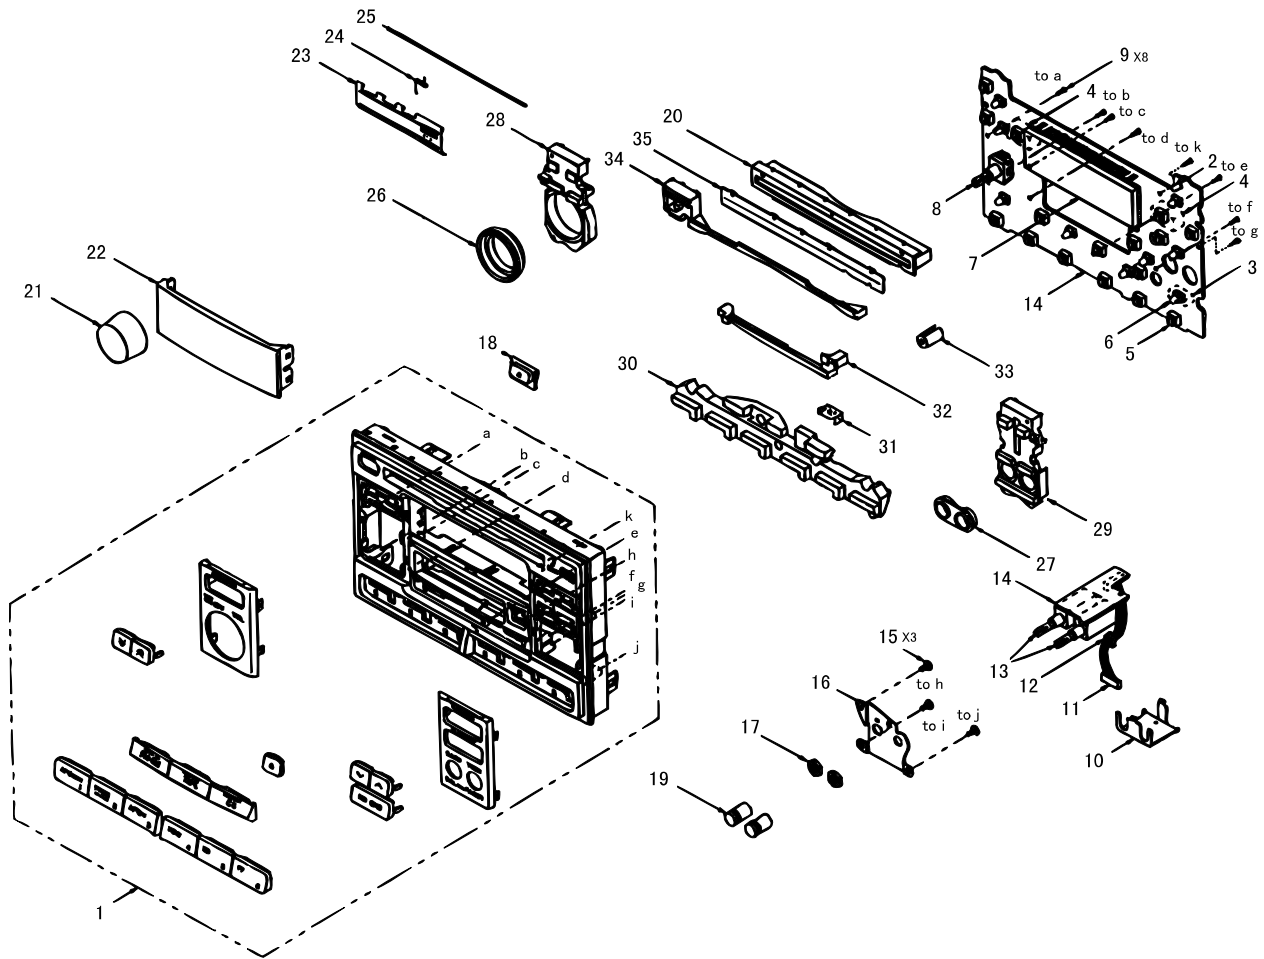

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7759-00	ESCUTCHEON ASS'Y(D-A)	1	20	335-4770-00	DISC GUIDE	1
	940-7765-00	(I-A,M-A,H-A,N-A)		21	380-5334-00	KNOB(MAIN VOL)	1
2	001-0412-18	DIODE	1	22	373-0798-10	DIAL COVER	1
3	076-0312-06	PULG(6P)	1	23	320-0503-23	DUSTPROOF COVER(I-A)	1
4	074-1105-16	OUTLET SOCKET(16P)	2		320-0503-41	DUSTPROOF COVER(M-A)	
5	013-6300-00	SWITCH(D-A)	16		320-0503-22	DUSTPROOF COVER(H-A)	
	013-6300-00	SWITCH(I-A,M-A,H-A,N-A)	17		320-0503-27	DUSTPROOF COVER(D-A)	
6	017-0433-02	PILOT LAMP(14V 40mA)	9		320-0503-38	DUSTPROOF COVER(N-A)	
7	379-4011-20	INDICATOR	1	24	750-2626-00	SPRING	1
8	016-0010-01	VARIABLE RESISTOR(MAIN)	1	25	341-1380-00	DOOR SHAFT	1
9	716-0872-00	PAD SCREW	8	26	335-4965-00	ILLUMI RING(MAIN VOL)	1
10	331-0572-01	VR HOLDER	1	27	335-4501-11	ILLUMI RING(BASS/TREB)	1
11	854-4111-00	EXTENSION LEAD	1	28	335-4861-00	ILLUMI B	1
12	335-3700-00	MINI SADDLE	1	29	335-4901-00	ILLUMI E(D-A,N-A)	1
13	016-3200-01	VARIABLE RESISTOR(B/T)	2		335-5524-00	ILLUMI F(I-A,M-A,H-A)	
14	039-0719-01	DISPLAY PWB	1	30	335-4860-01	ILLUMI A	1
15	716-1573-00	SCREW	3	31	331-1816-00	EARTH PLATE	1
16	331-1815-00	VR HOLDER	1	32	335-4978-00	ILLUMI BAR(TAPE)	1
17	722-0332-00	NUT	2	33	335-4769-00	INDICATOR LENZ	1
18	382-3994-00	BUTTON(CD EJ)	1	34	335-4977-00	ILLUMI BAR(CD)	1
19	380-5318-02	KNOB(BASS/TREB)	2	35	346-0094-01	DUSTPROOF COVER(CD)	1

This exploded view diagram illustrates the assembly of a 1U rack-mountable server chassis. The components are numbered 1 through 39, and their assembly points are indicated by letters (A-H) and dimension lines. Key parts include:

- Chassis (1):** The main frame, shown in two orientations (top and bottom).
- Front Panel (2):** The front-facing cover with mounting tabs (a, b, c, d, e, f, g, h, i, j, k, l, m, n, o, p, q, r, s, t, u, v, w, x, y, z).
- Internal Components:**
 - 39:** A circular component, likely a fan or filter, mounted on the front panel.
 - 38:** A rectangular component, possibly a filter or fan, mounted on the front panel.
 - 37:** A component mounted on the front panel.
 - 36:** A component mounted on the front panel.
 - 35:** A component mounted on the front panel.
 - 34:** A component mounted on the front panel.
 - 33:** A component mounted on the front panel.
 - 32:** A component mounted on the front panel.
 - 31:** A component mounted on the front panel.
 - 30:** A component mounted on the front panel.
 - 29:** A component mounted on the front panel.
 - 28:** A component mounted on the front panel.
 - 27:** A component mounted on the front panel.
 - 26:** A component mounted on the front panel.
 - 25:** A component mounted on the front panel.
 - 24:** A component mounted on the front panel.
 - 23:** A component mounted on the front panel.
 - 22:** A component mounted on the front panel.
 - 21:** A component mounted on the front panel.
 - 20:** A component mounted on the front panel.
 - 19:** A component mounted on the front panel.
 - 18:** A component mounted on the front panel.
 - 17:** A component mounted on the front panel.
 - 16:** A component mounted on the front panel.
 - 15:** A component mounted on the front panel.
 - 14:** A component mounted on the front panel.
 - 13:** A component mounted on the front panel.
 - 12:** A component mounted on the front panel.
 - 11:** A component mounted on the front panel.
 - 10:** A component mounted on the front panel.
 - 9:** A component mounted on the front panel.
 - 8:** A component mounted on the front panel.
 - 7:** A component mounted on the front panel.
 - 6:** A component mounted on the front panel.
 - 5:** A component mounted on the front panel.
 - 4:** A component mounted on the front panel.
 - 3:** A component mounted on the front panel.
 - 2:** A component mounted on the front panel.
 - 1:** A component mounted on the front panel.

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	310-1561-10	UPPER CASE	2
2	716-0878-00	IT-SCREW	25
3	039-0757-00	MAIN PWB(I-A,D-A,N-A)	1
	039-0918-00	MAIN PWB(M-A,H-A)	
4	073-0731-01	TERMINAL	4
5	880-1725B	FM TUNER PACK	1
6	331-0563-00	ANT HOLDER	1
7	074-1013-00	OUTLET SOCKET(A12)	1
8	076-0368-14	PLUG(14PIN)	1
9	076-0368-24	PLUG(24PIN)	1
10	076-0510-20	PLUG(20PIN)	1
11	345-3166-00	SPACER(D-A,N-A)	1
	345-3166-01	SPACER(I-A,M-A,H-A)	
12	331-1668-00	ANT SHIELD	1
13	039-0758-00	AMP PWB	1

NO.	PART NO.	DESCRIPTION	Q'TY
14	076-0477-12	PLUG(12PIN)	1
15	074-0898-14	OUTLET SOCKET(14PIN)	1
16	076-0477-26	PLUG(26PIN)	1
17	074-0898-24	OUTLET SOCKET(24PIN)	1
18	331-1924-00	IC HOLDER	1
19	051-2011-00	POWER IC	2
20	074-1131-00	OUTLET SOCKET(S16)	1
21	946-0056-01	CHASSIS ASS'Y(D-A,N-A)	1
	946-0056-51	CHASSIS ASS'Y(I-A,M-A,H-A)	
22	880-1514D	AM TUNER PACK	1
23	286-8543-01	SETPLATE(I-A)	1
	286-8543-03	SETPLATE(M-A)	
	286-8543-02	SETPLATE(H-A)	
	286-8153-07	SETPLATE(D-A)	
	286-8153-10	SETPLATE(N-A)	

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
24	331-1762-00	SHIELD PLATE(D-A,N-A)	1	34	300-9791-00	BRACKET(D-A,N-A)	1
	331-1762-50	SHIELD PLATE(I-A,M-A,H-A)			300-9791-10	BRACKET(I-A,M-A,H-A)	
25	737-2612-11	MACHINE SCREW	2	35	300-9793-00	BRACKET(D-A,N-A)	1
26	039-0718-02	SYSTEM CONTROL PWB	1		300-9793-10	BRACKET(I-A,M-A,H-A)	
27	076-0515-16	PLUG(16PIN)	2	36	929-0065-81	CD MECHANISM	1
28	074-0986-26	OUTLET SOCKET(26PIN)	1	37	345-4138-00	SPACER(D-A,N-A)	1
29	331-0567-00	TR HOLDER	1		345-4138-50	SPACER(I-A,M-A,H-A)	
30	074-1047-12	OUTLET SOCKET(12PIN)	1	38	347-2022-02	TAPE(D-A,N-A)	1
31	074-1047-26	OUTLET SOCKET(26PIN)	1		347-2022-01	TAPE(I-A,M-A,H-A)	
32	816-2398-01	FLAT CABLE	1	39	930-0736-03	TAPE MECHANISM	1
33	300-9789-00	BRACKET(D-A,N-A)	1	40	714-2303-81	MACHINE SCREW	9
	300-9789-10	BRACKET(I-A,M-A,H-A)		41	313-1617-60	HEAT SINK	1

■ ELECTRICAL PARTLIST

※ Other parts of Main PWB and System control PWB and Display PWB and Amp PWB are the same as PN-2213C

Main PWB section

PN-2213D-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 129	181-1053-62	50V 1 μ F LL	C 242	178-1042-78	0.1 μ F	R 223	117-1511-10	1/10W 150 Ω
C 201	178-1242-78	0.12 μ F	C 250	178-1042-78	0.1 μ F	R 224	117-1541-10	1/10W 150k Ω
C 202	172-2741-15	0.27 μ F	C 251	178-1042-78	0.1 μ F	R 230	117-6231-10	1/10W 62k Ω
C 203	178-1532-78	0.015 μ F	C 261	178-1842-78	0.18 μ F	R 231	117-1031-10	1/10W 10k Ω
C 204	178-1232-78	0.012 μ F	C 262	178-1042-78	0.1 μ F	R 238	117-2431-10	1/10W 24k Ω
C 210	178-1542-78	0.15 μ F	C 270	178-1042-78	0.1 μ F	R 242	117-1021-10	1/10W 1k Ω
C 211	178-1542-78	0.15 μ F	C 271	178-1042-78	0.1 μ F	R 250	117-5131-10	1/10W 51k Ω
C 221	178-1242-78	0.12 μ F	C 275	178-1032-78	0.01 μ F	R 251	117-7521-10	1/10W 7.5k Ω
C 222	172-2741-15	0.27 μ F	R 202	117-2221-10	1/10W 2.2k Ω	R 255	117-8221-10	1/10W 8.2k Ω
C 223	178-1532-78	0.015 μ F	R 203	117-1511-10	1/10W 150 Ω	R 256	117-2731-10	1/10W 2.7k Ω
C 224	178-1232-78	0.012 μ F	R 204	117-1541-10	1/10W 150k Ω	R 262	117-1021-10	1/10W 1k Ω
C 230	178-1542-78	0.15 μ F	R 205	117-8221-10	1/10W 8.2k Ω	R 270	117-5131-10	1/10W 51k Ω
C 231	178-1542-78	0.15 μ F	R 210	117-6231-10	1/10W 62k Ω	R 271	117-7521-10	1/10W 7.5k Ω
C 237	178-1032-78	0.01 μ F	R 211	117-1031-10	1/10W 10k Ω	R 276	117-2731-10	1/10W 2.7k Ω
C 241	178-1842-78	0.18 μ F	R 222	117-2221-10	1/10W 2.2k Ω			

PN-2213H-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 129	181-1053-62	50V 1 μ F LL	C 262	178-2242-78	0.22 μ F	R 245	117-2721-10	1/10W 2.7k Ω
C 157	176-1011-00	100pF CH	C 263	178-6822-78	0.0068 μ F	R 250	117-3031-10	1/10W 30k Ω
C 241	178-5632-78	0.056 μ F	C 264	178-6832-78	0.068 μ F	R 251	117-7521-10	1/10W 7.5k Ω
C 242	178-2242-78	0.22 μ F	C 270	178-6832-78	0.068 μ F	R 262	117-2221-10	1/10W 2.2k Ω
C 243	178-6822-78	0.0068 μ F	C 271	178-6832-78	0.068 μ F	R 265	117-2721-10	1/10W 2.7k Ω
C 244	178-6832-78	0.068 μ F	L 106	010-2174-16	22 μ H	R 270	117-3031-10	1/10W 30k Ω
C 250	178-6832-78	0.068 μ F	R 161	117-1041-10	1/10W 100k Ω	R 271	117-7521-10	1/10W 7.5k Ω
C 251	178-6832-78	0.068 μ F	R 174	117-1021-10	1/10W 1k Ω	TC 101	004-1580-09	
C 261	178-5632-78	0.056 μ F	R 242	117-2221-10	1/10W 2.2k Ω			

PN-2213I-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 129	181-1053-62	50V 1 μ F LL	C 262	178-6832-78	0.068 μ F	R 238	117-1531-10	1/10W 15k Ω
C 157	176-1011-00	100pF CH	C 263	178-3332-78	0.033 μ F	R 242	117-8211-10	1/10W 820 Ω
C 201	178-1532-78	0.015 μ F	C 264	178-2222-78	2200pF	R 245	117-1021-10	1/10W 1k Ω
C 202	178-4732-78	0.047 μ F	C 270	172-5631-11	0.056 μ F	R 250	032-0092-01	1/10W 33k Ω F
C 217	178-1022-78	1000pF	C 271	172-5631-11	0.056 μ F	R 251	032-0092-10	1/10W 7.5k Ω F
C 221	178-1532-78	0.015 μ F	L 106	010-2174-16	22 μ H	R 252	032-0092-00	1/10W 10k Ω F
C 222	178-4732-78	0.047 μ F	R 161	117-1041-10	1/10W 100k Ω	R 253	032-0092-26	1/10W 51k Ω F
C 237	178-1022-78	1000pF	R 174	117-1021-10	1/10W 1k Ω	R 262	117-8211-10	1/10W 820 Ω
C 241	178-1842-78	0.18 μ F	R 202	117-1221-10	1/10W 1.2k Ω	R 265	117-1021-10	1/10W 1k Ω
C 242	178-6832-78	0.068 μ F	R 203	117-1511-10	1/10W 150 Ω	R 270	032-0092-01	1/10W 33k Ω F
C 243	178-3332-78	0.033 μ F	R 204	117-1541-10	1/10W 150k Ω	R 271	032-0092-10	1/10W 7.5k Ω F
C 244	178-2222-78	2200pF	R 218	117-1531-10	1/10W 15k Ω	R 272	032-0092-00	1/10W 10k Ω F
C 250	172-5631-11	0.056 μ F	R 222	117-1221-10	1/10W 1.2k Ω	R 273	032-0092-26	1/10W 51k Ω F
C 251	172-5631-11	0.056 μ F	R 223	117-1511-10	1/10W 150 Ω	TC 101	004-1580-09	
C 261	178-1842-78	0.18 μ F	R 224	117-1541-10	1/10W 150k Ω			

PN-2213M-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 129	181-1053-62	50V 1 μ F LL	C 262	178-1232-78	0.012 μ F	R 230	032-0092-01	1/10W 33k Ω F
C 157	176-1011-00	100pF CH	C 263	178-1542-78	0.15 μ F	R 231	032-0092-10	1/10W 7.5k Ω F
C 201	178-2732-78	0.027 μ F	C 264	178-8222-78	8200pF	R 232	032-0092-00	1/10W 10k Ω F
C 202	178-3932-78	0.039 μ F	C 270	172-3341-11	0.33 μ F	R 233	032-0092-26	1/10W 51k Ω F
C 203	178-6832-78	0.068 μ F	C 271	172-3341-11	0.33 μ F	R 242	117-2411-10	1/10W 240 Ω
C 204	178-1042-78	0.1 μ F	C 275	178-1032-78	0.01 μ F	R 245	117-1021-10	1/10W 1k Ω
C 210	172-6831-11	0.068 μ F	L 106	010-2174-16	22 μ H	R 250	032-0092-26	1/10W 51k Ω F
C 211	172-6831-11	0.068 μ F	R 161	117-1041-10	1/10W 100k Ω	R 251	032-0092-03	1/10W 15k Ω F
C 221	178-2732-78	0.027 μ F	R 174	117-1021-10	1/10W 1k Ω	R 252	032-0092-00	1/10W 10k Ω F
C 222	178-3932-78	0.039 μ F	R 202	117-2721-10	1/10W 2.7k Ω	R 253	032-0092-26	1/10W 51k Ω F
C 223	178-6832-78	0.068 μ F	R 203	117-1511-10	1/10W 150 Ω	R 256	117-3621-10	1/10W 3.6k Ω
C 224	178-1042-78	0.1 μ F	R 204	117-1541-10	1/10W 150k Ω	R 262	117-2411-10	1/10W 240 Ω
C 230	172-6831-11	0.068 μ F	R 205	117-1021-10	1/10W 1k Ω	R 265	117-1021-10	1/10W 1k Ω
C 231	172-6831-11	0.068 μ F	R 210	032-0092-01	1/10W 33k Ω F	R 270	032-0092-26	1/10W 51k Ω F
C 241	172-1051-11	1 μ F	R 211	032-0092-10	1/10W 7.5k Ω F	R 271	032-0092-03	1/10W 15k Ω F
C 242	178-1232-78	0.012 μ F	R 212	032-0092-00	1/10W 10k Ω F	R 272	032-0092-00	1/10W 10k Ω F
C 243	178-1542-78	0.15 μ F	R 213	032-0092-26	1/10W 51k Ω F	R 273	032-0092-26	1/10W 51k Ω F
C 244	178-8222-78	8200pF	R 222	117-2721-10	1/10W 2.7k Ω	R 276	117-3621-10	1/10W 3.6k Ω
C 250	172-3341-11	0.33 μ F	R 223	117-1511-10	1/10W 150 Ω	TC 101	004-1580-09	
C 251	172-3341-11	0.33 μ F	R 224	117-1541-10	1/10W 150k Ω			
C 261	172-1051-11	1 μ F	R 225	117-1021-10	1/10W 1k Ω			

PN-2213N-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 129	181-1053-62	50V 1 μ F LL	C 243	178-4742-78	0.47 μ F	R 211	117-6821-10	1/10W 6.8k Ω
C 157	176-1011-00	100pF CH	C 244	178-1042-78	0.1 μ F	R 216	117-1041-10	1/10W 100k Ω
C 201	178-1822-78	1800pF	C 250	178-5632-78	0.056 μ F	R 222	117-1231-10	1/10W 12k Ω
C 202	178-1032-78	0.01 μ F	C 251	178-5632-78	0.056 μ F	R 223	117-1511-10	1/10W 150 Ω
C 203	178-6832-78	0.068 μ F	C 263	178-4742-78	0.47 μ F	R 224	117-1541-10	1/10W 150k Ω
C 204	172-5641-11	0.56 μ F	C 264	178-1042-78	0.1 μ F	R 225	117-1521-10	1/10W 1.5k Ω
C 210	178-5632-78	0.056 μ F	C 270	178-5632-78	0.056 μ F	R 230	117-4731-10	1/10W 47k Ω
C 211	178-5632-78	0.056 μ F	C 271	178-5632-78	0.056 μ F	R 231	117-6821-10	1/10W 6.8k Ω
C 215	178-1022-78	1000pF	L 106	010-2174-16	22 μ H	R 236	117-1041-10	1/10W 100k Ω
C 221	178-1822-78	1800pF	R 161	117-1041-10	1/10W 100k Ω	R 245	117-2021-10	1/10W 2k Ω
C 222	178-1032-78	0.01 μ F	R 174	117-1021-10	1/10W 1k Ω	R 250	117-5631-10	1/10W 56k Ω
C 224	172-5641-11	0.56 μ F	R 202	117-1231-10	1/10W 12k Ω	R 251	117-9121-10	1/10W 9.1k Ω
C 230	178-5632-78	0.056 μ F	R 203	117-1511-10	1/10W 150 Ω	R 265	117-2021-10	1/10W 2k Ω
C 231	178-5632-78	0.056 μ F	R 204	117-1541-10	1/10W 150k Ω	R 270	117-5631-10	1/10W 56k Ω
C 233	178-6832-78	0.068 μ F	R 205	117-1521-10	1/10W 1.5k Ω	R 271	117-9121-10	1/10W 9.1k Ω
C 235	178-1022-78	1000pF	R 210	117-4731-10	1/10W 47k Ω	TC 101	004-1580-09	

System control PWB section

PN-2213D-A/H-A/I-A/M-A/N-A

REF No.	PART No.	DESCRIPTION
R 590	111-1021-91	1/4W 1k Ω

PN-2213H-A/I-A/M-A/N-A

REF No.	PART No.	DESCRIPTION
D 519	001-0330-00	1SS119
R 521	111-1021-91	1/4W 1k Ω
R 540	111-4721-91	1/4W 4.7k Ω
R 541	111-4721-91	1/4W 4.7k Ω
R 591	111-1021-91	1/4W 1k Ω
R 592	111-1021-91	1/4W 1k Ω
R 593	111-1021-91	1/4W 1k Ω

Display PWB section

PN-2213D-A/H-A/I-A/M-A/N-A

REF No.	PART No.	DESCRIPTION
R 703	117-1041-10	1/10W 100k Ω

PN-2213H-A/I-A/M-A/N-A


REF No.	PART No.	DESCRIPTION
S 717	013-6300-00	

CIRCUIT DIAGRAM

PN2213D-A/H-A/I-A/M-A/N-A

Display PWB section

※ Add R703, Other parts of Display PWB is the same as PN-2213C




PN-2213H-A/I-A/M-A/N-A


Display PWB section

※ Add S717, Other parts of Display PWB is the same as PN-2213C




※ PARTS LIST on page 12.



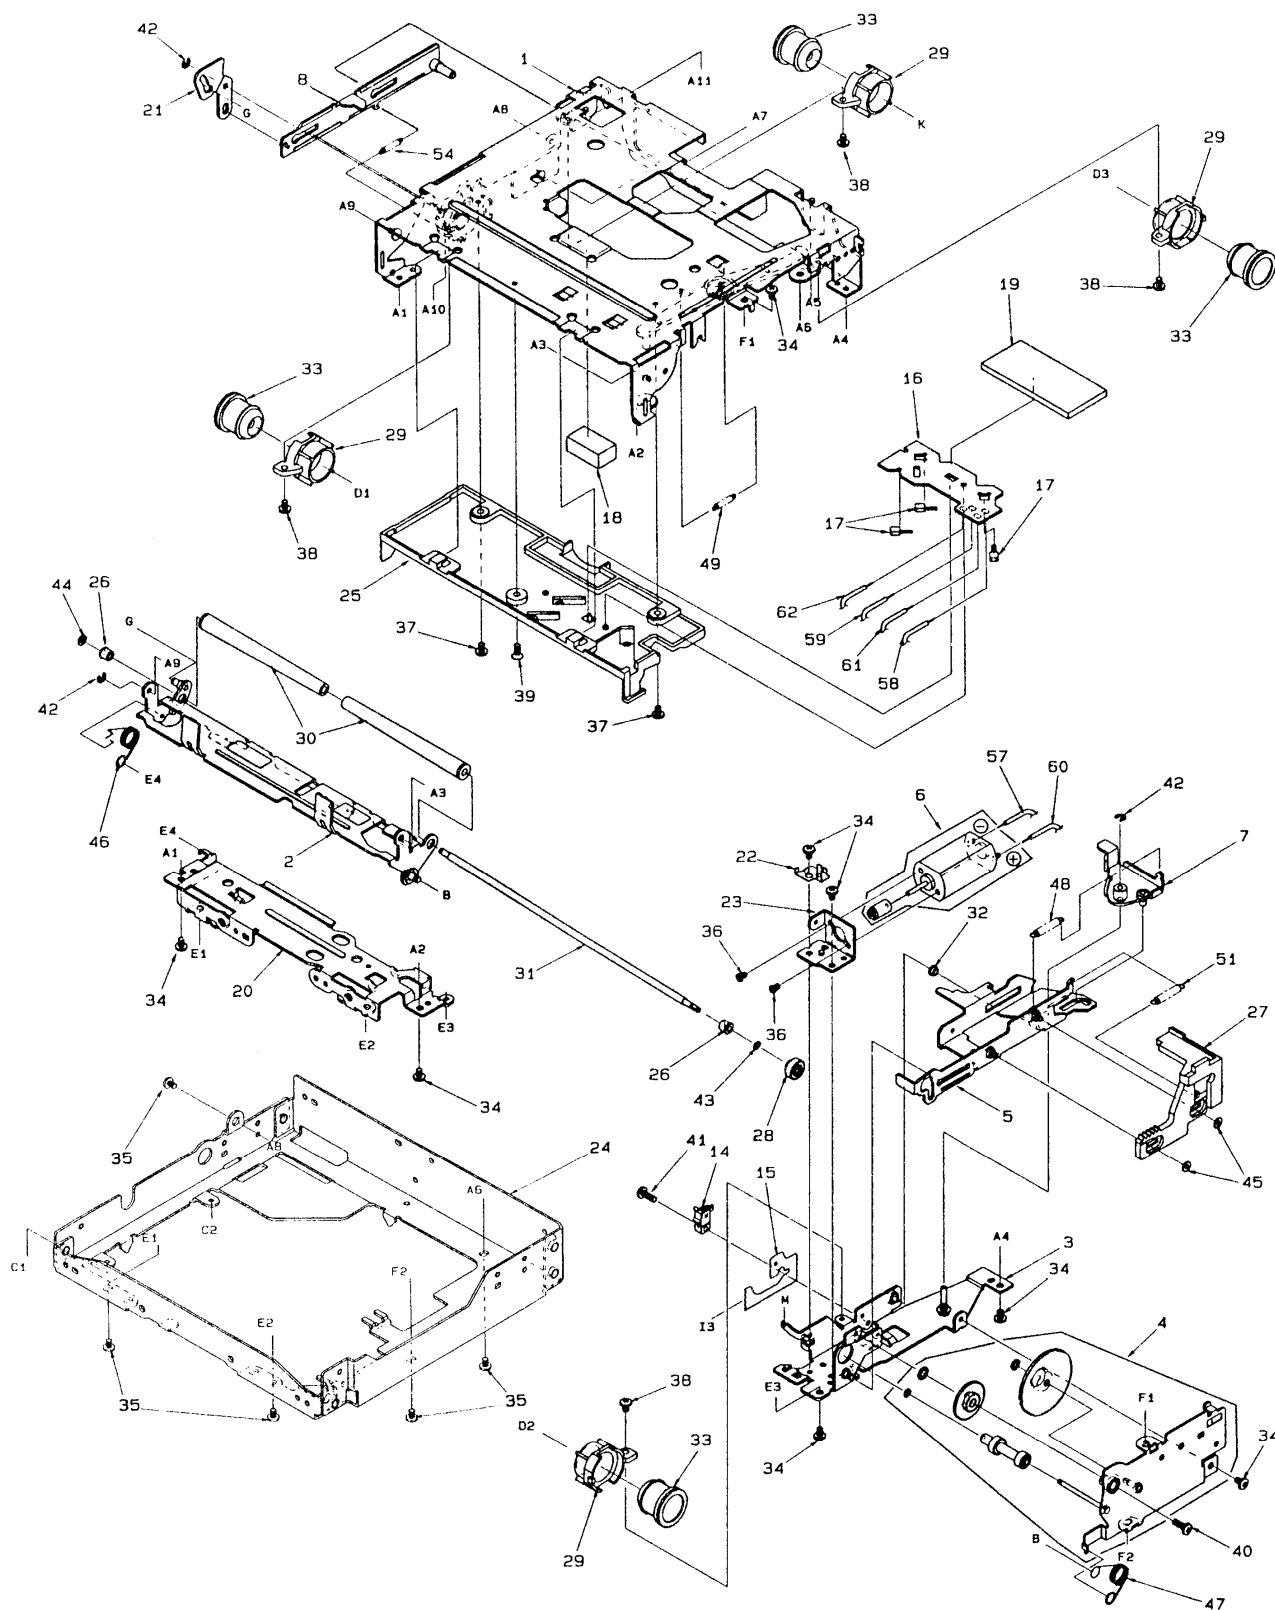

CD mechanism section : 929-0065-81

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0308-06	CHASSIS ASS'Y	1	18	345-7513-01	CLAMPER SHEET	1
2	966-0309-04	L-DISC-G-ASS'Y	1	19	345-7514-00	S-PEB-SHEET	1
3	966-0310-06	SFT-P-CH-ASS'Y	1	20	620-0485-03	FRONT PLATE	1
4	HBS-430-100	GEAR-SUB-ASS'Y	1	21	620-0488-01	S-L-LINK PLATE	1
5	966-0312-06	SHIFT-P-ASS'Y	1	22	620-0489-01	MOTOR PLATE	1
6	SMA-147-100	MOTOR ASS'Y(LOADING)	1	23	620-0492-01	MOTOR BRACKET	1
7	966-0358-01	DRIVE-L-PL-ASS'Y	1	24	620-0697-00	MECHA BRACKET	1
8	966-0359-03	SIDE-L-PL-ASS'Y	1	25	621-0242-02	U-DISC GUIDE	1
9	HBS-431-100	PWB ASS'Y	1	26	621-0243-02	ROLLER SLEEVE	2
10	HBS-432-100	LS-GEAR ASS'Y	1	27	621-0248-06	RACK GEAR	1
11	SMA-146-100	MOTOR ASS'Y(SLED)	1	28	621-0249-02	ROLLER GEAR	1
12	SMA-151-100	MOTOR ASS'Y(SPINDLE)	1	29	621-0250-01	DAMPER HOLDER	4
13	HBS-433-100	DRIVE UNIT	1	30	621-0258-03	LOADING ROLLER	2
13-1	013-7100-00	LIMIT SWITCH	1	31	622-1072-05	ROLER SHAFT	1
13-2	620-0198-03	CLAMPER PLATE	1	32	622-1219-01	SHIFT ROLLER	1
13-3	620-0491-02	SPRING PLATE	1	33	629-0058-00	DAMPER-DL	4
13-4	620-0690-00	RATTLE PLATE	1	34	714-2003-81	MACHINE SCREW(M2X3)	8
13-5	621-0205-02	CLAMPER PLATE	1	35	714-2603-81	MACHINE SCREW(M2.6X3)	5
13-6	621-0251-02	LOCK LINK	1	36	716-1468-00	SCREW	2
13-7	621-0252-03	DISC STOPPER	1	37	716-1507-00	SCREW	2
13-8	621-0253-01	MOTOR HOLDER	1	38	716-1670-00	SCREW	6
13-9	621-0255-02	SECOND GEAR	1	39	716-1677-00	SCREW	1
13-10	621-0257-05	SCREW HOLDER	1	40	716-1704-00	SCREW	1
13-11	621-0357-01	PICKUP GUIDE	1	41	716-1742-00	SCREW	1
13-12	621-0358-02	LS-HOLDER-F	1	42	743-1500-10	E-RING	3
13-13	621-0359-02	LS-HOLDER-R	1	43	746-0712-03	WASHER	1
13-14	622-1073-02	CLAMPER ROLLER	1	44	746-0762-00	WASHER	1
13-15	714-2003-81	MACHINE SCREW (M2X3)	10	45	746-0877-02	WASHER	2
13-16	716-0675-00	SCREW	2	46	750-3090-02	RO-SPRING-L	1
13-17	716-1468-00	SCREW	2	47	750-3091-03	RO-SPRING-R	1
13-18	716-1555-00	WAVE SCREW	1	48	750-3092-03	SHIFT SPRING	1
13-19	716-1733-00	SCREW	2	49	750-3094-00	S-ARM SPRING	1
13-20	732-2004-11	SEMS SCREW	2	50	750-3096-01	DR-SPRING-R	1
13-21	739-1735-17	PRECISION SCREW	2	51	750-3098-00	L-LINK SPRING	1
13-22	750-3097-03	CLAMPER SPRING	1	52	750-3164-00	DR-SPRING-LR	1
13-23	750-3098-00	L-LINK SPRING	1	53	750-3188-00	DR-SP-F-B	1
13-24	750-3099-00	ES-SPRING	1	54	750-3189-00	SIDE-L-SPRING	1
13-25	746-0761-00	WASHER	2	55	750-3201-00	DR-SPRING-F-R	1
13-26	966-0314-01	STOP LINK ASS'Y	1	56	750-3202-00	CENTER SPRING-B	1
13-27	966-0447-02	DR-PLATE ASS'Y	1	57	800-4904-60	VINYL COAT WIRE(BLK)	1
13-28	966-0448-00	SIDE PLATE ASS'Y	1	58	800-4910-60	VINYL COAT WIRE(BLK)	1
13-29	966-0449-00	CLAMP LINK ASS'Y	1	59	801-4910-60	VINYL COAT WIRE(BRN)	1
13-30	969-0005-00	PICKUP UNIT ASS'Y	1	60	802-4904-60	VINYL COAT WIRE(RED)	1
14	013-3879-01	CHACKING SWITCH	1	61	802-4910-60	VINYL COAT WIRE(RED)	1
15	039-0586-01	FLEXIBLE PWB	1	62	804-4910-60	VINYL COAT WIRE(YEL)	1
16	039-0588-01	SENSOR PWB	1	63	816-2372-00	VINYL COAT WIRE(BLU)	1
17	060-0252-01	PHOTO TR (PT4850F)	3	64	816-2373-00	VINYL COAT WIRE(WHT)	1

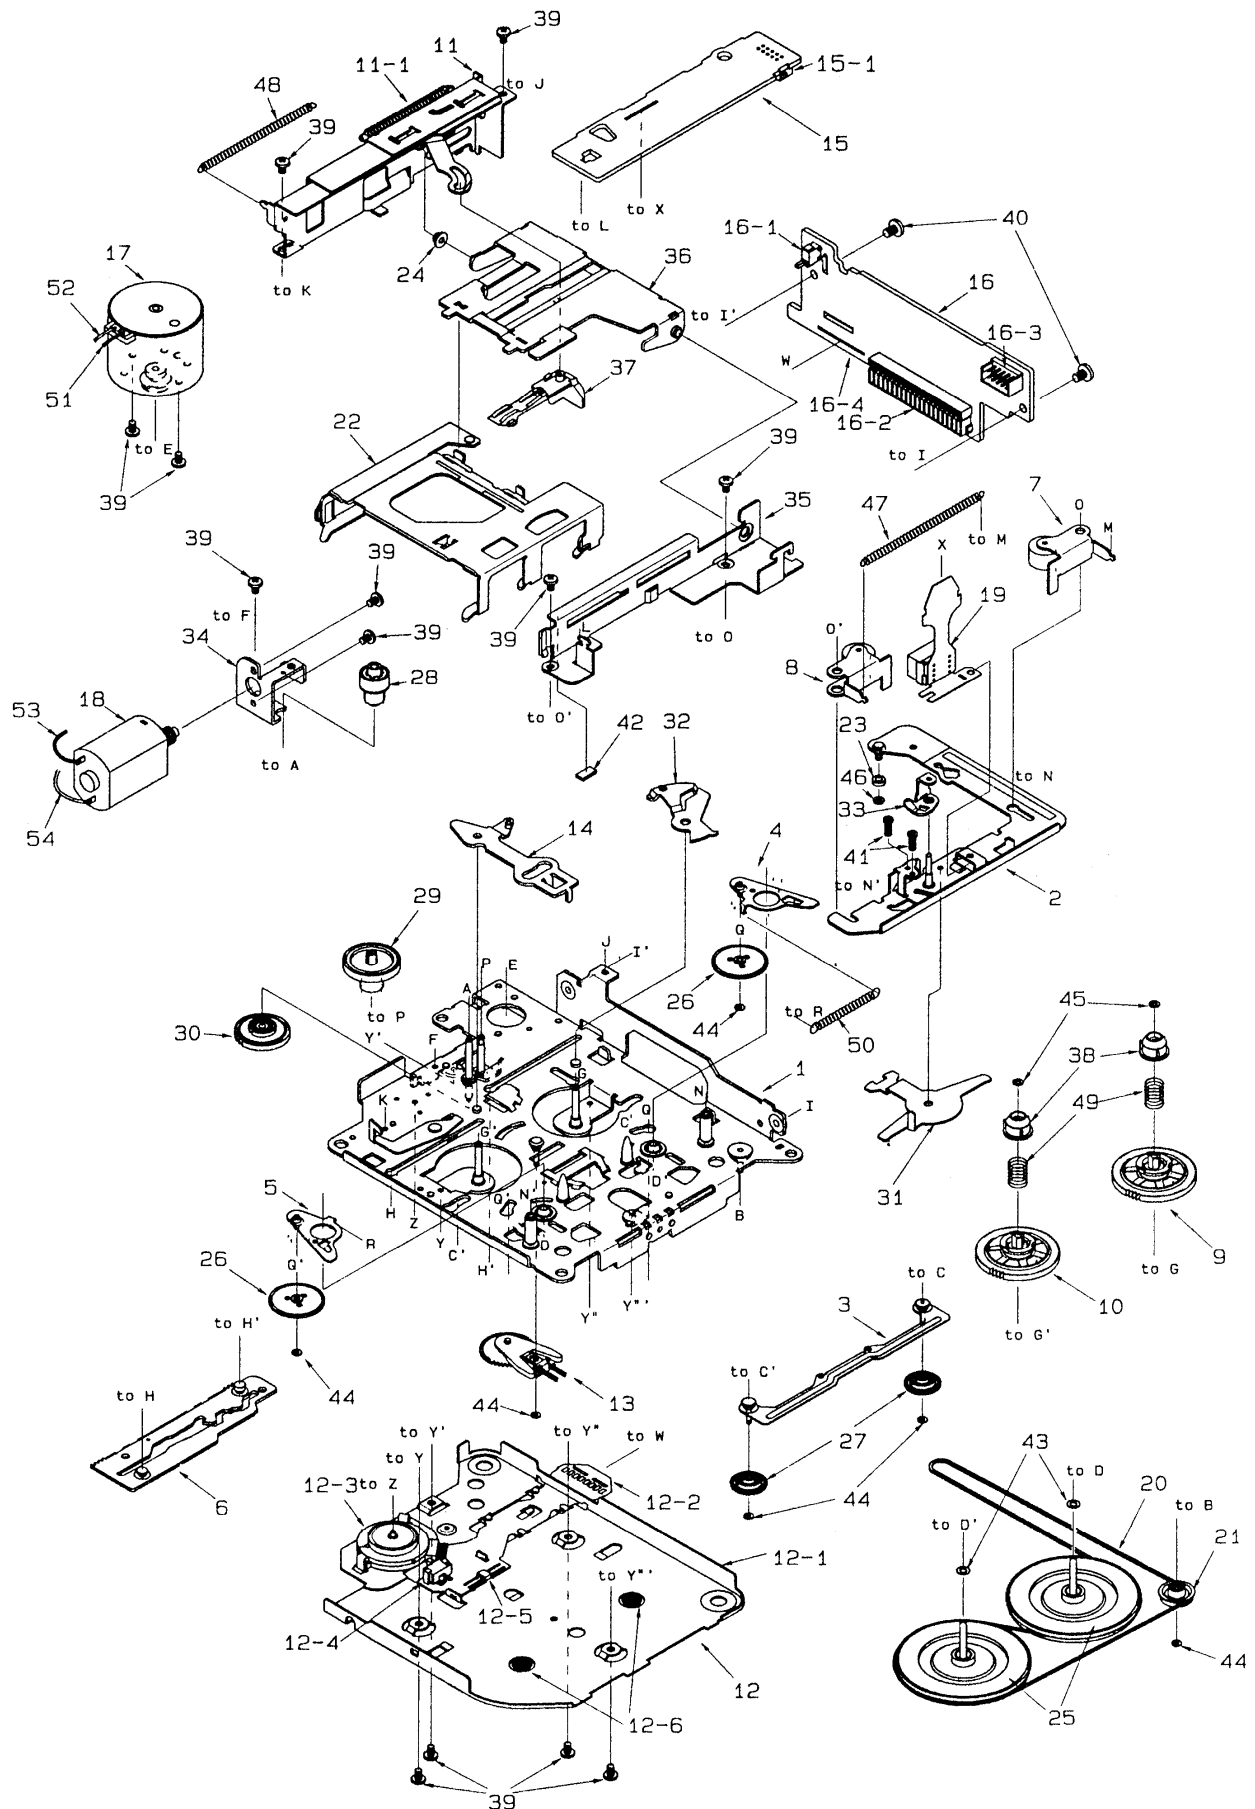

NO.	PART NO.	DESCRIPTION	QTY	NO.	PART NO.	DESCRIPTION	QTY
1	960-4294-14	DECK PLATE ASS'Y	1	22	606-0101-08	PACK GUIDE	1
2	960-4261-05	HEAD PLATE ASS'Y	1	23	610-0342-01	HEAD-P-ROLLER	1
3	960-4262-03	FF/REW-P-ASS'Y	1	24	610-0343-00	GUIDE-A-ROLLER	1
4	960-4263-03	IDLER-P-ASS'Y L	1	25	611-0091-02	FLYWHEEL	2
5	960-4264-03	IDLER-P-ASS'Y R	1	26	613-0285-02	IDLER GEAR	2
6	960-4266-05	MODE PLATE ASS'Y	1	27	613-0286-02	FF/REW GEAR	2
7	960-4269-05	ROLLER ASS'Y F	1	28	613-0288-01	HELIACAL GEAR	1
8	960-4270-05	ROLLER ASS'Y R	1	29	613-0289-01	GEAR A	1
9	960-4348-02	REEL ASS'Y F	1	30	613-0337-00	POWER GEAR	1
10	960-4349-02	REEL ASS'Y R	1	31	630-2597-01	CHANGE LINK	1
11	960-4298-09	EJECT SUB ASS'Y	1	32	630-2598-05	EJECT LINK	1
11-1	750-2948-01	SWITCH PLATE SPRING	1	33	630-2600-01	ADJUST LINK	1
12	960-4338-07	BOTTOM SUB ASS'Y	1	34	630-2601-02	MOTOR PLATE	1
12-1	960-4295-02	BOTTOM-P-ASS'Y	1	35	630-2626-03	PWB FLAME	1
12-2	099-9926-01	FLEXIBLE PWB	1	36	630-2605-02	GUIDE ARM	1
12-3	013-3951-10	SWITCH(MODE)	1	37	631-1992-02	PACK STOPPER	1
12-4	013-3953-01	SWITCH(METAL)	1	38	631-1993-01	SLIDE BUSH	2
12-5	051-1776-00	IC	1	39	716-0484-00	SCREW(M2X2.5)	13
12-6	746-0767-00	WASHER	2	40	716-1676-00	PWB SCREW(M2.6X6)	2
13	960-4282-06	DIRECT SUB ASS'Y	1	41	716-0833-10	AZIMUTH SCREW	2
14	960-4301-02	PLATE LINK ASS'Y	1	42	746-0861-00	PACK SET WASHER	1
15	099-9927-00	SIDE PWB	1	43	746-0624-00	WASHER	2
15-1	074-0898-10	OUTLET SOCKET(10P)	1	44	746-0724-00	WASHER	6
16	990-0713-00	REAR PWB ASS'Y	1	45	746-0761-00	WASHER	2
16-1	013-3906-00	SWITCH(TAPE IN)	1	46	746-0762-00	WASHER	1
16-2	074-1104-20	OUTLET SOCKET(20P)	1	47	750-2946-02	PINCH SPRING	1
16-3	076-0368-10	PLUG(10P)	1	48	750-2947-03	EJECT-P-SPRING	1
16-4	039-0489-00	REAR PWB	1	49	750-2949-00	SLIDE SPRING	2
17	SMA-130-100	MAIN MOTOR ASS'Y	1	50	750-3017-02	IDLER-P-SPRING	1
18	SMA-131-100	POWER MOTOR ASS'Y	1	51	800-4910-60	WIRE(BLK)	1
19	011-0307-34	HEAD	1	52	802-4911-60	WIRE(RED)	1
20	602-0118-00	BELT	1	53	806-4914-60	WIRE(BLU)	1
21	604-0046-00	TENSION PULLEY	1	54	809-4914-60	WIRE(WHT)	1