


EXPLODED VIEW / PARTS LIST


Escutcheon section

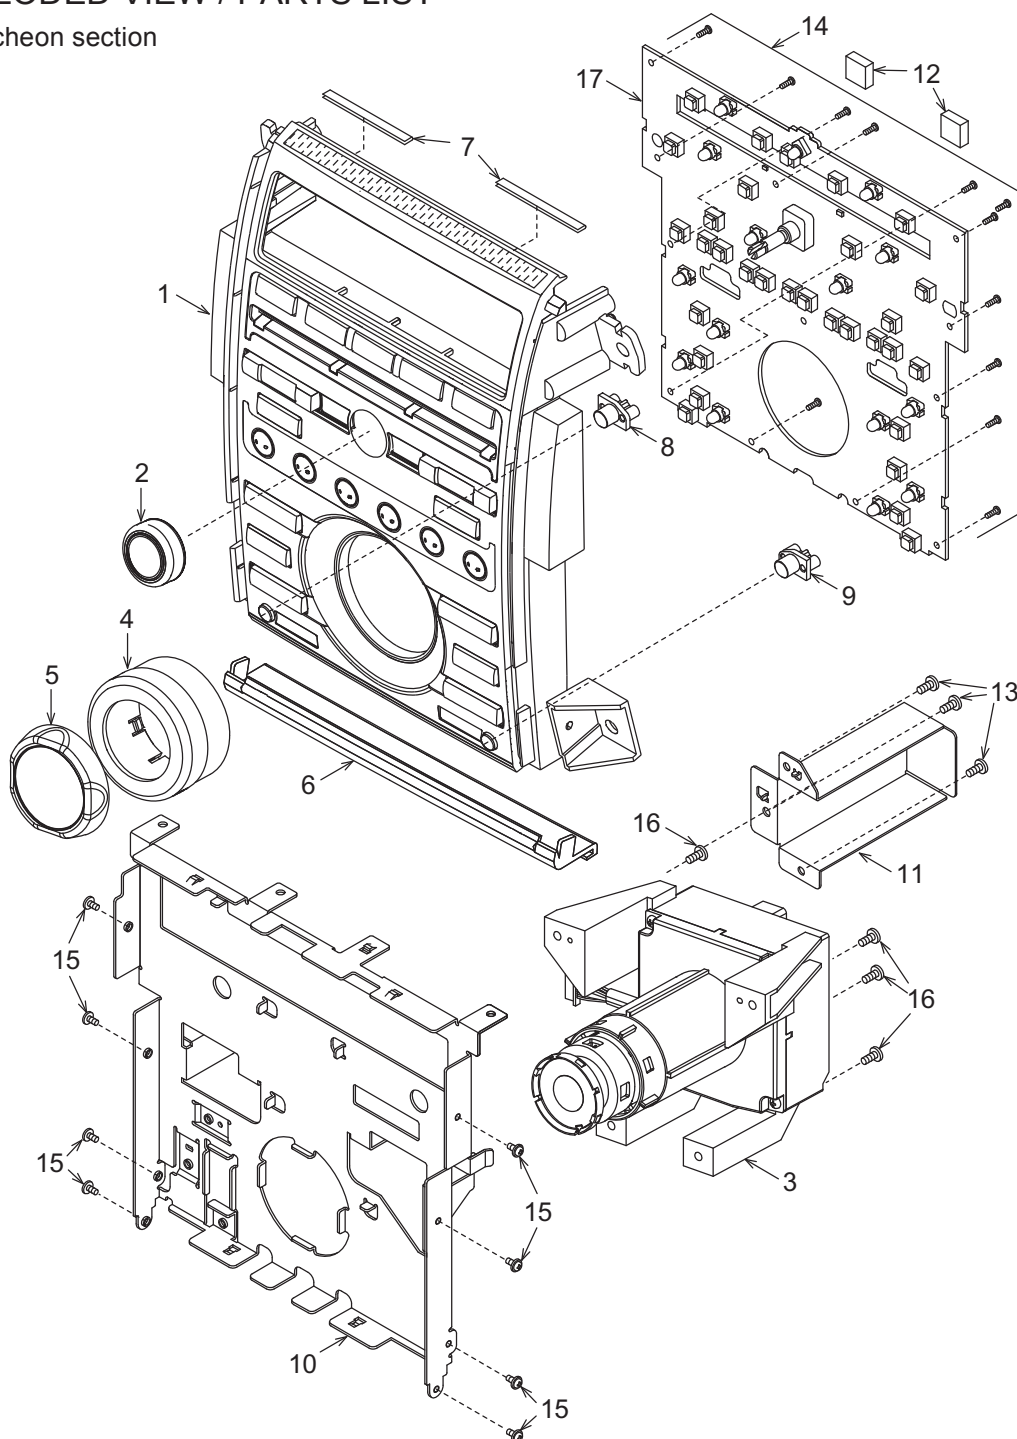

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8130-03 940-8129-03 940-8131-03	ES-ASSY(PH2644BG) ES-ASSY(PH2644BH) ES-ASSY(PH2644BI)	1	9	382-7087-01	BUTTON	1
2	947-0598-00	KNOB-ASSY	1	10	309-0802-01	ES-PLATE	1
3	947-0558-02	JOG CONTROLLER	1	11	331-3862-01	JOG-CVR	1
4	947-0559-00	KNOB(OUTER)	1	12	345-5821-00	CUSHION RUBBER	2
5	947-0560-00	KNOB(TOP)	1	13	714-2606-8B	MACHINE SCREW(M2.6 x 6)	3
6	335-7274-10	WOOD PANEL	1	14	716-0778-51	WAVE SCREW(2 x 6)	12
7	347-7413-00	CUSHION SHEET	2	15	716-0878-50	IT-SCREW(M2.6 x 5)	8
8	382-7086-01	BUTTON	1	16	716-1573-50	SPECIAL SCREW(2.6 x 6)	4
				17	-----	SWITCH PWB	1

Main section

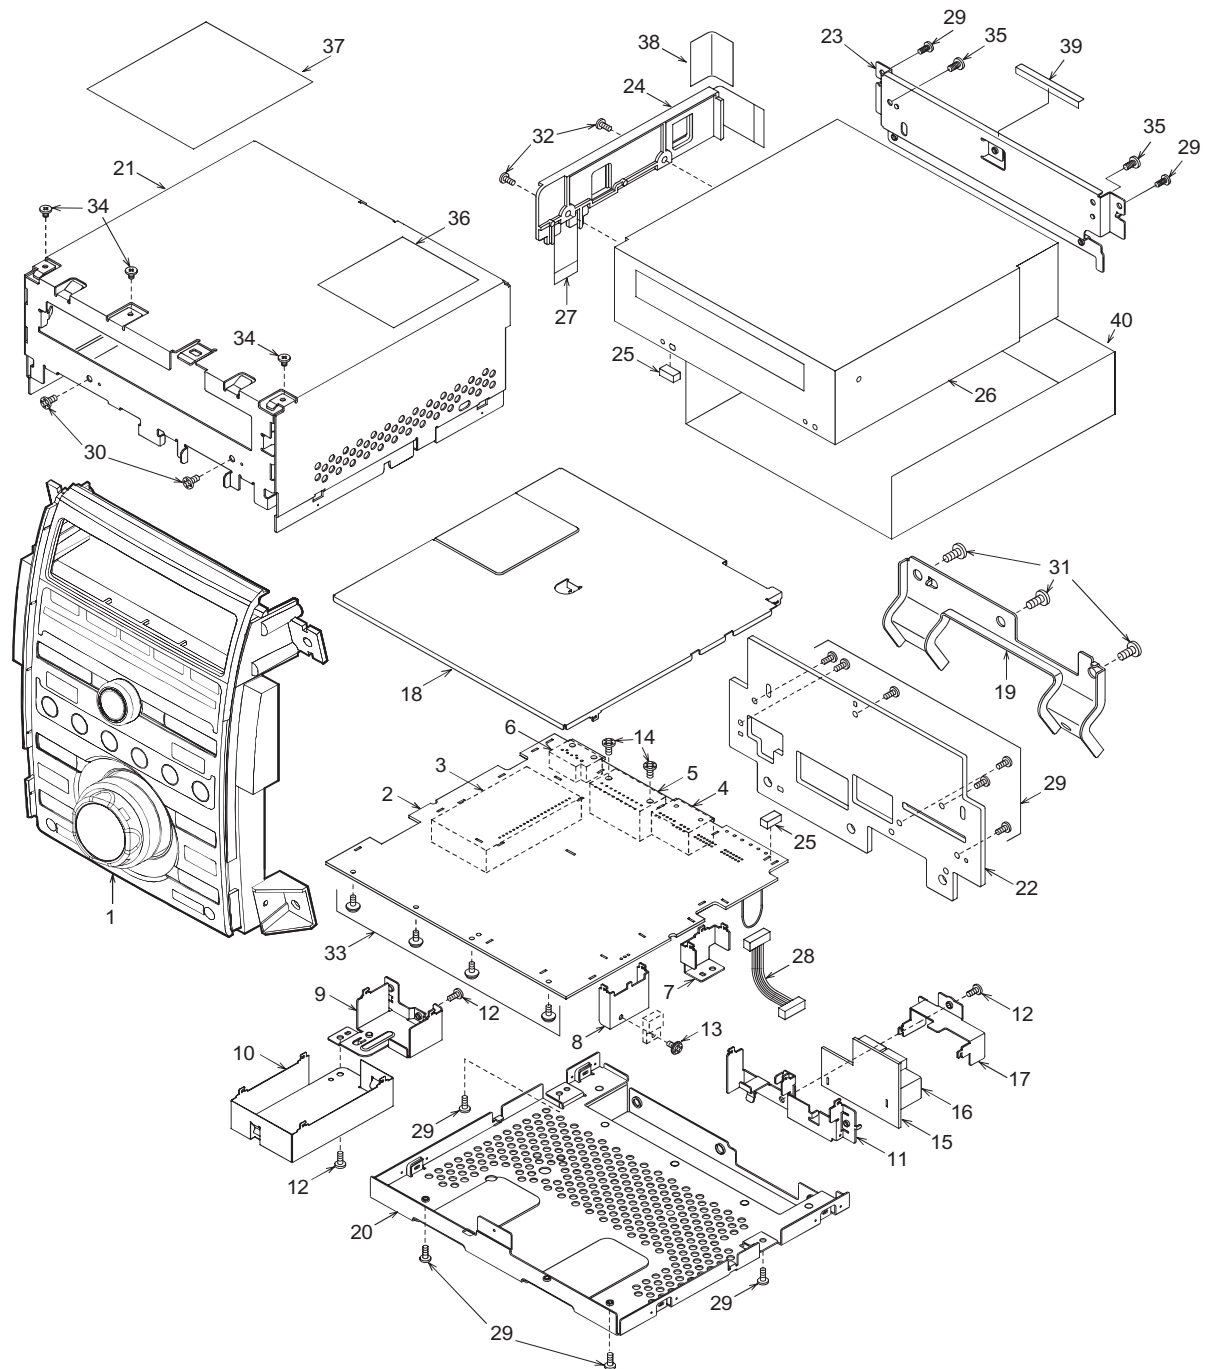

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	ESCUTCHEON SECTION	1	12	714-2606-8B	MACHINE SCREW(M2.6 x 6)	3
2	-----	MAIN PWB	1	13	716-0878-50	IT-SCREW(M2.6 x 5)	1
3	880-1920F	AM/FM TUNER	1	14	778-3006-00	TAP-SCREW(3 x 6)	2
4	074-1166-01	OUTLET SOCKET(20P)	1	15	-----	CONNECTOR PWB	1
5	074-1168-14	OUTLET SOCKET(14P)	1	16	074-4025-32	OUTLET SOCKET(32P)	1
6	092-2210-00	ANT-RECEPT(GT13)	1	17	331-3861-00	CN-HOLDER	1
7	331-3857-00	PWB-BRKT	1	18	331-3863-00	SHIELD PLATE	1
8	331-3859-00	TR-HOLDER	1	19	300-8020-01	MTG-BRKT	1
9	331-3860-00	ANT-HOLDER	1	20	304-0480-06	LOWER-CVR-ASSY	1
10	331-3864-00	SHIELD CASE	1	21	310-1800-01	UPPER CASE	1
11	331-3866-00	REAR PLATE	1	22	313-1908-01	HEAT SINK	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
23	331-3858-02	MECH-BRKT	1	33	716-0878-50	IT-SCREW(M2.6 X 5)	4
24	335-7275-01	FFC-HOLDER	1	34	716-3504-50	SPECIAL SCREW(M2.6 x 4)	3
25	345-5805-01	GASKET	2	35	731-3005-8B	TAPTIGHT(M3 x 5)	2
26	929-2502-02	DVD CHANGER MECHANISM	1	36	286-6740-01 286-6740-10 286-6740-20	SETPLATE(PH2644BG) SETPLATE(PH2644BH) SETPLATE(PH2644BI)	1
27	816-2654-00	FLAT WIRE(30P)	1	37	290-0048-00	LABEL	1
28	854-4575-01	EXTENSION LEAD(6P)	1	38	347-7925-02	SPACER	1
29	714-2606-8B	MACHINE SCREW(M2.6 x 6)	12	39	347-7886-00	SPACER	1
30	714-3005-8B	MACHINE SCREW(M3 x 5)	2	40	347-7850-01	SHIELD FILM	1
31	716-0678-50	SPECIAL SCREW(M5 x 8)	3				
32	716-0821-53	IT-SCREW(M3 x 5)	2				

*Note No.37 parts are unused in PH2644BI.

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-00	GT13SHA-2/1PP-DS	C157	178-2255-79	2.2uF	C264	178-2255-79	2.2uF
BL101	880-1920F	AM/FM TUNER	C158	168-1532-55	0.015uF K	C265	166-1011-50	100pF CH
C101	168-1032-55	0.01uF K	C159	168-1532-55	0.015uF K	C267	168-1042-78	16V 0.1uF
C102	166-4701-50	47pF CH	C160	168-1232-55	0.012uF K	C268	178-2255-79	2.2uF
C103	166-4701-50	47pF CH	C161	168-1232-55	0.012uF K	C269	178-2255-79	2.2uF
C105	168-3332-78	0.033uF K	C162	168-1042-78	16V 0.1uF	C270	178-2255-79	2.2uF
C106	166-6811-50	680pF	C163	178-2255-79	2.2uF	C271	178-2255-79	2.2uF
C107	168-3922-55	3900pF K	C169	168-6832-78	0.068uF K	C301	168-1032-55	0.01uF K
C108	168-1022-55	1000pF K	C182	178-1052-78	1uF	C306	168-1042-78	16V 0.1uF
C109	168-1032-55	0.01uF K	C186	178-1052-78	1uF	C307	163-2263-35	16V 22uF
C110	168-4732-78	0.047uF K	C201	163-1063-35	16V 10uF	C310	168-1042-78	16V 0.1uF
C111	168-1032-55	0.01uF K	C202	163-1063-35	16V 10uF	C311	163-2263-35	16V 22uF
C113	166-2201-50	22pF CH	C203	163-1063-35	16V 10uF	C312	168-1042-78	16V 0.1uF
C114	166-1801-50	18pF CH	C204	163-1063-35	16V 10uF	C314	042-0526-50	16V 10uF
C115	166-2096-50	2pF CK	C206	168-1032-55	0.01uF K	C315	042-0526-50	16V 10uF
C116	166-2201-50	22pF CH	C211	166-1011-50	100pF CH	C316	042-0526-50	16V 10uF
C117	168-4732-78	0.047uF K	C212	166-1011-50	100pF CH	C317	042-0526-50	16V 10uF
C118	168-2232-55	0.022uF K	C213	168-1022-55	1000pF K	C318	042-0526-50	16V 10uF
C119	168-2232-55	0.022uF K	C214	168-1022-55	1000pF K	C319	042-0526-50	16V 10uF
C120	166-8096-50	8pF D CH	C215	166-1011-50	100pF CH	C320	042-0526-50	16V 10uF
C121	166-8096-50	8pF D CH	C216	166-1011-50	100pF CH	C321	042-0526-50	16V 10uF
C122	168-2232-55	0.022uF K	C219	168-1042-78	16V 0.1uF	C322	042-0526-50	16V 10uF
C123	042-0643-51	16V 100uF	C223	042-0474-90	16V 10uF	C323	042-0526-50	16V 10uF
C124	168-2232-55	0.022uF K	C225	042-0474-90	16V 10uF	C324	042-0526-50	16V 10uF
C125	168-2232-55	0.022uF K	C226	042-0474-90	16V 10uF	C325	042-0526-50	16V 10uF
C126	042-0643-51	16V 100uF	C228	042-0474-90	16V 10uF	C331	168-1042-78	16V 0.1uF
C128	168-1022-55	1000pF K	C229	168-1042-78	16V 0.1uF	C332	163-4763-35	16V 47uF
C129	168-2232-55	0.022uF K	C230	168-1042-78	16V 0.1uF	C333	168-1042-78	16V 0.1uF
C130	166-2201-50	22pF CH	C232	178-2255-79	2.2uF	C334	166-4711-50	470pF CH
C131	166-1011-50	100pF CH	C233	178-2255-79	2.2uF	C335	166-4711-50	470pF CH
C132	042-0643-51	16V 100uF	C235	163-4763-35	16V 47uF	C336	166-4711-50	470pF CH
C133	166-1011-50	100pF CH	C236	042-0643-51	16V 100uF	C337	168-8212-55	820pF K
C134	168-1042-78	16V 0.1uF	C237	042-0654-52	16V 10uF	C338	168-8212-55	820pF K
C135	166-1011-50	100pF CH	C238	042-0654-52	16V 10uF	C339	168-8212-55	820pF K
C136	166-1011-50	100pF CH	C240	166-1011-50	100pF CH	C340	168-8212-55	820pF K
C138	166-1007-50	10pF CH	C241	042-1678-00	16V 470uF	C341	168-8212-55	820pF K
C139	178-1052-78	1uF	C243	166-1011-50	100pF CH	C342	168-8212-55	820pF K
C140	178-2232-78	0.022uF	C245	166-1007-50	10pF CH	C343	168-8212-55	820pF K
C141	168-1022-55	1000pF K	C247	166-1007-50	10pF CH	C344	166-4711-50	470pF CH
C142	043-0563-90	16V 47uF	C249	166-1007-50	10pF CH	C345	168-8212-55	820pF K
C143	043-0547-50	16V 3.3uF	C250	166-1007-50	10pF CH	C346	042-0654-52	16V 10uF
C144	168-2245-79	0.22uF Z	C251	166-1007-50	10pF CH	C347	042-0654-52	16V 10uF
C145	168-3332-78	0.033uF K	C252	166-1007-50	10pF CH	C348	042-0654-52	16V 10uF
C146	168-1042-78	16V 0.1uF	C253	166-1011-50	100pF CH	C349	042-0654-52	16V 10uF
C147	168-2232-55	0.022uF K	C254	166-1011-50	100pF CH	C350	166-1011-50	100pF CH
C148	168-1032-55	0.01uF K	C255	166-1011-50	100pF CH	C351	166-1011-50	100pF CH
C149	043-0563-90	16V 47uF	C256	168-1032-55	0.01uF K	C352	166-1011-50	100pF CH
C150	168-1032-55	0.01uF K	C257	163-4753-55	35V 4.7uF	C353	166-1011-50	100pF CH
C151	168-6832-78	0.068uF K	C258	163-4753-55	35V 4.7uF	C354	168-1042-78	16V 0.1uF
C152	168-6832-78	0.068uF K	C259	178-2255-79	2.2uF	C358	166-1007-50	10pF CH
C153	168-3332-78	0.033uF K	C260	178-2255-79	2.2uF	C359	166-1007-50	10pF CH
C154	168-3322-55	3300pF K	C261	178-2255-79	2.2uF	C360	166-1007-50	10pF CH
C155	168-3332-78	0.033uF K	C262	178-2255-79	2.2uF	C361	166-1007-50	10pF CH
C156	168-3332-78	0.033uF K	C263	178-2255-79	2.2uF	C362	166-1007-50	10pF CH

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C363	166-1007-50	10pF CH	C536	166-2201-50	22pF CH	CCT203	050-0145-55	1/16W 10k ohm x4
C364	168-1042-78	16V 0.1uF	C537	166-2201-50	22pF CH	CCT403	050-0145-55	1/16W 10k ohm x4
C365	168-1042-78	16V 0.1uF	C538	166-2201-50	22pF CH	CCT404	050-0146-53	1/16W 100k ohm x2J
C368	168-3322-55	3300pF K	C539	166-2201-50	22pF CH	CCT405	050-0146-54	1/16W 47k ohm x2J
C369	168-3322-55	3300pF K	C540	166-2201-50	22pF CH	D101	001-3205-90	1SV251
C370	168-2722-55	2700pF K	C541	166-2201-50	22pF CH	D102	001-3205-90	1SV251
C371	168-2722-55	2700pF K	C542	166-2201-50	22pF CH	D103	001-2403-90	M1F60
C372	168-2722-55	2700pF K	C543	166-2201-50	22pF CH	D104	001-0354-91	MA151WK
C373	168-2722-55	2700pF K	C544	166-2201-50	22pF CH	D202	001-0529-69	MA8180-M
C374	166-7097-50	7pF CH	C545	166-2201-50	22pF CH	D204	001-0529-32	MA8056-M
C375	166-7097-50	7pF CH	C546	042-1674-00	10V 220uF	D205	001-0529-32	MA8056-M
C376	166-7097-50	7pF CH	C547	042-1674-00	10V 220uF	D401	001-0529-36	MA8062-H
C401	168-1022-55	1000pF K	C548	042-1674-00	10V 220uF	D402	001-0529-57	MA8120-H
C402	178-2255-79	2.2uF	C550	042-1674-00	10V 220uF	D403	001-0529-32	MA8056-M
C403	163-1063-35	16V 10uF	C551	043-0499-51	0.1uF	D404	001-0529-32	MA8056-M
C404	168-1032-55	0.01uF K	C552	163-1063-35	16V 10uF	D405	001-0529-43	MA8082-L
C405	168-1042-78	16V 0.1uF	C553	168-1032-55	0.01uF K	D407	001-0516-90	MA111
C406	168-1022-55	1000pF K	C554	168-1032-55	0.01uF K	D408	001-0516-90	MA111
C407	168-1042-78	16V 0.1uF	C555	168-1032-55	0.01uF K	D409	001-0516-90	MA111
C408	168-1042-78	16V 0.1uF	C556	168-1032-55	0.01uF K	D410	001-0529-32	MA8056-M
C409	168-1042-78	16V 0.1uF	C557	168-1032-55	0.01uF K	D411	001-0529-57	MA8120-H
C410	168-1042-78	16V 0.1uF	C558	168-1032-55	0.01uF K	D412	001-0516-90	MA111
C411	166-2211-50	220pF CH	C559	168-2222-55	2200pF K	D420	001-4101-95	U1ZB27-TE12R
C412	166-1011-50	100pF CH	C560	168-2222-55	2200pF K	D423	001-0529-38	MA8068-M
C413	178-1052-78	1uF	C561	168-2222-55	2200pF K	D424	001-0354-91	MA151WK
C414	166-6097-50	6pF CH	C562	168-2222-55	2200pF K	D503	001-2403-90	M1F60
C415	166-6097-50	6pF CH	C563	168-2222-55	2200pF K	D504	001-2403-90	M1F60
C416	168-1042-78	16V 0.1uF	C564	168-2222-55	2200pF K	D505	001-2403-90	M1F60
C417	163-2253-65	50V 2.2uF	C565	168-2222-55	2200pF K	D507	001-2403-90	M1F60
C418	168-2245-79	0.22uF Z	C567	168-2222-55	2200pF K	D508	001-2403-90	M1F60
C419	168-1022-55	1000pF K	C568	168-2222-55	2200pF K	D601	001-2403-90	M1F60
C420	166-1011-50	100pF CH	C577	043-0499-51	0.1uF	D602	001-4309-01	HZK11C
C422	163-1063-35	16V 10uF	C578	166-1007-50	10pF CH	D603	001-4309-00	HZK11A
C423	166-1011-50	100pF CH	C579	166-1007-50	10pF CH	D604	001-0529-32	MA8056-M
C424	166-5601-50	56pF CH	C580	043-0506-50	0.1uF	D607	001-0516-90	MA111
C425	168-1032-55	0.01uF K	C581	043-0506-50	0.1uF	D608	001-0377-57	MA4120H
C426	168-1022-55	1000pF K	C582	178-2255-79	2.2uF	D609	001-0516-90	MA111
C428	166-1011-50	100pF CH	C583	178-2255-79	2.2uF	D611	001-0504-39	HZS7B2L
C430	166-1511-50	150pF CH	C601	163-2263-35	16V 22uF	D612	001-2015-00	RL253
C431	166-1011-50	100pF CH	C602	168-1032-55	0.01uF K	D616	001-0354-91	MA151WK
C432	166-2201-50	22pF CH	C603	042-0643-50	35V 22uF	D619	001-0529-45	MA8082-H
C433	166-2201-50	22pF CH	C604	168-1042-78	16V 0.1uF	D620	001-2403-90	M1F60
C501	042-1674-00	10V 220uF	C606	163-1063-35	16V 10uF	D621	001-0529-46	MA8091-L
C502	163-4763-35	16V 47uF	C607	168-1042-78	16V 0.1uF	D623	001-0516-90	MA111
C504	042-0654-52	16V 10uF	C608	042-0579-50	16V 47uF	D624	001-0535-90	MA729
C505	042-0654-52	16V 10uF	C609	042-0643-50	35V 22uF	D626	001-2403-90	M1F60
C506	042-0654-52	16V 10uF	C611	178-3342-78	0.33uF	D627	001-0516-90	MA111
C507	042-0654-52	16V 10uF	C612	042-0643-51	16V 100uF	IC101	051-4603-90	TA2083FN
C508	042-0654-52	16V 10uF	C613	042-0643-50	35V 22uF	IC102	051-6201-90	LC72146M
C509	042-0654-52	16V 10uF	C614	168-1042-78	16V 0.1uF	IC103	051-4618-90	HA12181FP-EL-E
C513	042-1674-00	10V 220uF	C616	042-0643-50	35V 22uF	IC202	051-3020-90	NJM4565V
C514	042-1674-00	10V 220uF	C617	178-3342-78	0.33uF	IC203	051-6600-38	CA0008AM
C515	042-1674-00	10V 220uF	C618	042-0643-51	16V 100uF	IC204	051-7709-90	TC9273F-004EL
C516	166-2201-50	22pF CH	C619	042-0579-50	16V 47uF	IC205	051-3020-90	NJM4565V
C517	166-2201-50	22pF CH	C620	168-1042-78	16V 0.1uF	IC206	051-3019-90	NJM2060V
C518	166-2201-50	22pF CH	C621	163-4743-65	50V 0.47uF	IC301	051-7511-38	TC74LCX07FTEL
C519	166-2201-50	22pF CH	C622	042-1675-00	16V 3300uF	IC303	051-6707-90	AK4355VF
C520	166-2201-50	22pF CH	C623	042-0643-51	16V 100uF	IC305	051-1292-90	NJM4565M-D
C521	166-2201-50	22pF CH	C625	168-1042-78	16V 0.1uF	IC306	051-3050-90	OPA2277UA
C522	166-2201-50	22pF CH	C626	043-0506-50	0.1uF	IC307	051-3051-90	OPA4277UA
C523	166-2201-50	22pF CH	C627	043-0506-50	0.1uF	IC401	051-6644-90	ADM483EAR
C524	166-2201-50	22pF CH	C628	042-0579-50	16V 47uF	IC402	051-7100-08	TC4W66F-TE12L
C525	166-2201-50	22pF CH	C629	178-3342-78	0.33uF	IC403	-----	BR93L66F-WTR
C526	166-2201-50	22pF CH	C630	042-0579-51	16V 10uF	IC404	052-3190-30	uPD70F3035BYGC-8EU-A
C527	166-2201-50	22pF CH	C632	042-0643-52	6.3V 1000uF	IC405	051-5438-38	BD4830G-TR
C528	042-1674-00	10V 220uF	C633	166-1011-50	100pF CH	IC406	051-7232-38	CD74HC4066M96
C529	042-1674-00	10V 220uF	C634	163-2253-65	50V 2.2uF	IC501	051-1292-90	NJM4565M-D
C530	042-1674-00	10V 220uF	C637	168-1032-55	0.01uF K	IC502	051-3026-90	NJM4580V
C531	042-1674-00	10V 220uF	C638	168-1032-55	0.01uF K	IC503	051-3026-90	NJM4580V
C532	042-1674-00	10V 220uF	C639	168-1042-78	16V 0.1uF	IC504	051-3026-90	NJM4580V
C533	042-1674-00	10V 220uF	CCT101	050-0145-52	1/16W 1k ohm x4	IC505	051-3026-90	NJM4580V
C534	166-2201-50	22pF CH	CCT201	050-0145-52	1/16W 1k ohm x4	IC506	051-3026-90	NJM4580V
C535	166-2201-50	22pF CH	CCT202	050-0145-55	1/16W 10k ohm x4			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC507	051-3026-90	NJM4580V	Q630	192-2712-50	2SC2712	R239	119-3921-15	1/10W 3.9k ohm
IC602	051-3342-90	BA05CC0WFP-004EL	Q631	125-0002-95	RN2405	R240	119-1831-15	1/10W 18k ohm
IC603	051-3335-90	AN77L04M	Q632	192-2712-50	2SC2712	R241	119-1831-15	1/10W 18k ohm
IC604	051-3339-90	AN77L08M-E1	Q633	193-1664-00	2SD1664	R242	119-3921-15	1/10W 3.9k ohm
IC605	051-3317-90	LM1086IS-ADJ	Q634	193-1664-00	2SD1664	R243	119-2731-15	1/10W 27k ohm
J201	074-1168-14	OUTLET SOCKET	Q635	125-9003-92	IMD3	R244	119-1031-15	1/10W 10k ohm
J301	074-1287-80	30P	Q636	190-1162-00	2SA1162	R245	119-1031-15	1/10W 10k ohm
J501	074-1166-01	OUTLET SOCKET	Q637	125-9003-92	IMD3	R246	119-1041-15	1/10W 100k ohm
L101	010-2174-83	560uH	Q638	131-1132-00	2SB1132	R247	119-1041-15	1/10W 100k ohm
L102	010-3406-38	0.1uH J	Q639	192-2712-50	2SC2712	R248	119-1041-15	1/10W 100k ohm
L103	010-3407-59	5.6uH J	R101	119-8201-15	1/10W 82 ohm	R249	119-1041-15	1/10W 100k ohm
L104	010-2003-04	COIL	R102	119-1031-15	1/10W 10k ohm	R250	119-1041-15	1/10W 100k ohm
L105	010-3407-75	120uH J	R103	119-1021-15	1/10W 1k ohm	R251	119-1041-15	1/10W 100k ohm
L106	010-3052-78	220uH	R104	119-1021-15	1/10W 1k ohm	R254	119-1041-15	1/10W 100k ohm
L107	010-2312-52	0.27uH	R105	119-4741-15	1/10W 470k ohm	R255	119-1041-15	1/10W 100k ohm
L108	010-3104-54	COIL	R106	119-4741-15	1/10W 470k ohm	R256	119-1041-15	1/10W 100k ohm
L109	010-3104-54	COIL	R107	119-4741-15	1/10W 470k ohm	R257	119-1041-15	1/10W 100k ohm
L201	010-3052-74	100uH	R108	119-1031-15	1/10W 10k ohm	R258	119-1031-15	1/10W 10k ohm
L302	010-3052-66	22uH	R109	119-1031-15	1/10W 10k ohm	R259	119-1031-15	1/10W 10k ohm
L303	010-3052-66	22uH	R110	119-0000-05	1/10W 0 ohm JW	R261	119-1041-15	1/10W 100k ohm
L401	010-3406-50	1uH J	R111	119-1031-15	1/10W 10k ohm	R262	119-1041-15	1/10W 100k ohm
L402	010-3407-54	2.2uH J	R112	119-2231-15	1/10W 22k ohm	R263	119-3901-15	1/10W 39 ohm
L403	010-3407-67	27uH J	R114	119-0000-05	1/10W 0 ohm JW	R264	119-3901-15	1/10W 39 ohm
L601	010-3104-50	30 ohm/100MHZ	R116	119-2221-15	1/10W 2.2k ohm	R265	119-5621-15	1/10W 5.6k ohm
P501	076-0368-14	14P	R117	119-2221-15	1/10W 2.2k ohm	R266	119-5621-15	1/10W 5.6k ohm
P502	076-0368-14	14P	R120	119-0000-05	1/10W 0 ohm JW	R267	119-1031-15	1/10W 10k ohm
P801	076-6001-56	6P	R122	119-4721-15	1/10W 4.7k ohm	R268	119-1031-15	1/10W 10k ohm
P901	076-0662-70	20P	R124	119-3321-15	1/10W 3.3k ohm	R269	116-2221-15	1/4W 2.2k ohm
Q101	192-2712-00	2SC2712	R125	119-0000-05	1/10W 0 ohm JW	R270	119-2221-15	1/10W 2.2k ohm
Q102	125-2004-92	RN1402	R127	119-2211-15	1/10W 220 ohm	R272	119-1031-15	1/10W 10k ohm
Q103	192-2712-00	2SC2712	R128	119-2221-15	1/10W 2.2k ohm	R274	119-1031-15	1/10W 10k ohm
Q104	125-2004-93	RN1403	R129	119-2231-15	1/10W 22k ohm	R275	119-2431-15	1/10W 24k ohm
Q105	190-1298-00	2SA1298	R130	119-4731-15	1/10W 47k ohm	R276	119-8221-15	1/10W 8.2k ohm
Q106	190-1162-00	2SA1162	R131	119-1031-15	1/10W 10k ohm	R277	119-8221-15	1/10W 8.2k ohm
Q107	125-2004-93	RN1403	R132	116-0000-05	1/4W 0 ohm	R303	119-3321-15	1/10W 3.3k ohm
Q201	192-2712-00	2SC2712	R133	119-1221-15	1/10W 1.2k ohm	R304	119-3321-15	1/10W 3.3k ohm
Q402	192-2712-00	2SC2712	R134	119-1221-15	1/10W 1.2k ohm	R305	119-0000-05	1/10W 0 ohm JW
Q404	125-9003-93	IMD2	R135	119-1031-15	1/10W 10k ohm	R307	119-0000-05	1/10W 0 ohm JW
Q405	192-2712-00	2SC2712	R136	119-1831-15	1/10W 18k ohm	R309	119-0000-05	1/10W 0 ohm JW
Q407	125-2025-92	IMH11	R137	119-1021-15	1/10W 1k ohm	R311	119-4711-15	1/10W 470 ohm
Q409	190-1162-00	2SA1162	R138	119-1021-15	1/10W 1k ohm	R312	119-4711-15	1/10W 470 ohm
Q412	190-1162-00	2SA1162	R140	119-1041-15	1/10W 100k ohm	R313	119-4711-15	1/10W 470 ohm
Q413	125-2004-92	RN1402	R141	119-4731-15	1/10W 47k ohm	R314	119-1011-15	1/10W 100 ohm
Q414	125-2004-93	RN1403	R142	119-1231-15	1/10W 12k ohm	R317	119-4721-15	1/10W 4.7k ohm
Q415	125-2004-93	RN1403	R143	119-2731-15	1/10W 27k ohm	R318	119-4721-15	1/10W 4.7k ohm
Q419	192-2712-00	2SC2712	R146	119-5621-15	1/10W 5.6k ohm	R319	119-4721-15	1/10W 4.7k ohm
Q420	190-1162-00	2SA1162	R147	119-2421-15	1/10W 2.4k ohm	R320	119-4721-15	1/10W 4.7k ohm
Q601	125-2004-93	RN1403	R148	119-2421-15	1/10W 2.4k ohm	R321	119-4721-15	1/10W 4.7k ohm
Q602	131-1132-00	2SB1132	R151	119-3921-15	1/10W 3.9k ohm	R322	119-4721-15	1/10W 4.7k ohm
Q603	193-1664-00	2SD1664	R152	119-3921-15	1/10W 3.9k ohm	R323	119-4721-15	1/10W 4.7k ohm
Q604	125-9003-92	IMD3	R154	119-1841-15	1/10W 180k ohm	R324	119-4721-15	1/10W 4.7k ohm
Q605	125-9003-92	IMD3	R155	119-0000-05	1/10W 0 ohm JW	R325	119-4721-15	1/10W 4.7k ohm
Q607	193-1664-00	2SD1664	R156	116-2291-15	1/4W 2.2 ohm	R326	119-4721-15	1/10W 4.7k ohm
Q608	103-1705-00	2SD1705	R157	119-0000-05	1/10W 0 ohm JW	R327	119-4721-15	1/10W 4.7k ohm
Q610	192-2712-50	2SC2712	R158	116-4711-15	1/4W 470 ohm	R328	119-4721-15	1/10W 4.7k ohm
Q611	125-2004-96	RN1406	R159	116-8211-15	1/4W 820 ohm	R329	119-1031-15	1/10W 10k ohm
Q612	190-1736-00	2SA1736	R202	119-1021-15	1/10W 1k ohm	R330	119-1031-15	1/10W 10k ohm
Q613	125-2004-93	RN1403	R204	119-1031-15	1/10W 10k ohm	R338	119-4721-15	1/10W 4.7k ohm
Q614	190-1298-00	2SA1298	R205	119-1031-15	1/10W 10k ohm	R339	119-4721-15	1/10W 4.7k ohm
Q615	193-1664-00	2SD1664	R206	119-1031-15	1/10W 10k ohm	R340	119-4721-15	1/10W 4.7k ohm
Q616	193-1802-61	2SD1802	R207	119-1031-15	1/10W 10k ohm	R341	119-4721-15	1/10W 4.7k ohm
Q617	125-2004-93	RN1403	R208	116-1211-15	1/4W 120 ohm	R342	119-4721-15	1/10W 4.7k ohm
Q618	125-0002-93	RN2403	R209	116-6801-15	1/4W 68 ohm	R343	119-4721-15	1/10W 4.7k ohm
Q620	193-1802-61	2SD1802	R210	116-1011-15	1/4W 100 ohm	R344	119-4721-15	1/10W 4.7k ohm
Q622	103-1705-00	2SD1705	R211	116-1011-15	1/4W 100 ohm	R345	119-4721-15	1/10W 4.7k ohm
Q623	125-2004-93	RN1403	R215	119-2231-15	1/10W 22k ohm	R346	119-4721-15	1/10W 4.7k ohm
Q624	190-1736-00	2SA1736	R218	119-1031-15	1/10W 10k ohm	R347	119-4721-15	1/10W 4.7k ohm
Q625	103-2012-00	2SD2012	R219	119-1031-15	1/10W 10k ohm	R348	119-4721-15	1/10W 4.7k ohm
Q626	125-9003-92	IMD3	R224	119-2231-15	1/10W 22k ohm	R349	119-4721-15	1/10W 4.7k ohm
Q627	125-2004-93	RN1403	R225	119-5621-15	1/10W 5.6k ohm	R350	119-3901-15	1/10W 39 ohm
Q628	190-1298-00	2SA1298	R226	119-5621-15	1/10W 5.6k ohm	R351	119-3901-15	1/10W 39 ohm
Q629	193-1626-00	2SD1626	R230	119-1031-15	1/10W 10k ohm	R352	119-3901-15	1/10W 39 ohm
			R233	119-1031-15	1/10W 10k ohm	R353	119-3901-15	1/10W 39 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R354	119-1811-15	1/10W 180 ohm	R478	119-2721-15	1/10W 2.7k ohm	R580	119-0000-05	1/10W 0 ohm JW
R355	119-1811-15	1/10W 180 ohm	R479	119-3321-15	1/10W 3.3k ohm	R581	116-3901-15	1/4W 39 ohm
R356	119-1811-15	1/10W 180 ohm	R480	119-1031-15	1/10W 10k ohm	R583	119-0000-05	1/10W 0 ohm JW (Use only PH2644BH)
R357	119-1811-15	1/10W 180 ohm	R482	116-1521-15	1/4W 1.5k ohm	R584	119-0000-05	1/10W 0 ohm JW (Use only PH2644BG)
R358	119-5611-15	1/10W 560 ohm	R484	119-0000-05	1/10W 0 ohm JW	R585	119-0000-05	1/10W 0 ohm JW
R359	119-5611-15	1/10W 560 ohm	R485	119-0000-05	1/10W 0 ohm JW	R586	119-0000-05	1/10W 0 ohm JW (Use only PH2644BI)
R360	119-5611-15	1/10W 560 ohm	R486	119-0000-05	1/10W 0 ohm JW	R601	116-1521-15	1/4W 1.5k ohm
R361	119-5611-15	1/10W 560 ohm	R487	119-1041-15	1/10W 100k ohm	R602	119-4731-15	1/10W 47k ohm
R362	119-5611-15	1/10W 560 ohm	R490	119-1041-15	1/10W 100k ohm	R603	116-1021-15	1/4W 1k ohm
R363	119-5611-15	1/10W 560 ohm	R491	119-4721-15	1/10W 4.7k ohm	R604	032-0140-06	1/10W 100 ohm F
R364	119-5611-15	1/10W 560 ohm	R493	119-0000-05	1/10W 0 ohm JW	R605	116-3321-15	1/4W 3.3k ohm
R365	119-5611-15	1/10W 560 ohm	R497	119-0000-05	1/10W 0 ohm JW	R606	116-3311-15	1/4W 330 ohm
R366	119-9121-15	1/10W 9.1k ohm	R499	119-6821-15	1/10W 6.8k ohm	R607	119-4731-15	1/10W 47k ohm
R367	119-9121-15	1/10W 9.1k ohm	R502	119-1031-15	1/10W 10k ohm	R608	116-3321-15	1/4W 3.3k ohm
R368	119-9121-15	1/10W 9.1k ohm	R503	119-1031-15	1/10W 10k ohm	R609	116-6811-15	1/4W 680 ohm
R369	119-9121-15	1/10W 9.1k ohm	R505	119-5621-15	1/10W 5.6k ohm	R610	119-1031-15	1/10W 10k ohm
R370	119-1041-15	1/10W 100k ohm	R507	119-5621-15	1/10W 5.6k ohm	R611	119-1221-15	1/10W 1.2k ohm
R371	119-1041-15	1/10W 100k ohm	R508	119-5621-15	1/10W 5.6k ohm	R612	032-0145-71	1/4W 2.2k ohm
R372	119-1041-15	1/10W 100k ohm	R510	119-5621-15	1/10W 5.6k ohm	R613	119-1031-15	1/10W 10k ohm
R373	119-1041-15	1/10W 100k ohm	R511	119-5621-15	1/10W 5.6k ohm	R614	119-4731-15	1/10W 47k ohm
R402	119-2231-15	1/10W 22k ohm	R513	119-5621-15	1/10W 5.6k ohm	R615	032-0145-63	1/4W 390ohm
R403	119-2731-15	1/10W 27k ohm	R518	119-3321-15	1/10W 3.3k ohm	R616	119-1221-15	1/10W 1.2k ohm
R404	119-3331-15	1/10W 33k ohm	R519	119-3321-15	1/10W 3.3k ohm	R617	116-1821-15	1/4W 1.8k ohm
R406	119-1041-15	1/10W 100k ohm	R520	119-3321-15	1/10W 3.3k ohm	R618	116-1821-15	1/4W 1.8k ohm
R407	119-2231-15	1/10W 22k ohm	R521	119-3321-15	1/10W 3.3k ohm	R619	116-1821-15	1/4W 1.8k ohm
R409	119-4731-15	1/10W 47k ohm	R522	119-3321-15	1/10W 3.3k ohm	R620	116-2221-15	1/4W 2.2k ohm
R411	116-1011-15	1/4W 100 ohm	R523	119-3321-15	1/10W 3.3k ohm	R621	032-0145-60	1/2W 220 ohm J
R413	119-1031-15	1/10W 10k ohm	R533	119-2231-15	1/10W 22k ohm	R622	119-3931-15	1/10W 39k ohm
R417	119-1041-15	1/10W 100k ohm	R534	119-3931-15	1/10W 39k ohm	R623	116-0000-05	1/4W 0 ohm
R418	119-2241-15	1/10W 220k ohm	R535	119-1001-15	1/10W 10 ohm	R625	114-1511-11	150 1W
R419	119-4731-15	1/10W 47k ohm	R536	119-2231-15	1/10W 22k ohm	R627	116-2221-15	1/4W 2.2k ohm
R420	119-1041-15	1/10W 100k ohm	R537	119-3931-15	1/10W 39k ohm	R628	119-4731-15	1/10W 47k ohm
R421	119-1041-15	1/10W 100k ohm	R538	119-1001-15	1/10W 10 ohm	R629	119-1531-15	1/10W 15k ohm
R424	119-1041-15	1/10W 100k ohm	R539	119-2231-15	1/10W 22k ohm	R630	116-4731-15	1/4W 47k ohm
R425	119-4731-15	1/10W 47k ohm	R540	119-3931-15	1/10W 39k ohm	R631	032-0140-66	1/10W 220 ohm F
R426	119-1041-15	1/10W 100k ohm	R541	119-1001-15	1/10W 10 ohm	R632	116-4721-15	1/4W 4.7k ohm
R427	119-4741-15	1/10W 470k ohm	R542	119-1531-15	1/10W 15k ohm	R633	119-1031-15	1/10W 10k ohm
R428	119-4731-15	1/10W 47k ohm	R543	119-1531-15	1/10W 15k ohm	R635	119-1031-15	1/10W 10k ohm
R429	119-0000-05	1/10W 0 ohm JW	R544	119-1531-15	1/10W 15k ohm	R636	116-1021-15	1/4W 1k ohm
R430	119-0000-05	1/10W 0 ohm JW	R545	119-1031-15	1/10W 10k ohm	R637	119-2221-15	1/10W 2.2k ohm
R431	119-1041-15	1/10W 100k ohm	R546	119-1031-15	1/10W 10k ohm	R639	116-8211-15	1/4W 820 ohm
R432	119-1031-15	1/10W 10k ohm	R547	119-1031-15	1/10W 10k ohm	R640	116-3911-15	1/4W 390 ohm
R433	119-1021-15	1/10W 1k ohm	R548	119-2231-15	1/10W 22k ohm	R641	116-2221-15	1/4W 2.2k ohm
R434	119-1021-15	1/10W 1k ohm	R549	119-1001-15	1/10W 10 ohm	R642	116-1821-15	1/4W 1.8k ohm
R435	119-4731-15	1/10W 47k ohm	R550	119-2231-15	1/10W 22k ohm	R643	116-1821-15	1/4W 1.8k ohm
R439	119-1041-15	1/10W 100k ohm	R551	119-1001-15	1/10W 10 ohm	R646	116-6811-15	1/4W 680 ohm
R440	119-4721-15	1/10W 4.7k ohm	R552	119-2231-15	1/10W 22k ohm	R647	116-6811-15	1/4W 680 ohm
R442	119-1021-15	1/10W 1k ohm	R553	119-1001-15	1/10W 10 ohm	R648	116-6811-15	1/4W 680 ohm
R443	119-0000-05	1/10W 0 ohm JW	R554	119-1001-15	1/10W 10 ohm	R649	119-1031-15	1/10W 10k ohm
R444	119-1021-15	1/10W 1k ohm	R555	119-2231-15	1/10W 22k ohm	R650	116-6811-15	1/4W 680 ohm
R445	119-1021-15	1/10W 1k ohm	R556	119-3931-15	1/10W 39k ohm	R651	116-6811-15	1/4W 680 ohm
R446	119-1021-15	1/10W 1k ohm	R557	119-2231-15	1/10W 22k ohm	R652	116-1821-15	1/4W 1.8k ohm
R447	119-1021-15	1/10W 1k ohm	R558	119-3931-15	1/10W 39k ohm	R653	119-2231-15	1/10W 22k ohm
R449	119-1051-15	1/10W 1M ohm	R559	119-1001-15	1/10W 10 ohm	R654	116-2221-15	1/4W 2.2k ohm
R450	119-1021-15	1/10W 1k ohm	R560	119-2231-15	1/10W 22k ohm	R655	119-1031-15	1/10W 10k ohm
R451	119-1021-15	1/10W 1k ohm	R561	119-3931-15	1/10W 39k ohm	R656	119-1031-15	1/10W 10k ohm
R452	119-1041-15	1/10W 100k ohm	R562	119-1001-15	1/10W 10 ohm	SUP101	060-0122-20	DSP-141N-S00B
R456	116-1021-15	1/4W 1k ohm	R563	119-1531-15	1/10W 15k ohm	SUP102	060-0122-20	DSP-141N-S00B
R457	119-1021-15	1/10W 1k ohm	R564	119-1531-15	1/10W 15k ohm	T601	009-0670-80	180uH
R458	119-0000-05	1/10W 0 ohm JW	R565	119-1531-15	1/10W 15k ohm	TH602	002-0318-01	1206L035YRT
R459	119-1041-15	1/10W 100k ohm	R566	119-1031-15	1/10W 10k ohm	TH604	002-0318-00	1206L020YRT
R460	119-1021-15	1/10W 1k ohm	R567	119-1031-15	1/10W 10k ohm	TM401	073-0762-90	TERMINAL
R461	116-2231-15	1/4W 22k ohm	R568	119-1031-15	1/10W 10k ohm	TM501	073-0762-90	TERMINAL
R462	116-2231-15	1/4W 22k ohm	R569	119-2231-15	1/10W 22k ohm	VR101	012-6009-65	470k ohm B VR
R463	119-4721-15	1/10W 4.7k ohm	R570	119-1001-15	1/10W 10 ohm	X101	061-3543-90	7.2MHz
R464	119-4721-15	1/10W 4.7k ohm	R571	119-2231-15	1/10W 22k ohm	X501	061-3539-90	12.5MHz
R465	116-8201-15	1/4W 82 ohm	R572	119-1001-15	1/10W 10 ohm	PWB	039-2918-00	PWB(WITHOUT COMPONENT)
R467	119-0000-05	1/10W 0 ohm JW	R573	119-2231-15	1/10W 22k ohm			
R468	116-2731-15	1/4W 27k ohm	R574	119-1001-15	1/10W 10 ohm			
R471	119-1021-15	1/10W 1k ohm	R575	032-0145-71	1/4W 2.2k ohm			
R473	119-1041-15	1/10W 100k ohm	R576	119-0000-05	1/10W 0 ohm JW			
R474	119-1031-15	1/10W 10k ohm	R578	116-3901-15	1/4W 39 ohm			
R475	116-0000-05	1/4W 0 ohm	R579	116-1011-15	1/4W 100 ohm			


Connector PWB(B2) section


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	168-2222-55	2200pF K	D806	001-0529-57	MA8120-H	R801	116-1011-15	1/4W 100 ohm
C802	168-2222-55	2200pF K	D807	001-0529-57	MA8120-H	R802	116-1011-15	1/4W 100 ohm
C803	168-2222-55	2200pF K	D808	001-0529-57	MA8120-H	R803	116-1011-15	1/4W 100 ohm
C804	168-2222-55	2200pF K	D809	001-0529-57	MA8120-H	R804	116-1011-15	1/4W 100 ohm
C805	168-2222-55	2200pF K	J801	074-4025-32	32P	R805	116-1011-15	1/4W 100 ohm
C806	168-2222-55	2200pF K	J802	074-0898-14	14P	TH601	002-0318-00	1203L020YRT
C807	166-5601-50	56pF CH	J803	074-0898-14	14P	PWB	039-2887-00	PWB(WITHOUT COMPONENT)
D801	001-2403-90	M1F60	Q801	125-2024-95	RN1605			
D804	001-2403-90	M1F60	Q802	125-2004-91	RN1401			
D805	001-0529-57	MA8120-H	Q803	125-2024-95	RN1605			


Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C701	168-1042-78	16V 0.1uF	PL914	017-0433-94	14V 40mA	S704	013-6203-50	SKPMRE010
C703	168-1042-78	16V 0.1uF	PL915	017-0433-94	14V 40mA	S705	013-6203-50	SKPMRE010
CCT1	050-0145-55	1/16W 10k ohm x 4	Q701	125-0002-92	RN2402	S706	013-6202-50	SKPMATE010
D702	001-0516-90	MA111	Q702	125-0002-92	RN2402	S707	013-6203-50	SKPMRE010
D703	001-0516-90	MA111	R701	119-4721-15	1/10W 4.7k ohm	S708	013-6203-50	SKPMRE010
D704	001-0516-90	MA111	R702	119-4721-15	1/10W 4.7k ohm	S709	013-6203-51	SKPMRE010
D705	001-0516-90	MA111	R703	119-4721-15	1/10W 4.7k ohm	S710	013-6201-52	SKPMAP
D706	001-0516-90	MA111	R709	116-1811-15	1/4W 180 ohm	S711	013-6202-52	SKPMATE010
D707	001-0516-90	MA111	R710	119-1041-15	1/10W 100k ohm	S712	013-6201-51	SKPMAP
D708	001-0516-90	MA111	R711	119-1041-15	1/10W 100k ohm	S713	013-6202-50	SKPMATE010
D709	001-0516-90	MA111	R712	116-1811-15	1/4W 180 ohm	S714	013-6203-50	SKPMRE010
D710	001-0516-90	MA111	R713	119-1041-15	1/10W 100k ohm	S715	013-6201-51	SKPMAP
D711	001-0516-90	MA111	R714	119-1041-15	1/10W 100k ohm	S716	013-6201-51	SKPMAP
D712	001-0516-90	MA111	R715	119-1041-15	1/10W 100k ohm	S717	013-6201-51	SKPMAP
D713	001-0516-90	MA111	R716	119-0000-05	1/10W 0 ohm JW	S718	013-6201-51	SKPMAP
D714	001-7079-90	BRBG1204W-TR	R717	119-0000-05	1/10W 0 ohm JW	S719	013-6201-51	SKPMAP
IC701	051-6618-18	M6606FP-42A	R718	119-0000-05	1/10W 0 ohm JW	S720	013-6202-50	SKPMATE010
J701	074-1279-70	20P	R719	119-0000-05	1/10W 0 ohm JW	S721	013-6201-51	SKPMAP
P702	076-6000-63	13P	R720	119-0000-05	1/10W 0 ohm JW	S722	013-6202-50	SKPMATE010
PL901	017-0433-94	14V 40mA	R721	119-0000-05	1/10W 0 ohm JW	S723	013-6202-50	SKPMATE010
PL902	017-0433-94	14V 40mA	R722	119-0000-05	1/10W 0 ohm JW	S724	013-6201-51	SKPMAP
PL903	017-0433-94	14V 40mA	R723	119-0000-05	1/10W 0 ohm JW	S725	013-6201-51	SKPMAP
PL904	017-0433-94	14V 40mA	R724	119-0000-05	1/10W 0 ohm JW	S726	013-6203-50	SKPMRE010
PL905	017-0433-94	14V 40mA	R727	119-0000-05	1/10W 0 ohm JW	S727	013-6203-50	SKPMRE010
PL906	017-0433-94	14V 40mA	R728	119-0000-05	1/10W 0 ohm JW	S728	013-6203-50	SKPMRE010
PL907	017-0433-94	14V 40mA	R735	119-0000-05	1/10W 0 ohm JW	S729	013-6203-50	SKPMRE010
PL908	017-0433-94	14V 40mA	R736	119-0000-05	1/10W 0 ohm JW	S730	013-6203-50	SKPMRE010
PL909	017-0433-94	14V 40mA	R737	119-0000-05	1/10W 0 ohm JW	S731	013-6203-50	SKPMRE010
PL910	017-0433-94	14V 40mA	R738	119-0000-05	1/10W 0 ohm JW	VR701	016-0025-05	VR W/SHAFT
PL911	017-0433-94	14V 40mA	S701	013-6202-50	SKPMATE010	PWB	039-2581-01	PWB(WITHOUT COMPONENT)
PL912	017-0433-94	14V 40mA	S702	013-6202-50	SKPMATE010			
PL913	017-0433-94	14V 40mA	S703	013-6202-50	SKPMATE010			

EXPLODED VIEW / PARTS LIST

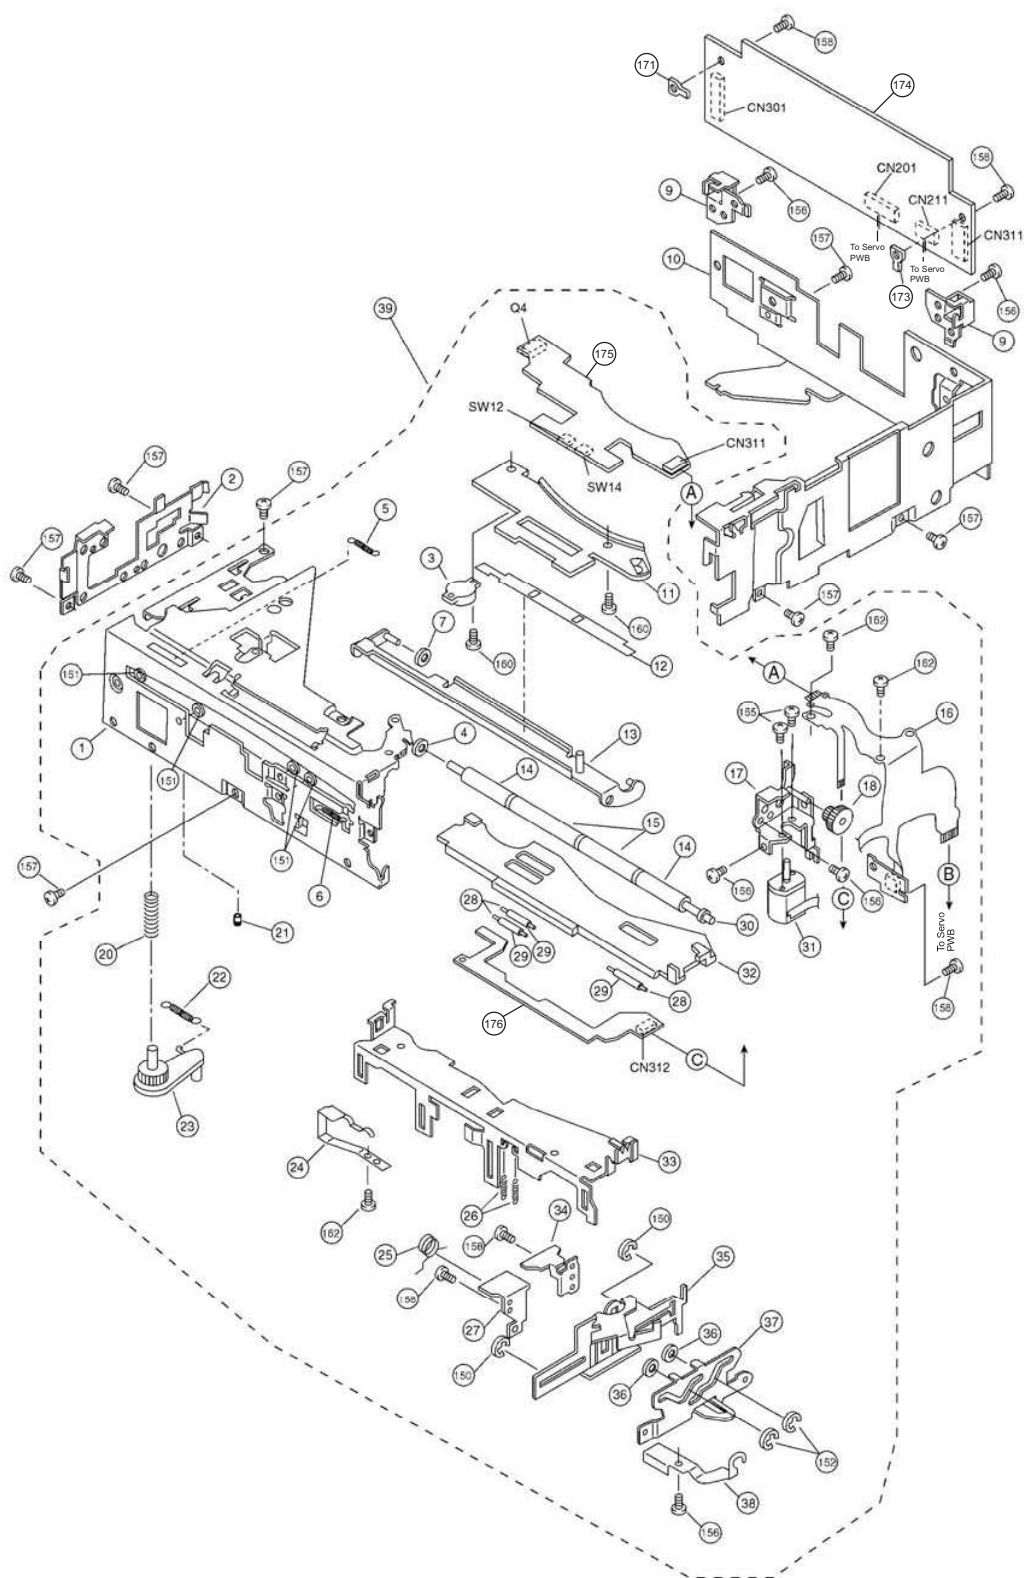

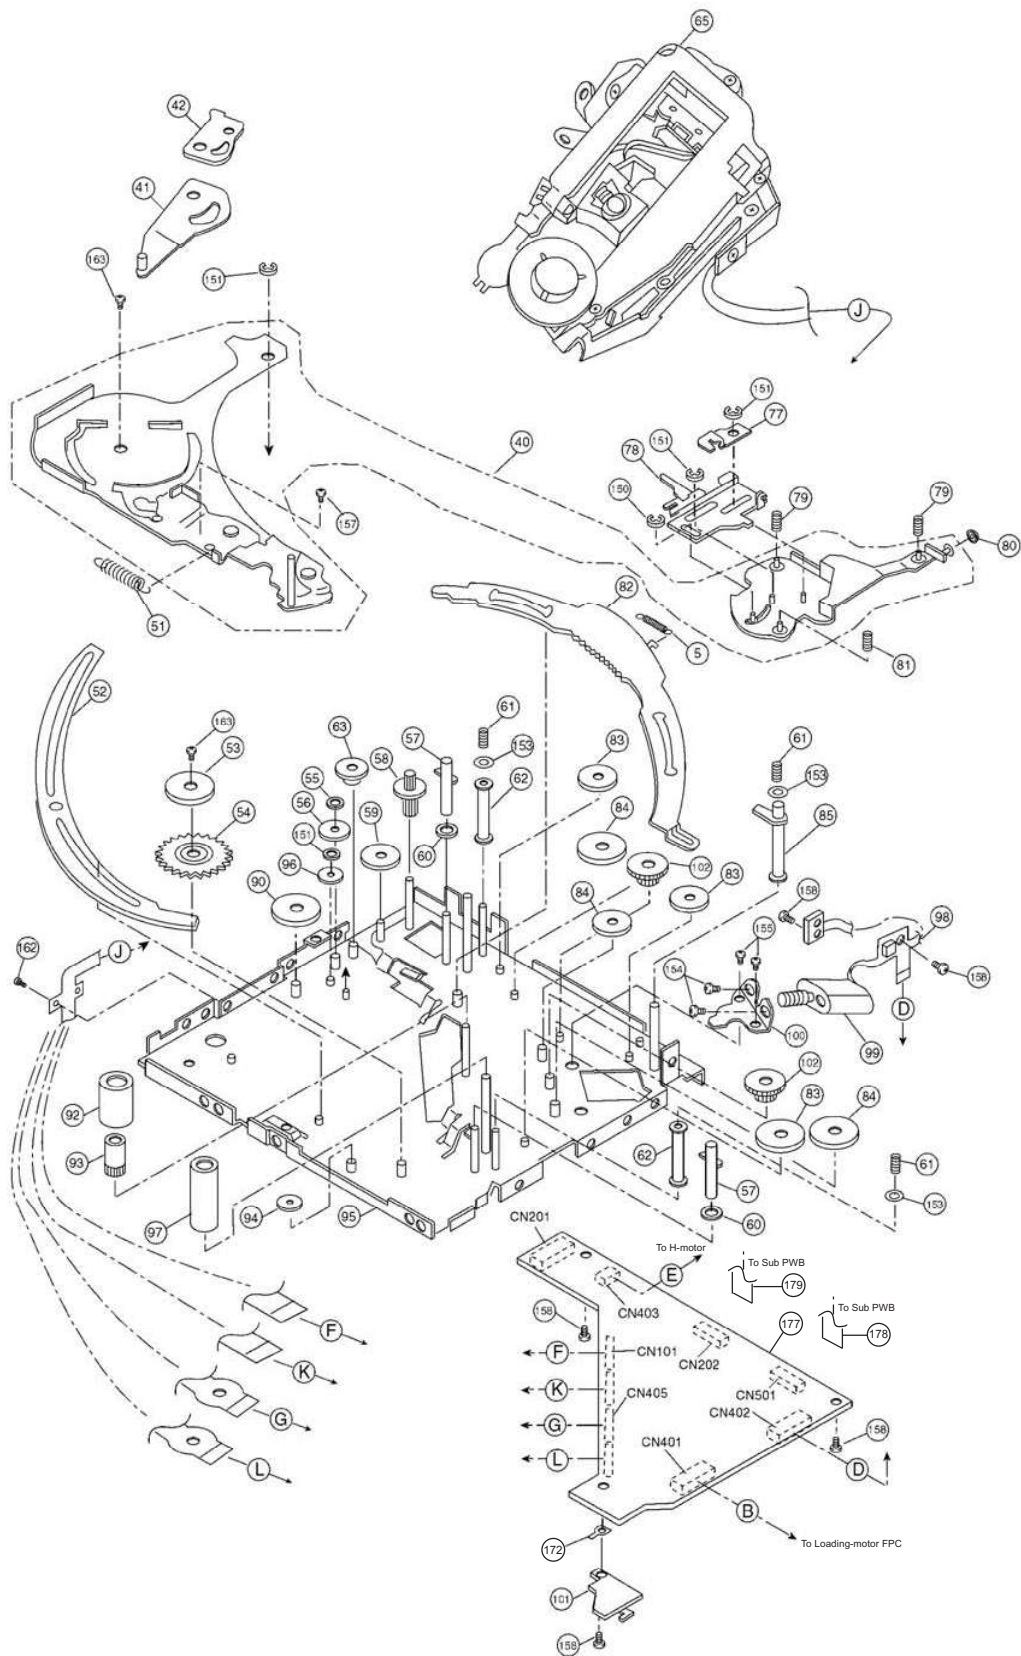

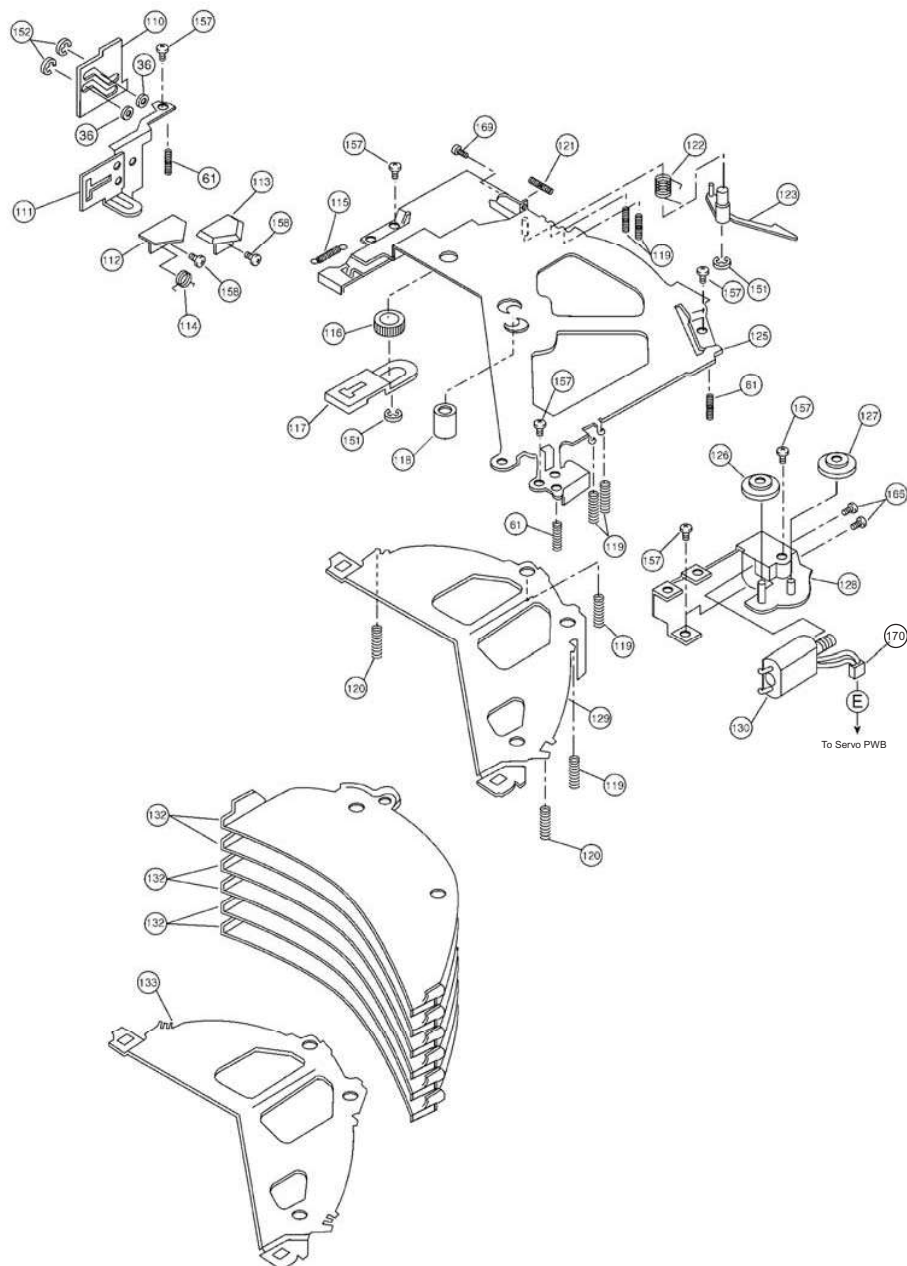

* The missing reference numbers are omitting.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	658-0248-11	Upper Chassis Assy	1	16	658-0240-80	Loading Motor FPC ASSY (With Switch)	1
2	658-0240-65	Side Bracket L	1	17	658-0240-81	Loading Motor Bracket Assy	1
3	658-0240-70	Rotary Damper Assy	1	18	658-0240-82	Loading Gear	1
4	658-0240-71	Roller Shaft Collar	1	20	658-0240-83	Push Lever Thrust Spring	1
5	658-0240-72	Outline Detection Spring	2	21	658-0240-84	Roller	1
6	658-0240-73	Feeder lock Lever Spring	1	22	658-0248-12	Push Spring	1
7	658-0240-74	Off Backlash Spring	1	23	658-0248-13	Push Lever	1
9	658-0240-66	Sub P.C.B bracket	2	24	658-0240-87	Spring	1
10	658-0240-67	Side chassis DR	1	25	658-0240-88	Guide Spring F	1
11	658-0240-75	Disc Guide U	1	26	658-0240-89	Feeder Spring	2
12	658-0240-76	Feeder Piece	1	27	658-0248-14	Guide FU	1
13	658-0240-77	Feeder Arm Assy	1	28	658-0240-91	Shaft	3
14	658-0240-78	Disc Collar	2	29	658-0240-92	Disc Roller	3
15	658-0240-79	Rubber Roller	2				

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
30	658-0240-93	Collar Shaft Assy	1	102	658-0241-39	Elevator Gear 1	2
31	658-0240-94	Loading Motor Assy	1	110	658-0241-40	Guide Cam B Plate Assy	1
32	658-0248-15	Slide Plate	1	111	658-0241-41	Guide B Base Assy	1
33	658-0248-16	Feeder Plate	1	112	658-0241-42	Guide BL	1
34	658-0240-97	Guide (FL)	1	113	658-0248-26	Guide BU	1
35	658-0240-98	Guide F Base	1	114	658-0241-44	Guide Spring B	1
36	658-0240-99	Guide Plate Collar	4	115	658-0241-45	Avoidance Lever Spring	1
37	658-0241-01	Guide Cam F Plate Assy	1	116	658-0241-46	Pushout Cam Gear	1
38	658-0241-02	Roller Plate Spring	1	117	658-0248-27	Avoidance Lever 1 Assy	1
39	658-0248-10	Upper Chassis Unit	1	118	658-0243-01	Disc Holder L	1
40	658-0248-17	Swing chassis Ass y	1	119	658-0248-28	Stocker Spring	6
41	658-0241-04	Guide Lever Assy B	1	120	658-0248-29	Stocker Spring	2
42	658-0241-05	Lever	1	121	658-0241-50	Pushout Plate Spring	1
51	658-0241-06	Clamping Drive Spring	1	122	658-0241-51	Push Lever Spring	1
52	658-0241-07	Horizontal Rack	1	123	658-0248-30	Pushout Lever	1
53	658-0248-18	Horizontal Cam	1	125	658-0248-31	Stocker Top Coner Assy	1
54	658-0248-19	Horizontal Cam Gear	1	126	658-0248-32	Pushout Gear 2	1
55	658-0241-10	Snap Ring	1	127	658-0248-33	Pushout Gear 1	1
56	658-0241-11	Horizontal Gear -4	1	128	658-0241-57	Horizontal Motor Bracket Assy	1
57	658-0241-12	Stocker Cam -3	2	129	658-0248-34	Stocker Tray Support	1
58	658-0241-13	Horizontal Gear -1	1	130	658-0241-59	Horizontal Motor Assy	1
59	658-0248-20	Gear	1	132	658-0248-35	Stocker Tray	6
60	658-0241-15	ELV Gear -4	2	133	658-0248-36	Stocker Tray Housing L	1
61	658-0248-21	Stocker Thrust Spring	6	150	658-0241-62	Retanning Ring	3
62	658-0241-17	Stocker Cam -2	2	151	658-0241-63	E-Ring	10
63	658-0241-18	Horizontal Gear -3	1	152	658-0241-64	Retanning Ring	4
65	658-0241-19	Optical Deck Unit	1	153	658-0241-65	Stocker Cam Ring	3
77	658-0248-22	Lever	1	154	658-0241-66	Screw M2x2mm	2
78	658-0241-21	Suspension Lock Plate	1	155	658-0241-67	Screw M2x2mm	4
79	658-0241-22	Damper Spring	2	156	658-0248-37	Bind Screw M2x3mm	5
80	658-0241-23	O-Ring	1	157	658-0241-69	Bind Screw M2x4mm	14
81	658-0241-24	Damper Spring R	1	158	658-0241-70	Screw w/Washer M2x4mm	12
82	658-0241-25	Stocker Rack	1	160	658-0241-71	Screw w/Washer M2x6mm	2
83	658-0241-26	Elevator Gear 2	3	162	658-0241-72	Spring	4
84	658-0241-27	Elevator Gear 3	3	163	658-0241-73	Thin Head Screw w/Washer	2
85	658-0241-28	Stocker Cam 1	1	165	658-0241-74	Screw	2
90	658-0241-29	Horizontal Cam Gear	1	169	658-0241-76	Screw M1.7x3mm	1
92	658-0248-23	Disc Holder L	1	170	658-0240-62	Power Cord With Plug 12v	1
93	658-0241-31	Disc Hold Gear	1	171	658-0248-08	Terminal	1
94	658-0241-32	Clamp Cam Gear	1	172	658-0248-09	Terminal	1
95	658-0248-24	Main Chassis Assy	1	173	658-0248-08	Terminal	1
96	658-0241-34	Horizontal Cam Gear 5	1	174	-----	Sub PWB Assy	1
97	658-0248-25	Stocker Roller	1	175	-----	Load-1 PWB Assy	1
98	658-0241-35	Elevator Motor FPC	1	176	-----	Load-2 PWB Assy	1
99	658-0241-36	Elevator Motor Assy	1	177	-----	Servo PWB Assy	1
100	658-0241-37	Elevator Motor Bracket	1	178	658-0241-81	Connect-Wire(CNP1)	1
101	658-0241-38	SW Cover	1	179	658-0241-82	Connect-Wire(CNP2)	1

ELECTRICAL PARTS LIST

Servo PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	658-0246-12	50WV 560PF	C246	658-0246-12	50WV 560PF	CN404	658-0240-29	Connector 10P
C102	658-0240-12	0.1uF 10WV	C247	658-0246-22	50WV 100PF	CN405	658-0240-29	Connector 10P
C113	658-0240-12	0.1uF 10WV	C248	658-0246-21	50WV 470PF	CN501	658-0240-28	Connector 6P
C114	658-0240-13	10uF 6.3WV	C249	658-0246-21	50WV 470PF	IC101	658-0237-01	AN8703FH-V
C115	658-0240-13	10uF 6.3WV	C251	658-0237-22	10V 0.1uF	IC201	658-0240-01	MNZS26EDCUB
C116	658-0248-04	50V 1000pF	C252	658-0237-22	10V 0.1uF	IC271	658-0246-03	C0JBAA000372
C117	658-0240-13	10uF 6.3WV	C253	658-0237-22	10V 0.1uF	IC272	658-0246-06	C0JBAA000356
C121	658-0246-14	50WV 6PF	C254	658-0237-22	10V 0.1uF	IC291	658-0240-03	C0ABB000105
C122	658-0240-13	10uF 6.3WV	C255	658-0237-22	10V 0.1uF	IC292	658-0248-01	C0JBAR000513
C123	658-0240-14	47uF 6.3WV	C256	658-0237-22	10V 0.1uF	IC301	658-0240-05	MN102H60KAA
C124	658-0237-22	10V 0.1uF	C271	658-0237-22	10V 0.1uF	IC341	658-0248-02	C3EBG000019
C125	658-0237-22	10V 0.1uF	C272	658-0237-22	10V 0.1uF	IC351	658-0248-03	C3FBKD000336
C126	658-0237-28	25V 0.027uF	C273	658-0237-22	10V 0.1uF	IC401	658-0240-08	C0GBY0000014
C127	658-0237-27	16V 0.047uF	C274	658-0237-22	10V 0.1uF	IC421	658-0237-09	C0GBH0000006
C128	658-0237-22	10V 0.1uF	C275	658-0237-22	10V 0.1uF	IC511	658-0246-07	MN13821SJP
C129	658-0246-22	50WV 100PF	C291	658-0248-07	50V 10pF	IC521	658-0240-09	C0CBADG000005
C131	658-0246-12	50WV 560PF	C292	658-0237-22	10V 0.1uF	L111	658-0240-30	JOJCC0000152
C132	658-0246-12	50WV 560PF	C293	658-0246-22	50WV 100PF	L121	658-0240-30	JOJCC0000152
C133	658-0237-22	10V 0.1uF	C294	658-0248-05	50V 15pF	L201	658-0240-31	JOJCC0000151
C134	658-0237-22	10V 0.1uF	C295	658-0246-22	50WV 100PF	L212	033-0000-05	1/16W 0 ohm
C135	658-0240-14	47uF 6.3WV	C296	658-0237-25	50V 100pF	L501	658-0240-32	YELTBMHS800T
C136	658-0237-22	10V 0.1uF	C297	658-0237-22	10V 0.1uF	L502	116-0000-00	1/8W 0 ohm
C137	658-0240-13	10uF 6.3WV	C298	658-0248-04	50V 1000pF	L503	658-0240-32	YELTBMHS800T
C141	658-0237-24	16V 0.01uF	C301	658-0237-22	10V 0.1uF	L504	658-0240-32	YELTBMHS800T
C142	658-0237-22	10V 0.1uF	C302	658-0237-22	10V 0.1uF	L505	658-0240-32	YELTBMHS800T
C143	658-0237-22	10V 0.1uF	C305	658-0237-22	10V 0.1uF	Q151	658-0237-14	TR 2SB766ATX
C144	658-0237-22	10V 0.1uF	C306	658-0237-22	10V 0.1uF	Q152	658-0237-14	TR 2SB766ATX
C145	658-0237-22	10V 0.1uF	C307	658-0237-22	10V 0.1uF	Q153	658-0240-10	B1GDCFN00007
C151	658-0237-22	10V 0.1uF	C311	658-0237-22	10V 0.1uF	Q154	658-0240-11	B1GBCFN00009
C152	658-0237-21	6.3V 47uF Tan	C321	658-0237-22	10V 0.1uF	Q211	658-0237-15	TR B1GBCFN00001
C153	658-0237-22	10V 0.1uF	C322	658-0237-22	10V 0.1uF	R101	033-1231-15	1/16W 12k ohm
C154	658-0237-21	6.3 V47uF Tan	C331	658-0237-22	10V 0.1uF	R102	033-1231-15	1/16W 12k ohm
C201	658-0237-22	10V 0.1uF	C332	658-0237-22	10V 0.1uF	R105	658-0237-41	1/16W 24k ohm
C202	658-0237-22	10V 0.1uF	C341	658-0237-22	10V 0.1uF	R106	658-0237-42	1/16W 3.9k ohm
C203	658-0237-22	10V 0.1uF	C351	658-0237-22	10V 0.1uF			Metal
C204	658-0237-22	10V 0.1uF	C352	658-0237-22	10V 0.1uF	R107	658-0237-43	1/16W 18k ohm
C205	658-0237-22	10V 0.1uF	C353	658-0246-22	50WV 100PF			Metal
C206	658-0248-04	50V 1000pF	C401	658-0246-22	50WV 100PF	R108	033-4721-15	1/16W 4.7k ohm
C207	658-0237-22	10V 0.1uF	C404	658-0237-25	50V 100pF	R121	033-1221-15	1/16W 1.2k ohm
C211	658-0246-22	50WV 100PF	C405	658-0237-22	10V 0.1uF	R122	033-1051-15	1/16W 1M ohm
C212	658-0246-22	50WV 100PF	C411	658-0237-22	10V 0.1uF	R123	033-2021-15	1/16W 2k ohm
C213	658-0237-24	16V0.01uF	C413	658-0237-22	10V 0.1uF	R131	033-1051-15	1/16W 1M ohm
C214	658-0237-24	16V0.01uF	C414	658-0237-22	10V 0.1uF	R132	033-1051-15	1/16W 1M ohm
C215	658-0237-22	10V0.1uF	C415	658-0237-22	10V 0.1uF	R141	033-1031-15	1/16W 10k ohm
C216	658-0237-22	10V0.1uF	C421	658-0237-22	10V 0.1uF	R142	033-1031-15	1/16W 10k ohm
C217	658-0248-05	50V 15pF	C422	658-0237-22	10V 0.1uF	R151	033-2291-15	1/16W 2.2 ohm
C218	658-0248-05	50V 15pF	C423	658-0237-22	10V 0.1uF	R152	658-0237-40	1/2W 20 ohm
C219	658-0237-22	10V 0.1uF	C424	658-0237-22	10V 0.1uF	R153	033-2291-15	1/16W 2.2 ohm
C220	658-0237-22	10V 0.1uF	C425	658-0237-22	10V 0.1uF	R154	658-0237-40	1/2W 20 ohm
C221	658-0240-13	10uF 6.3WV	C431	658-0237-24	16V 0.01uF	R155	033-1021-15	1/16W 1k ohm
C222	658-0237-24	16V 0.01uF	C432	658-0237-24	16V 0.01uF	R156	033-3331-15	1/16W 33k ohm
C223	658-0237-22	10V 0.1uF	C433	658-0237-22	10V 0.1uF	R157	033-2231-15	1/16W 22k ohm
C224	658-0237-24	16V 0.01uF	C434	658-0237-22	10V 0.1uF	R201	033-1031-15	1/16W 10k ohm
C225	658-0237-22	10V 0.1uF	C435	658-0237-22	10V 0.1uF	R202	658-0240-18	1/16W 150 ohm
C227	658-0246-18	16WV 0.022uF	C436	658-0237-22	10V 0.1uF	R211	033-1031-15	1/16W 10k ohm
C228	658-0246-19	50WV 47PF	C437	658-0237-22	10V 0.1uF	R212	033-2731-15	1/16W 27k ohm
C229	658-0237-22	10V 0.1uF	C438	658-0237-22	10V 0.1uF	R213	033-2731-15	1/16W 27k ohm
C230	658-0237-22	10V 0.1uF	C502	658-0240-13	10uF 6.3WV	R214	033-4721-15	1/16W 4.7k ohm
C231	658-0248-04	50V 1000pF	C503	658-0240-13	10uF 6.3WV	R215	033-4721-15	1/16W 4.7k ohm
C232	658-0237-22	10V 0.1uF	C504	658-0240-13	10uF 6.3WV	R216	033-1051-15	1/16W 1M ohm
C233	658-0237-34	50V 0.0056uF	C511	658-0237-22	10V 0.1uF	R217	033-4711-15	1/16W 470 ohm
C234	658-0248-04	50V 1000pF	C521	658-0237-22	10V 0.1uF	R218	033-3931-15	1/16W 39k ohm
C235	658-0248-04	50V 1000pF	C522	658-0240-14	47uF 6.3WV	R221	033-1021-15	1/16W 1k ohm
C236	658-0248-04	50V 1000pF	C523	658-0237-22	10V 0.1uF	R222	033-1531-15	1/16W 15k ohm
C237	658-0237-22	10V 0.1uF	CN101	658-0240-24	Connector 14P	R224	033-1051-15	1/16W 1M ohm
C238	658-0246-12	50WV 560PF	CN102	658-0240-25	Connector 16P	R225	033-5621-15	1/16W 5.6k ohm
C239	658-0246-12	50WV 560PF	CN201	658-0237-46	Connector 40P	R226	033-5621-15	1/16W 5.6k ohm
C240	658-0246-20	50WV 2200PF	CN202	658-0240-26	Connector 22P	R227	033-1031-15	1/16W 10k ohm
C241	658-0246-21	50WV 470PF	CN401	658-0240-27	Connector 19P	R228	033-4731-15	1/16W 47k ohm
C242	658-0237-22	10V 0.1uF	CN402	658-0240-28	Connector 6P	R229	658-0237-56	Resistor Network
C245	658-0248-06	50V 56pF	CN403	658-0237-49	Connector 2P	R230	033-4731-15	1/16W 47k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R231	033-3931-15	1/16W 39k ohm	R291	033-3321-15	1/16W 3.3k ohm	R414	033-1031-15	1/16W 10k ohm
R232	033-3931-15	1/16W 39k ohm	R292	033-4721-15	1/16W 4.7k ohm	R415	033-1231-15	1/16W 12k ohm
R245	033-3321-15	1/16W 3.3k ohm	R293	033-3321-15	1/16W 3.3k ohm	R416	033-1031-15	1/16W 10k ohm
R246	033-3321-15	1/16W 3.3k ohm	R294	033-4721-15	1/16W 4.7k ohm	R417	033-4731-15	1/16W 47k ohm
R247	033-3321-15	1/16W 3.3k ohm	R295	033-4731-15	1/16W 47k ohm	R418	033-1531-15	1/16W 15k ohm
R248	033-4731-15	1/16W 47k ohm	R296	033-3321-15	1/16W 3.3k ohm	R419	658-0240-20	1/16W 56k ohm
R249	658-0240-19	1/16W 2.7k ohm	R297	033-6821-15	1/16W 6.8k ohm	R421	658-0240-20	1/16W 56k ohm
R251	658-0237-58	Resistor Network	R298	033-1031-15	1/16W 10k ohm	R422	658-0240-21	1/10W 1 ohm
R252	033-8201-15	1/16W 82 ohm	R301	033-4711-15	1/16W 470 ohm	R423	658-0240-21	1/10W 1 ohm
R253	033-2201-15	1/16W 22 ohm	R302	658-0237-56	Resistor Network	R424	033-4731-15	1/16W 47k ohm
R254	033-8201-15	1/16W 82 ohm	R303	033-3321-15	1/16W 3.3k ohm	R425	033-1011-15	1/16W 100 ohm
R255	033-1031-15	1/16W 10k ohm	R304	033-3321-15	1/16W 3.3k ohm	R426	033-1011-15	1/16W 100 ohm
R256	033-1031-15	1/16W 10k ohm	R305	033-3321-15	1/16W 3.3k ohm	R431	033-2211-15	1/16W 220 ohm
R257	033-0000-05	1/16W 0 ohm	R306	033-3321-15	1/16W 3.3k ohm	R432	033-2211-15	1/16W 220 ohm
R258	033-8201-15	1/16W 82 ohm	R307	033-3321-15	1/16W 3.3k ohm	R433	033-2211-15	1/16W 220 ohm
R259	033-8201-15	1/16W 82 ohm	R309	033-1021-15	1/16W 1k ohm	R434	033-2211-15	1/16W 220 ohm
R260	033-2201-15	1/16W 22 ohm	R311	033-3321-15	1/16W 3.3k ohm	R435	658-0240-22	1/16W 68k ohm
R261	658-0237-57	Resistor Network	R312	033-3321-15	1/16W 3.3k ohm	R436	658-0240-22	1/16W 68k ohm
R262	033-1031-15	1/16W 10k ohm	R313	033-3321-15	1/16W 3.3k ohm	R437	658-0240-22	1/16W 68k ohm
R263	033-0000-05	1/16W 0 ohm	R314	033-3321-15	1/16W 3.3k ohm	R438	658-0240-22	1/16W 68k ohm
R264	658-0237-57	Resistor Network	R321	033-4731-15	1/16W 47k ohm	R439	658-0240-20	1/16W 56k ohm
R265	658-0237-57	Resistor Network	R322	033-4731-15	1/16W 47k ohm	R440	033-2211-15	1/16W 220 ohm
R266	658-0237-57	Resistor Network	R331	658-0237-56	Resistor Network	R441	658-0240-20	1/16W 56k ohm
R267	033-1021-15	1/16W 1k ohm	R332	033-1031-15	1/16W 10k ohm	R442	033-2211-15	1/16W 220 ohm
R268	033-1031-15	1/16W 10k ohm	R333	658-0240-18	1/16W 150 ohm	R511	658-0240-23	1/16W 100k ohm
R271	033-1031-15	1/16W 10k ohm	R341	033-4731-15	1/16W 47k ohm	SW8	658-0237-51	K0L1BA000023
R281	033-0000-05	1/16W 0 ohm	R351	658-0240-18	1/16W 150 ohm	SW9	658-0240-33	K0L1BA000022
R282	033-0000-05	1/16W 0 ohm	R401	033-1531-15	1/16W 15k ohm	SW10	658-0240-33	K0L1BA000022
R283	033-0000-05	1/16W 0 ohm	R402	033-1031-15	1/16W 10k ohm	SW11	658-0240-33	K0L1BA000022
R284	033-0000-05	1/16W 0 ohm	R403	033-1031-15	1/16W 10k ohm	XL201	658-0237-52	H0J168500003
R285	033-0000-05	1/16W 0 ohm	R404	033-1031-15	1/16W 10k ohm	PWB	-----	PWB
R286	033-0000-05	1/16W 0 ohm	R412	033-4721-15	1/16W 4.7k ohm			
R287	658-0240-18	1/16W 150 ohm	R413	033-1031-15	1/16W 10k ohm			

Sub PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	658-0246-22	50WV 100PF	C158	658-0237-22	10V0.1uF	C333	658-0237-23	6.3V 1uF
C102	658-0246-22	50WV 100PF	C161	658-0237-22	10V0.1uF	C341	658-0248-04	50V 1000pF
C103	658-0246-22	50WV 100PF	C162	658-0237-22	10V0.1uF	C342	658-0248-04	50V 1000pF
C104	658-0246-22	50WV 100PF	C163	658-0237-22	10V0.1uF	C343	658-0248-04	50V 1000pF
C105	658-0246-22	50WV 100PF	C164	658-0237-22	10V0.1uF	C344	658-0248-04	50V 1000pF
C106	658-0246-22	50WV 100PF	C165	658-0237-22	10V0.1uF	C346	658-0237-22	10V 0.1uF
C107	658-0246-22	50WV 100PF	C166	658-0237-22	10V0.1uF	C347	658-0240-14	47uF 6.3WV
C108	658-0246-22	50WV 100PF	C167	658-0246-22	50WV 100PF	C351	658-0240-44	330pF 50WV
C109	658-0246-22	50WV 100PF	C201	658-0240-42	1uF 6.3WV	C352	658-0240-44	330pF 50WV
C121	658-0240-13	10uF 6.3WV	C202	658-0246-22	50WV 100PF	C353	658-0240-45	120PF 50WV
C122	658-0240-13	10uF 6.3WV	C203	658-0246-22	50WV 100PF	CN201	658-0240-26	Connector 22P
C123	658-0246-22	50WV 100PF	C204	658-0246-22	50WV 100PF	CN211	658-0240-28	Connector 6P
C124	658-0237-22	10V0.1uF	C205	658-0246-22	50WV 100PF	CN301	658-0237-47	Connector 30P
C125	658-0246-22	50WV 100PF	C206	658-0246-22	50WV 100PF	CN311	658-0240-51	Connector 6P
C126	658-0237-22	10V0.1uF	C207	658-0246-22	50WV 100PF	IC101	658-0246-08	C1AB00002286
C127	658-0246-22	50WV 100PF	C208	658-0246-22	50WV 100PF	IC201	658-0246-09	C3ABP0000074
C128	658-0237-22	10V0.1uF	C209	658-0246-22	50WV 100PF	IC221	658-0246-10	C3FBMD000282
C129	658-0240-13	10uF 6.3WV	C211	658-0240-42	1uF 6.3WV	IC231	658-0240-37	C0JBAH0000082
C130	658-0237-22	10V0.1uF	C212	658-0246-22	50WV 100PF	IC241	658-0240-37	C0JBAH0000082
C131	658-0237-22	10V0.1uF	C213	658-0246-22	50WV 100PF	IC251	658-0246-11	C3GBCA0000001
C132	658-0240-13	10uF 6.3WV	C214	658-0246-22	50WV 100PF	IC252	658-0240-39	C0JBAB0000255
C133	658-0237-22	10V0.1uF	C215	658-0246-22	50WV 100PF	IC261	658-0246-06	C0JBAA0000356
C134	658-0237-22	10V0.1uF	C221	658-0237-22	10V0.1uF	IC262	658-0246-06	C0JBAA0000356
C135	658-0237-22	10V0.1uF	C222	658-0246-22	50WV 100PF	IC321	658-0240-40	C0FBK0000029
C136	658-0240-13	10uF 6.3WV	C223	658-0237-22	10V0.1uF	IC331	658-0246-05	C0CBADC000084
C137	658-0240-13	10uF 6.3WV	C231	658-0237-22	10V0.1uF	J1	117-0000-10	1/8W 0ohm
C138	658-0237-22	10V0.1uF	C241	658-0237-22	10V0.1uF	J2	117-0000-10	1/8W 0ohm
C139	658-0237-22	10V0.1uF	C251	658-0237-22	10V0.1uF	L121	658-0240-56	J0MAB0000134
C141	658-0240-13	10uF 6.3WV	C252	658-0240-13	10uF 6.3WV	L122	658-0240-52	J0JCC0000042
C142	658-0237-22	10V0.1uF	C253	658-0240-12	0.1uF 10WV	L123	658-0240-30	J0JCC0000152
C151	658-0240-13	10uF 6.3WV	C261	658-0237-22	10V0.1uF	L124	658-0240-30	J0JCC0000152
C152	658-0240-13	10uF 6.3WV	C262	658-0237-22	10V0.1uF	L125	658-0240-30	J0JCC0000152
C153	658-0237-22	10V0.1uF	C321	658-0240-14	47uF 6.3WV	L126	658-0240-30	J0JCC0000152
C154	658-0237-22	10V0.1uF	C322	658-0240-13	10uF 6.3WV	L127	658-0240-30	J0JCC0000152
C155	658-0237-22	10V0.1uF	C323	658-0237-22	10V0.1uF	L301	658-0240-57	J0MAB0000015
C156	658-0237-22	10V0.1uF	C331	658-0237-22	10V0.1uF	L302	658-0240-57	J0MAB0000015
C157	658-0237-22	10V0.1uF	C332	658-0240-43	10uF 16WV	L303	658-0240-46	470pF 50WV

REF No.	PART No.	DESCRIPTION
L304	658-0240-46	470pF 50WV
L321	116-0000-00	1/8W 0 ohm
L322	116-0000-00	1/8W 0 ohm
L323	658-0246-32	JOJCC0000159
L324	658-0246-32	JOJCC0000159
L325	658-0246-32	JOJCC0000159
L326	658-0246-32	JOJCC0000159
L341	658-0240-32	YELTBMHS800T
L342	658-0240-32	YELTBMHS800T
L343	658-0240-32	YELTBMHS800T
L344	116-0000-00	1/8W 0 ohm
L345	658-0240-32	YELTBMHS800T
L351	658-0246-31	G1C2R2K00013
R101	033-1011-15	1/16W 100 ohm
R121	658-0240-47	1/16W 33 ohm
R122	033-1011-15	1/16W 100 ohm
R123	033-1011-15	1/16W 100 ohm
R124	033-3931-15	1/16W 39k ohm
R125	033-4731-15	1/16W 47k ohm
R126	033-4731-15	1/16W 47k ohm
R127	033-2201-15	1/16W 22 ohm
R128	033-2201-15	1/16W 22 ohm
R129	033-1011-15	1/16W 100 ohm

REF No.	PART No.	DESCRIPTION
R130	658-0240-47	1/16W 33 ohm
R131	116-1001-10	1/8W 10 ohm
R132	658-0240-47	1/16W 33 ohm
R133	658-0240-47	1/16W 33 ohm
R134	658-0240-48	1/10W 75 ohm
R135	658-0240-49	1/16W 1k ohm
R136	658-0240-18	1/16W 150 ohm
R137	658-0240-18	1/16W 150 ohm
R153	033-3321-15	1/16W 3.3k ohm
R162	033-3931-15	1/16W 39k ohm
R163	033-3931-15	1/16W 39k ohm
R164	033-1031-15	1/16W 10k ohm
R165	033-1031-15	1/16W 10k ohm
R166	033-2021-15	1/16W 2k ohm
R167	033-3931-15	1/16W 39k ohm
R171	033-4711-15	1/16W 470 ohm
R172	033-4711-15	1/16W 470 ohm
R173	033-4711-15	1/16W 470 ohm
R174	033-4711-15	1/16W 470 ohm
R175	033-4711-15	1/16W 470 ohm
R176	033-4711-15	1/16W 470 ohm
R177	033-4711-15	1/16W 470 ohm
R178	033-4711-15	1/16W 470 ohm

REF No.	PART No.	DESCRIPTION
R221	658-0240-18	1/16W 150 ohm
R222	033-1031-15	1/16W 10k ohm
R231	658-0240-50	1/16W 75 ohm
R251	033-2021-15	1/16W 2k ohm
R252	033-1221-15	1/16W 1.2k ohm
R253	033-4711-15	1/16W 470 ohm
R261	033-1031-15	1/16W 10k ohm
R311	033-1011-15	1/16W 100 ohm
R312	033-1011-15	1/16W 100 ohm
R313	033-1011-15	1/16W 100 ohm
R314	033-1011-15	1/16W 100 ohm
R315	033-1011-15	1/16W 100 ohm
R316	658-0240-23	1/16W 100k ohm
R317	658-0240-23	1/16W 100k ohm
R318	033-0000-05	1/16W 0 ohm
R321	033-1011-15	1/16W 100 ohm
R322	033-1011-15	1/16W 100 ohm
R323	033-1011-15	1/16W 100 ohm
R324	033-1011-15	1/16W 100 ohm
R325	033-1011-15	1/16W 100 ohm
XL101	658-0240-55	H1A2705B0013
PWB	-----	PWB

Load-1 PWB(B3) section

REF No.	PART No.	DESCRIPTION
CN311	658-0240-59	Connector 9P
Q13	658-0237-17	TR B3HB00000012
Q4	658-0240-58	B3NAA0000065

REF No.	PART No.	DESCRIPTION
Q5	658-0237-17	TR B3HB00000012
Q6	658-0237-17	TR B3HB00000012
Q7	658-0237-17	TR B3HB00000012

REF No.	PART No.	DESCRIPTION
SW12	658-0244-13	K0L1BA000104
SW14	658-0244-13	K0L1BA000104
PWB	-----	PWB

Load-2 PWB(B4) section

REF No.	PART No.	DESCRIPTION
CN312	658-0240-61	Connector 6P
D13	658-0240-60	B3EB00000013

REF No.	PART No.	DESCRIPTION
D5	658-0240-60	B3EB00000013
D6	658-0240-60	B3EB00000013

REF No.	PART No.	DESCRIPTION
D7	658-0240-60	B3EB00000013
PWB	-----	PWB

Elevator-Motor FPC(B5) section

REF No.	PART No.	DESCRIPTION
D1	658-0240-58	B3NAA0000065

REF No.	PART No.	DESCRIPTION
SW2	658-0244-13	K0L1BA000104

REF No.	PART No.	DESCRIPTION
PWB	-----	PWB