


EXPLODED VIEW / PARTS LIST

Panel section

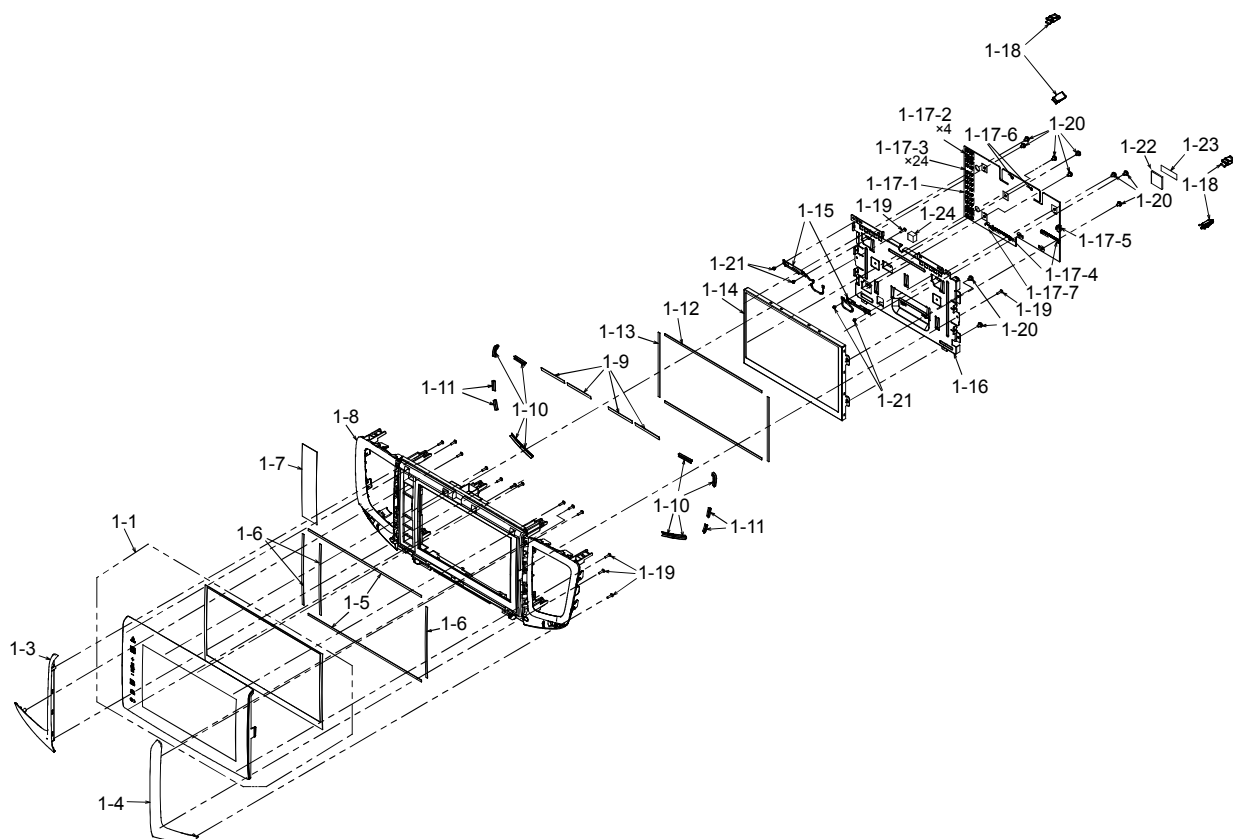


NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	*Unused number	-
1-1	948-4108-01	TOUCH-PANEL-ASSY	1
1-2	-----	*Unused number	-
1-3	383-0880-00	DECORATE PART-L	1
1-4	383-0881-00	DECORATE PART-R	1
1-5	347-9392-00	CUSHION A	2
1-6	347-9393-00	CUSHION B	3
1-7	347-9385-02	ILLUMI SHEET	1
1-8	370-6733-02	ESCUTCHEON	1
1-9	347-9400-00	FELT A	4
1-10	347-9401-00	FELT B	8
1-11	347-9459-00	FELT C	4
1-12	347-9388-00	CUSHION H	2
1-13	347-9389-00	CUSHION V	2
1-14	379-0500-00	TFT	1
1-15	060-8122-20	B/T_WIFI-ANT	2

NO.	PART NO.	DESCRIPTION	Q'TY
1-16	331-5691-01	LCD HOLDER	1
1-17	-----	*Unused number	1
1-17-1	-----	PANEL-PWB (440500-039)	1
1-17-2	001-7138-80	LED	4
1-17-3	001-7148-95	LED	24
1-17-4	074-2248-60	OUTLET SOCKET	2
1-17-5	076-6020-04	PLUG	1
1-17-6	092-2203-00	ANT-RECEPT	2
1-17-7	076-6000-59	PLUG	1
1-18	335-8461-00	CLIP	4
1-19	716-0778-52	TAPPING SCREW(2x8)	15
1-20	780-2604-50	IT SCREW(M2.6x4)	10
1-21	716-1468-01	SPECIAL SCREW(M2x2.5)	4
1-22	345-6126-00	CUSHION RUBBER	1
1-23	347-9609-00	LCD SHEET	1
1-24	347-9625-00	PWB SPACER	1

Main section

[Exploded view]

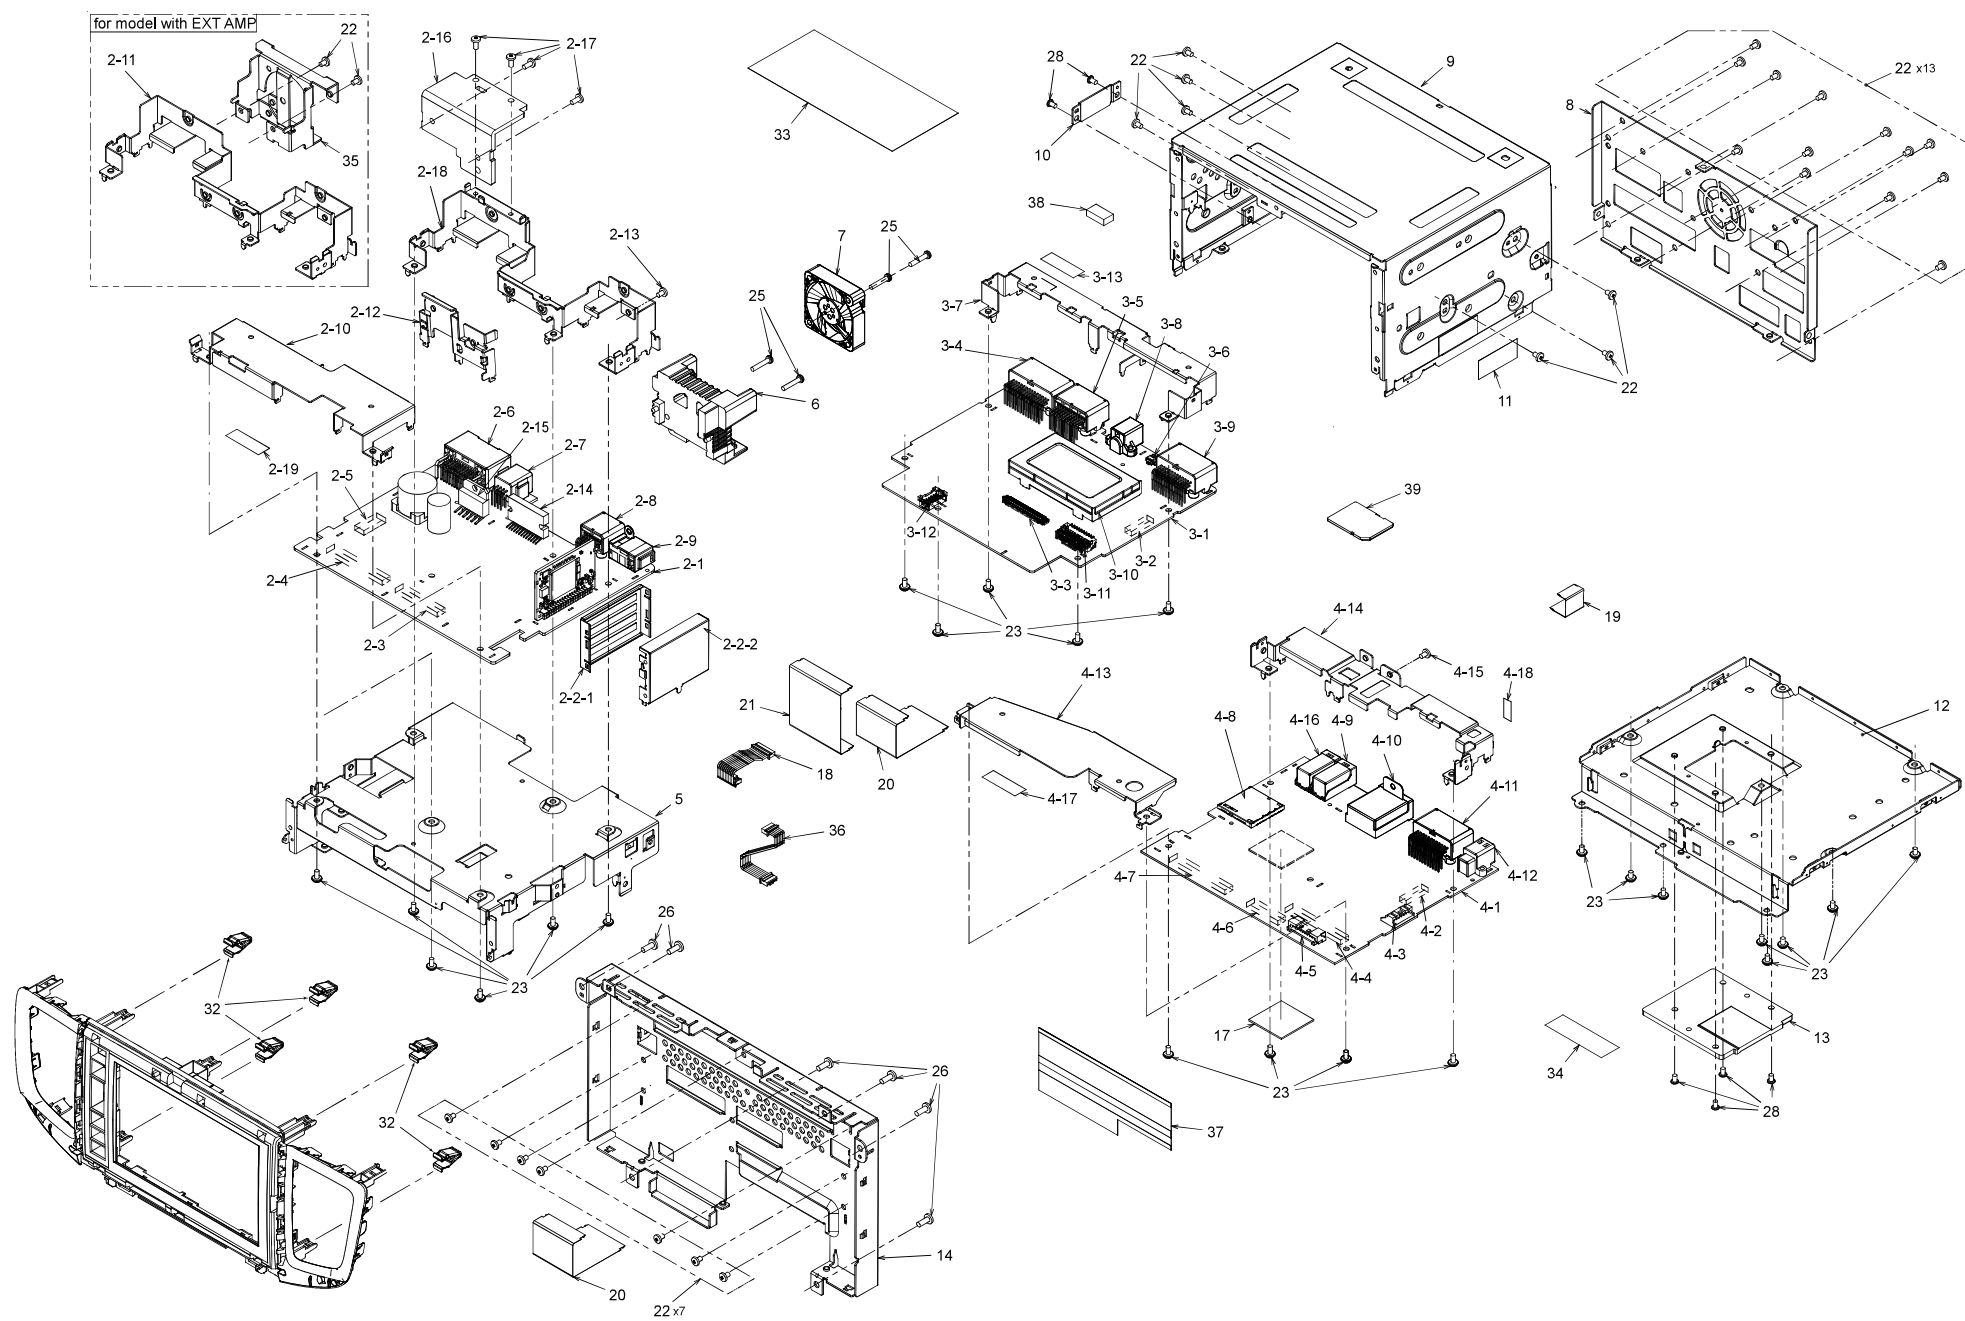

Main section

[Parts list]

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	*Unused number	-	4-10	-----	*Not mounted (OUTLET SOCKET)	-
2	-----	*Unused number	-	4-11	074-4017-24	OUTLET SOCKET	1
2-1	-----	AUDIO-PWB (440901-039)	1	4-12	092-2249-00	ANT-RECEPT	1
2-2	-----	*Unused number	-	4-13	331-5700-03	PWB-HOLDER(CPU)	1
2-2-1	331-5306-00	SHIELD_CASE-U	1	4-14	331-5699-01	CN HOLDER(CPU)	1
2-2-2	331-5307-01	SHIELD_CASE-B	1	4-15	-----	*Not mounted (MACHINE SCREW)	-
2-3	074-2248-60	OUTLET SOCKET	1	4-16	074-4099-30	OUTLET SOCKET	1
2-4	074-2248-80	OUTLET SOCKET	1	4-17	-----	BAR CODE LABEL(009200-290)	1
2-5	076-6021-56	PLUG	1	4-18	347-9616-00	SPACER	1
2-6	074-4118-24	OUTLET SOCKET	1	5	312-0548-04	INNER CHASSIS	1
2-7	074-4031-08	OUTLET SOCKET	1	6	-----	*Not mounted (HEAT SINK)	-
2-8	074-4017-12	OUTLET SOCKET	1	7	020-3061-30	DC-MOTOR	1
2-9	092-2246-00	ANT-RECEPT	1	8	307-0840-30	BACK-CVR	1
2-10	331-5697-01	PWB-HOLDER	1	9	310-2054-03	TOP CASE	1
2-11	331-5701-01	CN HOLDER(AD)	1	10	331-5692-01	SD COVER	1
2-12	-----	*Not mounted (IC HOLDER(SUB))	-	11	347-9412-00	SHADE	1
2-13	714-2604-8B	MACHINE SCREW(M2.6x4)	1	12	311-2099-01	BOTTOM CASE	1
2-14	-----	*Not mounted (IC 4CH)	-	13	313-2231-00	HEAT SINK(SOC)	1
2-15	-----	*Not mounted (IC 1CH)	-	14	309-1998-02	FRONT PLATE	1
2-16	-----	*Not mounted (HEAT SINK(SUB))	-	15	-----	*Unused number	-
2-17	-----	*Not mounted (MACHINE SCREW)	-	16	-----	*Unused number	-
2-18	-----	*Not mounted (CN HOLDER(AD))	-	17	345-7413-00	CUSHION	1
2-19	-----	BAR CODE LABEL(009200-290)	1	18	854-4677-50	EXTENSION LEAD	1
3	-----	*Unused number	-	19	816-3180-05	FLAT WIRE	1
3-1	-----	IF-PWB (469000-039)	1	20	816-3181-06	FLAT WIRE	2
3-2	074-2248-40	OUTLET SOCKET	1	21	816-3182-05	FLAT WIRE	1
3-3	074-2248-60	OUTLET SOCKET	1	22	714-2604-8B	MACHINE SCREW(M2.6x4)	29
3-4	074-4017-28	OUTLET SOCKET	1	23	780-2604-50	IT SCREW(M2.6x4)	23
3-5	074-4017-20	OUTLET SOCKET	1	24	-----	*Unused number	-
3-6	076-0569-02	PLUG	1	25	732-2614-1B	SEMS SCREW(M2.6x14)	2
3-7	331-5698-03	CN HOLDER(IF)	1	26	716-1553-50	TAPPING SCREW(3x8)	6
3-8	092-2253-01	ANT-RECEPT	1	27	-----	*Unused number	-
3-9	074-4119-24	OUTLET SOCKET	1	28	780-2604-51	SPECIAL SCREW(M2.6x4)	6
3-10	941-0262-50	TUNER PACK(QY5091/5092HA)	1	29	-----	*Unused number	-
	941-0264-00	TUNER PACK(QY5094HA)		30	-----	*Unused number	-
3-11	076-6021-60	PLUG	1	31	-----	*Unused number	-
3-12	076-6021-56	PLUG	1	32	335-7317-00	CLIP	5
3-13	-----	BAR CODE LABEL(009200-290)	1	33	276-1661-03	SETPLATE(QY5091HA)	1
4	-----	*Unused number	-		276-1661-04	SETPLATE(QY5092HA)	
4-1	-----	CPU-PWB (440700-039)	1		276-1661-10	SETPLATE(QY5094HA)	
4-2	074-2248-40	OUTLET SOCKET	1	34	-----	XM CODE LABEL(092401-290)(QY5091HA)	1
4-3	076-6023-07	PLUG	1			XM CODE LABEL(092402-290)(QY5092HA)	
4-4	074-2248-60	OUTLET SOCKET	1			XM CODE LABEL(092404-290)(QY5094HA)	
4-5	076-6021-60	PLUG	1	35	331-5774-00	FAN HOLDER	1
4-6	074-2248-50	OUTLET SOCKET	1	36	854-4681-50	EXTENSION LEAD	1
4-7	074-2248-80	OUTLET SOCKET	1	37	347-9533-00	INSULATOR	1
4-8	074-8017-91	OUTLET SOCKET	1	38	345-8008-00	GASKET	1
4-9	074-4099-00	OUTLET SOCKET	1	39	-----	SD CARD(002540-065)	1

ELECTRICAL PARTS LIST

PANEL PWB(B1) section

* Neither the part numbers of parts on which software is written, nor part numbers of parts for which replacement is prohibited in the production process are listed in the parts list.

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C102	043-4306-90	1uF	C320	165-4763-35	16V 47uF	L202	010-2285-31	BLM21PG331SN
C103	043-4306-90	1uF	C321	165-4763-35	16V 47uF			1D
C104	043-4306-90	1uF	C329	043-4306-90	1uF	L301	010-3417-90	10uH
C105	043-4306-90	1uF	C330	043-4306-90	1uF	L305	010-3558-52	NRS4018T100M
C106	043-4306-90	1uF	C331	165-1073-35	16V 100uF			DGJV
C107	043-4306-90	1uF	C333	168-1052-78	16V 1uF K	P101	076-6000-59	9P
C108	043-4306-90	1uF	D303	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	P303	076-6020-04	4P
C109	043-4306-90	1uF				Q301	193-2118-50	2SD2118F5 R,S
C110	043-4306-90	1uF	D304	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	Q302	CAZ0331	2SC4081T106R
C112	046-1042-78	0.1uF K B				R101	033-0000-05	1/16W 0 ohm
C113	046-1042-78	0.1uF K B	D305	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R102	033-1031-15	1/16W 10k ohm J
C114	043-4306-90	1uF				R104	033-0000-05	1/16W 0 ohm
C115	043-4306-90	1uF	D306	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R105	033-0000-05	1/16W 0 ohm
C116	166-1201-50	12pF CH				R106	033-0000-05	1/16W 0 ohm
C117	166-1201-50	12pF CH	D307	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R107	033-0000-05	1/16W 0 ohm
C118	166-1201-50	12pF CH				R108	033-1011-15	1/16W 100 ohm J
C119	166-1201-50	12pF CH	D308	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R109	033-1011-15	1/16W 100 ohm J
C120	166-1201-50	12pF CH				R113	033-1011-15	1/16W 100 ohm J
C121	166-1201-50	12pF CH	D309	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R115	033-3301-15	1/16W 33 ohm J
C122	166-1201-50	12pF CH				R119	033-3301-15	1/16W 33 ohm J
C123	166-1201-50	12pF CH	D310	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R120	033-3301-15	1/16W 33 ohm J
C124	166-1201-50	12pF CH				R122	032-0221-57	1/16W 13k ohm F
C125	166-1201-50	12pF CH	D311	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R123	032-0221-10	1/16W 15k ohm F
C126	166-1201-50	12pF CH				R124	033-1031-15	1/16W 10k ohm J
C127	166-1201-50	12pF CH	D312	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R180	119-0000-05	1/10W 0 ohm JW
C128	166-1201-50	12pF CH				R181	119-0000-05	1/10W 0 ohm JW
C129	166-1201-50	12pF CH	D313	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R183	033-0000-05	1/16W 0 ohm
C130	166-1201-50	12pF CH				R184	117-1511-15	1/8W 150 ohm
C131	166-1201-50	12pF CH	D314	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R186	119-0000-05	1/10W 0 ohm JW
C132	166-1201-50	12pF CH				R187	119-0000-05	1/10W 0 ohm JW
C133	166-1201-50	12pF CH	D315	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R205	033-0000-05	1/16W 0 ohm
C134	166-1201-50	12pF CH				R206	033-0000-05	1/16W 0 ohm
C135	166-1201-50	12pF CH	D316	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R209	032-0221-02	1/16W 33 ohm 1%
C136	166-1201-50	12pF CH				R210	032-0221-02	1/16W 33 ohm 1%
C137	166-1201-50	12pF CH	D317	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R212	032-0221-02	1/16W 33 ohm 1%
C138	166-1201-50	12pF CH				R217	033-0000-05	1/16W 0 ohm
C139	166-1201-50	12pF CH	D318	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R218	033-0000-05	1/16W 0 ohm
C140	166-1201-50	12pF CH				R221	033-3331-15	1/16W 33k ohm J
C141	166-1201-50	12pF CH	D319	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R222	033-3331-15	1/16W 33k ohm J
C142	166-1201-50	12pF CH				R301	032-0210-68	1/10W 220 ohm F
C143	166-1201-50	12pF CH	D320	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R302	AQZ0491	1/10W 47 ohm 1%
C144	166-1201-50	12pF CH				R303	032-0210-68	1/10W 220 ohm F
C145	166-1201-50	12pF CH	D321	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R304	AQZ0491	1/10W 47 ohm 1%
C146	166-1201-50	12pF CH				R305	032-0210-31	1/10W 180 ohm F
C147	043-4306-90	1uF	D322	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R306	AQZ0491	1/10W 47 ohm 1%
C149	046-1032-78	0.01uF K B				R307	032-0210-31	1/10W 180 ohm F
C150	046-1022-58	50V 1000pF	D323	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R308	AQZ0491	1/10W 47 ohm 1%
C151	045-1011-50	100pF CH				R309	032-0210-44	1/10W 200 ohm F
C153	166-1201-50	12pF CH	D324	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R310	119-0000-05	1/10W 0 ohm JW
C154	165-1073-15	6.3V 100uF				R311	032-0210-31	1/10W 180 ohm F
C155	165-4763-35	16V 47uF	D325	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R312	032-0210-37	1/10W 27 ohm F
C156	043-4306-90	1uF				R313	032-0210-68	1/10W 220 ohm F
C157	043-4306-90	1uF	D326	001-7148-95	NSSB064-EE7-TKMLP4LP7*1.7-28	R314	119-0000-05	1/10W 0 ohm JW
C158	165-1073-15	6.3V 100uF				R315	032-0210-00	1/10W 330 ohm F
C201	165-2263-15	6.3V 22uF	D327	001-7138-80	SMLS14EETT68	R316	AQZ0491	1/10W 47 ohm 1%
C202	046-1032-78	0.01uF K B				R317	032-0210-00	1/10W 330 ohm F
C204	043-4306-90	1uF	D328	001-7138-80	SMLS14EETT68	R318	AQZ0491	1/10W 47 ohm 1%
C205	046-1032-78	0.01uF K B	D329	001-7138-80	SMLS14EETT68	R319	032-0210-68	1/10W 220 ohm F
C206	043-4306-90	1uF				R320	119-0000-05	1/10W 0 ohm JW
C207	043-4306-90	1uF	D330	001-7138-80	SMLS14EETT68	R321	032-0210-68	1/10W 220 ohm F
C208	046-1032-78	0.01uF K B	IC101	051-6117-91	ATMXT768E-AB	R322	119-0000-05	1/10W 0 ohm JW
C210	165-2263-15	6.3V 22uF	IC102	051-3774-90	NJM11100F1	R323	032-0210-44	1/10W 200 ohm F
C215	046-1022-58	50V 1000pF	IC201	060-8169-90	UGKZ2-H-05A (WIFI&BT-MODULE)	R324	AQZ0491	1/10W 47 ohm 1%
C217	165-2263-15	6.3V 22uF				R325	032-0210-92	1/10W 560 ohm F
C218	165-1073-15	6.3V 100uF	J101	074-2248-60	60P	R326	AQZ0491	1/10W 47 ohm 1%
C219	165-1073-15	6.3V 100uF	J201	092-2203-00	ANT-RECEPT	R327	032-0210-92	1/10W 560 ohm F
C301	165-2263-35	16V 22uF	J202	092-2203-00	ANT-RECEPT	R328	032-0210-14	1/10W 75 ohm 1%
C308	043-0602-90	10uF	J302	074-2248-60	60P	R347	032-0221-04	1/16W 10 ohm F
C309	045-1011-50	100pF CH	L102	BMZ0211	BLM18PG121SN	R353	032-0221-80	1/16W 6.2k ohm F
C316	165-1073-35	16V 100uF				R359	119-1011-15	1/10W 100 ohm
C317	168-1052-78	16V 1uF K	L201	010-2285-31	BLM21PG331SN	R363	033-2231-15	1/16W 22k ohm J

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R364	033-3321-15	1/16W 3.3k ohm J	R3118	AQZ0491	1/10W 47 ohm 1%	RN107	050-0156-55	1/16W 2.2k ohm x4
R365	032-0210-68	1/10W 220 ohm F	R3129	032-0210-00	1/10W 330 ohm F	RN108	050-0156-55	1/16W 2.2k ohm x4
R366	AQZ0491	1/10W 47 ohm 1%	R3130	AQZ0491	1/10W 47 ohm 1%	RN109	050-0156-55	1/16W 2.2k ohm x4
R368	032-0210-68	1/10W 220 ohm F	R3132	032-0210-68	1/10W 220 ohm F	RN110	050-0156-55	1/16W 2.2k ohm x4
R369	AQZ0491	1/10W 47 ohm 1%	R3133	119-0000-05	1/10W 0 ohm JW	RN111	050-0156-55	1/16W 2.2k ohm x4
R377	119-0000-05	1/10W 0 ohm JW	R3135	032-0210-68	1/10W 220 ohm F	RN112	050-0156-53	1/16W 0 ohm x4
R378	032-0210-31	1/10W 180 ohm F	R3136	119-0000-05	1/10W 0 ohm JW	RN113	050-0156-53	1/16W 0 ohm x4
R379	AQZ0491	1/10W 47 ohm 1%	R3138	032-0210-44	1/10W 200 ohm F	RN201	050-0156-59	1/16W 33 ohm x4
R3102	032-0210-31	1/10W 180 ohm F	R3139	AQZ0491	1/10W 47 ohm 1%	RN202	050-0156-59	1/16W 33 ohm x4
R3103	AQZ0491	1/10W 47 ohm 1%	R3142	032-0210-92	1/10W 560 ohm F	RN203	050-0156-52	1/16W 100 ohm x4
R3107	032-0210-44	1/10W 200 ohm F	R3143	032-0210-14	1/10W 75 ohm 1%	RN301	050-0156-70	1/16W 10 ohm x4
R3108	119-0000-05	1/10W 0 ohm JW	R3145	AQZ0491	1/10W 47 ohm 1%	RN302	050-0156-70	1/16W 10 ohm x4
R3110	033-0000-05	1/16W 0 ohm	R3146	032-0210-92	1/10W 560 ohm F	TH301	002-0336-50	NCP18WF104F3 SRB
R3111	032-0210-31	1/10W 180 ohm F	RN101	050-0156-53	1/16W 0 ohm x4	PWB	039-4405-00	PWB(WITHOUT COMPONENTS)
R3112	032-0210-37	1/10W 27 ohm F	RN102	050-0156-53	1/16W 0 ohm x4			
R3114	032-0210-68	1/10W 220 ohm F	RN104	050-0156-55	1/16W 2.2k ohm x4			
R3115	119-0000-05	1/10W 0 ohm JW	RN105	050-0156-55	1/16W 2.2k ohm x4			
R3117	032-0210-00	1/10W 330 ohm F	RN106	050-0156-55	1/16W 2.2k ohm x4			

AUDIO PWB(B2) section

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C101	042-4035-92	6.3V 220uF	C207	043-0570-90	16V 2.2uF K	C273	046-1022-58	50V 1000pF
C103	043-4306-90	1uF	C208	043-0570-90	16V 2.2uF K	C275	042-4035-96	6.3V 47uF
C104	042-4035-91	6.3V 100uF	C211	045-1011-50	100pFJ CH	C276	046-3322-58	3300pF K B
C105	043-4306-90	1uF	C212	045-1011-50	100pFJ CH	C277	046-1022-58	50V 1000pF
C106	043-4306-90	1uF	C213	045-1011-50	100pFJ CH	C278	046-3322-58	3300pF K B
C107	043-4306-90	1uF	C214	045-1011-50	100pFJ CH	C279	046-3322-58	3300pF K B
C109	043-4306-90	1uF	C215	045-1011-50	100pFJ CH	C280	168-1052-78	16V 1uF K
C110	043-4306-90	1uF	C216	045-1011-50	100pFJ CH	C281	168-1052-78	16V 1uF K
C112	043-4306-90	1uF	C217	045-1011-50	100pFJ CH	C286	042-4033-90	6.3V 220uF
C114	043-4306-90	1uF	C218	045-1011-50	100pFJ CH	C287	042-0560-85	6.3V 100uF
C115	043-4306-90	1uF	C222	046-1042-78	0.1uF K B	C288	043-4306-90	1uF
C116	043-4306-90	1uF	C223	168-4752-98	4.7uF K	C289	043-4306-90	1uF
C117	043-4306-90	1uF	C224	168-4752-98	4.7uF K	C290	043-4306-90	1uF
C118	043-4306-90	1uF	C225	046-1042-78	0.1uF K B	C291	043-4306-90	1uF
C119	043-4306-90	1uF	C226	046-1042-78	0.1uF K B	C292	165-1073-35	16V 100uF
C121	043-4306-90	1uF	C227	046-1042-78	0.1uF K B	C294	165-2263-15	6.3V 22uF
C122	043-4306-90	1uF	C228	046-1042-78	0.1uF K B	C296	165-2263-15	6.3V 22uF
C123	045-1011-50	100pFJ CH	C229	043-4306-90	1uF	C297	046-1042-78	0.1uF K B
C124	043-4306-90	1uF	C230	046-2232-78	0.022uF K B	C298	043-4306-90	1uF
C125	043-4306-90	1uF	C231	043-4306-90	1uF	C299	042-4035-96	6.3V 47uF
C126	045-1011-50	100pFJ CH	C232	046-1042-78	0.1uF K B	C301	043-4306-90	1uF
C128	043-4306-90	1uF	C233	046-1042-78	0.1uF K B	C302	043-4306-90	1uF
C129	043-4306-90	1uF	C234	045-1007-50	10 +/-0.5pF CH	C303	042-4035-90	6.3V 22uF
C130	043-4306-90	1uF	C235	046-1042-78	0.1uF K B	C305	043-4306-90	1uF
C131	043-4306-90	1uF	C237	045-1007-50	10 +/-0.5pF CH	C306	043-4306-90	1uF
C133	043-4306-90	1uF	C238	168-4752-98	4.7uF K	C307	043-4306-90	1uF
C134	043-4306-90	1uF	C239	043-4306-90	1uF	C308	043-4306-90	1uF
C135	046-1032-78	0.01uF K B	C240	042-0560-85	6.3V 100uF	C309	043-4306-90	1uF
C136	043-4306-90	1uF	C241	043-4306-90	1uF	C310	043-4306-90	1uF
C137	043-4306-90	1uF	C242	046-1042-78	0.1uF K B	C311	043-4306-90	1uF
C139	043-4306-90	1uF	C243	046-1042-78	0.1uF K B	C312	043-4306-90	1uF
C141	043-4306-90	1uF	C245	046-2232-78	0.022uF K B	C313	043-4306-90	1uF
C142	043-4306-90	1uF	C247	168-1042-78	16V 0.1uF K	C314	043-4306-90	1uF
C143	043-4306-90	1uF	C248	168-1052-78	16V 1uF K	C315	043-4306-90	1uF
C153	168-1052-78	16V 1uF K	C249	046-1042-78	0.1uF K B	C316	043-4306-90	1uF
C154	043-4306-90	1uF	C251	043-4306-90	1uF	C317	043-4306-90	1uF
C155	045-1201-50	12pFJ CH	C252	042-4035-90	6.3V 22uF	C318	043-4306-90	1uF
C156	045-1201-50	12pFJ CH	C253	043-0559-90	6.3V 22uF	C319	043-4306-90	1uF
C157	043-4306-90	1uF	C254	168-4752-98	4.7uF K	C320	043-4306-90	1uF
C158	043-4306-90	1uF	C255	046-1042-78	0.1uF K B	C321	043-4306-90	1uF
C160	042-4035-96	6.3V 47uF	C256	046-2232-78	0.022uF K B	C322	043-4306-90	1uF
C161	042-4035-91	6.3V 100uF	C257	168-1052-78	16V 1uF K	C323	043-4306-90	1uF
C163	045-1011-50	100pFJ CH	C259	043-4306-90	1uF	C324	043-4306-90	1uF
C164	045-1011-50	100pFJ CH	C260	046-2232-78	0.022uF K B	C325	043-4306-90	1uF
C165	043-4306-90	1uF	C261	043-4306-90	1uF	C326	043-4306-90	1uF
C201	043-0570-90	16V 2.2uF K	C262	043-4306-90	1uF	C327	043-4306-90	1uF
C202	043-0570-90	16V 2.2uF K	C263	046-1042-78	0.1uF K B	C328	043-4306-90	1uF
C203	043-0570-90	16V 2.2uF K	C269	046-1042-78	0.1uF K B	C329	043-4306-90	1uF
C204	043-0570-90	16V 2.2uF K	C270	042-4035-98	16V 47uF	C330	043-4306-90	1uF
C205	043-0570-90	16V 2.2uF K	C271	046-2232-78	0.022uF K B	C331	043-4306-90	1uF
C206	043-0570-90	16V 2.2uF K	C272	046-3322-58	3300pF K B	C332	043-4306-90	1uF

REF NO.	PART NO.	DESCRIPTION
C334	045-1201-50	12pFJ CH
C335	045-1201-50	12pFJ CH
C336	042-4035-91	6.3V 100uF
C337	042-4035-90	6.3V 22uF
C401	046-1022-58	50V 1000pF
C402	043-0563-90	16V 47uF
C403	046-1022-58	50V 1000pF
C404	046-1032-78	0.01uF K B
C405	045-4701-50	47pF CH
C406	046-3322-58	3300pF K B
C407	046-2232-78	0.022uF K B
C408	166-3096-50	3pF +/-0.25pF CK
C409	046-2232-78	0.022uF K B
C410	046-2232-78	0.022uF K B
C411	046-2232-78	0.022uF K B
C412	046-2232-78	0.022uF K B
C413	168-2242-58	0.22uF K
C414	046-2232-78	0.022uF K B
C415	166-1201-50	12pF CH
C418	046-1022-58	50V 1000pF
C429	046-1042-78	0.1uF K B
C430	045-3901-50	39pFJ CH
C431	045-1211-50	120pFJ CH
C458	168-1032-55	0.01uF K
C501	042-0638-51	16V 220uF
C502	042-0638-51	16V 220uF
C503	043-4402-90	16V 1uF
C504	042-0560-85	6.3V 100uF
C506	168-1052-78	16V 1uF K
C508	168-1052-78	16V 1uF K
C509	165-1073-35	16V 100uF
C511	165-2263-35	16V 22uF
C513	168-1052-78	16V 1uF K
C516	165-2263-35	16V 22uF
C517	165-2263-35	16V 22uF
C518	165-2263-35	16V 22uF
C519	165-2263-35	16V 22uF
C520	165-2263-35	16V 22uF
C521	165-2263-35	16V 22uF
C522	165-2263-35	16V 22uF
C523	165-2263-35	16V 22uF
C524	166-4711-50	470pF CH
C525	166-4711-50	470pF CH
C526	166-4711-50	470pF CH
C527	166-4711-50	470pF CH
C528	166-4711-50	470pF CH
C529	166-4711-50	470pF CH
C530	166-4711-50	470pF CH
C531	166-4711-50	470pF CH
C532	166-1011-50	100pF CH
C533	166-1011-50	100pF CH
C534	166-1011-50	100pF CH
C535	166-1011-50	100pF CH
C536	166-1011-50	100pF CH
C537	166-1011-50	100pF CH
C538	166-1011-50	100pF CH
C539	166-1011-50	100pF CH
C540	043-4402-90	16V 1uF
C541	043-4402-90	16V 1uF
C542	043-4402-90	16V 1uF
C543	043-4402-90	16V 1uF
C546	165-2263-35	16V 22uF
C547	165-2263-35	16V 22uF
C548	165-2263-35	16V 22uF
C549	165-2263-35	16V 22uF
C550	165-1063-35	16V 10uF
C551	165-1063-35	16V 10uF
C552	165-1063-35	16V 10uF
C553	165-1063-35	16V 10uF
C554	043-4306-90	1uF
C555	043-4306-90	1uF
C560	046-1032-78	0.01uF K B
C561	045-1011-50	100pFJ CH
C562	166-1021-50	1000pF CH

REF NO.	PART NO.	DESCRIPTION
C563	042-0638-51	16V 220uF
C564	042-0638-51	16V 220uF
C565	042-0638-51	16V 220uF
C566	042-0638-51	16V 220uF
C567	042-4035-94	16V 22uF
C568	043-4402-90	16V 1uF
C573	166-1021-50	1000pF CH
C574	166-1021-50	1000pF CH
C575	166-1021-50	1000pF CH
C576	166-1021-50	1000pF CH
C601	043-0573-90	10V 22uF
C602	043-0573-90	10V 22uF
C603	043-0573-90	10V 22uF
C604	043-0573-90	10V 22uF
C605	166-4711-50	470pF CH
C606	166-4711-50	470pF CH
C607	166-4711-50	470pF CH
C608	166-4711-50	470pF CH
C609	166-1011-50	100pF CH
C610	166-1011-50	100pF CH
C611	166-1011-50	100pF CH
C612	166-1011-50	100pF CH
C613	043-4402-90	16V 1uF
C614	043-4402-90	16V 1uF
C615	043-0603-90	16V 10uF
C616	043-0603-90	16V 10uF
C617	043-0603-90	16V 10uF
C618	043-0603-90	16V 10uF
C619	165-1073-35	16V 100uF
C620	043-4402-90	16V 1uF
C621	165-4763-35	16V 47uF
C701	046-1042-78	0.1uF K B
C704	166-1021-50	1000pF CH
C705	166-1021-50	1000pF CH
C710	166-1021-50	1000pF CH
C711	166-1021-50	1000pF CH
C713	045-2011-50	50V 200pF
C714	045-2011-50	50V 200pF
C715	043-0603-90	16V 10uF
C717	046-2222-58	2200pF K B
C718	046-2222-58	2200pF K B
C807	168-1042-78	16V 0.1uF K
C808	168-4752-98	4.7uF K
C809	168-1042-78	16V 0.1uF K
C810	165-4763-15	6.3V 47uF
C811	045-1011-50	100pFJ CH
C814	168-1052-78	16V 1uF K
C815	168-1052-78	16V 1uF K
C816	165-2263-35	16V 22uF
C1025	046-1042-78	0.1uF K B
C1027	043-4306-90	1uF
C1028	043-4306-90	1uF
C1029	043-0605-90	10V 2.2uF
C1030	043-0605-90	10V 2.2uF
C1031	046-1042-78	0.1uF K B
C1032	168-4742-78	0.47uF K
C1034	046-1042-78	0.1uF K B
C1036	046-1042-78	0.1uF K B
C1037	046-1022-58	50V 1000pF
C1038	046-1042-78	0.1uF K B
C1039	043-0581-90	10V 4.7uF
C1040	046-1042-78	0.1uF K B
C1041	046-1042-78	0.1uF K B
C1042	043-4306-90	1uF
C1043	043-4306-90	1uF
C1044	046-1042-78	0.1uF K B
C1045	043-0603-90	16V 10uF
C1046	168-1052-78	16V 1uF K
C1047	168-1052-78	16V 1uF K
C1049	046-1042-78	0.1uF K B
C1050	046-1032-78	0.01uF K B
C1051	046-1032-78	0.01uF K B
C1052	046-1042-78	0.1uF K B
C1053	165-1063-35	16V 10uF

REF NO.	PART NO.	DESCRIPTION
C1054	165-1063-35	16V 10uF
C1055	178-1022-78	1000pF
C1056	046-1032-78	0.01uF K B
C1106	043-4306-90	1uF
C1112	042-4035-90	6.3V 22uF
C1113	043-4306-90	1uF
C1205	166-2221-50	2200pF CH
C1211	046-3332-78	0.033uF K B
C1212	168-1042-38	50V 0.1uF K
C1218	043-8000-90	50V 0.1uF
C1219	043-5709-90	50V 1uF K
C1220	043-4306-90	1uF
C1221	166-1021-50	1000pF CH
C1222	166-1021-50	1000pF CH
C1223	166-1021-50	1000pF CH
C1224	166-1021-50	1000pF CH
C1225	043-5709-90	50V 1uF K
C1226	042-4441-00	25V 4700uF
C1228	046-1022-58	50V 1000pF
C1229	046-1022-58	50V 1000pF
C1233	166-2221-50	2200pF CH
C1234	043-4306-90	1uF
C1235	166-1021-50	1000pF CH
C1236	166-1021-50	1000pF CH
C1237	166-1021-50	1000pF CH
C1238	166-1021-50	1000pF CH
C1239	168-2242-58	0.22uF K
C1240	168-2242-58	0.22uF K
C1241	168-1032-55	0.01uF K
C1242	165-1063-55	35V 10uF
C1244	043-0566-90	50V 2.2uF K
C1245	043-0566-90	50V 2.2uF K
C1248	168-1042-38	50V 0.1uF K
C1249	043-4306-90	1uF
C1251	042-0643-54	25V 470uF
C1252	043-5709-90	50V 1uF K
C1253	043-8000-90	50V 0.1uF
C1254	043-8000-90	50V 0.1uF
C1259	042-0643-54	25V 470uF
C1261	046-3332-78	0.033uF K B
C1262	168-1042-38	50V 0.1uF K
C1301	046-1042-78	0.1uF K B
C1302	042-4034-92	25V 680uF
C1314	046-1042-78	0.1uF K B
C1329	043-5709-90	50V 1uF K
C1330	168-1052-78	16V 1uF K
C1336	168-1052-78	16V 1uF K
C1337	042-4035-95	16V 100uF
C1340	046-1042-78	0.1uF K B
C1343	168-1052-78	16V 1uF K
C1344	043-0573-90	10V 22uF
C1345	043-4306-90	1uF
C1346	045-1007-50	10 +/-0.5pF CH
C1347	046-3922-58	3900pF K B
C1348	043-0603-90	16V 10uF
C1349	043-7700-90	50V 4.7uF
C1350	043-5709-90	50V 1uF K
C1353	168-1042-38	50V 0.1uF K
C1354	043-7300-90	10V 47uF
C1357	168-1042-78	16V 0.1uF K
C1358	045-5096-50	5pF +/-0.25pF CH
C1359	046-3322-58	3300pF K B
C1360	168-1042-38	50V 0.1uF K
C1361	168-1042-38	50V 0.1uF K
C1364	043-0563-90	16V 47uF
C1365	168-1042-78	16V 0.1uF K
C1366	043-4306-90	1uF
C1367	168-1042-38	50V 0.1uF K
C1368	043-7700-90	50V 4.7uF
C1369	042-4046-91	25V 220uF
C1370	042-4035-91	6.3V 100uF
C1372	042-4035-95	16V 100uF
C1375	043-7700-90	50V 4.7uF
C1377	043-7700-90	50V 4.7uF

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C1378	042-0643-54	25V 470uF	IC1003	051-3392-90	S-1323B15NB-N8ATFG	Q102	125-7016-90	RZQ050P01TR
C1380	046-1042-78	0.1uF K B				Q201	125-7007-90	Si5441BDC-TI-E3
C1382	043-4306-90	1uF	IC1004	051-6734-90	WM8727	Q510	193-1306-00	2SD1306
C1383	042-4035-93	10V 470uF	IC1105	051-7566-90	NLV27WZU04DF T2G	Q511	193-1306-00	2SD1306
C1384	043-5709-90	50V 1uF K				Q512	193-1306-00	2SD1306
C1385	165-1063-35	16V 10uF	IC1106	051-7566-90	NLV27WZU04DF T2G	Q513	193-1306-00	2SD1306
C1386	043-4306-90	1uF				Q514	193-1306-00	2SD1306
C1387	168-1052-78	16V 1uF K	IC1203	051-7202-90	MC74VHC1G32DF T2G	Q515	193-1306-00	2SD1306
C1388	043-4306-90	1uF				Q516	193-1306-00	2SD1306
C1389	165-1063-35	16V 10uF	IC1204	051-5811-90	L9637D	Q517	193-1306-00	2SD1306
D101	001-2633-90	1SS388-TPL3,F	IC1205	051-7547-90	SN74LVC1G07D CKR	Q603	190-2088-00	2SA2088-T106
D102	001-2633-90	1SS388-TPL3,F				Q606	125-2038-92	RN1902
D401	001-9013-90	BA891	IC1301	051-5468-80	XC6118N10AMR-G	Q607	193-1306-00	2SD1306
D402	001-9013-90	BA891	IC1302	051-5468-80	XC6118N10AMR-G	Q608	193-1306-00	2SD1306
D1201	001-2403-90	M1F60	IC1304	-----	BD00D0AWHFP-TR	Q609	193-1306-00	2SD1306
D1203	001-2630-90	1SS420-TPL3,F				Q610	193-1306-00	2SD1306
D1204	001-2630-90	1SS420-TPL3,F				Q701	192-4081-00	2SC4081
D1205	001-1325-90	1SS387				Q901	192-4081-00	2SC4081
D1206	001-1325-90	1SS387				Q902	191-1197-50	2SB1197K Q,R
D1207	001-1325-90	1SS387	IC1305	051-3519-90	NJU7771F05-TE2	Q903	192-4081-00	2SC4081
D1208	001-1325-90	1SS387	IC1307	051-3767-90	BD00GC0EEFJ-ME2	Q1001	125-7016-90	RZQ050P01TR
D1209	001-2403-90	M1F60				Q1002	192-4116-00	2SC4116
D1307	001-2633-90	1SS388-TPL3,F	IC1308	051-3941-90	BD2232G-GTR	Q1201	125-2046-91	DTC114EUBTL
D1309	001-2633-90	1SS388-TPL3,F	IC1309	-----	MAX16933ATIR /V+T	Q1203	125-7011-90	RSR025P03TL
D1310	001-2633-90	1SS388-TPL3,F				Q1204	192-4081-00	2SC4081
D1312	001-2629-90	D1FM3-5063				Q1209	125-2046-91	DTC114EUBTL
ET1301	073-0778-90	TERMINAL				Q1210	125-7011-90	RSR025P03TL
IC101	051-7202-90	MC74VHC1G32D FT2G	J101	074-2255-09	FH33-9S-0.5SH 9P	Q1305	125-0035-91	DTA114EUBTL
IC102	051-3724-80	S-1172B1C-E6T1U	J402	092-2246-00	ANT-RECEPT	Q1306	192-4081-00	2SC4081
IC103	-----	R5S72691P266 FP	J701	074-4017-12	12P	Q1307	125-8044-90	SH8K15GZETB
		(MICOM)(BGA) (043630-052)	J702	074-4031-08	OUTLET SOCKET	Q1308	125-8044-90	SH8K15GZETB
IC104	051-5481-90	S-1009N30I-M5T1U	J901	074-2248-60	60P	Q1309	125-7016-90	RZQ050P01TR
IC105	051-9854-00	S25FL164K0XM FI010	J902	074-2248-80	80P	Q1310	192-4116-00	2SC4116
IC106	051-7221-18	TC7SH04FU	J1201	074-4118-24	24P	R101	033-3301-15	1/16W 33 ohm J
IC201	-----	SAF7741HV/ N127ZK(DSP) (Exposed die pad) (674713-051)	L101	010-3104-54	600 ohm/100MHz	R102	033-3301-15	1/16W 33 ohm J
IC202	051-3516-90	S-1132B33-U5T1G	L102	010-3104-54	600 ohm/100MHz	R103	033-3301-15	1/16W 33 ohm J
IC203	051-3328-90	S-1323B18NB-N8D-TF	L201	010-3104-54	600 ohm/100MHz	R104	033-0000-05	1/16W 0 ohm
IC301	-----	BD00IA5EEFJ-ME2 (LDO REG) (Exposed Pad) (376390-051)	L202	010-3104-54	600 ohm/100MHz	R105	032-0221-99	1/16W 100 ohm 1%
IC302	-----	AD21479WYCPZ 1A02(DSP) (Exposed pad) (044200-052)	L206	010-3104-54	600 ohm/100MHz	R106	033-3301-15	1/16W 33 ohm J
IC401	-----	TEF7000 (Tuner) (Thermal pad) (402590-051)	L211	010-3104-54	600 ohm/100MHz	R107	033-3301-15	1/16W 33 ohm J
IC501	051-6768-90	PCM1690IDCAR Q1	L220	010-3104-54	600 ohm/100MHz	R109	032-0221-75	1/16W 47k ohm F
IC502	051-3042-90	OPA2134UA	L222	010-3104-54	600 ohm/100MHz	R110	032-0221-75	1/16W 47k ohm F
IC503	051-3010-90	NJM4580E	L223	010-3104-54	600 ohm/100MHz	R111	033-0000-05	1/16W 0 ohm
IC504	051-3010-90	NJM4580E	L225	010-3108-57	MPZ2012S102A T000	R112	032-0221-99	1/16W 100 ohm 1%
IC505	051-3010-90	NJM4580E	L226	010-3104-54	600 ohm/100MHz	R113	033-3301-15	1/16W 33 ohm J
IC506	051-3010-90	NJM4580E	L227	010-3108-57	MPZ2012S102A T000	R115	032-0221-74	1/16W 10k ohm 1%
IC507	051-3774-90	NJM11100F1	L301	010-3104-54	600 ohm/100MHz	R116	032-0221-75	1/16W 47k ohm F
IC601	051-3010-90	NJM4580E	L401	010-3104-54	600 ohm/100MHz	R117	032-0221-75	1/16W 47k ohm F
IC602	051-3010-90	NJM4580E	L402	010-3062-54	290nH	R118	032-0221-06	1/16W 100k ohm F
IC701	051-6676-90	CA0013BM	L503	010-3104-54	600 ohm/100MHz	R120	032-0221-75	1/16W 47k ohm F
IC801	051-3764-90	BD00HA5EEFJ-ME2	L504	010-3104-54	600 ohm/100MHz	R125	032-0221-75	1/16W 47k ohm F
IC1001	051-6718-90	AK5357VT-E2	L801	010-3104-54	600 ohm/100MHz	R126	032-0221-75	1/16W 47k ohm F
IC1002	-----	MN5B02UC(DSP) (676700-051)	L1001	010-2285-64	1k ohm/100MHz	R127	032-0221-75	1/16W 47k ohm F
			L1002	010-3104-54	600 ohm/100MHz	R128	032-0221-75	1/16W 47k ohm F
			L1003	010-3104-54	600 ohm/100MHz	R129	033-3301-15	1/16W 33 ohm J
			L1004	010-3104-54	600 ohm/100MHz	R130	033-6801-15	1/16W 68 ohm J
			L1102	010-3127-91	220 ohm/100MHz	R131	033-4701-15	1/16W 47 ohm J
			L1201	010-3105-62	1k ohm/100MHz	R132	032-0221-75	1/16W 47k ohm F
			L1202	010-3105-62	1k ohm/100MHz	R133	032-0221-75	1/16W 47k ohm F
			L1203	010-3104-54	600 ohm/100MHz	R134	032-0221-75	1/16W 47k ohm F
			L1206	010-8070-00	60uH	R135	032-0221-75	1/16W 47k ohm F
			L1207	010-8067-00	DN-CL2733-5	R137	032-0221-75	1/16W 47k ohm F
			L1208	010-3105-62	1k ohm/100MHz	R138	032-0221-93	1/16W 470k ohm F
			L1209	010-3105-62	1k ohm/100MHz	R139	032-0221-75	1/16W 47k ohm F
			L1306	010-3545-53	22uH	R140	032-0221-75	1/16W 47k ohm F
			L1307	010-3545-53	22uH	R141	032-0221-08	1/16W 1k ohm F
			L1308	010-3580-50	4.7uH	R142	032-0221-74	1/16W 10k ohm 1%
			NF802	060-3115-52	CKD310JB1C47 4ST	R143	032-0221-06	1/16W 100k ohm F
			P901	076-6021-56	6P	R144	032-0221-75	1/16W 47k ohm F
			Q101	190-1586-00	2SA1586 O,Y,G	R145	032-0221-75	1/16W 47k ohm F
						R146	032-0221-74	1/16W 10k ohm 1%
						R147	032-0221-75	1/16W 47k ohm F
						R148	032-0221-75	1/16W 47k ohm F
						R149	032-0221-75	1/16W 47k ohm F

REF NO.	PART NO.	DESCRIPTION
R150	032-0221-74	1/16W 10k ohm 1%
R152	032-0221-74	1/16W 10k ohm 1%
R153	032-0221-74	1/16W 10k ohm 1%
R156	032-0221-74	1/16W 10k ohm 1%
R157	032-0221-74	1/16W 10k ohm 1%
R158	032-0221-99	1/16W 100 ohm 1%
R159	032-0221-75	1/16W 47k ohm F
R160	032-0221-99	1/16W 100 ohm 1%
R161	032-0221-75	1/16W 47k ohm F
R162	032-0221-74	1/16W 10k ohm 1%
R163	032-0221-74	1/16W 10k ohm 1%
R164	032-0221-74	1/16W 10k ohm 1%
R165	032-0221-99	1/16W 100 ohm 1%
R166	033-0000-05	1/16W 0 ohm
R168	033-3921-15	1/16W 3.9k ohm J
R169	032-0221-74	1/16W 10k ohm 1%
R170	032-0221-75	1/16W 47k ohm F
R171	032-0221-51	1/16W 4.7k ohm F
R173	033-3921-15	1/16W 3.9k ohm J
R175	033-5621-15	1/16W 5.6k ohm J
R176	032-0221-51	1/16W 4.7k ohm F
R177	032-0221-51	1/16W 4.7k ohm F
R178	033-3921-15	1/16W 3.9k ohm J
R179	033-3921-15	1/16W 3.9k ohm J
R180	032-0221-76	1/16W 24k ohm F
R181	032-0221-74	1/16W 10k ohm 1%
R183	033-3321-15	1/16W 3.3k ohm J
R184	033-0000-05	1/16W 0 ohm
R185	032-0221-99	1/16W 100 ohm 1%
R194	032-0221-99	1/16W 100 ohm 1%
R196	032-0221-51	1/16W 4.7k ohm F
R197	033-3301-15	1/16W 33 ohm J
R198	033-3301-15	1/16W 33 ohm J
R199	033-3301-15	1/16W 33 ohm J
R201	033-5601-15	1/16W 56 ohm J
R202	033-0000-05	1/16W 0 ohm
R203	032-0221-09	1/16W 33k ohm F
R204	032-0221-09	1/16W 33k ohm F
R205	032-0221-09	1/16W 33k ohm F
R206	032-0221-09	1/16W 33k ohm F
R207	032-0221-53	1/16W 18k ohm F
R208	032-0221-53	1/16W 18k ohm F
R209	032-0221-53	1/16W 18k ohm F
R210	032-0221-53	1/16W 18k ohm F
R213	032-0221-09	1/16W 33k ohm F
R214	032-0221-09	1/16W 33k ohm F
R215	032-0221-09	1/16W 33k ohm F
R216	032-0221-09	1/16W 33k ohm F
R217	032-0221-74	1/16W 10k ohm 1%
R218	032-0221-74	1/16W 10k ohm 1%
R219	032-0221-74	1/16W 10k ohm 1%
R220	032-0221-74	1/16W 10k ohm 1%
R221	033-0000-05	1/16W 0 ohm
R222	033-0000-05	1/16W 0 ohm
R223	032-0221-74	1/16W 10k ohm 1%
R224	033-0000-05	1/16W 0 ohm
R225	033-0000-05	1/16W 0 ohm
R226	032-0221-99	1/16W 100 ohm 1%
R227	032-0221-74	1/16W 10k ohm 1%
R228	032-0221-74	1/16W 10k ohm 1%
R229	032-0210-36	1/10W 22 ohm F
R230	032-0225-87	1/16W 75 ohm +/- 0.5%
R231	033-3301-15	1/16W 33 ohm J
R232	032-0221-99	1/16W 100 ohm 1%
R233	032-0221-99	1/16W 100 ohm 1%
R234	032-0225-87	1/16W 75 ohm +/- 0.5%
R235	119-0000-05	1/10W 0 ohm JW
R236	033-5601-15	1/16W 56 ohm J
R238	033-5601-15	1/16W 56 ohm J
R239	033-5601-15	1/16W 56 ohm J
R240	033-4701-15	1/16W 47 ohm J
R241	033-4701-15	1/16W 47 ohm J

REF NO.	PART NO.	DESCRIPTION
R242	033-0000-05	1/16W 0 ohm
R243	033-4701-15	1/16W 47 ohm J
R244	033-0000-05	1/16W 0 ohm
R245	119-0000-05	1/10W 0 ohm JW
R246	119-0000-05	1/10W 0 ohm JW
R248	119-0000-05	1/10W 0 ohm JW
R249	033-5601-15	1/16W 56 ohm J
R250	033-5601-15	1/16W 56 ohm J
R251	033-5601-15	1/16W 56 ohm J
R252	119-0000-05	1/10W 0 ohm JW
R253	119-0000-05	1/10W 0 ohm JW
R259	119-0000-05	1/10W 0 ohm JW
R260	119-0000-05	1/10W 0 ohm JW
R261	119-0000-05	1/10W 0 ohm JW
R262	032-0221-74	1/16W 10k ohm 1%
R269	119-0000-05	1/10W 0 ohm JW
R270	119-0000-05	1/10W 0 ohm JW
R271	119-0000-05	1/10W 0 ohm JW
R272	119-0000-05	1/10W 0 ohm JW
R276	033-0000-05	1/16W 0 ohm
R277	033-0000-05	1/16W 0 ohm
R280	033-3301-15	1/16W 33 ohm J
R281	032-0221-99	1/16W 100 ohm 1%
R282	032-0221-99	1/16W 100 ohm 1%
R289	032-0210-03	1/10W 10 ohm F
R290	032-0210-03	1/10W 10 ohm F
R291	033-0000-05	1/16W 0 ohm
R295	033-0000-05	1/16W 0 ohm
R296	033-3301-15	1/16W 33 ohm J
R297	033-3301-15	1/16W 33 ohm J
R298	033-5601-15	1/16W 56 ohm J
R299	033-5601-15	1/16W 56 ohm J
R300	119-0000-05	1/10W 0 ohm JW
R301	032-0221-79	1/16W 1.2k ohm F
R302	032-0210-55	1/10W 2.2k ohm F
R303	032-0221-74	1/16W 10k ohm 1%
R304	032-0221-74	1/16W 10k ohm 1%
R305	032-0221-74	1/16W 10k ohm 1%
R306	032-0221-74	1/16W 10k ohm 1%
R307	032-0221-75	1/16W 47k ohm F
R308	033-1051-15	1/16W 1M ohm J
R309	033-2221-15	1/16W 2.2k ohm J
R311	033-3301-15	1/16W 33 ohm J
R312	032-0221-99	1/16W 100 ohm 1%
R314	033-3301-15	1/16W 33 ohm J
R315	033-3301-15	1/16W 33 ohm J
R316	033-3301-15	1/16W 33 ohm J
R317	032-0221-74	1/16W 10k ohm 1%
R318	033-0000-05	1/16W 0 ohm
R319	033-0000-05	1/16W 0 ohm
R320	032-0221-74	1/16W 10k ohm 1%
R321	033-3301-15	1/16W 33 ohm J
R326	033-0000-05	1/16W 0 ohm
R328	033-0000-05	1/16W 0 ohm
R329	033-0000-05	1/16W 0 ohm
R330	033-0000-05	1/16W 0 ohm
R331	033-0000-05	1/16W 0 ohm
R332	033-0000-05	1/16W 0 ohm
R333	033-0000-05	1/16W 0 ohm
R404	032-0210-14	1/10W 75 ohm 1%
R408	032-0221-56	1/16W 22k ohm F
R409	033-3921-15	1/16W 3.9k ohm J
R410	119-4741-15	1/10W 470k ohm
R412	033-3311-15	1/16W 330 ohm J
R414	033-0000-05	1/16W 0 ohm
R415	033-0000-05	1/16W 0 ohm
R418	033-1051-15	1/16W 1M ohm J
R420	033-1201-15	1/16W 12 ohm
R421	033-1051-15	1/16W 1M ohm J
R423	033-0000-05	1/16W 0 ohm
R424	033-0000-05	1/16W 0 ohm
R425	033-0000-05	1/16W 0 ohm
R442	033-0000-05	1/16W 0 ohm
R443	033-0000-05	1/16W 0 ohm

REF NO.	PART NO.	DESCRIPTION
R450	033-0000-05	1/16W 0 ohm
R452	033-0000-05	1/16W 0 ohm
R453	033-1811-15	1/16W 180 ohm J
R454	117-0000-05	1/8W 0 ohm JW
R501	119-1021-15	1/10W 1k ohm
R502	119-1021-15	1/10W 1k ohm
R503	119-1021-15	1/10W 1k ohm
R504	119-1021-15	1/10W 1k ohm
R505	119-1021-15	1/10W 1k ohm
R506	033-3301-15	1/16W 33 ohm J
R508	117-2211-15	1/8W 220 ohm
R509	119-1021-15	1/10W 1k ohm
R510	119-1021-15	1/10W 1k ohm
R511	119-1021-15	1/10W 1k ohm
R522	032-0210-58	1/10W 12k ohm F
R523	032-0210-58	1/10W 12k ohm F
R524	032-0210-58	1/10W 12k ohm F
R525	032-0210-58	1/10W 12k ohm F
R526	032-0210-58	1/10W 12k ohm F
R527	032-0210-58	1/10W 12k ohm F
R528	032-0210-58	1/10W 12k ohm F
R529	032-0210-58	1/10W 12k ohm F
R530	032-0210-58	1/10W 12k ohm F
R531	032-0210-58	1/10W 12k ohm F
R532	032-0210-58	1/10W 12k ohm F
R533	032-0210-58	1/10W 12k ohm F
R534	032-0210-58	1/10W 12k ohm F
R535	032-0210-58	1/10W 12k ohm F
R536	032-0210-58	1/10W 12k ohm F
R537	032-0210-10	1/10W 13k ohm
R538	032-0210-58	1/10W 12k ohm F
R539	032-0210-10	1/10W 13k ohm
R540	032-0210-10	1/10W 13k ohm
R541	032-0210-10	1/10W 13k ohm
R542	032-0210-10	1/10W 13k ohm
R543	032-0210-10	1/10W 13k ohm
R544	032-0210-10	1/10W 13k ohm
R545	032-0210-10	1/10W 13k ohm
R550	117-1011-15	1/8W 100 ohm
R552	117-1011-15	1/8W 100 ohm
R554	117-1011-15	1/8W 100 ohm
R556	117-1011-15	1/8W 100 ohm
R558	117-1011-15	1/8W 100 ohm
R560	117-1011-15	1/8W 100 ohm
R562	117-1011-15	1/8W 100 ohm
R564	117-1011-15	1/8W 100 ohm
R567	119-0000-05	1/10W 0 ohm JW
R568	119-0000-05	1/10W 0 ohm JW
R569	119-0000-05	1/10W 0 ohm JW
R570	119-0000-05	1/10W 0 ohm JW
R583	032-0221-62	1/16W 8.2k ohm F
R584	032-0221-74	1/16W 10k ohm 1%
R588	032-0221-62	1/16W 8.2k ohm F
R589	033-3301-15	1/16W 33 ohm J
R590	033-3301-15	1/16W 33 ohm J
R592	033-0000-05	1/16W 0 ohm
R593	033-0000-05	1/16W 0 ohm
R594	033-0000-05	1/16W 0 ohm
R595	117-3301-15	1/8W 33 ohm
R596	117-3301-15	1/8W 33 ohm
R597	117-3301-15	1/8W 33 ohm
R598	117-3301-15	1/8W 33 ohm
R599	117-3301-15	1/8W 33 ohm
R600	117-3301-15	1/8W 33 ohm
R601	117-3301-15	1/8W 33 ohm
R602	117-3301-15	1/8W 33 ohm
R607	032-0210-58	1/10W 12k ohm F
R608	032-0210-58	1/10W 12k ohm F
R609	032-0210-58	1/10W 12k ohm F
R610	032-0210-58	1/10W 12k ohm F
R611	032-0210-58	1/10W 12k ohm F
R612	032-0210-58	1/10W 12k ohm F
R613	032-0210-58	1/10W 12k ohm F
R614	032-0210-58	1/10W 12k ohm F

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R615	032-0210-10	1/10W 13k ohm	R1018	033-2221-15	1/16W 2.2k ohm J	R1368	033-0000-05	1/16W 0 ohm
R616	032-0210-10	1/10W 13k ohm	R1019	032-0221-74	1/16W 10k ohm 1%	R1369	033-0000-05	1/16W 0 ohm
R617	032-0210-10	1/10W 13k ohm	R1020	032-0221-74	1/16W 10k ohm 1%	R1370	033-0000-05	1/16W 0 ohm
R618	032-0210-10	1/10W 13k ohm	R1021	032-0221-08	1/16W 1k ohm F	R1371	033-0000-05	1/16W 0 ohm
R619	117-1011-15	1/8W 100 ohm	R1022	032-0221-08	1/16W 1k ohm F	R1373	032-0225-58	1/16W 20k ohm +/- 0.5%
R621	117-1011-15	1/8W 100 ohm	R1023	119-1001-15	1/10W 10 ohm	R1374	033-0000-05	1/16W 0 ohm
R623	117-1011-15	1/8W 100 ohm	R1024	033-0000-05	1/16W 0 ohm	R1375	032-0221-75	1/16W 47k ohm F
R625	117-1011-15	1/8W 100 ohm	R1025	033-0000-05	1/16W 0 ohm	R1376	033-0000-05	1/16W 0 ohm
R631	033-0000-05	1/16W 0 ohm	R1026	032-0221-74	1/16W 10k ohm 1%	R1377	032-0221-07	1/16W 56k ohm F
R641	033-3321-15	1/16W 3.3k ohm J	R1027	032-0221-74	1/16W 10k ohm 1%	R1378	033-0000-05	1/16W 0 ohm
R642	117-2211-15	1/8W 220 ohm	R1028	033-0000-05	1/16W 0 ohm	R1379	033-0000-05	1/16W 0 ohm
R646	119-0000-05	1/10W 0 ohm JW	R1029	033-0000-05	1/16W 0 ohm	R1380	033-0000-05	1/16W 0 ohm
R648	032-0221-74	1/16W 10k ohm 1%	R1030	033-0000-05	1/16W 0 ohm	R1381	033-0000-05	1/16W 0 ohm
R649	032-0210-55	1/10W 2.2k ohm F	R1031	033-0000-05	1/16W 0 ohm	R1382	033-0000-05	1/16W 0 ohm
R650	119-1021-15	1/10W 1k ohm	R1032	033-0000-05	1/16W 0 ohm	R1384	032-0225-58	1/16W 20k ohm +/- 0.5%
R651	119-1021-15	1/10W 1k ohm	R1033	033-0000-05	1/16W 0 ohm	R1385	032-0221-10	1/16W 15k ohm F
R652	119-1021-15	1/10W 1k ohm	R1034	033-0000-05	1/16W 0 ohm	R1386	032-0221-06	1/16W 100k ohm F
R653	119-1021-15	1/10W 1k ohm	R1035	119-1021-15	1/10W 1k ohm	R1388	032-0248-51	3/4W 20m ohm F
R654	117-3301-15	1/8W 33 ohm	R1118	033-3301-15	1/16W 33 ohm J	R1389	032-0248-51	3/4W 20m ohm F
R655	117-3301-15	1/8W 33 ohm	R1119	032-0221-74	1/16W 10k ohm 1%	R1390	119-0000-05	1/10W 0 ohm JW
R656	117-3301-15	1/8W 33 ohm	R1120	032-0221-74	1/16W 10k ohm 1%	R1393	032-0221-51	1/16W 4.7k ohm F
R657	117-3301-15	1/8W 33 ohm	R1121	032-0225-87	1/16W 75 ohm +/- 0.5%	R1394	033-2221-15	1/16W 2.2k ohm J
R703	116-1011-15	1/4W 100 ohm	R1122	032-0221-99	1/16W 100 ohm 1%	R1395	032-0221-74	1/16W 10k ohm 1%
R704	116-1011-15	1/4W 100 ohm	R1124	033-3301-15	1/16W 33 ohm J	R1396	032-0221-74	1/16W 10k ohm 1%
R705	116-6801-15	1/4W 68 ohm	R1126	032-0221-74	1/16W 10k ohm 1%	R1397	032-0221-99	1/16W 100 ohm 1%
R706	032-0221-74	1/16W 10k ohm 1%	R1127	032-0221-74	1/16W 10k ohm 1%	R1398	033-0000-05	1/16W 0 ohm
R707	032-0221-74	1/16W 10k ohm 1%	R1128	032-0225-87	1/16W 75 ohm +/- 0.5%	R1399	033-0000-05	1/16W 0 ohm
R708	032-0175-07	1/4W 120 ohm J	R1213	032-0140-80	1/10W 18k ohm F	R2001	032-0221-75	1/16W 47k ohm F
R717	116-4731-15	1/4W 47k ohm	R1214	032-0210-58	1/10W 12k ohm F	R2002	032-0221-75	1/16W 47k ohm F
R718	116-4731-15	1/4W 47k ohm	R1228	116-5621-15	1/4W 5.6k ohm	R2101	032-0221-08	1/16W 1k ohm F
R723	032-0175-05	1/4W 47k ohm J	R1229	032-0175-04	1/4W 4.7k ohm J	R2107	032-0221-75	1/16W 47k ohm F
R724	032-0175-05	1/4W 47k ohm J	R1230	033-3301-15	1/16W 33 ohm J	R2108	033-0000-05	1/16W 0 ohm
R725	032-0175-05	1/4W 47k ohm J	R1231	032-0209-50	1/4W 82 ohm D	R2126	032-0221-74	1/16W 10k ohm 1%
R726	032-0175-05	1/4W 47k ohm J	R1232	032-0209-50	1/4W 82 ohm D	R2127	032-0221-51	1/16W 4.7k ohm F
R727	116-5111-15	1/4W 510 ohm	R1236	032-0221-72	1/16W 470 ohm F	R2128	032-0221-51	1/16W 4.7k ohm F
R728	116-5111-15	1/4W 510 ohm	R1237	032-0221-72	1/16W 470 ohm F	R2129	033-3301-15	1/16W 33 ohm J
R729	116-5111-15	1/4W 510 ohm	R1238	033-3931-15	1/16W 39k ohm J	R2130	032-0221-75	1/16W 47k ohm F
R730	116-5111-15	1/4W 510 ohm	R1239	032-0210-90	1/10W 100k ohm F	R2132	032-0221-75	1/16W 47k ohm F
R731	033-0000-05	1/16W 0 ohm	R1240	032-0221-10	1/16W 15k ohm F	R2133	033-3301-15	1/16W 33 ohm J
R801	116-0000-05	1/4W 0 ohm JW	R1241	119-1541-15	1/10W 150k ohm	R2134	033-3301-15	1/16W 33 ohm J
R802	119-0000-05	1/10W 0 ohm JW	R1242	032-0221-08	1/16W 1k ohm F	R2135	032-0221-74	1/16W 10k ohm 1%
R803	119-0000-05	1/10W 0 ohm JW	R1243	032-0221-08	1/16W 1k ohm F	R2138	033-3301-15	1/16W 33 ohm J
R804	033-0000-05	1/16W 0 ohm	R1244	032-0221-09	1/16W 33k ohm F	R2139	033-3301-15	1/16W 33 ohm J
R805	033-0000-05	1/16W 0 ohm	R1250	032-0221-51	1/16W 4.7k ohm F	R2140	032-0221-74	1/16W 10k ohm 1%
R806	033-0000-05	1/16W 0 ohm	R1253	032-0140-80	1/10W 18k ohm F	R2142	032-0221-74	1/16W 10k ohm 1%
R807	119-0000-05	1/10W 0 ohm JW	R1254	032-0210-58	1/10W 12k ohm F	R2143	032-0221-74	1/16W 10k ohm 1%
R808	032-0221-51	1/16W 4.7k ohm F	R1255	117-0000-05	1/8W 0 ohm JW	R2144	032-0221-75	1/16W 47k ohm F
R809	032-0221-56	1/16W 22k ohm F	R1301	032-0221-99	1/16W 100 ohm 1%	R2146	032-0221-75	1/16W 47k ohm F
R810	032-0221-95	1/16W 2.7k ohm F	R1302	119-0000-05	1/10W 0 ohm JW	R2147	032-0221-75	1/16W 47k ohm F
R811	033-0000-05	1/16W 0 ohm	R1303	032-0221-93	1/16W 470k ohm F	R2148	032-0221-74	1/16W 10k ohm 1%
R901	032-0210-55	1/10W 2.2k ohm F	R1304	032-0221-06	1/16W 100k ohm F	R2151	033-0000-05	1/16W 0 ohm
R902	032-0221-74	1/16W 10k ohm 1%	R1305	033-0000-05	1/16W 0 ohm	R2155	033-0000-05	1/16W 0 ohm
R903	032-0221-74	1/16W 10k ohm 1%	R1308	032-0221-99	1/16W 100 ohm 1%	R2157	033-0000-05	1/16W 0 ohm
R904	032-0221-74	1/16W 10k ohm 1%	R1321	032-0221-93	1/16W 470k ohm F	R2158	033-0000-05	1/16W 0 ohm
R905	032-0221-74	1/16W 10k ohm 1%	R1324	032-0221-34	1/16W 51k ohm F	R2161	033-0000-05	1/16W 0 ohm
R906	032-0221-74	1/16W 10k ohm 1%	R1325	032-0140-95	1/10W 20k ohm F	R2162	033-0000-05	1/16W 0 ohm
R907	119-2421-15	1/10W 2.4k ohm	R1326	032-0221-74	1/16W 10k ohm 1%	R2163	033-0000-05	1/16W 0 ohm
R915	033-0000-05	1/16W 0 ohm	R1327	032-0221-99	1/16W 100 ohm 1%	R2164	033-0000-05	1/16W 0 ohm
R916	033-0000-05	1/16W 0 ohm	R1330	032-0221-11	1/16W 5.6k ohm F	R2165	033-0000-05	1/16W 0 ohm
R923	119-0000-05	1/10W 0 ohm JW	R1331	032-0210-55	1/10W 2.2k ohm F	R2166	033-0000-05	1/16W 0 ohm
R924	119-0000-05	1/10W 0 ohm JW	R1347	032-0221-61	1/16W 68k ohm F	R2167	032-0221-74	1/16W 10k ohm 1%
R926	033-0000-05	1/16W 0 ohm	R1348	032-0221-61	1/16W 6.8k ohm F	R2168	032-0221-75	1/16W 47k ohm F
R927	033-0000-05	1/16W 0 ohm	R1349	032-0221-61	1/16W 6.8k ohm F	R2169	032-0221-75	1/16W 47k ohm F
R928	033-0000-05	1/16W 0 ohm	R1358	032-0221-50	1/16W 43k ohm F	R2170	032-0221-75	1/16W 47k ohm F
R929	033-0000-05	1/16W 0 ohm	R1359	033-0000-05	1/16W 0 ohm	R2171	032-0221-75	1/16W 47k ohm F
R930	033-0000-05	1/16W 0 ohm	R1360	032-0210-06	1/10W 8.2k ohm F	R2172	032-0221-75	1/16W 47k ohm F
R931	033-0000-05	1/16W 0 ohm	R1361	032-0221-56	1/16W 22k ohm F	R2173	032-0221-75	1/16W 47k ohm F
R932	033-0000-05	1/16W 0 ohm	R1362	032-0225-54	1/16W 75k ohm +/- 0.5%	R2174	032-0221-75	1/16W 47k ohm F
R933	033-0000-05	1/16W 0 ohm	R1363	032-0221-74	1/16W 10k ohm 1%	R2175	033-0000-05	1/16W 0 ohm
R938	033-0000-05	1/16W 0 ohm	R1365	033-0000-05	1/16W 0 ohm	R2176	033-0000-05	1/16W 0 ohm
R939	033-0000-05	1/16W 0 ohm	R1366	033-0000-05	1/16W 0 ohm	R2178	033-0000-05	1/16W 0 ohm
R940	033-0000-05	1/16W 0 ohm				R2179	033-0000-05	1/16W 0 ohm
R941	033-0000-05	1/16W 0 ohm						
R1017	032-0221-51	1/16W 4.7k ohm F						

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R2180	033-1511-15	1/16W 150 ohm J	RN302	050-0156-59	1/16W 33 ohm x4	X301	061-3588-90	12.288MHz
R2181	032-0221-75	1/16W 47k ohm F	RN501	050-0156-59	1/16W 33 ohm x4	ZD401	060-8107-50	SURGE
R2182	033-0000-05	1/16W 0 ohm	RN901	050-0156-53	1/16W 0 ohm x4			PROTECTOR
R2184	033-2221-15	1/16W 2.2k ohm J	RN902	050-0156-53	1/16W 0 ohm x4	ZD402	060-8078-00	EZAEG3A50AV
R2185	032-0221-72	1/16W 470 ohm F	RN903	050-0156-53	1/16W 0 ohm x4	ZD501	001-4305-19	UDZSTE-17 5.1B
R2186	032-0221-75	1/16W 47k ohm F	RN1001	050-0156-52	1/16W 100 ohm x4	ZD601	001-4305-19	UDZSTE-17 5.1B
R2187	032-0221-08	1/16W 1k ohm F	RN1002	050-0156-52	1/16W 100 ohm x4	ZD701	001-0529-35	MA8062-M
RN104	050-0156-59	1/16W 33 ohm x4	RN1003	050-0156-52	1/16W 100 ohm x4	ZD702	001-0529-35	MA8062-M
RN106	050-0156-52	1/16W 100 ohm x4	T401	010-4100-50	0.215uH	ZD703	001-4305-32	UDZSTE-17 18B
RN107	050-0156-59	1/16W 33 ohm x4	TH101	002-0315-00	TN10-3U153JT	ZD901	001-0529-26	MA8047-M
RN108	050-0156-56	1/16W 4.7k ohm x4	TH1201	002-0328-90	miniSMDC050F-2	ZD903	001-0529-47	MA8091-M
RN109	050-0156-52	1/16W 100 ohm x4	TH1202	002-0328-90	miniSMDC050F-2	ZD1201	001-4912-90	SM5S22A-HE3/2D
RN110	050-0156-52	1/16W 100 ohm x4	VR1201	001-9213-50	EZJZ1V270EA	ZD1301	001-0529-32	MA8056-M
RN201	050-0156-59	1/16W 33 ohm x4	VR1202	001-9213-50	EZJZ1V270EA	PWB	039-4409-01	PWB(WITHOUT COMPONENTS)
RN202	050-0156-59	1/16W 33 ohm x4	VR1203	001-9213-50	EZJZ1V270EA			
RN203	050-0156-59	1/16W 33 ohm x4	X101	061-3614-90	NX3225GA 12.8M			
RN301	050-0156-59	1/16W 33 ohm x4	X201	061-3589-90	41.6MHz			

CPU PWB(B3) section : for QY-5091H-A

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C101	045-1011-50	100pF J CH	C183	043-6400-90	16V 4.7uF K	C334	046-1042-78	0.1uF K B
C102	046-1032-78	0.01uF K B	C184	043-6400-90	16V 4.7uF K	C335	046-1042-78	0.1uF K B
C103	046-1032-78	0.01uF K B	C185	043-6400-90	16V 4.7uF K	C336	046-1042-78	0.1uF K B
C104	046-1032-78	0.01uF K B	C186	046-1042-78	0.1uF K B	C337	046-1042-78	0.1uF K B
C109	046-1042-78	0.1uF K B	C187	046-1042-78	0.1uF K B	C338	046-1042-78	0.1uF K B
C110	046-1042-78	0.1uF K B	C188	046-1042-78	0.1uF K B	C339	046-1042-78	0.1uF K B
C111	046-1042-78	0.1uF K B	C189	046-1042-78	0.1uF K B	C340	043-0603-90	16V 10uF
C112	046-1042-78	0.1uF K B	C190	046-1042-78	0.1uF K B	C341	043-0603-90	16V 10uF
C113	046-1042-78	0.1uF K B	C191	046-1042-78	0.1uF K B	C342	046-1042-78	0.1uF K B
C115	046-1042-78	0.1uF K B	C192	046-1042-78	0.1uF K B	C343	046-1042-78	0.1uF K B
C117	046-1042-78	0.1uF K B	C193	046-1042-78	0.1uF K B	C344	046-1042-78	0.1uF K B
C120	046-1042-78	0.1uF K B	C194	046-1042-78	0.1uF K B	C345	043-0603-90	16V 10uF
C121	046-1042-78	0.1uF K B	C195	046-1042-78	0.1uF K B	C346	046-1042-78	0.1uF K B
C122	046-1042-78	0.1uF K B	C196	046-1042-78	0.1uF K B	C347	043-0603-90	16V 10uF
C123	046-1042-78	0.1uF K B	C197	168-1062-98	10uF K	C348	043-0603-90	16V 10uF
C126	046-1042-78	0.1uF K B	C198	043-7200-90	6.3V 47uF	C349	043-4200-90	6.3V 2.2uF
C129	046-1042-78	0.1uF K B	C201	046-1042-78	0.1uF K B	C350	043-4200-90	6.3V 2.2uF
C130	046-1042-78	0.1uF K B	C202	046-1042-78	0.1uF K B	C351	043-4200-90	6.3V 2.2uF
C131	046-1042-78	0.1uF K B	C203	046-1042-78	0.1uF K B	C352	043-4200-90	6.3V 2.2uF
C132	046-1042-78	0.1uF K B	C204	045-1011-50	100pF J CH	C353	043-4200-90	6.3V 2.2uF
C133	046-1042-78	0.1uF K B	C205	045-1011-50	100pF J CH	C354	043-4200-90	6.3V 2.2uF
C134	046-1042-78	0.1uF K B	C301	046-1042-78	0.1uF K B	C355	046-1042-78	0.1uF K B
C135	046-1042-78	0.1uF K B	C302	046-1042-78	0.1uF K B	C356	046-1032-78	0.01uF K B
C136	046-1042-78	0.1uF K B	C303	046-1032-78	0.01uF K B	C357	046-1042-78	0.1uF K B
C137	046-1042-78	0.1uF K B	C304	046-1042-78	0.1uF K B	C358	043-4200-90	6.3V 2.2uF
C140	046-1042-78	0.1uF K B	C305	168-1062-98	10uF K	C359	046-1042-78	0.1uF K B
C142	046-1042-78	0.1uF K B	C306	046-1042-78	0.1uF K B	C360	046-1032-78	0.01uF K B
C144	046-1042-78	0.1uF K B	C307	046-1032-78	0.01uF K B	C361	046-1042-78	0.1uF K B
C145	046-1042-78	0.1uF K B	C308	046-1042-78	0.1uF K B	C362	043-0603-90	16V 10uF
C146	046-1042-78	0.1uF K B	C309	046-1042-78	0.1uF K B	C363	043-0603-90	16V 10uF
C148	046-1042-78	0.1uF K B	C310	046-1042-78	0.1uF K B	C365	043-4200-90	6.3V 2.2uF
C150	046-1042-78	0.1uF K B	C311	046-1042-78	0.1uF K B	C367	043-4200-90	6.3V 2.2uF
C153	046-1042-78	0.1uF K B	C312	046-1042-78	0.1uF K B	C368	043-4200-90	6.3V 2.2uF
C154	046-1042-78	0.1uF K B	C313	043-4200-90	6.3V 2.2uF	C369	043-4200-90	6.3V 2.2uF
C161	046-1042-78	0.1uF K B	C314	043-4200-90	6.3V 2.2uF	C372	046-1042-78	0.1uF K B
C162	046-1042-78	0.1uF K B	C315	043-4200-90	6.3V 2.2uF	C373	046-1042-78	0.1uF K B
C163	046-1042-78	0.1uF K B	C316	043-4200-90	6.3V 2.2uF	C374	046-1042-78	0.1uF K B
C166	046-1042-78	0.1uF K B	C317	043-4200-90	6.3V 2.2uF	C375	043-0603-90	16V 10uF
C167	046-1042-78	0.1uF K B	C318	043-4200-90	6.3V 2.2uF	C376	046-1042-78	0.1uF K B
C168	046-1042-78	0.1uF K B	C319	043-4200-90	6.3V 2.2uF	C377	046-1042-78	0.1uF K B
C169	046-1042-78	0.1uF K B	C320	043-4200-90	6.3V 2.2uF	C378	046-1042-78	0.1uF K B
C170	046-1042-78	0.1uF K B	C321	046-1042-78	0.1uF K B	C379	046-1042-78	0.1uF K B
C171	046-1042-78	0.1uF K B	C322	043-7201-90	6.3V 100uF	C380	042-4035-91	6.3V 100uF
C172	046-1042-78	0.1uF K B	C323	043-7201-90	6.3V 100uF	C381	046-1042-78	0.1uF K B
C173	046-1042-78	0.1uF K B	C324	043-7201-90	6.3V 100uF	C382	046-1042-78	0.1uF K B
C174	046-1042-78	0.1uF K B	C325	043-7201-90	6.3V 100uF	C383	046-1042-78	0.1uF K B
C175	046-1042-78	0.1uF K B	C326	043-7201-90	6.3V 100uF	C401	046-1042-78	0.1uF K B
C176	046-1042-78	0.1uF K B	C327	046-1042-78	0.1uF K B	C402	045-1096-50	1pF 50V
C177	046-1042-78	0.1uF K B	C328	046-1042-78	0.1uF K B	C403	046-1042-78	0.1uF K B
C178	046-1042-78	0.1uF K B	C329	046-1042-78	0.1uF K B	C405	046-1042-78	0.1uF K B
C179	046-1042-78	0.1uF K B	C330	046-1042-78	0.1uF K B	C406	046-1042-78	0.1uF K B
C180	046-1042-78	0.1uF K B	C331	046-1042-78	0.1uF K B	C408	046-1032-78	0.01uF K B
C181	046-1042-78	0.1uF K B	C332	046-1042-78	0.1uF K B	C418	046-1032-78	0.01uF K B
C182	043-6400-90	16V 4.7uF K	C333	046-1042-78	0.1uF K B	C420	043-4306-90	1uF

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C422	165-4763-15	6.3V 47uF	C743	046-1022-58	50V 1000pF	C1008	043-0603-90	16V 10uF
C423	165-4763-15	6.3V 47uF	C748	043-4306-90	1uF	C1009	168-4742-78	0.47uF K
C501	046-1032-78	0.01uF K B	C749	043-4306-90	1uF	C1011	043-0605-90	10V 2.2uF
C502	178-1062-88	10uF	C750	043-4306-90	1uF	C1014	165-4763-15	6.3V 47uF
C504	046-1032-78	0.01uF K B	C751	043-4306-90	1uF	C1113	043-4402-90	16V 1uF
C505	046-1042-78	0.1uF K B	C801	ADZ0265	35V 47uF	C1115	178-1062-88	10uF
C506	043-0570-90	16V 2.2uF K	C802	043-0576-90	50V 10uF	C1201	168-3312-55	330pF K
C507	046-1042-78	0.1uF K B	C803	043-6705-90	50V 1uF	C1204	166-1011-50	100pF CH
C508	046-1042-78	0.1uF K B	C804	045-1011-50	100pFJ CH	C1212	168-1042-38	50V 0.1uF K
C509	043-0570-90	16V 2.2uF K	C805	043-0570-90	16V 2.2uF K	C1213	168-1042-38	50V 0.1uF K
C510	046-1042-78	0.1uF K B	C806	043-0574-90	25V 1.0uF	C1214	043-5600-90	0.10uF
C511	046-1042-78	0.1uF K B	C807	043-0574-90	25V 1.0uF	C1215	046-1032-78	0.01uF K B
C512	046-1042-78	0.1uF K B	C808	043-0576-90	50V 10uF	C1216	046-1042-78	0.1uF K B
C513	046-1042-78	0.1uF K B	C809	043-5709-90	50V 1uF K	C1218	046-1042-78	0.1uF K B
C514	046-1042-78	0.1uF K B	C810	046-3332-78	0.033uF K B	C1219	168-3322-55	3300pF K
C515	046-1042-78	0.1uF K B	C811	043-7504-90	22uF	C1224	046-1032-78	0.01uF K B
C516	046-1042-78	0.1uF K B	C812	045-3311-50	330pFJ CH	C1225	043-4402-90	16V 1uF
C517	043-0570-90	16V 2.2uF K	C813	043-0604-90	25V 10uF B	C1226	043-0603-90	16V 10uF
C518	046-1042-78	0.1uF K B	C814	168-4732-58	50V 0.047uF K	C1227	043-5709-90	50V 1uF K
C519	168-1052-78	16V 1uF K	C815	046-3332-78	0.033uF K B	C1228	046-1042-78	0.1uF K B
C520	168-1052-78	16V 1uF K	C816	043-0603-90	16V 10uF	C1230	168-3312-55	330pF K
C521	043-7402-90	16V 22uF	C817	043-0603-90	16V 10uF	C1231	168-2222-55	2200pF K
C522	043-7402-90	16V 22uF	C818	043-6705-90	50V 1uF	C1232	166-3311-50	330pF CH
C523	043-0570-90	16V 2.2uF K	C821	168-2232-55	0.022uF K	C1233	166-3311-50	330pF CH
C524	043-0570-90	16V 2.2uF K	C822	046-6832-78	0.068uF K B	C1234	166-3311-50	330pF CH
C525	043-0570-90	16V 2.2uF K	C823	168-4732-58	50V 0.047uF K	C1303	043-7402-90	16V 22uF
C526	043-0570-90	16V 2.2uF K	C824	AAZ0261	25V 1uF	C1304	046-4722-38	50V 4700pF
C527	043-0570-90	16V 2.2uF K	C825	043-0604-90	25V 10uF B	C1310	043-7402-90	16V 22uF
C528	043-0570-90	16V 2.2uF K	C826	046-4732-78	0.047uF K B	C1311	046-4722-38	50V 4700pF
C529	043-0570-90	16V 2.2uF K	C827	046-1042-78	0.1uF K B	C1312	166-6097-50	6pF +/-0.5pF CH
C530	045-1801-50	18pFJ CH	C829	043-5709-90	50V 1uF K	C1313	166-6097-50	6pF +/-0.5pF CH
C601	046-1042-78	0.1uF K B	C830	043-5709-90	50V 1uF K	C1314	043-0563-90	16V 47uF
C602	045-2201-50	22pFJ CH	C833	045-1011-50	100pFJ CH	C1350	166-6097-50	6pF +/-0.5pF CH
C603	043-7300-90	10V 47uF	C834	045-1011-50	100pFJ CH	C1351	166-6097-50	6pF +/-0.5pF CH
C604	046-1042-78	0.1uF K B	C838	ADZ0265	35V 47uF	C1352	043-0563-90	16V 47uF
C628	046-1042-78	0.1uF K B	C842	043-5709-90	50V 1uF K	C1355	046-1042-78	0.1uF K B
C635	043-4306-90	1uF	C843	045-1011-50	100pFJ CH	C1356	046-1042-78	0.1uF K B
C636	046-1042-78	0.1uF K B	C846	ADZ0265	35V 47uF	C1357	046-1042-78	0.1uF K B
C637	043-6400-90	16V 4.7uF K	C847	ADZ0265	35V 47uF	C1358	046-1042-78	0.1uF K B
C646	045-1007-50	10 +/-0.5pF CH	C848	045-1011-50	100pFJ CH	C1360	168-1052-78	16V 1uF K
C647	043-4306-90	1uF	C849	168-1022-55	1000pF K	C1361	043-0603-90	16V 10uF
C648	043-4306-90	1uF	C850	168-1042-38	50V 0.1uF K	C1401	168-3322-55	3300pF K
C651	043-4306-90	1uF	C851	168-1042-38	50V 0.1uF K	C1402	168-3322-55	3300pF K
C652	043-0605-90	10V 2.2uF	C852	168-1042-38	50V 0.1uF K	C1403	168-3322-55	3300pF K
C653	043-4306-90	1uF	C853	046-1042-78	0.1uF K B	C1404	046-1042-78	0.1uF K B
C654	043-4306-90	1uF	C854	ADZ0265	35V 47uF	C1501	043-7402-90	16V 22uF
C655	043-0602-90	10uF	C895	046-1022-58	50V 1000pF	C1502	168-1052-78	16V 1uF K
C658	043-4306-90	1uF	C896	043-5709-90	50V 1uF K	C1503	043-7200-90	6.3V 47uF
C659	043-4306-90	1uF	C897	043-5709-90	50V 1uF K	C1506	046-1022-58	50V 1000pF
C660	043-0602-90	10uF	C898	043-5709-90	50V 1uF K	C1507	046-4732-78	0.047uF K B
C661	166-3096-50	3pF +/-0.25pF CK	C901	046-1042-78	0.1uF K B	C1508	045-1007-50	10 +/-0.5pF CH
C662	045-4701-50	47pF CH	C904	043-0604-90	25V 10uF B	C1509	046-1042-78	0.1uF K B
C663	043-4700-95	50V 33pF	C905	165-2263-55	35V 22uF	C1510	043-7402-90	16V 22uF
C705	168-3332-78	0.033uF K	C906	168-1042-38	50V 0.1uF K	C1511	168-1052-78	16V 1uF K
C711	043-4402-90	16V 1uF	C907	043-4402-90	16V 1uF	C1512	043-0559-90	6.3V 22uF
C713	165-2263-15	6.3V 22uF	C908	165-2263-15	6.3V 22uF	C1513	043-0559-90	6.3V 22uF
C714	043-4306-90	1uF	C909	046-1042-78	0.1uF K B	C1515	046-1022-58	50V 1000pF
C716	043-4402-90	16V 1uF	C910	046-1022-58	50V 1000pF	C1516	046-4732-78	0.047uF K B
C717	165-2263-15	6.3V 22uF	C911	043-0604-90	25V 10uF B	C1517	045-1007-50	10 +/-0.5pF CH
C718	165-2263-15	6.3V 22uF	C912	046-1022-58	50V 1000pF	C1518	046-1042-78	0.1uF K B
C719	043-4402-90	16V 1uF	C913	043-0604-90	25V 10uF B	C1523	043-0574-90	25V 1.0uF
C722	043-4306-90	1uF	C914	046-2232-78	0.022uF K B	C1525	168-1052-78	16V 1uF K
C723	046-1042-78	0.1uF K B	C915	046-2232-78	0.022uF K B	C1527	168-1052-78	16V 1uF K
C724	046-1042-78	0.1uF K B	C916	168-2232-55	0.022uF K	C1528	046-1022-58	50V 1000pF
C725	046-1042-78	0.1uF K B	C917	AAZ0261	25V 1uF	C1529	168-1052-78	16V 1uF K
C726	046-1042-78	0.1uF K B	C918	043-0605-90	10V 2.2uF	C1530	168-1052-78	16V 1uF K
C727	046-1042-78	0.1uF K B	C919	043-0570-90	16V 2.2uF K	C1532	168-1052-78	16V 1uF K
C728	046-1042-78	0.1uF K B	C920	168-1052-78	16V 1uF K	C1534	168-1052-78	16V 1uF K
C729	046-1042-78	0.1uF K B	C921	168-2242-58	0.22uF K	C1535	043-0559-90	6.3V 22uF
C730	046-1042-78	0.1uF K B	C1003	046-1042-78	0.1uF K B	C1539	168-1062-98	10uF K
C731	168-3332-78	0.033uF K	C1004	043-0605-90	10V 2.2uF	C1541	168-1062-98	10uF K
C732	043-4306-90	1uF	C1005	043-0603-90	16V 10uF	C1542	046-1042-78	0.1uF K B
C735	043-4306-90	1uF	C1006	046-1042-78	0.1uF K B	C1543	165-1073-35	16V 100uF
C736	168-3332-78	0.033uF K	C1007	046-1042-78	0.1uF K B	C1544	046-1032-78	0.01uF K B

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C1545	046-1032-78	0.01uF K B	IC201	051-5488-90	NJU7707F03A1-TE2	IC1511	-----	TLV62065TDSG RQ1
C1546	168-1052-78	16V 1uF K	IC202	051-7547-90	SN74LVC1G07D CKR			(Step Down Converter)
C1547	168-1052-78	16V 1uF K	IC203	051-7547-90	SN74LVC1G07D CKR			(SON Package)
C1549	043-6400-90	16V 4.7uF K	IC401	051-6934-90	MF1341S2313	J401	074-2255-09	FH33-9S-0.5SH 9P
C1550	046-1042-78	0.1uF K B	IC402	051-6226-70	CY25404ZXI-301T	J402	074-2255-09	FH33-9S-0.5SH 9P
C1551	043-0603-90	16V 10uF	IC501	-----	MTFC4GLGDQ-AIT Z(EMMC)(BGA) (985320-051)	J501	074-8017-91	16P
C1552	043-6400-90	16V 4.7uF K				J902	074-2248-50	50P
C1553	046-1042-78	0.1uF K B	IC603	060-8166-90	XV4001KC	J1001	074-2248-80	80P
C1554	043-7200-90	6.3V 47uF	IC606	051-6945-90	NCP380HSNAJA AT1G	J1002	074-2248-40	SOCKET(40P)
C1555	043-0570-90	16V 2.2uF K	IC607	-----	UBX-G7020-KT -C1010A	J1003	074-2248-60	60P
C1558	165-1073-35	16V 100uF				J1201	074-4017-24	24P
C1559	042-4046-92	35V 100uF				J1301	074-4099-00	MX49004HQ1
C1567	046-1042-78	0.1uF K B				J1304	074-4099-30	5P
C1568	043-0603-90	16V 10uF	IC703	051-6479-00	AK8858VQ	L301	BMZ0211	BLM18PG121SN 1D
C1569	178-1062-88	10uF	IC801	-----	OZ528ILN-B1 -0-TR	L302	BMZ0211	BLM18PG121SN 1D
C1570	045-2201-50	22pFJ CH				L303	BMZ0211	BLM18PG121SN 1D
C1571	165-4763-35	16V 47uF				L304	BMZ0211	BLM18PG121SN 1D
C1573	165-4763-35	16V 47uF	IC802	-----	BD9465MUV-ME2 (LED driver) (QFN) (611690-051)	L305	BMZ0211	BLM18PG121SN 1D
C1575	165-4763-15	6.3V 47uF				L306	BMZ0211	BLM18PG121SN 1D
C1576	046-1042-78	0.1uF K B	IC803	051-7221-48	TC7SZ04FU	L307	BMZ0211	BLM18PG121SN 1D
C1577	046-1042-78	0.1uF K B	IC804	-----	BD00D0AWHFP-TR	L401	BMZ0211	BLM18PG121SN 1D
C1578	165-4763-15	6.3V 47uF				L402	BMZ0211	BLM18PG121SN 1D
C1579	046-1042-78	0.1uF K B				L501	BMZ0211	BLM18PG121SN 1D
C1580	165-4763-15	6.3V 47uF	IC901	051-7202-90	MC74VHC1G32D FT2G	L502	BMZ0211	BLM18PG121SN 1D
C1582	165-2263-35	16V 22uF	IC902	051-3079-90	NJM2742V	L605	BMZ0221	BLM15AG601SN 1D
C1585	043-4306-90	1uF	IC903	051-7222-60	MC74VHC1G08D FT2G	L606	010-3101-66	MLK1005S22NJT
C1586	043-4306-90	1uF	IC1001	051-6718-90	AK5357VT-E2	L608	BMZ0211	BLM18PG121SN 1D
C1587	043-4306-90	1uF	IC1202	051-7281-60	MC74VHC1G14D FT2G	L610	010-3113-90	1k ohm/100MHz
C1589	045-1011-50	100pFJ CH	IC1203	051-3407-90	TA75S393F	L611	010-3127-91	220 ohm/100MHz
C1590	045-1011-50	100pFJ CH	IC1204	051-6663-80	TJA1042T/3,118	L612	010-3101-61	8.2nH
C1591	046-1022-58	50V 1000pF	IC1205	051-7262-48	TC7WH14FU-TE12L,F	L701	010-3163-50	BLM18PG471SH 1D
C1592	043-7300-90	10V 47uF	IC1302	051-3776-90	NJM2815GM1-51A	L702	010-3163-50	BLM18PG471SH 1D
C1612	165-4763-15	6.3V 47uF	IC1304	051-3776-70	NJM2816GM1-51A(TE2)	L703	010-3163-50	BLM18PG471SH 1D
C3811	043-5709-90	50V 1uF K	IC1306	-----	TPS2546QRTER Q1	L801	010-3057-92	47uH 620mA
C3815	042-4059-90	35V 100uF				L802	010-3514-90	15uH M
D602	001-2630-90	1SS420-TPL3,F	IC1401	051-7563-90	NLV27WZ16DFT 2G	L803	010-3057-92	47uH 620mA
D801	001-2620-90	RB060L-40	IC1501	051-3785-90	BD35395FJ-ME2	L804	010-3057-92	47uH 620mA
D802	001-2620-90	RB060L-40	IC1502	-----	SC187ULTRT (Thermal pad) (363690-051)	L805	010-3550-50	33uH
D803	001-2620-90	RB060L-40				L806	010-3550-50	33uH
D804	001-2630-90	1SS420-TPL3,F	IC1503	-----	SC187ULTRT (Thermal pad) (363690-051)	L901	010-3127-91	220 ohm/100MHz
D805	001-2630-90	1SS420-TPL3,F	IC1504	051-3707-80	S-1133B00-U5T1U	L903	010-3127-91	220 ohm/100MHz
D806	001-2660-90	RB050L-60DDTE25	IC1505	-----	SC183CULTRT (PAD) (358800-051)	L904	010-3127-91	220 ohm/100MHz
D1001	001-2630-90	1SS420-TPL3,F				L905	010-3100-56	0.33uH J
D1002	001-2630-90	1SS420-TPL3,F	IC1506	051-3774-90	NJM11100F1	L1001	BMZ0211	BLM18PG121SN 1D
D1003	001-2630-90	1SS420-TPL3,F	IC1507	051-3761-90	BD00HC0EEFJ-ME2	L1002	BMZ0211	BLM18PG121SN 1D
D1203	001-0516-90	MA111	IC1508	051-3774-90	NJM11100F1	L1003	010-3127-91	220 ohm/100MHz
D1204	001-2412-90	RR264M-400				L1004	BMZ0211	BLM18PG121SN 1D
D1205	001-2412-90	RR264M-400				L1005	010-3114-53	MMZ1005S601CT
D1206	001-2403-90	M1F60				L1006	010-3114-53	MMZ1005S601CT
D1211	001-2630-90	1SS420-TPL3,F				L1007	010-3104-54	600 ohm/100MHz
D1301	001-2410-90	D3F60				L1008	BMZ0211	BLM18PG121SN 1D
D1401	001-4910-90	DF5A6.8F-L,F						
D1402	001-4910-90	DF5A6.8F-L,F						
FC601	060-2234-90	WFC72F1575CH						
FL901	BMZ0251	BK20104L121-T						
FL902	BMZ0251	BK20104L121-T						
FL903	BMZ0251	BK20104L121-T						
FL904	BMZ0251	BK20104L121-T						
FL905	BMZ0251	BK20104L121-T						
IC101	-----	R8A77910DB20 BA(SoC)(BGA) (044100-052)						
IC102	-----	MT41K256M16H A125IT:E(BGA) (DDR3-SDRAM) (934210-051)						
IC103	-----	MT41K256M16H A125IT:E(BGA) (DDR3-SDRAM) (934210-051)						
IC106	-----	S25FL127SABM F1000 (SPI-FLASH) (359900-052)						

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
L1009	BMZ0211	BLM18PG121SN 1D	NF321	060-3138-90	NFM18PC105R0 J3D	R162	033-2701-15	1/16W 27 ohm J
L1010	010-3114-53	MMZ1005S601CT	NF1201	010-3609-90	DLW43SH510XK 2L	R163	033-2701-15	1/16W 27 ohm J
L1011	010-3114-53	MMZ1005S601CT				R164	033-2701-15	1/16W 27 ohm J
L1012	010-3114-53	MMZ1005S601CT	P601	092-2249-00	ANT-RECEPT	R165	033-2701-15	1/16W 27 ohm J
L1013	010-3114-53	MMZ1005S601CT	P1401	076-6023-07	7P	R166	033-2701-15	1/16W 27 ohm J
L1014	010-3114-53	MMZ1005S601CT	P1501	076-6021-60	10P	R167	033-2701-15	1/16W 27 ohm J
L1101	BMZ0211	BLM18PG121SN 1D	Q401	125-2046-91	DTC114EUBTL	R168	033-2701-15	1/16W 27 ohm J
L1201	010-2285-70	120 ohm/100MHz	Q501	191-1197-50	2SB1197K Q,R	R169	033-2701-15	1/16W 27 ohm J
L1203	010-2285-70	120 ohm/100MHz	Q502	125-2046-91	DTC114EUBTL	R170	033-2701-15	1/16W 27 ohm J
L1204	010-2285-70	120 ohm/100MHz	Q801	CAZ0331	2SC4081T106R	R171	033-2701-15	1/16W 27 ohm J
L1205	010-2285-70	120 ohm/100MHz	Q802	190-1576-60	2SA1576UBTL	R172	033-2701-15	1/16W 27 ohm J
L1206	010-2285-70	120 ohm/100MHz	Q803	125-2027-92	DTC124EUA	R173	033-2701-15	1/16W 27 ohm J
L1207	010-3458-51	LBC2518T220MV	Q804	125-2027-92	DTC124EUA	R174	032-0221-74	1/16W 10k ohm 1%
L1301	BEZ0122	DLP11SN900HL 2L	Q805	125-0021-92	DTA124EUA	R175	033-2701-15	1/16W 27 ohm J
L1304	BEZ0122	DLP11SN900HL 2L	Q806	190-1576-60	2SA1576UBTL	R176	033-2701-15	1/16W 27 ohm J
L1306	010-3104-54	600 ohm/100MHz	Q807	190-1576-60	2SA1576UBTL	R179	033-2701-15	1/16W 27 ohm J
L1501	010-3564-50	1.5uH	Q808	CAZ0331	2SC4081T106R	R180	033-2701-15	1/16W 27 ohm J
L1502	010-3564-50	1.5uH	Q809	125-2027-91	DTC114EUA	R181	033-2701-15	1/16W 27 ohm J
L1504	010-3108-56	100MHz	Q810	CAZ0331	2SC4081T106R	R182	033-2701-15	1/16W 27 ohm J
L1508	010-3548-50	2.2uH	Q811	190-1576-60	2SA1576UBTL	R183	033-2701-15	1/16W 27 ohm J
L1510	010-3547-51	1.0uH	Q812	125-8032-90	RVQ040N05 TR	R184	032-0221-33	1/16W 20k ohm F
L1512	BMZ0211	BLM18PG121SN 1D	Q819	192-5810-00	2SC5810 TE12L	R185	032-0221-33	1/16W 20k ohm F
L1513	010-3108-56	100MHz	Q820	125-2046-91	DTC114EUBTL	R186	032-0221-33	1/16W 20k ohm F
L1514	010-3108-56	100MHz	Q901	125-2046-97	DTC114YUB TL	R187	032-0221-33	1/16W 20k ohm F
L1515	BMZ0211	BLM18PG121SN 1D	Q902	190-1576-60	2SA1576UBTL	R188	032-0221-33	1/16W 20k ohm F
L1516	BMZ0211	BLM18PG121SN 1D	Q1001	125-2027-91	DTC114EUA	R189	032-0221-33	1/16W 20k ohm F
L1517	BMZ0211	BLM18PG121SN 1D	Q1002	125-2027-91	DTC114EUA	R190	032-0221-33	1/16W 20k ohm F
NF301	060-3138-90	NFM18PC105R0 J3D	Q1003	125-2027-91	DTC114EUA	R191	032-0221-33	1/16W 20k ohm F
NF302	060-3138-90	NFM18PC105R0 J3D	Q1004	125-0035-91	DTA114EUBTL	R192	032-0221-33	1/16W 20k ohm F
NF303	060-3138-90	NFM18PC105R0 J3D	Q1005	125-2046-91	DTC114EUBTL	R193	032-0221-33	1/16W 20k ohm F
NF304	060-3138-90	NFM18PC105R0 J3D	Q1201	CAZ0331	2SC4081T106R	R194	032-0221-33	1/16W 20k ohm F
NF305	060-3138-90	NFM18PC105R0 J3D	Q1202	CAZ0331	2SC4081T106R	R195	032-0221-33	1/16W 20k ohm F
NF306	060-3138-90	NFM18PC105R0 J3D	Q1205	190-1576-60	2SA1576UBTL	R196	032-0221-99	1/16W 100 ohm 1%
NF307	060-3138-90	NFM18PC105R0 J3D	Q1206	125-0035-91	DTA114EUBTL	R197	032-0221-99	1/16W 100 ohm 1%
NF308	060-3138-90	NFM18PC105R0 J3D	Q1207	CAZ0331	2SC4081T106R	R198	032-0221-99	1/16W 100 ohm 1%
NF309	060-3138-90	NFM18PC105R0 J3D	Q1210	125-9028-90	UMX1N-TN	R199	032-0221-51	1/16W 4.7k ohm F
NF310	060-3138-90	NFM18PC105R0 J3D	Q1212	CAZ0331	2SC4081T106R	R201	032-0221-02	1/16W 33 ohm 1%
NF311	060-3138-90	NFM18PC105R0 J3D	Q1213	CAZ0331	2SC4081T106R	R202	032-0221-02	1/16W 33 ohm 1%
NF312	060-3138-90	NFM18PC105R0 J3D	Q1503	192-4116-00	2SC4116	R203	032-0221-02	1/16W 33 ohm 1%
NF313	060-3130-91	NFM21PC475B1 A3D	Q1504	125-7016-90	RZQ050P01TR	R204	032-0221-02	1/16W 33 ohm 1%
NF314	060-3138-90	NFM18PC105R0 J3D	Q4801	125-2027-92	DTC124EUA	R205	032-0221-02	1/16W 33 ohm 1%
NF315	060-3138-90	NFM18PC105R0 J3D	Q4804	CAZ0331	2SC4081T106R	R206	032-0221-02	1/16W 33 ohm 1%
NF316	060-3138-90	NFM18PC105R0 J3D	Q4805	125-2027-91	DTC114EUA	R207	033-6801-15	1/16W 68 ohm J
NF317	060-3138-90	NFM18PC105R0 J3D	Q4806	125-8062-90	RHU002N06FRA T106	R208	032-0221-02	1/16W 33 ohm 1%
NF318	060-3138-90	NFM18PC105R0 J3D	Q4807	125-8062-90	RHU002N06FRA T106	R209	032-0221-02	1/16W 33 ohm 1%
NF319	060-3138-90	NFM18PC105R0 J3D	Q4808	125-8062-90	RHU002N06FRA T106	R210	032-0221-74	1/16W 10k ohm 1%
NF320	060-3138-90	NFM18PC105R0 J3D	Q4809	125-8062-90	RHU002N06FRA T106	R211	032-0221-74	1/16W 10k ohm 1%
			Q4810	125-8062-90	RHU002N06FRA T106	R212	032-0221-02	1/16W 33 ohm 1%
			Q4811	125-8062-90	RHU002N06FRA T106	R213	032-0221-02	1/16W 33 ohm 1%
			Q4812	125-8062-90	RHU002N06FRA T106	R214	032-0221-02	1/16W 33 ohm 1%
			R101	032-0221-75	1/16W 47k ohm F	R215	032-0221-02	1/16W 33 ohm 1%
			R102	032-0221-75	1/16W 47k ohm F	R216	032-0221-02	1/16W 33 ohm 1%
			R104	032-0221-90	1/16W 240 ohm 1%	R217	032-0221-02	1/16W 33 ohm 1%
			R111	033-0000-05	1/16W 0 ohm	R218	032-0221-02	1/16W 33 ohm 1%
			R126	032-0221-90	1/16W 240 ohm 1%	R219	032-0221-75	1/16W 47k ohm F
			R127	032-0221-90	1/16W 240 ohm 1%	R220	032-0221-02	1/16W 33 ohm 1%
			R128	032-0221-00	1/16W 68 ohm 1%	R221	032-0221-02	1/16W 33 ohm 1%
			R148	032-0221-99	1/16W 100 ohm 1%	R222	032-0221-02	1/16W 33 ohm 1%
			R153	032-0221-00	1/16W 68 ohm 1%	R224	033-4701-15	1/16W 47 ohm J
			R155	033-2701-15	1/16W 27 ohm J	R225	032-0221-74	1/16W 10k ohm 1%
			R156	033-2701-15	1/16W 27 ohm J	R226	032-0221-74	1/16W 10k ohm 1%
			R157	033-2701-15	1/16W 27 ohm J	R227	032-0221-74	1/16W 10k ohm 1%
			R158	033-2701-15	1/16W 27 ohm J	R228	032-0221-02	1/16W 33 ohm 1%
			R159	033-2701-15	1/16W 27 ohm J	R229	032-0221-02	1/16W 33 ohm 1%
			R160	033-2701-15	1/16W 27 ohm J	R230	032-0221-02	1/16W 33 ohm 1%
			R161	033-2701-15	1/16W 27 ohm J	R231	032-0221-74	1/16W 10k ohm 1%
						R233	119-0000-05	1/10W 0 ohm JW
						R235	032-0221-02	1/16W 33 ohm 1%
						R236	032-0221-02	1/16W 33 ohm 1%
						R242	032-0221-02	1/16W 33 ohm 1%
						R243	032-0221-02	1/16W 33 ohm 1%
						R245	032-0221-74	1/16W 10k ohm 1%
						R249	032-0221-02	1/16W 33 ohm 1%
						R250	032-0221-74	1/16W 10k ohm 1%

REF NO.	PART NO.	DESCRIPTION
R252	032-0221-08	1/16W 1k ohm F
R256	032-0221-74	1/16W 10k ohm 1%
R257	032-0221-02	1/16W 33 ohm 1%
R258	032-0221-02	1/16W 33 ohm 1%
R259	032-0221-02	1/16W 33 ohm 1%
R260	033-2221-15	1/16W 2.2k ohm J
R261	033-2221-15	1/16W 2.2k ohm J
R267	032-0221-02	1/16W 33 ohm 1%
R268	032-0221-02	1/16W 33 ohm 1%
R270	032-0221-73	1/16W 2.2k ohm 1%
R271	032-0221-02	1/16W 33 ohm 1%
R273	032-0221-02	1/16W 33 ohm 1%
R274	032-0221-02	1/16W 33 ohm 1%
R275	032-0221-02	1/16W 33 ohm 1%
R276	032-0221-02	1/16W 33 ohm 1%
R277	032-0221-02	1/16W 33 ohm 1%
R278	032-0221-51	1/16W 4.7k ohm F
R279	032-0221-74	1/16W 10k ohm 1%
R280	032-0221-08	1/16W 1k ohm F
R281	032-0221-02	1/16W 33 ohm 1%
R282	032-0221-73	1/16W 2.2k ohm 1%
R283	032-0221-51	1/16W 4.7k ohm F
R287	032-0221-74	1/16W 10k ohm 1%
R288	032-0221-74	1/16W 10k ohm 1%
R289	032-0221-74	1/16W 10k ohm 1%
R290	032-0221-02	1/16W 33 ohm 1%
R291	032-0221-83	1/16W 3.3k ohm F
R292	032-0221-51	1/16W 4.7k ohm F
R293	032-0221-75	1/16W 47k ohm F
R294	032-0221-75	1/16W 47k ohm F
R296	032-0221-75	1/16W 47k ohm F
R297	032-0221-75	1/16W 47k ohm F
R298	032-0221-75	1/16W 47k ohm F
R299	032-0221-74	1/16W 10k ohm 1%
R302	119-0000-05	1/10W 0 ohm JW
R306	033-1091-15	1/16W 1 ohm
R307	033-1091-15	1/16W 1 ohm
R308	033-1091-15	1/16W 1 ohm
R309	033-1091-15	1/16W 1 ohm
R310	033-1091-15	1/16W 1 ohm
R311	032-0221-52	1/16W 1.8k ohm F
R312	032-0221-52	1/16W 1.8k ohm F
R313	033-1091-15	1/16W 1 ohm
R314	033-1091-15	1/16W 1 ohm
R315	033-1091-15	1/16W 1 ohm
R316	033-1091-15	1/16W 1 ohm
R317	033-1091-15	1/16W 1 ohm
R319	033-1091-15	1/16W 1 ohm
R321	033-1091-15	1/16W 1 ohm
R322	033-1091-15	1/16W 1 ohm
R323	033-1091-15	1/16W 1 ohm
R324	033-1091-15	1/16W 1 ohm
R325	033-1091-15	1/16W 1 ohm
R326	033-1091-15	1/16W 1 ohm
R401	032-0221-51	1/16W 4.7k ohm F
R410	032-0221-75	1/16W 47k ohm F
R411	033-0000-05	1/16W 0 ohm
R412	032-0221-99	1/16W 100 ohm 1%
R414	032-0221-02	1/16W 33 ohm 1%
R416	032-0221-99	1/16W 100 ohm 1%
R418	032-0221-02	1/16W 33 ohm 1%
R421	032-0221-99	1/16W 100 ohm 1%
R422	032-0221-83	1/16W 3.3k ohm F
R437	032-0221-74	1/16W 10k ohm 1%
R441	032-0221-08	1/16W 1k ohm F
R442	032-0221-04	1/16W 10 ohm F
R445	032-0221-74	1/16W 10k ohm 1%
R446	033-2201-15	1/16W 22 ohm J
R448	032-0221-74	1/16W 10k ohm 1%
R449	032-0221-74	1/16W 10k ohm 1%
R450	032-0221-74	1/16W 10k ohm 1%
R452	032-0221-74	1/16W 10k ohm 1%

REF NO.	PART NO.	DESCRIPTION
R454	032-0221-74	1/16W 10k ohm 1%
R455	032-0221-74	1/16W 10k ohm 1%
R456	032-0221-74	1/16W 10k ohm 1%
R457	032-0221-74	1/16W 10k ohm 1%
R458	032-0221-74	1/16W 10k ohm 1%
R459	032-0221-74	1/16W 10k ohm 1%
R460	032-0221-74	1/16W 10k ohm 1%
R462	032-0221-74	1/16W 10k ohm 1%
R463	032-0221-74	1/16W 10k ohm 1%
R464	032-0221-74	1/16W 10k ohm 1%
R465	032-0221-74	1/16W 10k ohm 1%
R466	032-0221-74	1/16W 10k ohm 1%
R467	032-0221-74	1/16W 10k ohm 1%
R468	032-0221-74	1/16W 10k ohm 1%
R469	032-0221-74	1/16W 10k ohm 1%
R470	032-0221-74	1/16W 10k ohm 1%
R471	032-0221-74	1/16W 10k ohm 1%
R472	032-0221-74	1/16W 10k ohm 1%
R474	032-0221-74	1/16W 10k ohm 1%
R475	032-0221-74	1/16W 10k ohm 1%
R476	032-0221-74	1/16W 10k ohm 1%
R477	119-0000-05	1/10W 0 ohm JW
R478	119-0000-05	1/10W 0 ohm JW
R479	119-0000-05	1/10W 0 ohm JW
R480	119-0000-05	1/10W 0 ohm JW
R501	032-0221-02	1/16W 33 ohm 1%
R502	032-0221-02	1/16W 33 ohm 1%
R503	032-0221-02	1/16W 33 ohm 1%
R504	032-0221-02	1/16W 33 ohm 1%
R505	032-0221-02	1/16W 33 ohm 1%
R506	032-0221-99	1/16W 100 ohm 1%
R507	032-0221-75	1/16W 47k ohm F
R508	032-0221-74	1/16W 10k ohm 1%
R509	033-5611-15	1/16W 560 ohm J
R510	032-0221-08	1/16W 1k ohm F
R511	033-2221-15	1/16W 2.2k ohm J
R514	032-0221-02	1/16W 33 ohm 1%
R515	032-0221-02	1/16W 33 ohm 1%
R516	032-0221-02	1/16W 33 ohm 1%
R517	032-0221-02	1/16W 33 ohm 1%
R518	032-0221-02	1/16W 33 ohm 1%
R519	032-0221-02	1/16W 33 ohm 1%
R520	032-0221-02	1/16W 33 ohm 1%
R521	032-0221-02	1/16W 33 ohm 1%
R522	032-0221-02	1/16W 33 ohm 1%
R523	032-0221-99	1/16W 100 ohm 1%
R524	033-0000-05	1/16W 0 ohm
R525	032-0221-75	1/16W 47k ohm F
R528	032-0221-74	1/16W 10k ohm 1%
R601	033-0000-05	1/16W 0 ohm
R602	033-0000-05	1/16W 0 ohm
R612	033-0000-05	1/16W 0 ohm
R613	033-0000-05	1/16W 0 ohm
R618	116-1001-15	1/4W 10 ohm
R619	032-0225-55	1/16W 7.5k ohm +/- 0.5%
R620	032-0225-52	1/16W 10k ohm 0.5%
R626	116-1001-15	1/4W 10 ohm
R627	032-0221-75	1/16W 47k ohm F
R629	033-0000-05	1/16W 0 ohm
R631	032-0221-02	1/16W 33 ohm 1%
R701	119-1011-15	1/10W 100 ohm
R702	033-0000-05	1/16W 0 ohm
R707	119-0000-05	1/10W 0 ohm JW
R709	AQZ0491	1/10W 47 ohm 1%
R710	032-0221-88	1/16W 30 ohm F
R715	119-0000-05	1/10W 0 ohm JW
R717	AQZ0491	1/10W 47 ohm 1%
R718	032-0221-88	1/16W 30 ohm F
R739	032-0221-02	1/16W 33 ohm 1%
R740	032-0221-61	1/16W 6.8k ohm F
R747	119-0000-05	1/10W 0 ohm JW
R748	119-0000-05	1/10W 0 ohm JW

REF NO.	PART NO.	DESCRIPTION
R749	032-0221-00	1/16W 68 ohm 1%
R754	AQZ0491	1/10W 47 ohm 1%
R755	032-0221-88	1/16W 30 ohm F
R756	033-0000-05	1/16W 0 ohm
R757	032-0221-83	1/16W 3.3k ohm F
R801	032-0221-83	1/16W 3.3k ohm F
R802	032-0221-65	1/16W 68k ohm F
R803	119-0000-05	1/10W 0 ohm JW
R804	119-2231-15	1/10W 22k ohm
R805	032-0221-74	1/16W 10k ohm 1%
R806	032-0210-40	1/10W 1.3k ohm F
R807	032-0210-74	1/10W 470 ohm F
R808	032-0210-16	1/10W 1.2k ohm F
R809	032-0210-36	1/10W 22 ohm F
R810	AQZ0522	1/10W 10k ohm 1%
R811	032-0210-85	1/10W 150 ohm F
R812	032-0221-51	1/16W 4.7k ohm F
R813	032-0221-74	1/16W 10k ohm 1%
R814	032-0221-74	1/16W 10k ohm 1%
R815	119-2221-15	1/10W 2.2k ohm
R816	032-0221-74	1/16W 10k ohm 1%
R818	032-0221-51	1/16W 4.7k ohm F
R821	032-0221-59	1/16W 220 ohm F
R822	032-0221-33	1/16W 20k ohm F
R823	033-4711-15	1/16W 470 ohm J
R824	032-0210-95	1/10W 2k ohm F
R825	032-0210-83	1/10W 3.9k ohm 1%
R826	032-0210-88	1/10W 5.1k ohm F
R827	032-0210-95	1/10W 2k ohm F
R828	AQZ0489	1/10W 39 ohm 1%
R829	032-0221-83	1/16W 3.3k ohm F
R830	032-0221-56	1/16W 22k ohm F
R831	032-0221-56	1/16W 22k ohm F
R832	032-0221-56	1/16W 22k ohm F
R833	032-0221-75	1/16W 47k ohm F
R837	032-0221-86	1/16W 82k ohm F
R838	032-0221-09	1/16W 33k ohm F
R839	032-0210-75	1/10W 820 ohm F
R840	032-0210-00	1/10W 330 ohm F
R841	032-0210-75	1/10W 820 ohm F
R842	032-0210-00	1/10W 330 ohm F
R843	032-0210-70	1/10W 680 ohm 1%
R844	032-0210-63	1/10W 3k ohm F
R845	032-0210-64	1/10W 1k ohm F
R846	032-0215-61	1/10W 7.5k ohm(F)
R847	032-0246-52	3/4W 0.11 ohm
R848	032-0246-52	3/4W 0.11 ohm
R849	033-0000-05	1/16W 0 ohm
R850	032-0221-84	1/16W 27k ohm F
R851	032-0221-38	1/16W 300k ohm
R852	032-0221-07	1/16W 56k ohm F
R853	032-0221-95	1/16W 2.7k ohm F
R854	032-0221-51	1/16W 4.7k ohm F
R855	032-0221-09	1/16W 33k ohm F
R856	032-0221-84	1/16W 27k ohm F
R858	032-0221-99	1/16W 100 ohm 1%
R861	032-0221-70	1/16W 680k ohm F
R862	032-0221-64	1/16W 39k ohm F
R863	032-0221-86	1/16W 82k ohm F
R864	116-7511-15	1/4W 750 ohm
R865	033-1101-15	1/16W 11 ohm
R866	033-0000-05	1/16W 0 ohm
R867	032-0221-51	1/16W 4.7k ohm F
R868	032-0221-51	1/16W 4.7k ohm F
R869	032-0221-51	1/16W 4.7k ohm F
R870	032-0221-51	1/16W 4.7k ohm F
R871	032-0221-51	1/16W 4.7k ohm F
R872	032-0221-09	1/16W 33k ohm F
R873	032-0221-95	1/16W 2.7k ohm F
R876	032-0221-51	1/16W 4.7k ohm F
R878	032-0221-51	1/16W 4.7k ohm F
R879	032-0221-85	1/16W 120k ohm F
R880	032-0225-68	1/16W 5.6k ohm +/- 0.5%

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R881	032-0225-74	1/16W 6.8k ohm +/- 0.5%	R1006	032-0221-08	1/16W 1k ohm F	R1253	032-0221-99	1/16W 100 ohm 1%
R882	032-0221-11	1/16W 5.6k ohm F	R1007	032-0221-08	1/16W 1k ohm F	R1255	119-1021-15	1/10W 1k ohm
R883	032-0221-74	1/16W 10k ohm 1%	R1008	119-2201-15	1/10W 22 ohm	R1256	032-0221-74	1/16W 10k ohm 1%
R884	033-0000-05	1/16W 0 ohm	R1009	119-2201-15	1/10W 22 ohm	R1257	032-0221-11	1/16W 5.6k ohm F
R885	033-0000-05	1/16W 0 ohm	R1010	032-0221-08	1/16W 1k ohm F	R1258	116-1011-15	1/4W 100 ohm
R886	116-7511-15	1/4W 750 ohm	R1011	119-2201-15	1/10W 22 ohm	R1259	116-1011-15	1/4W 100 ohm
R887	032-0221-51	1/16W 4.7k ohm F	R1012	033-0000-05	1/16W 0 ohm	R1260	119-1031-15	1/10W 10k ohm
R890	032-0221-99	1/16W 100 ohm 1%	R1013	033-0000-05	1/16W 0 ohm	R1261	119-1031-15	1/10W 10k ohm
R891	119-0000-05	1/10W 0 ohm JW	R1014	032-0221-02	1/16W 33 ohm 1%	R1262	032-0221-74	1/16W 10k ohm 1%
R892	119-0000-05	1/10W 0 ohm JW	R1015	032-0221-02	1/16W 33 ohm 1%	R1265	033-0000-05	1/16W 0 ohm
R893	119-0000-05	1/10W 0 ohm JW	R1016	033-0000-05	1/16W 0 ohm	R1266	033-0000-05	1/16W 0 ohm
R895	033-0000-05	1/16W 0 ohm	R1017	033-0000-05	1/16W 0 ohm	R1267	032-0221-51	1/16W 4.7k ohm F
R896	033-0000-05	1/16W 0 ohm	R1018	033-0000-05	1/16W 0 ohm	R1268	032-0221-51	1/16W 4.7k ohm F
R897	033-0000-05	1/16W 0 ohm	R1019	033-0000-05	1/16W 0 ohm	R1269	032-0221-99	1/16W 100 ohm 1%
R898	032-0221-83	1/16W 3.3k ohm F	R1020	033-0000-05	1/16W 0 ohm	R1271	033-0000-05	1/16W 0 ohm
R901	032-0221-75	1/16W 47k ohm F	R1021	033-0000-05	1/16W 0 ohm	R1272	119-0000-05	1/10W 0 ohm JW
R902	032-0221-83	1/16W 3.3k ohm F	R1022	033-0000-05	1/16W 0 ohm	R1273	119-0000-05	1/10W 0 ohm JW
R903	032-0221-53	1/16W 18k ohm F	R1024	033-0000-05	1/16W 0 ohm	R1303	032-0221-29	1/16W 5.1k ohm 1%
R904	032-0221-08	1/16W 1k ohm F	R1025	033-0000-05	1/16W 0 ohm	R1304	032-0221-06	1/16W 100k ohm F
R905	032-0221-84	1/16W 27k ohm F	R1026	032-0221-74	1/16W 10k ohm 1%	R1307	033-0000-05	1/16W 0 ohm
R906	032-0221-84	1/16W 27k ohm F	R1027	032-0221-74	1/16W 10k ohm 1%	R1309	033-0000-05	1/16W 0 ohm
R907	033-4701-15	1/16W 47 ohm J	R1028	032-0221-75	1/16W 47k ohm F	R1314	033-0000-05	1/16W 0 ohm
R908	119-2201-15	1/10W 22 ohm	R1029	033-0000-05	1/16W 0 ohm	R1316	033-0000-05	1/16W 0 ohm
R909	119-0000-05	1/10W 0 ohm JW	R1030	032-0221-02	1/16W 33 ohm 1%	R1317	033-0000-05	1/16W 0 ohm
R911	033-8211-15	1/16W 820 ohm J	R1031	119-0000-05	1/10W 0 ohm JW	R1319	119-0000-05	1/10W 0 ohm JW
R912	032-0221-56	1/16W 22k ohm F	R1032	119-0000-05	1/10W 0 ohm JW	R1321	033-0000-05	1/16W 0 ohm
R913	032-0221-99	1/16W 100 ohm 1%	R1033	119-0000-05	1/10W 0 ohm JW	R1322	032-0221-74	1/16W 10k ohm 1%
R914	032-0221-99	1/16W 100 ohm 1%	R1034	119-0000-05	1/10W 0 ohm JW	R1323	032-0221-06	1/16W 100k ohm F
R916	032-0221-08	1/16W 1k ohm F	R1036	119-0000-05	1/10W 0 ohm JW	R1327	032-0221-75	1/16W 47k ohm F
R917	032-0221-99	1/16W 100 ohm 1%	R1037	032-0221-99	1/16W 100 ohm 1%	R1328	032-0221-75	1/16W 47k ohm F
R919	032-0140-06	1/10W 100 ohm F	R1038	033-0000-05	1/16W 0 ohm	R1344	032-0221-74	1/16W 10k ohm 1%
R920	032-0210-14	1/10W 75 ohm 1%	R1039	033-0000-05	1/16W 0 ohm	R1347	033-0000-05	1/16W 0 ohm
R921	032-0140-06	1/10W 100 ohm F	R1041	033-0000-05	1/16W 0 ohm	R1349	033-0000-05	1/16W 0 ohm
R922	119-6891-15	1/10W 6.8 ohm	R1042	032-0221-75	1/16W 47k ohm F	R1351	033-1041-15	1/16W 100k ohm J
R923	032-0210-50	1/10W 360 ohm F	R1045	119-0000-05	1/10W 0 ohm JW	R1352	032-0221-33	1/16W 20k ohm F
R924	032-0210-35	1/10W 120 ohm F	R1046	119-0000-05	1/10W 0 ohm JW	R1353	033-0000-05	1/16W 0 ohm
R925	032-0210-36	1/10W 22 ohm F	R1047	119-0000-05	1/10W 0 ohm JW	R1401	032-0210-64	1/10W 1k ohm F
R926	032-0140-01	1/10W 10 ohm F	R1048	119-0000-05	1/10W 0 ohm JW	R1402	119-1021-15	1/10W 1k ohm
R927	AQZ0484	1/10W 15 ohm 1%	R1049	119-0000-05	1/10W 0 ohm JW	R1403	119-1021-15	1/10W 1k ohm
R928	032-0210-38	1/10W 110 ohm F	R1050	033-0000-05	1/16W 0 ohm	R1404	032-0221-74	1/16W 10k ohm 1%
R929	119-2091-15	1/10W 110 ohm	R1051	033-0000-05	1/16W 0 ohm	R1405	032-0221-99	1/16W 100 ohm 1%
R930	032-0140-01	1/10W 10 ohm F	R1052	033-0000-05	1/16W 0 ohm	R1406	032-0221-74	1/16W 10k ohm 1%
R931	032-0210-38	1/10W 110 ohm F	R1056	033-0000-05	1/16W 0 ohm	R1501	032-0221-06	1/16W 100k ohm F
R932	AQZ0483	1/10W 12 ohm 1%	R1057	033-0000-05	1/16W 0 ohm	R1502	033-1091-15	1/16W 1 ohm
R933	032-0210-50	1/10W 360 ohm F	R1058	033-0000-05	1/16W 0 ohm	R1504	033-0000-05	1/16W 0 ohm
R934	032-0210-14	1/10W 75 ohm 1%	R1059	033-0000-05	1/16W 0 ohm	R1505	033-0000-05	1/16W 0 ohm
R935	AQZ0483	1/10W 12 ohm 1%	R1069	032-0221-02	1/16W 33 ohm 1%	R1507	032-0221-06	1/16W 100k ohm F
R936	032-0210-50	1/10W 360 ohm F	R1115	032-0221-51	1/16W 4.7k ohm F	R1508	032-0221-06	1/16W 100k ohm F
R937	032-0140-01	1/10W 10 ohm F	R1202	032-0221-74	1/16W 10k ohm 1%	R1509	033-1091-15	1/16W 1 ohm
R938	032-0210-36	1/10W 22 ohm F	R1203	032-0221-74	1/16W 10k ohm 1%	R1511	033-0000-05	1/16W 0 ohm
R939	032-0210-35	1/10W 120 ohm F	R1204	116-1011-15	1/4W 100 ohm	R1512	033-0000-05	1/16W 0 ohm
R940	032-0210-50	1/10W 360 ohm F	R1205	032-0221-74	1/16W 10k ohm 1%	R1514	032-0221-06	1/16W 100k ohm F
R941	032-0210-38	1/10W 110 ohm F	R1206	032-0221-74	1/16W 10k ohm 1%	R1517	032-0221-55	1/16W 1.5k ohm F
R942	032-0140-01	1/10W 10 ohm F	R1209	032-0221-99	1/16W 100 ohm 1%	R1518	032-0221-95	1/16W 2.7k ohm F
R943	AQZ0484	1/10W 15 ohm 1%	R1212	032-0221-75	1/16W 47k ohm F	R1519	033-0000-05	1/16W 0 ohm
R944	032-0140-06	1/10W 100 ohm F	R1214	119-2221-15	1/10W 2.2k ohm	R1520	033-0000-05	1/16W 0 ohm
R945	032-0210-38	1/10W 110 ohm F	R1215	119-1521-15	1/10W 1.5k ohm	R1521	033-0000-05	1/16W 0 ohm
R946	032-0140-06	1/10W 100 ohm F	R1216	032-0221-83	1/16W 3.3k ohm F	R1522	032-0221-04	1/16W 10 ohm F
R947	032-0210-25	1/10W 68 ohm F	R1226	116-5621-15	1/4W 5.6k ohm	R1523	032-0221-76	1/16W 24k ohm F
R948	032-0210-25	1/10W 68 ohm F	R1228	032-0221-74	1/16W 10k ohm 1%	R1525	119-4711-15	1/10W 470 ohm
R949	032-0221-84	1/16W 27k ohm F	R1230	032-0221-11	1/16W 5.6k ohm F	R1526	032-0221-06	1/16W 100k ohm F
R950	032-0221-84	1/16W 27k ohm F	R1231	119-1531-15	1/10W 15k ohm	R1527	032-0221-75	1/16W 47k ohm F
R951	032-0221-56	1/16W 22k ohm F	R1232	032-0221-09	1/16W 33k ohm F	R1528	033-4711-15	1/16W 470 ohm J
R952	032-0221-56	1/16W 22k ohm F	R1233	032-0221-74	1/16W 10k ohm 1%	R1529	032-0225-62	1/16W 56k ohm +/- 0.5%
R953	033-2201-15	1/16W 22 ohm J	R1234	032-0221-74	1/16W 10k ohm 1%	R1530	032-0221-51	1/16W 4.7k ohm F
R954	032-0221-61	1/16W 6.8k ohm F	R1235	032-0221-08	1/16W 1k ohm F	R1531	032-0221-74	1/16W 10k ohm 1%
R968	032-0221-99	1/16W 100 ohm 1%	R1236	032-0221-51	1/16W 4.7k ohm F	R1532	032-0221-76	1/16W 24k ohm F
R969	032-0221-99	1/16W 100 ohm 1%	R1237	033-5641-15	1/16W 560k ohm J	R1533	033-2221-15	1/16W 2.2k ohm J
R1001	033-0000-05	1/16W 0 ohm	R1238	032-0221-99	1/16W 100 ohm 1%	R1534	032-0221-06	1/16W 100k ohm F
R1002	033-0000-05	1/16W 0 ohm	R1239	032-0176-00	1/3W 1k ohm J	R1535	032-0221-74	1/16W 10k ohm 1%
R1003	032-0221-02	1/16W 33 ohm 1%	R1240	032-0221-52	1/16W 1.8k ohm F	R1536	032-0221-74	1/16W 10k ohm 1%
R1004	032-0221-02	1/16W 33 ohm 1%	R1241	117-1531-15	1/8W 15k ohm	R1540	032-0221-59	1/16W 220 ohm F
R1005	032-0221-08	1/16W 1k ohm F	R1247	116-1321-15	1/4W 1.3k ohm			
			R1248	116-1321-15	1/4W 1.3k ohm			

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R1541	032-0221-75	1/16W 47k ohm F	R8010	032-0221-93	1/16W 470k ohm F	RN901	050-0156-52	1/16W 100 ohm x4
R1550	033-0000-05	1/16W 0 ohm	R8011	033-4751-15	1/16W 4.7M ohm 5%	RN902	050-0156-52	1/16W 100 ohm x4
R1552	033-0000-05	1/16W 0 ohm				RN903	050-0156-52	1/16W 100 ohm x4
R1554	032-0221-32	1/16W 220k ohm F	R8012	032-0221-32	1/16W 220k ohm F	RN904	050-0156-52	1/16W 100 ohm x4
R1555	032-0221-29	1/16W 5.1k ohm 1%	R8013	032-0221-68	1/16W 430k ohm F	RN905	050-0156-52	1/16W 100 ohm x4
			R8014	033-3941-15	1/16W 390k ohm J	RN906	050-0156-57	1/16W 10k ohm x4
R1556	032-0221-94	1/16W 180k ohm F	R8015	033-1061-15	1/16W 10M ohm J	RN1001	050-0156-53	1/16W 0 ohm x4
R1557	032-0210-00	1/10W 330 ohm F	R8016	033-1061-15	1/16W 10M ohm J	RN1002	050-0156-59	1/16W 33 ohm x4
R1558	032-0210-00	1/10W 330 ohm F	R8017	033-1061-15	1/16W 10M ohm J	RN1006	050-0156-53	1/16W 0 ohm x4
R1559	032-0210-00	1/10W 330 ohm F	RN101	050-0157-09	1/16W 15 ohm x2	RN1010	050-0156-53	1/16W 0 ohm x4
R1562	033-0000-05	1/16W 0 ohm	RN102	050-0157-09	1/16W 15 ohm x2	RN1301	050-0156-53	1/16W 0 ohm x4
R1564	032-0210-00	1/10W 330 ohm F	RN103	050-0157-09	1/16W 15 ohm x2	SUP1301	001-4323-90	RCLAMP0502A
R1565	032-0210-00	1/10W 330 ohm F	RN104	050-0157-09	1/16W 15 ohm x2	SUP1303	001-4323-90	RCLAMP0502A
R1614	033-0000-05	1/16W 0 ohm	RN201	050-0156-57	1/16W 10k ohm x4	VR1204	001-9213-50	EZJZ1V270EA
R2004	032-0221-99	1/16W 100 ohm 1%	RN204	050-0156-59	1/16W 33 ohm x4	VR1206	001-9213-50	EZJZ1V270EA
R2006	032-0221-74	1/16W 10k ohm 1%	RN205	050-0156-59	1/16W 33 ohm x4	VR1207	001-9210-50	AVR-M1608C270MTAAD
R2007	033-0000-05	1/16W 0 ohm	RN206	050-0156-59	1/16W 33 ohm x4			
R2008	032-0221-02	1/16W 33 ohm 1%	RN207	050-0156-59	1/16W 33 ohm x4	VR1208	001-9213-50	EZJZ1V270EA
R2009	032-0221-02	1/16W 33 ohm 1%	RN209	050-0156-59	1/16W 33 ohm x4	X401	061-3593-80	NX3225GA 48MHz
R2010	032-0221-02	1/16W 33 ohm 1%	RN210	050-0156-67	1/16W 220 ohm x4	X601	061-4568-90	DSB221SDM 26MHz
R3002	119-1811-15	1/10W 180 ohm	RN211	050-0156-77	1/16W 68 ohm x4			
R3005	033-0000-05	1/16W 0 ohm	RN217	050-0156-59	1/16W 33 ohm x4	X604	061-9227-80	32.768KHz
R4801	116-3911-15	1/4W 390 ohm	RN218	050-0156-55	1/16W 2.2k ohm x4	ZD801	001-0529-47	MA8091-M
R4802	032-0221-56	1/16W 22k ohm F	RN219	050-0140-55	1/32W 2.2k ohmx4J	ZD1201	001-4330-32	UDZV TE-17 18B
R8003	032-0221-08	1/16W 1k ohm F	RN220	050-0156-57	1/16W 10k ohm x4	ZD1202	001-4330-32	UDZV TE-17 18B
R8004	032-0221-07	1/16W 56k ohm F	RN221	050-0156-63	1/16W 47k ohm x4	ZD1204	001-0529-32	MA8056-M
R8005	032-0221-71	1/16W 270k ohm F	RN222	050-0156-63	1/16W 47k ohm x4	ZD1205	001-0529-47	MA8091-M
R8006	032-0221-38	1/16W 300k ohm	RN223	050-0156-59	1/16W 33 ohm x4	ZD1206	001-0529-47	MA8091-M
R8007	032-0221-92	1/16W 1M ohm 1%	RN501	050-0156-63	1/16W 47k ohm x4	ZD1207	001-4330-32	UDZV TE-17 18B
R8008	033-3941-15	1/16W 390k ohm J	RN701	050-0156-59	1/16W 33 ohm x4	PWB	039-4407-00	PWB(WITHOUT COMPONENTS)
R8009	033-2251-15	1/16W 2.2M ohm J	RN702	050-0156-59	1/16W 33 ohm x4			

CPU PWB(B3) section : for QY-5092H-A, QY-5094H-A

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C101	045-1011-50	100pFJ CH	C169	046-1042-78	0.1uF K B	C306	046-1042-78	0.1uF K B
C102	046-1032-78	0.01uF K B	C170	046-1042-78	0.1uF K B	C307	046-1032-78	0.01uF K B
C103	046-1032-78	0.01uF K B	C171	046-1042-78	0.1uF K B	C308	046-1042-78	0.1uF K B
C104	046-1032-78	0.01uF K B	C172	046-1042-78	0.1uF K B	C309	046-1042-78	0.1uF K B
C109	046-1042-78	0.1uF K B	C173	046-1042-78	0.1uF K B	C310	046-1042-78	0.1uF K B
C110	046-1042-78	0.1uF K B	C174	046-1042-78	0.1uF K B	C311	046-1042-78	0.1uF K B
C111	046-1042-78	0.1uF K B	C175	046-1042-78	0.1uF K B	C312	046-1042-78	0.1uF K B
C112	046-1042-78	0.1uF K B	C176	046-1042-78	0.1uF K B	C313	043-4200-90	6.3V 2.2uF
C113	046-1042-78	0.1uF K B	C177	046-1042-78	0.1uF K B	C314	043-4200-90	6.3V 2.2uF
C115	046-1042-78	0.1uF K B	C178	046-1042-78	0.1uF K B	C315	043-4200-90	6.3V 2.2uF
C117	046-1042-78	0.1uF K B	C179	046-1042-78	0.1uF K B	C316	043-4200-90	6.3V 2.2uF
C120	046-1042-78	0.1uF K B	C180	046-1042-78	0.1uF K B	C317	043-4200-90	6.3V 2.2uF
C121	046-1042-78	0.1uF K B	C181	046-1042-78	0.1uF K B	C318	043-4200-90	6.3V 2.2uF
C122	046-1042-78	0.1uF K B	C182	043-6400-90	16V 4.7uF K	C319	043-4200-90	6.3V 2.2uF
C123	046-1042-78	0.1uF K B	C183	043-6400-90	16V 4.7uF K	C320	043-4200-90	6.3V 2.2uF
C126	046-1042-78	0.1uF K B	C184	043-6400-90	16V 4.7uF K	C321	046-1042-78	0.1uF K B
C129	046-1042-78	0.1uF K B	C185	043-6400-90	16V 4.7uF K	C322	043-7201-90	6.3V 100uF
C130	046-1042-78	0.1uF K B	C186	046-1042-78	0.1uF K B	C323	043-7201-90	6.3V 100uF
C131	046-1042-78	0.1uF K B	C187	046-1042-78	0.1uF K B	C324	043-7201-90	6.3V 100uF
C132	046-1042-78	0.1uF K B	C188	046-1042-78	0.1uF K B	C325	043-7201-90	6.3V 100uF
C133	046-1042-78	0.1uF K B	C189	046-1042-78	0.1uF K B	C326	043-7201-90	6.3V 100uF
C134	046-1042-78	0.1uF K B	C190	046-1042-78	0.1uF K B	C327	046-1042-78	0.1uF K B
C135	046-1042-78	0.1uF K B	C191	046-1042-78	0.1uF K B	C328	046-1042-78	0.1uF K B
C136	046-1042-78	0.1uF K B	C192	046-1042-78	0.1uF K B	C329	046-1042-78	0.1uF K B
C137	046-1042-78	0.1uF K B	C193	046-1042-78	0.1uF K B	C330	046-1042-78	0.1uF K B
C140	046-1042-78	0.1uF K B	C194	046-1042-78	0.1uF K B	C331	046-1042-78	0.1uF K B
C142	046-1042-78	0.1uF K B	C195	046-1042-78	0.1uF K B	C332	046-1042-78	0.1uF K B
C144	046-1042-78	0.1uF K B	C196	046-1042-78	0.1uF K B	C333	046-1042-78	0.1uF K B
C145	046-1042-78	0.1uF K B	C197	168-1062-98	10uF K	C334	046-1042-78	0.1uF K B
C146	046-1042-78	0.1uF K B	C198	043-7200-90	6.3V 47uF	C335	046-1042-78	0.1uF K B
C148	046-1042-78	0.1uF K B	C201	046-1042-78	0.1uF K B	C336	046-1042-78	0.1uF K B
C150	046-1042-78	0.1uF K B	C202	046-1042-78	0.1uF K B	C337	046-1042-78	0.1uF K B
C153	046-1042-78	0.1uF K B	C203	046-1042-78	0.1uF K B	C338	046-1042-78	0.1uF K B
C154	046-1042-78	0.1uF K B	C204	045-1011-50	100pFJ CH	C339	046-1042-78	0.1uF K B
C161	046-1042-78	0.1uF K B	C205	045-1011-50	100pFJ CH	C340	043-0603-90	16V 10uF
C162	046-1042-78	0.1uF K B	C301	046-1042-78	0.1uF K B	C341	043-0603-90	16V 10uF
C163	046-1042-78	0.1uF K B	C302	046-1042-78	0.1uF K B	C342	046-1042-78	0.1uF K B
C166	046-1042-78	0.1uF K B	C303	046-1032-78	0.01uF K B	C343	046-1042-78	0.1uF K B
C167	046-1042-78	0.1uF K B	C304	046-1042-78	0.1uF K B	C344	046-1042-78	0.1uF K B
C168	046-1042-78	0.1uF K B	C305	168-1062-98	10uF K	C345	043-0603-90	16V 10uF

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C346	046-1042-78	0.1uF K B	C602	045-2201-50	22pFJ CH	C834	045-1011-50	100pFJ CH
C347	043-0603-90	16V 10uF	C603	043-7300-90	10V 47uF	C838	ADZ0265	35V 47uF
C348	043-0603-90	16V 10uF	C604	046-1042-78	0.1uF K B	C842	043-5709-90	50V 1uF K
C349	043-4200-90	6.3V 2.2uF	C628	046-1042-78	0.1uF K B	C843	045-1011-50	100pFJ CH
C350	043-4200-90	6.3V 2.2uF	C635	043-4306-90	1uF	C846	ADZ0265	35V 47uF
C351	043-4200-90	6.3V 2.2uF	C636	046-1042-78	0.1uF K B	C847	ADZ0265	35V 47uF
C352	043-4200-90	6.3V 2.2uF	C637	043-6400-90	16V 4.7uF K	C848	045-1011-50	100pFJ CH
C353	043-4200-90	6.3V 2.2uF	C646	045-1007-50	10 +/-0.5pF CH	C849	168-1022-55	1000pF K
C354	043-4200-90	6.3V 2.2uF	C647	043-4306-90	1uF	C850	168-1042-38	50V 0.1uF K
C355	046-1042-78	0.1uF K B	C648	043-4306-90	1uF	C851	168-1042-38	50V 0.1uF K
C356	046-1032-78	0.01uF K B	C651	043-4306-90	1uF	C852	168-1042-38	50V 0.1uF K
C357	046-1042-78	0.1uF K B	C652	043-0605-90	10V 2.2uF	C853	046-1042-78	0.1uF K B
C358	043-4200-90	6.3V 2.2uF	C653	043-4306-90	1uF	C854	ADZ0265	35V 47uF
C359	046-1042-78	0.1uF K B	C654	043-4306-90	1uF	C895	046-1022-58	50V 1000pF
C360	046-1032-78	0.01uF K B	C655	043-0602-90	10uF	C896	043-5709-90	50V 1uF K
C361	046-1042-78	0.1uF K B	C658	043-4306-90	1uF	C897	043-5709-90	50V 1uF K
C362	043-0603-90	16V 10uF	C659	043-4306-90	1uF	C898	043-5709-90	50V 1uF K
C363	043-0603-90	16V 10uF	C660	043-0602-90	10uF	C901	046-1042-78	0.1uF K B
C365	043-4200-90	6.3V 2.2uF	C661	166-3096-50	3pF +/-0.25pF CK	C904	043-0604-90	25V 10uF B
C367	043-4200-90	6.3V 2.2uF	C662	045-4701-50	47pF CH	C905	165-2263-55	35V 22uF
C368	043-4200-90	6.3V 2.2uF	C663	043-4700-95	50V 33pF	C906	168-1042-38	50V 0.1uF K
C369	043-4200-90	6.3V 2.2uF	C705	168-3332-78	0.033uF K	C907	043-4402-90	16V 1uF
C372	046-1042-78	0.1uF K B	C711	043-4402-90	16V 1uF	C908	165-2263-15	6.3V 22uF
C373	046-1042-78	0.1uF K B	C713	165-2263-15	6.3V 22uF	C909	046-1042-78	0.1uF K B
C374	046-1042-78	0.1uF K B	C714	043-4306-90	1uF	C910	046-1022-58	50V 1000pF
C375	043-0603-90	16V 10uF	C716	043-4402-90	16V 1uF	C911	043-0604-90	25V 10uF B
C376	046-1042-78	0.1uF K B	C717	165-2263-15	6.3V 22uF	C912	046-1022-58	50V 1000pF
C377	046-1042-78	0.1uF K B	C718	165-2263-15	6.3V 22uF	C913	043-0604-90	25V 10uF B
C378	046-1042-78	0.1uF K B	C719	043-4402-90	16V 1uF	C914	046-2232-78	0.022uF K B
C379	046-1042-78	0.1uF K B	C722	043-4306-90	1uF	C915	046-2232-78	0.022uF K B
C380	042-4035-91	6.3V 100uF	C723	046-1042-78	0.1uF K B	C916	168-2232-55	0.022uF K
C381	046-1042-78	0.1uF K B	C724	046-1042-78	0.1uF K B	C917	AAZ0261	25V 1uF
C382	046-1042-78	0.1uF K B	C725	046-1042-78	0.1uF K B	C918	043-0605-90	10V 2.2uF
C383	046-1042-78	0.1uF K B	C726	046-1042-78	0.1uF K B	C919	043-0570-90	16V 2.2uF K
C401	046-1042-78	0.1uF K B	C727	046-1042-78	0.1uF K B	C920	168-1052-78	16V 1uF K
C402	045-1096-50	1pF 50V	C728	046-1042-78	0.1uF K B	C921	168-2242-58	0.22uF K
C403	046-1042-78	0.1uF K B	C729	046-1042-78	0.1uF K B	C1003	046-1042-78	0.1uF K B
C405	046-1042-78	0.1uF K B	C730	046-1042-78	0.1uF K B	C1004	043-0605-90	10V 2.2uF
C406	046-1042-78	0.1uF K B	C731	168-3332-78	0.033uF K	C1005	043-0603-90	16V 10uF
C408	046-1032-78	0.01uF K B	C732	043-4306-90	1uF	C1006	046-1042-78	0.1uF K B
C418	046-1032-78	0.01uF K B	C735	043-4306-90	1uF	C1007	046-1042-78	0.1uF K B
C420	043-4306-90	1uF	C743	046-1022-58	50V 1000pF	C1008	043-0603-90	16V 10uF
C422	165-4763-15	6.3V 47uF	C748	043-4306-90	1uF	C1009	168-4742-78	0.47uF K
C423	165-4763-15	6.3V 47uF	C749	043-4306-90	1uF	C1011	043-0605-90	10V 2.2uF
C501	046-1032-78	0.01uF K B	C750	043-4306-90	1uF	C1014	165-4763-15	6.3V 47uF
C502	178-1062-88	10uF	C751	043-4306-90	1uF	C1113	043-4402-90	16V 1uF
C504	046-1032-78	0.01uF K B	C801	ADZ0265	35V 47uF	C1115	178-1062-88	10uF
C505	046-1042-78	0.1uF K B	C802	043-0576-90	50V 10uF	C1201	168-3312-55	330pF K
C506	043-0570-90	16V 2.2uF K	C803	043-6705-90	50V 1uF	C1212	168-1042-38	50V 0.1uF K
C507	046-1042-78	0.1uF K B	C804	045-1011-50	100pFJ CH	C1214	043-5600-90	0.10uF
C508	046-1042-78	0.1uF K B	C805	043-0570-90	16V 2.2uF K	C1216	046-1042-78	0.1uF K B
C509	043-0570-90	16V 2.2uF K	C806	043-0574-90	25V 1.0uF	C1218	046-1042-78	0.1uF K B
C510	046-1042-78	0.1uF K B	C807	043-0574-90	25V 1.0uF	C1219	168-3322-55	3300pF K
C511	046-1042-78	0.1uF K B	C808	043-0576-90	50V 10uF	C1224	046-1032-78	0.01uF K B
C512	046-1042-78	0.1uF K B	C809	043-5709-90	50V 1uF K	C1225	043-4402-90	16V 1uF
C513	046-1042-78	0.1uF K B	C810	046-3332-78	0.033uF K B	C1226	043-0603-90	16V 10uF
C514	046-1042-78	0.1uF K B	C811	043-7504-90	22uF	C1227	043-5709-90	50V 1uF K
C515	046-1042-78	0.1uF K B	C812	045-3311-50	330pFJ CH	C1230	168-3312-55	330pF K
C516	046-1042-78	0.1uF K B	C813	043-0604-90	25V 10uF B	C1231	168-2222-55	2200pF K
C517	043-0570-90	16V 2.2uF K	C814	168-4732-58	50V 0.047uF K	C1232	166-3311-50	330pF CH
C518	046-1042-78	0.1uF K B	C815	046-3332-78	0.033uF K B	C1234	166-3311-50	330pF CH
C519	168-1052-78	16V 1uF K	C816	043-0603-90	16V 10uF	C1303	043-7402-90	16V 22uF
C520	168-1052-78	16V 1uF K	C817	043-0603-90	16V 10uF	C1304	046-4722-38	50V 4700pF
C521	043-7402-90	16V 22uF	C818	043-6705-90	50V 1uF	C1310	043-7402-90	16V 22uF
C522	043-7402-90	16V 22uF	C821	168-2232-55	0.022uF K	C1311	046-4722-38	50V 4700pF
C523	043-0570-90	16V 2.2uF K	C822	046-6832-78	0.068uF K B	C1312	166-6097-50	6pF +/-0.5pF CH
C524	043-0570-90	16V 2.2uF K	C823	168-4732-58	50V 0.047uF K	C1313	166-6097-50	6pF +/-0.5pF CH
C525	043-0570-90	16V 2.2uF K	C824	AAZ0261	25V 1uF	C1314	043-0563-90	16V 47uF
C526	043-0570-90	16V 2.2uF K	C825	043-0604-90	25V 10uF B	C1350	166-6097-50	6pF +/-0.5pF CH
C527	043-0570-90	16V 2.2uF K	C826	046-4732-78	0.047uF K B	C1351	166-6097-50	6pF +/-0.5pF CH
C528	043-0570-90	16V 2.2uF K	C827	046-1042-78	0.1uF K B	C1352	043-0563-90	16V 47uF
C529	043-0570-90	16V 2.2uF K	C829	043-5709-90	50V 1uF K	C1355	046-1042-78	0.1uF K B
C530	045-1801-50	18pFJ CH	C830	043-5709-90	50V 1uF K	C1356	046-1042-78	0.1uF K B
C601	046-1042-78	0.1uF K B	C833	045-1011-50	100pFJ CH	C1357	046-1042-78	0.1uF K B

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C1358	046-1042-78	0.1uF K B	D1002	001-2630-90	1SS420-TPL3,F	IC1302	051-3776-90	NJM2815GM1-51A
C1360	168-1052-78	16V 1uF K	D1003	001-2630-90	1SS420-TPL3,F	IC1304	051-3776-70	NJM2816GM1-51A(Te2)
C1361	043-0603-90	16V 10uF	D1204	001-2412-90	RR264M-400	IC1306	-----	TPS2546QRTER Q1
C1401	168-3322-55	3300pF K	D1205	001-2412-90	RR264M-400			(Thermal pad)
C1402	168-3322-55	3300pF K	D1206	001-2403-90	M1F60			(696090-051)
C1403	168-3322-55	3300pF K	D1211	001-2630-90	1SS420-TPL3,F	IC1401	051-7563-90	NLV27WZ16DFT 2G
C1404	046-1042-78	0.1uF K B	D1301	001-2410-90	D3F60	IC1501	051-3785-90	BD35395FJ-ME2
C1501	043-7402-90	16V 22uF	D1401	001-4910-90	DF5A6.8F-L,F	IC1502	-----	SC187ULTRT
C1502	168-1052-78	16V 1uF K	D1402	001-4910-90	DF5A6.8F-L,F			(Thermal pad)
C1503	043-7200-90	6.3V 47uF	FC601	060-2234-90	WFC72F1575CH	IC1503	-----	SC187ULTRT
C1506	046-1022-58	50V 1000pF	FL901	BMZ0251	BK20104L121-T			(Thermal pad)
C1507	046-4732-78	0.047uF K B	FL902	BMZ0251	BK20104L121-T	IC1504	051-3707-80	S-1133B00-U5T1U
C1508	045-1007-50	10 +/-0.5pF CH	FL903	BMZ0251	BK20104L121-T	IC1505	-----	SC183CULTRT (PAD)
C1509	046-1042-78	0.1uF K B	FL904	BMZ0251	BK20104L121-T			(358800-051)
C1510	043-7402-90	16V 22uF	FL905	BMZ0251	BK20104L121-T	IC1507	051-3761-90	BD00HC0EEFJ-ME2
C1511	168-1052-78	16V 1uF K	IC101	-----	R8A77910DB20	IC1508	051-3774-90	NJM11100F1
C1512	043-0559-90	6.3V 22uF			BA(SoC)(BGA)	IC1511	-----	TLV62065TDSG
C1513	043-0559-90	6.3V 22uF	IC102	-----	(044100-052)			RQ1
C1515	046-1022-58	50V 1000pF			MT41K256M16H			(Step Down Converter)
C1516	046-4732-78	0.047uF K B			A125IT:E(BGA)			(SON Package)
C1517	045-1007-50	10 +/-0.5pF CH	IC103	-----	(DDR3-SDRAM)			(366490-051)
C1518	046-1042-78	0.1uF K B			(934210-051)	J401	074-2255-09	FH33-9S-0.5SH 9P
C1523	043-0574-90	25V 1.0uF			MT41K256M16H	J402	074-2255-09	FH33-9S-0.5SH 9P
C1525	168-1052-78	16V 1uF K	IC106	-----	A125IT:E(BGA)	J501	074-8017-91	16P
C1527	168-1052-78	16V 1uF K			(DDR3-SDRAM)	J902	074-2248-50	50P
C1528	046-1022-58	50V 1000pF			(934210-051)	J1001	074-2248-80	80P
C1529	168-1052-78	16V 1uF K			S25FL127SABM	J1002	074-2248-40	SOCKET(40P)
C1530	168-1052-78	16V 1uF K			FI000	J1003	074-2248-60	60P
C1532	168-1052-78	16V 1uF K			(SPI-FLASH)	J1201	074-4017-24	24P
C1534	168-1052-78	16V 1uF K			(359900-052)	J1301	074-4099-00	MX49004HQ1
C1535	043-0559-90	6.3V 22uF	IC201	051-5488-90	NJU7707F03A1-TE2	J1304	074-4099-30	5P
C1539	168-1062-98	10uF K	IC202	051-7547-90	SN74LVC1G07D	L301	BMZ0211	BLM18PG121SN 1D
C1541	168-1062-98	10uF K			CKR	L302	BMZ0211	BLM18PG121SN 1D
C1542	046-1042-78	0.1uF K B	IC203	051-7547-90	SN74LVC1G07D	L303	BMZ0211	BLM18PG121SN 1D
C1543	165-1073-35	16V 100uF			CKR	L304	BMZ0211	BLM18PG121SN 1D
C1545	046-1032-78	0.01uF K B	IC401	051-6934-90	MFI341S2313	L305	BMZ0211	BLM18PG121SN 1D
C1546	168-1052-78	16V 1uF K	IC402	051-6226-70	CY25404ZXI-301T	L306	BMZ0211	BLM18PG121SN 1D
C1547	168-1052-78	16V 1uF K	IC501	-----	MTFC4GLGDQ-AIT Z(EMMC)(BGA)	L307	BMZ0211	BLM18PG121SN 1D
C1552	043-6400-90	16V 4.7uF K			(985320-051)	L401	BMZ0211	BLM18PG121SN 1D
C1553	046-1042-78	0.1uF K B			XV4001KC	L402	BMZ0211	BLM18PG121SN 1D
C1554	043-7200-90	6.3V 47uF	IC603	060-8166-90	NCP380HSNAJA	L501	BMZ0211	BLM18PG121SN 1D
C1555	043-0570-90	16V 2.2uF K	IC606	051-6945-90	AT1G	L502	BMZ0211	BLM18PG121SN 1D
C1558	165-1073-35	16V 100uF			UBX-G7020-KT	L605	BMZ0221	BLM15AG601SN 1D
C1559	042-4046-92	35V 100uF	IC607	-----	-C1010A	L606	010-3101-66	MLK1005S22NJT
C1567	046-1042-78	0.1uF K B			(GPS Receiver)	L608	BMZ0211	BLM18PG121SN 1D
C1568	043-0603-90	16V 10uF			(QFN package)			1k ohm/100MHz
C1569	178-1062-88	10uF			(462990-051)			220 ohm/100MHz
C1570	045-2201-50	22pFJ CH	IC703	051-6479-00	AK8858VQ			8.2nH
C1571	165-4763-35	16V 47uF	IC801	-----	OZ528ILN-B1			BLM18PG471SH 1D
C1573	165-4763-35	16V 47uF			-0-TR			BLM18PG471SH 1D
C1575	165-4763-15	6.3V 47uF			(Thermal pad)			BLM18PG471SH 1D
C1576	046-1042-78	0.1uF K B			(394090-051)			BLM18PG471SH 1D
C1577	046-1042-78	0.1uF K B			BD9465MUV-ME2			BLM18PG471S H1D
C1578	165-4763-15	6.3V 47uF	IC802	-----	(LED driver)			
C1579	046-1042-78	0.1uF K B			(QFN)			
C1580	165-4763-15	6.3V 47uF			(611690-051)			
C1582	165-2263-35	16V 22uF	IC803	051-7221-48	TC7SZ04FU			
C1585	043-4306-90	1uF	IC804	-----	BD00D0AWHFP-TR			
C1586	043-4306-90	1uF			(Voltage regulator)			
C1587	043-4306-90	1uF			(Thermal pad)			
C1589	045-1011-50	100pFJ CH			(370990-051)			
C1591	046-1022-58	50V 1000pF	IC901	051-7202-90	MC74VHC1G32D			
C1592	043-7300-90	10V 47uF			FT2G			
C1612	165-4763-15	6.3V 47uF	IC902	051-3079-90	NJM2742V			
C3811	043-5709-90	50V 1uF K	IC903	051-7222-60	MC74VHC1G08D			
C3815	042-4059-90	35V 100uF			FT2G			
D602	001-2630-90	1SS420-TPL3,F	IC1001	051-6718-90	AK5357VT-E2			
D801	001-2620-90	RB060L-40	IC1202	051-7281-60	MC74VHC1G14D			
D802	001-2620-90	RB060L-40			FT2G			
D803	001-2620-90	RB060L-40			TA75S393F			
D804	001-2630-90	1SS420-TPL3,F	IC1203	051-3407-90	TJA1042T/3,118			
D805	001-2630-90	1SS420-TPL3,F	IC1204	051-6663-80				
D806	001-2660-90	RB050L-60DDTE25						
D1001	001-2630-90	1SS420-TPL3,F						

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
L801	010-3057-92	47uH 620mA	NF311	060-3138-90	NFM18PC105R0	R101	032-0221-75	1/16W 47k ohm F
L802	010-3514-90	15uH M			J3D	R102	032-0221-75	1/16W 47k ohm F
L803	010-3057-92	47uH 620mA	NF312	060-3138-90	NFM18PC105R0	R104	032-0221-90	1/16W 240 ohm 1%
L804	010-3057-92	47uH 620mA			J3D	R110	033-0000-05	1/16W 0 ohm
L805	010-3550-50	33uH	NF313	060-3130-91	NFM21PC475B1	R111	033-0000-05	1/16W 0 ohm
L806	010-3550-50	33uH			A3D	R126	032-0221-90	1/16W 240 ohm 1%
L901	010-3127-91	220 ohm/100MHz	NF314	060-3138-90	NFM18PC105R0	R127	032-0221-90	1/16W 240 ohm 1%
L903	010-3127-91	220 ohm/100MHz			J3D	R128	032-0221-00	1/16W 68 ohm 1%
L904	010-3127-91	220 ohm/100MHz	NF315	060-3138-90	NFM18PC105R0	R148	032-0221-99	1/16W 100 ohm 1%
L905	010-3100-56	0.33uH J			J3D	R153	032-0221-00	1/16W 68 ohm 1%
L1001	BMZ0211	BLM18PG121SN	NF316	060-3138-90	NFM18PC105R0	R155	033-2701-15	1/16W 27 ohm J
		1D			J3D	R156	033-2701-15	1/16W 27 ohm J
L1002	BMZ0211	BLM18PG121SN	NF317	060-3138-90	NFM18PC105R0	R157	033-2701-15	1/16W 27 ohm J
		1D			J3D	R158	033-2701-15	1/16W 27 ohm J
L1003	010-3127-91	220 ohm/100MHz	NF318	060-3138-90	NFM18PC105R0	R159	033-2701-15	1/16W 27 ohm J
L1004	BMZ0211	BLM18PG121SN			J3D	R160	033-2701-15	1/16W 27 ohm J
		1D	NF319	060-3138-90	NFM18PC105R0	R161	033-2701-15	1/16W 27 ohm J
L1005	010-3114-53	MMZ1005S601CT			J3D	R162	033-2701-15	1/16W 27 ohm J
L1006	010-3114-53	MMZ1005S601CT	NF320	060-3138-90	NFM18PC105R0	R163	033-2701-15	1/16W 27 ohm J
L1007	010-3104-54	600 ohm/100MHz			J3D	R164	033-2701-15	1/16W 27 ohm J
L1008	BMZ0211	BLM18PG121SN	NF321	060-3138-90	NFM18PC105R0	R165	033-2701-15	1/16W 27 ohm J
		1D			J3D	R166	033-2701-15	1/16W 27 ohm J
L1009	BMZ0211	BLM18PG121SN	NF1201	010-3609-90	DLW43SH510XK	R167	033-2701-15	1/16W 27 ohm J
		1D			2L	R168	033-2701-15	1/16W 27 ohm J
L1010	010-3114-53	MMZ1005S601CT	P601	092-2249-00	ANT-RECEPT	R169	033-2701-15	1/16W 27 ohm J
L1011	010-3114-53	MMZ1005S601CT	P1401	076-6023-07	7P	R170	033-2701-15	1/16W 27 ohm J
L1012	010-3114-53	MMZ1005S601CT	P1501	076-6021-60	10P	R171	033-2701-15	1/16W 27 ohm J
L1013	010-3114-53	MMZ1005S601CT	Q401	125-2046-91	DTC114EUBTL	R172	033-2701-15	1/16W 27 ohm J
L1014	010-3114-53	MMZ1005S601CT	Q501	191-1197-50	2SB1197K Q,R	R173	033-2701-15	1/16W 27 ohm J
L1101	BMZ0211	BLM18PG121SN	Q502	125-2046-91	DTC114EUBTL	R174	032-0221-74	1/16W 10k ohm 1%
		1D	Q801	CAZ0331	2SC4081T106R	R175	033-2701-15	1/16W 27 ohm J
L1201	010-2285-70	120 ohm/100MHz	Q802	190-1576-60	2SA1576UBTL	R176	033-2701-15	1/16W 27 ohm J
L1203	010-2285-70	120 ohm/100MHz	Q803	125-2027-92	DTC124EUA	R179	033-2701-15	1/16W 27 ohm J
L1205	010-2285-70	120 ohm/100MHz	Q804	125-2027-92	DTC124EUA	R180	033-2701-15	1/16W 27 ohm J
L1207	010-3458-51	LBC2518T220MV	Q805	125-0021-92	DTA124EUA	R181	033-2701-15	1/16W 27 ohm J
L1301	BEZ0122	DLP11SN900HL	Q806	190-1576-60	2SA1576UBTL	R182	033-2701-15	1/16W 27 ohm J
		2L	Q807	190-1576-60	2SA1576UBTL	R183	033-2701-15	1/16W 27 ohm J
L1304	BEZ0122	DLP11SN900HL	Q808	CAZ0331	2SC4081T106R	R184	032-0221-33	1/16W 20k ohm F
		2L	Q809	125-2027-91	DTC114EUA	R185	032-0221-33	1/16W 20k ohm F
L1306	010-3104-54	600 ohm/100MHz	Q810	CAZ0331	2SC4081T106R	R186	032-0221-33	1/16W 20k ohm F
L1501	010-3564-50	1.5uH	Q811	190-1576-60	2SA1576UBTL	R187	032-0221-33	1/16W 20k ohm F
L1502	010-3564-50	1.5uH	Q812	125-8032-90	RVQ040N05 TR	R188	032-0221-33	1/16W 20k ohm F
L1504	010-3108-56	100MHz	Q819	192-5810-00	2SC5810 TE12L	R189	032-0221-33	1/16W 20k ohm F
L1508	010-3548-50	2.2uH	Q820	125-2046-91	DTC114EUBTL	R190	032-0221-33	1/16W 20k ohm F
L1510	010-3547-51	1.0uH	Q901	125-2046-97	DTC114YUB TL	R191	032-0221-33	1/16W 20k ohm F
L1512	BMZ0211	BLM18PG121SN	Q902	190-1576-60	2SA1576UBTL	R192	032-0221-33	1/16W 20k ohm F
		1D	Q1001	125-2027-91	DTC114EUA	R193	032-0221-33	1/16W 20k ohm F
L1513	010-3108-56	100MHz	Q1002	125-2027-91	DTC114EUA	R194	032-0221-33	1/16W 20k ohm F
L1514	010-3108-56	100MHz	Q1003	125-2027-91	DTC114EUA	R195	032-0221-33	1/16W 20k ohm F
L1515	BMZ0211	BLM18PG121SN	Q1004	125-0035-91	DTA114EUBTL	R196	032-0221-99	1/16W 100 ohm 1%
		1D	Q1005	125-2046-91	DTC114EUBTL	R197	032-0221-99	1/16W 100 ohm 1%
L1516	BMZ0211	BLM18PG121SN	Q1201	CAZ0331	2SC4081T106R	R198	032-0221-99	1/16W 100 ohm 1%
		1D	Q1202	CAZ0331	2SC4081T106R	R199	032-0221-51	1/16W 4.7k ohm F
L1517	BMZ0211	BLM18PG121SN	Q1206	125-0035-91	DTA114EUBTL	R201	032-0221-02	1/16W 33 ohm 1%
		1D	Q1207	CAZ0331	2SC4081T106R	R202	032-0221-02	1/16W 33 ohm 1%
NF301	060-3138-90	NFM18PC105R0	Q1210	125-9028-90	UMX1N-TN	R203	032-0221-02	1/16W 33 ohm 1%
		J3D	Q1503	192-4116-00	2SC4116	R204	032-0221-02	1/16W 33 ohm 1%
NF302	060-3138-90	NFM18PC105R0	Q1504	125-7016-90	RZQ050P01TR	R205	032-0221-02	1/16W 33 ohm 1%
		J3D	Q4801	125-2027-92	DTC124EUA	R206	032-0221-02	1/16W 33 ohm 1%
NF303	060-3138-90	NFM18PC105R0	Q4804	CAZ0331	2SC4081T106R	R207	033-6801-15	1/16W 68 ohm J
		J3D	Q4805	125-2027-91	DTC114EUA	R208	032-0221-02	1/16W 33 ohm 1%
NF304	060-3138-90	NFM18PC105R0	Q4806	125-8062-90	RHU002N06FRA	R209	032-0221-02	1/16W 33 ohm 1%
		J3D			T106	R210	032-0221-74	1/16W 10k ohm 1%
NF305	060-3138-90	NFM18PC105R0	Q4807	125-8062-90	RHU002N06FRA	R211	032-0221-74	1/16W 10k ohm 1%
		J3D			T106	R212	032-0221-02	1/16W 33 ohm 1%
NF306	060-3138-90	NFM18PC105R0	Q4808	125-8062-90	RHU002N06FRA	R213	032-0221-02	1/16W 33 ohm 1%
		J3D			T106	R214	032-0221-02	1/16W 33 ohm 1%
NF307	060-3138-90	NFM18PC105R0	Q4809	125-8062-90	RHU002N06FRA	R215	032-0221-02	1/16W 33 ohm 1%
		J3D			T106	R216	032-0221-02	1/16W 33 ohm 1%
NF308	060-3138-90	NFM18PC105R0	Q4810	125-8062-90	RHU002N06FRA	R217	032-0221-02	1/16W 33 ohm 1%
		J3D			T106	R218	032-0221-02	1/16W 33 ohm 1%
NF309	060-3138-90	NFM18PC105R0	Q4811	125-8062-90	RHU002N06FRA	R219	032-0221-75	1/16W 47k ohm F
		J3D			T106	R220	032-0221-02	1/16W 33 ohm 1%
NF310	060-3138-90	NFM18PC105R0	Q4812	125-8062-90	RHU002N06FRA	R221	032-0221-02	1/16W 33 ohm 1%
		J3D			T106	R222	032-0221-02	1/16W 33 ohm 1%

REF NO.	PART NO.	DESCRIPTION
R224	033-4701-15	1/16W 47 ohm J
R225	032-0221-74	1/16W 10k ohm 1%
R226	032-0221-74	1/16W 10k ohm 1%
R227	032-0221-74	1/16W 10k ohm 1%
R228	032-0221-02	1/16W 33 ohm 1%
R229	032-0221-02	1/16W 33 ohm 1%
R230	032-0221-02	1/16W 33 ohm 1%
R231	032-0221-74	1/16W 10k ohm 1%
R233	119-0000-05	1/10W 0 ohm JW
R235	032-0221-02	1/16W 33 ohm 1%
R236	032-0221-02	1/16W 33 ohm 1%
R242	032-0221-02	1/16W 33 ohm 1%
R243	032-0221-02	1/16W 33 ohm 1%
R245	032-0221-74	1/16W 10k ohm 1%
R249	032-0221-02	1/16W 33 ohm 1%
R250	032-0221-74	1/16W 10k ohm 1%
R252	032-0221-08	1/16W 1k ohm F
R256	032-0221-74	1/16W 10k ohm 1%
R257	032-0221-02	1/16W 33 ohm 1%
R258	032-0221-02	1/16W 33 ohm 1%
R259	032-0221-02	1/16W 33 ohm 1%
R260	033-2221-15	1/16W 2.2k ohm J
R261	033-2221-15	1/16W 2.2k ohm J
R267	032-0221-02	1/16W 33 ohm 1%
R268	032-0221-02	1/16W 33 ohm 1%
R270	032-0221-73	1/16W 2.2k ohm 1%
R271	032-0221-02	1/16W 33 ohm 1%
R273	032-0221-02	1/16W 33 ohm 1%
R274	032-0221-02	1/16W 33 ohm 1%
R275	032-0221-02	1/16W 33 ohm 1%
R276	032-0221-02	1/16W 33 ohm 1%
R277	032-0221-02	1/16W 33 ohm 1%
R278	032-0221-51	1/16W 4.7k ohm F
R279	032-0221-74	1/16W 10k ohm 1%
R280	032-0221-08	1/16W 1k ohm F
R281	032-0221-02	1/16W 33 ohm 1%
R282	032-0221-73	1/16W 2.2k ohm 1%
R283	032-0221-51	1/16W 4.7k ohm F
R287	032-0221-74	1/16W 10k ohm 1%
R288	032-0221-74	1/16W 10k ohm 1%
R289	032-0221-74	1/16W 10k ohm 1%
R290	032-0221-02	1/16W 33 ohm 1%
R291	032-0221-83	1/16W 3.3k ohm F
R292	032-0221-51	1/16W 4.7k ohm F
R293	032-0221-75	1/16W 47k ohm F
R294	032-0221-75	1/16W 47k ohm F
R296	032-0221-75	1/16W 47k ohm F
R297	032-0221-75	1/16W 47k ohm F
R298	032-0221-75	1/16W 47k ohm F
R299	032-0221-74	1/16W 10k ohm 1%
R302	119-0000-05	1/10W 0 ohm JW
R306	033-1091-15	1/16W 1 ohm
R307	033-1091-15	1/16W 1 ohm
R308	033-1091-15	1/16W 1 ohm
R309	033-1091-15	1/16W 1 ohm
R310	033-1091-15	1/16W 1 ohm
R311	032-0221-52	1/16W 1.8k ohm F
R312	032-0221-52	1/16W 1.8k ohm F
R313	033-1091-15	1/16W 1 ohm
R314	033-1091-15	1/16W 1 ohm
R315	033-1091-15	1/16W 1 ohm
R316	033-1091-15	1/16W 1 ohm
R317	033-1091-15	1/16W 1 ohm
R319	033-1091-15	1/16W 1 ohm
R321	033-1091-15	1/16W 1 ohm
R322	033-1091-15	1/16W 1 ohm
R323	033-1091-15	1/16W 1 ohm
R324	033-1091-15	1/16W 1 ohm
R325	033-1091-15	1/16W 1 ohm
R326	033-1091-15	1/16W 1 ohm
R401	032-0221-51	1/16W 4.7k ohm F
R410	032-0221-75	1/16W 47k ohm F

REF NO.	PART NO.	DESCRIPTION
R411	033-0000-05	1/16W 0 ohm
R412	032-0221-99	1/16W 100 ohm 1%
R414	032-0221-02	1/16W 33 ohm 1%
R416	032-0221-99	1/16W 100 ohm 1%
R418	032-0221-02	1/16W 33 ohm 1%
R421	032-0221-99	1/16W 100 ohm 1%
R422	032-0221-83	1/16W 3.3k ohm F
R437	032-0221-74	1/16W 10k ohm 1%
R441	032-0221-08	1/16W 1k ohm F
R442	032-0221-04	1/16W 10 ohm F
R445	032-0221-74	1/16W 10k ohm 1%
R446	033-2201-15	1/16W 22 ohm J
R448	032-0221-74	1/16W 10k ohm 1%
R449	032-0221-74	1/16W 10k ohm 1%
R450	032-0221-74	1/16W 10k ohm 1%
R452	032-0221-74	1/16W 10k ohm 1%
R454	032-0221-74	1/16W 10k ohm 1%
R455	032-0221-74	1/16W 10k ohm 1%
R456	032-0221-74	1/16W 10k ohm 1%
R457	032-0221-74	1/16W 10k ohm 1%
R458	032-0221-74	1/16W 10k ohm 1%
R459	032-0221-74	1/16W 10k ohm 1%
R460	032-0221-74	1/16W 10k ohm 1%
R462	032-0221-74	1/16W 10k ohm 1%
R463	032-0221-74	1/16W 10k ohm 1%
R464	032-0221-74	1/16W 10k ohm 1%
R465	032-0221-74	1/16W 10k ohm 1%
R466	032-0221-74	1/16W 10k ohm 1%
R467	032-0221-74	1/16W 10k ohm 1%
R468	032-0221-74	1/16W 10k ohm 1%
R469	032-0221-74	1/16W 10k ohm 1%
R470	032-0221-74	1/16W 10k ohm 1%
R471	032-0221-74	1/16W 10k ohm 1%
R472	032-0221-74	1/16W 10k ohm 1%
R474	032-0221-74	1/16W 10k ohm 1%
R475	032-0221-74	1/16W 10k ohm 1%
R476	032-0221-74	1/16W 10k ohm 1%
R477	119-0000-05	1/10W 0 ohm JW
R478	119-0000-05	1/10W 0 ohm JW
R479	119-0000-05	1/10W 0 ohm JW
R480	119-0000-05	1/10W 0 ohm JW
R501	032-0221-02	1/16W 33 ohm 1%
R502	032-0221-02	1/16W 33 ohm 1%
R503	032-0221-02	1/16W 33 ohm 1%
R504	032-0221-02	1/16W 33 ohm 1%
R505	032-0221-02	1/16W 33 ohm 1%
R506	032-0221-99	1/16W 100 ohm 1%
R507	032-0221-75	1/16W 47k ohm F
R508	032-0221-74	1/16W 10k ohm 1%
R509	033-5611-15	1/16W 560 ohm J
R510	032-0221-08	1/16W 1k ohm F
R511	033-2221-15	1/16W 2.2k ohm J
R514	032-0221-02	1/16W 33 ohm 1%
R515	032-0221-02	1/16W 33 ohm 1%
R516	032-0221-02	1/16W 33 ohm 1%
R517	032-0221-02	1/16W 33 ohm 1%
R518	032-0221-02	1/16W 33 ohm 1%
R519	032-0221-02	1/16W 33 ohm 1%
R520	032-0221-02	1/16W 33 ohm 1%
R521	032-0221-02	1/16W 33 ohm 1%
R522	032-0221-02	1/16W 33 ohm 1%
R523	032-0221-99	1/16W 100 ohm 1%
R524	033-0000-05	1/16W 0 ohm
R525	032-0221-75	1/16W 47k ohm F
R528	032-0221-74	1/16W 10k ohm 1%
R601	033-0000-05	1/16W 0 ohm
R602	033-0000-05	1/16W 0 ohm
R612	033-0000-05	1/16W 0 ohm
R613	033-0000-05	1/16W 0 ohm
R618	116-1001-15	1/4W 10 ohm
R619	032-0225-55	1/16W 7.5k ohm +/- 0.5%
R620	032-0225-52	1/16W 10k ohm 0.5%

REF NO.	PART NO.	DESCRIPTION
R626	116-1001-15	1/4W 10 ohm
R627	032-0221-75	1/16W 47k ohm F
R629	033-0000-05	1/16W 0 ohm
R631	032-0221-02	1/16W 33 ohm 1%
R701	119-1011-15	1/10W 100 ohm
R702	033-0000-05	1/16W 0 ohm
R707	119-0000-05	1/10W 0 ohm JW
R709	AQZ0491	1/10W 47 ohm 1%
R710	032-0221-88	1/16W 30 ohm F
R739	032-0221-02	1/16W 33 ohm 1%
R740	032-0221-61	1/16W 6.8k ohm F
R747	119-0000-05	1/10W 0 ohm JW
R749	032-0221-00	1/16W 68 ohm 1%
R754	AQZ0491	1/10W 47 ohm 1%
R755	032-0221-88	1/16W 30 ohm F
R756	033-0000-05	1/16W 0 ohm
R757	032-0221-83	1/16W 3.3k ohm F
R801	032-0221-83	1/16W 3.3k ohm F
R802	032-0221-65	1/16W 68k ohm F
R803	119-0000-05	1/10W 0 ohm JW
R804	119-2231-15	1/10W 22k ohm
R805	032-0221-74	1/16W 10k ohm 1%
R806	032-0221-40	1/10W 1.3k ohm F
R807	032-0210-74	1/10W 470 ohm F
R808	032-0210-16	1/10W 1.2k ohm F
R809	032-0210-36	1/10W 22 ohm F
R810	AQZ0522	1/10W 10k ohm 1%
R811	032-0210-85	1/10W 150 ohm F
R812	032-0221-51	1/16W 4.7k ohm F
R813	032-0221-74	1/16W 10k ohm 1%
R814	032-0221-74	1/16W 10k ohm 1%
R815	119-2221-15	1/10W 2.2k ohm
R816	032-0221-74	1/16W 10k ohm 1%
R818	032-0221-51	1/16W 4.7k ohm F
R821	032-0221-59	1/16W 220 ohm F
R822	032-0221-33	1/16W 20k ohm F
R823	033-4711-15	1/16W 470 ohm J
R824	032-0210-95	1/10W 2k ohm F
R825	032-0210-83	1/10W 3.9k ohm 1%
R826	032-0210-88	1/10W 5.1k ohm F
R827	032-0210-95	1/10W 2k ohm F
R828	AQZ0489	1/10W 39 ohm 1%
R829	032-0221-83	1/16W 3.3k ohm F
R830	032-0221-56	1/16W 22k ohm F
R831	032-0221-56	1/16W 22k ohm F
R832	032-0221-56	1/16W 22k ohm F
R833	032-0221-75	1/16W 47k ohm F
R837	032-0221-86	1/16W 82k ohm F
R838	032-0221-09	1/16W 33k ohm F
R839	032-0210-75	1/10W 820 ohm F
R840	032-0210-00	1/10W 330 ohm F
R841	032-0210-75	1/10W 820 ohm F
R842	032-0210-00	1/10W 330 ohm F
R843	032-0210-70	1/10W 680 ohm 1%
R844	032-0210-63	1/10W 3k ohm F
R845	032-0210-64	1/10W 1k ohm F
R846	032-0215-61	1/10W 7.5k ohm(F)
R847	032-0246-52	3/4W 0.11 ohm
R848	032-0246-52	3/4W 0.11 ohm
R849	033-0000-05	1/16W 0 ohm
R850	032-0221-84	1/16W 27k ohm F
R851	032-0221-38	1/16W 300k ohm
R852	032-0221-07	1/16W 56k ohm F
R853	032-0221-95	1/16W 2.7k ohm F
R854	032-0221-51	1/16W 4.7k ohm F
R855	032-0221-09	1/16W 33k ohm F
R856	032-0221-84	1/16W 27k ohm F
R858	032-0221-99	1/16W 100 ohm 1%
R861	032-0221-70	1/16W 680k ohm F
R862	032-0221-64	1/16W 39k ohm F
R863	032-0221-86	1/16W 82k ohm F
R864	116-7511-15	1/4W 750 ohm
R865	033-1101-15	1/16W 11 ohm

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R866	033-0000-05	1/16W 0 ohm	R949	032-0221-84	1/16W 27k ohm F	R1234	032-0221-74	1/16W 10k ohm 1%
R867	032-0221-51	1/16W 4.7k ohm F	R950	032-0221-84	1/16W 27k ohm F	R1235	032-0221-08	1/16W 1k ohm F
R868	032-0221-51	1/16W 4.7k ohm F	R951	032-0221-56	1/16W 22k ohm F	R1236	032-0221-51	1/16W 4.7k ohm F
R869	032-0221-51	1/16W 4.7k ohm F	R952	032-0221-56	1/16W 22k ohm F	R1237	033-5641-15	1/16W 560k ohm J
R870	032-0221-51	1/16W 4.7k ohm F	R953	033-2201-15	1/16W 22 ohm J	R1238	032-0221-99	1/16W 100 ohm 1%
R871	032-0221-51	1/16W 4.7k ohm F	R954	032-0221-61	1/16W 6.8k ohm F	R1239	032-0176-00	1/3W 1k ohm J
R872	032-0221-09	1/16W 33k ohm F	R968	032-0221-99	1/16W 100 ohm 1%	R1240	032-0221-52	1/16W 1.8k ohm F
R873	032-0221-95	1/16W 2.7k ohm F	R969	032-0221-99	1/16W 100 ohm 1%	R1241	117-1531-15	1/8W 15k ohm
R876	032-0221-51	1/16W 4.7k ohm F	R1001	033-0000-05	1/16W 0 ohm	R1247	116-1321-15	1/4W 1.3k ohm
R878	032-0221-51	1/16W 4.7k ohm F	R1002	033-0000-05	1/16W 0 ohm	R1248	116-1321-15	1/4W 1.3k ohm
R879	032-0221-85	1/16W 120k ohm F	R1003	032-0221-02	1/16W 33 ohm 1%	R1253	032-0221-99	1/16W 100 ohm 1%
R880	032-0225-68	1/16W 5.6k ohm +/- 0.5%	R1004	032-0221-02	1/16W 33 ohm 1%	R1259	116-1011-15	1/4W 100 ohm
R881	032-0225-74	1/16W 6.8k ohm +/- 0.5%	R1005	032-0221-08	1/16W 1k ohm F	R1265	033-0000-05	1/16W 0 ohm
R882	032-0221-11	1/16W 5.6k ohm F	R1006	032-0221-08	1/16W 1k ohm F	R1266	033-0000-05	1/16W 0 ohm
R883	032-0221-74	1/16W 10k ohm 1%	R1007	032-0221-08	1/16W 1k ohm F	R1267	032-0221-51	1/16W 4.7k ohm F
R884	033-0000-05	1/16W 0 ohm	R1008	119-2201-15	1/10W 22 ohm	R1268	032-0221-51	1/16W 4.7k ohm F
R885	033-0000-05	1/16W 0 ohm	R1009	119-2201-15	1/10W 22 ohm	R1269	032-0221-99	1/16W 100 ohm 1%
R886	116-7511-15	1/4W 750 ohm	R1010	032-0221-08	1/16W 1k ohm F	R1271	033-0000-05	1/16W 0 ohm
R887	032-0221-51	1/16W 4.7k ohm F	R1011	119-2201-15	1/10W 22 ohm	R1273	119-0000-05	1/10W 0 ohm JW
R890	032-0221-99	1/16W 100 ohm 1%	R1012	033-0000-05	1/16W 0 ohm	R1303	032-0221-29	1/16W 5.1k ohm 1%
R891	119-0000-05	1/10W 0 ohm JW	R1013	033-0000-05	1/16W 0 ohm	R1304	032-0221-06	1/16W 100k ohm F
R892	119-0000-05	1/10W 0 ohm JW	R1014	032-0221-02	1/16W 33 ohm 1%	R1307	033-0000-05	1/16W 0 ohm
R893	119-0000-05	1/10W 0 ohm JW	R1015	032-0221-02	1/16W 33 ohm 1%	R1309	033-0000-05	1/16W 0 ohm
R895	033-0000-05	1/16W 0 ohm	R1016	033-0000-05	1/16W 0 ohm	R1314	033-0000-05	1/16W 0 ohm
R896	033-0000-05	1/16W 0 ohm	R1017	033-0000-05	1/16W 0 ohm	R1316	033-0000-05	1/16W 0 ohm
R897	033-0000-05	1/16W 0 ohm	R1018	033-0000-05	1/16W 0 ohm	R1317	033-0000-05	1/16W 0 ohm
R898	032-0221-83	1/16W 3.3k ohm F	R1019	033-0000-05	1/16W 0 ohm	R1319	119-0000-05	1/10W 0 ohm JW
R901	032-0221-75	1/16W 47k ohm F	R1020	033-0000-05	1/16W 0 ohm	R1321	033-0000-05	1/16W 0 ohm
R902	032-0221-83	1/16W 3.3k ohm F	R1021	033-0000-05	1/16W 0 ohm	R1322	032-0221-74	1/16W 10k ohm 1%
R903	032-0221-53	1/16W 18k ohm F	R1022	033-0000-05	1/16W 0 ohm	R1323	032-0221-06	1/16W 100k ohm F
R904	032-0221-08	1/16W 1k ohm F	R1024	033-0000-05	1/16W 0 ohm	R1327	032-0221-75	1/16W 47k ohm F
R905	032-0221-84	1/16W 27k ohm F	R1025	033-0000-05	1/16W 0 ohm	R1328	032-0221-75	1/16W 47k ohm F
R906	032-0221-84	1/16W 27k ohm F	R1026	032-0221-74	1/16W 10k ohm 1%	R1344	032-0221-74	1/16W 10k ohm 1%
R907	033-4701-15	1/16W 47 ohm J	R1027	032-0221-74	1/16W 10k ohm 1%	R1347	033-0000-05	1/16W 0 ohm
R908	119-2201-15	1/10W 22 ohm	R1028	032-0221-75	1/16W 47k ohm F	R1349	033-0000-05	1/16W 0 ohm
R909	119-0000-05	1/10W 0 ohm JW	R1029	033-0000-05	1/16W 0 ohm	R1351	033-1041-15	1/16W 100k ohm J
R911	033-8211-15	1/16W 820 ohm J	R1030	032-0221-02	1/16W 33 ohm 1%	R1352	032-0221-33	1/16W 20k ohm F
R912	032-0221-56	1/16W 22k ohm F	R1031	119-0000-05	1/10W 0 ohm JW	R1353	033-0000-05	1/16W 0 ohm
R913	032-0221-99	1/16W 100 ohm 1%	R1032	119-0000-05	1/10W 0 ohm JW	R1401	032-0210-64	1/10W 1k ohm F
R914	032-0221-99	1/16W 100 ohm 1%	R1033	119-0000-05	1/10W 0 ohm JW	R1402	119-1021-15	1/10W 1k ohm
R916	032-0221-08	1/16W 1k ohm F	R1034	119-0000-05	1/10W 0 ohm JW	R1403	119-1021-15	1/10W 1k ohm
R917	032-0221-99	1/16W 100 ohm 1%	R1036	119-0000-05	1/10W 0 ohm JW	R1404	032-0221-74	1/16W 10k ohm 1%
R919	032-0140-06	1/10W 100 ohm F	R1037	032-0221-99	1/16W 100 ohm 1%	R1405	032-0221-99	1/16W 100 ohm 1%
R920	032-0210-14	1/10W 75 ohm 1%	R1038	033-0000-05	1/16W 0 ohm	R1406	032-0221-74	1/16W 10k ohm 1%
R921	032-0140-06	1/10W 100 ohm F	R1039	033-0000-05	1/16W 0 ohm	R1501	032-0221-06	1/16W 100k ohm F
R922	119-6891-15	1/10W 6.8 ohm	R1041	033-0000-05	1/16W 0 ohm	R1502	033-1091-15	1/16W 1 ohm
R923	032-0210-50	1/10W 360 ohm F	R1042	032-0221-75	1/16W 47k ohm F	R1504	033-0000-05	1/16W 0 ohm
R924	032-0210-35	1/10W 120 ohm F	R1045	119-0000-05	1/10W 0 ohm JW	R1505	033-0000-05	1/16W 0 ohm
R925	032-0210-36	1/10W 22 ohm F	R1046	119-0000-05	1/10W 0 ohm JW	R1507	032-0221-06	1/16W 100k ohm F
R926	032-0140-01	1/10W 10 ohm F	R1047	119-0000-05	1/10W 0 ohm JW	R1508	032-0221-06	1/16W 100k ohm F
R927	AQZ0484	1/10W 15 ohm 1%	R1048	119-0000-05	1/10W 0 ohm JW	R1509	033-1091-15	1/16W 1 ohm
R928	032-0210-38	1/10W 110 ohm F	R1049	119-0000-05	1/10W 0 ohm JW	R1511	033-0000-05	1/16W 0 ohm
R929	119-2091-15	1/10W 110 ohm	R1050	033-0000-05	1/16W 0 ohm	R1512	033-0000-05	1/16W 0 ohm
R930	032-0140-01	1/10W 10 ohm F	R1051	033-0000-05	1/16W 0 ohm	R1514	032-0221-06	1/16W 100k ohm F
R931	032-0210-38	1/10W 110 ohm F	R1052	033-0000-05	1/16W 0 ohm	R1517	032-0221-55	1/16W 1.5k ohm F
R932	AQZ0483	1/10W 12 ohm 1%	R1056	033-0000-05	1/16W 0 ohm	R1518	032-0221-95	1/16W 2.7k ohm F
R933	032-0210-50	1/10W 360 ohm F	R1057	033-0000-05	1/16W 0 ohm	R1519	033-0000-05	1/16W 0 ohm
R934	032-0210-14	1/10W 75 ohm 1%	R1058	033-0000-05	1/16W 0 ohm	R1520	033-0000-05	1/16W 0 ohm
R935	AQZ0483	1/10W 12 ohm 1%	R1059	033-0000-05	1/16W 0 ohm	R1521	033-0000-05	1/16W 0 ohm
R936	032-0210-50	1/10W 360 ohm F	R1069	032-0221-02	1/16W 33 ohm 1%	R1522	032-0221-04	1/16W 10 ohm F
R937	032-0140-01	1/10W 10 ohm F	R1115	032-0221-51	1/16W 4.7k ohm F	R1523	032-0221-76	1/16W 24k ohm F
R938	032-0210-36	1/10W 22 ohm F	R1202	032-0221-74	1/16W 10k ohm 1%	R1525	119-4711-15	1/10W 470 ohm
R939	032-0210-35	1/10W 120 ohm F	R1203	032-0221-74	1/16W 10k ohm 1%	R1526	032-0221-06	1/16W 100k ohm F
R940	032-0210-50	1/10W 360 ohm F	R1204	116-1011-15	1/4W 100 ohm	R1527	032-0221-75	1/16W 47k ohm F
R941	032-0210-38	1/10W 110 ohm F	R1205	032-0221-74	1/16W 10k ohm 1%	R1528	033-4711-15	1/16W 470 ohm J
R942	032-0140-01	1/10W 10 ohm F	R1206	032-0221-74	1/16W 10k ohm 1%	R1529	032-0225-62	1/16W 56k ohm +/- 0.5%
R943	AQZ0484	1/10W 15 ohm 1%	R1212	032-0221-75	1/16W 47k ohm F	R1530	032-0221-51	1/16W 4.7k ohm F
R944	032-0140-06	1/10W 100 ohm F	R1216	032-0221-83	1/16W 3.3k ohm F	R1531	032-0221-74	1/16W 10k ohm 1%
R945	032-0210-38	1/10W 110 ohm F	R1226	116-5621-15	1/4W 5.6k ohm	R1533	033-2221-15	1/16W 2.2k ohm J
R946	032-0140-06	1/10W 100 ohm F	R1228	032-0221-74	1/16W 10k ohm 1%	R1535	032-0221-74	1/16W 10k ohm 1%
R947	032-0210-25	1/10W 68 ohm F	R1230	032-0221-11	1/16W 5.6k ohm F	R1536	032-0221-74	1/16W 10k ohm 1%
R948	032-0210-25	1/10W 68 ohm F	R1231	119-1531-15	1/10W 15k ohm	R1540	032-0221-59	1/16W 220 ohm F
			R1232	032-0221-09	1/16W 33k ohm F			
			R1233	032-0221-74	1/16W 10k ohm 1%			

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R1541	032-0221-75	1/16W 47k ohm F	R8009	033-2251-15	1/16W 2.2M ohm J	RN701	050-0156-59	1/16W 33 ohm x4
R1550	033-0000-05	1/16W 0 ohm	R8010	032-0221-93	1/16W 470k ohm F	RN702	050-0156-59	1/16W 33 ohm x4
R1552	033-0000-05	1/16W 0 ohm	R8011	033-4751-15	1/16W 4.7M ohm 5%	RN901	050-0156-52	1/16W 100 ohm x4
R1554	032-0221-32	1/16W 220k ohm F				RN902	050-0156-52	1/16W 100 ohm x4
R1555	032-0221-29	1/16W 5.1k ohm 1%	R8012	032-0221-32	1/16W 220k ohm F	RN903	050-0156-52	1/16W 100 ohm x4
R1556	032-0221-94	1/16W 180k ohm F	R8013	032-0221-68	1/16W 430k ohm F	RN904	050-0156-52	1/16W 100 ohm x4
R1557	032-0210-00	1/10W 330 ohm F	R8014	033-3941-15	1/16W 390k ohm J	RN905	050-0156-52	1/16W 100 ohm x4
R1558	032-0210-00	1/10W 330 ohm F	R8015	033-1061-15	1/16W 10M ohm J	RN906	050-0156-57	1/16W 10k ohm x4
R1559	032-0210-00	1/10W 330 ohm F	R8016	033-1061-15	1/16W 10M ohm J	RN1001	050-0156-53	1/16W 0 ohm x4
R1562	033-0000-05	1/16W 0 ohm	R8017	033-1061-15	1/16W 10M ohm J	RN1002	050-0156-59	1/16W 33 ohm x4
R1564	032-0210-00	1/10W 330 ohm F	RN101	050-0157-09	1/16W 15 ohm x2	RN1006	050-0156-53	1/16W 0 ohm x4
R1565	032-0210-00	1/10W 330 ohm F	RN102	050-0157-09	1/16W 15 ohm x2	RN1010	050-0156-53	1/16W 0 ohm x4
R1614	033-0000-05	1/16W 0 ohm	RN103	050-0157-09	1/16W 15 ohm x2	RN1301	050-0156-53	1/16W 0 ohm x4
R2004	032-0221-99	1/16W 100 ohm 1%	RN104	050-0157-09	1/16W 15 ohm x2	SUP1301	001-4323-90	RCLAMP0502A
R2006	032-0221-74	1/16W 10k ohm 1%	RN201	050-0156-57	1/16W 10k ohm x4	SUP1303	001-4323-90	RCLAMP0502A
R2007	033-0000-05	1/16W 0 ohm	RN204	050-0156-59	1/16W 33 ohm x4	VR1204	001-9213-50	EZJZ1V270EA
R2008	032-0221-02	1/16W 33 ohm 1%	RN205	050-0156-59	1/16W 33 ohm x4	VR1208	001-9213-50	EZJZ1V270EA
R2009	032-0221-02	1/16W 33 ohm 1%	RN206	050-0156-59	1/16W 33 ohm x4	X401	061-3593-80	NX3225GA 48MHz
R2010	032-0221-02	1/16W 33 ohm 1%	RN207	050-0156-59	1/16W 33 ohm x4	X601	061-4568-90	DSB221SDM 26MHz
R3002	119-1811-15	1/10W 180 ohm	RN209	050-0156-59	1/16W 33 ohm x4			
R3005	033-0000-05	1/16W 0 ohm	RN210	050-0156-67	1/16W 220 ohm x4	X604	061-9227-80	32.768KHz
R4801	116-3911-15	1/4W 390 ohm	RN211	050-0156-77	1/16W 68 ohm x4	ZD801	001-0529-47	MA8091-M
R4802	032-0221-56	1/16W 22k ohm F	RN217	050-0156-59	1/16W 33 ohm x4	ZD1201	001-4330-32	UDZV TE-17 18B
R8003	032-0221-08	1/16W 1k ohm F	RN218	050-0156-55	1/16W 2.2k ohm x4	ZD1202	001-4330-32	UDZV TE-17 18B
R8004	032-0221-07	1/16W 56k ohm F	RN219	050-0140-55	1/32W 2.2k ohmx4J	ZD1204	001-0529-32	MA8056-M
R8005	032-0221-71	1/16W 270k ohm F	RN220	050-0156-57	1/16W 10k ohm x4	ZD1207	001-4330-32	UDZV TE-17 18B
R8006	032-0221-38	1/16W 300k ohm	RN221	050-0156-63	1/16W 47k ohm x4	PWB	039-4407-00	PWB(WITHOUT COMPONENTS)
R8007	032-0221-92	1/16W 1M ohm 1%	RN222	050-0156-63	1/16W 47k ohm x4			
R8008	033-3941-15	1/16W 390k ohm J	RN223	050-0156-59	1/16W 33 ohm x4			
			RN501	050-0156-63	1/16W 47k ohm x4			

IF PWB(B4) section : for QY-5091H-A, QY-5092H-A

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
ANT101	092-2253-01	ANT-RECEPT	C267	045-1011-50	100pFJ CH	C339	165-1063-55	35V 10uF
C101	046-1022-58	50V 1000pF	C268	043-0603-90	16V 10uF	C341	043-5709-90	50V 1uF K
C102	046-1022-58	50V 1000pF	C269	046-3312-58	330pF K B	C342	ADZ0336	16V 22uF
C103	046-1022-58	50V 1000pF	C270	046-2222-58	2200pF K B	C343	043-0603-90	16V 10uF
C104	046-1022-58	50V 1000pF	C271	043-0570-90	16V 2.2uF K	C346	043-4402-90	16V 1uF
C108	042-4025-90	16V 47uF	C272	043-4402-90	16V 1uF	C348	166-2221-50	2200pF CH
C109	042-1753-90	16V 100uF M	C273	043-0603-90	16V 10uF	C401	046-1042-78	0.1uF K B
C110	046-1042-78	0.1uF K B	C274	046-3312-58	330pF K B	C402	043-0603-90	16V 10uF
C111	046-1042-78	0.1uF K B	C275	046-2222-58	2200pF K B	C403	043-0603-90	16V 10uF
C112	046-1022-58	50V 1000pF	C276	178-1042-55	0.1uF	C404	043-0603-90	16V 10uF
C113	046-1022-58	50V 1000pF	C282	043-0603-90	16V 10uF	C406	046-2222-58	2200pF K B
C117	045-1011-50	100pFJ CH	C283	043-4402-90	16V 1uF	C407	046-2222-58	2200pF K B
C118	045-1801-50	18pFJ CH	C284	043-0575-90	25V 0.47uF	C408	043-0563-90	16V 47uF
C119	045-1801-50	18pFJ CH	C285	046-1042-78	0.1uF K B	C409	045-2201-50	22pFJ CH
C125	168-1052-78	16V 1uF K	C286	046-1042-78	0.1uF K B	C410	045-2201-50	22pFJ CH
C126	168-1052-78	16V 1uF K	C287	046-1042-78	0.1uF K B	C411	045-2201-50	22pFJ CH
C128	168-1052-78	16V 1uF K	C288	046-1042-78	0.1uF K B	C412	045-2201-50	22pFJ CH
C129	168-1052-78	16V 1uF K	C289	165-2263-35	16V 22uF	C414	043-0603-90	16V 10uF
C130	043-0603-90	16V 10uF	C291	165-4763-35	16V 47uF	C415	043-0603-90	16V 10uF
C131	165-2263-35	16V 22uF	C292	166-2221-50	2200pF CH	C416	043-0603-90	16V 10uF
C202	168-1052-78	16V 1uF K	C293	168-2232-55	0.022uF K	C417	043-0603-90	16V 10uF
C203	045-1011-50	100pFJ CH	C295	168-2232-55	0.022uF K	C419	043-0570-90	16V 2.2uF K
C206	043-0570-90	16V 2.2uF K	C301	168-1022-55	1000pF K	C426	045-3911-50	390pFJ CH
C210	046-1042-78	0.1uF K B	C311	046-1042-78	0.1uF K B	C427	045-3911-50	390pFJ CH
C223	046-1042-78	0.1uF K B	C312	043-0603-90	16V 10uF	C428	046-1042-78	0.1uF K B
C224	043-0603-90	16V 10uF	C313	043-0603-90	16V 10uF	C431	043-0559-90	6.3V 22uF
C226	045-3901-50	39pFJ CH	C314	043-0603-90	16V 10uF	C432	043-0559-90	6.3V 22uF
C227	046-2222-58	2200pF K B	C316	AQZ0761	EZJZ0V800AA	C433	043-0563-90	16V 47uF
C228	046-2222-58	2200pF K B	C317	AQZ0761	EZJZ0V800AA	C435	168-1042-78	16V 0.1uF K
C231	165-2263-35	16V 22uF	C318	165-4763-35	16V 47uF	C436	043-0603-90	16V 10uF
C232	043-4402-90	16V 1uF	C319	045-2201-50	22pFJ CH	C437	043-4402-90	16V 1uF
C233	045-3901-50	39pFJ CH	C320	045-2201-50	22pFJ CH	C438	043-0559-90	6.3V 22uF
C244	043-4402-90	16V 1uF	C321	045-2201-50	22pFJ CH	C439	043-0559-90	6.3V 22uF
C245	043-0603-90	16V 10uF	C322	045-2201-50	22pFJ CH	C442	168-4752-98	4.7uF K
C249	043-4402-90	16V 1uF	C330	043-4402-90	16V 1uF	C443	043-7400-90	16V 22uF
C250	168-1052-78	16V 1uF K	C331	165-4763-35	16V 47uF	C444	043-7400-90	16V 22uF
C251	043-4402-90	16V 1uF	C332	168-1042-38	50V 0.1uF K	C445	168-1052-78	16V 1uF K
C261	043-0559-90	6.3V 22uF	C333	043-0603-90	16V 10uF	C446	165-1063-35	16V 10uF
C262	043-0559-90	6.3V 22uF	C335	168-1042-78	16V 0.1uF K	C452	165-4763-35	16V 47uF
C263	168-1042-38	50V 0.1uF K	C337	046-3322-58	3300pF K B	C453	166-2221-50	2200pF CH
C266	046-1032-78	0.01uF K B	C338	046-1042-78	0.1uF K B	C509	168-1052-78	16V 1uF K

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C510	046-1042-78	0.1uF K B	IC210	051-3034-90	NJM4558V	R141	119-0000-05	1/10W 0 ohm JW
C511	165-1073-35	16V 100uF	IC301	051-3034-90	NJM4558V	R142	032-0221-50	1/16W 43k ohm F
C512	046-1032-78	0.01uF K B	IC302	051-6663-80	TJA1042T/3,118	R143	033-0000-05	1/16W 0 ohm
C513	043-0603-90	16V 10uF	IC303	051-3711-60	S-1142D50H- E6T2U	R144	032-0221-62	1/16W 8.2k ohm F
C514	045-1011-50	100pFJ CH				R145	033-0000-05	1/16W 0 ohm
C610	165-1073-35	16V 100uF	IC401	051-3034-90	NJM4558V	R146	033-0000-05	1/16W 0 ohm
C614	042-0638-51	16V 220uF	IC402	051-3933-90	NJM2752RB2-TE2	R147	119-0000-05	1/10W 0 ohm JW
C619	165-4763-35	16V 47uF	IC404	051-3034-90	NJM4558V	R201	117-1011-15	1/8W 100 ohm
C701	043-0574-90	25V 1.0uF	IC503	051-3774-90	NJM11100F1	R202	117-1011-15	1/8W 100 ohm
C702	043-0581-90	10V 4.7uF	IC701	051-3741-91	NJW4184U2-33A	R203	116-6811-15	1/4W 680 ohm
C703	042-4442-01	25V 1000uF	IC702	051-3519-90	NJU7771F05-TE2	R204	032-0221-74	1/16W 10k ohm 1%
C704	042-4442-01	25V 1000uF	IC703	-----	MAX16933ATIR /V+T (Buck Controller) (TQFN-EP) (366390-051)	R205	032-0221-63	1/16W 12k ohm F
C705	165-1063-55	35V 10uF				R207	033-1031-15	1/16W 10k ohm J
C706	165-2263-35	16V 22uF	J201	074-4017-28	28P	R208	033-1031-15	1/16W 10k ohm J
C707	165-2263-35	16V 22uF	J301	074-4017-20	20P	R209	032-0221-08	1/16W 1k ohm F
C708	043-4306-90	1uF	J401	074-4119-24	24P	R211	119-0000-05	1/10W 0 ohm JW
C709	042-0638-51	16V 220uF	J601	074-2248-60	60P	R214	119-0000-05	1/10W 0 ohm JW
C710	165-2263-35	16V 22uF	J602	074-2248-40	SOCKET(40P)	R228	117-2211-15	1/8W 220 ohm
C711	043-4402-90	16V 1uF	L102	010-3104-53	220 ohm/100MHz	R229	119-0000-05	1/10W 0 ohm JW
C713	045-5096-50	5pF +/-0.25pF CH	L103	010-3104-53	220 ohm/100MHz	R230	032-0221-84	1/16W 27k ohm F
C714	046-2222-58	2200pF K B	L104	010-3104-53	220 ohm/100MHz	R232	032-0221-65	1/16W 68k ohm F
C715	043-0603-90	16V 10uF	L202	010-3442-50	LBM2016T3R3J	R233	117-4701-15	1/8W 47 ohm
C716	043-7702-90	1.0uF	L205	010-3407-67	27uH J	R234	117-4701-15	1/8W 47 ohm
C717	168-1042-38	50V 0.1uF K	L206	010-3104-54	600 ohm/100MHz	R235	119-0000-05	1/10W 0 ohm JW
C720	168-1042-38	50V 0.1uF K	L301	010-3105-62	1k ohm/100MHz	R236	032-0221-84	1/16W 27k ohm F
C725	045-1007-50	10 +/-0.5pF CH	L307	BMZ0211	BLM18PG121SN 1D	R237	032-0221-65	1/16W 68k ohm F
C726	AAZ0188	25V 0.047uF				R238	119-0000-05	1/10W 0 ohm JW
C727	168-1042-38	50V 0.1uF K				R241	119-0000-05	1/10W 0 ohm JW
C728	168-1042-38	50V 0.1uF K				R248	119-0000-05	1/10W 0 ohm JW
C733	168-1042-38	50V 0.1uF K				R252	032-0225-70	1/16W 130k ohm 0.5%
C734	043-7700-90	50V 4.7uF	L308	010-3104-53	220 ohm/100MHz			
C735	043-7700-90	50V 4.7uF	L309	010-3105-62	1k ohm/100MHz	R253	032-0221-76	1/16W 24k ohm F
C736	043-7700-90	50V 4.7uF	L600	010-3104-53	220 ohm/100MHz	R263	033-1811-15	1/16W 180 ohm J
C737	043-7300-90	10V 47uF	L601	010-3127-91	220 ohm/100MHz	R265	116-1021-15	1/4W 1k ohm
C738	043-7300-90	10V 47uF	L602	010-3127-91	220 ohm/100MHz	R266	116-1051-15	1/4W 1M ohm
C740	042-4035-91	6.3V 100uF	L701	010-3105-62	1k ohm/100MHz	R269	033-1031-15	1/16W 10k ohm J
C742	042-4035-95	16V 100uF	L702	010-3075-56	10uH	R270	119-0000-05	1/10W 0 ohm JW
C743	043-0563-90	16V 47uF	L703	010-3075-57	22uH	R271	033-4721-15	1/16W 4.7k ohm J
C744	043-7700-90	50V 4.7uF	L704	010-3581-50	NRS8040T4R7N JGJV	R272	033-4721-15	1/16W 4.7k ohm J
C745	043-7700-90	50V 4.7uF				R273	032-0210-71	1/10W 16k ohm 1%
C746	043-5709-90	50V 1uF K	L705	010-3104-55	MPZ1608S102AT	R274	032-0221-09	1/16W 33k ohm F
C747	168-1042-78	16V 0.1uF K	P501	076-0569-02	2P	R275	032-0225-64	1/16W 9.1k ohm +/- 0.5%
C748	168-1042-78	16V 0.1uF K	P701	076-6021-56	6P			
C749	043-4306-90	1uF	P702	076-6021-60	10P	R276	032-0221-11	1/16W 5.6k ohm F
C751	045-2701-50	27pFJ CH	Q201	192-4081-00	2SC4081	R277	032-0210-71	1/10W 16k ohm 1%
D101	001-2403-90	M1F60	Q204	191-1197-50	2SB1197K Q,R	R278	032-0221-57	1/16W 13k ohm F
D201	001-0367-91	1SS226	Q205	125-2026-91	UNR5211G	R279	032-0221-09	1/16W 33k ohm F
D203	001-2644-90	RB161M-20FTR	Q308	192-4081-00	2SC4081	R280	032-0092-51	1/8W 1k ohm F
D205	001-2412-90	RR264M-400	Q309	125-9028-90	UMX1N-TN	R281	117-2221-15	1/8W 2.2k ohm
D301	001-2630-90	1SS420-TPL3,F	Q401	192-4081-00	2SC4081	R282	119-0000-05	1/10W 0 ohm JW
D302	001-1325-90	1SS387	Q402	125-2046-91	DTC114EUBTL	R283	119-0000-05	1/10W 0 ohm JW
D303	001-1325-90	1SS387	Q403	125-0021-95	DTA143ZUA-T106	R289	032-0225-59	1/16W 4.3k ohm 0.5%
D307	001-0516-90	MA111	Q404	193-1306-00	2SD1306			
D308	001-2412-90	RR264M-400	Q405	193-1306-00	2SD1306	R290	033-3331-15	1/16W 33k ohm J
D401	001-0516-90	MA111	Q701	125-8048-90	SQJ942EP-T1-GE3	R291	033-4721-15	1/16W 4.7k ohm J
D702	001-2633-90	1SS388-TPL3,F	Q702	125-8048-90	SQJ942EP-T1-GE3	R296	032-0221-60	1/16W 3.9k ohm F
D703	001-2633-90	1SS388-TPL3,F	R101	033-1031-15	1/16W 10k ohm J	R297	032-0221-95	1/16W 2.7k ohm F
D1312	001-2669-90	RBQ10B65AFHTL	R106	033-0000-05	1/16W 0 ohm	R298	119-0000-05	1/10W 0 ohm JW
ET501	345-6839-00	GASKET (E02J045045-6)	R112	033-3311-15	1/16W 330 ohm J	R299	116-1011-15	1/4W 100 ohm
			R115	032-0221-08	1/16W 1k ohm F	R301	032-0209-50	1/4W 82 ohm D
FE101	941-0262-50	TUNER PACK (XMT-DP146)	R117	032-0221-08	1/16W 1k ohm F	R302	032-0210-74	1/10W 470 ohm F
			R120	032-0221-08	1/16W 1k ohm F	R304	119-0000-05	1/10W 0 ohm JW
IC102	051-3761-90	BD00HC0EEFJ- ME2	R123	032-0221-08	1/16W 1k ohm F	R321	032-0221-53	1/16W 18k ohm F
			R125	033-1011-15	1/16W 100 ohm J	R322	032-0221-53	1/16W 18k ohm F
IC103	051-3770-90	BD00HA3EEFJ- ME2	R126	033-1011-15	1/16W 100 ohm J	R323	032-0221-53	1/16W 18k ohm F
			R127	033-1011-15	1/16W 100 ohm J	R324	032-0221-53	1/16W 18k ohm F
IC203	051-3034-90	NJM4558V	R128	033-1011-15	1/16W 100 ohm J	R325	116-1011-15	1/4W 100 ohm
IC204	051-6644-80	ADM487EWARZ- REEL7	R131	033-0000-05	1/16W 0 ohm	R326	033-4731-15	1/16W 47k ohm J
			R133	119-2221-15	1/10W 2.2k ohm	R327	033-4731-15	1/16W 47k ohm J
IC205	051-3034-90	NJM4558V	R134	033-0000-05	1/16W 0 ohm	R328	032-0221-53	1/16W 18k ohm F
IC206	051-3034-90	NJM4558V	R135	033-0000-05	1/16W 0 ohm	R329	032-0221-53	1/16W 18k ohm F
IC207	051-3774-90	NJM11100F1	R138	032-0221-50	1/16W 43k ohm F	R330	032-0221-53	1/16W 18k ohm F
IC208	051-7222-60	MC74VHC1G08D FT2G	R139	033-0000-05	1/16W 0 ohm	R331	032-0221-53	1/16W 18k ohm F
			R140	032-0221-62	1/16W 8.2k ohm F	R332	117-2211-15	1/8W 220 ohm

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R333	032-0210-64	1/10W 1k ohm F	R442	119-0000-05	1/10W 0 ohm JW	R673	033-0000-05	1/16W 0 ohm
R339	032-0221-08	1/16W 1k ohm F	R443	119-0000-05	1/10W 0 ohm JW	R674	033-0000-05	1/16W 0 ohm
R340	119-0000-05	1/10W 0 ohm JW	R444	119-0000-05	1/10W 0 ohm JW	R675	033-0000-05	1/16W 0 ohm
R341	119-0000-05	1/10W 0 ohm JW	R460	032-0221-06	1/16W 100k ohm F	R701	032-0221-09	1/16W 33k ohm F
R342	119-0000-05	1/10W 0 ohm JW	R461	032-0221-06	1/16W 100k ohm F	R702	032-0221-65	1/16W 68k ohm F
R344	119-4721-15	1/10W 4.7k ohm	R462	119-0000-05	1/10W 0 ohm JW	R704	033-0000-05	1/16W 0 ohm
R345	119-3931-15	1/10W 39k ohm	R464	032-0210-64	1/10W 1k ohm F	R705	033-0000-05	1/16W 0 ohm
R346	119-1531-15	1/10W 15k ohm	R465	032-0210-64	1/10W 1k ohm F	R706	033-0000-05	1/16W 0 ohm
R347	032-0210-59	1/10W 5.6k ohm F	R466	032-0221-06	1/16W 100k ohm F	R708	033-0000-05	1/16W 0 ohm
R348	032-0210-56	1/10W 22k ohm F	R467	032-0221-06	1/16W 100k ohm F	R709	033-0000-05	1/16W 0 ohm
R349	AQZ0692	1/3W 1.2k ohm J	R509	117-0000-05	1/8W 0 ohm JW	R710	033-0000-05	1/16W 0 ohm
R350	119-0000-05	1/10W 0 ohm JW	R510	033-0000-05	1/16W 0 ohm	R711	033-0000-05	1/16W 0 ohm
R351	033-4731-15	1/16W 47k ohm J	R511	119-0000-05	1/10W 0 ohm JW	R712	032-0225-58	1/16W 20k ohm +/- 0.5%
R352	033-0000-05	1/16W 0 ohm	R515	032-0221-75	1/16W 47k ohm F	R713	032-0221-10	1/16W 15k ohm F
R357	119-0000-05	1/10W 0 ohm JW	R516	032-0802-92	1/16W 30k ohm F	R714	032-0221-06	1/16W 100k ohm F
R358	119-0000-05	1/10W 0 ohm JW	R517	033-4731-15	1/16W 47k ohm J	R715	032-0221-72	1/16W 470 ohm F
R359	119-0000-05	1/10W 0 ohm JW	R518	119-0000-05	1/10W 0 ohm JW	R716	032-0221-56	1/16W 22k ohm F
R401	032-0221-76	1/16W 24k ohm F	R519	119-0000-05	1/10W 0 ohm JW	R717	032-0221-72	1/16W 470 ohm F
R402	032-0221-76	1/16W 24k ohm F	R520	119-0000-05	1/10W 0 ohm JW	R718	033-0000-05	1/16W 0 ohm
R403	032-0221-76	1/16W 24k ohm F	R521	119-0000-05	1/10W 0 ohm JW	R719	033-0000-05	1/16W 0 ohm
R404	032-0221-76	1/16W 24k ohm F	R522	119-0000-05	1/10W 0 ohm JW	R720	033-0000-05	1/16W 0 ohm
R406	033-4731-15	1/16W 47k ohm J	R614	033-0000-05	1/16W 0 ohm	R721	033-0000-05	1/16W 0 ohm
R407	033-4731-15	1/16W 47k ohm J	R615	033-0000-05	1/16W 0 ohm	R722	032-0225-58	1/16W 20k ohm +/- 0.5%
R408	032-0221-53	1/16W 18k ohm F	R616	033-0000-05	1/16W 0 ohm	R723	033-0000-05	1/16W 0 ohm
R409	032-0221-53	1/16W 18k ohm F	R622	033-0000-05	1/16W 0 ohm	R724	032-0221-75	1/16W 47k ohm F
R410	032-0221-53	1/16W 18k ohm F	R624	033-0000-05	1/16W 0 ohm	R725	032-0253-50	2W 8m ohm
R411	032-0221-53	1/16W 18k ohm F	R626	033-0000-05	1/16W 0 ohm	R726	032-0253-50	2W 8m ohm
R412	032-0221-56	1/16W 22k ohm F	R628	033-0000-05	1/16W 0 ohm	R728	033-0000-05	1/16W 0 ohm
R419	032-0221-53	1/16W 18k ohm F	R629	033-0000-05	1/16W 0 ohm	R729	033-1011-15	1/16W 100 ohm J
R420	032-0221-53	1/16W 18k ohm F	R630	033-0000-05	1/16W 0 ohm	VR201	001-9213-50	EZJZ1V270EA
R421	032-0221-09	1/16W 33k ohm F	R634	033-0000-05	1/16W 0 ohm	ZD201	001-0529-32	MA8056-M
R422	032-0221-09	1/16W 33k ohm F	R636	033-0000-05	1/16W 0 ohm	ZD202	001-0529-32	MA8056-M
R423	033-0000-05	1/16W 0 ohm	R637	033-0000-05	1/16W 0 ohm	ZD206	001-4305-19	UDZSTE-17 5.1B
R424	033-0000-05	1/16W 0 ohm	R648	033-0000-05	1/16W 0 ohm	ZD305	001-4305-20	UDZSTE-17 5.6B
R425	117-2211-15	1/8W 220 ohm	R649	033-0000-05	1/16W 0 ohm	ZD306	001-4305-20	UDZSTE-17 5.6B
R427	119-4721-15	1/10W 4.7k ohm	R651	033-0000-05	1/16W 0 ohm	ZD307	001-4305-19	UDZSTE-17 5.1B
R428	119-3931-15	1/10W 39k ohm	R652	033-0000-05	1/16W 0 ohm	ZD402	001-4305-19	UDZSTE-17 5.1B
R429	119-1531-15	1/10W 15k ohm	R653	033-0000-05	1/16W 0 ohm	ZD403	001-4305-19	UDZSTE-17 5.1B
R430	117-2211-15	1/8W 220 ohm	R656	033-0000-05	1/16W 0 ohm	PWB	039-4690-00	PWB(WITHOUT COMPONENTS)
R433	119-0000-05	1/10W 0 ohm JW	R658	033-0000-05	1/16W 0 ohm			
R437	032-0221-11	1/16W 5.6k ohm F	R661	033-0000-05	1/16W 0 ohm			
R438	032-0221-11	1/16W 5.6k ohm F	R662	033-0000-05	1/16W 0 ohm			
R439	032-0092-89	1/8W 470 ohm F	R671	119-0000-05	1/10W 0 ohm JW			
R440	032-0092-89	1/8W 470 ohm F	R672	119-0000-05	1/10W 0 ohm JW			

IF PWB(B4) section : for QY-5094H-A

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
ANT101	092-2253-01	ANT-RECEPT	C321	045-2201-50	22pFJ CH	C717	168-1042-38	50V 0.1uF K
C101	046-1022-58	50V 1000pF	C322	045-2201-50	22pFJ CH	C720	168-1042-38	50V 0.1uF K
C102	046-1022-58	50V 1000pF	C330	043-4402-90	16V 1uF	C725	045-1007-50	10 +/-0.5pF CH
C103	046-1022-58	50V 1000pF	C331	165-4763-35	16V 47uF	C726	AAZ0188	25V 0.047uF
C104	046-1022-58	50V 1000pF	C332	168-1042-38	50V 0.1uF K	C727	168-1042-38	50V 0.1uF K
C108	042-4025-90	16V 47uF	C333	043-0603-90	16V 10uF	C728	168-1042-38	50V 0.1uF K
C109	042-1753-90	16V 100uF M	C335	168-1042-78	16V 0.1uF K	C733	168-1042-38	50V 0.1uF K
C110	046-1042-78	0.1uF K B	C337	046-3322-58	3300pF K B	C734	043-7700-90	50V 4.7uF
C111	046-1042-78	0.1uF K B	C338	046-1042-78	0.1uF K B	C735	043-7700-90	50V 4.7uF
C112	046-1022-58	50V 1000pF	C339	165-1063-55	35V 10uF	C736	043-7700-90	50V 4.7uF
C113	046-1022-58	50V 1000pF	C341	043-5709-90	50V 1uF K	C737	043-7300-90	10V 47uF
C117	045-1011-50	100pFJ CH	C342	ADZ0336	16V 22uF	C738	043-7300-90	10V 47uF
C118	045-1801-50	18pFJ CH	C343	043-0603-90	16V 10uF	C740	042-4035-91	6.3V 100uF
C119	045-1801-50	18pFJ CH	C346	043-4402-90	16V 1uF	C742	042-4035-95	16V 100uF
C125	168-1052-78	16V 1uF K	C348	166-2221-50	2200pF CH	C743	043-0563-90	16V 47uF
C126	168-1052-78	16V 1uF K	C401	046-1042-78	0.1uF K B	C744	043-7700-90	50V 4.7uF
C128	168-1052-78	16V 1uF K	C402	043-0603-90	16V 10uF	C745	043-7700-90	50V 4.7uF
C129	168-1052-78	16V 1uF K	C403	043-0603-90	16V 10uF	C746	043-5709-90	50V 1uF K
C130	043-0603-90	16V 10uF	C404	043-0603-90	16V 10uF	C747	168-1042-78	16V 0.1uF K
C131	165-2263-35	16V 22uF	C406	046-2222-58	2200pF K B	C748	168-1042-78	16V 0.1uF K
C202	168-1052-78	16V 1uF K	C407	046-2222-58	2200pF K B	C749	043-4306-90	1uF
C203	045-1011-50	100pFJ CH	C408	043-0563-90	16V 47uF	C751	045-2701-50	27pFJ CH
C206	043-0570-90	16V 2.2uF K	C409	045-2201-50	22pFJ CH	D101	001-2403-90	M1F60
C210	046-1042-78	0.1uF K B	C410	045-2201-50	22pFJ CH	D201	001-0367-91	1SS226
C223	046-1042-78	0.1uF K B	C411	045-2201-50	22pFJ CH	D203	001-2644-90	RB161M-20FTR
C224	043-0603-90	16V 10uF	C412	045-2201-50	22pFJ CH	D205	001-2412-90	RR264M-400
C226	045-3901-50	39pFJ CH	C414	043-0603-90	16V 10uF	D301	001-2630-90	1SS420-TPL3,F
C227	046-2222-58	2200pF K B	C415	043-0603-90	16V 10uF	D302	001-1325-90	1SS387
C228	046-2222-58	2200pF K B	C416	043-0603-90	16V 10uF	D303	001-1325-90	1SS387
C231	165-2263-35	16V 22uF	C417	043-0603-90	16V 10uF	D307	001-0516-90	MA111
C232	043-4402-90	16V 1uF	C419	043-0570-90	16V 2.2uF K	D308	001-2412-90	RR264M-400
C233	045-3901-50	39pFJ CH	C426	045-3911-50	390pFJ CH	D401	001-0516-90	MA111
C244	043-4402-90	16V 1uF	C427	045-3911-50	390pFJ CH	D702	001-2633-90	1SS388-TPL3,F
C245	043-0603-90	16V 10uF	C428	046-1042-78	0.1uF K B	D703	001-2633-90	1SS388-TPL3,F
C249	043-4402-90	16V 1uF	C431	043-0559-90	6.3V 22uF	D1312	001-2669-90	RBQ10B65AFHTL
C250	168-1052-78	16V 1uF K	C432	043-0559-90	6.3V 22uF	ET501	345-6839-00	GASKET
C251	043-4402-90	16V 1uF	C433	043-0563-90	16V 47uF			(E02J045045-6)
C261	043-0559-90	6.3V 22uF	C435	168-1042-78	16V 0.1uF K	FE101	941-0264-00	TUNER PACK
C262	043-0559-90	6.3V 22uF	C436	043-0603-90	16V 10uF			(XMT-DP166)
C263	168-1042-38	50V 0.1uF K	C437	043-4402-90	16V 1uF	IC102	051-3761-90	BD00HC0EEFJ-ME2
C266	046-1032-78	0.01uF K B	C438	043-0559-90	6.3V 22uF			
C267	045-1011-50	100pFJ CH	C439	043-0559-90	6.3V 22uF	IC103	051-3770-90	BD00HA3EEFJ-ME2
C268	043-0603-90	16V 10uF	C442	168-4752-98	4.7uF K			
C269	046-3312-58	330pF K B	C443	043-7400-90	16V 22uF	IC203	051-3034-90	NJM4558V
C270	046-2222-58	2200pF K B	C444	043-7400-90	16V 22uF	IC204	051-6644-80	ADM487EWARZ-REEL7
C271	043-0570-90	16V 2.2uF K	C445	168-1052-78	16V 1uF K			
C272	043-4402-90	16V 1uF	C446	165-1063-35	16V 10uF	IC205	051-3034-90	NJM4558V
C273	043-0603-90	16V 10uF	C452	165-4763-35	16V 47uF	IC206	051-3034-90	NJM4558V
C274	046-3312-58	330pF K B	C453	166-2221-50	2200pF CH	IC207	051-3774-90	NJM11100F1
C275	046-2222-58	2200pF K B	C509	168-1052-78	16V 1uF K	IC208	051-7222-60	MC74VHC1G08D
C276	178-1042-55	0.1uF	C510	046-1042-78	0.1uF K B			FT2G
C282	043-0603-90	16V 10uF	C511	165-1073-35	16V 100uF	IC210	051-3034-90	NJM4558V
C283	043-4402-90	16V 1uF	C512	046-1032-78	0.01uF K B	IC301	051-3034-90	NJM4558V
C284	043-0575-90	25V 0.47uF	C513	043-0603-90	16V 10uF	IC302	051-6663-80	TJA1042T/3,118
C285	046-1042-78	0.1uF K B	C514	045-1011-50	100pFJ CH	IC303	051-3711-60	S-1142D50H-E6T2U
C286	046-1042-78	0.1uF K B	C610	165-1073-35	16V 100uF			
C287	046-1042-78	0.1uF K B	C614	042-0638-51	16V 220uF	IC401	051-3034-90	NJM4558V
C288	046-1042-78	0.1uF K B	C619	165-4763-35	16V 47uF	IC402	051-3933-90	NJM2752RB2-TE2
C289	165-2263-35	16V 22uF	C701	043-0574-90	25V 1.0uF	IC404	051-3034-90	NJM4558V
C291	165-4763-35	16V 47uF	C702	043-0581-90	10V 4.7uF	IC503	051-3774-90	NJM11100F1
C292	166-2221-50	2200pF CH	C703	042-4442-01	25V 1000uF	IC701	051-3741-91	NJW4184U2-33A
C293	168-2232-55	0.022uF K	C704	042-4442-01	25V 1000uF	IC702	051-3519-90	NJU7771F05-TE2
C295	168-2232-55	0.022uF K	C705	165-1063-55	35V 10uF			
C301	168-1022-55	1000pF K	C706	165-2263-35	16V 22uF			
C311	046-1042-78	0.1uF K B	C707	165-2263-35	16V 22uF			
C312	043-0603-90	16V 10uF	C708	043-4306-90	1uF			
C313	043-0603-90	16V 10uF	C709	042-0638-51	16V 220uF			
C314	043-0603-90	16V 10uF	C710	165-2263-35	16V 22uF	J201	074-4017-28	28P
C316	AQZ0761	EZJZ0V800AA	C711	043-4402-90	16V 1uF	J301	074-4017-20	20P
C317	AQZ0761	EZJZ0V800AA	C713	045-5096-50	5pF +/-0.25pF CH	J401	074-4119-24	24P
C318	165-4763-35	16V 47uF	C714	046-2222-58	2200pF K B	J601	074-2248-60	60P
C319	045-2201-50	22pFJ CH	C715	043-0603-90	16V 10uF	J602	074-2248-40	SOCKET(40P)
C320	045-2201-50	22pFJ CH	C716	043-7702-90	1.0uF	L102	010-3104-53	220 ohm/100MHz

REF NO.	PART NO.	DESCRIPTION
L103	010-3104-53	220 ohm/100MHz
L104	010-3104-53	220 ohm/100MHz
L202	010-3442-50	LBM2016T3R3J
L205	010-3407-67	27uH J
L206	010-3104-54	600 ohm/100MHz
L301	010-3105-62	1k ohm/100MHz
L307	BMZ0211	BLM18PG121SN 1D
L308	010-3104-53	220 ohm/100MHz
L309	010-3105-62	1k ohm/100MHz
L600	010-3104-53	220 ohm/100MHz
L601	010-3127-91	220 ohm/100MHz
L602	010-3127-91	220 ohm/100MHz
L701	010-3105-62	1k ohm/100MHz
L702	010-3075-56	10uH
L703	010-3075-57	22uH
L704	010-3581-50	NRS8040T4R7N JGJV
L705	010-3104-55	MPZ1608S102AT
P501	076-0569-02	2P
P701	076-6021-56	6P
P702	076-6021-60	10P
Q201	192-4081-00	2SC4081
Q204	191-1197-50	2SB1197K Q,R
Q205	125-2026-91	UNR5211G
Q308	192-4081-00	2SC4081
Q309	125-9028-90	UMX1N-TN
Q401	192-4081-00	2SC4081
Q402	125-2046-91	DTC114EUBTL
Q403	125-0021-95	DTA143ZUA-T106
Q404	193-1306-00	2SD1306
Q405	193-1306-00	2SD1306
Q701	125-8048-90	SQJ942EP-T1-GE3
Q702	125-8048-90	SQJ942EP-T1-GE3
R101	033-1031-15	1/16W 10k ohm J
R106	033-0000-05	1/16W 0 ohm
R112	033-3311-15	1/16W 330 ohm J
R115	032-0221-08	1/16W 1k ohm F
R117	032-0221-08	1/16W 1k ohm F
R120	032-0221-08	1/16W 1k ohm F
R123	032-0221-08	1/16W 1k ohm F
R125	033-1011-15	1/16W 100 ohm J
R126	033-1011-15	1/16W 100 ohm J
R127	033-1011-15	1/16W 100 ohm J
R128	033-1011-15	1/16W 100 ohm J
R131	033-0000-05	1/16W 0 ohm
R133	119-2221-15	1/10W 2.2k ohm
R134	033-0000-05	1/16W 0 ohm
R136	033-0000-05	1/16W 0 ohm
R138	032-0221-50	1/16W 43k ohm F
R139	033-0000-05	1/16W 0 ohm
R140	032-0221-62	1/16W 8.2k ohm F
R141	119-0000-05	1/10W 0 ohm JW
R142	032-0221-50	1/16W 43k ohm F
R143	033-0000-05	1/16W 0 ohm
R144	032-0221-62	1/16W 8.2k ohm F
R145	033-0000-05	1/16W 0 ohm
R146	033-0000-05	1/16W 0 ohm
R147	119-0000-05	1/10W 0 ohm JW
R201	117-1011-15	1/8W 100 ohm
R202	117-1011-15	1/8W 100 ohm
R203	116-6811-15	1/4W 680 ohm
R204	032-0221-74	1/16W 10k ohm 1%
R205	032-0221-63	1/16W 12k ohm F
R207	033-1031-15	1/16W 10k ohm J
R208	033-1031-15	1/16W 10k ohm J
R209	032-0221-08	1/16W 1k ohm F
R211	119-0000-05	1/10W 0 ohm JW
R214	119-0000-05	1/10W 0 ohm JW
R228	117-2211-15	1/8W 220 ohm
R229	119-0000-05	1/10W 0 ohm JW
R230	032-0221-84	1/16W 27k ohm F
R232	032-0221-65	1/16W 68k ohm F
R233	117-4701-15	1/8W 47 ohm

REF NO.	PART NO.	DESCRIPTION
R234	117-4701-15	1/8W 47 ohm
R235	119-0000-05	1/10W 0 ohm JW
R236	032-0221-84	1/16W 27k ohm F
R237	032-0221-65	1/16W 68k ohm F
R238	119-0000-05	1/10W 0 ohm JW
R241	119-0000-05	1/10W 0 ohm JW
R248	119-0000-05	1/10W 0 ohm JW
R252	032-0225-70	1/16W 130k ohm 0.5%
R253	032-0221-76	1/16W 24k ohm F
R263	033-1811-15	1/16W 180 ohm J
R265	116-1021-15	1/4W 1k ohm
R266	116-1051-15	1/4W 1M ohm
R269	033-1031-15	1/16W 10k ohm J
R270	119-0000-05	1/10W 0 ohm JW
R271	033-4721-15	1/16W 4.7k ohm J
R272	033-4721-15	1/16W 4.7k ohm J
R273	032-0210-71	1/10W 16k ohm 1%
R274	032-0221-09	1/16W 33k ohm F
R275	032-0225-64	1/16W 9.1k ohm +/- 0.5%
R276	032-0221-11	1/16W 5.6k ohm F
R277	032-0210-71	1/10W 16k ohm 1%
R278	032-0221-57	1/16W 13k ohm F
R279	032-0221-09	1/16W 33k ohm F
R280	032-0092-51	1/8W 1k ohm F
R281	117-2221-15	1/8W 2.2k ohm
R282	119-0000-05	1/10W 0 ohm JW
R283	119-0000-05	1/10W 0 ohm JW
R289	032-0225-59	1/16W 4.3k ohm 0.5%
R290	033-3331-15	1/16W 33k ohm J
R291	033-4721-15	1/16W 4.7k ohm J
R296	032-0221-60	1/16W 3.9k ohm F
R297	032-0221-95	1/16W 2.7k ohm F
R298	119-0000-05	1/10W 0 ohm JW
R299	116-1011-15	1/4W 100 ohm
R301	032-0209-50	1/4W 82 ohm D
R302	032-0210-74	1/10W 470 ohm F
R304	119-0000-05	1/10W 0 ohm JW
R321	032-0221-53	1/16W 18k ohm F
R322	032-0221-53	1/16W 18k ohm F
R323	032-0221-53	1/16W 18k ohm F
R324	032-0221-53	1/16W 18k ohm F
R325	116-1011-15	1/4W 100 ohm
R326	033-4731-15	1/16W 47k ohm J
R327	033-4731-15	1/16W 47k ohm J
R328	032-0221-53	1/16W 18k ohm F
R329	032-0221-53	1/16W 18k ohm F
R330	032-0221-53	1/16W 18k ohm F
R331	032-0221-53	1/16W 18k ohm F
R332	117-2211-15	1/8W 220 ohm
R333	032-0210-64	1/10W 1k ohm F
R339	032-0221-08	1/16W 1k ohm F
R340	119-0000-05	1/10W 0 ohm JW
R341	119-0000-05	1/10W 0 ohm JW
R342	119-0000-05	1/10W 0 ohm JW
R344	119-4721-15	1/10W 4.7k ohm
R345	119-3931-15	1/10W 39k ohm
R346	119-1531-15	1/10W 15k ohm
R347	032-0210-59	1/10W 5.6k ohm F
R348	032-0210-56	1/10W 22k ohm F
R349	AQZ0692	1/3W 1.2k ohm J
R350	119-0000-05	1/10W 0 ohm JW
R351	033-4731-15	1/16W 47k ohm J
R352	033-0000-05	1/16W 0 ohm
R357	119-0000-05	1/10W 0 ohm JW
R358	119-0000-05	1/10W 0 ohm JW
R359	119-0000-05	1/10W 0 ohm JW
R401	032-0221-76	1/16W 24k ohm F
R402	032-0221-76	1/16W 24k ohm F
R403	032-0221-76	1/16W 24k ohm F
R404	032-0221-76	1/16W 24k ohm F
R406	033-4731-15	1/16W 47k ohm J

REF NO.	PART NO.	DESCRIPTION
R407	033-4731-15	1/16W 47k ohm J
R408	032-0221-53	1/16W 18k ohm F
R409	032-0221-53	1/16W 18k ohm F
R410	032-0221-53	1/16W 18k ohm F
R411	032-0221-53	1/16W 18k ohm F
R412	032-0221-56	1/16W 22k ohm F
R419	032-0221-53	1/16W 18k ohm F
R420	032-0221-53	1/16W 18k ohm F
R421	032-0221-09	1/16W 33k ohm F
R422	032-0221-09	1/16W 33k ohm F
R423	033-0000-05	1/16W 0 ohm
R424	033-0000-05	1/16W 0 ohm
R425	117-2211-15	1/8W 220 ohm
R427	119-4721-15	1/10W 4.7k ohm
R428	119-3931-15	1/10W 39k ohm
R429	119-1531-15	1/10W 15k ohm
R430	117-2211-15	1/8W 220 ohm
R433	119-0000-05	1/10W 0 ohm JW
R437	032-0221-11	1/16W 5.6k ohm F
R438	032-0221-11	1/16W 5.6k ohm F
R439	032-0092-89	1/8W 470 ohm F
R440	032-0092-89	1/8W 470 ohm F
R442	119-0000-05	1/10W 0 ohm JW
R443	119-0000-05	1/10W 0 ohm JW
R444	119-0000-05	1/10W 0 ohm JW
R460	032-0221-06	1/16W 100k ohm F
R461	032-0221-06	1/16W 100k ohm F
R462	119-0000-05	1/10W 0 ohm JW
R464	032-0210-64	1/10W 1k ohm F
R465	032-0210-64	1/10W 1k ohm F
R466	032-0221-06	1/16W 100k ohm F
R467	032-0221-06	1/16W 100k ohm F
R509	117-0000-05	1/8W 0 ohm JW
R510	033-0000-05	1/16W 0 ohm
R511	119-0000-05	1/10W 0 ohm JW
R515	032-0221-75	1/16W 47k ohm F
R516	032-0802-92	1/16W 30k ohm F
R517	033-4731-15	1/16W 47k ohm J
R518	119-0000-05	1/10W 0 ohm JW
R519	119-0000-05	1/10W 0 ohm JW
R520	119-0000-05	1/10W 0 ohm JW
R521	119-0000-05	1/10W 0 ohm JW
R522	119-0000-05	1/10W 0 ohm JW
R614	033-0000-05	1/16W 0 ohm
R615	033-0000-05	1/16W 0 ohm
R616	033-0000-05	1/16W 0 ohm
R622	033-0000-05	1/16W 0 ohm
R624	033-0000-05	1/16W 0 ohm
R626	033-0000-05	1/16W 0 ohm
R628	033-0000-05	1/16W 0 ohm
R629	033-0000-05	1/16W 0 ohm
R630	033-0000-05	1/16W 0 ohm
R634	033-0000-05	1/16W 0 ohm
R636	033-0000-05	1/16W 0 ohm
R637	033-0000-05	1/16W 0 ohm
R648	033-0000-05	1/16W 0 ohm
R649	033-0000-05	1/16W 0 ohm
R651	033-0000-05	1/16W 0 ohm
R652	033-0000-05	1/16W 0 ohm
R653	033-0000-05	1/16W 0 ohm
R656	033-0000-05	1/16W 0 ohm
R658	033-0000-05	1/16W 0 ohm
R661	033-0000-05	1/16W 0 ohm
R662	033-0000-05	1/16W 0 ohm
R671	119-0000-05	1/10W 0 ohm JW
R672	119-0000-05	1/10W 0 ohm JW
R673	033-0000-05	1/16W 0 ohm
R674	033-0000-05	1/16W 0 ohm
R675	033-0000-05	1/16W 0 ohm
R701	032-0221-09	1/16W 33k ohm F
R702	032-0221-65	1/16W 68k ohm F
R704	033-0000-05	1/16W 0 ohm
R705	033-0000-05	1/16W 0 ohm
R706	033-0000-05	1/16W 0 ohm

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R708	033-0000-05	1/16W 0 ohm	R719	033-0000-05	1/16W 0 ohm	ZD201	001-0529-32	MA8056-M
R709	033-0000-05	1/16W 0 ohm	R720	033-0000-05	1/16W 0 ohm	ZD202	001-0529-32	MA8056-M
R710	033-0000-05	1/16W 0 ohm	R721	033-0000-05	1/16W 0 ohm	ZD206	001-4305-19	UDZSTE-17 5.1B
R711	033-0000-05	1/16W 0 ohm	R722	032-0225-58	1/16W 20k ohm +/- 0.5%	ZD305	001-4305-20	UDZSTE-17 5.6B
R712	032-0225-58	1/16W 20k ohm +/- 0.5%	R723	033-0000-05	1/16W 0 ohm	ZD306	001-4305-20	UDZSTE-17 5.6B
R713	032-0221-10	1/16W 15k ohm F	R724	032-0221-75	1/16W 47k ohm F	ZD307	001-4305-19	UDZSTE-17 5.1B
R714	032-0221-06	1/16W 100k ohm F	R725	032-0253-50	2W 8m ohm	ZD402	001-4305-19	UDZSTE-17 5.1B
R715	032-0221-72	1/16W 470 ohm F	R726	032-0253-50	2W 8m ohm	ZD403	001-4305-19	UDZSTE-17 5.1B
R716	032-0221-56	1/16W 22k ohm F	R728	033-0000-05	1/16W 0 ohm	PWB	039-4690-00	PWB(WITHOUT COMPONENTS)
R717	032-0221-72	1/16W 470 ohm F	R729	033-1011-15	1/16W 100 ohm J			
R718	033-0000-05	1/16W 0 ohm	VR201	001-9213-50	EZJ1V270EA			

HD PWB(B5) section

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C1	046-1022-58	50V 1000pF	C49	046-1022-58	50V 1000pF	L2	010-3104-54	600 ohm/100MHz
C2	046-1022-58	50V 1000pF	C50	046-1022-58	50V 1000pF	L3	010-3104-54	600 ohm/100MHz
C3	046-1042-78	0.1uF K B	C51	046-1022-58	50V 1000pF	L4	010-3104-54	600 ohm/100MHz
C4	046-1042-78	0.1uF K B	C52	045-2096-50	2pF +/-0.25pF CH	NF1	060-3117-51	CKD510JB1E22 3ST
C5	046-1022-58	50V 1000pF	C53	045-2096-50	2pF +/-0.25pF CH	NF2	060-3117-51	CKD510JB1E22 3ST
C6	046-1022-58	50V 1000pF	C55	045-2701-50	27pFJ CH	R1	033-3321-15	1/16W 3.3k ohm J
C7	046-1022-58	50V 1000pF	C88	046-1042-78	0.1uF K B	R5	033-4701-15	1/16W 47 ohm J
C8	046-1022-58	50V 1000pF	C89	043-6401-90	16V 10uF	R6	033-4701-15	1/16W 47 ohm J
C9	046-1042-78	0.1uF K B	C90	046-1042-78	0.1uF K B	R7	033-4701-15	1/16W 47 ohm J
C10	046-1042-78	0.1uF K B	C91	046-1042-78	0.1uF K B	R8	033-4701-15	1/16W 47 ohm J
C11	046-1042-78	0.1uF K B	C92	046-1042-78	0.1uF K B	R9	033-4701-15	1/16W 47 ohm J
C12	046-1042-78	0.1uF K B	C93	046-1042-78	0.1uF K B	R10	033-4701-15	1/16W 47 ohm J
C13	046-1042-78	0.1uF K B	C94	046-1042-78	0.1uF K B	R11	033-4701-15	1/16W 47 ohm J
C14	046-1042-78	0.1uF K B	C95	043-6401-90	16V 10uF	R12	033-4701-15	1/16W 47 ohm J
C15	046-1042-78	0.1uF K B	C96	043-6401-90	16V 10uF	R13	033-4701-15	1/16W 47 ohm J
C16	046-1042-78	0.1uF K B	C97	043-6401-90	16V 10uF	R14	033-4701-15	1/16W 47 ohm J
C17	046-1042-78	0.1uF K B	C98	043-0559-90	6.3V 22uF	R15	033-4701-15	1/16W 47 ohm J
C18	046-1042-78	0.1uF K B	C99	046-1022-58	50V 1000pF	R17	033-4701-15	1/16W 47 ohm J
C19	046-1042-78	0.1uF K B	C100	046-1022-58	50V 1000pF	R18	033-4701-15	1/16W 47 ohm J
C20	046-1042-78	0.1uF K B	C101	043-4306-90	1uF	R19	033-4701-15	1/16W 47 ohm J
C21	046-1042-78	0.1uF K B	C102	043-4306-90	1uF	R20	033-4701-15	1/16W 47 ohm J
C22	046-1042-78	0.1uF K B	C103	046-1042-78	0.1uF K B	R22	033-1031-15	1/16W 10k ohm J
C23	046-1042-78	0.1uF K B	C104	046-1042-78	0.1uF K B	R23	033-1031-15	1/16W 10k ohm J
C24	046-1042-78	0.1uF K B	C111	046-1042-78	0.1uF K B	R25	033-0000-05	1/16W 0 ohm
C25	046-1042-78	0.1uF K B	C114	168-1052-78	16V 1uF K	R26	033-0000-05	1/16W 0 ohm
C26	046-1042-78	0.1uF K B	C115	168-1052-78	16V 1uF K	R27	033-0000-05	1/16W 0 ohm
C27	046-1042-78	0.1uF K B	C116	046-1042-78	0.1uF K B	R28	033-0000-05	1/16W 0 ohm
C28	046-1042-78	0.1uF K B	C117	046-1042-78	0.1uF K B	R29	033-0000-05	1/16W 0 ohm
C29	046-1042-78	0.1uF K B	C118	043-6401-90	16V 10uF	R30	033-0000-05	1/16W 0 ohm
C30	046-1042-78	0.1uF K B	C119	046-1042-78	0.1uF K B	R31	033-0000-05	1/16W 0 ohm
C31	046-1042-78	0.1uF K B	IC1	-----	SAF3560HV/ V1100,557 (Exposed die pad) (470200-051)	RN1	AUZ0032	1/16W 33 ohm x4
C32	046-1042-78	0.1uF K B	IC2	-----	MD56V62165M-7TAL41L (SDRAM) (933021-051)	RN2	AUZ0032	1/16W 33 ohm x4
C33	046-1042-78	0.1uF K B	IC3	-----	W25Q80DVSSIG (FLASH ROM) (359800-052)	RN3	AUZ0032	1/16W 33 ohm x4
C34	046-1022-58	50V 1000pF	IC4	051-3516-90	S-1132B33-U5T1G	RN5	AUZ0032	1/16W 33 ohm x4
C35	046-1022-58	50V 1000pF	IC5	-----	BD12KA5FP-E2 (Voltage regulator) (Thermal pad) (357590-051)	RN6	AUZ0032	1/16W 33 ohm x4
C36	046-1022-58	50V 1000pF	J1	076-2031-20	PLUG(20P)	RN7	AUZ0032	1/16W 33 ohm x4
C37	046-1022-58	50V 1000pF	L1	010-3104-54	600 ohm/100MHz	RN8	AUZ0032	1/16W 33 ohm x4
C38	046-1022-58	50V 1000pF				RN9	AUZ0032	1/16W 33 ohm x4
C39	046-1022-58	50V 1000pF				RN10	AUZ0032	1/16W 33 ohm x4
C40	046-1042-78	0.1uF K B				X1	061-3600-90	NX3225GA 28.224MHZ
C41	046-1042-78	0.1uF K B				PWB	039-3939-00	PWB(WITHOUT COMPONENTS)
C42	046-1042-78	0.1uF K B						
C43	046-1042-78	0.1uF K B						
C44	046-1042-78	0.1uF K B						
C45	046-1042-78	0.1uF K B						
C46	046-1042-78	0.1uF K B						
C47	046-1042-78	0.1uF K B						
C48	046-1042-78	0.1uF K B						