


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :**
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to  mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
- (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

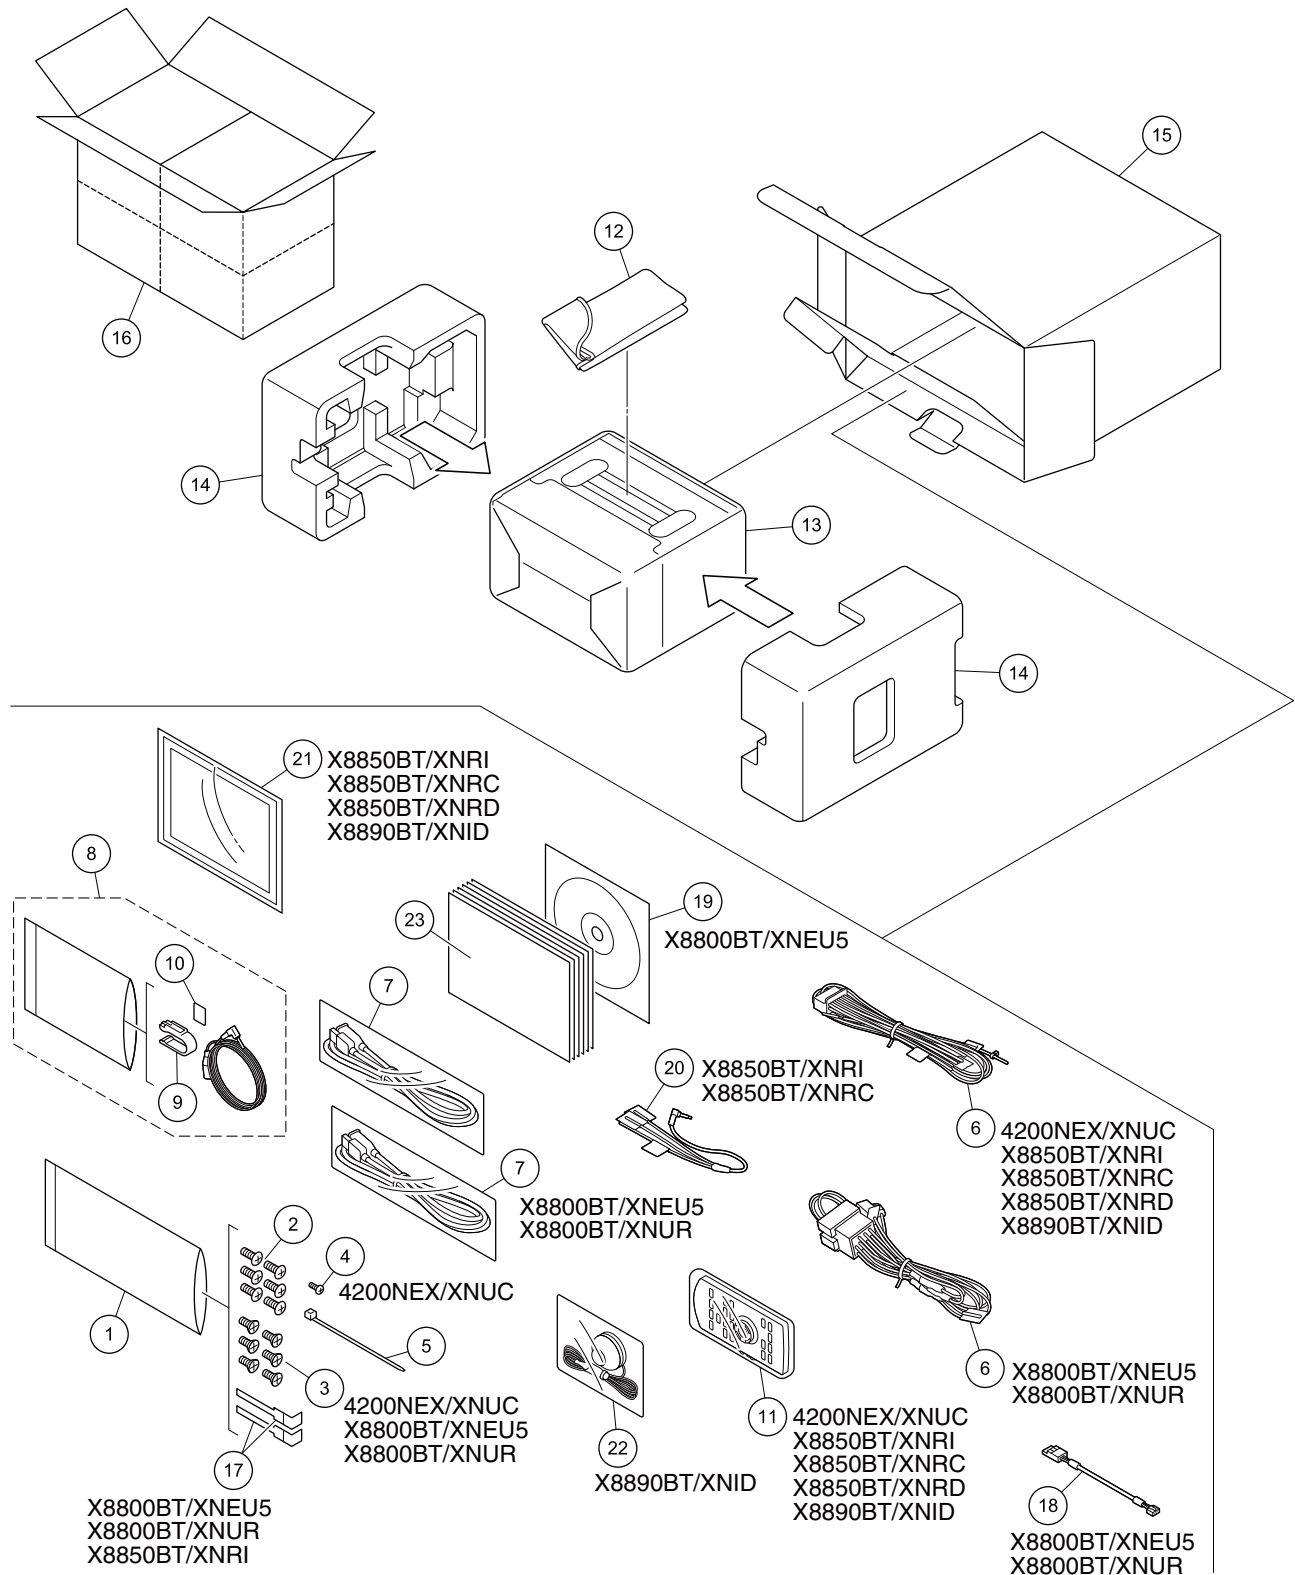

(1) PACKING SECTION PARTS LIST


<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
	1 Polyethylene Bag	CEG1160			
A	2 Screw	CBA2384	16	Contain Box	See Contrast table (2)
	3 Screw	See Contrast table (2)	17	Handle	See Contrast table (2)
	4 Screw	See Contrast table (2)	18	Cord	See Contrast table (2)
*	5 Lock Tie	CNW2429	19	IM CD-ROM	See Contrast table (2)
			20	Cord Assy	See Contrast table (2)
	6 Cord Assy	See Contrast table (2)			
	7 USB Extended Cable	See Contrast table (2)	21	Panel	See Contrast table (2)
	8 Microphone Assy	CPM1109	22	Microphone Assy	See Contrast table (2)
	9 Holder	CZN7192	*	23-1 Warranty Card	See Contrast table (2)
	10 Cushion	CZN7193		23-2 Owner's Manual	See Contrast table (2)
			*	23-3 Caution Card	See Contrast table (2)
B	11 Card Remote Control Unit	See Contrast table (2)			
	12 Detach Grille Case	YEG5016	*	23-4 Caution Card	See Contrast table (2)
	13 Cover	See Contrast table (2)		23-5 Quick Start Guide	See Contrast table (2)
	14 Protector	See Contrast table (2)		23-6 Installation Manual	See Contrast table (2)
	15 Unit Box	See Contrast table (2)	*	23-7 Tag	See Contrast table (2)
			*	23-8 Service Network	See Contrast table (2)
				23-9 Caution Card	CRP1510

(2) CONTRAST TABLE

AVH-4200NEX/XNUC, AVH-X8800BT/XNEU5, AVH-X8800BT/XNUR, AVH-X8850BT/XNRI, AVH-X8850BT/XNRC, AVH-X8850BT/XNRD and AVH-X8890BT/XNID are constructed the same except for the following:

<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>AVH-4200NEX/XNUC</u>	<u>AVH-X8800BT/XNEU5</u>	<u>AVH-X8800BT/XNUR</u>	<u>AVH-X8850BT/XNRI</u>	<u>AVH-X8850BT/XNRC</u>	<u>AVH-X8850BT/XNRD</u>	<u>AVH-X8890BT/XNID</u>
	3	Screw	CBA2383	CBA2383	CBA2383	Not used	Not used	Not used	Not used
	4	Screw	BPZ20P060FTC	Not used	Not used	Not used	Not used	Not used	Not used
	6	Cord Assy	CDP1665	CDP1670	CDP1670	CDP1665	CDP1665	CDP1665	CDP1665
	7	USB Extended Cable	CDP1587 (x1)	CDP1587 (x2)	CDP1587 (x2)	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x1)
	11	Card Remote Control Unit	CXE5117	Not used	Not used	CXE5117	CXE5117	CXE5117	CXE5117
D	13	Cover	CEG1359	CEG1356	CEG1356	CEG1356	CEG1356	CEG1356	CEG1356
	14	Protector	CHP4863	CHP4864	CHP4864	CHP4864	CHP4863	CHP4863	CHP4863
	15	Unit Box	CHG9211	CHG9215	CHG9216	CHG9217	CHG9212	CHG8923	CHG8924
	16	Contain Box	CHL9211	CHL9215	CHL9216	CHL9217	CHL9212	CHL8923	CHL8924
	17	Handle	Not used	CND6289	CND6289	CND6289	Not used	Not used	Not used
	18	Cord	Not used	CDP1669	CDP1669	Not used	Not used	Not used	Not used
	19	IM CD-ROM	Not used	CPJ1509	Not used	Not used	Not used	Not used	Not used
	20	Cord Assy	Not used	Not used	Not used	CDP1655	CDP1655	Not used	Not used
	21	Panel	Not used	Not used	Not used	CNS9475	CNS9475	CNS9475	CNS9475
	22	Microphone Assy	Not used	Not used	Not used	Not used	Not used	Not used	CPM1086
E	*	23-1 Warranty Card	QRY3001	CRY1376	CRY1376	Not used	Not used	Not used	CRY1304
		23-2 Owner's Manual	CRD4943	Not used	CRD4942	CRD4944	CRD4941	CRD4945	CRD4946
	*	23-3 Caution Card	CRP1502	CRP1502	CRP1502	CRP1503	CRP1503	CRP1503	CRP1503
	*	23-4 Caution Card	Not used	CRP1441	Not used	Not used	Not used	Not used	Not used
		23-5 Quick Start Guide	Not used	CRD4939	Not used	Not used	Not used	Not used	Not used
	23-6	Installation Manual	Not used	CRD4940	Not used	Not used	Not used	Not used	Not used
	*	23-7 Tag	Not used	CRW1881	CRW1881	Not used	Not used	Not used	Not used
	*	23-8 Service Network	Not used	Not used	Not used	Not used	Not used	Not used	CRY1305

9.2 EXTERIOR (1)

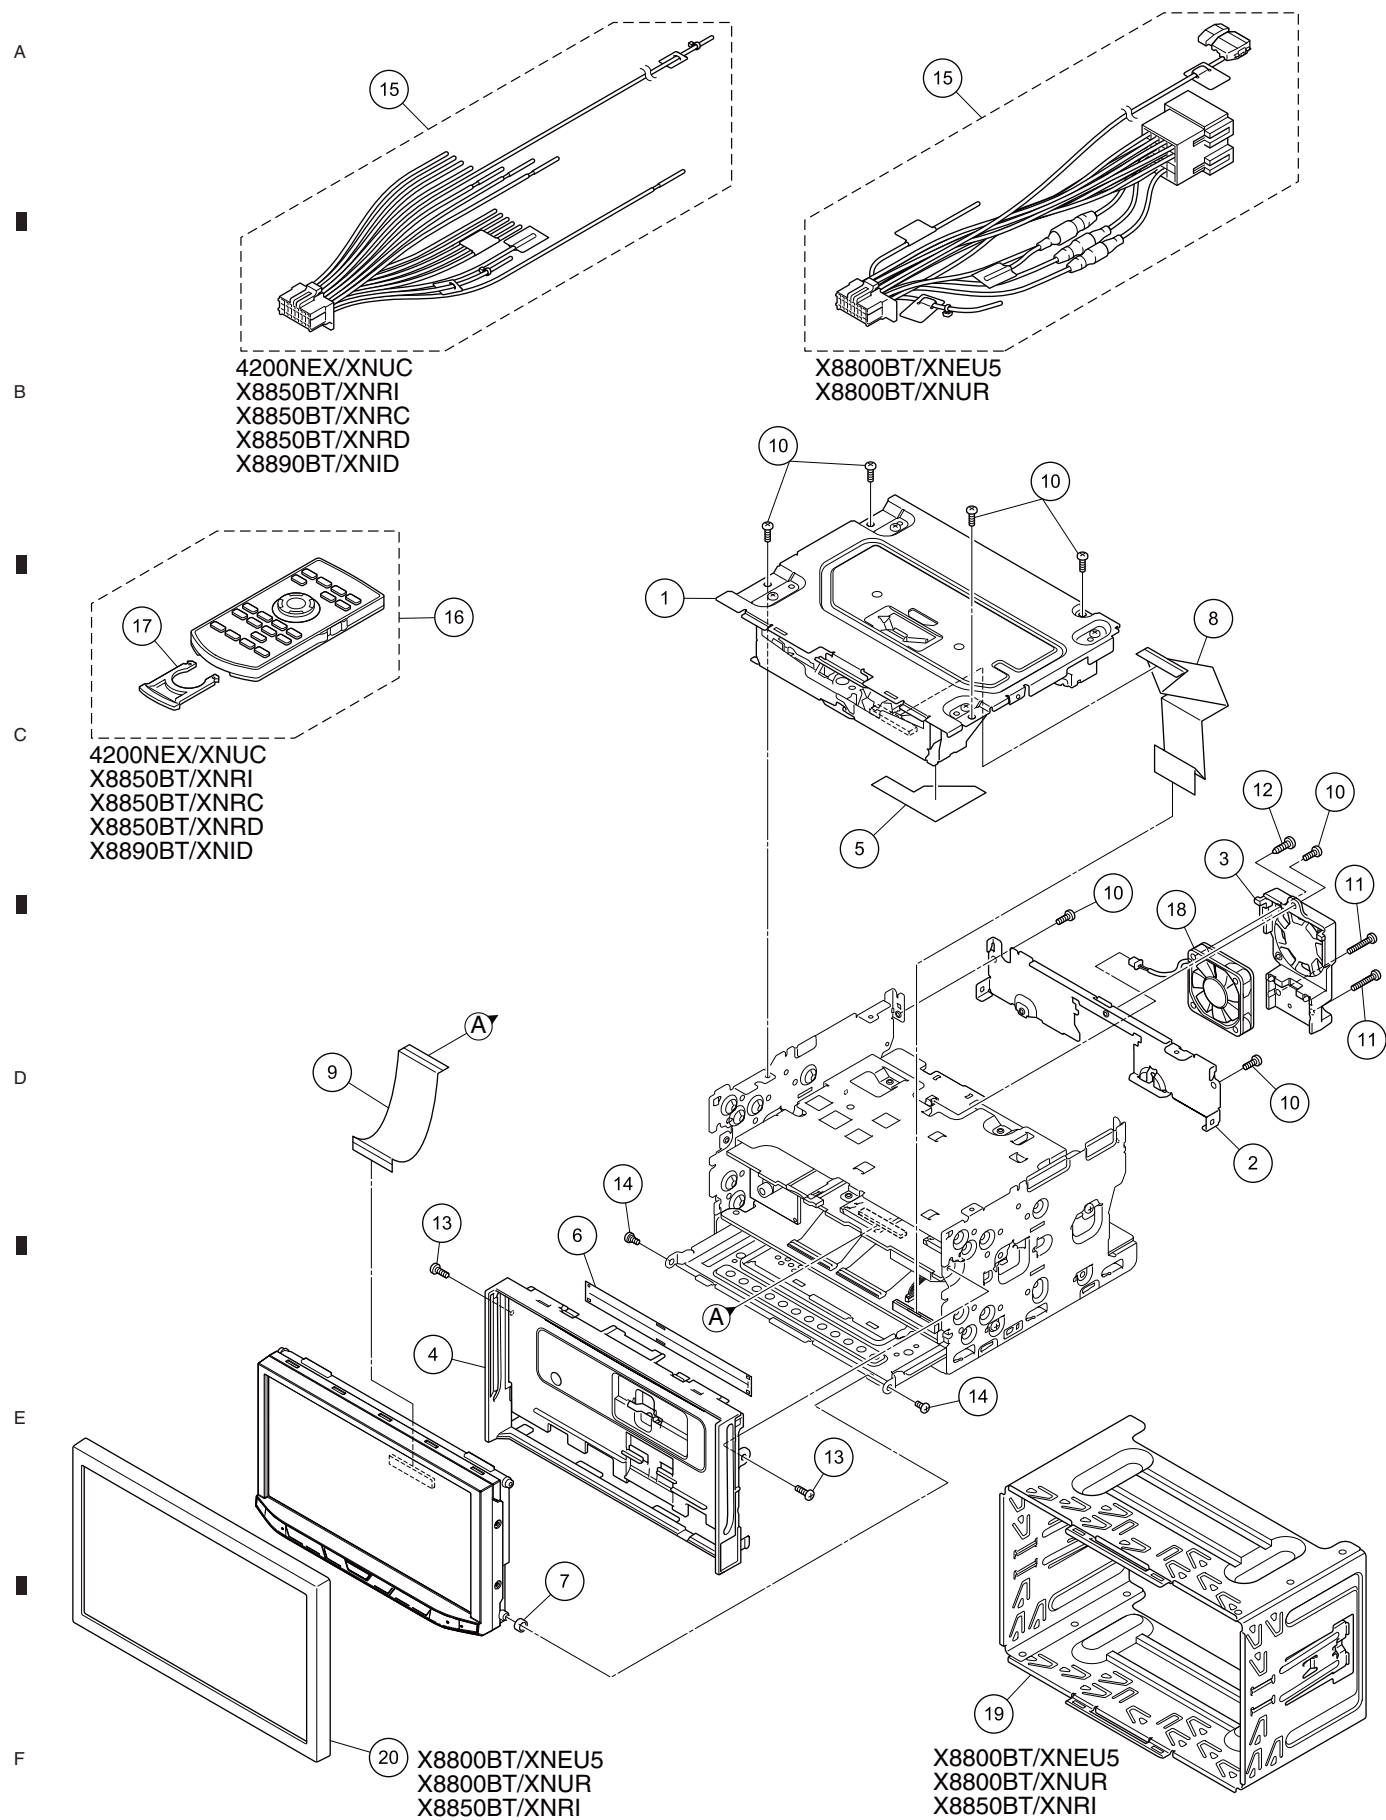

(1) EXTERIOR (1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	DVD Mechanism Module (LS2.5)	CXK8102	11	Screw	BSZ26P120FTC
2	Holder	CND6989	12	Screw	BPZ30P080FTC
3	Heat Sink	CNR2165	13	Screw	ISS26P055FTC
4	Panel	See Contrast table (2)	14	Screw	CBA1735
5	Insulator	CNN4613	15	Cord Assy	See Contrast table (2)
6	Cover	CNN4866	16	Card Remote Control Unit	See Contrast table (2)
7	Collar	CNW2038	17	Battery Cover	See Contrast table (2)
8	FFC	CDD1033	18	Fan Motor	See Contrast table (2)
9	FFC	CDD1039	19	Holder	See Contrast table (2)
10	Screw	BSZ26P060FTC	20	Panel	See Contrast table (2)

(2) CONTRAST TABLE

AVH-4200NEX/XNUC, AVH-X8800BT/XNEU5, AVH-X8800BT/XNUR, AVH-X8850BT/XNRI, AVH-X8850BT/XNRC, AVH-X8850BT/XNRD and AVH-X8890BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4200NEX/ XNUC	AVH-X8800BT/ XNEU5	AVH-X8800BT/ XNUR	AVH-X8850BT/ XNRI	AVH-X8850BT/ XNRC	AVH-X8850BT/ XNRD	AVH-X8890BT/ XNID
	4	Panel	CNU3147	CNU3219	CNU3219	CNU3220	CNU3220	CNU3220	CNU3220
	15	Cord Assy	CDP1665	CDP1670	CDP1670	CDP1665	CDP1665	CDP1665	CDP1665
	16	Card Remote Control Unit	CXE5117	Not used	Not used	CXE5117	CXE5117	CXE5117	CXE5117
	17	Battery Cover	CNU1624	Not used	Not used	CNU1624	CNU1624	CNU1624	CNU1624
	18	Fan Motor	CXM1449	CXM1449	CXM1449	CXM1449	CXM1449	CXM1449	CXM1446
	19	Holder	Not used	CND7102	CND7102	CND7102	Not used	Not used	Not used
	20	Panel	Not used	CNU2645	CNU2645	CNU2645	Not used	Not used	Not used

9.3 EXTERIOR (2)

A


B

C

D

E

F

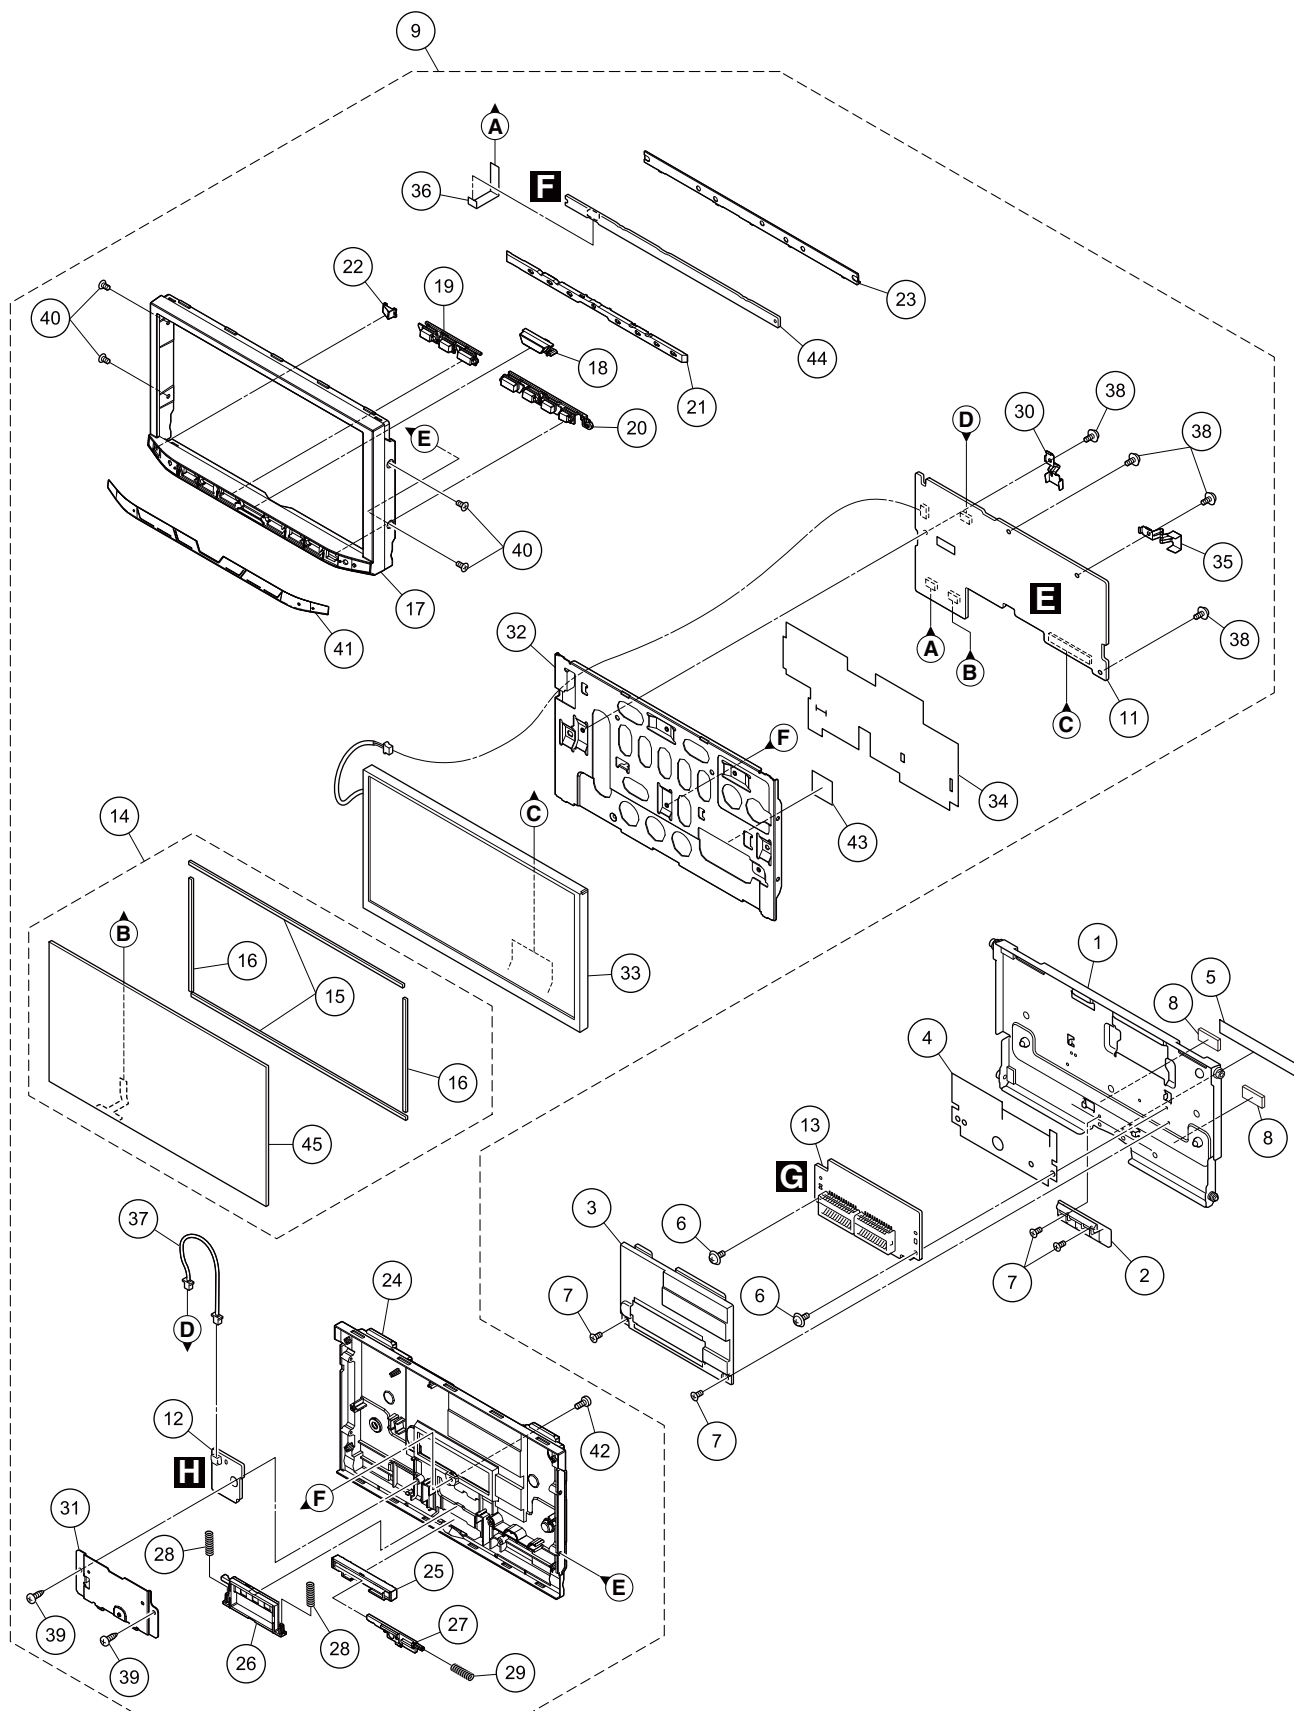


<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Case Unit	CXE6925	26	Lever	CNW2422
2	Holder	CNW2424	27	Lever	CNW2423
3	Cover	CNW2425	28	Spring	CBH3099
4	Insulator	CNN4611	29	Spring	CBH3100
5	Cover	CNN4167	30	Plate Spring	CBL1832
6	Screw	AMZ20P030FTC	31	Holder Unit	CXE4883
7	Screw (M2 x 3)	CBA1877	32	Holder	CND7429
8	Cushion	CNN5291	33	TFT LCD	CWX4781
9	Detach Monitor Assy	See Contrast table (2)	34	Insulator	CNN4610
10	•••••		35	Plate Spring	CBL1833
11	Monitor Unit (Service)	CXX8726	36	FFC	CDD1038
12	SW Unit (Service)	CXX8728	37	Harness	CDE9563
13	Case Unit (Service)	CXX8729	38	Screw	AMZ20P030FTC
14	Touch Panel Unit	CXE7770	39	Screw	BPZ20P060FTC
15	Cushion	CNN4271	40	Screw	CBA2132
16	Cushion	CNN4272	41	Plate	See Contrast table (2)
17	Grille	CNU3245	42	Screw (M2 x 3)	CBA1797
18	Button (HOME)	CAI4318	43	Sheet	CNN4869
19	Button	CAI4319	44	Key Unit (Service)	CXX8724
20	Button	CAI4320	45	Touch Panel	CSX1241
21	Lighting Conductor	CNW3102			
22	Lighting Conductor	CNW3103			
23	Holder	CNW3104			
24	Cover	CNU3246			
25	Button (DETACH)	CAI3743			

(2) CONTRAST TABLE

AVH-4200NEX/XNUC, AVH-X8800BT/XNEU5, AVH-X8800BT/XNUR, AVH-X8850BT/XNRI, AVH-X8850BT/XNRC, AVH-X8850BT/XNRD and AVH-X8890BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4200NEX/ XNUC	AVH-X8800BT/ XNEU5	AVH-X8800BT/ XNUR	AVH-X8850BT/ XNRI	AVH-X8850BT/ XNRC	AVH-X8850BT/ XNRD	AVH-X8890BT/ XNID
	9	Detach Monitor Assy	CXE9130	CXE9127	CXE9127	CXE9129	CXE9129	CXE9129	CXE9129
	41	Plate	CNN5216	CNN5215	CNN5215	CNN5217	CNN5217	CNN5217	CNN5217

9.4 EXTERIOR (3)

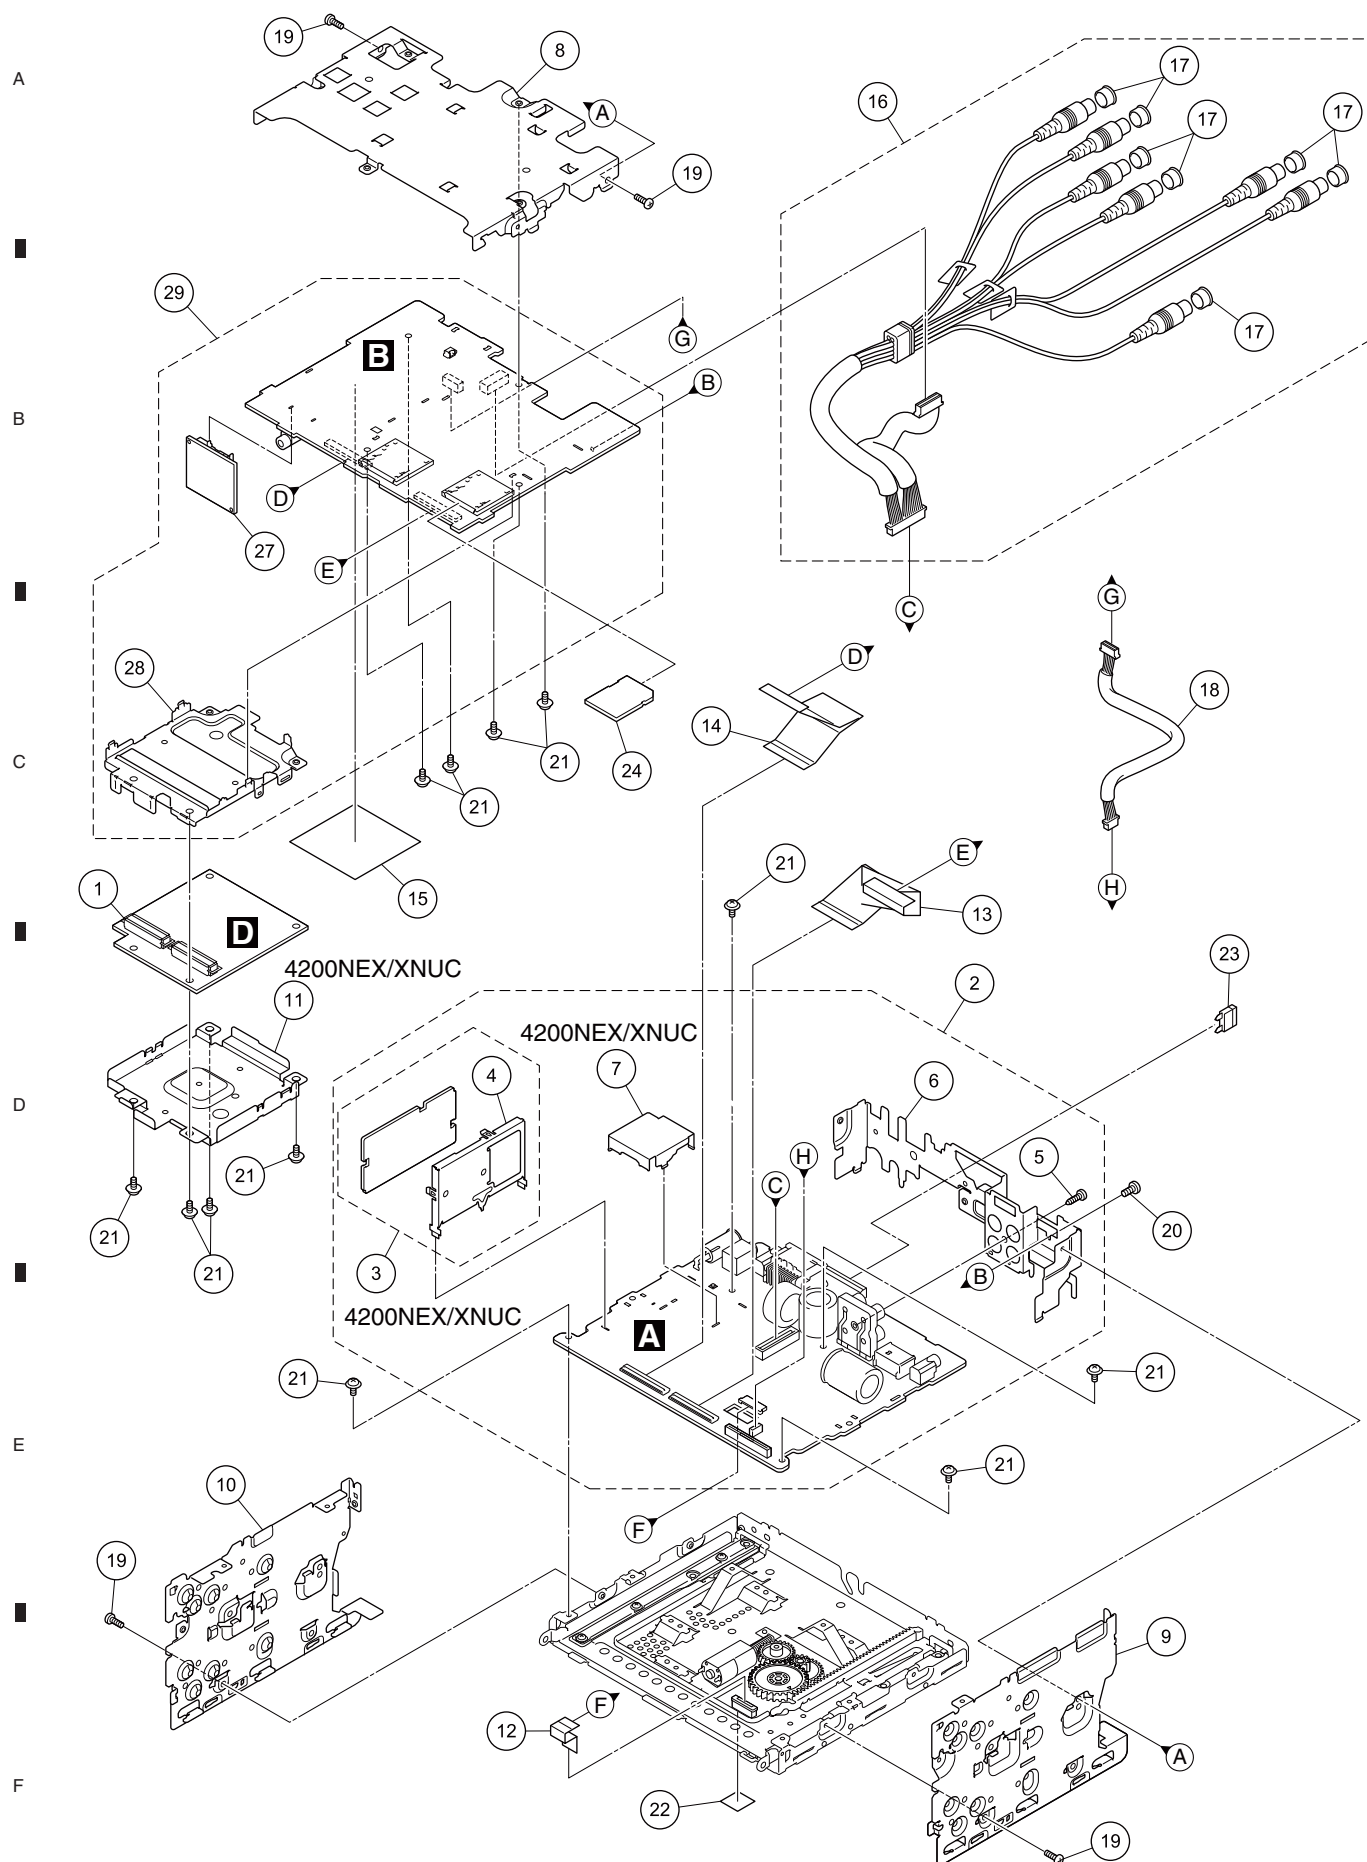


<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	SOC Single Core Unit	CWN9904	16	Cable Assy	CDF1078
2	AV Unit	See Contrast table (2)	17	Cap	CNV6727
3	BE Core Unit (U1701)	See Contrast table (2)	18	Cable Assy	CDF1197
4	Holder	See Contrast table (2)	19	Screw	BSZ26P060FTC
5	Screw	BPZ26P080FTC	20	Screw	BMZ30P060FTC
6	Holder	See Contrast table (2)	21	Screw	ASZ26P050FTC
7	Shield Case	See Contrast table (2)	22	Label	CNN3533
8	Holder	CND6984	23	Fuse (10 A)	YEK5001
9	Bracket	CND6985	24	Service Strage SD Assy	CXX8739
10	Bracket	CND6986	25	•••••	
11	Shield Case	See Contrast table (2)	26	•••••	
12	FFC	CDD1034	27	BT Module	CWX4710
13	FFC	CDD1035	28	Holder	CND6987
14	FFC	CDD1036	29	IF Unit (Service)	See Contrast table (2)
15	Sheet	CNN4830			

(2) CONTRAST TABLE
 AVH-4200NEX/XNUC, AVH-X8800BT/XNEU5, AVH-X8800BT/XNUR, AVH-X8850BT/XNRI, AVH-X8850BT/XNRC, AVH-X8850BT/XNRD and AVH-X8890BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4200NEX/XNUC	AVH-X8800BT/XNEU5	AVH-X8800BT/XNUR	AVH-X8850BT/XNRI	AVH-X8850BT/XNRC	AVH-X8850BT/XNRD	AVH-X8890BT/XNID
	2	AV Unit	CWN9901	CWN9896	CWN9902	CWN9900	CWN9898	CWN9899	CWN9897
	3	BE Core Unit (U1701)	CWE2518	Not used	Not used	Not used	Not used	Not used	Not used
	4	Holder	CND7288	Not used	Not used	Not used	Not used	Not used	Not used
	6	Holder	CND6990	CND7001	CND7001	CND6991	CND6991	CND6991	CND6991
	7	Shield Case	CND7003	Not used	Not used	Not used	Not used	Not used	Not used
	11	Shield Case	CND6988	Not used	Not used	Not used	Not used	Not used	Not used
	29	IF Unit (Service)	CXX8721	CXX8719	CXX8722	CXX8720	CXX8720	CXX8720	CXX8720


9.5 EXTERIOR (4)

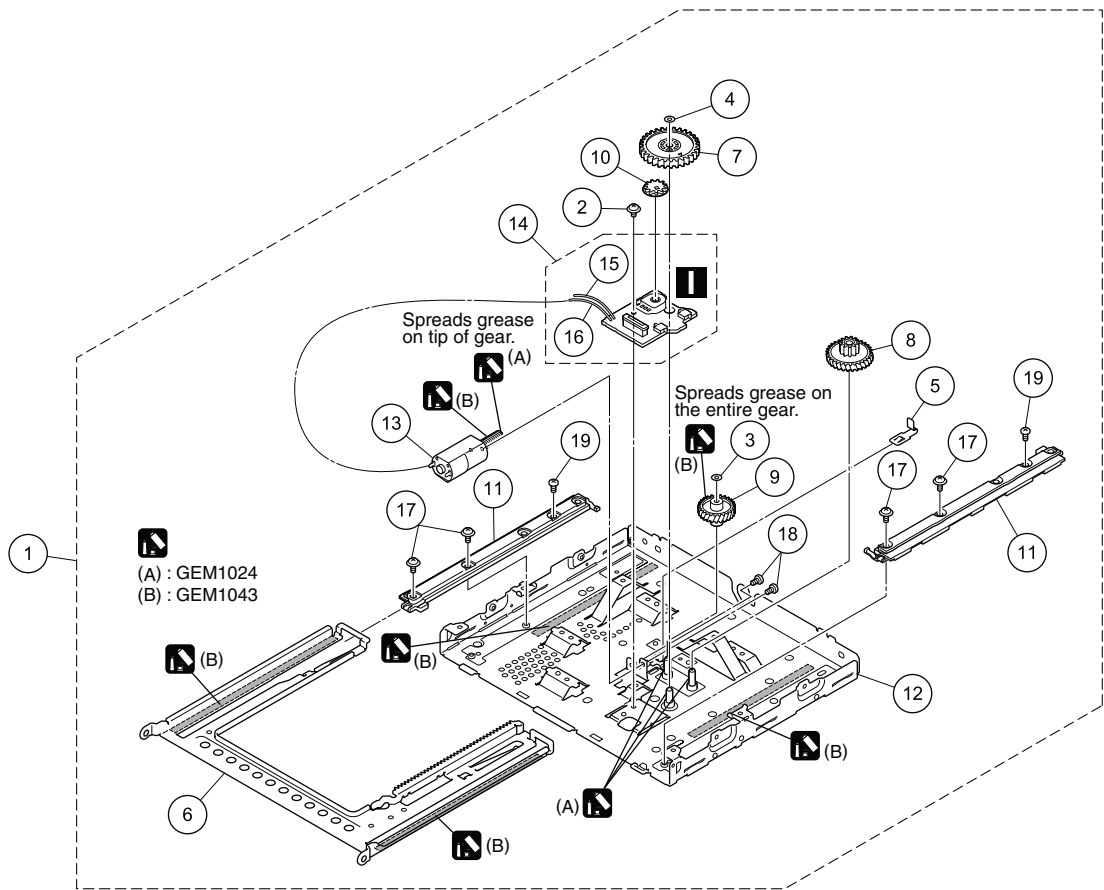

EXTERIOR (4) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Drive Mechanism Unit	CXE7000
2	Screw	AMZ26P030FTC
3	Washer	CBF1039
4	Washer	CBF1064
5	Spring	EBL1034
6	Frame	ENC2001
7	Gear	ENV1630
8	Gear	ENV1631
9	Gear	ENV1632
10	Gear	ENV1635
11	Guide	ENV3001
* 12	Chassis Unit	EXA4027
13	Motor Unit	EXA4003
14	PCB Assy (Service)	EXX2001
* 15	Cord (Green)	CDC1056
* 16	Cord (White)	CDC1057
17	Screw	IMS26P060FTC
18	Screw	JFZ20P025FTC
19	Screw	EBA2002

9.6 DVD MECHANISM MODULE (1)

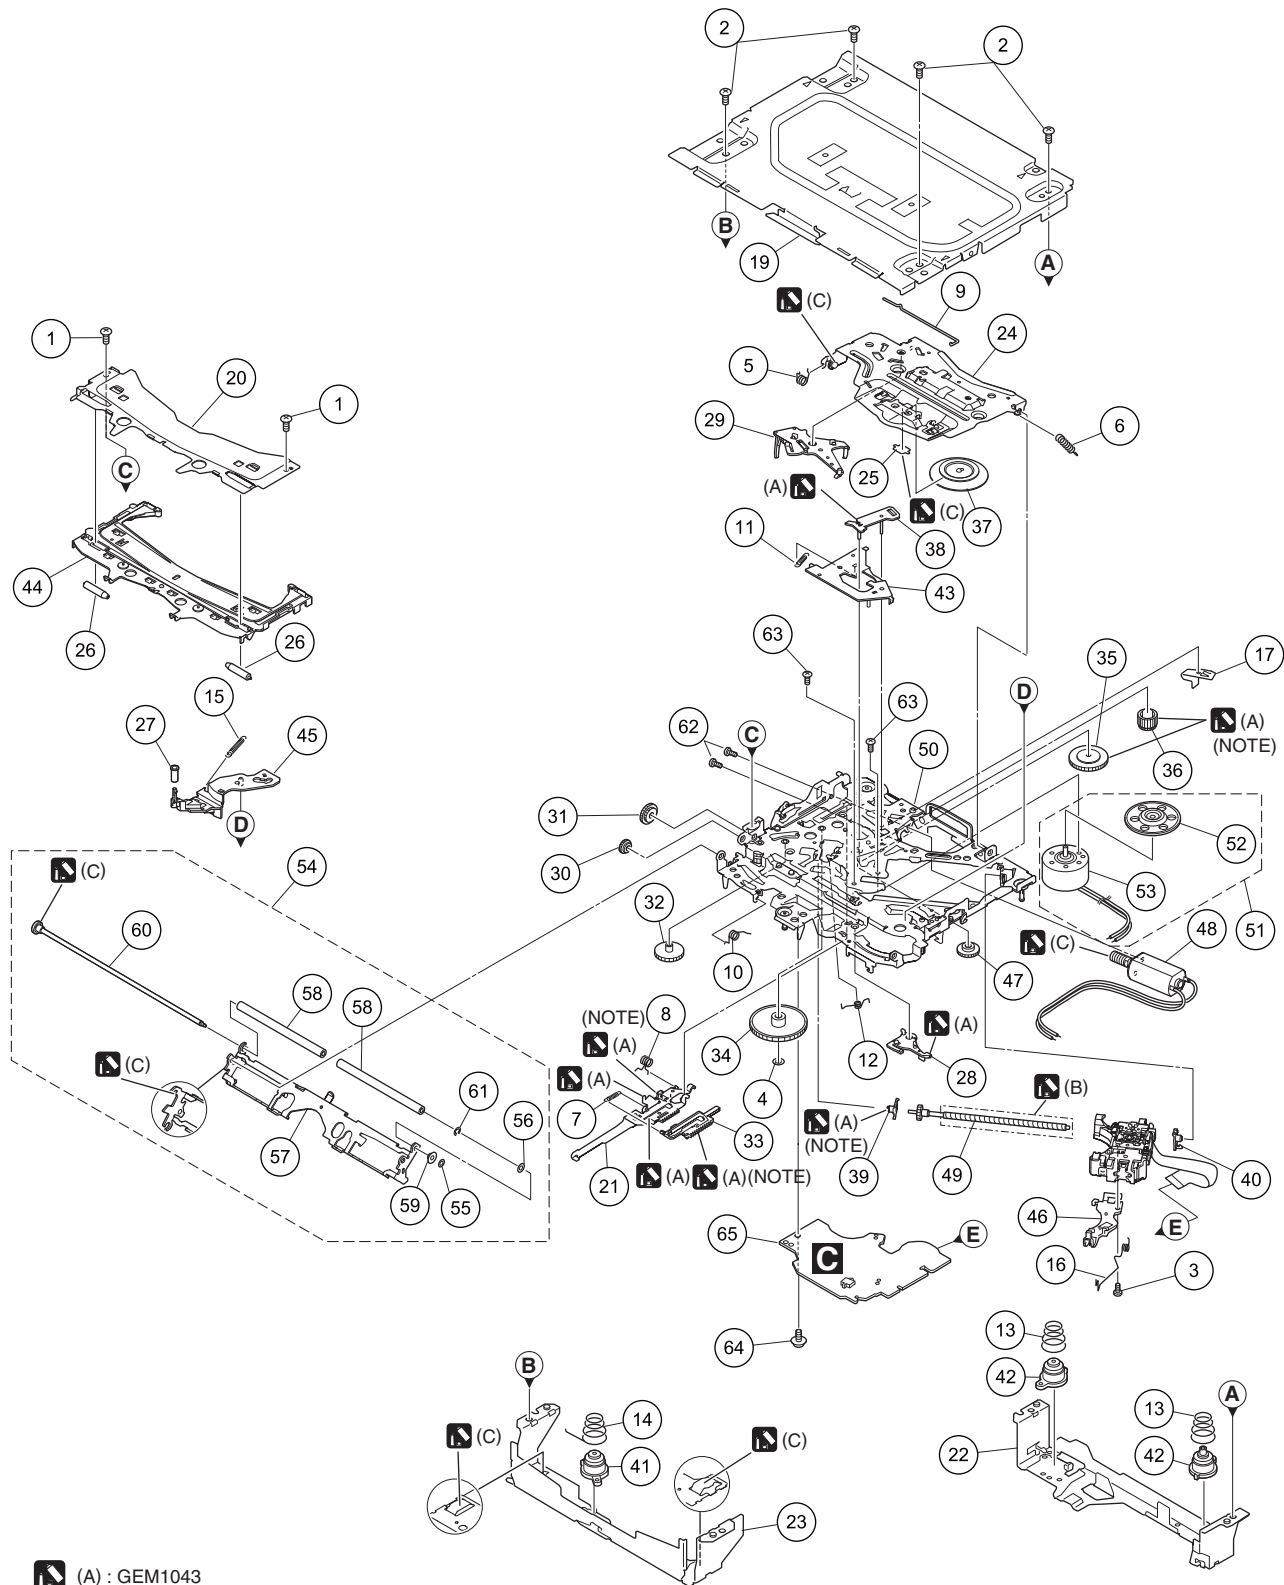

- (A) : GEM1043
- (B) : GEM1045
- (C) : GEM1024

(NOTE) Apply grease to the whole part.

DVD MECHANISM MODULE (1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	BSZ20P040FTC	36	Gear	CNW1187	A
2	Screw	BSZ26P060FTC	37	Clamper	CNW1190	
3	Screw (M2 x 4)	CBA1835	38	Arm	CNW1192	
4	Washer	CBF1038	39	Holder	CNW1193	
5	Spring	CBH2855	40	Holder	CNW1194	
6	Spring	CBH2860	41	Damper	CNW2439	B
7	Spring	CBH3010	42	Damper	CNW2440	
8	Spring	CBH3011	43	Arm	CNW1726	
9	Spring	CBH3014	44	Guide	CNW3489	
10	Spring	CBH3015	45	Arm	CNW2241	
11	Spring	CBH3016	46	Rack	CNW2265	C
12	Spring	CBH3017	47	Gear	CNW2287	
13	Spring	CBH3019	48	Motor Unit	CXC4026	
14	Spring	CBH3086	49	Screw Unit	CXC8894	
15	Spring	CBH3095	50	Chassis Unit	CXE8407	
16	Spring	CBH3096	51			D
17	Plate Spring	CBL1824	*	52 Support Wheel	CNW2052	
18			*	53 Spindle Motor	EXM2002	
19	Case	CNB3928		54 Arm Assy	CXE7890	
20	Bracket	CND4553		55 Washer	CBF1037	
21	Lever	CND7225	56	Washer	CBF1038	E
22	Bracket	CND5710	57	Arm	CND6779	
23	Bracket	CND6127	58	Roller	CNW2500	
24	Arm	CND7224	59	Collar	CNW2444	
25	Sheet	CNN3678	60	Gear Unit	CXE6225	
26	Roller	CNW1172	61	E Ring	YE15FTC	F
27	Roller	CNW1175	62	Screw	JFZ20P025FTC	
28	Arm	CNW1177	63	Screw	JGZ17P020FTC	
29	Arm	CNW1178	64	Screw (M2 x 5)	EBA1028	
30	Gear	CNW1180	65	DVD Core Unit	CWX4717	
31	Gear	CNW1181				F
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J, RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A:AVH-4200NEX/XNUC		Unit Number : CXX8724	
B:AVH-X8800BT/XNEU5		Unit Name : Key Unit(Service)	
C:AVH-X8800BT/XNUR			
D:AVH-X8850BT/XNRC		Unit Number : CXX8729	
E:AVH-X8850BT/XNRD		Unit Name : Case Unit(Service)	
F:AVH-X8850BT/XNRI			
G:AVH-X8890BT/XNID		Unit Number : CXX8728	
		Unit Name : SW Unit(Service)	
Unit Number : CWN9901(A)		Unit Number : EXX2001	
Unit Number : CWN9896(B)		Unit Name : PCB Assy (Service)	
Unit Number : CWN9902(C)			
Unit Number : CWN9898(D)		A	
Unit Number : CWN9899(E)		Unit Number : CWN9901(A)	
Unit Number : CWN9900(F)		Unit Number : CWN9896(B)	
Unit Number : CWN9897(G)		Unit Number : CWN9902(C)	
Unit Name : AV Unit		Unit Number : CWN9898(D)	
		Unit Number : CWN9899(E)	
Unit Number : CXX8721(A)		Unit Number : CWN9900(F)	
Unit Number : CXX8719(B)		Unit Number : CWN9897(G)	
Unit Number : CXX8722(C)		Unit Name : AV Unit	
Unit Number : CXX8720(D,E,F,G)			
Unit Name : IF Unit(Service)		MISCELLANEOUS	
Unit Number : CWX4717		IC 201 (A,98,136) IC PA2032A	
Unit Name : DVD Core Unit		IC 302 (B,148,58) Regulator IC MM3411A33N	
		IC 303 (B,164,47) DC/DC CONV IC NJW4132U2-A	
Unit Number : CWN9904		IC 304 (B,170,83) Regulator BA00CC0WFP	
Unit Name : SOC Single Core Unit		IC 305 (B,154,46) Regulator IC R1516S033B-AE	
		IC 501 (B,30,51) Regulator IC(A) MM3479A33P	
Unit Number : CXX8726		IC 502 (B,33,58) Regulator IC(A) S-1172B12-E6	
Unit Name : Monitor Unit(Service)		IC 504 (B,46,50) Regulator IC MM3571A33P	
		IC 601 (A,68,46) ROM IC CAT93C66VI	
		* IC602 (A,90,35) Flash Blank UC IC UPD70F3925AGMA	
		IC 603 (B,118,17) Reset IC PST8229N	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

IC 801	(B,74,62) IC	AK4223VQ
IC 901	(B,51,29) IC	AK4223VQ
IC 1001	(B,164,97) Dual OP-AMP	NJM4565V
IC 1002	(B,148,75) Dual OP-AMP	NJM4565V
IC 1003	(B,152,100) Dual OP-AMP	NJM4565V
IC 1005	(B,154,87) IC	TC4052BFT
IC 1101	(B,134,55) IC	AK7734XQ
IC 1201	(A,118,44) CONV IC	WM8761BGED
IC 1202	(A,116,54) CONV IC	WM8761BGED

D 111	(B,75,136) Diode	D1F60-5053
D 112	(B,50,108) Diode	DZ2J056M0
D 113	(B,52,111) Diode	DZ2J180M0
D 116	(B,61,107) Rectifier Diode	DA2J101
D 118	(B,56,106) Rectifier Diode	DA2J101
D 123	(B,90,95) Diode	RB080L-30
D 124	(B,105,123) Diode	CRG03
D 201	(B,94,114) Rectifier Diode	DA2J101
D 202	(B,76,116) Rectifier Diode	DAN202UM

IC 1203	(A,115,64) CONV IC	WM8761BGED
IC 1301	(B,80,89) IC	PM9012A
IC 1501	(A,45,64) Tuner IC(A)	TEF6688HN
IC 1501	(A,45,64) Tuner IC(Except A)	TEF6686HN
Q 101	(B,68,106) Bipolar TR	LSCR523UB

D 203	(B,72,114) Rectifier Diode	DAN202UM
D 205	(B,93,111) Diode	DZ2J082M0
D 206	(B,85,110) Rectifier Diode	DA2J101
D 305	(A,151,30) Diode	DZ2J062M0
D 311	(B,171,44) Schottky Diode	RB551VM-30

Q 102	(B,132,78) Chip Transistor	HN1C01FU
Q 104	(B,67,108) Resistor Built-IN TR	LTC014EEB
Q 105	(B,52,104) Chip Transistor	HN1C01FU
Q 107	(B,64,106) Bipolar TR	LSAR523UB
Q 108	(B,58,106) Bipolar TR	LSAR523UB

D 501	(B,36,54) Diode(A)	CRG03
D 601	(B,115,19) Rectifier Diode	DA2J101
D 602	(B,94,24) Schottky Diode	DB2J31400
D 603	(B,94,31) Schottky Diode	DB2J31400
D 604	(B,74,23) Schottky Diode(A)	DB2J31400

Q 111	(B,61,104) Resistor Built-IN TR	LTC014EEB
Q 201	(B,79,111) Transistor	RN4987
Q 202	(B,74,109) Transistor	RN4987
Q 203	(B,77,112) Resistor Built-IN TR	LTA024EEB
Q 204	(B,85,113) Chip Transistor	RN1903

D 1401	(B,23,103) Diode	EZAEG2A50AX
D 1501	(A,43,82) Diode	EZAEG2A50AX
D 1502	(A,36,75) Diode	EZAEG2A50AX
L 101	(A,85,103) Choke Coil 600 uH	CTH1221
L 303	(A,170,40) Choke Coil	CTH1561

Q 205	(B,89,111) Bipolar TR	LSCR523UB
Q 301	(B,160,39) Resistor Built-IN TR	LTC014EEB
Q 302	(B,163,38) Bipolar TR	LSAR523UB
Q 307	(A,146,29) Transistor	2SCR573DG
Q 308	(A,152,33) Resistor Built-IN TR	LTC014EEB

L 901	(B,47,41) Inductor	CTF1786
L 902	(B,48,41) Inductor	CTF1786
L 1101	(A,130,54) Ferrite Bead	CTF1528
L 1102	(A,144,52) Ferrite Bead	CTF1528
L 1201	(A,112,49) Inductor	CTF1786

Q 312	(A,152,46) Bipolar TR	LSCR523UB
Q 314	(B,125,38) Chip Transistor	2SB1689
Q 315	(B,124,35) Bipolar TR	LSCR523UB
Q 601	(B,115,13) Bipolar TR	LSCR523UB
Q 602	(A,67,39) Bipolar TR	LSCR523UB

L 1202	(A,110,59) Inductor	CTF1786
L 1203	(A,114,70) Inductor	CTF1786
L 1204	(B,141,51) Chip Beads	VTL1132
L 1501	(A,53,54) Inductor	CTF1749
L 1503	(A,37,73) Inductor	LCYC150K1608

Q 1001	(B,155,82) Chip Transistor	RN1907
Q 1501	(A,31,58) Bipolar TR(A)	MMBT2369L
Q 1502	(A,31,55) Bipolar TR(A)	MMBT2369L
Q 1503	(A,38,58) Bipolar TR(A)	MMBT2369L
Q 1504	(A,37,55) Bipolar TR(A)	MMBT2369L

L 1504	(B,29,96) Inductor	CTF1389
L 1505	(A,45,82) Inductor	LCMAR27J1608
L 2202	(A,104,72) Ferrite Bead	CTF1528
L 2203	(A,94,73) Ferrite Bead	CTF1528
L 2204	(A,105,74) Ferrite Bead	CTF1528

Q 1801	(B,153,20) Chip Transistor	RN4982
Q 1802	(B,148,19) Chip Transistor	RN1910
Q 1804	(B,159,18) Transistor	2SB1260
Q 1805	(B,155,16) Resistor Built-IN TR	LTC014EEB
Q 1806	(A,153,24) IC	RZQ050P01

L 2205	(A,106,76) Ferrite Bead	CTF1528
L 2206	(A,94,76) Ferrite Bead	CTF1528
L 2207	(A,104,76) Ferrite Bead	CTF1528
L 2208	(A,94,77) Ferrite Bead	CTF1528
L 2209	(A,104,78) Ferrite Bead	CTF1528

Q 1807	(A,153,20) Bipolar TR	LSCR523UB
Q 2101	(A,160,103) Transistor	UMF23N
Q 2201	(A,81,81) Chip Transistor	HN1C03FU
Q 2202	(A,78,85) Chip Transistor	HN1C03FU
Q 2203	(B,172,104) Chip Transistor	HN1C03FU

L 2210	(A,101,68) Ferrite Bead	CTF1528
L 2211	(A,111,82) Chip Ferrite Bead	BTX1047
X 601	(A,110,31) Resonator 3.932 16 MHz	CSS1772
X 1101	(B,136,65) Resonator 12.288 MHz	CSS1811
X 1501	(A,54,60) Crystal Resonator 9.216 MHz	CSS1863

Q 2204	(B,131,93) Chip Transistor	HN1C03FU
Q 2301	(A,115,34) Chip Transistor(D,E,F,G)	RN4982
Q 2302	(A,115,25) Chip Transistor(D,E,F,G)	RN4982
Q 2303	(A,115,29) Chip Transistor(D,E,F,G)	RN4982
Q 2304	(B,87,29) Chip Transistor(D,E,F,G)	RN4982

△P301	(A,156,30) Fuse 1.5 A	CEK1282
P 1401	(B,24,103) Surge Absorber	IMSA-6803-01Y900
P 2101	(A,127,105) Poly Switch	FSMD075-24R
P 2201	(A,113,78) Poly Switch	FSMD075-24R
P 2202	(B,164,125) Poly Switch	FSMD075-24R

D 103	(B,71,110) Diode	UDZV6R2(B)
D 105	(B,129,81) Diode	DZ2J200M0
D 106	(B,129,76) Diode	UDZV7R5(B)
D 107	(B,127,79) Rectifier Diode	DAN202UM
D 109	(B,64,112) Rectifier Diode	DA2J101

P 2203	(B,134,99) Poly Switch	FSMD075-24R
P 2206	(B,141,98) Poly Switch	FSMD075-24R
△P2207	(A,94,101) Fuse 3.5 A	CEK1343
△P2208	(A,107,89) Fuse 5.0 A	CEK1346
P 2209	(A,43,121) Poly Switch	FSMD075-24R

D 110	(B,79,136) Diode	D1F60-5053
-------	------------------	------------

BZ601	(A,165,29) Buzzer	CPV1062
-------	-------------------	---------

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
CN1801	(A,153,8) Connector	VKN1620		R 315	(B,174,86)	RS1/16SS3901D	
CN1802	(A,145,18) Connector	CKS6007					
CN1901	(A,129,35) Connector	CKS6095	R 316	(B,174,88)		RS1/16SS2702D	
CN2001	(A,108,11) Connector	CKS6646	R 318	(B,167,95)		RS1/4SA0R0J	A
			R 320	(B,164,87)		RS1/10SR0R0J	
CN2002	(A,71,11) Connector	CKS6646	R 323	(A,151,52)		RS1/10SR102J	
CN2101	(A,157,116) Connector	CKS4497	R 324	(A,145,53)		RS1/10SR0R0J	
CN2201	(A,99,83) Connector	CKS6600					
JA 101	(A,64,132) Jack	CKM1613	R 327	(A,152,29)		RS1/10SR121J	
JA 1401	(A,16,120) Jack	CKX1104	R 328	(A,136,43)		RS1/16SS473J	
			R 329	(A,153,33)		RS1/16SS220J	
JA2202	(A,174,119) Jack	CKS6437	R 341	(A,150,48)		RS1/16SS471J	
JA2203	(A,131,113) Jack	CKB1111	R 342	(A,155,44)		RS1/16SS103J	
JA2204	(A,30,131) Jack	AKN1073					
JA2205	(A,43,130) Jack	CKS6437	R 343	(A,152,44)		RS1/16SS682J	
VL1501	(A,44,73) Variable Coil	CTC1216	R 346	(B,163,43)		RS1/16SS1303D	
			R 347	(B,161,44)		RS1/16SS1002D	B
			R 354	(A,169,47)		RS1/10SR0R0J	
			R 355	(B,162,57)		RS1/16SS0R0J	
RESISTORS							
R 102	(B,128,87)	RS1/10SR224J					
R 105	(B,70,107)	RS1/16SS473J	R 358	(B,156,40)		RS1/10SR0R0J	
R 106	(B,70,108)	RS1/16SS473J	R 359	(B,159,42)		RS1/10SR0R0J	
R 107	(B,69,111)	RS1/16SS432J	R 361	(B,156,52)		RS1/10SR0R0J	
R 108	(B,68,115) 1 kohm	CCN1326	R 362	(B,122,38)		RS1/10SR103J	
			R 363	(B,121,34)		RS1/10SR331J	
R 109	(B,130,77)	RS1/16SS473J					
R 110	(B,132,80)	RS1/16SS103J	R 364	(B,126,34)		RS1/16SS103J	
R 111	(B,130,79)	RS1/16SS103J	R 365	(B,127,36)		RS1/16SS103J	
R 113	(B,132,75)	RS1/16SS473J	R 366	(B,129,33)		RS1/16SS103J	
R 114	(B,66,111)	RS1/16SS103J	R 504	(B,30,32) (Except A)		RS1/16SS102J	C
			R 505	(B,27,51) (A)		RS1/16SS102J	
R 115	(B,66,114)	RS1/16SS472J					
R 116	(B,64,116)	RS1/4SA102J	R 509	(B,35,62) (A)		RS1/16SS102J	
R 117	(B,54,104)	RS1/16SS473J	R 513	(B,29,33) (A)		RS1/16SS102J	
R 118	(B,52,106)	RS1/16SS473J	R 518	(A,75,71)		RS1/8SQ0R0J	
R 119	(B,53,106)	RS1/16SS104J	R 604	(A,74,41)		RS1/16SS104J	
			R 605	(B,85,44)		RS1/16SS121J	
R 120	(B,54,109)	RS1/16SS472J					
R 122	(B,62,110)	RS1/16SS102J	R 607	(B,113,16)		RS1/16SS104J	
R 123	(B,65,108)	RS1/16SS103J	R 608	(B,103,34)		RS1/16SS104J	
R 124	(B,65,104)	RS1/16SS223J	R 609	(B,103,35)		RS1/16SS104J	
R 125	(B,58,112)	RS1/16SS103J	R 610	(A,105,32)		RS1/16SS100J	
			R 611	(B,99,28)		RS1/16SS104J	D
R 126	(B,56,104)	RS1/16SS223J					
R 127	(B,60,108)	RS1/16SS102J	R 612	(B,113,17)		RS1/16SS102J	
R 128	(B,58,108)	RS1/16SS103J	R 613	(A,105,35)		RS1/16SS473J	
R 129	(B,55,113)	RS1/16SS103J	R 614	(A,99,54)		RS1/16SS681J	
R 145	(B,50,116)	RS1/4SA102J	R 615	(A,97,50)		RS1/16SS681J	
			R 616	(B,102,26)		RS1/16SS101J	
R 151	(B,54,114)	RS1/10SR0R0J					
R 201	(B,83,110)	RS1/16SS683J	R 617	(B,102,25)		RS1/16SS101J	
R 202	(B,92,114)	RS1/16SS102J	R 618	(A,105,46)		RS1/16SS473J	
R 205	(B,86,120)	RS1/16SS0R0J	R 619	(B,101,23)		RS1/16SS473J	
R 207	(A,86,121)	RS1/16SS0R0J	R 620	(B,103,23)		RS1/16SS472J	
			R 621	(B,103,22)		RS1/16SS471J	
R 210	(A,109,126)	RS1/16SS0R0J					E
R 213	(B,87,109)	RS1/16SS683J	R 622	(A,101,51)		RS1/16SS473J	
R 214	(B,84,120)	RS1/16SS152J	R 623	(A,100,51)		RS1/16SS473J	
R 215	(B,85,120)	RS1/16SS101J	R 624	(A,99,51)		RS1/16SS473J	
R 217	(B,90,114)	RS1/16SS473J	R 625	(B,103,27)		RS1/16SS182J	
			R 630	(B,94,20)		RS1/16SS102J	
R 218	(B,90,113)	RS1/16SS104J					
R 219	(B,88,113)	RS1/16SS103J	R 632	(B,104,27)		RS1/16SS182J	
R 223	(B,105,58)	RS1/10SR0R0J	R 633	(B,102,41)		RS1/16SS0R0J	
R 224	(B,86,121)	RS1/16SS473J	R 634	(A,73,46)		RS1/16SS0R0J	
R 225	(B,87,117)	RS1/16SS101J	R 637	(B,92,16)		RS1/16SS101J	
			R 639	(B,104,46)		RS1/16SS182J	
R 311	(B,163,41)	RS1/16SS222J					
R 312	(B,161,40)	RS1/16SS222J	R 640	(A,88,51)		RS1/16SS0R0J	F
R 313	(B,161,35)	RS1/16SS473J	R 641	(A,93,54)		RS1/16SS101J	
R 314	(B,174,87)	RS1/16SS6800D	R 642	(A,86,51) (A)		RS1/16SS102J	
			R 645	(B,102,47)		RS1/16SS182J	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	R 646 (B,79,20)	RS1/16SS104J	R 727 (B,77,45)	RS1/16SS104J
A	R 647 (A,108,39)	RS1/16SS473J	R 728 (A,73,44) (A)	RS1/16SS101J
	R 648 (A,73,33)	RS1/16SS104J	R 729 (A,75,44) (A)	RS1/16SS101J
	R 651 (B,72,33)	RS1/16SS104J	R 730 (B,85,24) (A,C,F,G)	RS1/16SS104J
	R 654 (A,74,25)	RS1/16SS101J	R 732 (B,80,43)	RS1/16SS471J
	R 655 (A,73,25)	RS1/16SS101J	R 733 (B,86,23) (A,D,G)	RS1/16SS104J
	R 656 (A,74,28)	RS1/16SS0R0J	R 734 (B,77,43)	RS1/16SS471J
	R 657 (B,98,42)	RS1/16SS103J	R 737 (A,73,41)	RS1/16SS104J
	R 659 (B,73,29)	RS1/16SS104J	R 738 (A,69,38)	RS1/16SS104J
	R 660 (A,92,54)	RS1/16SS101J	R 739 (A,69,40)	RS1/16SS473J
	R 663 (A,102,53)	RS1/16SS0R0J	R 740 (B,92,23) (A,B,C)	RS1/16SS103J
B	R 664 (A,109,42)	RS1/16SS101J	R 740 (D,E,F,G)	RS1/16SS1002D
	R 665 (B,103,39)	RS1/16SS471J	R 741 (B,87,22) (B,C,E,F)	RS1/16SS104J
	R 667 (A,72,38)	RS1/16SS101J	R 743 (A,69,36)	RS1/16SS222J
	R 670 (B,102,23)	RS1/16SS472J	R 744 (A,69,37)	RS1/16SS473J
	R 671 (A,96,50)	RS1/16SS681J	R 746 (B,75,19) (A)	RS1/16SS0R0J
	R 673 (B,103,43)	RS1/16SS821J	R 748 (B,87,23) (B,D,E)	RS1/16SS104J
	R 675 (B,102,22)	RS1/16SS471J	R 750 (B,87,24)	RS1/16SS0R0J
	R 677 (A,106,45)	RS1/16SS0R0J	R 751 (B,85,33)	RS1/16SS0R0J
	R 678 (B,84,44)	RS1/16SS121J	R 752 (B,74,34)	RS1/16SS223J
	R 679 (B,105,46)	RS1/16SS101J	R 754 (B,76,33)	RS1/16SS223J
C	R 680 (B,102,45)	RS1/16SS101J	R 757 (A,72,25)	RS1/16SS101J
	R 682 (A,106,41)	RS1/16SS680J	R 758 (B,81,30)	RS1/16SS471J
	R 683 (B,101,21)	RS1/16SS222J	R 761 (A,75,23)	RS1/16SS101J
	R 684 (B,99,14)	RS1/16SS102J	R 762 (A,75,25)	RS1/16SS101J
	R 685 (A,103,50)	RS1/16SS102J	R 763 (A,77,22)	RS1/16SS101J
	R 686 (A,106,25)	RS1/16SS681J	R 767 (B,105,24)	RS1/16SS105J
	R 689 (B,105,22)	RS1/16SS101J	R 769 (B,100,43)	RS1/16SS104J
	R 690 (A,104,23)	RS1/16SS0R0J	R 772 (A,84,20)	RS1/16SS471J
	R 691 (B,102,28)	RS1/16SS0R0J	R 773 (A,85,20)	RS1/16SS471J
	R 692 (B,118,13)	RS1/16SS224J	R 774 (B,85,23)	RS1/16SS104J
D	R 693 (B,118,15)	RS1/16SS104J	R 775 (A,71,40)	RS1/16SS473J
	R 694 (B,103,33)	RS1/16SS104J	R 776 (B,80,23)	RS1/16SS104J
	R 695 (B,103,36)	RS1/16SS104J	R 777 (B,80,16)	RS1/16SS101J
	R 697 (A,106,39)	RS1/16SS471J	R 779 (B,90,56)	RS1/16SS472J
	R 698 (A,107,42)	RS1/16SS473J	R 782 (B,93,34)	RS1/16SS1002D
	R 699 (A,77,49)	RS1/16SS102J	R 787 (B,82,29)	RS1/16SS104J
	R 700 (A,72,50)	RS1/16SS472J	R 789 (B,108,20)	RS1/16SS473J
	R 701 (A,77,48)	RS1/16SS102J	R 790 (B,109,20)	RS1/16SS473J
	R 702 (A,66,41)	RS1/16SS473J	R 792 (B,106,20)	RS1/16SS103J
	R 703 (A,74,48)	RS1/16SS102J	R 793 (B,79,28)	RS1/16SS104J
E	R 704 (A,73,47)	RS1/16SS473J	R 796 (B,93,35)	RS1/16SS1001D
	R 705 (A,74,49)	RS1/16SS473J	R 797 (B,95,26) (A,B,C)	RS1/16SS102J
	R 706 (B,96,53)	RS1/16SS473J	R 797 (D,E,F,G)	RS1/16SS1001D
	R 707 (A,95,50)	RS1/16SS101J	R 798 (A,108,61)	RS1/10SR0R0J
	R 708 (A,94,52)	RS1/16SS681J	R 800 (B,100,46)	RS1/16SS101J
	R 709 (B,92,41)	RS1/16SS222J	R 801 (A,73,63)	RS1/16SS0R0J
	R 710 (B,91,43)	RS1/16SS101J	R 802 (A,75,63)	RS1/16SS0R0J
	R 711 (A,92,52)	RS1/16SS101J	R 803 (B,78,70)	RS1/16SS101J
	R 712 (A,85,53)	RS1/16SS221J	R 804 (B,78,71)	RS1/16SS101J
	R 713 (A,83,54)	RS1/16SS182J	R 805 (B,81,67)	RS1/16SS101J
	R 714 (A,84,53)	RS1/16SS221J	R 806 (B,83,66)	RS1/16SS101J
	R 715 (A,83,53)	RS1/16SS182J	R 811 (B,64,56)	RS1/16SS223J
	R 716 (B,81,24) (A,E,F,G)	RS1/16SS104J	R 812 (B,64,54)	RS1/16SS223J
	R 717 (A,82,20) (B,C,D)	RS1/16SS104J	R 813 (B,63,61)	RS1/16SS223J
	R 722 (B,83,44)	RS1/16SS121J	R 814 (B,63,59)	RS1/16SS223J
F	R 723 (A,83,50) (A)	RS1/16SS104J	R 817 (B,68,74)	RS1/16SS223J
	R 724 (A,80,50) (A)	RS1/16SS102J	R 818 (B,65,69)	RS1/16SS223J
	R 725 (A,74,50)	RS1/16SS102J	R 821 (B,76,55) (Except A)	RS1/16SS470J
	R 726 (A,74,45)	RS1/16SS471J	R 823 (B,73,54)	RS1/16SS104J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 824	(B,81,69)	RS1/16SS75R0D		R 1064	(B,157,96)	RS1/10SR0R0J	
R 825	(B,82,67)	RS1/16SS75R0D		R 1065	(B,154,68)	RS1/10SR0R0J	
R 827	(B,83,58)	RS1/16SS2200D		R 1066	(B,144,67)	RS1/10SR0R0J	A
R 829	(B,77,55)	RS1/16SS750J		R 1067	(B,151,65)	RS1/10SR0R0J	
R 831	(B,84,64)	RS1/16SS104J		R 1068	(B,146,65)	RS1/10SR0R0J	
R 844	(B,70,74)	RS1/16SS101J		R 1101	(B,130,60)	RS1/16SS473J	
R 845	(B,66,73)	RS1/16SS101J		R 1102	(B,136,62)	RS1/16SS222J	
R 846	(B,67,69)	RS1/16SS101J		R 1103	(B,126,53)	RS1/16SS473J	
R 850	(B,64,62)	RS1/16SS101J		R 1104	(B,140,58)	RS1/16SS220J	
R 851	(B,65,60)	RS1/16SS101J		R 1105	(B,139,47)	RS1/16SS101J	
R 852	(B,65,59)	RS1/16SS101J		R 1106	(B,138,47)	RS1/16SS470J	
R 853	(B,63,57)	RS1/16SS101J		R 1107	(B,144,56)	RS1/16SS101J	
R 854	(B,65,55)	RS1/16SS101J		R 1109	(B,136,43)	RS1/8SQ102J	
R 855	(B,65,54)	RS1/16SS101J		R 1110	(B,137,47)	RS1/8SQ102J	B
R 859	(B,82,56)	RS1/16SS75R0D		R 1111	(B,135,47)	RS1/8SQ102J	
R 901	(A,49,30)	RS1/16SS0R0J		R 1112	(B,141,58)	RS1/16SS220J	
R 910	(B,58,31)	RS1/16SS104J		R 1113	(B,144,58)	RS1/8SQ220J	
R 920	(B,51,16) (A)	RS1/16SS101J		R 1115	(B,131,48)	RS1/16SS0R0J	
R 921	(B,50,14) (A)	RS1/16SS101J		R 1119	(B,142,56)	RS1/16SS104J	
R 922	(B,50,16) (A)	RS1/16SS101J		R 1120	(B,128,61)	RS1/8SQ222J	
R 923	(A,49,28)	RS1/16SS0R0J		R 1121	(B,126,61)	RS1/8SQ222J	
R 944	(B,33,24)	RS1/10SR0R0J		R 1122	(B,125,58)	RS1/16SS472J	
R 945	(B,56,14)	RS1/16SS0R0J		R 1123	(B,125,56)	RS1/16SS472J	
R 946	(B,56,16)	RS1/16SS0R0J		R 1124	(A,122,59)	RS1/8SQ0R0J	
R 953	(B,38,11)	RS1/10SR0R0J		R 1205	(A,135,47)	RS1/10SR470J	C
R 954	(B,33,26)	RS1/10SR0R0J		R 1206	(A,135,49)	RS1/10SR470J	
R 1003	(B,168,101)	RS1/16SS0R0J		R 1207	(B,142,49)	RS1/10SR820J	
R 1004	(B,162,102)	RS1/16SS153J		R 1208	(B,143,52)	RS1/10SR470J	
R 1006	(B,164,103)	RS1/16SS153J		R 1209	(B,142,53)	RS1/10SR470J	
R 1007	(B,154,73)	RS1/16SS473J		R 1210	(A,135,50)	RS1/10SR470J	
R 1008	(B,153,73)	RS1/16SS473J		R 1212	(B,117,45)	RS1/8SQ821J	
R 1009	(B,144,73)	RS1/16SS473J		R 1213	(B,121,47)	RS1/8SQ821J	
R 1010	(B,143,73)	RS1/16SS473J		R 1214	(B,114,57)	RS1/10SR821J	
R 1011	(B,146,101)	RS1/16SS473J		R 1215	(B,115,55)	RS1/10SR821J	
R 1012	(B,147,101)	RS1/16SS473J		R 1217	(B,116,65)	RS1/10SR821J	
R 1013	(B,157,101)	RS1/16SS473J		R 1218	(A,125,49)	RS1/16SS0R0J	D
R 1014	(B,158,101)	RS1/16SS473J		R 1219	(A,125,48)	RS1/16SS0R0J	
R 1015	(B,148,71)	RS1/16SS0R0J		R 1220	(B,115,50)	RS1/16SS0R0J	
R 1016	(B,152,103)	RS1/16SS0R0J		R 1221	(B,120,54)	RS1/16SS0R0J	
R 1017	(B,145,71)	RS1/16SS473J		R 1222	(B,117,60)	RS1/16SS0R0J	
R 1018	(B,154,103)	RS1/16SS473J		R 1301	(A,80,79)	RS1/10SR0R0J	
R 1019	(B,152,71)	RS1/16SS473J		R 1305	(B,94,119)	RS1/8SQ362J	
R 1020	(B,150,103)	RS1/16SS473J		R 1306	(B,91,118)	RS1/8SQ362J	
R 1021	(B,162,103)	RS1/16SS153J		R 1307	(B,98,123)	RS1/8SQ362J	
R 1022	(B,164,102)	RS1/16SS153J		R 1308	(B,88,118)	RS1/8SQ362J	
R 1023	(B,143,75)	RS1/16SS473J		R 1309	(B,98,120)	RS1/16SS562J	
R 1024	(B,158,99)	RS1/16SS473J		R 1310	(B,91,120)	RS1/16SS562J	E
R 1025	(B,154,75)	RS1/16SS473J		R 1311	(B,98,121)	RS1/16SS562J	
R 1026	(B,146,99)	RS1/16SS473J		R 1312	(B,90,119)	RS1/16SS562J	
R 1027	(B,145,80)	RS1/16SS0R0J		R 1402	(B,32,100)	RS1/16SS0R0J	
R 1028	(B,155,95)	RS1/16SS0R0J		R 1410	(A,40,83)	RS1/16SS0R0J	
R 1040	(B,151,93)	RS1/16SS0R0J		R 1413	(B,37,91)	RS1/16SS0R0J	
R 1044	(B,151,82)	RS1/16SS473J		R 1415	(B,26,103)	RS1/16SS0R0J	
R 1047	(B,147,88)	RS1/16SS473J		R 1502	(A,51,68)	RS1/16SS0R0J	
R 1048	(B,146,88)	RS1/16SS473J		R 1503	(A,40,70)	RS1/16SS0R0J	
R 1057	(B,156,93)	RS1/16SS0R0J		R 1505	(A,50,62)	RS1/16SS103J	
R 1058	(B,151,83)	RS1/16SS473J		R 1507	(A,49,62)	RS1/16SS103J	F
R 1061	(B,153,78)	RS1/10SR0R0J		R 1508	(A,49,58)	RS1/16SS472J	
R 1062	(B,143,78)	RS1/10SR0R0J		R 1509	(A,48,56)	RS1/16SS472J	
R 1063	(B,147,96)	RS1/10SR0R0J		R 1510	(A,48,60)	RS1/16SS101J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 1511 (A,47,60)

RS1/16SS101J

R 1806 (A,159,13)

RS1/16SS221J

R 1512 (A,46,57)

RS1/16SS0R0J

R 1807 (A,158,12)

RS1/16SS221J

R 1513 (A,36,72)

RS1/16SS391J

R 1808 (A,157,15)

RS1/16SS221J

R 1514 (B,29,102)

RS1/16SS105J

R 1809 (B,155,10)

RS1/16SS221J

R 1515 (B,29,98)

RS1/16SS105J

R 1810 (A,155,12)

RS1/16SS221J

R 1516 (A,43,57) (A)

RS1/16SS0R0J

R 1811 (A,147,12)

RS1/16SS0R0J

R 1517 (A,43,59) (A)

RS1/16SS0R0J

R 1814 (B,163,18)

RS1/10SR0R0J

R 1518 (A,42,57) (A)

RS1/16SS0R0J

R 1815 (A,165,20)

RS1/4SA0R0J

R 1519 (A,41,59) (A)

RS1/16SS0R0J

R 1816 (B,144,14)

RS1/16SS0R0J

R 1520 (A,49,66)

RS1/16SS0R0J

R 1822 (B,155,18)

RS1/16SS473J

R 1522 (A,31,60) (A)

RS1/16SS182J

R 1823 (B,157,15)

RS1/8SQ561J

R 1523 (A,33,58) (A)

RS1/16SS332J

R 1826 (B,139,16)

RS1/16SS0R0J

R 1524 (A,30,51) (A)

RS1/16SS121J

R 1827 (A,156,22)

RS1/10SR103J

R 1525 (A,33,56) (A)

RS1/16SS102J

R 1828 (A,151,18)

RS1/16SS683J

R 1526 (A,40,63) (A)

RS1/16SS0R0J

R 1829 (A,151,20)

RS1/16SS683J

R 1527 (A,38,61) (A)

RS1/16SS0R0J

R 1901 (A,131,41)

RS1/16SS303J

R 1528 (A,40,57) (A)

RS1/16SS182J

R 1904 (B,133,36)

RS1/16SS471J

R 1529 (A,35,57) (A)

RS1/16SS332J

R 1905 (B,131,38)

RS1/16SS681J

R 1530 (A,40,54) (A)

RS1/16SS121J

R 1906 (B,127,44)

RS1/10SR103J

R 1531 (A,34,56) (A)

RS1/16SS102J

R 2001 (B,103,12)

RS1/16SS222J

R 1532 (A,35,63) (A)

RS1/16SS0R0J

R 2002 (A,79,6)

RS1/16SS222J

R 1533 (A,35,60) (A)

RS1/16SS0R0J

R 2104 (B,163,109)

RS1/16SS562J

R 1534 (A,33,63) (A)

RS1/16SS0R0J

R 2105 (A,154,106)

RS1/10SR102J

R 1535 (A,33,62) (A)

RS1/16SS0R0J

R 2106 (A,152,104)

RS1/10SR102J

R 1536 (A,33,54) (A)

RS1/16SS0R0J

R 2107 (B,149,111)

RS1/16SS103J

R 1537 (A,34,54) (A)

RS1/16SS0R0J

R 2108 (A,150,104)

RS1/10SR471J

R 1538 (A,34,59) (A)

RS1/16SS0R0J

R 2109 (A,149,104)

RS1/10SR471J

R 1539 (A,40,59) (A)

RS1/16SS0R0J

R 2110 (A,164,107)

RS1/16SS0R0J

R 1540 (A,45,52)

RS1/10SR0R0J

R 2111 (A,163,106)

RS1/16SS0R0J

R 1542 (A,43,52)

RS1/10SR0R0J

R 2112 (A,164,104)

RS1/16SS0R0J

R 1543 (A,33,67)

RS1/10SR0R0J

R 2113 (A,163,102)

RS1/16SS0R0J

R 1545 (A,48,58)

RS1/16SS0R0J

R 2117 (B,164,110)

RS1/16SS272J

R 1546 (A,47,58)

RS1/16SS0R0J

R 2118 (B,162,110)

RS1/16SS272J

R 1547 (A,51,56)

RS1/8SQ0R0J

R 2119 (A,160,106)

RS1/10SR222J

R 1548 (A,34,67)

RS1/10SR0R0J

R 2120 (A,157,103)

RS1/16SS562J

R 1549 (B,52,63)

RS1/16SS0R0J

R 2121 (A,158,103)

RS1/16SS332J

R 1550 (A,45,69)

RS1/16SS0R0J

R 2201 (A,79,81)

RS1/16SS820J

R 1551 (A,44,69)

RS1/16SS0R0J

R 2202 (A,85,83)

RS1/16SS820J

R 1552 (A,26,50) (A)

RS1/16SS0R0J

R 2203 (A,80,87)

RS1/16SS820J

R 1709 (A,25,54) (A)

RAB4CQ221J

R 2204 (A,84,87)

RS1/16SS820J

R 1715 (A,25,40) (A)

RAB4CQ0R0J

R 2205 (A,76,82)

RS1/16SS223J

R 1724 (A,13,83)

RS1/10SR0R0J

R 2206 (A,85,82)

RS1/16SS223J

R 1725 (A,15,83)

RS1/10SR0R0J

R 2207 (A,80,86)

RS1/16SS223J

R 1729 (A,26,24) (A)

RAB4CQ0R0J

R 2208 (A,83,86)

RS1/16SS223J

R 1730 (A,27,26)

RS1/16SS103J

R 2209 (A,79,83)

RS1/16SS472J

R 1732 (A,46,113)

RS1/10SR0R0J

R 2210 (A,77,83)

RS1/16SS472J

R 1733 (A,45,113)

RS1/10SR0R0J

R 2211 (A,83,84)

RS1/16SS472J

R 1734 (A,18,24)

RS1/10SR0R0J

R 2212 (A,82,84)

RS1/16SS472J

R 1735 (A,20,24)

RS1/10SR0R0J

R 2213 (B,170,105)

RS1/16SS821J

R 1736 (B,39,65)

RS1/10SR0R0J

R 2214 (B,172,101)

RS1/16SS472J

R 1737 (B,40,64)

RS1/10SR0R0J

R 2215 (B,170,106)

RS1/16SS223J

R 1746 (B,22,13)

RS1/10SR0R0J

R 2216 (B,172,102)

RS1/16SS472J

R 1747 (B,24,13)

RS1/10SR0R0J

R 2217 (B,173,106)

RS1/16SS223J

R 1760 (B,60,31)

RS1/10SR0R0J

R 2218 (B,175,107)

RS1/16SS821J

R 1761 (B,62,31)

RS1/10SR0R0J

R 2225 (B,26,108)

RS1/10SR0R0J

R 1801 (B,155,22)

RS1/16SS102J

R 2226 (B,32,109)

RS1/10SR0R0J

R 1802 (A,153,12)

RS1/16SS0R0J

R 2227 (B,33,129)

RS1/16SS0R0J

R 1803 (A,151,12)

RS1/16SS0R0J

R 2228 (B,35,129)

RS1/16SS0R0J

R 1804 (A,149,12)

RS1/16SS0R0J

R 2229 (B,29,130)

RS1/16SS0R0J

R 1805 (B,159,13)

RS1/16SS471J

R 2230 (B,46,117)

RS1/10SR0R0J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 2231	(B,42,117)	RS1/10SR0R0J		C 329	(A,155,45)	CKSSYB102K50	
R 2232	(B,129,90)	RS1/16SS820J		C 335	(B,164,43)	CCSSCH101J50	
R 2233	(B,134,95)	RS1/16SS820J		C 336	(B,171,46) 10 uF	CCG1236	A
R 2234	(B,131,91)	RS1/16SS223J		C 337	(B,167,54) 10 uF	CCG1236	
R 2235	(B,131,95)	RS1/16SS223J		C 339	(B,171,48) 10 uF	CCG1236	
R 2236	(B,134,93)	RS1/16SS472J					
R 2237	(B,128,96)	RS1/16SS472J		C 342	(B,156,42)	CKSSYB104K16	
R 2265	(A,111,89)	RS1/4SA0R0J		C 343	(B,154,51)	CKSRYB104K50	
R 2266	(A,94,96)	RS1/4SA0R0J		C 344	(B,147,61)	CKSRYB105K10	
R 2308	(B,120,132) (A)	RS1/16SS0R0J		C 345	(B,152,56)	CKSRYB105K10	
R 2309	(B,121,132) (B)	RS1/16SS471J		C 347	(B,127,35)	CKSSYB104K10	
R 2311	(B,123,132) (C)	RS1/16SS471J		C 349	(A,152,40)	XCEVW470M16	
R 2313	(B,125,132) (D)	RS1/16SS471J		C 502	(B,30,46) (A)	CKSRYB105K10	
R 2314	(B,126,132) (E)	RS1/16SS0R0J		C 503	(B,29,57) 4.7 uF(A)	CCG1201	
R 2315	(B,127,132) (F)	RS1/16SS471J		C 504	(B,31,47) (A)	CKSRYB105K10	B
R 2317	(B,129,132) (G)	RS1/16SS471J		C 505	(B,38,57) 4.7 uF(A)	CCG1201	
R 2319	(B,153,121)	RS1/16SS0R0J		C 510	(B,42,51)	CKSRYB105K10	
R 2333	(B,86,27) (D,E,F,G)	RS1/16SS6800D		C 511	(B,51,51)	CKSRYB105K10	
R 2335	(B,94,38) (D,E,F,G)	RS1/16SS6800D		C 516	(B,31,55) (A)	CKSSYB104K16	
R 2336	(A,105,37) (D,E,F,G)	RS1/16SS0R0J		C 602	(B,116,22)	CKSRYB105K10	
R 2338	(B,95,38) (D,E,F,G)	RS1/16SS8201D		C 603	(A,106,31)	CCSRCH220J50	
R 2339	(A,114,32) (D,E,F,G)	RS1/16SS8201D		C 604	(A,105,30)	CCSSCH220J50	
R 2341	(B,99,38)	RS1/16SS101J		C 605	(A,106,44)	CKSSYB104K10	
R 2342	(B,100,38)	RS1/16SS101J		C 606	(A,105,25)	CKSSYB104K10	
R 2343	(B,101,37)	RS1/16SS101J		C 607	(B,103,29)	CKSRYB104K10	
R 2344	(B,106,45)	RS1/16SS101J		C 608	(B,98,32) 4.7 uF	CCG1331	C
R 2347	(A,81,20)	RS1/16SS101J		C 611	(B,87,25)	CKSSYB104K10	
				C 612	(A,88,50)	CKSSYB104K10	
				C 613	(A,75,29)	CKSSYB104K10	
				C 615	(A,105,52)	CKSSYB104K10	
				C 616	(A,105,54) 10 uF	CCG1192	
CAPACITORS							
C 101	(B,129,87)	CKSRYB104K50		C 618	(B,103,41)	CCSSCH101J50	
C 104	(A,119,89) 15 000 uF/16 V	CCH1980		C 620	(A,70,42)	CKSSYB104K10	
C 106	(B,66,110)	CKSRYB105K10		C 625	(B,117,13)	CKSSYB104K10	
C 108	(B,52,109)	CKSSYB102K50		C 633	(B,94,29)	CKSSYB104K10	
C 110	(B,103,119)	CKSSYB104K16		C 639	(B,94,28)	CKSSYB104K10	
C 201	(B,95,122)	CKSQYB105K25					D
C 202	(B,93,122)	CKSQYB105K25		C 801	(B,81,58)	CKSSYB104K10	
C 203	(B,101,122)	CKSQYB105K25		C 802	(B,80,55)	CKSSYB104K10	
C 204	(B,90,123)	CKSQYB105K25		C 803	(A,71,67)	CKSRYB105K10	
C 205	(A,104,125) 4.7 uF	CCG1331		C 804	(B,70,70)	CKSRYB105K10	
				C 805	(B,71,70)	CKSRYB105K10	
C 206	(A,92,122)	XCEVW100M16		C 806	(B,73,70)	CKSRYB105K10	
C 207	(B,119,127)	CKSRYB104K16		C 807	(B,77,53) (Except A)	CCSSCH271J50	
C 212	(B,82,113) 4.7 uF	CCG1201		C 810	(A,72,66)	CKSSYB104K10	
C 216	(A,103,111) 4 700 uF/16 V	CCH2085		C 811	(B,70,67)	CKSRYB105K10	
C 217	(A,69,112)	XCEVW101M16		C 812	(B,80,68)	CKSSYB104K10	
C 218	(A,110,125)	CKSRYB104K50					
C 219	(B,89,115) 10 uF	CCG1192		C 813	(B,66,71)	CKSRYB105K10	E
C 220	(A,90,126) 0.1 uF	CCG1357		C 814	(B,81,66)	CKSSYB104K10	
C 312	(A,171,85)	XCEVW101M16		C 815	(B,67,70)	CKSRYB105K10	
C 313	(B,169,90)	CKSRYB105K16		C 816	(B,81,65)	CKSSYB104K10	
				C 817	(B,66,67)	CKSQYB105K16	
C 314	(B,161,36)	CKSSYB104K10					
C 317	(B,145,61)	CKSQYB104K25		C 818	(B,81,64)	CKSSYB104K10	
C 318	(B,150,56)	CKSQYB104K25		C 819	(B,66,66)	CKSQYB105K16	
C 320	(A,150,56)	XCEVW101M16		C 820	(B,81,63)	CKSSYB104K10	
C 321	(A,154,29)	CKSSYB102K50		C 821	(B,66,64)	CKSQYB105K16	
				C 822	(B,82,62)	CKSSYB104K10	
C 322	(A,137,43)	CKSRYB105K10					
C 323	(A,143,40)	XCEVW101M16		C 823	(B,67,62)	CKSRYB105K10	F
C 324	(A,152,32)	CKSSYB104K10		C 824	(B,82,61)	CKSSYB104K10	
C 327	(A,149,45)	CKSSYB104K16		C 825	(B,67,61)	CKSRYB105K10	
C 328	(A,152,48) 0.1 uF	CCG1266		C 826	(B,82,60)	CKSSYB104K10	
				C 827	(B,67,59)	CKSRYB105K10	

	1		2	3		4
	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
A	C 828	(B,82,59)	CKSSYB104K10	C 1019	(B,145,78)	CKSRYB105K16
	C 829	(B,67,58)	CKSRYB105K10	C 1020	(B,155,96)	CKSRYB105K16
	C 830	(B,67,57)	CKSRYB105K10	C 1021	(B,145,77)	CKSSYB104K16
	C 831	(B,68,55)	CKSRYB105K10	C 1022	(B,155,98)	CKSSYB104K16
	C 832	(B,79,57)	CKSSYB104K10	C 1023	(B,167,100)	CKSRYB105K16
■	C 833	(A,76,58) 10 uF	CCG1192	C 1024	(B,165,100)	CKSSYB104K16
	C 834	(B,74,54)	CKSSYB104K10	C 1025	(B,164,101)	CCSSCH221J50
	C 835	(A,76,56)	CKSSYB104K10	C 1027	(B,162,101)	CCSSCH221J50
	C 836	(A,73,61)	CKSQYB104K25	C 1028	(B,151,90)	CKSRYB105K16
	C 837	(A,78,61)	CKSQYB104K25	C 1039	(B,156,90) 10 uF	CCG1234
B	C 838	(A,73,58) 10 uF	CCG1192	C 1040	(B,150,81) 10 uF	CCG1192
	C 839	(A,78,60) 10 uF	CCG1192	C 1041	(B,158,92) 10 uF	CCG1192
	C 840	(B,78,68)	CKSSYB104K10	C 1042	(B,157,94)	CKSRYB105K10
	C 841	(B,74,70)	CKSRYB105K10	C 1043	(B,149,90)	CKSRYB105K10
	C 842	(B,75,70)	CKSRYB105K10	C 1101	(B,134,62)	CCSSCH120J50
■	C 843	(B,77,70)	CKSRYB105K10	C 1102	(B,138,63)	CCSSCH120J50
	C 901	(A,47,27)	CKSRYB105K10	C 1103	(B,129,50)	CKSRYB105K16
	C 902	(B,43,27)	CKSRYB105K10	C 1104	(B,130,59)	CKSSYB123K16
	C 903	(B,40,28)	CKSRYB105K10	C 1105	(A,132,59)	CKSSYB104K16
	C 904	(B,43,28)	CKSRYB105K10	C 1106	(A,130,59)	CKSQYB225K10
C	C 905	(B,40,29)	CKSRYB105K10	C 1107	(B,130,50)	CKSRYB105K16
	C 906	(B,43,30)	CKSRYB105K10	C 1108	(A,138,56)	CKSQYB104K25
	C 907	(B,40,31)	CKSRYB105K10	C 1109	(A,135,53)	CKSQYB104K25
	C 908	(A,48,27)	CKSSYB104K10	C 1110	(A,133,55)	CKSRYB104K25
	C 909	(B,47,21)	CKSRYB105K10	C 1111	(B,141,56)	CKSSYB103K16
■	C 910	(B,48,18)	CKSRYB105K10	C 1112	(A,131,57)	CKSQYB104K25
	C 911	(B,49,21)	CKSRYB105K10	C 1113	(A,136,59)	CKSQYB104K25
	C 912	(B,50,18) (A)	CKSRYB105K10	C 1114	(B,127,58) 10 uF	CCG1192
	C 913	(B,50,21) (A)	CKSRYB105K10	C 1115	(A,129,57) 10 uF	CCG1192
	C 914	(B,51,18) (A)	CKSRYB105K10	C 1116	(A,142,53) 10 uF	CCG1192
D	C 915	(A,56,32) 10 uF	CCG1192	C 1117	(B,127,56) 10 uF	CCG1192
	C 916	(B,57,31)	CKSSYB104K10	C 1118	(B,128,64) 10 uF	CCG1192
	C 917	(A,55,31)	CKSSYB104K10	C 1119	(B,126,64) 10 uF	CCG1192
	C 918	(A,53,27)	CKSQYB104K25	C 1120	(A,140,53)	CKSQYB104K25
	C 919	(A,53,30)	CKSQYB104K25	C 1123	(B,139,60)	CCSSCH121J50
■	C 920	(A,51,27) 10 uF	CCG1192	C 1125	(B,140,61)	CCSSCH121J50
	C 921	(A,51,30) 10 uF	CCG1192	C 1126	(B,140,63)	CCSSCH121J50
	C 927	(B,54,18)	CKSRYB105K10	C 1201	(A,123,46)	CKSSYB104K16
	C 928	(B,55,21)	CKSRYB105K10	C 1202	(A,124,46) 10 uF	CCG1192
	C 939	(B,52,21)	CKSRYB105K10	C 1205	(B,116,49) 10 uF	CCG1192
E	C 940	(B,53,18)	CKSRYB105K10	C 1207	(B,141,49)	CCSSCH470J50
	C 941	(B,53,21)	CKSRYB105K10	C 1208	(B,146,52)	CCSSCH121J50
	C 1001	(B,162,106)	CKSQYB105K16	C 1209	(B,144,53)	CCSSCH121J50
	C 1002	(B,164,106)	CKSQYB105K16	C 1210	(A,121,57)	CKSSYB104K16
	C 1003	(B,152,68)	CKSQYB105K16	C 1211	(A,123,57) 10 uF	CCG1192
■	C 1004	(B,150,68)	CKSQYB105K16	C 1216	(A,120,66)	CKSSYB104K16
	C 1005	(B,147,68)	CKSQYB105K16	C 1217	(A,121,67) 10 uF	CCG1192
	C 1006	(B,145,68)	CKSQYB105K16	C 1222	(B,119,46)	CKSRYB182K50
	C 1007	(B,149,106)	CKSQYB105K16	C 1223	(B,121,49)	CKSRYB182K50
	C 1008	(B,151,106)	CKSQYB105K16	C 1224	(B,109,58)	CKSRYB182K50
F	C 1009	(B,153,106)	CKSQYB105K16	C 1225	(B,113,55)	CKSRYB182K50
	C 1010	(B,155,106)	CKSQYB105K16	C 1227	(B,117,68)	CKSRYB182K50
	C 1011	(B,145,72)	CCSSCH330J50	C 1229	(A,115,49)	CKSSYB104K16
	C 1012	(B,154,102)	CCSSCH330J50	C 1230	(A,111,57) 10 uF	CCG1192
	C 1013	(B,152,72)	CCSSCH330J50	C 1231	(A,112,59)	CKSSYB104K16
■	C 1014	(B,150,102)	CCSSCH330J50	C 1232	(A,110,65) 10 uF	CCG1192
	C 1015	(B,144,75)	CCSSCH330J50	C 1233	(A,114,69)	CKSSYB104K16
	C 1016	(B,157,99)	CCSSCH330J50	C 1301	(B,86,90) 2.2 uF	CCG1218
	C 1017	(B,153,75)	CCSSCH330J50	C 1302	(B,86,88) 2.2 uF	CCG1218
	C 1018	(B,147,99)	CCSSCH330J50	C 1303	(B,93,82) 10 uF	CCG1192

5

C 1304	(B,87,81)	10 uF	CCG1192
C 1305	(B,85,93)		CKSRYB105K10
C 1306	(B,86,91)		CKSRYB105K10
C 1307	(B,73,93)		CKSRYB105K10
C 1308	(B,73,92)		CKSRYB105K10
C 1314	(A,73,99)		XCEVW100M16
C 1315	(B,73,90)	2.2 uF	CCG1218
C 1317	(A,73,92)		XCEVW100M16
C 1319	(B,89,81)		CKSQYB104K25
C 1321	(B,85,81)		CKSQYB104K25
C 1322	(A,85,76)		XCEVW470M16
C 1323	(A,74,77)		XCEVW470M16
C 1447	(B,32,103)		CKSSYB103K16
C 1501	(A,54,54)		CKSSYB104K16
C 1502	(A,54,56)		CKSSYB104K16
C 1503	(A,56,55)	10 uF	CCG1192
C 1504	(A,46,55)	10 uF	CCG1192
C 1505	(A,48,67)		CKSSYB104K16
C 1507	(A,47,68)		CKSSYB224K6R3
C 1508	(A,47,69)		CKSSYB102K50
C 1509	(A,42,67)		CKSSYB104K16
C 1511	(A,47,79)		CCSSCH220J50
C 1512	(A,42,79)		CCSSCH271J50
C 1515	(A,45,60)		CKSSYB104K16
C 1518	(A,37,70)		CCSSCH102J50
C 1519	(B,28,101)		CCSSCH471J50
C 1523	(A,40,65)		CKSSYB152K50
C 1533	(A,41,83)		CCSSCH100D50
C 1705	(A,26,57)	10 uF(A)	CCG1192
C 1706	(A,25,57)	(A)	CKSSYB104K10
C 1707	(A,26,46)	10 uF(A)	CCG1192
C 1708	(A,25,46)	(A)	CKSSYB104K10
C 1711	(B,20,16)	(A)	CKSSYB104K16
C 1801	(B,162,13)		CKSSYB104K10
C 1804	(B,166,16)		CKSSYB104K16
C 1805	(A,166,13)		CKSSYB104K16
C 1806	(B,157,10)		CCSSCH101J50
C 1813	(B,158,11)		CCSSCH101J50
C 1814	(B,162,8)		CCSSCH270J50
C 1815	(B,145,11)		CCSSCH270J50
C 1824	(B,91,83)		CKSQYB104K25
C 1901	(B,131,41)		CKSSYB104K10
C 2101	(B,157,109)		CCSRCH101J50
C 2102	(B,156,111)		CCSRCH101J50
C 2103	(B,159,113)		CCSRCH101J50
C 2201	(A,76,88)	10 uF	CCG1192
C 2202	(A,85,84)	10 uF	CCG1192
C 2203	(A,81,88)	10 uF	CCG1192
C 2204	(A,86,88)	10 uF	CCG1192
C 2205	(B,163,127)		CCSSCH101J50
C 2208	(B,26,110)		CKSRYB104K50
C 2209	(B,30,110)		CKSRYB104K50
C 2210	(B,128,94)	10 uF	CCG1192
C 2211	(B,136,93)	10 uF	CCG1192
C 2217	(A,109,76)		CKSRYB104K50
C 2220	(B,170,103)	4.7 uF	CCG1201
C 2221	(B,175,104)	4.7 uF	CCG1201
C 2225	(B,24,113)		CCSSCH270J50
C 2226	(B,31,132)		CCSSCH270J50
C 2227	(B,113,79)		CCSSCH270J50

7	8
Circuit Symbol and No.	Part No.

B

Unit Number : CXX8721(A)
Unit Number : CXX8719(B)
Unit Number : CXX8722(C)
Unit Number : CXX8720(D,E,F,G)
Unit Name : IF Unit(Service)

MISCELLANEOUS

IC 7003	(A,79,104)	IC	NJM2387ADL3
IC 7004	(A,12,34)	Regulator IC	MM3479A18P
IC 7008	(A,118,47)	Regulator IC	MM3479A12P
IC 7010	(A,82,44)	Regulator IC	MM3411A15N
IC 7011	(B,26,78)	IC	AN33012UA
IC 7012	(A,32,91)	IC	NJM2886DL3-05
IC 7101	(B,52,70)	DC/DC CONV IC	LTC3858EGN-1
IC 7202	(A,97,107)	DC/DC CONV IC	AN33014UA
IC 7203	(A,91,86)	DC/DC CONV IC	AN33014UA
IC 7601	(B,162,29)	CONV IC	WM8761BGED
IC 7602	(B,140,25)	CONV IC	WM8761BGED
IC 7603	(B,138,54)	CONV IC	WM8761BGED
IC 7701	(B,32,51)	IC	NJM2740V
IC 7703	(B,143,65)	AD Convrtter IC	AK5357VT
IC 7704	(A,22,35)	IC	TC4066BFT
IC 7705	(A,7,105)	IC	NJU7043V
IC 7706	(A,43,41)	IC	AK7738VQ
IC 7709	(B,45,49)	IC	NJM2740V
IC 7901	(B,63,43)	V AMP IC	BH7673G
IC 7902	(B,67,43)	V AMP IC	BH7673G
IC 7903	(A,65,43)	V AMP IC	BH7673G
IC 7904	(A,61,44)	V AMP IC	BH7673G
IC 7905	(A,81,61)	IC	ML86V7675TBZA3A
IC 7906	(A,94,59)	IC	TC74LCX541FK
IC 7907	(A,94,66)	IC	TC7SZ125FUS1
IC 7908	(B,74,87)	V AMP IC	BH7673G
IC 7911	(B,70,80)	V AMP IC	BH7673G
IC 7912	(B,68,68)	V AMP IC	BH7673G
IC 8001	(B,113,64)	IC	MN864779KT
IC 8003	(A,124,66)	IC	WM8761BGED
IC 8202	(B,48,24)	IC(A)	TC7WZ34FK
IC 8501	(A,13,89)	IC(A,B,C)	TC7SH08FUS1
IC 8502	(B,140,92)	IC	MAX14644ETA
IC 8504	(A,7,89)	L-MOS And Gate(A,B,C)	TC7SET08FUS1
IC 8505	(A,42,109)	L-MOS And Gate(A)	TC7SET08FUS1
IC 8506	(A,34,109)	IC(A)	TC7SH08FUS1
IC 8507	(A,38,109)	L-MOS And Gate(A)	TC7SET08FUS1
IC 8601	(A,20,8)	IC	NJM4565V
Q 7002	(A,70,101)	Resistor Built-IN TR	LTC014EEB
Q 7011	(A,107,46)	IC	RZQ050P01
Q 7012	(A,113,47)	Transistor	LSCR523UB
Q 7013	(A,21,66)	Transistor	ATP112-H
Q 7014	(A,12,74)	Chip Transistor	2SB1689
Q 7015	(A,8,78)	Transistor	LSCR523UB
Q 7016	(A,63,85)	IC	RZQ050P01

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

Q 7017 (A,66,88) Transistor LSCR523UB
 Q 7101 (A,41,78) FET FK8V03040
 Q 7102 (A,41,62) FET FK8V03040
 Q 7103 (A,38,78) FET FK8V03050
 Q 7104 (A,38,62) FET FK8V03050

D 8508 (B,143,102) Diode EZAEG2A50AX
 D 8509 (B,141,103) Diode EZAEG2A50AX
 D 8601 (A,45,13) Diode DZ2S068C
 D 8602 (A,32,10) Diode DZ2S068C
 L 7003 (A,30,62) SMD SPL Inductor CTH1544

Q 7201 (A,139,71) Resistor Built-IN TR LTC014EEB
 Q 7202 (A,144,68) Bipolar TR LSAR523UB
 Q 7203 (A,141,73) Resistor Built-IN TR LTC014EEB
 Q 7204 (A,146,72) Bipolar TR LSAR523UB
 Q 7703 (B,27,36) Bipolar TR LSCR523UB

L 7101 (A,50,60) Inductor CTH1482
 L 7102 (A,50,81) Choke Coil CTH1479
 L 7103 (B,34,76) Inductor CTF1738
 L 7201 (B,109,109) SMD SPL Inductor CTH1524
 L 7202 (B,103,89) SMD SPL Inductor CTH1524

Q 7704 (A,29,30) Resistor Built-IN TR LTC044EEB
 Q 7705 (A,29,35) Resistor Built-IN TR LTC044EEB
 Q 7901 (B,63,49) Bipolar TR LSCR523UB
 Q 7902 (B,67,49) Bipolar TR LSCR523UB
 Q 7903 (A,65,49) Bipolar TR LSCR523UB

L 7203 (B,102,112) Inductor CTF1793
 L 7204 (B,96,92) Inductor CTF1793
 L 7301 (B,83,44) Inductor CTF1868
 L 7302 (B,88,44) Inductor CTF1870
 L 7303 (B,143,33) Inductor(A) CTF1795

Q 7904 (A,61,50) Bipolar TR LSCR523UB
 Q 7905 (B,59,53) Bipolar TR LSCR523UB
 Q 7906 (A,72,72) Bipolar TR LSCR523UB
 Q 7907 (B,74,77) Bipolar TR LSCR523UB
 Q 7908 (B,67,64) Bipolar TR LSCR523UB

L 7304 (B,145,32) Inductor(A) CTF1795
 L 7309 (B,138,44) Inductor CTF1795
 L 7310 (B,94,43) Inductor CTF1795
 L 7311 (B,95,45) Inductor CTF1795
 L 7312 (B,96,47) Inductor CTF1795

Q 8001 (A,119,91) Resistor Built-IN TR LTC023EEB
 Q 8002 (A,117,95) Bipolar TR LSAR523UB
 Q 8003 (A,117,73) Chip Transistor RN4982
 Q 8501 (A,138,97) Bipolar TR LSAR523UB
 Q 8601 (A,28,12) Chip Transistor RN4983

L 7313 (B,96,44) Inductor CTF1795
 L 7314 (B,97,46) Inductor CTF1795
 L 7315 (B,97,47) Inductor CTF1795
 L 7501 (A,101,39) Inductor CTF1736
 L 7502 (A,151,49) Inductor CTF1736

D 7006 (A,26,71) Diode RB080L-30
 D 7101 (B,45,67) Diode DB2J41100
 D 7102 (B,45,65) Diode DB2J41100
 D 7201 (B,98,112) Diode RB060M-30
 D 7202 (B,92,91) Diode RB060M-30

L 7601 (B,166,21) Inductor CTF1786
 L 7602 (B,136,19) Inductor CTF1786
 L 7603 (B,147,49) Inductor CTF1786
 L 7703 (B,29,33) Ferrite Bead CTF1528
 L 7704 (B,152,64) Inductor CTF1558

D 7501 (B,127,29) Diode RB501VM-40
 D 7502 (A,127,25) Diode RB501VM-40
 D 7512 (B,89,26) Diode DZ2J039M0
 D 8001 (B,131,100) Diode EZAEG2A50AX
 D 8002 (B,129,100) Diode EZAEG2A50AX

L 7705 (B,149,60) Inductor CTF1558
 L 7707 (B,28,25) Inductor CTF1869
 L 7902 (A,69,65) Inductor CTF1869
 L 7903 (A,79,74) Inductor CTF1869
 L 7904 (A,86,47) Inductor CTF1869

D 8003 (B,129,98) Diode EZAEG2A50AX
 D 8004 (B,127,98) Diode EZAEG2A50AX
 D 8005 (B,127,100) Diode EZAEG2A50AX
 D 8006 (B,125,100) Diode EZAEG2A50AX
 D 8007 (B,124,98) Diode EZAEG2A50AX

L 7905 (A,78,41) Inductor CTF1869
 L 7906 (A,97,69) Inductor CTF1869
 L 7907 (A,96,63) Inductor CTF1869
 L 7909 (A,96,65) Chip Beads VTL1126
 L 7915 (A,85,52) Inductor CTF1787

D 8008 (B,123,98) Diode EZAEG2A50AX
 D 8011 (B,116,98) Diode EZAEG2A50AX
 D 8012 (B,115,100) Diode EZAEG2A50AX
 D 8013 (A,113,76) Rectifier Diode DA2J101
 D 8014 (B,122,101) Diode EZAEG2A50AX

L 7916 (A,82,51) Inductor CTF1787
 L 7917 (A,90,65) Inductor CTF1787
 L 7918 (A,91,62) Inductor CTF1787
 L 7919 (A,80,52) Inductor CTF1787
 L 7920 (A,79,52) Inductor CTF1787

D 8015 (A,123,78) Diode DAN202UM
 D 8016 (B,119,102) Diode EZAEG2A50AX
 D 8401 (B,104,22) Diode EZAEG2A50AX
 D 8402 (B,106,22) Diode EZAEG2A50AX
 D 8403 (B,108,20) Diode EZAEG2A50AX

L 7921 (A,76,52) Inductor CTF1787
 L 7922 (A,81,72) Inductor CTF1787
 L 7923 (A,83,71) Inductor CTF1787
 L 7930 (A,102,60) Chip Beads VTL1127
 L 7931 (A,101,60) Chip Beads VTL1127

D 8404 (B,108,24) Diode EZAEG2A50AX
 D 8405 (B,111,21) Diode EZAEG2A50AX
 D 8406 (B,112,20) Diode EZAEG2A50AX
 D 8419 (B,111,23) Diode EZAEG2A50AX
 D 8420 (B,109,23) Diode EZAEG2A50AX

L 7932 (A,102,59) Chip Beads VTL1127
 L 7933 (A,101,58) Chip Beads VTL1127
 L 7934 (A,102,58) Chip Beads VTL1127
 L 7935 (A,101,57) Chip Beads VTL1127
 L 7936 (A,102,56) Chip Beads VTL1127

D 8423 (B,108,21) Diode EZAEG2A50AX
 D 8424 (B,106,20) Diode EZAEG2A50AX
 D 8501 (A,10,86) Rectifier Diode(A,B,C) DA2J101
 D 8506 (B,143,100) Diode EZAEG2A50AX
 D 8507 (B,141,104) Diode EZAEG2A50AX

L 7937 (A,101,56) Chip Beads VTL1127
 L 8001 (B,130,96) Noise Filter CTF1834
 L 8002 (B,123,96) Noise Filter CTF1834
 L 8003 (B,126,96) Noise Filter CTF1834
 L 8004 (B,128,96) Noise Filter CTF1834

5				6				7				8			
Circuit Symbol and No.				Part No.				Circuit Symbol and No.				Part No.			
L 8005	(B,110,73)	Ferrite Bead		CTF1528				R 7057	(A,102,45)			RS1/10SR331J			
L 8006	(B,120,67)	Chip Beads		VTL1127				R 7066	(B,28,69)			RS1/16SS2702D			
L 8007	(B,120,65)	Chip Beads		VTL1127											
L 8008	(B,120,64)	Chip Beads		VTL1127				R 7067	(B,28,70)			RS1/16SS1101D			A
L 8009	(B,120,62)	Chip Beads		VTL1126				R 7068	(B,29,71)			RS1/16SS2701D			
								R 7071	(A,18,77)	0.011 ohm		CCN1341			
L 8011	(A,123,74)	Inductor		CTF1786				R 7077	(B,30,72)			RS1/16SS1103D			
L 8012	(A,109,79)	Inductor		CTF1795				R 7078	(B,26,69)			RS1/16SS562J			
L 8201	(B,55,18)	Ferrite Bead		CTF1528											
L 8202	(B,54,18)	Ferrite Bead		CTF1528				R 7079	(B,28,68)			RS1/16SS0R0J			
L 8203	(B,53,18)	Ferrite Bead		CTF1528				R 7082	(B,30,69)			RS1/16SS0R0J			
								R 7086	(A,9,74)			RS1/16SS102J			
L 8204	(B,132,15)	Ferrite Bead		CTF1528				R 7087	(A,8,75)			RS1/16SS102J			
L 8205	(B,69,22)	Ferrite Bead		CTF1528				R 7088	(A,10,81)			RS1/16SS103J			
L 8401	(B,104,30)	Coil(Except C)		CTH1554											
L 8401	(B,104,30)	Coil(C)		CTF1731				R 7091	(B,24,72)			RS1/16SS0R0J			
L 8402	(B,102,30)	Coil(Except C)		CTH1554				R 7092	(A,70,85)			RS1/16SS683J			B
								R 7093	(A,69,88)			RS1/16SS683J			
L 8402	(B,102,30)	Coil(C)		CTF1731				R 7094	(A,63,87)			RS1/10SR103J			
L 8403	(B,101,30)	Coil(Except C)		CTH1554				R 7098	(A,8,80)			RS1/16SS103J			
L 8403	(B,101,30)	Coil(C)		CTF1731											
L 8404	(B,99,30)	Coil(Except C)		CTH1554				R 7099	(B,61,115)	(A)		RS1/4SA0R0J			
L 8404	(B,99,30)	Coil(C)		CTF1731				R 7101	(B,49,55)			RS1/16SS0R0J			
								R 7102	(B,53,55)			RS1/16SS0R0J			
L 8405	(B,97,30)	Coil		CTH1554				R 7103	(B,56,76)			RS1/16SS0R0J			
L 8501	(B,140,97)	Choke Coil 90 ohm		CTH1319				R 7104	(B,57,78)			RS1/16SS1502D			
L 8502	(B,137,97)	Choke Coil 90 ohm		CTH1319											
X 7701	(A,34,42)	Resonator 12.288 MHz	CSS1811					R 7105	(B,58,77)			RS1/16SS4303D			
X 7901	(A,86,74)	Resonator 32.000 MHz	CSS1818					R 7106	(B,58,75)			RS1/16SS8202D			
								R 7107	(B,56,55)			RS1/16SS104J			C
X 8001	(B,104,73)	Resonator 27.000 MHz	CSS1768					R 7109	(B,56,65)			RS1/16SS0R0J			
P 7001	(B,62,121)	Poly Switch(A)	MINISMDC150F/24					R 7110	(B,57,64)			RS1/16SS1802D			
CN7001	(A,51,114)	Connector	CKS4977												
CN7301	(B,99,38)	B TO B Connector	CKS6547					R 7111	(B,58,64)			RS1/16SS4703D			
CN7302	(B,136,38)	B TO B Connector	CKS6549					R 7112	(B,58,66)			RS1/16SS1503D			
								R 7113	(B,60,75)			RS1/16SS562J			
CN7701	(B,20,20)	B TO B Connector	CKS6346					R 7114	(B,56,56)			RS1/16SS0R0J			
CN8201	(B,65,11)	FFC/FPC Connector	CKS6646					R 7115	(B,59,72)			RS1/10SR0R0J			
CN8202	(B,83,117)	Plug	CKM1599												
CN8203	(B,147,9)	FFC/FPC Connector	CKS6646					R 7116	(B,60,66)			RS1/16SS392J			
CN8204	(B,66,94)	Connector	CKS6007					R 7117	(B,59,74)			RS1/10SR0R0J			
								R 7118	(B,58,69)			RS1/10SR0R0J			
CN8401	(B,109,14)	FFC/FPC Connector	CKS6646					R 7119	(B,58,68)			RS1/10SR0R0J			D
CN8502	(B,58,127)	Connector(A,B,C)	CKS6603					R 7120	(B,55,57)			RS1/10SR334J			
JA7501	(A,103,21)	Connector	CKS6282												
JA7502	(A,155,32)	Connector	CKS6438					R 7121	(B,58,57)			RS1/10SR274J			
JA8001	(B,125,109)	Connector	CKS6560					R 7122	(B,57,71)			RS1/16SS104J			
								R 7123	(B,45,75)			RS1/10SR120J			
JA8501	(B,147,116)	Connector	DKN1417					R 7124	(B,46,63)			RS1/10SR100J			
JA8502	(B,41,127)	Connector(A)	CKS6495					R 7125	(B,44,74)			RS1/10SR2R2J			
JA8503	(B,10,127)	Jack	CKN1040												
JA8601	(B,38,10)	Connector	CKS6437					R 7128	(A,58,78)	15 mohm		CCN1328			
	BT Module		CWX4710					R 7129	(A,59,78)	15 mohm		CCN1328			
								R 7130	(A,59,62)	12 mohm		CCN1321			
								R 7131	(A,58,62)	12 mohm		CCN1321			
								R 7132	(A,61,72)			RS1/4SA0R0J			E
R 7001	(A,66,111)	(A)		RS1/4SA0R0J				R 7133	(A,61,69)			RS1/4SA0R0J			
R 7008	(A,70,104)			RS1/16SS473J				R 7134	(B,56,64)			RS1/16SS0R0J			
R 7011	(A,71,103)			RS1/16SS2401D				R 7135	(B,49,65)			RS1/16SS6R8J			
R 7017	(A,72,104)			RS1/16SS8201D				R 7136	(B,48,76)			RS1/16SS6R8J			
R 7018	(A,72,101)			RS1/16SS2201D				R 7202	(A,142,69)			RS1/16SS222J			
R 7025	(A,36,87)			RS1/16SS0R0J				R 7203	(A,141,70)			RS1/16SS222J			
R 7026	(A,41,87)			RS1/10SR0R0J				R 7206	(A,143,71)			RS1/16SS222J			
R 7029	(A,16,32)			RS1/16SS102J				R 7207	(A,143,73)			RS1/16SS222J			
R 7032	(A,13,38)			RS1/8SQ0R0J				R 7211	(B,86,92)			RS1/8SQ0R0J			
R 7041	(A,113,44)			RS1/16SS683J				R 7212	(B,91,111)			RS1/8SQ0R0J			F
R 7049	(A,107,49)			RS1/10SR103J				R 7213	(A,102,99)			RS1/16SS102J			
R 7050	(A,111,46)			RS1/16SS683J				R 7214	(A,94,78)			RS1/16SS102J			
R 7056	(A,99,47)			RS1/8SQ0R0J				R 7215	(A,102,98)			RS1/16SS102J			

RESISTORS

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 7216 (A,94,77)
R 7217 (A,102,97)

RS1/16SS102J
RS1/16SS102J

R 7385 (B,112,27)
R 7386 (B,83,32)

RS1/16SS0R0J
RS1/16SS0R0J

A

R 7218 (A,93,101)
R 7219 (A,94,76)
R 7220 (A,87,80)
R 7221 (A,102,96)
R 7222 (A,94,75)

RS1/16SS152J
RS1/16SS102J
RS1/16SS152J
RS1/16SS102J
RS1/16SS102J

R 7387 (B,106,32)
R 7388 (B,86,32)
R 7389 (B,109,29)
R 7390 (B,84,31)
R 7391 (B,107,32)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7224 (A,93,102)
R 7225 (A,91,102)
R 7227 (A,88,104)
R 7229 (A,87,81)
R 7230 (A,85,81)

RS1/16SS3002D
RS1/16SS2701D
RS1/16SS8201D
RS1/16SS3002D
RS1/16SS2701D

R 7392 (B,87,31)
R 7393 (B,93,45)
R 7394 (B,86,30)
R 7397 (B,128,32)
R 7398 (B,92,31)

RS1/16SS101J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

B

R 7232 (A,83,84)
R 7233 (A,94,113)
R 7234 (A,88,92)
R 7235 (A,90,103)
R 7236 (A,84,82)

RS1/16SS8201D
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS752J
RS1/16SS103J

R 7399 (B,129,32)
R 7400 (B,91,31)
R 7401 (B,90,31)
R 7403 (B,91,43)
R 7405 (B,92,45)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7237 (B,107,103) 0.047 ohm
R 7238 (B,101,83) 0.047 ohm
R 7245 (A,103,104)
R 7246 (A,97,84)
R 7247 (A,102,101)

CCN1167
CCN1167
RS1/16SS1001D
RS1/16SS0R0J
RS1/16SS224J

R 7407 (B,130,32)
R 7408 (B,93,43)
R 7419 (B,140,47)
R 7420 (B,139,44)
R 7425 (B,141,44) (A)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS221J

C

R 7248 (A,96,81)
R 7249 (A,104,104)
R 7250 (A,98,84)
R 7251 (A,104,103)
R 7252 (A,98,82)

RS1/16SS224J
RS1/16SS1202D
RS1/16SS2202D
RS1/16SS104J
RS1/16SS104J

R 7426 (B,142,44) (A)
R 7428 (B,143,43) (A)
R 7430 (B,143,45) (A)
R 7433 (B,145,45)
R 7435 (B,146,46)

RS1/16SS221J
RS1/16SS0R0J
RS1/16SS221J
RS1/16SS0R0J
RS1/16SS0R0J

R 7253 (A,111,103)
R 7254 (A,105,83)
R 7302 (A,126,43)
R 7303 (A,123,42)
R 7306 (B,125,43)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS0R0J

R 7437 (B,148,46)
R 7439 (B,118,31)
R 7440 (B,150,44)
R 7441 (B,150,43)
R 7442 (B,119,32)

CTF1645
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

D

R 7307 (B,90,48)
R 7308 (B,126,45)
R 7309 (B,91,45)
R 7310 (B,126,43)
R 7311 (B,127,45)

RS1/10SR0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7443 (B,126,31)
R 7444 (B,125,30)
R 7445 (B,124,30)
R 7446 (B,123,30)
R 7447 (B,121,30)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7315 (B,128,45)
R 7317 (B,129,43)
R 7323 (B,129,45)
R 7325 (B,130,43)
R 7327 (B,131,47)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7448 (B,121,31)
R 7449 (B,120,30)
R 7456 (B,82,29)
R 7457 (B,112,29)
R 7458 (B,113,30)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS103J
RS1/16SS103J
RS1/16SS103J

E

R 7329 (B,131,43)
R 7330 (B,131,45)
R 7331 (B,133,43)
R 7333 (B,132,43)
R 7335 (B,132,32)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7459 (B,114,30)
R 7460 (B,115,31)
R 7461 (B,116,31)
R 7463 (B,149,45)
R 7470 (B,111,31)

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J

R 7338 (B,130,29)
R 7340 (B,130,26)
R 7341 (B,136,45)
R 7342 (B,131,27)
R 7343 (B,137,44)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7482 (B,53,113) (A)
R 7483 (B,53,111) (A)
R 7484 (B,127,24)
R 7503 (B,125,27)
R 7504 (B,124,27)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS104J
RS1/16SS103J
RS1/16SS103J

F

R 7344 (B,133,31)
R 7345 (B,137,45)
R 7350 (B,129,27)
R 7356 (B,95,32)
R 7357 (B,129,29)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 7505 (B,121,27)
R 7506 (B,120,27)
R 7507 (B,119,27)
R 7515 (A,119,32)
R 7516 (A,120,30)

RS1/16SS103J
RS1/16SS103J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J

R 7362 (B,110,30) (A,B,C)
R 7364 (B,109,32) (A,B,C)
R 7376 (B,117,43)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J

R 7517 (A,121,30)
R 7518 (A,123,30)
R 7519 (A,124,30)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 7520	(A,125,30)	RS1/16SS0R0J		R 7715	(B,26,33)	RS1/16SS0R0J		
R 7521	(A,126,29)	RS1/16SS0R0J		R 7716	(B,49,33)	RS1/16SS103J		
R 7522	(A,114,39)	RS1/16SS680J		R 7717	(B,13,14)	RS1/16SS102J		A
R 7523	(A,95,39)	RS1/16SS680J		R 7718	(B,12,14)	RS1/16SS102J		
R 7524	(A,91,39)	RS1/16SS330J		R 7719	(B,49,40)	RS1/16SS103J		
R 7525	(B,163,46)	RS1/16SS680J		R 7724	(B,49,39)	RS1/16SS103J		
R 7526	(B,158,46)	RS1/16SS680J		R 7728	(A,33,38)	RS1/16SS0R0J		
R 7527	(A,146,48)	RS1/16SS680J		R 7729	(B,13,23)	RS1/16SS0R0J		
R 7528	(B,90,10)	RS1/16SS221J		R 7730	(B,52,42)	RS1/16SS222J		
R 7530	(B,89,14)	RS1/16SS330J		R 7734	(A,26,35)	RS1/16SS223J		
R 7531	(A,114,38)	RS1/16SS680J		R 7735	(A,26,36)	RS1/16SS223J		
R 7532	(A,107,39)	RS1/16SS680J		R 7737	(B,25,35)	RS1/16SS222J		
R 7533	(A,93,39)	RS1/16SS680J		R 7738	(B,23,35)	RS1/16SS332J		
R 7534	(B,161,46)	RS1/16SS680J		R 7739	(B,46,41)	RS1/16SS0R0J		B
R 7535	(A,144,48)	RS1/16SS680J		R 7744	(A,26,33)	RS1/16SS223J		
R 7537	(B,162,47)	RS1/16SS103J		R 7745	(B,38,51)	RS1/16SS333J		
R 7538	(B,160,47)	RS1/16SS103J		R 7746	(B,37,50)	RS1/16SS473J		
R 7539	(B,157,47)	RS1/16SS103J		R 7749	(B,28,48)	RS1/16SS101J		
R 7540	(A,145,50)	RS1/16SS103J		R 7756	(B,139,70)	RS1/16SS103J		
R 7541	(A,144,50)	RS1/16SS103J		R 7757	(B,137,64)	RS1/16SS220J		
R 7544	(A,141,50)	RS1/16SS0R0J		R 7758	(B,141,61)	RS1/16SS220J		
R 7545	(A,88,41)	RS1/16SS0R0J		R 7759	(A,34,35)	RS1/16SS0R0J		
R 7601	(B,153,27)	RS1/16SS221J		R 7760	(A,48,31)	RS1/16SS0R0J		
R 7603	(B,157,26)	RS1/16SS0R0J		R 7761	(A,55,41)	RS1/16SS0R0J		
R 7604	(B,152,28)	RS1/16SS102J		R 7762	(B,30,22)	RS1/16SS222J		C
R 7605	(B,154,28)	RS1/16SS102J		R 7763	(A,51,31)	RS1/16SS0R0J		
R 7606	(B,150,28)	RS1/16SS102J		R 7764	(A,37,50)	RS1/16SS0R0J		
R 7607	(B,160,34)	RS1/16SS103J		R 7765	(A,50,36)	RS1/16SS101J		
R 7609	(B,136,29)	RS1/16SS0R0J		R 7766	(B,52,39)	RS1/16SS471J		
R 7610	(B,141,30)	RS1/16SS330J		R 7767	(B,52,40)	RS1/16SS470J		
R 7611	(B,138,32)	RS1/16SS330J		R 7768	(B,52,37)	RS1/16SS470J		
R 7612	(B,145,28)	RS1/16SS330J		R 7769	(B,52,38)	RS1/16SS471J		
R 7613	(B,140,49)	RS1/16SS221J		R 7770	(B,52,41)	RS1/16SS470J		
R 7614	(B,135,48)	RS1/16SS0R0J		R 7774	(A,5,96)	RS1/16SS0R0J		
R 7615	(B,132,54)	RS1/16SS330J		R 7775	(B,26,43)	RS1/16SS0R0J		
R 7616	(B,132,52)	RS1/16SS330J		R 7776	(B,30,37)	RS1/16SS0R0J		D
R 7617	(B,133,50)	RS1/16SS330J		R 7777	(A,27,37)	RS1/16SS0R0J		
R 7618	(B,138,31)	RS1/16SS103J		R 7778	(B,45,45)	RS1/16SS0R0J		
R 7619	(B,135,59)	RS1/16SS103J		R 7780	(B,40,49)	RS1/16SS223J		
R 7621	(B,160,23)	RS1/16SS821J		R 7781	(B,50,47)	RS1/16SS223J		
R 7622	(B,163,23)	RS1/16SS821J		R 7782	(B,49,46)	RS1/16SS0R0J		
R 7623	(B,143,19)	RS1/16SS821J		R 7783	(B,52,50)	RS1/16SS472J		
R 7624	(B,147,19)	RS1/16SS821J		R 7784	(B,50,49)	RS1/16SS163J		
R 7625	(B,149,51)	RS1/16SS821J		R 7785	(A,49,50)	RS1/16SS101J		
R 7626	(B,149,56)	RS1/16SS821J		R 7786	(B,42,51)	RS1/16SS0R0J		
R 7628	(B,161,22)	RS1/16SS0R0J		R 7787	(A,7,110)	RS1/16SS333J		
R 7631	(B,144,18)	RS1/16SS0R0J		R 7789	(A,4,103)	RS1/16SS103J		E
R 7634	(B,150,54)	RS1/16SS0R0J		R 7791	(A,4,100)	RS1/16SS824J		
R 7639	(B,136,31)	RS1/16SS0R0J		R 7792	(A,7,100)	RS1/16SS563J		
R 7640	(B,157,21)	RS1/16SS0R0J		R 7793	(A,21,44)	RS1/16SS0R0J		
R 7702	(B,28,51)	RS1/16SS103J		R 7794	(A,11,105)	RS1/16SS0R0J		
R 7703	(B,27,50)	RS1/16SS103J		R 7795	(A,8,113)	RS1/16SS472J		
R 7704	(A,36,40)	RS1/16SS222J		R 7797	(B,42,47)	RS1/16SS153J		
R 7707	(A,5,114)	RS1/16SS0R0J		R 7798	(A,27,29)	RS1/16SS223J		
R 7708	(B,28,22)	RS1/16SS101J		R 7804	(A,26,31)	RS1/16SS0R0J		
R 7709	(B,21,28)	RS1/10SR0R0J		R 7805	(A,12,109)	RS1/16SS102J		
R 7710	(B,29,25)	RS1/16SS101J		R 7806	(A,11,113)	RS1/16SS102J		F
R 7712	(B,16,25)	RS1/16SS0R0J		R 7811	(B,9,25)	RS1/16SS0R0J		
R 7713	(B,17,25)	RS1/16SS0R0J		R 7814	(B,44,39)	RS1/16SS0R0J		
R 7714	(B,26,40)	RS1/16SS102J		R 7820	(A,14,28)	RS1/16SS0R0J		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 7821 (A,45,53)
R 7822 (B,26,41)

RS1/16SS0R0J
RS1/16SS0R0J

R 7995 (A,89,66)
R 8001 (B,116,103)

RS1/16SS270J
RS1/16SS0R0J

A

R 7823 (B,38,48)
R 7826 (B,34,48)
R 7827 (A,41,53)
R 7832 (A,48,22)
R 7833 (A,45,29)

RS1/16SS273J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J

R 8002 (B,118,103)
R 8003 (B,119,101)
R 8004 (B,117,100)
R 8006 (A,117,93)
R 8007 (A,117,92)

RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J
RS1/16SS103J
RS1/16SS102J

R 7834 (B,40,47)
R 7836 (B,14,26)
R 7838 (B,11,25)
R 7839 (B,11,22)
R 7881 (B,60,19)

RS1/16SS223J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS0R0J

R 8008 (B,115,103)
R 8009 (B,114,98)
R 8010 (B,114,99)
R 8011 (A,108,81)
R 8012 (A,108,79)

RS1/16SS102J
RS1/16SS473J
RS1/16SS473J
RS1/16SS223J
RS1/16SS433J

B

R 7882 (B,59,17)
R 7901 (B,76,73)
R 7902 (B,74,71)
R 7903 (B,73,64)
R 7907 (B,63,54)

RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J
RS1/16SS151J
RS1/16SS151J

R 8013 (A,121,57)
R 8014 (A,116,56)
R 8015 (B,120,70)
R 8016 (A,121,53)
R 8017 (A,113,79)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS273J

R 7908 (B,65,54)
R 7909 (B,66,54)
R 7910 (A,66,56)
R 7911 (B,81,63)
R 7912 (B,81,61)

RS1/16SS151J
RS1/16SS151J
RS1/16SS151J
RS1/4SA0R0J
RS1/4SA0R0J

R 8018 (B,106,70)
R 8019 (B,120,69)
R 8021 (B,120,68)
R 8022 (B,106,68)
R 8024 (A,118,67)

RS1/16SS102J
RS1/16SS271J
RS1/16SS0R0J
RS1/16SS105J
RS1/16SS333J

C

R 7913 (B,81,59)
R 7916 (B,79,73)
R 7918 (B,75,83)
R 7919 (B,79,67)
R 7920 (B,82,69)

RS1/4SA0R0J
RS1/16SS1500D
RS1/16SS0R0J
RS1/16SS1500D
RS1/16SS472J

R 8025 (A,119,67)
R 8026 (B,122,67)
R 8027 (A,117,62)
R 8028 (A,118,64)
R 8029 (B,122,65)

RS1/16SS333J
RS1/16SS330J
RS1/16SS333J
RS1/16SS333J
RS1/16SS330J

R 7921 (B,82,55)
R 7923 (B,82,67)
R 7924 (B,83,67)
R 7925 (A,84,71)
R 7926 (A,84,69)

RS1/16SS473J
RS1/16SS101J
RS1/16SS101J
RS1/16SS821J
RS1/16SS105J

R 8031 (A,108,60)
R 8032 (A,107,62)
R 8033 (B,122,64)
R 8035 (B,120,63)
R 8036 (A,105,62)

RS1/16SS103J
RS1/16SS0R0J
RS1/16SS330J
RS1/16SS0R0J
RS1/16SS472J

D

R 7927 (B,74,95)
R 7928 (B,73,79)
R 7929 (B,70,90)
R 7930 (A,92,68)
R 7932 (B,70,65)

RS1/16SS104J
RS1/10SR0R0J
RS1/16SS104J
RS1/16SS221J
RS1/16SS0R0J

R 8037 (B,122,62)
R 8038 (A,124,52)
R 8040 (A,123,52)
R 8041 (A,125,52)
R 8042 (B,106,62)

RS1/16SS101J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RAB4CQ220J

R 7933 (B,72,74)
R 7942 (B,58,51)
R 7943 (B,58,50)
R 7945 (A,90,69)
R 7951 (A,90,71)

RS1/16SS104J
RS1/16SS273J
RS1/16SS273J
RS1/16SS103J
RS1/16SS101J

R 8043 (B,106,59)
R 8044 (B,111,57)
R 8045 (B,114,57)
R 8046 (A,121,75)
R 8052 (B,104,65)

RAB4CQ220J
RAB4CQ220J
RAB4CQ220J
RS1/16SS472J
RS1/16SS100J

E

R 7955 (A,98,62)
R 7956 (A,99,59)
R 7957 (A,99,57)
R 7958 (A,90,60)
R 7959 (A,90,57)

RS1/16SS104J
RAB4CQ151J
RAB4CQ151J
RAB4CQ391J
RAB4CQ391J

R 8057 (A,128,74)
R 8058 (A,128,73)
R 8059 (A,128,71)
R 8061 (B,121,58)
R 8065 (B,123,72)

RS1/16SS821J
RS1/16SS0R0J
RS1/16SS821J
RAB4CQ221J
RS1/16SS0R0J

R 7968 (A,98,61)
R 7977 (A,98,65)
R 7982 (B,62,46)
R 7983 (B,66,46)
R 7984 (A,66,47)

RS1/16SS221J
RS1/16SS151J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 8066 (B,127,68)
R 8070 (A,117,71)
R 8071 (A,112,79)
R 8201 (B,75,22)
R 8202 (B,140,15)

RS1/16SS0R0J
RS1/16SS222J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

F

R 7985 (A,62,47)
R 7986 (B,63,34)
R 7987 (B,66,34)
R 7988 (A,65,35)
R 7989 (A,61,35)

RS1/16SS101J
RS1/16SS75R0D
RS1/16SS75R0D
RS1/16SS75R0D
RS1/16SS75R0D

R 8203 (B,74,23)
R 8205 (B,73,22)
R 8209 (B,88,125)
R 8210 (B,77,123)
R 8216 (B,72,16)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS0R0J

R 7991 (B,57,25)
R 7992 (B,57,46)
R 7994 (B,76,68)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8218 (B,71,19)
R 8220 (B,70,16)
R 8222 (B,68,19)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 8223	(B,68,17)	RS1/16SS0R0J		R 8420	(B,114,20)	RS1/16SS0R0J		
R 8227	(B,66,16)	RS1/16SS0R0J		R 8421	(B,114,22)	RS1/16SS0R0J		
R 8228	(B,65,18)	RS1/16SS0R0J		R 8422	(B,114,24)	RS1/16SS0R0J		A
R 8229	(B,65,16)	RS1/16SS0R0J		R 8423	(B,113,25)	RS1/16SS0R0J		
R 8231	(B,64,18)	RS1/16SS0R0J		R 8446	(B,100,22)	RS1/16SS0R0J		
R 8232	(B,64,16)	RS1/16SS0R0J		R 8447	(B,99,23)	RS1/16SS0R0J		
R 8233	(B,63,18)	RS1/16SS0R0J		R 8449	(B,98,24)	RS1/16SS0R0J		
R 8235	(B,62,16)	RS1/16SS0R0J		R 8450	(B,97,24)	RS1/16SS0R0J		
R 8236	(B,62,18)	RS1/16SS0R0J		R 8451	(B,97,23)	RS1/16SS0R0J		
R 8237	(B,61,16)	RS1/16SS0R0J		R 8452	(B,96,23)	RS1/16SS0R0J		
R 8241	(B,59,19)	RS1/16SS0R0J		R 8453	(B,93,24)	RS1/16SS0R0J		
R 8242	(B,58,17)	RS1/16SS0R0J		R 8454	(B,94,21)	RS1/16SS0R0J		
R 8243	(B,57,20)	RS1/16SS0R0J		R 8456	(B,120,22)	RS1/8SQ0R0J		B
R 8244	(B,56,18)	RS1/16SS0R0J		R 8458	(B,101,21)	RS1/8SQ0R0J		
R 8245	(B,56,20)	RS1/16SS0R0J		R 8460	(B,93,20)	RS1/8SQ0R0J		
R 8249	(B,53,22) (A)	RS1/16SS0R0J		R 8461	(B,88,29)	RS1/16SS0R0J		
R 8250	(B,52,20) (A)	RS1/16SS0R0J		R 8501	(A,139,94)	RS1/16SS473J		
R 8251	(B,51,22) (A)	RS1/16SS0R0J		R 8503	(A,138,94)	RS1/16SS472J		
R 8254	(B,50,19) (A)	RS1/16SS0R0J		R 8509	(A,15,87) (A,B,C)	RS1/16SS101J		
R 8255	(B,49,19) (A)	RS1/16SS0R0J		R 8510	(A,6,86) (A,B,C)	RS1/16SS103J		
R 8304	(B,156,15)	RS1/16SS471J		R 8511	(A,17,90) (A,B,C)	RS1/16SS0R0J		
R 8305	(B,155,17)	RS1/16SS471J		R 8512	(B,143,90)	RS1/16SS0R0J		
R 8306	(B,155,15)	RS1/16SS0R0J		R 8514	(A,4,90) (A,B,C)	RS1/16SS0R0J		
R 8307	(B,164,18)	RS1/16SS0R0J		R 8517	(A,10,89) (A,B,C)	RS1/16SS104J		
R 8308	(B,163,18)	RS1/16SS0R0J		R 8520	(A,43,105) (A)	RS1/16SS473J		C
R 8309	(B,161,17)	RS1/16SS0R0J		R 8525	(A,33,111) (A)	RS1/16SS104J		
R 8310	(B,160,17)	RS1/16SS0R0J		R 8526	(A,45,114) (A)	RS1/16SS471J		
R 8311	(B,159,18)	RS1/16SS0R0J		R 8528	(A,38,107) (A)	RS1/16SS473J		
R 8312	(B,158,18)	RS1/16SS0R0J		R 8529	(A,43,113) (A)	RS1/16SS223J		
R 8313	(B,158,17)	RS1/16SS0R0J		R 8530	(A,46,114) (A)	RS1/16SS223J		
R 8314	(B,157,17)	RS1/16SS0R0J		R 8533	(A,33,106) (A)	RS1/16SS331J		
R 8315	(B,154,18)	RS1/16SS102J		R 8534	(A,43,114) (A)	RS1/16SS181J		
R 8316	(B,153,17)	RS1/16SS102J		R 8535	(A,47,112) (A)	RS1/16SS181J		
R 8317	(B,153,15)	RS1/16SS102J		R 8541	(A,35,113) (A)	RS1/10SR102J		
R 8322	(B,151,17)	RS1/16SS0R0J		R 8542	(A,40,112) (A)	RS1/10SR102J		
R 8323	(B,150,15)	RS1/16SS0R0J		R 8547	(A,53,119) (A)	RS1/10SR0R0J		D
R 8333	(B,146,16)	RS1/16SS0R0J		R 8548	(B,48,118) (A)	VTL1133		
R 8334	(B,145,16)	RS1/16SS0R0J		R 8549	(B,33,118) (A)	VTL1133		
R 8336	(B,144,15)	RS1/16SS0R0J		R 8550	(B,47,118) (A)	VTL1133		
R 8337	(B,143,16)	RS1/16SS0R0J		R 8551	(B,42,118) (A)	VTL1133		
R 8340	(B,141,16)	RS1/16SS0R0J		R 8552	(B,40,118) (A)	VTL1133		
R 8341	(B,138,16)	RS1/16SS0R0J		R 8553	(B,37,118) (A)	VTL1133		
R 8342	(B,69,98)	RS1/16SS0R0J		R 8565	(A,6,116)	VTL1134		
R 8343	(B,68,98)	RS1/16SS0R0J		R 8566	(A,10,116)	RS1/16SS0R0J		
R 8344	(B,67,98)	RS1/16SS0R0J		R 8581	(A,140,90)	RS1/16SS103J		
R 8345	(B,66,98)	RS1/16SS0R0J		R 8582	(A,142,94)	RS1/16SS103J		
R 8346	(B,65,98)	RS1/16SS0R0J		R 8585	(B,54,123) (A,B,C)	RS1/16SS102J		E
R 8347	(B,64,98)	RS1/16SS0R0J		R 8586	(B,57,123) (A,B,C)	RS1/16SS102J		
R 8360	(B,130,13)	RS1/16SS0R0J		R 8603	(A,10,5)	RS1/16SS0R0J		
R 8401	(B,128,15)	RS1/16SS0R0J		R 8604	(A,32,13)	RS1/16SS0R0J		
R 8402	(B,130,16)	RS1/16SS0R0J		R 8608	(A,16,8)	RS1/16SS273J		
R 8403	(B,129,14)	RS1/16SS0R0J		R 8613	(A,16,10)	RS1/16SS473J		
R 8404	(B,122,20)	RS1/16SS0R0J		R 8614	(A,21,5)	RS1/16SS621J		
R 8408	(B,122,22)	RS1/16SS0R0J		R 8616	(A,28,7)	RS1/16SS222J		
R 8414	(B,118,25)	RS1/16SS0R0J		R 8617	(A,28,6)	RS1/16SS0R0J		
R 8415	(B,117,23)	RS1/16SS0R0J		R 8618	(A,25,9)	RS1/16SS104J		
R 8416	(B,117,28)	RS1/16SS0R0J		R 8619	(A,15,11)	RS1/16SS104J		F
R 8417	(B,116,20)	RS1/16SS0R0J		R 8620	(A,47,15)	RS1/16SS0R0J		
R 8418	(B,116,23)	RS1/16SS0R0J		R 8626	(A,31,8)	RS1/16SS0R0J		
R 8419	(B,115,25)	RS1/16SS0R0J		R 8627	(A,31,20)	RS1/16SS0R0J		

1

Circuit Symbol and No.

R 8701 (A,127,95)
 R 8709 (A,135,95) (A)
 R 8710 (A,135,93) (B)
 R 8713 (A,135,87) (D,E,F,G)
 R 8715 (A,135,83) (C)
 R 8803 (A,87,78)

2

Part No.

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J

3

Circuit Symbol and No.

C 7125 (A,56,66) 47 uF
 C 7201 (A,142,66)
 C 7202 (A,145,66)
 C 7204 (A,146,70)
 C 7207 (B,88,87) 10 uF
 C 7208 (B,88,89) 10 uF
 C 7209 (B,94,109) 10 uF
 C 7210 (B,94,107) 10 uF
 C 7211 (A,91,101)

4

Part No.

CCG1229
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCG1236
 CCG1236
 CCG1236
 CCG1236
 CCSSCH471J50

CAPACITORS

C 7006 (A,72,108)
 C 7013 (B,70,117)
 C 7014 (B,51,118) (A)
 C 7018 (A,8,35)
 C 7021 (A,121,47) 4.7 uF

CKSQYB334K50
 CEVW220M16
 CKSRYB104K50
 CKSRYB105K10
 CCG1212

C 7212 (A,85,80)
 C 7213 (B,102,99)
 C 7214 (B,94,78)
 C 7215 (A,91,103)
 C 7216 (A,86,83)

CCSSCH471J50
 CEVW101M16
 CEVW101M16
 CCSSCH270J50
 CCSSCH270J50

C 7023 (A,7,33) 4.7 uF
 C 7029 (A,117,51) 4.7 uF
 C 7032 (A,85,44)
 C 7033 (A,80,44)
 C 7036 (A,111,44)

CCG1212
 CCG1212
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10

C 7217 (B,105,103)
 C 7218 (B,99,82)
 C 7219 (A,90,104)
 C 7220 (A,84,83)
 C 7221 (A,95,112)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB222K50
 CCSSCH821J50
 CKSRYB104K50

C 7039 (A,111,45)
 C 7042 (A,16,35)
 C 7043 (A,119,44)
 C 7045 (B,27,69)
 C 7046 (A,31,71) 10 uF/16 V

CKSSYB473K16
 CKSSYB104K10
 CKSSYB104K10
 CCSSCH561J50
 DCH1263

C 7222 (A,89,91)
 C 7223 (A,90,106)
 C 7224 (A,84,85)
 C 7225 (B,103,104) 22 uF
 C 7226 (B,97,84) 22 uF

CKSRYB104K50
 CKSRYB105K10
 CKSRYB105K10
 CCG1254
 CCG1254

C 7047 (A,31,72) 10 uF/16 V
 C 7048 (A,31,74) 10 uF/16 V
 C 7049 (A,31,76)
 C 7052 (B,28,85)
 C 7053 (A,22,78) 10 uF

DCH1263
 DCH1263
 CKSSYB104K16
 CKSSYB104K16
 CCG1236

C 7229 (A,103,109)
 C 7230 (A,103,106)
 C 7231 (A,103,101)
 C 7232 (A,101,101)
 C 7233 (A,97,89)

CKSSYB104K16
 CKSSYB104K16
 CKSSYB102K50
 CKSSYB472K50
 CKSSYB104K16

C 7055 (B,25,72)
 C 7056 (B,26,71)
 C 7057 (B,31,72)
 C 7058 (B,25,71)
 C 7059 (B,26,72)

CKSSYB103K16
 CCSSCH8R0D50
 CKSSYB103K16
 CKSSYB152K50
 CKSRYB105K16

C 7234 (A,97,86)
 C 7235 (A,97,81)
 C 7236 (A,95,81)
 C 7301 (B,79,44) 22 uF
 C 7303 (A,124,38)

CKSSYB104K16
 CKSSYB102K50
 CKSSYB472K50
 DCH1256
 CKSSYB104K10

C 7060 (A,22,76) 10 uF
 C 7061 (A,22,74) 10 uF
 C 7074 (A,70,88)
 C 7078 (A,40,93) 2.2 uF
 C 7081 (A,40,90)

CCG1236
 CCG1236
 CKSRYB105K10
 CCG1218
 CCG1320

C 7305 (B,85,47) 22 uF
 C 7306 (A,127,40)
 C 7501 (B,127,26)
 C 7502 (B,86,13)
 C 7503 (A,103,38) 10 uF

DCH1256
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCG1192

C 7086 (A,67,85) 10 uF
 C 7101 (B,57,76)
 C 7102 (B,59,75)
 C 7103 (B,60,77)
 C 7104 (B,57,65)

CCG1192
 CCSSCH150J50
 CCSSCH220J50
 CKSSYB152K50
 CCSSCH150J50

C 7504 (A,155,49) 10 uF
 C 7505 (A,103,37)
 C 7506 (A,155,48)
 C 7601 (B,164,35) 10 uF
 C 7602 (B,146,23) 10 uF

CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CCG1192
 CCG1192

C 7105 (B,59,66)
 C 7106 (B,56,73)
 C 7107 (B,60,65)
 C 7108 (B,56,68)
 C 7109 (B,58,56)

CCSSCH220J50
 CCSSCH102J50
 CKSSYB472K50
 CCSSCH102J50
 CKSSYB103K16

C 7603 (B,141,59) 10 uF
 C 7604 (B,164,33)
 C 7605 (B,145,23)
 C 7606 (B,140,58)
 C 7607 (B,166,24)

CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

C 7110 (B,51,76)
 C 7111 (B,54,65)
 C 7112 (B,47,71)
 C 7113 (B,45,77)
 C 7114 (B,46,62)

CKSSYB222K50
 CKSSYB153K16
 CKSRYB104K50
 CKSRYB104K50
 CKSRYB104K50

C 7608 (B,137,20)
 C 7609 (B,142,49)
 C 7610 (B,166,23) 10 uF
 C 7611 (B,138,18) 10 uF
 C 7612 (B,144,50) 10 uF

CKSSYB104K10
 CKSSYB104K10
 CCG1192
 CCG1192
 CCG1192

C 7115 (B,45,70) 4.7 uF
 C 7116 (A,39,75) 10 uF
 C 7117 (A,40,66) 10 uF
 C 7121 (A,56,75) 47 uF
 C 7122 (A,56,69) 47 uF

CCG1201
 CCG1236
 CCG1236
 CCG1229
 CCG1229

C 7613 (B,160,22)
 C 7614 (B,163,22)
 C 7615 (B,143,18)
 C 7616 (B,146,18)
 C 7617 (B,149,53)

CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50

C 7124 (A,56,72) 47 uF

CCG1229

C 7618 (B,149,55)

CKSSYB102K50

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 7701	(B,28,50)	CKSSYB471K50		C 7910	(B,62,39)	CKSRYB105K10	
C 7705	(B,25,26) 10 uF	CCG1192		C 7911	(B,67,39)	CKSRYB105K10	
C 7707	(A,23,41)	CCG1393		C 7912	(B,66,39)	CKSRYB105K10	
C 7708	(B,22,26) 10 uF	CCG1192		C 7913	(A,64,40)	CKSRYB105K10	A
C 7710	(B,23,24)	CKSSYB104K10		C 7914	(A,66,40)	CKSRYB105K10	
C 7711	(B,27,22)	CKSSYB104K10		C 7915	(A,60,41)	CKSRYB105K10	
C 7712	(A,35,38)	CKSSYB104K10		C 7916	(A,62,40)	CKSRYB105K10	
C 7713	(A,36,36)	CKSSYB104K10		C 7917	(A,64,57) 10 uF	CCG1192	
C 7714	(A,19,28)	CKSRYB105K10		C 7918	(B,75,71)	CKSRYB105K16	
C 7715	(A,13,24)	CKSRYB105K10		C 7919	(B,73,67)	CKSRYB105K16	
C 7717	(A,46,34)	CKSSYB104K10		C 7920	(B,74,61)	CKSRYB105K16	
C 7723	(B,49,42) 2.2 uF	CCG1218		C 7921	(B,64,45)	CKSSYB104K10	
C 7724	(B,23,37) 10 uF	CCG1192		C 7922	(B,67,45)	CKSSYB104K10	
C 7727	(B,25,34)	CKSSYB104K10		C 7923	(A,65,46)	CKSSYB104K10	
C 7728	(B,26,39)	CKSRYB105K10		C 7924	(A,61,47)	CKSSYB104K10	B
C 7730	(A,44,50)	CCG1393		C 7925	(B,71,60)	CKSRYB105K16	
C 7732	(B,38,49)	CKSSYB561K50		C 7926	(A,73,64)	CCSSCH102J50	
C 7733	(B,37,51)	CCSSCH680J50		C 7927	(A,72,64)	CKSSYB104K10	
C 7736	(B,148,69)	CKSQYB225K16		C 7928	(B,72,58)	CKSRYB105K16	
C 7737	(B,149,66) 4.7 uF	CCG1201		C 7929	(A,72,62)	CKSSYB103K16	
C 7738	(B,147,65)	CKSSYB104K10		C 7930	(A,72,61)	CKSSYB474K6R3	
C 7739	(B,149,63) 10 uF	CCG1192		C 7931	(A,72,60)	CKSSYB474K6R3	
C 7740	(B,26,32)	CKSSYB104K10		C 7932	(B,73,56)	CKSRYB105K16	
C 7741	(B,146,61) 10 uF	CCG1192		C 7933	(A,72,58)	CKSSYB104K10	
C 7742	(B,153,66)	CKSSYB104K10		C 7934	(A,73,58)	CCSSCH102J50	C
C 7743	(B,146,60)	CKSSYB104K10		C 7935	(A,67,58)	CKSRYB105K16	
C 7747	(A,43,48)	CKSSYB104K10		C 7936	(A,71,66) 10 uF	CCG1192	
C 7748	(A,42,49) 2.2 uF	CCG1218		C 7937	(A,73,61)	CKSSYB474K6R3	
C 7749	(A,40,48)	CKSSYB104K10		C 7939	(A,77,69)	CKSSYB104K10	
C 7751	(A,38,52) 10 uF	CCG1192		C 7940	(A,77,68)	CCSSCH102J50	
C 7752	(A,51,42)	CKSSYB104K10		C 7941	(A,77,54)	CKSSYB104K10	
C 7753	(B,41,49)	CCSSCH120J50		C 7942	(A,79,54)	CKSSYB104K10	
C 7758	(A,36,42)	CCSSCH120J50		C 7944	(B,80,70)	CKSRYB105K16	
C 7759	(A,35,39)	CCSSCH120J50		C 7945	(A,78,72) 10 uF	CCG1192	
C 7761	(A,38,49)	CCG1393		C 7946	(A,80,69)	CKSSYB104K10	
C 7762	(A,46,49)	CCG1393		C 7947	(A,81,54)	CKSSYB104K10	D
C 7765	(B,51,46)	CKSRYB474K10		C 7948	(A,81,70)	CKSSYB104K10	
C 7766	(B,51,48)	CCSSCH101J50		C 7949	(A,83,48) 10 uF	CCG1192	
C 7767	(B,51,49)	CCSSCH680J50		C 7950	(A,82,68)	CKSSYB104K10	
C 7768	(B,41,51)	CKSSYB104K10		C 7951	(A,83,53)	CKSSYB104K10	
C 7769	(A,7,111)	CCSSCH101J50		C 7952	(A,84,53)	CKSSYB104K10	
C 7770	(A,8,112)	CCG1393		C 7953	(A,77,43) 10 uF	CCG1192	
C 7771	(A,4,105)	CCG1393		C 7954	(A,86,71)	CCSSCH5R0C50	
C 7772	(A,4,101)	CCSSCH6R0D50		C 7955	(A,85,71)	CCSSCH6R0D50	
C 7773	(A,6,100)	CCSSCH220J50		C 7956	(A,88,64)	CKSSYB104K10	
C 7774	(A,10,104)	CKSSYB104K10		C 7957	(A,89,63)	CKSSYB104K10	
C 7775	(A,19,29)	CKSRYB105K10		C 7958	(A,90,68)	CKSSYB103K16	E
C 7779	(A,25,31)	CKSSYB104K10		C 7963	(A,94,63) 1 uF	DCH1246	
C 7780	(A,11,108) 22 uF	DCH1256		C 7965	(A,94,62)	CKSSYB103K16	
C 7782	(A,48,48)	CCG1393		C 7967	(A,91,66)	CCSSCH470J50	
C 7783	(B,33,48)	CKSSYB104K10		C 7968	(A,100,66)	CCSSCH150J50	
C 7785	(B,135,63)	CCSSCH101J50		C 7970	(B,64,50)	CKSSYB104K10	
C 7786	(B,21,24)	CKSSYB104K10		C 7971	(B,67,50)	CKSSYB104K10	
C 7789	(B,41,45) 2.2 uF	CCG1218		C 7972	(A,64,51)	CKSSYB104K10	
C 7791	(A,4,107)	CKSSYB102K50		C 7973	(A,60,52)	CKSSYB104K10	
C 7793	(A,5,102)	CCSSCH6R0D50		C 7974	(A,95,69) 1 uF	DCH1246	
C 7897	(B,71,67)	CKSRYB105K10		C 7975	(A,95,68)	CKSSYB103K16	F
C 7898	(B,66,68)	CKSSYB104K10		C 7979	(B,61,55)	CKSSYB104K10	
C 7899	(B,66,66)	CKSSYB104K10		C 7980	(B,56,48) 10 uF	CCG1192	
C 7909	(B,64,39)	CKSRYB105K10		C 7988	(B,73,91)	CKSRYB105K10	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 7989 (B,74,91) CKSRYB105K10
 C 7990 (B,73,85) CKSSYB104K10
 C 7991 (A,71,74) CKSSYB104K10
 C 7994 (B,69,84) CKSRYB105K10

C 8822 (A,104,52)
 C 8823 (A,78,76)
 C 8824 (A,69,31)
 C 8825 (A,56,30)

CCSSCH9R0D50
 CCSRCH121J50
 CCSRCH121J50
 CCSRCH121J50

C 7995 (B,70,84) CKSRYB105K10
 C 7996 (B,69,78) CKSSYB104K10
 C 7997 (B,71,77) CKSSYB104K10
 C 8000 (B,71,70) CKSRYB105K10
 C 8004 (B,109,71) 10 uF CCG1192

C 8007 (B,116,101) CCSSCH270J50
 C 8008 (B,110,70) CKSSYB104K10
 C 8009 (B,116,97) CCSSCH270J50
 C 8012 (A,112,66) CKSSYB104K10
 C 8013 (A,114,66) CKSSYB104K10

C 8014 (A,116,65) CKSSYB104K10
 C 8016 (B,105,70) CCSSCH120J50
 C 8017 (B,104,70) CCSSCH150J50
 C 8019 (A,111,65) CKSSYB104K10
 C 8023 (B,125,62) CCSSCH470J50

C 8024 (A,111,62) CKSSYB104K10
 C 8025 (A,114,61) CKSSYB104K10
 C 8026 (A,116,63) CKSSYB104K10
 C 8028 (A,130,68) 10 uF CCG1192
 C 8029 (A,129,68) CKSSYB104K10

C 8031 (A,124,71) CKSSYB104K10
 C 8032 (A,124,72) 10 uF CCG1192
 C 8033 (A,130,74) CKSSYB102K50
 C 8034 (A,130,72) CKSSYB102K50
 C 8205 (A,80,115) 10 uF CCG1236

C 8208 (B,50,27) (A) CKSSYB104K10
 C 8501 (A,16,90) (A,B,C) CKSSYB104K10
 C 8503 (B,141,91) CKSSYB104K10
 C 8505 (A,5,90) (A,B,C) CKSSYB104K10
 C 8506 (A,41,107) CKSSYB104K10

C 8507 (A,36,110) CKSSYB104K10
 C 8508 (A,34,107) CKSSYB104K10
 C 8512 (B,43,116) (A) CCSRCH220J50
 C 8517 (A,53,121) (A) CKSRYB104K50
 C 8520 (B,36,116) (A) CCSRCH220J50

C 8521 (B,39,116) (A) CCSRCH220J50
 C 8522 (B,46,116) (A) CCSRCH220J50
 C 8523 (B,35,116) (A) CCSRCH220J50
 C 8524 (B,48,114) (A) CCSRCH220J50
 C 8525 (A,5,119) CCSRCH470J50

C 8601 (A,14,8) CCSSCH100D50
 C 8602 (A,17,6) CKSSYB104K16
 C 8604 (A,26,6) 2.2 uF CCG1218
 C 8606 (A,28,9) CKSSYB104K10
 C 8607 (A,29,14) CKSSYB104K10

C 8608 (A,13,9) 10 uF CCG1192
 C 8801 (B,107,121) CCSRCH331J50
 C 8813 (A,91,74) CKSRYB102K50
 C 8814 (A,95,70) 4.7 uF CCG1201
 C 8815 (A,113,52) CCSSCH9R0D50

C 8816 (A,112,52) CCSSCH9R0D50
 C 8817 (A,110,52) CCSSCH9R0D50
 C 8818 (A,109,52) CCSSCH9R0D50
 C 8819 (A,108,52) CCSSCH9R0D50
 C 8820 (A,106,52) CCSSCH9R0D50

C 8821 (A,105,52) CCSSCH9R0D50

**Unit Number : CWX4717****Unit Name : DVD Core Unit****MISCELLANEOUS**

IC 1002 (B,15,13) Regulator IC MM1886A50P
 IC 1003 (B,40,14) IC S-1200B50-M5
 IC 1004 (B,64,28) IC NJM2855DL1-33
 IC 1251 (A,12,41) IC BA5839FP
 IC 1401 (B,28,40) Flash ROM Unit CWW8811
 IC 1402 (B,46,28) Flash ROM Unit CWW8812
 IC 1480 (A,65,30) RAM IC M12L64164A-5TG2Y
 IC 1501 (A,39,33) IC MN2DS0018MA
 IC 1801 (B,46,10) D/A Converter PCM1753DBQ
 IC 1953 (B,57,17) IC S-1135D12-A6

Q 1101 (B,13,59) Bipolar Transistor LSCR523UB
 Q 1102 (B,14,56) Bipolar Transistor LSCR523UB
 Q 1103 (B,10,62) Transistor 2SB1132
 Q 1104 (B,22,54) Transistor 2SB1132
 L 1501 (A,54,30) Inductor CTF1743

L 1511 (A,48,17) Chip Beads VTL1126
 L 1902 (A,18,17) Inductor CTF1487
 L 1903 (B,64,16) Inductor CTF1558
 L 1904 (A,68,18) Resistor RS1/16SS0R0J
 X 1501 (B,48,18) Crystal Resonator CSS1823

F 1001 (A,14,19) Chip EMI Filter DTF1106
 F 1002 (B,64,18) Chip EMI Filter DTL1106
 S 1 (A,47,55) Lever Switch CSN1090
 S 3 (B,26,13) Lever Switch CSN1089
 VR1101 (A,7,63) Semi-fixed 6.8 kohm(B) CCP1447

VR1102 (A,7,59) Semi-fixed 15 kohm(B) CCP1449
 CN1101 (A,21,63) Connector CKS6631
 CN1952 (A,42,11) Connector CKS6025

RESISTORS

R 1004 (B,12,20) RS1/16SS4702F
 R 1007 (B,12,21) RS1/16SS6801F
 R 1019 (B,34,7) RS1/16SS101J
 R 1025 (B,36,6) RS1/16SS101J
 R 1027 (A,40,18) RS1/16SS101J

R 1101 (B,15,57) RS1/16SS104J
 R 1102 (B,11,56) RS1/16SS104J
 R 1103 (B,14,61) RS1/16SS4300F
 R 1104 (B,11,58) RS1/16SS5100F
 R 1105 (B,17,54) RS1/16SS4300F

R 1106 (B,10,57) RS1/16SS5600F
 R 1109 (B,6,57) RS1/16SS3R3J
 R 1110 (B,16,54) RS1/16SS3R3J
 R 1111 (B,6,63) RS1/10SR3R3J
 R 1112 (B,5,58) RS1/10SR3R3J

R 1113 (B,15,59) RS1/10SR3R9J
 R 1114 (B,19,57) RS1/10SR3R3J
 R 1115 (B,6,61) RS1/10SR2R7J
 R 1116 (B,6,62) RS1/10SR2R7J
 R 1117 (B,18,59) RS1/10SR3R9J

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
R 1118 (B,16,59)	RS1/10SR3R9J	R 1541 (A,26,45)	RS1/16SS221J
R 1223 (A,42,50)	RS1/16SS561J	R 1542 (B,27,34)	RS1/16SS103J
R 1225 (B,29,7)	RS1/16SS471J	R 1546 (A,33,48)	RS1/16SS682J
R 1251 (A,6,48)	RS1/16SS333J	R 1601 (A,32,17)	RS1/16SS123J
R 1252 (A,6,47)	RS1/16SS473J	R 1602 (A,32,18)	RS1/16SS123J
R 1253 (A,6,46)	RS1/16SS333J	R 1603 (B,31,20)	RS1/16SS1002D
R 1254 (A,6,45)	RS1/16SS473J	R 1604 (A,24,21)	RS1/16SS105J
R 1255 (A,22,48)	RS1/16SS183J	R 1605 (A,22,23)	RS1/16SS105J
R 1256 (A,21,45)	RS1/16SS153J	R 1670 (B,40,19)	RS1/16SS1002D
R 1257 (B,8,37)	RS1/16SS221J	R 1671 (B,43,19)	RS1/16SS2402D
R 1258 (A,19,39)	RS1/16SS221J	R 1672 (A,39,18)	RS1/16SS2000D
R 1401 (B,34,28)	RS1/16SS221J	R 1674 (A,38,17)	RS1/16SS3002D
R 1402 (B,35,47)	RS1/16SS104J	R 1801 (B,51,8)	RS1/16SS104J
R 1405 (B,55,35)	RS1/16SS104J	R 1802 (B,53,8)	RS1/16SS104J
R 1406 (B,39,45)	RS1/16SS472J	R 1803 (B,51,14)	RS1/16SS821J
R 1480 (A,73,24)	RAB4CQ560J	R 1804 (B,53,14)	RS1/16SS821J
R 1481 (A,73,28)	RAB4CQ560J	R 1982 (A,10,62)	RS1/16SS822J
R 1482 (A,73,32)	RAB4CQ560J	R 1983 (B,41,19)	RS1/16SS1000D
R 1483 (A,73,35)	RAB4CQ560J	R 1987 (B,43,20)	RS1/16SS0R0J
R 1484 (A,73,39)	RAB4CQ560J	R 1990 (B,35,19)	RS1/16SS2000D
R 1485 (A,55,22)	RAB4CQ560J	R 1991 (B,31,16)	RS1/16SS101J
R 1486 (A,56,27)	RAB4CQ560J	R 1996 (B,36,13)	RS1/16SS2000D
R 1487 (A,56,37)	RAB4CQ560J	R 1997 (B,36,10)	RS1/16SS101J
R 1488 (A,56,40)	RAB4CQ560J	R 2002 (B,43,10)	RS1/16SS2000D
R 1489 (A,54,29)	RS1/16SS560J	R 2003 (B,43,8)	RS1/16SS101J
R 1490 (A,73,21)	RS1/16SS560J	CAPACITORS	
R 1501 (B,49,20)	RS1/16SS122J	C 1001 (B,43,13)	CKSRYB105K10
R 1503 (B,47,20)	RS1/16SS105J	C 1002 (B,13,17)	CKSSYB104K16
R 1504 (A,50,17)	RS1/16SS121J	C 1003 (B,16,18)	CKSSYB104K16
R 1505 (A,46,18)	RS1/16SS101J	C 1004 (B,15,17) 4.7 uF	CCG1201
R 1506 (B,46,15)	RS1/16SS101J	C 1005 (B,41,11)	CKSRYB105K16
R 1507 (B,44,17)	RS1/16SS101J	C 1010 (B,60,23)	CKSQYB225K10
R 1508 (B,43,17)	RS1/16SS221J	C 1011 (B,64,22)	CKSRYB105K10
R 1509 (A,21,34)	RS1/16SS102J	C 1015 (A,26,7)	CKSSYB102K50
R 1510 (A,11,29)	RS1/16SS102J	C 1016 (B,64,15)	CKSSYB102K50
R 1512 (A,55,31)	RS1/16SS470J	C 1018 (B,14,21)	CKSSYB104K10
R 1513 (A,23,38)	RS1/16SS203J	C 1040 (B,59,12)	CCSRCH821J50
R 1514 (A,25,40)	RS1/16SS183J	C 1041 (B,19,12)	CCSRCH271J50
R 1516 (A,25,36)	RS1/16SS104J	C 1101 (B,15,53) 10 uF	CCG1192
R 1517 (B,58,22)	RS1/16SS103J	C 1104 (B,8,57)	CKSSYB104K10
R 1518 (B,34,31)	RS1/16SS103J	C 1105 (B,18,54)	CKSSYB104K10
R 1519 (A,25,43)	RS1/16SS102J	C 1106 (B,8,66)	CKSSYB103K16
R 1522 (A,21,37)	RS1/16SS104J	C 1107 (B,26,53)	CKSSYB103K16
R 1523 (A,23,37)	RS1/16SS221J	C 1108 (A,20,56)	CKSSYB103K16
R 1524 (B,29,33)	RS1/16SS472J	C 1109 (A,7,57)	CKSRYB224K16
R 1525 (A,25,44)	RS1/16SS103J	C 1110 (A,18,58)	CKSSYB103K16
R 1526 (A,23,40)	RS1/16SS103J	C 1111 (A,9,66)	CKSRYB224K16
R 1527 (A,35,48)	RS1/16SS682J	C 1112 (B,17,52) 22 uF	DCH1256
R 1528 (B,20,33)	RS1/16SS103J	C 1113 (B,9,58) 22 uF	DCH1256
R 1529 (B,35,21)	RS1/16SS103J	C 1210 (B,77,33)	CKSSYB104K16
R 1530 (B,18,33)	RS1/16SS103J	C 1251 (B,13,41)	CEVW101M16
R 1531 (B,34,30)	RS1/16SS103J	C 1252 (B,8,41) 4.7 uF	CCG1222
R 1533 (A,29,48)	RS1/16SS104J	C 1253 (B,8,39)	CKSSYB104K16
R 1534 (B,29,48)	RS1/16SS221J	C 1254 (A,6,37)	CKSSYB104K16
R 1535 (A,22,44)	RS1/16SS104J	C 1255 (A,19,37)	CKSSYB104K16
R 1536 (B,32,48)	RS1/16SS104J	C 1401 (B,34,27)	CKSSYB104K16
R 1537 (A,25,46)	RS1/16SS104J	C 1403 (B,39,40)	CKSSYB104K10
R 1538 (A,56,35)	RS1/16SS104J	C 1408 (B,58,27)	CKSSYB104K10
R 1539 (B,34,48)	RS1/16SS104J		
R 1540 (A,26,46)	RS1/16SS221J		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 1410 (B,34,29) CKSSYB104K16
 C 1480 (A,71,19) CKSSYB104K10
 C 1481 (A,73,22) CKSSYB104K10

C 1673 (A,37,17) CKSSYB104K10
 C 1674 (B,42,20) CKSSYB104K10
 C 1676 (B,38,20) CKSRYB105K10

A

C 1482 (A,72,26) CKSSYB104K10
 C 1484 (A,73,30) CKSSYB104K10
 C 1485 (A,73,41) CKSSYB104K10
 C 1487 (A,58,29) CKSSYB104K10
 C 1488 (A,57,25) CKSSYB104K10

C 1801 (B,51,10) 4.7 uF CCG1201
 C 1802 (B,53,10) 4.7 uF CCG1201
 C 1803 (B,50,12) CCSRCH182J50
 C 1804 (B,53,12) CCSRCH182J50
 C 1805 (B,47,14) CKSSYB104K10

C 1489 (A,65,17) 10 uF CCG1192
 C 1490 (A,66,18) CKSSYB102K50
 C 1501 (B,62,20) 10 uF CCG1192
 C 1502 (B,55,19) 10 uF CCG1192
 C 1503 (A,54,33) CKSSYB104K10

C 1806 (B,56,8) 10 uF CCG1192
 C 1809 (B,40,17) CKSSYB102K50
 C 1953 (B,60,17) CKSRYB105K10
 C 1954 (B,55,17) CKSRYB105K10
 C 1955 (B,77,40) CKSSYB104K16

B

C 1504 (A,54,24) CKSSYB104K10
 C 1505 (A,54,27) CKSSYB104K10
 C 1506 (B,53,34) CKSSYB104K10
 C 1507 (A,54,36) CKSSYB104K10
 C 1508 (A,54,38) CKSSYB104K10

C 1962 (B,40,20) CKSRYB105K10

D**Unit Number : CWN9904****Unit Name : SOC Single Core Unit****MISCELLANEOUS**

C 1509 (A,54,42) CKSSYB104K10
 C 1510 (B,51,18) CCSSCH120J50
 C 1511 (A,49,18) CKSSYB104K10
 C 1512 (B,46,18) CCSSCH120J50
 C 1513 (A,48,47) CKSSYB104K10

IC 4001 (A,43,43) IC MCIMX6S6AVM08AC
 IC 4301 (A,54,72) RAM IC H5TQ4G63CFR-RDC
 IC 4302 (A,35,72) RAM IC H5TQ4G63CFR-RDC
 IC 4401 (A,10,60) IC CWJ2605
 IC 4402 (B,21,65) IC PE1038A

C

C 1514 (B,45,20) CKSSYB104K10
 C 1515 (A,44,19) CKSSYB104K10
 C 1516 (A,44,47) CKSSYB104K10
 C 1517 (A,42,47) CKSSYB104K10
 C 1518 (A,38,47) CKSSYB104K10

IC 4403 (B,24,56) IC TC7WU04FU
 IC 4501 (B,11,39) IC AK8814VQ
 IC 4701 (B,69,62) IC LTC3612EUDC
 IC 4721 (B,68,35) IC LTC3612EUDC
 IC 4741 (B,68,50) IC LTC3612EUDC

■

C 1519 (A,34,47) CKSSYB104K10
 C 1520 (A,27,47) CKSSYB104K10
 C 1521 (A,25,33) CKSSYB104K10
 C 1522 (A,25,38) CKSSYB104K10
 C 1523 (A,20,45) CKSSYB104K10

IC 4766 (A,30,17) Regulator IC MM3479A30P
 IC 4791 (A,47,23) IC TC7SH08FUS1
 IC 4792 (A,47,18) IC PST8429N
 IC 4793 (A,45,15) IC TC7SH08FUS1
 IC 4794 (A,42,20) IC TC7SH08FUS1

D

C 1524 (A,21,48) CKSSYB473K16
 C 1526 (A,25,37) CKSSYB103K16
 C 1528 (B,30,48) CCSSCH471J50
 C 1601 (A,32,19) CKSSYB103K16
 C 1602 (A,34,17) CCSSCH101J50

IC 4796 (A,23,59) Regulator IC MM3479A12P
 IC 4901 (A,68,26) IC 337S3959
 IC 4903 (A,29,25) IC TC7WBL3306CFK
 Q 4776 (A,63,23) Chip Transistor 2SB1689
 Q 4777 (A,62,29) Resistor Built-IN TR LTC044EEB

■

C 1603 (A,34,18) CCSSCH101J50
 C 1604 (A,30,17) CCSSCH680J50
 C 1605 (A,30,18) CCSSCH680J50
 C 1606 (A,35,19) CKSSYB104K10
 C 1607 (A,20,24) 10 uF CCG1192

Q 4778 (A,27,23) Resistor Built-IN TR LTC044EEB
 L 4501 (B,6,49) Inductor LCYA2R7J2016
 L 4502 (B,8,30) Inductor LCYA2R7J2016
 L 4701 (A,70,59) SMD SPL Inductor CTH1500
 L 4721 (A,64,34) SMD SPL Inductor CTH1499

E

C 1608 (A,28,18) 4.7 uF CCG1201
 C 1609 (A,26,22) CKSSYB104K10
 C 1612 (A,24,24) CKSSYB104K10
 C 1613 (A,25,25) CKSSYB104K10
 C 1614 (A,23,24) CKSSYB104K10

L 4741 (A,69,47) SMD SPL Inductor CTH1499
 L 4901 (B,57,42) Ferrite Bead CTF1528
 L 4909 (A,56,38) Inductor CTF1787
 L 5001 (A,71,22) Inductor CTF1868
 L 5002 (A,67,19) Inductor CTF1870

■

C 1615 (A,23,26) CKSSYB104K10
 C 1616 (A,25,27) CKSSYB104K10
 C 1617 (B,27,28) CKSSYB104K10
 C 1618 (A,23,29) CCSSCH101J50
 C 1619 (A,23,30) CKSSYB562K25

TH4381 (A,25,72) Thermistor CCX1084
 X 4001 (A,49,28) Resonator 24 MHz CSS1773
 X 4002 (A,44,28) Resonator 32.768 kHz CSS1807
 X 4401 (B,30,55) Crystal Resonator 14.745 6 MHz CSS1835
 X 4901 (B,60,43) VCXO 11.289 6MHz CWX4566

F

C 1620 (B,27,30) CKSSYB224K6R3
 C 1621 (A,23,31) CKSSYB224K6R3
 C 1622 (A,25,31) CKSSYB333K16
 C 1623 (A,27,20) CKSRYB105K10
 C 1624 (A,25,32) CKSSYB104K10

CN5001 (B,57,20) B TO B Connector CKS6499
 CN5002 (B,20,20) B TO B Connector CKS6556

C 1625 (A,25,29) CKSSYB104K10
 C 1671 (A,42,19) CKSSYB104K10

RESISTORS

AVH-4200NEX/XNUC

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4001	(A,27,54)	RAB4CQ470J		R 4226	(A,24,41)	RS1/16SS103J	A
R 4002	(A,27,51)	RAB4CQ470J		R 4228	(A,22,41)	RS1/16SS103J	
R 4003	(A,27,48)	RAB4CQ470J		R 4230	(A,20,39)	RS1/16SS222J	
R 4004	(A,27,46)	RAB4CQ470J		R 4232	(A,20,39)	RS1/16SS222J	
R 4005	(A,27,43)	RAB4CQ470J		R 4236	(B,24,39)	RS1/16SS103J	
R 4006	(A,27,41)	RS1/16SS470J		R 4237	(B,22,44)	RS1/16SS103J	
R 4007	(A,50,31)	RS1/16SS470J		R 4238	(A,56,40)	RS1/16SS0R0J	
R 4008	(A,4,23)	RS1/16SS0R0J		R 4242	(A,4,25)	RS1/16SS101J	
R 4009	(A,34,59)	RS1/16SS0R0J		R 4244	(A,20,41)	RS1/16SS103J	
R 4011	(A,24,46)	RS1/16SS103J		R 4260	(B,51,13)	RS1/16SS103J	
R 4012	(A,25,52)	RS1/16SS103J		R 4261	(B,53,13)	RS1/16SS103J	B
R 4015	(A,45,31)	RS1/16SS102J		R 4262	(B,62,9)	RS1/16SS103J	
R 4017	(A,24,55)	RS1/16SS103J		R 4263	(B,24,30)	RS1/16SS103J	
R 4018	(B,50,41)	RS1/16SS0R0J		R 4264	(B,12,27)	RS1/16SS103J	
R 4022	(B,18,43)	RS1/16SS330J		R 4265	(A,13,19)	RS1/16SS103J	
R 4029	(B,64,11)	RS1/16SS472J		R 4266	(A,14,19)	RS1/16SS103J	
R 4054	(A,24,52)	RS1/16SS103J		R 4268	(B,23,30)	RS1/16SS103J	
R 4055	(A,24,41)	RS1/16SS103J		R 4270	(B,50,32)	RS1/16SS103J	
R 4056	(A,25,41)	RS1/16SS103J		R 4271	(B,50,31)	RS1/16SS103J	
R 4057	(A,23,44)	RS1/16SS103J		R 4272	(A,27,40)	RS1/16SS470J	
R 4058	(A,24,44)	RS1/16SS103J		R 4273	(A,38,56)	RS1/16SS2400F	C
R 4059	(A,24,44)	RS1/16SS103J		R 4274	(B,56,55)	RS1/16SS1001D	
R 4060	(A,25,44)	RS1/16SS103J		R 4275	(B,54,55)	RS1/16SS1001D	
R 4063	(A,23,49)	RS1/16SS103J		R 4276	(B,33,10)	RS1/16SS103J	
R 4064	(A,24,49)	RS1/16SS103J		R 4277	(B,54,47)	RS1/16SS103J	
R 4066	(A,25,49)	RS1/16SS103J		R 4278	(B,63,29)	RS1/16SS103J	
R 4067	(A,23,52)	RS1/16SS103J		R 4279	(B,24,11)	RS1/16SS103J	
R 4068	(A,24,52)	RS1/16SS103J		R 4280	(B,30,30)	RS1/16SS103J	
R 4070	(A,23,55)	RS1/16SS103J		R 4281	(B,32,11)	RS1/16SS103J	
R 4073	(A,24,46)	RS1/16SS103J		R 4282	(B,26,10)	RS1/16SS103J	
R 4074	(A,25,46)	RS1/16SS103J		R 4283	(B,29,30)	RS1/16SS103J	D
R 4081	(A,4,35)	RS1/10SR0R0J		R 4284	(B,46,11)	RS1/16SS103J	
R 4084	(A,4,29)	RS1/16SS102J		R 4285	(B,60,13)	RS1/16SS103J	
R 4091	(A,47,28)	RS1/16SS225J		R 4286	(A,43,56)	RS1/16SS0R0J	
R 4095	(A,43,24)	RS1/16SS0R0J		R 4287	(A,42,56)	RS1/16SS0R0J	
R 4100	(B,20,42)	RS1/16SS470J		R 4288	(B,65,27)	RS1/16SS103J	
R 4101	(B,53,41)	RS1/16SS0R0J		R 4289	(B,41,7)	RS1/16SS103J	
R 4103	(B,13,68)	RS1/16SS220J		R 4290	(B,51,43)	RS1/16SS0R0J	
R 4105	(A,25,55)	RS1/16SS103J		R 4291	(A,41,56)	RS1/16SS0R0J	
R 4111	(B,15,65)	RS1/16SS472J		R 4292	(A,40,56)	RS1/16SS0R0J	
R 4141	(B,57,83)	RS1/16SS103J		R 4293	(B,44,10)	RS1/16SS104J	E
R 4151	(A,28,28)	RS1/16SS0R0J		R 4295	(B,26,13)	RS1/16SS103J	
R 4154	(B,66,27)	RS1/16SS0R0J		R 4296	(B,64,9)	RS1/16SS222J	
R 4155	(B,67,27)	RS1/16SS0R0J		R 4297	(B,63,9)	RS1/16SS103J	
R 4157	(A,30,28)	RS1/16SS0R0J		R 4300	(B,24,13)	RS1/16SS103J	
R 4158	(B,30,38)	RAB4CQ471J		R 4302	(B,46,10)	RS1/16SS104J	
R 4159	(B,30,41)	RAB4CQ471J		R 4303	(A,21,52)	RS1/16SS101J	
R 4160	(B,31,43)	RAB4CQ471J		R 4307	(B,54,73)	RS1/16SS1200D	
R 4162	(B,31,46)	RAB4CQ471J		R 4308	(B,35,73)	RS1/16SS1200D	
R 4163	(A,30,40)	RS1/16SS470J		R 4309	(B,51,73)	RS1/16SS2400F	
R 4164	(B,20,43)	RS1/16SS470J		R 4310	(B,32,73)	RS1/16SS2400F	
R 4165	(A,29,40)	RS1/16SS470J		R 4314	(B,57,82)	RS1/16SS102J	
R 4171	(A,22,39)	RS1/16SS0R0J		R 4315	(B,39,82)	RS1/16SS102J	
R 4186	(A,26,39)	RS1/16SS101J		R 4317	(B,19,4)	RS1/16SS0R0J	
R 4209	(A,24,55)	RS1/16SS103J		R 4381	(A,25,73)	RS1/16SS1802D	
R 4213	(A,24,49)	RS1/16SS103J		R 4401	(A,7,47)	RS1/16SS102J	F
R 4216	(A,23,46)	RS1/16SS103J		R 4402	(A,11,72)	RS1/16SS0R0J	
R 4220	(A,21,41)	RS1/16SS103J		R 4403	(A,10,48)	RS1/16SS0R0J	
R 4222	(A,23,41)	RS1/16SS103J		R 4404	(B,28,57)	RS1/16SS102J	
R 4224	(A,21,39)	RS1/16SS103J		R 4405	(B,28,55)	RS1/16SS105J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 4407	(B,15,63)	RS1/16SS471J	R 4540	(B,6,68)	RS1/16SS220J
	R 4411	(B,20,57)	RS1/16SS220J	R 4543	(A,14,33)	RS1/16SS101J
	R 4412	(B,24,58)	RS1/16SS102J	R 4544	(A,13,33)	RS1/16SS101J
	R 4413	(A,15,72)	RS1/16SS0R0J	R 4545	(A,12,33)	RS1/16SS101J
	R 4415	(A,26,62)	RS1/16SS0R0J	R 4546	(A,11,33)	RS1/16SS101J
■	R 4416	(A,17,57)	RS1/16SS0R0J	R 4547	(A,8,37)	RS1/16SS101J
	R 4417	(A,16,73)	RS1/16SS472J	R 4548	(A,8,36)	RS1/16SS101J
	R 4418	(A,16,74)	RS1/16SS472J	R 4549	(A,8,36)	RS1/16SS101J
	R 4419	(A,16,75)	RS1/16SS472J	R 4550	(A,8,35)	RS1/16SS101J
	R 4420	(A,20,67)	RS1/16SS101J	R 4702	(A,74,64)	RS1/8SQ0R0J
B	R 4421	(A,21,63)	RS1/16SS101J	R 4704	(A,65,60)	RS1/8SQ0R0J
	R 4445	(B,18,46)	RAB4CQ101J	R 4705	(B,69,59)	RS1/16SS220J
	R 4446	(B,18,49)	RAB4CQ101J	R 4706	(B,65,59)	RS1/16SS105J
	R 4447	(B,13,70)	RS1/16SS103J	R 4707	(B,64,59)	RS1/16SS105J
	R 4448	(A,24,69)	RS1/16SS0R0J	R 4708	(B,64,61)	RS1/16SS2201D
■	R 4449	(B,6,69)	RS1/16SS0R0J	R 4709	(B,67,65)	RS1/16SS0R0J
	R 4450	(B,5,66)	RS1/16SS330J	R 4710	(B,64,63)	RS1/16SS1003D
	R 4451	(B,15,64)	RS1/16SS0R0J	R 4711	(B,65,63)	RS1/16SS183J
	R 4452	(B,13,64)	RS1/16SS561J	R 4713	(B,67,66)	RS1/16SS1002D
	R 4453	(B,5,63)	RS1/16SS561J	R 4714	(B,65,66)	RS1/16SS1503D
C	R 4454	(B,5,65)	RS1/16SS561J	R 4715	(B,65,62)	RS1/16SS1503D
	R 4455	(B,13,57)	RS1/16SS220J	R 4716	(A,64,62)	RS1/16SS0R0J
	R 4456	(B,5,55)	RS1/16SS220J	R 4717	(B,67,59)	RS1/16SS0R0J
	R 4457	(B,11,51)	RS1/16SS220J	R 4721	(A,66,39)	RS1/8SQ0R0J
	R 4458	(B,12,51)	RS1/16SS220J	R 4722	(A,70,30)	RS1/8SQ0R0J
■	R 4459	(B,14,55)	RS1/16SS220J	R 4723	(A,64,39)	RS1/8SQ0R0J
	R 4460	(B,14,54)	RS1/16SS220J	R 4724	(B,64,35)	RS1/16SS220J
	R 4461	(B,14,52)	RS1/16SS220J	R 4725	(B,65,39)	RS1/16SS105J
	R 4462	(B,13,52)	RS1/16SS220J	R 4726	(B,65,41)	RS1/16SS105J
	R 4463	(B,27,49)	RS1/16SS0R0J	R 4727	(B,66,40)	RS1/16SS2702D
D	R 4464	(B,27,48)	RS1/16SS0R0J	R 4728	(B,71,37)	RS1/16SS105J
	R 4465	(B,27,48)	RS1/16SS0R0J	R 4729	(B,70,41)	RS1/16SS1503D
	R 4466	(B,27,47)	RS1/16SS0R0J	R 4730	(B,72,37)	RS1/16SS1002D
	R 4467	(B,26,46)	RS1/16SS0R0J	R 4731	(B,72,39)	RS1/16SS1503D
	R 4468	(B,26,45)	RS1/16SS0R0J	R 4732	(B,67,39)	RS1/16SS1203D
■	R 4469	(B,26,44)	RS1/16SS0R0J	R 4733	(A,68,40)	RS1/16SS0R0J
	R 4470	(B,26,43)	RS1/16SS0R0J	R 4734	(B,69,39)	RS1/16SS223J
	R 4473	(B,24,70)	RS1/16SS0R0J	R 4735	(A,71,40)	RS1/10SR102J
	R 4474	(B,22,70)	RS1/16SS0R0J	R 4736	(B,64,37)	RS1/16SS0R0J
	R 4475	(B,28,62)	RS1/16SS0R0J	R 4737	(B,68,40)	RS1/16SS4703D
E	R 4476	(B,28,61)	RS1/16SS0R0J	R 4738	(B,62,27)	RS1/16SS103J
	R 4477	(B,20,70)	RS1/16SS0R0J	R 4739	(B,70,44)	RS1/16SS0R0J
	R 4479	(B,17,70)	RS1/16SS181J	R 4741	(A,63,49)	RS1/8SQ0R0J
	R 4480	(B,21,72)	RS1/16SS0R0J	R 4742	(A,72,52)	RS1/8SQ0R0J
	R 4481	(B,16,62)	RS1/16SS0R0J	R 4743	(A,63,47)	RS1/8SQ0R0J
■	R 4482	(B,16,64)	RS1/16SS472J	R 4744	(B,68,46)	RS1/16SS220J
	R 4502	(B,16,42)	RS1/16SS103J	R 4745	(B,63,47)	RS1/16SS105J
	R 4503	(B,22,34)	RS1/16SS101J	R 4746	(B,62,47)	RS1/16SS105J
	R 4504	(B,21,34)	RS1/16SS101J	R 4747	(B,62,48)	RS1/16SS2702D
	R 4505	(B,17,41)	RS1/16SS103J	R 4749	(B,61,52)	RS1/16SS1503D
F	R 4507	(B,17,39)	RS1/16SS221J	R 4750	(B,66,54)	RS1/16SS1002D
	R 4508	(B,17,37)	RS1/16SS221J	R 4751	(B,64,54)	RS1/16SS1503D
	R 4510	(B,11,32)	RS1/16SS6801D	R 4752	(B,64,49)	RS1/16SS1203D
	R 4511	(B,20,40)	RS1/16SS101J	R 4753	(A,63,51)	RS1/16SS0R0J
	R 4512	(B,5,42)	RS1/16SS103J	R 4754	(B,64,51)	RS1/16SS223J
■	R 4513	(B,16,34)	RS1/10SR0R0J	R 4755	(A,62,53)	RS1/10SR102J
	R 4514	(B,16,30)	RS1/10SR0R0J	R 4756	(B,65,47)	RS1/16SS0R0J
	R 4515	(B,16,33)	RS1/10SR0R0J	R 4757	(B,62,50)	RS1/16SS4703D
	R 4525	(B,5,67)	RS1/16SS0R0J	R 4758	(B,71,39)	RS1/16SS0R0J
	R 4529	(B,5,46)	RS1/16SS0R0J	R 4759	(B,60,52)	RS1/16SS0R0J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4767	(A,37,17)	RS1/10SR0R0J		R 5015	(B,44,13)	RS1/16SS0R0J	
R 4768	(B,36,10)	RS1/10SR0R0J		R 5016	(B,45,13)	RS1/16SS0R0J	
R 4769	(A,25,16)	RS1/16SS0R0J		R 5017	(A,41,31)	RS1/16SS0R0J	A
R 4772	(A,40,12)	RS1/16SS103J		R 5020	(B,23,13)	RS1/16SS560J	
R 4773	(A,32,6)	RS1/10SR0R0J		R 5021	(B,23,28)	RS1/16SS0R0J	
R 4775	(A,39,13)	RS1/16SS0R0J		R 5022	(B,24,28)	RS1/16SS0R0J	
R 4776	(A,63,27)	RS1/10SR332J		R 5023	(B,24,28)	RS1/16SS101J	
R 4777	(A,63,26)	RS1/10SR332J		R 5024	(B,24,30)	RS1/16SS121J	
R 4778	(A,26,18)	RS1/16SS103J		R 5025	(B,26,28)	RS1/16SS121J	
R 4779	(A,27,27)	RS1/16SS103J		R 5026	(B,63,13)	RS1/16SS121J	
R 4780	(A,27,26)	RS1/16SS101J		R 5027	(B,62,13)	RS1/16SS680J	
R 4790	(A,50,23)	RS1/16SS101J		R 5028	(B,64,13)	RS1/16SS121J	
R 4791	(A,46,25)	RS1/16SS101J		R 5029	(A,16,46)	RS1/16SS102J	
R 4792	(A,49,17)	RS1/16SS0R0J		R 5030	(A,17,52)	RS1/16SS102J	B
R 4793	(A,41,16)	RS1/16SS0R0J		R 5031	(A,16,46)	RS1/16SS102J	
R 4794	(A,49,15)	RS1/16SS103J		R 5032	(B,15,13)	RS1/16SS560J	
R 4795	(A,46,21)	RS1/16SS683J		R 5033	(B,17,13)	RS1/16SS221J	
R 4798	(A,42,17)	RS1/16SS104J		R 5034	(B,59,13)	RS1/16SS681J	
R 4799	(A,44,21)	RS1/16SS0R0J		R 5036	(B,48,13)	RS1/16SS101J	
R 4800	(A,44,20)	RS1/16SS0R0J		R 5037	(B,13,27)	RS1/16SS101J	
R 4801	(A,43,13)	RS1/16SS0R0J		R 5040	(A,10,21)	RS1/16SS0R0J	
R 4802	(A,43,23)	RS1/16SS0R0J		R 5041	(A,11,21)	RS1/16SS681J	
R 4803	(A,51,25)	RS1/16SS101J		R 5042	(A,9,21)	RS1/16SS471J	
R 4804	(A,50,24)	RS1/16SS103J		R 5043	(A,8,21)	RS1/16SS0R0J	
R 4805	(A,44,25)	RS1/16SS103J		R 5044	(A,7,21)	RS1/16SS471J	C
R 4845	(A,65,59)	RS1/8SQ0R0J		R 5045	(A,65,20)	RS1/16SS0R0J	
R 4901	(A,39,31)	RS1/16SS103J		R 5046	(B,55,13)	RS1/16SS0R0J	
R 4902	(A,71,26)	RS1/16SS222J		R 5047	(B,57,13)	RS1/16SS680J	
R 4903	(A,37,31)	RS1/16SS470J		R 5048	(B,52,46)	RS1/16SS331J	
R 4904	(A,65,28)	RS1/16SS222J		R 5049	(B,54,46)	RS1/16SS331J	
R 4905	(A,65,27)	RS1/16SS221J		R 5053	(B,8,27)	RS1/16SS560J	
R 4906	(A,65,26)	RS1/16SS103J		R 5054	(B,7,27)	RS1/16SS560J	
R 4907	(A,65,24)	RS1/16SS0R0J		R 5055	(B,11,27)	RS1/16SS560J	
R 4911	(A,56,37)	RS1/16SS151J		R 5056	(B,10,27)	RS1/16SS560J	
R 4912	(B,62,41)	RS1/16SS0R0J		R 5057	(B,9,27)	RS1/16SS560J	
R 4913	(B,60,41)	RS1/16SS0R0J		R 5059	(B,31,13)	RS1/16SS560J	D
R 4914	(A,36,31)	RS1/16SS470J		R 5060	(B,32,13)	RS1/16SS560J	
R 4915	(A,40,24)	RS1/16SS0R0J		R 5061	(B,28,13)	RS1/16SS560J	
R 4916	(B,35,6)	RS1/16SS0R0J		R 5062	(B,29,13)	RS1/16SS560J	
R 4918	(A,32,25)	RS1/16SS0R0J		R 5063	(B,25,11)	RS1/16SS0R0J	
R 4934	(B,32,49)	RS1/16SS0R0J		R 5064	(B,32,13)	RS1/16SS0R0J	
R 4937	(A,24,12)	RS1/16SS103J		R 5065	(B,30,13)	RS1/16SS560J	
R 4938	(A,23,12)	RS1/16SS103J		R 5090	(B,57,27)	RS1/16SS0R0J	
R 4939	(A,22,12)	RS1/16SS103J		R 5099	(B,17,28)	RS1/16SS0R0J	
R 4941	(B,54,40)	RS1/16SS431J		R 5100	(B,53,47)	RS1/16SS331J	
R 4942	(B,53,44)	RS1/16SS102J		R 5101	(A,55,43)	RS1/16SS680J	E
R 4945	(B,24,37)	RS1/16SS103J		R 5102	(A,18,50)	RS1/16SS680J	
R 4946	(A,27,12)	RS1/16SS102J		R 5103	(B,21,28)	RS1/16SS560J	
R 4949	(A,22,31)	RS1/16SS683J		R 5104	(A,20,48)	RS1/16SS680J	
R 4954	(A,27,21)	RS1/16SS0R0J		R 5105	(A,20,49)	RS1/16SS680J	
R 4955	(A,29,22)	RS1/16SS0R0J		R 5106	(A,19,50)	RS1/16SS680J	
R 5003	(B,63,27)	RS1/16SS0R0J		R 5107	(B,19,10)	RS1/16SS101J	
R 5004	(B,64,27)	RS1/16SS0R0J		R 5114	(B,27,28)	RS1/16SS101J	
R 5006	(B,22,13)	RS1/16SS0R0J		R 5115	(B,27,30)	RS1/16SS101J	
R 5007	(B,14,13)	RS1/16SS471J		R 5116	(B,30,28)	RS1/16SS0R0J	
R 5008	(B,27,13)	RS1/16SS151J		R 5117	(B,30,28)	RS1/16SS0R0J	F
R 5009	(B,12,13)	RS1/16SS471J		R 5119	(B,24,13)	RS1/16SS101J	
R 5012	(B,42,13)	RS1/16SS0R0J		R 5121	(B,34,28)	RS1/10SR0R0J	
R 5013	(B,43,13)	RS1/16SS0R0J		R 5122	(B,34,29)	RS1/10SR0R0J	
R 5014	(B,44,13)	RS1/16SS0R0J		R 5125	(A,65,22)	RS1/16SS222J	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 5126	(A,65,21)	RS1/16SS222J	C 4026	(B,49,38)	CKSSYB104K10
	R 5127	(B,62,11)	RS1/16SS182J	C 4027	(B,49,40)	CKSSYB104K10
	R 5128	(B,63,11)	RS1/16SS182J	C 4029	(B,40,41)	CKSSYB104K10
	R 5129	(B,21,11)	RS1/16SS101J	C 4030	(B,47,42) 1 uF	DCH1246
	R 5130	(B,36,31)	RS1/16SS103J	C 4031	(B,40,45)	CKSSYB104K10
■	R 5131	(B,37,28)	RS1/16SS103J	C 4034	(B,48,43)	CKSSYB104K10
	R 5132	(A,10,19)	RS1/16SS0R0J	C 4037	(B,40,38)	CKSSYB104K10
	R 5315	(A,16,82)	RS1/16SS0R0J	C 4038	(B,39,43) 1 uF	DCH1246
	R 5316	(A,16,83)	RS1/16SS0R0J	C 4039	(B,36,46)	CKSSYB104K10
	R 5317	(A,16,84)	RS1/16SS0R0J	C 4040	(B,44,46)	CKSSYB104K10
B	R 5318	(A,16,85)	RS1/16SS0R0J	C 4041	(B,36,44)	CKSSYB104K10
	R 5326	(A,64,84)	RS1/16SS0R0J	C 4042	(B,48,46)	CKSSYB104K10
	R 5327	(A,64,84)	RS1/16SS0R0J	C 4043	(B,46,46)	CKSSYB104K10
	R 5328	(A,64,83)	RS1/16SS0R0J	C 4044	(B,40,46)	CKSSYB104K10
	R 5329	(A,64,82)	RS1/16SS0R0J	C 4045	(B,39,47)	CKSSYB104K10
■	R 5351	(A,4,15)	RS1/16SS0R0J	C 4047	(B,49,48)	CKSSYB104K10
	R 5352	(A,5,15)	RS1/16SS0R0J	C 4048	(B,44,48)	CKSSYB104K10
	R 5353	(A,6,15)	RS1/16SS0R0J	C 4050	(B,41,48)	CKSSYB104K10
	R 5354	(A,7,15)	RS1/16SS0R0J	C 4051	(B,44,42) 22 uF	DCH1256
	R 5355	(A,8,15)	RS1/16SS0R0J	C 4052	(B,43,46) 22 uF	CCG1254
C	R 5356	(A,9,15)	RS1/16SS0R0J	C 4053	(B,36,36) 22 uF	CCG1254
	R 5357	(A,10,15)	RS1/16SS0R0J	C 4054	(B,52,33) 10 uF	CCG1192
	R 5358	(A,11,15)	RS1/16SS0R0J	C 4055	(B,50,35)	CKSSYB104K10
	R 5359	(A,11,15)	RS1/16SS0R0J	C 4056	(A,36,14) 10 uF	CCG1192
	R 5360	(A,12,15)	RS1/16SS0R0J	C 4057	(B,35,49) 10 uF	CCG1192
■	R 5361	(A,13,15)	RS1/16SS0R0J	C 4058	(B,38,46)	CKSSYB104K10
	R 5362	(A,14,15)	RS1/16SS0R0J	C 4059	(B,47,48)	CKSSYB104K10
	R 5376	(A,59,15)	RS1/16SS0R0J	C 4062	(B,56,54)	CKSSYB104K10
	R 5377	(A,58,15)	RS1/16SS0R0J	C 4063	(B,54,54)	CKSSYB104K10
	R 5378	(A,57,15)	RS1/16SS0R0J	C 4064	(B,44,36) 10 uF	CCG1192
■	R 5379	(A,56,15)	RS1/16SS0R0J	C 4065	(B,37,39)	CKSSYB104K10
				C 4066	(B,48,40)	CKSSYB104K10
				C 4067	(B,48,38)	CKSSYB104K10
				C 4068	(B,40,39)	CKSSYB104K10
				C 4069	(B,41,42) 1 uF	DCH1246

CAPACITORS

D	C 4001	(A,51,28)	CCSSCJ3R0C50	C 4070	(B,45,37)	CKSSYB104K10
	C 4002	(A,47,30)	CCSSCH4R0C50	C 4071	(B,46,34)	CKSSYB104K10
	C 4003	(A,43,30)	CCSSCH180J50	C 4072	(B,39,32) 10 uF	CCG1192
	C 4004	(A,43,28)	CCSSCH8R0D50	C 4073	(B,44,31) 10 uF	CCG1192
	C 4005	(B,52,36) 10 uF	CCG1192	C 4075	(B,41,36)	CKSSYB104K10
■	C 4006	(B,50,37)	CKSSYB104K10	C 4076	(B,35,41) 10 uF	CCG1192
	C 4007	(B,52,38) 2.2 uF	CCG1218	C 4077	(B,53,49) 10 uF	CCG1192
	C 4008	(B,50,38)	CKSSYB104K10	C 4078	(B,48,36)	CKSSYB104K10
	C 4009	(B,40,36)	CKSSYB104K10	C 4079	(A,43,25)	CCSSCH101J50
	C 4010	(B,34,31) 10 uF	CCG1192	C 4080	(B,52,51)	CKSSYB104K10
E	C 4011	(B,38,36)	CKSSYB104K10	C 4087	(B,43,38) 22 uF	DCH1256
	C 4012	(B,37,36)	CKSSYB104K10	C 4301	(B,59,66)	CKSSYB104K10
	C 4013	(B,44,33) 10 uF	CCG1192	C 4302	(A,59,66)	CKSSYB104K10
	C 4014	(B,45,34)	CKSSYB104K10	C 4303	(B,51,63)	CKSSYB104K10
	C 4015	(B,45,38)	CKSSYB104K10	C 4304	(B,51,65)	CKSSYB104K10
■	C 4016	(B,46,40)	CKSSYB104K10	C 4305	(B,50,67)	CKSSYB104K10
	C 4017	(B,46,43)	CKSSYB104K10	C 4306	(A,49,67)	CKSSYB104K10
	C 4018	(B,46,44)	CKSSYB104K10	C 4307	(A,49,69)	CKSSYB104K10
	C 4019	(B,44,39)	CKSSYB104K10	C 4308	(A,49,71)	CKSSYB104K10
	C 4020	(B,42,41)	CKSSYB104K10	C 4309	(B,52,67) 4.7 uF	CCG1201
F	C 4021	(B,42,42)	CKSSYB104K10	C 4310	(B,52,70)	CKSSYB104K10
	C 4022	(B,42,43)	CKSSYB104K10	C 4311	(A,59,68)	CKSSYB104K10
	C 4023	(B,38,38)	CKSSYB104K10	C 4312	(B,58,70)	CKSSYB104K10
	C 4024	(B,37,41)	CKSSYB104K10	C 4313	(B,56,71)	CKSSYB104K10
	C 4025	(B,38,44)	CKSSYB104K10	C 4314	(A,59,75)	CKSSYB104K10

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 4315	(A,59,77)	CKSSYB104K10		C 4416	(A,20,67)	CKSSYB103K16	
C 4316	(B,59,77)	CKSSYB104K10		C 4417	(A,19,63)	CKSSYB103K16	
C 4317	(B,58,77) 4.7 uF	CCG1201		C 4418	(A,17,63)	CKSSYB103K16	
C 4318	(A,49,75)	CKSSYB104K10		C 4419	(A,17,64)	CKSSYB103K16	A
C 4319	(B,50,75)	CKSSYB104K10		C 4420	(A,17,65)	CKSSYB103K16	
C 4320	(A,49,78)	CKSSYB104K10		C 4421	(A,17,66)	CKSSYB103K16	
C 4321	(B,59,68)	CKSSYB104K10		C 4422	(A,19,67)	CKSSYB103K16	
C 4322	(B,59,70)	CKSSYB104K10		C 4423	(A,26,65)	CKSSYB103K16	
C 4323	(B,56,73)	CKSSYB104K10		C 4424	(B,26,65)	CKSSYB103K16	
C 4324	(B,59,75)	CKSSYB104K10		C 4425	(A,25,67)	CKSSYB103K16	
C 4325	(A,41,66)	CKSSYB104K10		C 4426	(A,18,67)	CKSSYB103K16	
C 4326	(B,40,66)	CKSSYB104K10		C 4427	(A,17,60)	CKSSYB104K10	
C 4327	(B,33,63)	CKSSYB104K10		C 4428	(A,17,59) 1 uF	DCH1246	
C 4328	(B,33,64)	CKSSYB104K10		C 4429	(A,26,63) 1 uF	DCH1246	
C 4329	(A,30,67)	CKSSYB104K10		C 4430	(A,26,64)	CKSSYB104K10	B
C 4330	(B,30,67)	CKSSYB104K10		C 4431	(A,17,60)	CKSSYB103K16	
C 4331	(A,30,69)	CKSSYB104K10		C 4432	(A,26,65)	CKSSYB103K16	
C 4332	(A,30,71)	CKSSYB104K10		C 4433	(B,26,58)	CKSSYB471K50	
C 4333	(B,28,69) 4.7 uF	CCG1201		C 4435	(A,22,67)	CKSSYB104K10	
C 4334	(B,33,71)	CKSSYB104K10		C 4436	(A,23,67) 10 uF	CCG1192	
C 4335	(A,41,68)	CKSSYB104K10		C 4437	(A,22,63)	CKSSYB104K10	
C 4336	(A,41,70)	CKSSYB104K10		C 4438	(A,24,63) 10 uF	CCG1192	
C 4337	(B,38,71)	CKSSYB104K10		C 4439	(B,26,59)	CKSSYB103K16	
C 4338	(B,50,69)	CKSSYB104K10		C 4501	(B,11,45)	CKSSYB104K10	
C 4339	(B,50,71)	CKSSYB104K10		C 4502	(B,5,40)	CKSSYB104K10	C
C 4340	(A,43,71)	CKSSYB104K10		C 4503	(B,4,38)	CKSSYB104K10	
C 4341	(B,52,75)	CKSSYB104K10		C 4504	(B,11,33)	CKSSYB103K16	
C 4342	(B,50,78)	CKSSYB104K10		C 4505	(B,14,33)	CKSSYB103K16	
C 4343	(B,40,68)	CKSSYB104K10		C 4506	(B,13,31) 10 uF	CCG1192	
C 4344	(B,39,70)	CKSSYB104K10		C 4507	(B,13,32)	CKSSYB103K16	
C 4345	(B,33,75)	CKSSYB104K10		C 4508	(B,18,37)	CKSSYB103K16	
C 4346	(B,30,75)	CKSSYB104K10		C 4509	(B,8,32) 10 uF	CCG1192	
C 4347	(A,30,75)	CKSSYB104K10		C 4510	(B,15,44)	CKSSYB102K50	
C 4348	(A,30,77)	CKSSYB104K10		C 4511	(B,6,44) 10 uF	CCG1192	
C 4349	(A,41,75)	CKSSYB104K10		C 4516	(B,17,40)	CCSSCH101J50	
C 4350	(A,41,77)	CKSSYB104K10		C 4704	(B,67,58)	CKSRYB105K10	D
C 4351	(B,40,77)	CKSSYB104K10		C 4706	(B,65,64)	CCSSCH470J50	
C 4352	(B,38,76) 4.7 uF	CCG1201		C 4707	(B,64,64)	CKSSYB471K50	
C 4353	(A,61,71)	CKSSYB104K10		C 4708	(A,71,64) 47 uF	CCG1229	
C 4354	(B,40,75)	CKSSYB104K10		C 4709	(A,68,64) 100 uF	CCG1232	
C 4355	(B,30,69)	CKSSYB104K10		C 4711	(B,64,62)	CCSSCH220J50	
C 4356	(B,51,75)	CKSSYB104K10		C 4712	(B,73,63)	CKSSYB103K16	
C 4357	(B,39,81)	CKSSYB103K16		C 4722	(B,63,37)	CKSRYB105K10	
C 4358	(B,57,81)	CKSSYB103K16		C 4723	(B,71,39)	CKSSYB103K16	
C 4361	(B,30,71)	CKSSYB104K10		C 4724	(B,70,39)	CCSSCH470J50	
C 4362	(B,33,72)	CKSSYB104K10		C 4725	(B,70,40)	CKSSYB471K50	
C 4363	(B,30,77)	CKSSYB104K10		C 4726	(A,69,33) 47 uF	CCG1229	E
C 4364	(B,38,73)	CKSSYB104K10		C 4727	(A,70,36) 100 uF	CCG1232	
C 4381	(A,26,73)	CKSSYB104K10		C 4729	(B,67,40)	CCSSCH220J50	
C 4382	(A,25,71)	CKSSYB104K10		C 4730	(B,68,31)	CKSSYB103K16	
C 4401	(A,9,48)	CKSSYB471K50		C 4742	(B,65,46)	CKSRYB105K10	
C 4402	(A,5,71)	CKSSYB104K10		C 4744	(B,64,52)	CCSSCH470J50	
C 4403	(A,9,71)	CKSSYB103K16		C 4745	(B,62,52)	CKSSYB471K50	
C 4404	(B,30,52)	CCSSCH8R0D50		C 4746	(A,70,52) 47 uF	CCG1229	
C 4405	(B,29,57)	CCSSCH8R0D50		C 4747	(A,67,52) 100 uF	CCG1232	
C 4406	(B,22,58)	CKSSYB103K16		C 4749	(B,62,49)	CCSSCH220J50	
C 4412	(A,22,65)	CKSSYB103K16		C 4750	(B,71,51)	CKSSYB103K16	F
C 4413	(A,19,68)	CKSSYB103K16		C 4766	(A,35,17) 4.7 uF	CCG1201	
C 4414	(A,19,65)	CKSSYB103K16		C 4767	(A,33,17) 4.7 uF	CCG1201	
C 4415	(A,20,64)	CKSSYB103K16		C 4768	(A,26,16)	CKSSYB473K16	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 4776 (A,65,23) CKSSYB104K10
 C 4778 (A,27,25) CKSSYB473K16
 C 4790 (A,47,22) CCSSCH101J50
 C 4791 (A,45,23) CKSSYB104K10
 C 4792 (A,44,18) CKSSYB104K10

L 2810 (A,48,63) Chip Beads VTL1127
 L 2811 (A,46,60) Chip Beads VTL1127
 L 2812 (A,48,60) Chip Beads VTL1127
 L 2813 (A,47,59) Chip Beads VTL1127
 L 2814 (A,48,58) Chip Beads VTL1127
 L 2815 (A,50,59) Chip Beads VTL1127
 L 2816 (A,51,59) Chip Beads VTL1127
 L 2817 (A,52,60) Chip Beads VTL1127
 L 2818 (A,53,60) Chip Beads VTL1127

C 4793 (A,49,19) CKSSYB222K50
 C 4794 (A,42,15) CKSSYB104K10
 C 4796 (A,19,59) 4.7 uF CCG1201
 C 4797 (A,20,56) 4.7 uF CCG1201
 C 4798 (A,43,22) CKSSYB104K10

L 2819 (A,54,61) Chip Beads VTL1127
 L 2820 (A,55,61) Chip Beads VTL1127
 L 2821 (A,56,62) Chip Beads VTL1127
 L 2822 (A,60,77) Chip Solid Inductor XTL3010
 L 2823 (B,62,68) Chip Solid Inductor XTL3010

C 4799 (A,49,25) CCSSCH101J50
 C 4800 (A,27,60) CKSSYB473K16
 C 4901 (A,40,23) 1 uF DCH1246
 C 4902 (B,58,43) CKSSYB104K10
 C 4903 (A,67,24) CKSSYB104K10

L 2829 (A,51,51) Chip Ferrite Bead BTX1047
 L 2830 (A,48,78) Chip Beads VTL1127
 L 2831 (A,45,75) Chip Beads VTL1127
 L 2832 (A,42,74) Chip Beads VTL1127
 L 2833 (A,41,73) Chip Beads VTL1127

C 4904 (A,65,25) CKSSYB102K50
 C 4914 (B,59,45) CKSSYB103K16
 C 4915 (A,31,25) CKSSYB104K10
 C 4933 (A,56,35) CCSSCH101J50
 C 5001 (A,73,21) 22 uF DCH1256

L 2834 (A,41,72) Chip Beads VTL1127
 L 2835 (A,43,71) Chip Beads VTL1127
 L 3001 (A,36,44) Inductor CTF1734
 L 3002 (A,38,45) Inductor CTF1734
 L 3003 (A,36,45) Inductor CTF1734

C 5003 (A,67,16) 22 uF DCH1256
 C 5007 (B,40,11) CKSRYB102K50

L 3004 (A,36,47) Inductor CTF1734
 L 3005 (A,38,49) Inductor CTF1734
 L 3006 (A,36,50) Inductor CTF1734
 L 3007 (A,42,49) Inductor CTF1734
 L 3008 (A,43,49) Inductor CTF1734

Unit Number : CXX8726**Unit Name : Monitor Unit(Service)****MISCELLANEOUS**

IC 2701 (A,115,33) Interface IC AK4187VN
 IC 2801 (A,34,77) Regulator IC MM3411A15N
 IC 2802 (A,41,79) Regulator IC MM3411A25N
 IC 2803 (A,53,71) Interface IC BU90R104
 IC 3001 (A,28,51) Display IC TC90193ASBG

L 3009 (A,44,47) Inductor CTF1734
 L 3010 (A,44,49) Inductor CTF1734
 L 3011 (A,41,54) Inductor CTF1734
 L 3012 (A,37,54) Inductor CTF1734
 L 3013 (A,38,43) Inductor CTF1734

IC 3101 (A,133,74) Driver IC BD81A04EFV-M
 IC 3201 (A,93,68) DC/DC Converter IC R1290K103A
 Q 2701 (A,126,31) Chip Transistor HN1C01FU
 Q 2702 (A,129,24) Bipolar Transistor LSCR523UB
 Q 2711 (A,112,71) Bipolar Transistor LSAR523UB

L 3014 (A,38,42) Inductor CTF1734
 L 3015 (A,37,41) Inductor CTF1734
 L 3016 (A,36,41) Inductor CTF1734
 L 3017 (A,35,41) Inductor CTF1734
 L 3018 (A,33,41) Inductor CTF1734

Q 2715 (A,128,20) Bipolar Transistor LSCR523UB
 Q 3001 (B,25,45) Bipolar Transistor LSAR523UB
 Q 3002 (A,12,42) Bipolar Transistor LSCR523UB
 Q 3201 (A,83,70) Transistor 2SAR502UB
 Q 3202 (A,98,73) Schottky Diode LTC024EEB

L 3019 (A,32,41) Inductor CTF1734
 L 3020 (A,31,41) Inductor CTF1734
 L 3021 (A,27,42) Inductor CTF1740
 L 3022 (A,26,41) Inductor CTF1734
 L 3023 (A,25,41) Inductor CTF1734

Q 3301 (A,8,48) Bipolar Transistor LSAR523UB
 D 3101 (A,132,64) Diode RB060M-30
 D 3201 (B,95,77) Schottky Diode DB3S308F0
 D 3202 (B,82,67) Schottky Diode DB3S308F0
 D 3203 (B,82,69) Schottky Diode DB3S308F0

L 3024 (A,24,41) Inductor CTF1734
 L 3025 (B,33,39) Inductor CTF1545
 L 3104 (A,129,68) Inductor CTF1545
 L 3105 (A,126,67) SMD Inductor CTH1558
 L 3201 (A,87,66) Choke Coil 22 uH CTH1426

D 3204 (A,87,59) Schottky Diode RB162M-40
 D 3560 (A,69,34) Diode DZ2S068C
 L 2801 (A,43,69) Chip Beads VTL1127
 L 2802 (A,42,68) Chip Beads VTL1127
 L 2803 (A,42,67) Chip Beads VTL1127

L 3301 (A,5,61) Inductor ATL7054
 L 3302 (A,19,35) Inductor CTF1635
 TH3301 (A,143,4) Thermistor CCX1084
 X 3001 (A,14,48) Resonator 27.000 MHz CSS1768
 CN2702 (A,118,73) Connector DKN1220

L 2804 (A,42,66) Chip Beads VTL1127
 L 2805 (A,42,65) Chip Beads VTL1127
 L 2806 (A,43,64) Chip Beads VTL1127
 L 2807 (A,46,65) Chip Beads VTL1127
 L 2808 (A,46,67) Chip Beads VTL1127

CN2703 (A,63,38) Connector CKS6365
 CN2704 (A,90,38) Connector CKS6365
 CN2705 (A,119,13) Connector CKS6625
 CN2706 (A,137,14) Connector CKS6601
 CN2710 (A,144,60) Connector DKN1361

L 2809 (A,47,63) Chip Beads VTL1127

CN3301 (A,31,24) Connector CKS6602

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
RESISTORS				
R 2704 (A,123,29)	RS1/16SS471J	R 2835 (A,42,75)	RS1/16SS221J	
R 2705 (A,123,25)	RS1/16SS471J	R 2836 (A,40,74)	RS1/16SS221J	
R 2706 (A,120,30)	RS1/16SS471J	R 2837 (A,39,73)	RS1/16SS221J	
R 2715 (A,114,28)	RS1/16SS0R0J	R 2838 (A,39,71)	RS1/16SS221J	A
R 2716 (A,117,28)	RS1/16SS0R0J	R 2839 (A,41,70)	RS1/16SS221J	
		R 2857 (A,56,80)	RS1/16SS103J	
		R 2858 (A,58,80)	RS1/16SS103J	
		R 2859 (A,58,79)	RS1/16SS103J	
R 2717 (A,115,29)	RS1/16SS621J			
R 2718 (A,116,29)	RS1/16SS181J	R 2861 (A,110,41)	RS1/10SR0R0J	
R 2719 (A,113,30)	RS1/16SS201J	R 2865 (A,64,77)	RS1/16SS221J	
R 2720 (A,118,31)	RS1/16SS620J	R 3001 (A,40,43)	RS1/16SS151J	
R 2724 (A,112,36)	RS1/16SS121J	R 3002 (A,40,44)	RS1/16SS151J	
		R 3003 (A,40,45)	RS1/16SS151J	
R 2733 (A,128,28)	RS1/16SS180J			
R 2734 (A,129,28)	RS1/16SS180J	R 3004 (A,41,45)	RS1/16SS151J	B
R 2735 (A,130,28)	RS1/16SS220J	R 3005 (A,40,49)	RS1/16SS151J	
R 2736 (A,124,33)	RS1/16SS620J	R 3006 (A,40,50)	RS1/16SS151J	
R 2737 (A,123,33)	RS1/16SS620J	R 3007 (A,42,48)	RS1/16SS151J	
		R 3008 (A,43,46)	RS1/16SS151J	
R 2739 (A,126,23)	RS1/16SS150J			
R 2740 (A,125,23)	RS1/16SS150J	R 3009 (A,44,44)	RS1/16SS151J	
R 2741 (A,124,23)	RS1/16SS180J	R 3010 (A,44,46)	RS1/16SS151J	
R 2759 (B,117,68)	RS1/16SS0R0J	R 3011 (A,42,52)	RS1/16SS151J	
R 2760 (A,113,68)	RS1/16SS104J	R 3012 (A,39,54)	RS1/16SS151J	
		R 3017 (A,39,56)	RS1/16SS472J	
R 2761 (A,115,69)	RS1/16SS104J			
R 2768 (A,115,70)	RS1/16SS473J	R 3018 (A,37,59)	RS1/16SS472J	
R 2771 (A,125,20)	RS1/16SS620J	R 3019 (A,37,60)	RS1/16SS472J	C
R 2772 (A,124,21)	RS1/16SS620J	R 3022 (A,39,42)	RS1/16SS151J	
R 2785 (B,141,60)	RS1/16SS0R0J	R 3023 (A,38,41)	RS1/16SS151J	
		R 3024 (A,37,39)	RS1/16SS151J	
R 2786 (B,141,59)	RS1/16SS0R0J			
R 2787 (B,140,58)	RS1/16SS0R0J	R 3025 (A,36,39)	RS1/16SS151J	
R 2788 (B,140,57)	RS1/16SS0R0J	R 3026 (A,35,39)	RS1/16SS151J	
R 2791 (A,141,64)	RS1/10SR0R0J	R 3028 (A,33,39)	RS1/16SS151J	
R 2801 (A,40,69)	RS1/16SS221J	R 3029 (A,32,39)	RS1/16SS151J	
		R 3031 (A,31,39)	RS1/16SS151J	
R 2802 (A,40,68)	RS1/16SS221J			
R 2803 (A,40,67)	RS1/16SS221J	R 3038 (A,27,40)	RS1/16SS680J	
R 2804 (A,40,66)	RS1/16SS221J	R 3040 (A,26,37)	RS1/16SS470J	
R 2805 (A,40,65)	RS1/16SS221J	R 3041 (A,25,39)	RS1/16SS470J	D
R 2806 (A,40,64)	RS1/16SS221J	R 3042 (B,28,34)	RS1/16SS0R0J	
		R 3043 (A,24,39)	RS1/16SS151J	
R 2807 (A,45,61)	RS1/16SS221J			
R 2808 (A,45,63)	RS1/16SS221J	R 3044 (A,17,59)	RS1/16SS472J	
R 2809 (A,43,61)	RS1/16SS221J	R 3047 (B,29,46)	RS1/16SS912J	
R 2810 (A,45,60)	RS1/16SS221J	R 3048 (A,17,60)	RS1/16SS472J	
R 2811 (A,43,60)	RS1/16SS221J	R 3049 (B,28,45)	RS1/16SS103J	
		R 3050 (B,27,47)	RS1/16SS103J	
R 2812 (A,45,59)	RS1/16SS221J			
R 2813 (A,43,59)	RS1/16SS221J	R 3051 (B,28,43)	RS1/16SS391J	
R 2814 (A,45,58)	RS1/16SS221J	R 3053 (A,20,63)	RS1/16SS472J	
R 2815 (A,47,58)	RS1/16SS221J	R 3054 (A,22,63)	RS1/16SS472J	
R 2816 (A,50,57)	RS1/16SS221J	R 3055 (A,21,63)	RS1/16SS472J	E
		R 3056 (A,11,54)	RS1/16SS472J	
R 2817 (A,52,58)	RS1/16SS221J			
R 2818 (A,53,58)	RS1/16SS221J	R 3057 (A,13,54)	RS1/16SS472J	
R 2819 (A,54,59)	RS1/16SS221J	R 3058 (B,19,52)	RS1/16SS472J	
R 2820 (A,55,59)	RS1/16SS221J	R 3059 (A,9,55)	RS1/16SS472J	
R 2821 (A,56,60)	RS1/16SS221J	R 3060 (A,19,63)	RS1/16SS472J	
		R 3061 (A,16,58)	RS1/16SS472J	
R 2822 (A,55,79)	RS1/16SS103J			
R 2824 (A,63,73)	RS1/16SS1000D	R 3064 (A,17,49)	RS1/16SS105J	
R 2825 (A,62,72)	RS1/16SS1000D	R 3065 (A,15,50)	RS1/16SS471J	
R 2826 (A,62,70)	RS1/16SS1000D	R 3073 (B,21,45)	RS1/16SS0R0J	
R 2827 (A,62,68)	RS1/16SS1000D	R 3074 (A,19,41)	RS1/16SS152J	F
		R 3077 (A,12,56)	RS1/16SS470J	
R 2828 (A,60,66)	RS1/16SS1000D			
R 2834 (A,46,77)	RS1/16SS221J	R 3078 (A,11,58)	RS1/16SS273J	
		R 3079 (A,14,57)	RS1/16SS470J	

1

Circuit Symbol and No.

R 3080 (A,16,63)
R 3081 (A,17,63)
R 3083 (A,18,44)

A

R 3089 (B,29,40)
R 3091 (A,15,59)
R 3094 (A,12,57)
R 3095 (A,10,59)
R 3100 (A,8,41)

R 3103 (A,131,80)
R 3104 (A,131,79)
R 3105 (A,135,80)
R 3106 (A,136,79)
R 3108 (B,131,71)

B

R 3110 (B,131,73)
R 3116 (B,129,70)
R 3117 (B,129,72)
R 3202 (A,94,65)
R 3203 (B,95,74)

R 3204 (B,95,72)
R 3205 (B,95,66)
R 3206 (B,97,65)
R 3207 (A,86,69)
R 3208 (A,96,70)

C

R 3209 (B,83,71)
R 3210 (B,79,72)
R 3211 (A,95,71)
R 3212 (A,96,72)
R 3213 (A,96,74)

R 3214 (A,86,62)
R 3216 (A,96,63)
R 3217 (A,96,66)
R 3218 (A,99,66)
R 3219 (A,97,63)

D

R 3220 (A,69,80)
R 3221 (A,69,79)
R 3222 (A,77,71)
R 3223 (A,79,71)
R 3224 (A,84,79)

R 3225 (A,84,80)
R 3301 (B,48,46)
R 3302 (B,51,47)
R 3303 (B,51,44)
R 3304 (B,53,44)

E

R 3305 (B,56,47)
R 3306 (B,56,44)
R 3307 (B,59,47)
R 3308 (B,60,44)
R 3309 (B,63,47)

R 3310 (B,64,44)
R 3311 (B,66,47)
R 3312 (B,67,44)
R 3313 (B,65,50)
R 3314 (B,64,52)

F

R 3315 (B,61,50)
R 3316 (B,61,52)
R 3317 (B,58,50)
R 3318 (B,57,52)
R 3319 (B,54,50)

R 3320 (B,54,52)
R 3321 (B,51,50)

2

Part No.

RS1/16SS470J
RS1/16SS470J
RS1/16SS122J

RS1/10SR0R0J
RS1/16SS472J
RS1/16SS472J
RS1/16SS273J
RS1/16SS0R0J

RS1/16SS104J
RS1/16SS154J
RS1/16SS273J
RS1/16SS511J
RS1/16SS1203D

RS1/16SS1003D
RS1/16SS3603D
RS1/16SS2402D
RS1/16SS103J
RS1/10SR9102D

RS1/10SR1802D
RS1/16SS203J
RS1/16SS104J
RS1/16SS103J
RS1/16SS472J

RS1/10SR1003D
RS1/10SR9101D
RS1/16SS6800D
RS1/16SS1502D
RS1/16SS8201D

RS1/10SR2R2J
RS1/10SR1203D
RS1/10SR3001D
RS1/10SR1502D
RS1/10SR472J

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

RS1/16SS0R0J
RS1/10SR4R7J
RS1/10SR56R0D
RS1/10SR1800D
RS1/10SR2R2J

RS1/10SR47R0D
RS1/10SR0R0J
RS1/10SR39R0D
RS1/10SR4R7J
RS1/10SR1000D

RS1/10SR8R2J
RS1/10SR1300D
RS1/10SR0R0J
RS1/10SR1000D
RS1/10SR8R2J

RS1/10SR39R0D
RS1/10SR4R7J
RS1/10SR47R0D
RS1/10SR0R0J
RS1/10SR1800D

RS1/10SR2R2J
RS1/10SR33R0D

3

Circuit Symbol and No.

R 3322 (B,50,52)
R 3323 (B,28,24)
R 3324 (B,21,27)

R 3327 (B,23,27)
R 3328 (B,24,27)
R 3330 (A,6,46)
R 3332 (A,6,47)
R 3333 (A,4,50)

R 3334 (A,5,50)
R 3336 (A,9,53)
R 3339 (A,8,52)
R 3340 (A,4,29)
R 3341 (A,5,29)

R 3342 (A,6,29)
R 3343 (A,7,29)
R 3344 (A,143,6)

CAPACITORS

C 2705 (A,110,34) 10 uF
C 2706 (A,112,33)
C 2707 (A,115,36)
C 2708 (A,113,38) 10 uF
C 2803 (A,50,62)

C 2804 (A,51,63)
C 2805 (A,58,64)
C 2806 (A,58,63)
C 2807 (A,60,75)
C 2808 (A,61,75)

C 2809 (B,62,70)
C 2810 (B,61,71)
C 2814 (A,49,53)
C 2816 (A,52,54) 10 uF
C 2819 (A,35,80)

C 2820 (A,45,80)
C 2821 (A,41,77)
C 2822 (A,34,74)
C 2823 (A,44,71)
C 2824 (A,45,71)

C 2825 (A,52,79)
C 2826 (A,52,80)
C 2830 (A,65,79)
C 3002 (A,36,46)
C 3003 (A,36,48)

C 3004 (A,37,51)
C 3005 (A,37,52)
C 3006 (A,38,55)
C 3007 (A,34,41)
C 3008 (A,31,60)

C 3010 (A,30,42)
C 3011 (A,29,59)
C 3013 (A,29,41)
C 3014 (A,28,59)
C 3015 (A,26,39)

C 3019 (B,30,44) 10 uF
C 3021 (A,24,42)
C 3022 (A,24,59)
C 3023 (B,27,42)
C 3024 (A,20,40)

C 3025 (B,23,41)

4

Part No.

RS1/10SR2R4J
RS1/16SS473J
RS1/16SS473J

RS1/16SS473J
RS1/16SS473J
RS1/16SS472J
RS1/16SS105J
RS1/16SS682J

RS1/16SS0R0J
RS1/16SS101J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS183J

DCH1201
CKSSYB104K10
CKSSYB104K10
DCH1201
CKSSYB104K10

CKSSYB103K16
CKSSYB103K16
CKSSYB104K10
CKSSYB103K16
CKSSYB104K10

CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
DCH1201
CKSRYB105K10

CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSSYB104K10
CKSSYB103K16

CKSSYB103K16
CKSSYB104K10
CKSQYB225K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH470J50

CCG1192
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSRYB474K10

	1		2		3		4
	<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>
A	D 3457	(A,71,36) Diode	DZ2S068C				
	D 3458	(A,71,34) Diode	DZ2S068C		C 101		CEVW220M16
	D 3459	(A,68,36) Diode	DZ2S068C		C 102		CKSRYB104K16
	D 3461	(A,66,36) Diode	DZ2S068C				
	D 3462	(A,68,34) Diode	DZ2S068C				
	D 3463	(A,65,36) Diode	DZ2S068C				
	D 3464	(A,66,34) Diode	DZ2S068C				
	D 3465	(A,62,36) Diode	DZ2S068C				
	D 3466	(A,65,34) Diode	DZ2S068C				
	D 3467	(A,60,36) Diode	DZ2S068C				
B	D 3468	(A,63,33) Diode	EZAEG2A50AX				
	D 3469	(A,62,33) Diode	EZAEG2A50AX				
	D 3470	(A,59,33) Diode	EZAEG2A50AX				
	D 3471	(A,58,33) Diode	EZAEG2A50AX				
	D 3472	(A,52,35) Diode	EZAEG2A50AX				
	D 3473	(A,52,37) Diode	EZAEG2A50AX				
	D 3474	(A,44,34) Diode	DZ2S068C				
	D 3475	(A,49,36) Diode	DZ2S068C				
	D 3476	(A,45,36) Diode	DZ2S068C				
	D 3477	(A,42,34) Diode	DZ2S068C				
C	D 3478	(A,42,36) Diode	DZ2S068C				
	D 3479	(A,40,36) Diode	DZ2S068C				
	D 3480	(A,40,34) Diode	DZ2S068C				
	D 3481	(A,38,34) Diode	DZ2S068C				
	D 3482	(A,53,33) Diode	EZAEG2A50AX				
	D 3483	(A,56,33) Diode	EZAEG2A50AX				
	D 3484	(A,60,33) Diode	EZAEG2A50AX				
	D 3485	(A,61,33) Diode	EZAEG2A50AX				
	CN3451	(A,23,13) Connector	CKS6366				
	CN3452	(A,51,13) Connector	CKS6366				
	CN3453	(B,59,37) Connector	CKS6646				

H

Unit Number : CXX8728
Unit Name : SW Unit(Service)

MISCELLANEOUS

S 3501	(A,18,7) Switch(OFF SENS)	CSN1085
S 3502	(A,21,24) Switch(LOCK)	CSN1086
CN3501	(A,7,25) Connector	DKN1220

I

Unit Number : EXX2001
Unit Name : PCB Assy (Service)

MISCELLANEOUS

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch(HOME)	CSN1067
S 102	Switch(HOME)	CSN1068
CN101	Connector	CKS4997

RESISTORS

R 101	RS1/16S221J
R 102	RS1/16S221J
R 103	RS1/16S0R0J

CAPACITORS