

## EXPLODED VIEW



Parts with exploded numbers larger than 700 are not supplied.

# KDC-9020R/MP919/PSW9521/X759

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

| Ref.No.                             | A<br>d<br>d | N<br>e<br>w | Parts No.   | Description                    | Dest<br>inati<br>on | Ref.No. | A<br>d<br>d | N<br>e<br>w | Parts No.   | Description                    | Dest<br>inati<br>on |
|-------------------------------------|-------------|-------------|-------------|--------------------------------|---------------------|---------|-------------|-------------|-------------|--------------------------------|---------------------|
| <b>KDC-9020R/MP919/PSW9521/X759</b> |             |             |             |                                |                     | 233     | 2A          |             | D14-0760-03 | ROLLER                         |                     |
| 201                                 | 1A          |             | A02-1497-13 | PLASTIC CABINET ASSY           |                     | 235     | 1B          | *           | E30-6054-05 | CORD WITH PINPLUG (3PRE)       | K1M1                |
| 203                                 | 2A          |             | A10-4807-13 | CHASSIS CALKING ASSY           |                     | 235     | 1B          | *           | E30-6058-05 | CORD WITH PINPLUG (3PRE)       | K2                  |
| 204                                 | 2A          |             | A10-4810-13 | CHASSIS CALKING ASSY           |                     | 235     | 1B          | *           | E30-6100-05 | CORD WITH PINPLUG (3PRE)       | E                   |
| 206                                 | 2A          |             | A10-4893-04 | CHASSIS CALKING ASSY           |                     | 236     | 1B          | *           | E30-6056-05 | CORD WITH PLUG (ANT)           |                     |
| 208                                 | 2A          |             | A10-4924-02 | CHASSIS                        |                     | 237     | 2B          | *           | E30-6057-05 | CORD WITH DIN CONNECTOR (DISP) | E                   |
| 210                                 | 3A          | *           | A21-4169-03 | DRESSING PANEL                 |                     | △ DC1   | 1A          |             | E30-4939-05 | DC CORD                        | K1                  |
| 211                                 | 3A          | *           | A21-4170-03 | DRESSING PANEL                 |                     | △ DC1   | 1A          |             | E30-4940-05 | DC CORD                        | K2                  |
| 212                                 | 2A          |             | A22-2865-03 | SUB PANEL ASSY                 |                     | △ DC2   | 1A          |             | E30-4942-05 | DC CORD (ISO)                  | M1                  |
| 213                                 | 3B          | *           | A46-1752-01 | REAR COVER                     |                     | △ DC2   | 1A          |             | E30-4956-05 | DC CORD (ISO)                  | E                   |
| 214                                 | 1B          |             | A52-0805-02 | TOP PLATE                      |                     | FC1     | 2B          | *           | E39-0437-05 | FLAT CABLE                     |                     |
| PA1                                 | 3A          | *           | A64-2568-02 | PANEL ASSY                     | K1                  | 240     | 2B          |             | F29-0049-05 | INSULATING COVER               |                     |
| PA1                                 | 3A          | *           | A64-2569-02 | PANEL ASSY                     | K2                  | △ F1    | 2B          |             | F52-0006-05 | FUSE(MINI BLADE TYPE)10A       |                     |
| PA1                                 | 3A          | *           | A64-2570-02 | PANEL ASSY                     | M1                  | 241     | 1A          |             | G01-2924-04 | TORSION COIL SPRING            |                     |
| PA1                                 | 3A          | *           | A64-2586-02 | PANEL ASSY                     | E                   | 242     | 2A          |             | G01-3065-04 | EXTENSION SPRING               |                     |
| PME1                                | 2A          |             | A10-4921-02 | CHASSIS ASSY                   |                     | 243     | 2B          |             | G01-3066-14 | TORSION COIL SPRING            |                     |
| RM1                                 | 1A          |             | A70-2025-05 | REMOTE CONTROLLER ASSY(RC-410) | K1K2                | 244     | 3B          |             | G01-3069-04 | EXTENSION SPRING               |                     |
| RM1                                 | 1A          |             | A70-2026-05 | REMOTE CONTROLLER ASSY(RC-420) | M1E                 | 245     | 2A          |             | G01-3080-04 | TORSION COIL SPRING            |                     |
| RM2                                 | 1A          |             | A70-0886-15 | REMOTE CONTROLLER ASSY(MASK)   | E                   | 246     | 2A          |             | G09-2038-04 | FORMED WIRE                    |                     |
| 215                                 | 2B          |             | B03-3073-12 | DRESSING PLATE                 |                     | 247     | 2A          |             | G09-2042-04 | FORMED WIRE                    |                     |
| 216                                 | 1A          |             | B07-3007-03 | ESCUTCHEON ASSY                |                     | 248     | 2A          |             | G11-1927-04 | CUSHION                        |                     |
| 217                                 | 1C          |             | B07-3010-02 | ESCUTCHEON                     | K1K2M1              | 251     | 2A          |             | G16-1177-04 | SHEET                          |                     |
| 218                                 | 3A          | *           | B09-0527-03 | CAP (VOL)                      |                     | -       |             |             | H10-4762-12 | POLYSTYRENE FOAMED FIXTURE     | E                   |
| 219                                 | 3A          | *           | B10-4149-01 | FRONT GLASS                    | K1                  | -       |             |             | H10-4764-12 | POLYSTYRENE FOAMED FIXTURE     | K1K2M1              |
| 219                                 | 3A          | *           | B10-4150-01 | FRONT GLASS                    | K2                  | -       |             |             | H25-0329-04 | PROTECTION BAG (280X450X0.03)  | K1K2M1              |
| 219                                 | 3A          | *           | B10-4151-01 | FRONT GLASS                    | M1                  | -       |             |             | H25-0337-04 | PROTECTION BAG (180X300X0.03)  |                     |
| 219                                 | 3A          | *           | B10-4164-01 | FRONT GLASS                    | E                   | -       |             |             | H25-1108-04 | PROTECTION BAG (100X300X0.03)  |                     |
| 220                                 | 3A          | *           | B10-4152-04 | FRONT GLASS                    |                     | -       |             |             | H25-1111-04 | PROTECTION BAG (280X450X0.03)  | E                   |
| 221                                 | 3A          | *           | B19-2133-03 | LIGHTING BOARD                 |                     | -       |             | *           | H54-2329-03 | ITEM CARTON CASE               | M1                  |
| 222                                 | 3A          |             | B43-1284-04 | BADGE                          |                     | -       |             | *           | H54-2335-03 | ITEM CARTON CASE               | E                   |
| -                                   |             |             | B46-0100-50 | WARRANTY CARD                  |                     | -       |             | *           | H54-2342-13 | ITEM CARTON CASE               | K1                  |
| -                                   |             |             | B46-0606-04 | ID CARD                        | K1K2                | -       |             | *           | H54-2343-03 | ITEM CARTON CASE               | K2                  |
| -                                   |             |             | B46-0612-14 | ID CARD                        | M1                  |         |             |             |             |                                |                     |
| -                                   |             |             | B46-0632-04 | ID CARD                        | E                   | 254     | 1A          |             | J19-5051-03 | BRACKET (L)                    | K1K2M1              |
| -                                   |             |             | B46-0645-03 | USER CARD                      | K1K2                | 255     | 1A          |             | J19-5052-03 | BRACKET (R)                    | K1K2M1              |
| -                                   |             | *           | B46-0648-03 | USER CARD                      | K1                  | 257     | 2A          |             | J21-9651-13 | MOUNTING HARDWARE ASSY         |                     |
| -                                   |             |             | B58-1309-04 | CAUTION CARD                   | E                   | 258     | 2A          |             | J21-9699-04 | MOUNTING HARDWARE              |                     |
| -                                   |             | *           | B64-2215-00 | INSTRUCTION MANUAL (ENGLISH)   | K1K2                | 259     | 1A          |             | J21-9716-03 | MOUNTING HARDWARE ASSY         |                     |
| -                                   |             | *           | B64-2216-00 | INSTRUCTION MANUAL (FRE.SPA.)  | K1K2                | 262     | 3B          |             | J90-0999-04 | GUIDE                          |                     |
| -                                   |             | *           | B64-2217-00 | INSTRUCTION MANUAL (ENG.T-CHI) | M1                  | PFPC1   | 1A          |             | J84-0122-04 | FLEXIBLE PRINTED WIRING BOARD  |                     |
| -                                   |             | *           | B64-2218-00 | INSTRUCTION MANUAL (ENGLISH)   | E                   | 263     | 3A          | *           | K23-1062-03 | KNOB (VOL)                     |                     |
| -                                   |             | *           | B64-2219-00 | INSTRUCTION MANUAL (FRE.GER.)  | E                   | 264     | 3A          |             | K24-3646-04 | KNOB (RESET)                   |                     |
| -                                   |             | *           | B64-2220-00 | INSTRUCTION MANUAL (DUT.ITA.)  | E                   | 265     | 3A          | *           | K25-1400-03 | KNOB (FM/AM)                   |                     |
| -                                   |             | *           | B64-2221-00 | INSTRUCTION MANUAL (SPA.POR.)  | E                   | 266     | 3A          | *           | K25-1401-03 | KNOB (UP/DOWN)                 |                     |
| 223                                 | 1A          |             | D10-4562-04 | LEVER                          |                     | 267     | 3A          | *           | K25-1402-03 | KNOB (SRC)                     |                     |
| 224                                 | 2A          |             | D10-4563-04 | ARM ASSY                       |                     | 268     | 3A          | *           | K25-1403-03 | KNOB (PRESET)                  |                     |
| 225                                 | 2A          |             | D10-4590-04 | ARM                            |                     | 269     | 3B          |             | K29-7017-03 | KNOB (LOCK)                    |                     |
| 226                                 | 2A          |             | D13-2135-04 | GEAR ASSY                      |                     | 271     | 1A          |             | N99-1704-05 | SCREW SET                      |                     |
| 227                                 | 2A          |             | D13-2138-04 | GEAR                           |                     | 272     | 1A          |             | N99-1722-05 | SCREW SET                      | K1K2M1              |
| 228                                 | 2A          |             | D13-2139-04 | GEAR                           |                     | A       | 2A          |             | N09-4400-05 | MACHINE SCREW                  |                     |
| 229                                 | 2A          |             | D13-2140-04 | GEAR                           |                     | B       | 2A          |             | N09-4401-05 | MACHINE SCREW                  |                     |
| 230                                 | 2A          |             | D13-2141-14 | GEAR ASSY                      |                     | C       | 1A          |             | N09-4427-05 | TAPTITE SCREW                  |                     |
| 231                                 | 2A          |             | D13-2165-03 | GEAR ASSY                      |                     | D       | 2A          |             | N09-4448-05 | MACHINE SCREW                  |                     |
| 232                                 | 2A          |             | D14-0754-04 | ROLLER                         |                     |         |             |             |             |                                |                     |

E : KDC-PSW9521

M1 : KDC-9020R

K1 : KDC-X759

K2 : KDC-MP919

E: Europe K: North America M: Other Areas

W: Without Europe

△ indicates safety critical components.

# KDC-9020R/MP919/PSW9521/X759

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

| Ref.No.                               | A<br>d<br>d | N<br>e<br>w | Parts No.     | Description                   | Dest<br>inati<br>on |
|---------------------------------------|-------------|-------------|---------------|-------------------------------|---------------------|
| E                                     | 3A          |             | N09-4449-05   | MACHINE SCREW                 |                     |
| F                                     | 2A          |             | N19-2154-04   | FLAT WASHER                   |                     |
| G                                     | 2A          |             | N19-2155-04   | FLAT WASHER                   |                     |
| H                                     | 2A          |             | N19-2156-04   | FLAT WASHER                   |                     |
| J                                     | 2A          |             | N29-0522-05   | RETAINING RING                |                     |
| K                                     | 3B          |             | N29-0523-05   | RETAINING RING                |                     |
| L                                     | 3A          |             | N38-2025-46   | PAN HEAD MACHIN SCREW         |                     |
| M                                     | 3A          |             | N80-2005-46   | PAN HEAD TAPTITE SCREW        |                     |
| N                                     | 3B          |             | N09-4473-05   | MACHINE SCREW                 |                     |
| P                                     | 1B          |             | N83-3005-46   | PAN HEAD TAPTITE SCREW        |                     |
| Q                                     | 2A          |             | N86-2004-45   | BINDING HEAD TAPTITE SCREW    |                     |
| R                                     | 1A          |             | N83-3008-46   | PAN HEAD TAPTITE SCREW        |                     |
| PS1 -3                                | 1A          |             | S68-0856-05   | PUSH SWITCH                   |                     |
| 273                                   | 1A          |             | T90-0523-05   | ANTENNA ADAPTOR               | M1E                 |
| 273                                   | 1A          |             | T90-0534-05   | ANTENNA ADAPTOR               | M1E                 |
| PM1                                   | 1A          |             | T42-1034-04   | MOTOR ASSY                    |                     |
| DME1                                  | 1B          |             | X92-4450-00   | CD MECHANISM ASSY (DXM-6110W) | K1                  |
| DME1                                  | 1B          |             | X92-4460-00   | CD MECHANISM ASSY (DXM-6400W) | K2                  |
| DME1                                  | 1B          | *           | X92-4470-00   | CD MECHANISM ASSY (DXM-6500W) | M1                  |
| DME1                                  | 1B          | *           | X92-4470-01   | CD MECHANISM ASSY (DXM-6501W) | E                   |
| <b>SUB-CIRCUIT UNIT (X16-118x-xx)</b> |             |             |               |                               |                     |
| J1                                    | 3B          |             | E58-0903-05   | RECTANGULAR RECEPTACLE        |                     |
| FPC2                                  | 3B          | *           | J84-0121-12   | FLEXIBLE PRINTED WIRING BOARD |                     |
| <b>SWITCH UNIT (X16-15xx-xx)</b>      |             |             |               |                               |                     |
| D5 -7                                 |             |             | B30-1564-05   | LED(1608,BLUE)                |                     |
| C2                                    |             |             | CK73GB0J105K  | CHIP C 1.0UF K                |                     |
| C3                                    |             |             | CK73GB1H103K  | CHIP C 0.010UF K              |                     |
| C6                                    |             |             | CK73FB1A225K  | CHIP C 2.2UF K                |                     |
| C7 -12                                |             |             | CK73GB1H103K  | CHIP C 0.010UF K              |                     |
| C14                                   |             |             | CK73GB1H103K  | CHIP C 0.010UF K              |                     |
| C15                                   |             |             | CK73FB1A225K  | CHIP C 2.2UF K                |                     |
| C16                                   |             |             | CK73EB0J106K  | CHIP C 10UF K                 |                     |
| C17                                   |             |             | CC73GCH1H101J | CHIP C 100PF J                |                     |
| C18                                   |             |             | C93-1217-05   | CHIP C 0.047UF K              |                     |
| C19                                   |             |             | CK73FB1A225K  | CHIP C 2.2UF K                |                     |
| C20                                   |             |             | CK73GB1C104K  | CHIP C 0.10UF K               |                     |
| C20                                   |             |             | CK73GB1H104K  | CHIP C 0.10UF K               |                     |
| C21                                   |             |             | CK73EB0J106K  | CHIP C 10UF K                 |                     |
| C22                                   |             |             | CK73GB0J105K  | CHIP C 1.0UF K                |                     |
| C23                                   |             |             | CK73GB1H103K  | CHIP C 0.010UF K              |                     |
| C24                                   |             |             | CK73GB1C104K  | CHIP C 0.10UF K               |                     |
| C24                                   |             |             | CK73GB1H104K  | CHIP C 0.10UF K               |                     |
| C26 ,27                               |             |             | CK73GB1H103K  | CHIP C 0.010UF K              |                     |
| J1                                    |             |             | E59-0835-05   | RECTANGULAR PLUG              |                     |
| L1                                    |             |             | L92-0332-05   | CHIP FERRITE                  |                     |
| L2                                    |             |             | L40-1005-34   | SMALL FIXED INDUCTOR          |                     |
| L2                                    |             |             | L40-1005-68   | SMALL FIXED INDUCTOR          |                     |
| L3                                    |             |             | L92-0332-05   | CHIP FERRITE                  |                     |
| L4                                    |             |             | L40-1005-34   | SMALL FIXED INDUCTOR          |                     |
| L4                                    |             |             | L40-1005-68   | SMALL FIXED INDUCTOR          |                     |

| Ref.No. | A<br>d<br>d | N<br>e<br>w | Parts No.    | Description          | Dest<br>inati<br>on |
|---------|-------------|-------------|--------------|----------------------|---------------------|
| L5      |             |             | L92-0332-05  | CHIP FERRITE         |                     |
| L6      |             |             | L40-1005-34  | SMALL FIXED INDUCTOR |                     |
| L6      |             |             | L40-1005-68  | SMALL FIXED INDUCTOR |                     |
| X1      |             |             | L78-0821-05  | RESONATOR            |                     |
| CP1     |             |             | R90-0720-05  | MULTI-COMP 100K X4   |                     |
| CP2     |             |             | R90-1014-05  | MULTI-COMP 100 X4    |                     |
| CP3     |             |             | R90-0724-05  | MULTI-COMP 1K X4     |                     |
| CP4     |             |             | R90-1022-05  | MULTI-COMP 470 X2    |                     |
| CP5     |             |             | R90-1019-05  | MULTI-COMP 100 X2    |                     |
| CP6     |             |             | R90-1020-05  | MULTI-COMP 22K X2    |                     |
| CP7 ,8  |             |             | R90-0726-05  | MULTI-COMP 10K X2    |                     |
| CP9     |             |             | R90-0724-05  | MULTI-COMP 1K X4     |                     |
| CP10    |             |             | R90-1014-05  | MULTI-COMP 100 X4    |                     |
| CP11    |             |             | R90-0748-05  | MULTI-COMP 47K X4    |                     |
| CP12,13 |             |             | R90-1014-05  | MULTI-COMP 100 X4    |                     |
| CP14    |             |             | R90-0748-05  | MULTI-COMP 47K X4    |                     |
| CP15    |             |             | R90-1014-05  | MULTI-COMP 100 X4    |                     |
| CP16,17 |             |             | R90-0748-05  | MULTI-COMP 47K X4    |                     |
| CP18    |             |             | R90-1014-05  | MULTI-COMP 100 X4    |                     |
| R1      |             |             | R92-2072-05  | CHIP R 1.5K J 1/2W   |                     |
| R2      |             |             | R92-2565-05  | CHIP R 1.2K J 1/2W   |                     |
| R3      |             |             | RK73GB2A153J | CHIP R 15K J 1/10W   |                     |
| R4 ,5   |             | *           | RK73GB2A274J | CHIP R 270K J 1/10W  |                     |
| R6      |             |             | RK73GB2A103J | CHIP R 10K J 1/10W   |                     |
| R8      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R9      |             |             | RK73GB2A153J | CHIP R 15K J 1/10W   |                     |
| R10 -12 |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R13     |             |             | RK73GB2A512J | CHIP R 5.1K J 1/10W  |                     |
| R14     |             |             | RK73GB2A101J | CHIP R 100 J 1/10W   |                     |
| R16     |             |             | RK73GB2A100J | CHIP R 10 J 1/10W    |                     |
| R17     |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R18     |             |             | RK73GB2A225J | CHIP R 2.2M J 1/10W  |                     |
| R19     |             |             | RK73GB2A101J | CHIP R 100 J 1/10W   |                     |
| R20     |             |             | RK73GB2A103J | CHIP R 10K J 1/10W   |                     |
| R22     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R23     |             |             | RK73GB2A472J | CHIP R 4.7K J 1/10W  |                     |
| R24     |             |             | RK73GB2A103J | CHIP R 10K J 1/10W   |                     |
| R25 ,26 |             |             | RK73GB2A473J | CHIP R 47K J 1/10W   |                     |
| R27     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R28     |             |             | RK73GB2A473J | CHIP R 47K J 1/10W   |                     |
| R32     |             |             | RK73GB2A101J | CHIP R 100 J 1/10W   |                     |
| R33     |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R34     |             | *           | RK73GB2A220J | CHIP R 22 J 1/10W    |                     |
| R56 -59 |             |             | RK73GB2A103J | CHIP R 10K J 1/10W   |                     |
| R60     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| S1 -10  |             |             | S70-0856-05  | TACT SWITCH          |                     |
| S11 ,12 |             |             | S70-0857-05  | TACT SWITCH          |                     |
| S13     |             |             | S70-0851-05  | TACT SWITCH          |                     |
| S14     |             |             | S70-0864-05  | TACT SWITCH          |                     |
| S15     |             | *           | T99-0431-05  | ROTARY ENCODER       |                     |
| D3      |             |             | HZM5.6N(B2)  | ZENER DIODE          | K1K2M1              |
| D3      |             |             | MA3056-M     | ZENER DIODE          |                     |
| D3      |             |             | 02CZ5.6-Y    | ZENER DIODE          | K1K2M1              |

E : KDC-PSW9521

M1 : KDC-9020R

K1 : KDC-X759

K2 : KDC-MP919

E: Europe K: North America M: Other Areas

W: Without Europe

 indicates safety critical components.

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

| Ref.No.                                               | A<br>d<br>d | N<br>e<br>w | Parts No.                                                                       | Description                                                                                              | Dest<br>inati<br>on       |
|-------------------------------------------------------|-------------|-------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------|
| D8 -11<br>D12<br>D13 -15<br>ED1<br>IC1                |             | *           | DA204U<br>MA3240-M<br>DA204U<br>MN16826A<br>UPD703033GC150                      | DIODE<br>ZENER DIODE<br>DIODE<br>FLUORESCENT INDICATOR TUBE<br>MI-COM IC                                 |                           |
| IC2<br>IC3<br>IC4<br>IC5<br>IC6                       |             | *           | BA3830F<br>RS-171<br>TC74HC4050AFT<br>TAR5S33<br>MX23C1610T10-2                 | ANALOGUE IC<br>ANALOGUE IC<br>MOS-IC<br>ANALOGUE IC<br>MEMORY IC                                         |                           |
| Q1<br>Q1<br>Q2<br>Q3<br>Q4                            |             |             | DTA114EUA<br>KRA302<br>2SC4081<br>2SC2713<br>2SA1163                            | DIGITAL TRANSISTOR<br>DIGITAL TRANSISTOR<br>TRANSISTOR<br>TRANSISTOR<br>TRANSISTOR                       | K1K2M1                    |
| Q5<br>Q5<br>Q6 ,7                                     |             |             | DTC114EUA<br>KRC402<br>2SC2713                                                  | DIGITAL TRANSISTOR<br>DIGITAL TRANSISTOR<br>TRANSISTOR                                                   | K1K2M1                    |
| <b>ELECTRIC UNIT (X25-91xx-xx)</b>                    |             |             |                                                                                 |                                                                                                          |                           |
| C1<br>C2<br>C3<br>C4<br>C5                            |             |             | C90-5377-05<br>CK73GB1H103K<br>C90-2866-05<br>CK73GB1H103K<br>CE04NW1C100M      | ELECTRO 3900UF 16WV<br>CHIP C 0.010UF K<br>ELECTRO 220UF 16WV<br>CHIP C 0.010UF K<br>ELECTRO 10UF 16WV   |                           |
| C6<br>C7<br>C8<br>C9<br>C10 ,11                       |             |             | CE04NW0J101M<br>CK73FB1C105K<br>CE04CW1A221M<br>CE04CW1A101M<br>C90-2963-05     | ELECTRO 100UF 6.3WV<br>CHIP C 1.0UF K<br>ELECTRO 220UF 10WV<br>ELECTRO 100UF 10WV<br>ELECTRO 100UF 25WV  | K2M1E                     |
| C12 ,13<br>C14 ,15<br>C15<br>C16<br>C17               |             |             | C90-5418-05<br>CK73GB1H103K<br>CK73GB1H103K<br>C90-2962-05<br>CK73GB1H103K      | ELECTRO 220UF 16WV<br>CHIP C 0.010UF K<br>CHIP C 0.010UF K<br>ELECTRO 100UF 16WV<br>CHIP C 0.010UF K     | K2M1E<br>K2M1E<br>K1      |
| C18<br>C19<br>C20<br>C21 ,22<br>C23                   |             | *           | C90-2962-05<br>CK73FB1A225K<br>C93-1218-05<br>C90-5375-05<br>CE04NW1E4R7M       | ELECTRO 100UF 16WV<br>CHIP C 2.2UF K<br>CHIP C 0.010UF K<br>ELECTRO 33UF 63WV<br>ELECTRO 4.7UF 25WV      |                           |
| C24<br>C25 -28<br>C29<br>C30<br>C30                   |             |             | C90-2962-05<br>CK73EB1C225K<br>CE04NW1C220M<br>CK73GB1E223K<br>CK73GB1H223K     | ELECTRO 100UF 16WV<br>CHIP C 2.2UF K<br>ELECTRO 22UF 16WV<br>CHIP C 0.022UF K<br>CHIP C 0.022UF K        |                           |
| C31<br>C32 ,33<br>C34<br>C35<br>C36                   |             |             | CK73GB1H103K<br>CE04NW1E4R7M<br>CE04NW1V3R3M<br>CK73GB1C683K<br>CE04NW1H0R1M    | CHIP C 0.010UF K<br>ELECTRO 4.7UF 25WV<br>ELECTRO 3.3UF 35WV<br>CHIP C 0.068UF K<br>ELECTRO 0.1UF 50WV   |                           |
| C37<br>C38<br>C38<br>C39<br>C40                       |             |             | CK73GB1H103K<br>CK73GB1E223K<br>CK73GB1H223K<br>CE04NW1H010M<br>CK73GB1H102K    | CHIP C 0.010UF K<br>CHIP C 0.022UF K<br>CHIP C 0.022UF K<br>ELECTRO 1.0UF 50WV<br>CHIP C 1000PF K        | M1E                       |
| C41 -43<br>C44<br>C45 ,46<br>C47<br>C48               |             |             | CK73GB1H103K<br>CE04NW0J470M<br>CC73GCH1H220J<br>CK73GB0J105K<br>CK73EB0J106K   | CHIP C 0.010UF K<br>ELECTRO 47UF 6.3WV<br>CHIP C 22PF J<br>CHIP C 1.0UF K<br>CHIP C 10UF K               |                           |
| C49<br>C50<br>C51 -53<br>C54<br>C55 ,56               |             |             | CK73GB1H102K<br>CK73GB1H103K<br>CE04NW1E4R7M<br>CK73GB1H103K<br>CE04NW1E4R7M    | CHIP C 1000PF K<br>CHIP C 0.010UF K<br>ELECTRO 4.7UF 25WV<br>CHIP C 0.010UF K<br>ELECTRO 4.7UF 25WV      |                           |
| C60<br>C61<br>C62<br>C63 ,64<br>C65 -68               |             |             | CE04NW1C470M<br>CK73GB1H103K<br>CE04NW1H2R2M<br>CE04NW1HR47M<br>C90-2850-05     | ELECTRO 47UF 16WV<br>CHIP C 0.010UF K<br>ELECTRO 2.2UF 50WV<br>ELECTRO 0.47UF 50WV<br>ELECTRO 10UF 10WV  |                           |
| C69 ,70<br>C69 ,70<br>C71<br>C72<br>C73               |             |             | CK73GB1C104K<br>CK73GB1H104K<br>CC73GCH1H151J<br>CK73GB1A474K<br>CK73GB1H103K   | CHIP C 0.10UF K<br>CHIP C 0.10UF K<br>CHIP C 150PF J<br>CHIP C 0.47UF K<br>CHIP C 0.010UF K              |                           |
| C74<br>C74<br>C76<br>C77 -80<br>C81 -84               |             | *           | CK73GB1E333K<br>CK73GB1H333K<br>CE04NW1H010M<br>CE04NW1HR33M<br>C90-5429-05     | CHIP C 0.033UF K<br>CHIP C 0.033UF K<br>ELECTRO 1.0UF 50WV<br>ELECTRO 0.33UF 50WV<br>ELECTRO 0.33UF 50WV |                           |
| C85 -88<br>C85 -88<br>C89 -94<br>C95 -100<br>C101-106 |             |             | CK73GB1C104K<br>CK73GB1H104K<br>CE04CW1C220M<br>CE04NW1C100M<br>CK73GB1H222K    | CHIP C 0.10UF K<br>CHIP C 0.10UF K<br>ELECTRO 22UF 16WV<br>ELECTRO 10UF 16WV<br>CHIP C 2200PF K          |                           |
| C107-109<br>C111-114<br>C115<br>C116<br>C117          |             |             | CK73FB1H104K<br>C90-5296-05<br>CE04NW1H010M<br>CE04NW1C330M<br>CE04NW1H010M     | CHIP C 0.10UF K<br>NP-ELECT 0.22UF 50WV<br>ELECTRO 1.0UF 50WV<br>ELECTRO 33UF 16WV<br>ELECTRO 1.0UF 50WV |                           |
| C118<br>C120-124<br>C120-125<br>C126<br>C127          |             |             | C90-2935-05<br>CK73GB1H103K<br>CK73GB1H103K<br>CE04NW1C100M<br>CE04NW1H2R2M     | ELECTRO 1.0UF 50WV<br>CHIP C 0.010UF K<br>CHIP C 0.010UF K<br>ELECTRO 10UF 16WV<br>ELECTRO 2.2UF 50WV    | K1K2<br>M1E<br>M1E<br>M1E |
| C128<br>C129,130<br>C131<br>C132,133<br>C140          |             |             | CC73GCH1H331J<br>CC73GCH1H270J<br>CC73GCH1H681J<br>CK73GB1A224K<br>CE04NW0J470M | CHIP C 330PF J<br>CHIP C 27PF J<br>CHIP C 680PF J<br>CHIP C 0.22UF K<br>ELECTRO 47UF 6.3WV               | M1E<br>M1E<br>M1E         |
| C141,142<br>C143<br>C150<br>C151-153                  |             |             | CE04NW1HR47M<br>CK73GB1H103K<br>CK73GB1A224K<br>CK73GB1H103K                    | ELECTRO 0.47UF 50WV<br>CHIP C 0.010UF K<br>CHIP C 0.22UF K<br>CHIP C 0.010UF K                           | K2M1E                     |
| CN1<br>CN2<br>CN3<br>CN3<br>CN4                       |             | *           | E41-0174-05<br>E40-3248-05<br>E40-9527-05<br>E41-0213-05<br>E40-9557-05         | PIN ASSY<br>PIN ASSY<br>FLAT CABLE CONNECTOR<br>FLAT CABLE CONNECTOR<br>FLAT CABLE CONNECTOR             | E                         |

E : KDC-PSW9521

E: Europe K: North America M: Other Areas

W: Without Europe

M1 : KDC-9020R

K1 : KDC-X759

K2 : KDC-MP919

⚠ indicates safety critical components.

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-91xx-xx)

| Ref.No. | A<br>d<br>d | N<br>e<br>w | Parts No.    | Description                   | Dest<br>inati<br>on |
|---------|-------------|-------------|--------------|-------------------------------|---------------------|
| △ CN5   |             |             | E40-5031-05  | FLAT CABLE CONNECTOR          |                     |
| J1      |             |             | E58-0863-15  | RECTANGULAR RECEPTACLE        |                     |
| J2      |             |             | E56-0834-05  | CYLINDRICAL RECEPTACLE        |                     |
| J3      |             |             | E04-0154-05  | RF COAXIAL CABLE RECEPTACLE   |                     |
| L1      |             |             | L33-1170-05  | CHOKO COIL ASSY               |                     |
| L2      |             |             | L33-1819-05  | CHOKO COIL                    | K2M1E               |
| L3      |             |             | L33-1029-05  | SMALL FIXED INDUCTOR          |                     |
| L4      |             |             | L40-2205-91  | SMALL FIXED INDUCTOR(22UH,J)  |                     |
| L5      |             |             | L40-4795-91  | SMALL FIXED INDUCTOR(4.7UH,J) |                     |
| L6      |             |             | L92-0075-05  | CHIP FERRITE                  |                     |
| L7      |             |             | L40-4795-91  | SMALL FIXED INDUCTOR(4.7UH,J) |                     |
| L8      |             |             | L33-1039-05  | LINE FILTER COIL              |                     |
| L9 -13  |             |             | L40-4795-91  | SMALL FIXED INDUCTOR(4.7UH,J) | K1K2                |
| L9 -14  |             |             | L40-4795-91  | SMALL FIXED INDUCTOR(4.7UH,J) | M1E                 |
| X1      |             |             | L78-0821-05  | RESONATOR                     |                     |
| X2      |             |             | L77-2738-05  | CRYSTAL RESONATOR             |                     |
| X3      |             |             | L77-2002-05  | CRYSTAL RESONATOR             | M1E                 |
| S       | 2B          |             | N80-3008-46  | PAN HEAD TAPTITE SCREW        |                     |
| T       | 2B          |             | N83-3016-46  | PAN HEAD TAPTITE SCREW        |                     |
| V       | 2B          |             | N86-2606-46  | BINDING HEAD TAPTITE SCREW    |                     |
| R1      |             |             | RK73FB2B223J | CHIP R 22K J 1/8W             |                     |
| R2      |             |             | RK73GB2A101J | CHIP R 100 J 1/10W            |                     |
| R3      |             |             | RK73GB2A223J | CHIP R 22K J 1/10W            |                     |
| R4      |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W           |                     |
| R5      |             |             | RK73FB2B221J | CHIP R 220 J 1/8W             |                     |
| R6      |             |             | RK73GB2A153J | CHIP R 15K J 1/10W            |                     |
| R7      |             |             | R92-3032-05  | CHIP R 4.3K D 1/10W           |                     |
| R8      |             |             | R92-3047-05  | CHIP R 24K D 1/10W            |                     |
| R9      |             |             | RK73GB2A152J | CHIP R 1.5K J 1/10W           |                     |
| R10     | *           |             | R92-3018-05  | CHIP R 150 D 1/10W            | K2M1E               |
| R11     | *           |             | R92-3017-05  | CHIP R 120 D 1/10W            | K2M1E               |
| R12     | *           |             | R92-3021-05  | CHIP R 680 D 1/10W            | K2M1E               |
| R13     |             |             | R92-2104-05  | CHIP R 2.2 J 1W               |                     |
| R14     |             |             | RK73GB2A152J | CHIP R 1.5K J 1/10W           |                     |
| R15     |             |             | RK73FB2B103J | CHIP R 10K J 1/8W             |                     |
| R16     |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W           |                     |
| R17     |             |             | RK73GB2A750J | CHIP R 75 J 1/10W             |                     |
| R18     |             |             | RK73GB2A272J | CHIP R 2.7K J 1/10W           |                     |
| R19     |             |             | RK73GB2A470J | CHIP R 47 J 1/10W             |                     |
| R20     |             |             | RK73GB2A752J | CHIP R 7.5K J 1/10W           |                     |
| R21     |             |             | RK73GB2A563J | CHIP R 56K J 1/10W            |                     |
| R22     | *           |             | RK73GB2A274J | CHIP R 270K J 1/10W           |                     |
| R23     |             |             | RK73GB2A470J | CHIP R 47 J 1/10W             |                     |
| R24     |             |             | RK73GB2A103J | CHIP R 10K J 1/10W            |                     |
| R25 ,26 |             |             | RK73GB2A913J | CHIP R 91K J 1/10W            |                     |
| R27     |             |             | RD14DB2H102J | SMALL-RD 1.0K J 1/2W          | K1K2                |
| R28     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W            | K1K2                |
| R29     |             |             | RK73FB2B472J | CHIP R 4.7K J 1/8W            |                     |
| R30     |             |             | RD14DB2H102J | SMALL-RD 1.0K J 1/2W          |                     |
| R31     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W            |                     |
| R32     |             |             | RD14DB2H102J | SMALL-RD 1.0K J 1/2W          |                     |
| R33     |             |             | RK73FB2B561J | CHIP R 560 J 1/8W             | K1M1E               |
| R34     |             |             | RK73GB2A473J | CHIP R 47K J 1/10W            | M1E                 |
| R35     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W            | M1E                 |

| Ref.No.  | A<br>d<br>d | N<br>e<br>w | Parts No.    | Description          | Dest<br>inati<br>on |
|----------|-------------|-------------|--------------|----------------------|---------------------|
| R35 ,36  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1K2                |
| R36      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | M1E                 |
| R37      |             |             | RK73FB2B123J | CHIP R 12K J 1/8W    |                     |
| R38      |             |             | RK73GB2A123J | CHIP R 12K J 1/10W   |                     |
| R39      |             |             | RK73GB2A562J | CHIP R 5.6K J 1/10W  |                     |
| R40      |             |             | RK73GB2A223J | CHIP R 22K J 1/10W   |                     |
| R41      |             |             | RD14DB2H332J | SMALL-RD 3.3K J 1/2W |                     |
| R43      |             |             | RK73GB2A183J | CHIP R 18K J 1/10W   |                     |
| R44      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R45      |             |             | RK73FB2B472J | CHIP R 4.7K J 1/8W   |                     |
| R46      |             |             | RD14DB2H102J | SMALL-RD 1.0K J 1/2W | K1K2                |
| R47 -49  |             |             | RK73GB2A473J | CHIP R 47K J 1/10W   | K2M1E               |
| R50      |             |             | RK73GB2A153J | CHIP R 15K J 1/10W   |                     |
| R51      |             |             | RK73GB2A473J | CHIP R 47K J 1/10W   | K2M1E               |
| R52 -54  |             |             | RK73GB2A101J | CHIP R 100 J 1/10W   | E                   |
| R55      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1E                 |
| R55 ,56  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K2                  |
| R57      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1                  |
| R58 -60  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | M1                  |
| R59      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1                  |
| R59 ,60  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | E                   |
| R60      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K2                  |
| R61      |             |             | RK73GB2A103J | CHIP R 10K J 1/10W   |                     |
| R62      |             |             | RK73GB2A221J | CHIP R 220 J 1/10W   |                     |
| R63 ,64  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R67 ,68  |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R69 ,70  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R71 ,72  |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R73      |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R74 ,75  |             |             | RK73GB2A101J | CHIP R 100 J 1/10W   |                     |
| R76      |             |             | RK73GB2A105J | CHIP R 1.0M J 1/10W  |                     |
| R77 ,78  |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R79      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R80 -82  |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R83 -85  |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R86      |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R87      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R88 ,89  |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R90 ,91  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1K2                |
| R92      |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R93      |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | M1E                 |
| R93 -96  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1K2                |
| R95 ,96  |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | M1E                 |
| R97 ,98  |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R99 ,100 |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R101     |             |             | RK73GB2A471J | CHIP R 470 J 1/10W   |                     |
| R102     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  |                     |
| R103-105 |             |             | RK73GB2A471J | CHIP R 470 J 1/10W   |                     |
| R106,107 |             |             | RK73GB2A472J | CHIP R 4.7K J 1/10W  |                     |
| R108-110 |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R111     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | E                   |
| R112     |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W  |                     |
| R113     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W  | K1K2M1              |
| R114,115 |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W  |                     |
| R116,117 |             |             | RK73GB2A103J | CHIP R 10K J 1/10W   |                     |

E : KDC-PSW9521

M1 : KDC-9020R

K1 : KDC-X759

K2 : KDC-MP919

E: Europe K: North America M: Other Areas

W: Without Europe

△ indicates safety critical components.

# KDC-9020R/MP919/PSW9521/X759

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-91xx-xx)

| Ref.No.  | A<br>d<br>d | N<br>e<br>w | Parts No.    | Description         | Dest<br>inati<br>on | Ref.No.  | A<br>d<br>d | N<br>e<br>w | Parts No.      | Description           | Dest<br>inati<br>on |
|----------|-------------|-------------|--------------|---------------------|---------------------|----------|-------------|-------------|----------------|-----------------------|---------------------|
| R119     |             |             | RK73GB2A473J | CHIP R 47K J 1/10W  |                     | R242     |             |             | RK73EB2E472J   | CHIP R 4.7K J 1/4W    |                     |
| R120     |             |             | RK73GB2A333J | CHIP R 33K J 1/10W  |                     | R243     |             |             | RK73EB2E471J   | CHIP R 470 J 1/4W     |                     |
| R121     |             |             | RK73GB2A104J | CHIP R 100K J 1/10W |                     | R244,245 |             |             | RK73EB2E102J   | CHIP R 1.0K J 1/4W    |                     |
| R122     |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W |                     | R246     |             |             | RK73EB2E471J   | CHIP R 470 J 1/4W     |                     |
| R130     |             |             | RK73EB2E102J | CHIP R 1.0K J 1/4W  | E                   | R247,248 |             |             | RK73EB2E102J   | CHIP R 1.0K J 1/4W    |                     |
| R131-133 |             |             | RK73EB2E471J | CHIP R 470 J 1/4W   | E                   | W5       |             |             | R92-1252-05    | CHIP R 0 OHM J 1/16W  | M1E                 |
| R134     |             |             | RK73EB2E102J | CHIP R 1.0K J 1/4W  | K1M1E               | D1       |             |             | 1N5393G-M5     | DIODE                 |                     |
| R135,136 |             |             | RK73EB2E103J | CHIP R 10K J 1/4W   | M1E                 | D2       |             |             | RB160L-40      | DIODE                 |                     |
| R136     |             |             | RK73EB2E103J | CHIP R 10K J 1/4W   | K1K2                | D3       |             |             | MA4056(N)-M    | ZENER DIODE           |                     |
| R140     |             |             | RK73GB2A473J | CHIP R 47K J 1/10W  |                     | D4       |             |             | HZS9A2L        | ZENER DIODE           | K1K2M1              |
| R141,142 |             |             | RK73GB2A103J | CHIP R 10K J 1/10W  |                     | D4       |             |             | MA4082(N)-L    | ZENER DIODE           |                     |
| R143     |             |             | RK73GB2A473J | CHIP R 47K J 1/10W  |                     | D5       |             |             | SFPB-54V       | DIODE                 | K2M1E               |
| R144     |             | *           | RK73GB2A821J | CHIP R 820 J 1/10W  |                     | D6       |             |             | MA4100-L       | ZENER DIODE           |                     |
| R145     |             |             | RK73GB2A153J | CHIP R 15K J 1/10W  |                     | D7       |             |             | MA4051(N)-M    | ZENER DIODE           |                     |
| R146     |             |             | RK73GB2A333J | CHIP R 33K J 1/10W  |                     | D8       |             |             | MA4110(N)-M    | ZENER DIODE           |                     |
| R147     |             |             | RK73GB2A473J | CHIP R 47K J 1/10W  |                     | D9       |             |             | MA4056(N)-M    | ZENER DIODE           |                     |
| R148     |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W |                     | D10,11   |             |             | 1SR154-400     | DIODE                 |                     |
| R151     |             |             | RK73GB2A472J | CHIP R 4.7K J 1/10W |                     | D13      |             |             | 1SR154-400     | DIODE                 |                     |
| R152,153 |             |             | RK73GB2A334J | CHIP R 330K J 1/10W |                     | D14      |             |             | 1SS133         | DIODE                 |                     |
| R154,155 |             |             | RK73GB2A472J | CHIP R 4.7K J 1/10W |                     | D15      |             |             | MA4056-M       | ZENER DIODE           | K1M1E               |
| R156     |             |             | RK73GB2A103J | CHIP R 10K J 1/10W  |                     | D16      |             |             | HZS5B1         | ZENER DIODE           | M1                  |
| R161-164 |             |             | RK73FB2B361J | CHIP R 360 J 1/8W   |                     | D16      |             |             | MA4047-M       | ZENER DIODE           | M1E                 |
| R165,166 |             |             | RK73GB2A361J | CHIP R 360 J 1/10W  |                     | D17      |             |             | MA4056(N)-M    | ZENER DIODE           |                     |
| R167-170 |             |             | RK73FB2B222J | CHIP R 2.2K J 1/8W  |                     | D18      |             |             | HZS6C2L        | ZENER DIODE           | K1K2M1              |
| R171,172 |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W |                     | D18      |             |             | MA4062(N)-M    | ZENER DIODE           |                     |
| R173-176 |             |             | RK73FB2B103J | CHIP R 10K J 1/8W   |                     | D21,22   |             |             | DAP202U        | DIODE                 |                     |
| R177,178 |             |             | RK73GB2A103J | CHIP R 10K J 1/10W  |                     | D23,24   |             |             | MA3062WA       | ZENER DIODE           | E                   |
| R179-182 |             |             | RK73FB2B223J | CHIP R 22K J 1/8W   |                     | D25      |             |             | DA204K         | DIODE                 | E                   |
| R183,184 |             |             | RK73GB2A223J | CHIP R 22K J 1/10W  |                     | D27      |             |             | DA204K         | DIODE                 |                     |
| R185-188 |             | *           | RK73FB2B820J | CHIP R 82 J 1/8W    |                     | D27      |             |             | KDS226         | DIODE                 | K1K2M1              |
| R189,190 |             | *           | RK73GB2A820J | CHIP R 82 J 1/10W   |                     | D29,30   |             |             | RD6.8M(B2)     | ZENER DIODE           |                     |
| R199     |             |             | RK73GB2A102J | CHIP R 1.0K J 1/10W |                     | D31-33   |             |             | 1SS133         | DIODE                 |                     |
| R200     |             |             | RK73GB2A221J | CHIP R 220 J 1/10W  |                     | D35-42   |             |             | 1SR154-400     | DIODE                 |                     |
| R201     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W  |                     | D43      |             |             | RD6.8MW        | ZENER DIODE           |                     |
| R202     |             |             | RK73GB2A333J | CHIP R 33K J 1/10W  |                     | D44      |             |             | RD6.8M(B2)     | ZENER DIODE           |                     |
| R203     |             |             | RK73GB2A432J | CHIP R 4.3K J 1/10W |                     | D45,46   |             |             | MA3062WA       | ZENER DIODE           |                     |
| R204     |             |             | RK73GB2A100J | CHIP R 10 J 1/10W   |                     | D49      |             |             | IMSA-6801      | SURGE ABSORBER        |                     |
| R210     |             |             | RK73EB2E101J | CHIP R 100 J 1/4W   |                     | D50-56   |             |             | DA204K         | DIODE                 |                     |
| R211,212 |             |             | RK73EB2E472J | CHIP R 4.7K J 1/4W  |                     | D50-56   |             |             | KDS226         | DIODE                 | K1K2M1              |
| R213     |             |             | RK73EB2E477J | CHIP R 4.7 J 1/4W   |                     | D60,61   |             |             | DA204U         | DIODE                 |                     |
| R214     |             |             | RK73EB2E472J | CHIP R 4.7K J 1/4W  |                     | IC1      |             | *           | UPD703033GFA03 | MI-COM IC             | K2M1E               |
| R215     |             |             | RK73EB2E100J | CHIP R 10 J 1/4W    |                     | IC1      |             | *           | UPD703033GFA04 | MI-COM IC             | K1                  |
| R216,217 |             |             | RK73EB2E472J | CHIP R 4.7K J 1/4W  |                     | IC2      |             |             | TDA7407        | ANALOGUE IC           |                     |
| R218     |             |             | RK73EB2E101J | CHIP R 100 J 1/4W   |                     | IC3      |             |             | M5237ML        | IC(VOLTAGE REGULATOR) |                     |
| R219     |             |             | RK73EB2E100J | CHIP R 10 J 1/4W    |                     | IC4      |             |             | TDA7560        | ANALOGUE IC           |                     |
| R220     |             |             | RK73EB2E101J | CHIP R 100 J 1/4W   |                     | IC5      |             |             | TDA7401        | ANALOGUE IC           |                     |
| R221     |             |             | RK73FB2B102J | CHIP R 1.0K J 1/8W  |                     | IC6      |             | *           | SI-8033JD      | ANALOGUE IC           | K2M1E               |
| R222     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W  |                     | IC7      |             |             | ICL7660SIBA    | ANALOGUE IC           |                     |
| R223     |             |             | RK73FB2B102J | CHIP R 1.0K J 1/8W  |                     | IC8      |             |             | S-80837ANNP    | MOS-IC                |                     |
| R224     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W  |                     | IC9      |             |             | HD74HC02FP     | MOS-IC                | K1K2M1              |
| R226     |             |             | RK73GB2A472J | CHIP R 4.7K J 1/10W | M1E                 | IC9      |             |             | TC74HC02AF     | MOS-IC                |                     |
| R227-233 |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W | M1E                 | IC10-13  |             |             | NJM4565M-TE2   | ANALOGUE IC           |                     |
| R230-232 |             |             | RK73GB2A222J | CHIP R 2.2K J 1/10W | K1K2                | IC14     |             |             | SAA6581T       | ANALOGUE IC           | M1E                 |
| R240     |             |             | RK73GB2A472J | CHIP R 4.7K J 1/10W |                     | IC15     |             |             | LB1930M        | ANALOGUE IC           |                     |
| R241     |             |             | RK73GB2A223J | CHIP R 22K J 1/10W  |                     |          |             |             |                |                       |                     |

E : KDC-PSW9521

M1 : KDC-9020R

K1 : KDC-X759

K2 : KDC-MP919

E: Europe K: North America M: Other Areas

W: Without Europe



indicates safety critical components.

# KDC-9020R/MP919/PSW9521/X759

## PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-91xx-xx)

| Ref.No. | A<br>d<br>d | N<br>e<br>w | Parts No.    | Description        | Dest<br>inati<br>on | Ref.No. | A<br>d<br>d | N<br>e<br>w | Parts No.     | Description             | Dest<br>inati<br>on |
|---------|-------------|-------------|--------------|--------------------|---------------------|---------|-------------|-------------|---------------|-------------------------|---------------------|
| Q1      |             |             | KTA1046      | TRANSISTOR         |                     | Q50     |             |             | 2SB1427       | TRANSISTOR              |                     |
| Q2      |             |             | 2SC4081      | TRANSISTOR         |                     | TH1     |             |             | PTH9C42BD471Q | POSITIVE RESISTOR       |                     |
| Q3      |             |             | 2SA1576A     | TRANSISTOR         |                     | A1      |             | *           | W02-3340-05   | ELECTRIC CIRCUIT MODULE |                     |
| Q4      |             |             | DTA124EUA    | DIGITAL TRANSISTOR | K1K2M1              | A2      |             |             | X86-3240-11   | TUNER UNIT              | K1K2                |
| Q4      |             |             | KRA303       | DIGITAL TRANSISTOR | K1K2M1              | A2      |             |             | X86-3242-70   | TUNER UNIT              | M1                  |
| Q5      |             |             | DTC124EUA    | DIGITAL TRANSISTOR | K1K2M1              | A2      |             |             | X86-3342-71   | TUNER UNIT              | E                   |
| Q5      |             | *           | KRC403       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q6      |             |             | DTC144EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q6      |             | *           | KRC404       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q7      |             |             | DTA124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q7      |             |             | KRA303       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q8      |             |             | KTA1046      | TRANSISTOR         | K2M1E               |         |             |             |               |                         |                     |
| Q9      |             |             | 2SD2375      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q10     |             |             | 2SC4081      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q11     |             |             | DTC124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q11     |             | *           | KRC403       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q12     |             |             | DTA124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q12     |             |             | KRA303       | DIGITAL TRANSISTOR |                     |         |             |             |               |                         |                     |
| Q13     |             |             | KTA1046      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q14     |             |             | 2SC4081      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q15     |             |             | 2SB1443      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q16 ,17 |             |             | 2SC4081      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q18 ,19 |             |             | 2SA1576A     | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q20     |             |             | 2SC4081      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q21     |             |             | 2SA1576A     | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q22     |             |             | 2SC4081      | TRANSISTOR         | K1K2                |         |             |             |               |                         |                     |
| Q23     |             | *           | DTC114YUA    | DIGITAL TRANSISTOR | K1K2                |         |             |             |               |                         |                     |
| Q23     |             |             | KRC407       | DIGITAL TRANSISTOR | K1K2                |         |             |             |               |                         |                     |
| Q24 ,25 |             |             | 2SB1277(Q,R) | TRANSISTOR         | K1K2                |         |             |             |               |                         |                     |
| Q25     |             |             | 2SB1277(Q,R) | TRANSISTOR         | M1E                 |         |             |             |               |                         |                     |
| Q26     |             |             | 2SA1576A     | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q27     |             |             | DTA124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q27     |             |             | KRA303       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q28     |             |             | DTC114YUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q28     |             | *           | KRC407       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q29     |             |             | DTA123JK     | DIGITAL TRANSISTOR | K1M1E               |         |             |             |               |                         |                     |
| Q29     |             |             | KRA105S      | DIGITAL TRANSISTOR | K1M1                |         |             |             |               |                         |                     |
| Q30     |             |             | DTC144EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q30     |             | *           | KRC404       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q31 ,32 |             |             | 2SC4081      | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q33 ,34 |             |             | DTA124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q33 ,34 |             |             | KRA303       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q35     |             |             | 2SC4081      | TRANSISTOR         | K1K2M1              |         |             |             |               |                         |                     |
| Q36     |             |             | DTC124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q36     |             | *           | KRC403       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q37 -43 |             |             | DTC143TUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q37 -43 |             |             | KRC410       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q45     |             |             | DTC124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q45     |             | *           | KRC403       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q46     |             |             | 2SB1188(Q,R) | TRANSISTOR         |                     |         |             |             |               |                         |                     |
| Q47     |             |             | DTC124EUA    | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q47     |             | *           | KRC403       | DIGITAL TRANSISTOR | K1K2M1              |         |             |             |               |                         |                     |
| Q48     |             |             | 2SB1188(Q,R) | TRANSISTOR         | M1E                 |         |             |             |               |                         |                     |
| Q49     |             |             | DTC143TUA    | DIGITAL TRANSISTOR | M1                  |         |             |             |               |                         |                     |
| Q49     |             |             | KRC410       | DIGITAL TRANSISTOR |                     |         |             |             |               |                         |                     |

E : KDC-PSW9521

M1 : KDC-9020R

K1 : KDC-X759

K2 : KDC-MP919


E: Europe K: North America M: Other Areas

W: Without Europe

 indicates safety critical components.

# EXPLODED VIEW

X92-4430-0x  
X92-4450-0x

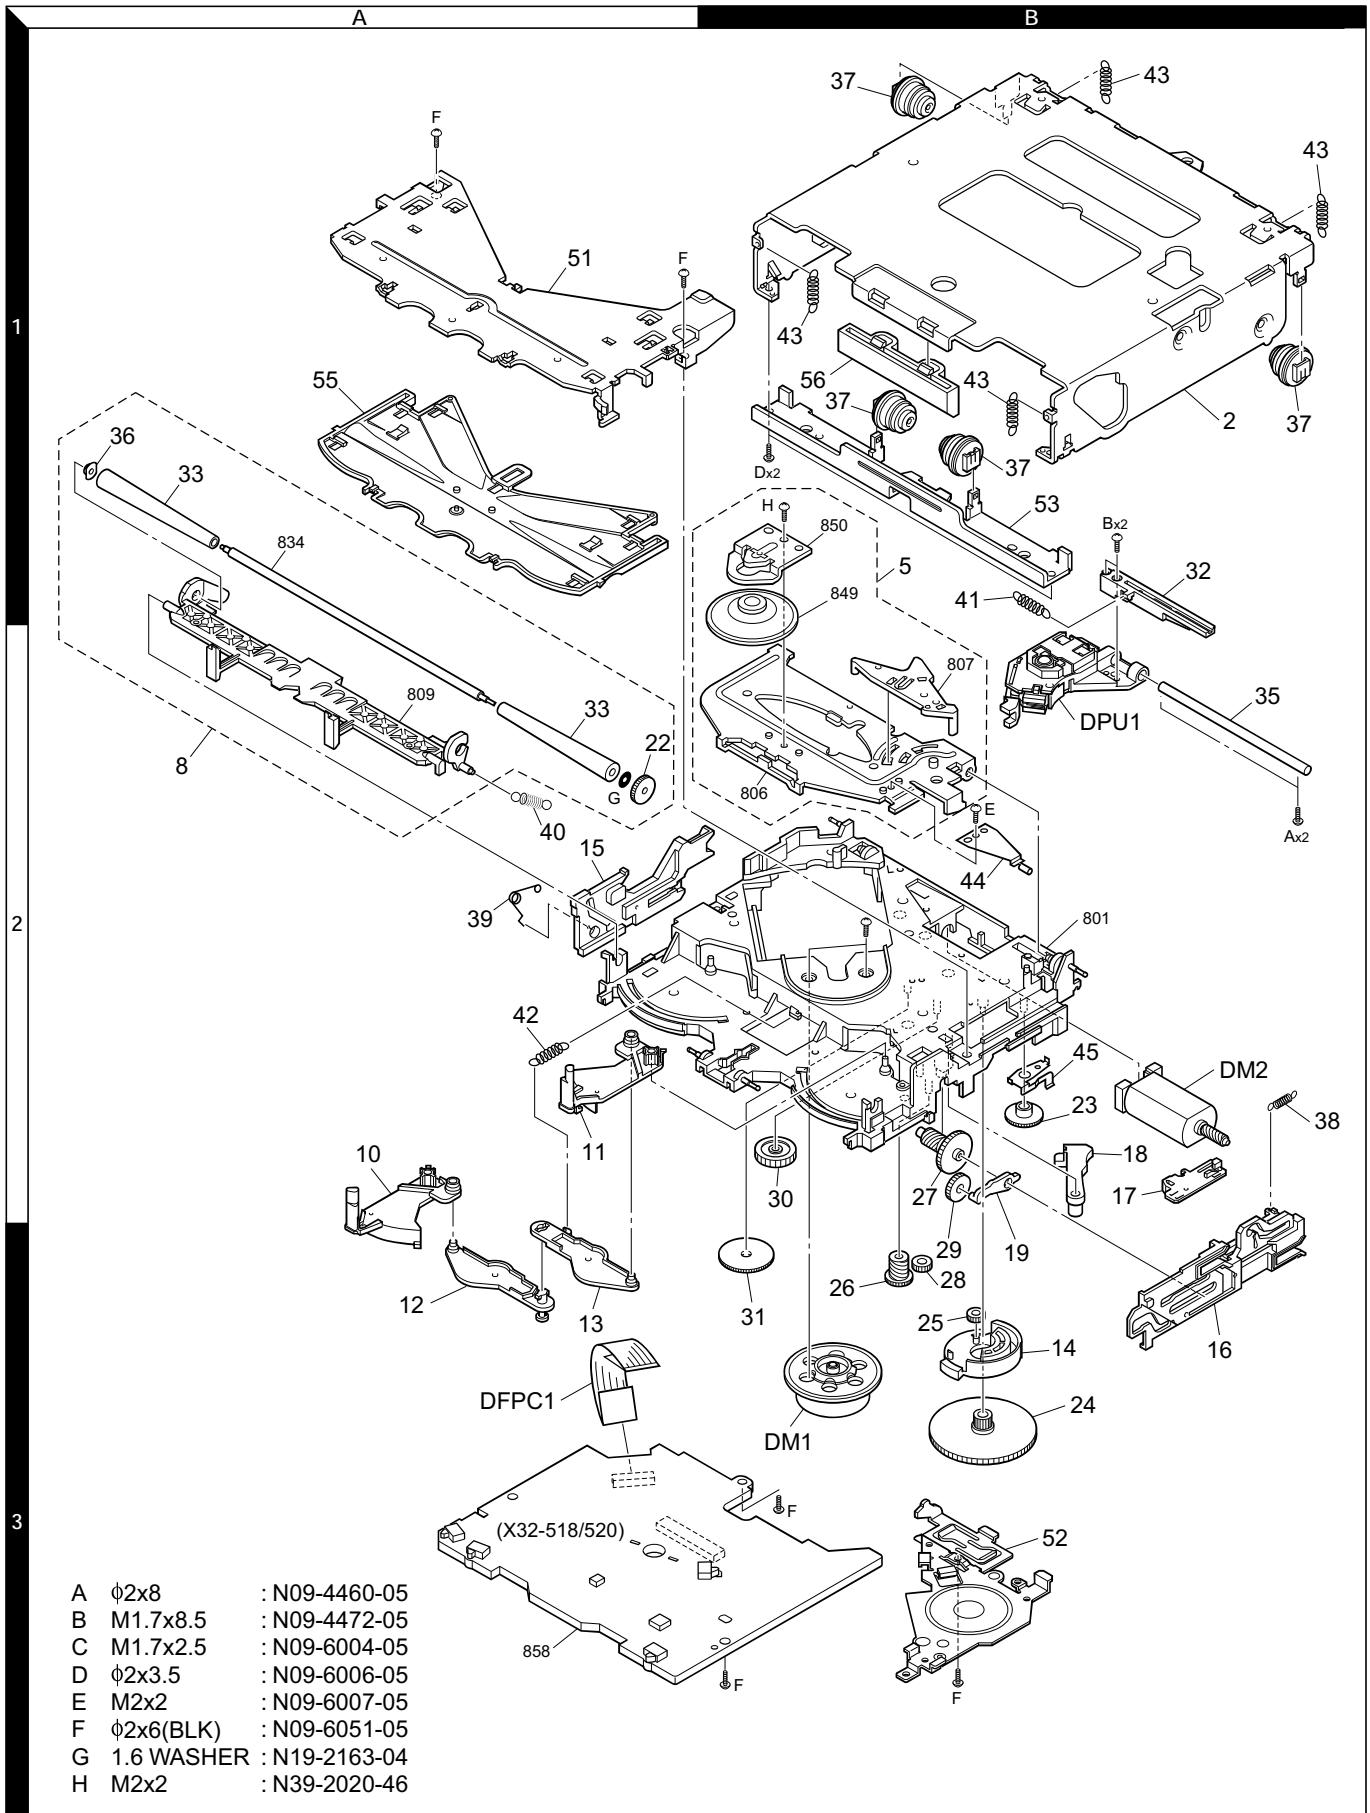

|   |            |               |
|---|------------|---------------|
| A | φ2x8       | : N09-4460-05 |
| B | M1.7x8.5   | : N09-4472-05 |
| C | M1.7x2.5   | : N09-6004-05 |
| D | φ2x3.5     | : N09-6006-05 |
| E | M2x2       | : N09-6007-05 |
| F | φ2x6(BLK)  | : N09-6051-05 |
| G | 1.6 WASHER | : N19-2163-04 |
| H | M2x2       | : N39-2020-46 |

Parts with the exploded numbers larger than 700 are not supplied.

X92-4430-0x  
X92-4450-0x

PARTS LIST

\*New Parts  
Parts without **Parts No.** are not supplied.  
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.  
Teile ohne **Parts No.** werden nicht geliefert.

| Ref. No.                                    | A<br>d<br>d | N<br>e<br>w | Parts No.                                                                     | Description                                                                                  |                                                  |                                           | D<br>e<br>s<br>t<br>i<br>n<br>a<br>t<br>i<br>o<br>n |
|---------------------------------------------|-------------|-------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------|-----------------------------------------------------|
| CD PLAYER UNIT (X32-5180-0X, X32-5200-0X)   |             |             |                                                                               |                                                                                              |                                                  |                                           |                                                     |
| C1 ,2<br>C3<br>C4<br>C5<br>C6               |             |             | CK73GB0J105K<br>CK73FB1A225K<br>C92-0566-05<br>CC73GCH1H220J<br>CC73GCH1H030C | CHIP C<br>CHIP C<br>CHIP-TAN<br>CHIP C<br>CHIP C                                             | 1.0UF<br>2.2UF<br>10UF<br>22PF<br>3.0PF          | K<br>K<br>6.3WV<br>J<br>C                 |                                                     |
| C7<br>C8<br>C10<br>C11<br>C12               |             |             | CK73GB1C104K<br>CK73GB0J105K<br>CK73GB1H472K<br>CK73GB1H682K<br>CK73GB1H332K  | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 0.10UF<br>1.0UF<br>4700PF<br>6800PF<br>3300PF    | K<br>K<br>K<br>K<br>K                     |                                                     |
| C13<br>C14<br>C15<br>C16<br>C17             |             |             | CK73GB1C333K<br>CK73GB1H472K<br>CK73GB1E473K<br>CC73GCH1H221J<br>CK73GB1H472K | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 0.033UF<br>4700PF<br>0.047UF<br>220PF<br>4700PF  | K<br>K<br>K<br>J<br>K                     |                                                     |
| C18<br>C19 ,20<br>C21<br>C23<br>C24         |             |             | CC73GCH1H331J<br>CK73GB1C104K<br>CK73FB1A225K<br>CK73GB1H102K<br>CK73GB1E223K | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 330PF<br>0.10UF<br>2.2UF<br>1000PF<br>0.022UF    | J<br>K<br>K<br>K<br>K                     |                                                     |
| C25<br>C26<br>C28<br>C29<br>C33             |             |             | CK73GB1H153K<br>CK73GB0J105K<br>CK73GB0J105K<br>CK73GB1C104K<br>CK73GB1C104K  | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 0.015UF<br>1.0UF<br>1.0UF<br>0.10UF<br>0.10UF    | K<br>K<br>K<br>K<br>K                     |                                                     |
| C35<br>C39<br>C40<br>C41<br>C42             |             |             | CK73GB1C104K<br>CK73GB1H152K<br>CK73GB1H103K<br>CK73EB1C225K<br>CK73GB1H152K  | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 0.10UF<br>1500PF<br>0.010UF<br>2.2UF<br>1500PF   | K<br>K<br>K<br>K<br>K                     |                                                     |
| C44<br>C46<br>C51<br>C55<br>C67 ,68         |             |             | CK73GB1H103K<br>CK73GB1E473K<br>CK73GB1C104K<br>CK73GB1C104K<br>CK73GB1C104K  | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 0.010UF<br>0.047UF<br>0.10UF<br>0.10UF<br>0.10UF | K<br>K<br>K<br>K<br>K                     |                                                     |
| C71 ,72<br>C77 ,78<br>C79 ,80<br>C85<br>C89 |             |             | CK73GB1H471K<br>CC73GCH1H680J<br>CK73GB1H222K<br>CK73GB1C104K<br>CK73GB1H222K | CHIP C<br>CHIP C<br>CHIP C<br>CHIP C<br>CHIP C                                               | 470PF<br>68PF<br>2200PF<br>0.10UF<br>2200PF      | K<br>J<br>K<br>K<br>K                     |                                                     |
| CN1<br>CN1<br>CN2<br>CN2                    |             |             | E40-9536-05<br>E41-0193-05<br>E40-9527-05<br>E41-0213-05                      | FLAT CABLE CONNECTOR<br>FLAT CABLE CONNECTOR<br>FLAT CABLE CONNECTOR<br>FLAT CABLE CONNECTOR |                                                  |                                           |                                                     |
| X1                                          |             | *           | L78-0851-05                                                                   | RESONATOR (16.93MHZ)                                                                         |                                                  |                                           |                                                     |
| CP1<br>CP2<br>R3<br>R5<br>R6                |             |             | R90-1019-05<br>R90-1014-05<br>RK73GB2A272J<br>RK73GB2A361J<br>RK73GB2A272J    | MULTI-COMP<br>MULTI-COMP<br>CHIP R<br>CHIP R<br>CHIP R                                       | 100<br>100<br>2.7K<br>360<br>2.7K                | X2<br>X4<br>J 1/10W<br>J 1/10W<br>J 1/10W |                                                     |
| R9<br>R10 ,11                               |             |             | RK73FB2B100J<br>RK73GB2A562J                                                  | CHIP R<br>CHIP R                                                                             | 10<br>5.6K                                       | J 1/8W<br>J 1/10W                         |                                                     |

A : X92-4430-00 (DXM-6010W) A1 : X92-4430-01 (DXM-6011W)  
A2 : X92-4430-02 (DXM-6012W) A3 : X92-4430-03 (DXM-6013W)

| Ref. No.  | A<br>d<br>d | N<br>e<br>w | Parts No.    | Description |      |         | D<br>e<br>s<br>t<br>i<br>n<br>a<br>t<br>i<br>o<br>n |
|-----------|-------------|-------------|--------------|-------------|------|---------|-----------------------------------------------------|
| R12       |             |             | RK73GB2A682J | CHIP R      | 6.8K | J 1/10W |                                                     |
| R13       |             |             | RK73GB2A392J | CHIP R      | 3.9K | J 1/10W |                                                     |
| R15       |             |             | RK73GB2A824J | CHIP R      | 820K | J 1/10W |                                                     |
| R16       |             |             | RK73GB2A223J | CHIP R      | 22K  | J 1/10W |                                                     |
| R17       |             |             | RK73GB2A393J | CHIP R      | 39K  | J 1/10W |                                                     |
| R18       |             |             | RK73GB2A392J | CHIP R      | 3.9K | J 1/10W |                                                     |
| R19       |             |             | RK73GB2A473J | CHIP R      | 47K  | J 1/10W |                                                     |
| R20       |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W |                                                     |
| R21       |             |             | RK73GB2A244J | CHIP R      | 240K | J 1/10W |                                                     |
| R22       |             | *           | RK73GB2A623J | CHIP R      | 62K  | J 1/10W |                                                     |
| R32       |             |             | RK73GB2A683J | CHIP R      | 68K  | J 1/10W |                                                     |
| R34       |             |             | RK73GB2A363J | CHIP R      | 36K  | J 1/10W |                                                     |
| R35       |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W |                                                     |
| R36       |             |             | RK73GB2A151J | CHIP R      | 150  | J 1/10W |                                                     |
| R37       |             |             | RK73GB2A471J | CHIP R      | 470  | J 1/10W |                                                     |
| R38       |             |             | RK73GB2A224J | CHIP R      | 220K | J 1/10W |                                                     |
| R40       |             |             | RK73GB2A133J | CHIP R      | 13K  | J 1/10W |                                                     |
| R46       |             |             | RK73GB2A102J | CHIP R      | 1.0K | J 1/10W |                                                     |
| R47       |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| R49       |             |             | RK73GB2A472J | CHIP R      | 4.7K | J 1/10W |                                                     |
| R52       |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W |                                                     |
| R53       |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| R54       |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W |                                                     |
| R70       |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| R71       |             |             | RK73GB2A183J | CHIP R      | 18K  | J 1/10W |                                                     |
| R73       |             |             | RK73GB2A683J | CHIP R      | 68K  | J 1/10W |                                                     |
| R74       |             |             | RK73GB2A123J | CHIP R      | 12K  | J 1/10W |                                                     |
| R75       |             |             | RK73GB2A333J | CHIP R      | 33K  | J 1/10W |                                                     |
| R76       |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| R79 ,80   |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| R81       |             |             | RK73GB2A333J | CHIP R      | 33K  | J 1/10W |                                                     |
| R82       |             |             | RK73GB2A223J | CHIP R      | 22K  | J 1/10W |                                                     |
| R84       |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| R101 ,102 |             |             | RK73GB2A332J | CHIP R      | 3.3K | J 1/10W |                                                     |
| R103 ,104 |             |             | RK73GB2A562J | CHIP R      | 5.6K | J 1/10W |                                                     |
| R107 ,108 |             |             | RK73FB2B331J | CHIP R      | 330  | J 1/8W  |                                                     |
| R110      |             |             | RK73FB2B201J | CHIP R      | 200  | J 1/8W  |                                                     |
| R117 ,118 |             |             | RK73FB2B203J | CHIP R      | 20K  | J 1/8W  |                                                     |
| R121 ,122 |             |             | RK73FB2B203J | CHIP R      | 20K  | J 1/8W  |                                                     |
| R125 ,126 |             |             | RK73FB2B203J | CHIP R      | 20K  | J 1/8W  |                                                     |
| R202      |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W |                                                     |
| R213      |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W | BB1B2                                               |
| R213      |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W | B3                                                  |
| R214      |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W | AA1A2                                               |
| R214      |             |             | RK73GB2A104J | CHIP R      | 100K | J 1/10W | A3                                                  |
| R218      |             |             | RK73GB2A473J | CHIP R      | 47K  | J 1/10W |                                                     |
| R233      |             |             | RK73GB2A622J | CHIP R      | 6.2K | J 1/10W |                                                     |
| R234      |             |             | RK73GB2A103J | CHIP R      | 10K  | J 1/10W |                                                     |
| S1 ,2     |             |             | S68-0863-05  | PUSH SWITCH |      |         |                                                     |
| S3        |             |             | S68-0862-05  | PUSH SWITCH |      |         |                                                     |
| S4        |             |             | S68-0864-05  | PUSH SWITCH |      |         | A2A3B2                                              |
| S4        |             |             | S68-0864-05  | PUSH SWITCH |      |         | B3                                                  |
| D1        |             |             | DAN202U      | DIODE       |      |         |                                                     |
| D2        |             |             | MA8051-L     | ZENER DIODE |      |         |                                                     |

B : X92-4450-00 (DXM-6110W) B1 : X92-4450-01 (DXM-6111W)  
B2 : X92-4450-02 (DXM-6112W) B3 : X92-4450-03 (DXM-6113W)

⚠ indicates safety critical components.

# PARTS LIST

\* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

## CD PLAYER UNIT (X32-5180-0X, X32-5200-0X)

| Ref. No. | A<br>d<br>d | N<br>e<br>w | Parts No.   | Description        | P<br>e<br>s<br>t<br>i<br>n<br>a<br>t<br>i<br>o<br>n |
|----------|-------------|-------------|-------------|--------------------|-----------------------------------------------------|
| D3       |             |             | DA204U      | DIODE              |                                                     |
| D4       |             |             | DAN202U     | DIODE              |                                                     |
| IC1      |             |             | AN22000AA   | ANALOGUE IC        |                                                     |
| IC2      |             | *           | MN662773KH2 | MOS-IC             | BB1B2                                               |
| IC2      |             | *           | MN662773KH2 | MOS-IC             | B3                                                  |
| IC2      |             |             | MN662774KJ2 | MOS-IC             | AA1A2                                               |
| IC2      |             |             | MN662774KJ2 | MOS-IC             | A3                                                  |
| IC4      |             |             | BA5824FP    | ANALOGUE IC        |                                                     |
| IC6      |             |             | NJM4580M1   | ANALOGUE IC        |                                                     |
| Q1       |             |             | MCH6101     | TRANSISTOR         |                                                     |
| Q2       |             |             | DTC124EUA   | DIGITAL TRANSISTOR |                                                     |
| Q3       |             |             | DTA143XUA   | DIGITAL TRANSISTOR |                                                     |
| Q4       |             |             | 2SA1362(Y)  | TRANSISTOR         |                                                     |
| Q5       |             |             | DTC124EUA   | DIGITAL TRANSISTOR |                                                     |

### CD MECHANISM ASSY (X92-4430-0X, X92-4450-0X)

|    |    |   |             |                                |  |
|----|----|---|-------------|--------------------------------|--|
| 2  | 1B |   | A10-4827-12 | CHASSIS (OUTER)                |  |
| 5  | 1B |   | D10-4576-23 | ARM ASSY (CLAMPER ASSY)        |  |
| 8  | 2A |   | D10-4579-03 | LEVER ASSY (ROLLER ASSY)       |  |
| 10 | 3A |   | D10-4581-13 | ARM (DISC L)                   |  |
| 11 | 2A |   | D10-4582-13 | ARM (DISC L)                   |  |
| 12 | 3A |   | D10-4583-03 | ARM (JOINT L)                  |  |
| 13 | 3A |   | D10-4584-03 | ARM (JOINT R)                  |  |
| 14 | 3B |   | D10-4585-03 | ARM (CARRIER)                  |  |
| 15 | 2A |   | D10-4586-03 | SLIDER (L)                     |  |
| 16 | 3B | * | D10-4587-12 | SLIDER (R)                     |  |
| 17 | 3B |   | D10-4588-03 | SLIDER (TRIG)                  |  |
| 18 | 3B |   | D10-4595-04 | ARM (LOCK)                     |  |
| 19 | 3B |   | D10-4596-04 | ARM (ROLLER)                   |  |
| 22 | 2A |   | D13-2151-04 | GEAR (ROLLER)                  |  |
| 23 | 2B |   | D13-2152-04 | GEAR (HELICAL 1)               |  |
| 24 | 3B |   | D13-2153-04 | GEAR (SUN)                     |  |
| 25 | 3B |   | D13-2154-04 | GEAR (PLANET)                  |  |
| 26 | 3B |   | D13-2155-04 | WORM (2)                       |  |
| 27 | 3B |   | D13-2156-04 | GEAR (HELICAL 2)               |  |
| 28 | 3B |   | D13-2157-04 | GEAR (LOAD 1)                  |  |
| 29 | 3B |   | D13-2158-04 | GEAR (LOAD 2)                  |  |
| 30 | 3B |   | D13-2168-04 | GEAR (PICK 1)                  |  |
| 31 | 3B |   | D13-2171-04 | GEAR (PICK 2)                  |  |
| 32 | 2B |   | D13-2172-03 | RACK (GEAR)                    |  |
| 33 | 2A |   | D14-0759-04 | ROLLER (N100X3DIES)            |  |
| 35 | 2B |   | D21-2382-04 | SHAFT (PICK)                   |  |
| 36 | 1A |   | D23-0954-04 | RETAINER                       |  |
| 37 | 1B |   | D39-0246-05 | DAMPER                         |  |
| 38 | 2B |   | G01-3072-04 | EXTENSION SPRING (TRIGGER)     |  |
| 39 | 2A |   | G01-3073-04 | TORSION COIL SPRING (ROLLER L) |  |
| 40 | 2A |   | G01-3074-04 | EXTENSION SPRING (ROLLER R)    |  |
| 41 | 2B |   | G01-3075-04 | EXTENSION SPRING (PICKUP)      |  |
| 42 | 2A |   | G01-3076-04 | EXTENSION SPRING (JOINT SP)    |  |
| 43 | 1B |   | G01-3077-04 | EXTENSION SPRING (FLOATING)    |  |
| 44 | 2B |   | G02-1399-04 | FLAT SPRING (CLAMP)            |  |
| 45 | 2B |   | G02-1408-04 | FLAT SPRING (WORM)             |  |
| 51 | 1A |   | J21-9676-12 | MOUNTING HARDWARE (GUIDE BKT)  |  |
| 52 | 3B |   | J21-9677-02 | MOUNTING HARDWARE (GEAR BKT)   |  |

| Ref. No. | A<br>d<br>d | N<br>e<br>w | Parts No.   | Description                    | P<br>e<br>s<br>t<br>i<br>n<br>a<br>t<br>i<br>o<br>n |
|----------|-------------|-------------|-------------|--------------------------------|-----------------------------------------------------|
| 53       | 1B          |             | J21-9678-03 | MOUNTING HARDWARE (DAMPER BKT) |                                                     |
| 55       | 1A          |             | J90-1001-11 | GUIDE (1)                      |                                                     |
| 56       | 1B          |             | J90-1023-03 | GUIDE (2)                      |                                                     |
| DFPC1    | 2B          |             | J84-0128-15 | FLEXIBLE P. W. B. (PICKUP FPC) |                                                     |
| A        | 2B          |             | N09-4460-05 | TAPTITE SCREW (OVAL P TAPTIT)  |                                                     |
| B        | 1B          |             | N09-4472-05 | MACHINE SCREW (M1.7X8.5)       |                                                     |
| C        | 2B          |             | N09-6004-05 | MACHINE SCREW (M1.7X2.5 1B-L)  |                                                     |
| D        | 1B          |             | N09-6006-05 | TAPTITE SCREW (PAN ST 2X3.5T)  |                                                     |
| E        | 2B          |             | N09-6007-05 | MACHINE SCREW (PAN M2X2)       |                                                     |
| F        | 1A          |             | N09-6051-05 | TAPTITE SCREW (BIND P 2X5)     |                                                     |
| G        | 2A          |             | N19-2163-04 | FLAT WASHER (1.6X0.25X6)       |                                                     |
| H        | 1B          |             | N39-2020-46 | PAN HEAD MACHIN SCREW (M2X2)   |                                                     |
| DM1      | 3B          |             | T42-1066-04 | DC MOTOR ASSY (SP)             |                                                     |
| DM2      | 2B          |             | T42-1067-04 | DC MOTOR ASSY (LO)             |                                                     |
| DPU1     | 2B          |             | T25-0105-15 | OPTICAL PICKUP HEAD            |                                                     |

A : X92-4430-00 (DXM-6010W) A1 : X92-4430-01 (DXM-6011W)  
A2 : X92-4430-02 (DXM-6012W) A3 : X92-4430-03 (DXM-6013W)

B : X92-4450-00 (DXM-6110W) B1 : X92-4450-01 (DXM-6111W)  
B2 : X92-4450-02 (DXM-6112W) B3 : X92-4450-03 (DXM-6113W)