


1 2 3 4

9. EXPLODED VIEWS AND PARTS LIST

NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
● The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
● Screws adjacent to ▼ mark on product are used for disassembly.
● For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

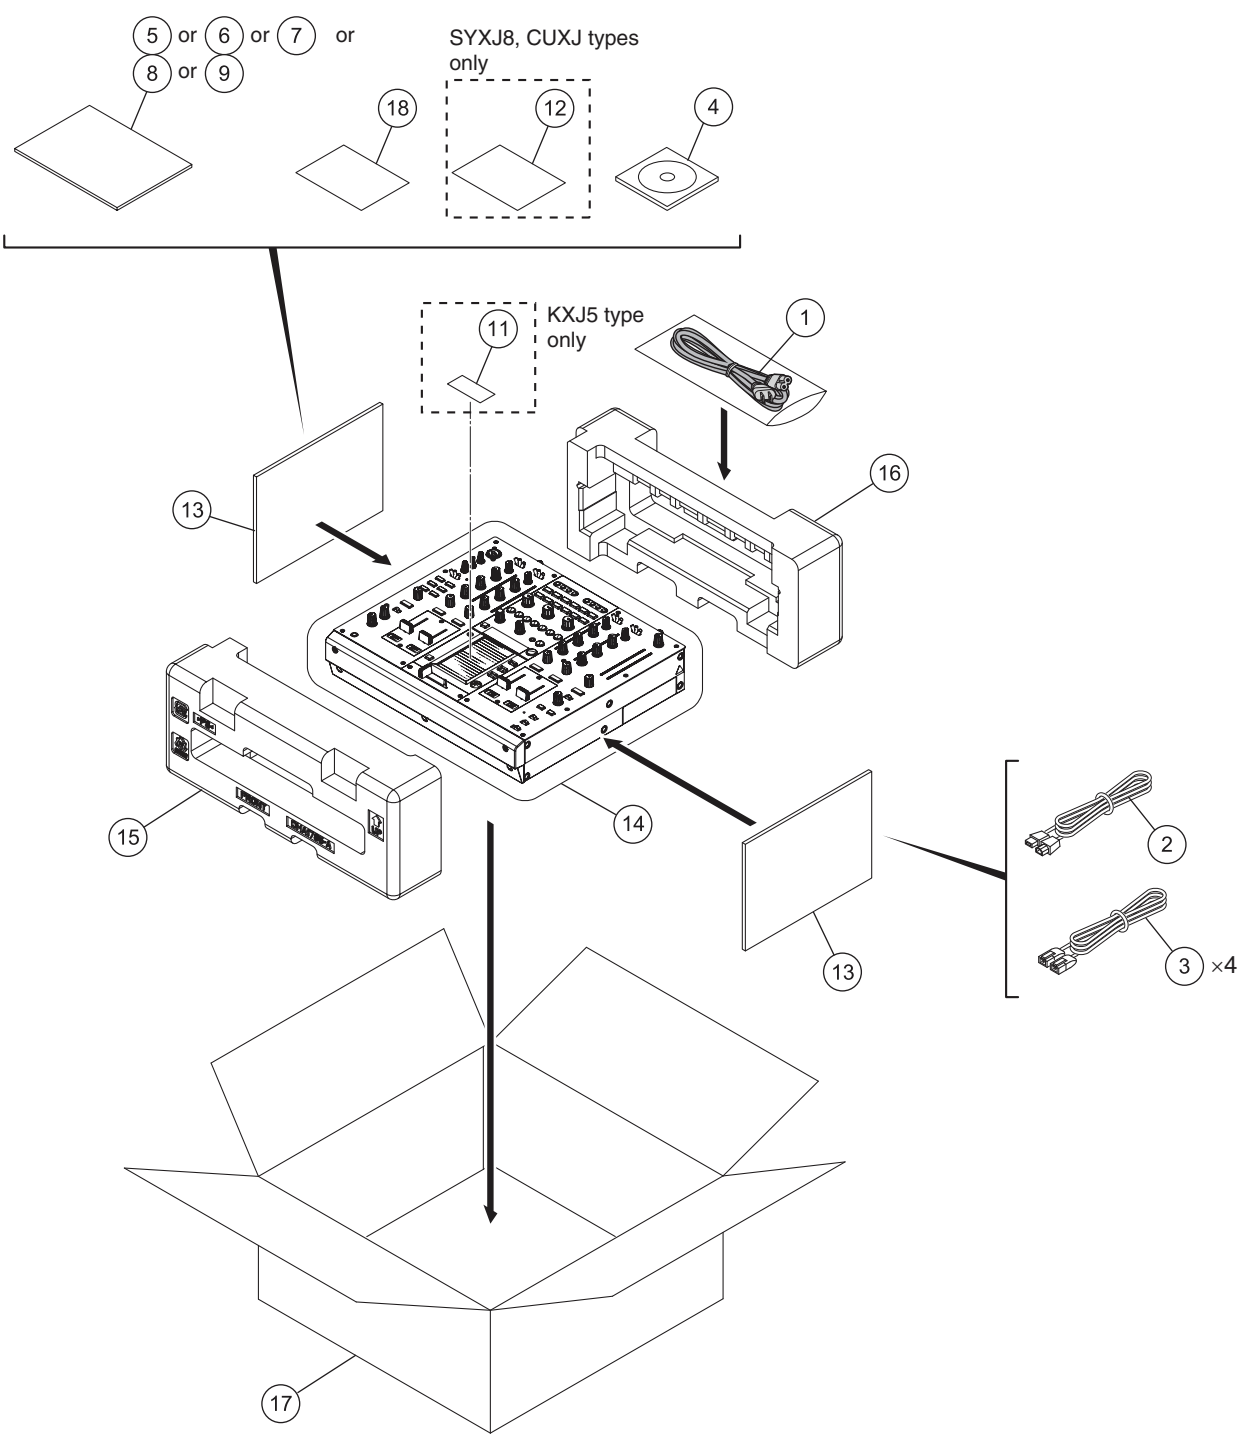

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power Cable	See Contrast table (2)
	2	USB Cable	DDE1128
	3	LAN Cable	DDE1131 or DDE1137
	4	CD-ROM	DXX2603
	5	Operating Instructions	See Contrast table (2)
	6	Operating Instructions	See Contrast table (2)
	7	Operating Instructions	See Contrast table (2)
	8	Operating Instructions	See Contrast table (2)
	9	Operating Instructions	See Contrast table (2)
	10	•••••	
	11	Recycle Label (M)	See Contrast table (2)
NSP	12	Warranty Card	See Contrast table (2)
NSP	13	Polyethylene Bag	AHG7117
	14	Mirror Mat (1200 x 1000)	DHL1169
	15	Pad F (DJM-2000)	DHA1785
	16	Pad R (DJM-2000)	DHA1786
	17	Packing Case	See Contrast table (2)
NSP	18	Flyer	See Contrast table (2)

(2) CONTRAST TABLE

DJM-2000/SYXJ8, CUXJ, LXJ, KXJ5 and AXJ5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-2000 /SYXJ8	DJM-2000 /CUXJ	DJM-2000 /LXJ	DJM-2000 /KXJ5	DJM-2000 /AXJ5
⚠	1	Power Cable	ADG7062	DDG1028	ADG7062	XDG3066	ADG7105
	5	Operating Instructions (En, Fr, De, It, NI, Es, Ru)	DRB1497	Not used	Not used	Not used	Not used
	6	Operating Instructions (En, Fr)	Not used	DRB1496	Not used	Not used	Not used
	7	Operating Instructions (En, Es, Zhtw)	Not used	Not used	DRB1498	Not used	Not used
	8	Operating Instructions (Ko)	Not used	Not used	Not used	DRB1500	Not used
	9	Operating Instructions (Zhcn, En)	Not used	Not used	Not used	Not used	DRB1499
	11	Recycle Label (M)	Not used	Not used	Not used	DRW2307	Not used
NSP	12	Warranty Card	ARY7107	ARY7043	Not used	Not used	Not used
	17	Packing Case	DHG2953	DHG2954	DHG2955	DHG2886	DHG2885
NSP	18	Flyer	DRH1108	DRH1109	DRH1109	DRH1107	DRH1107

9.2 EXTERIOR SECTION

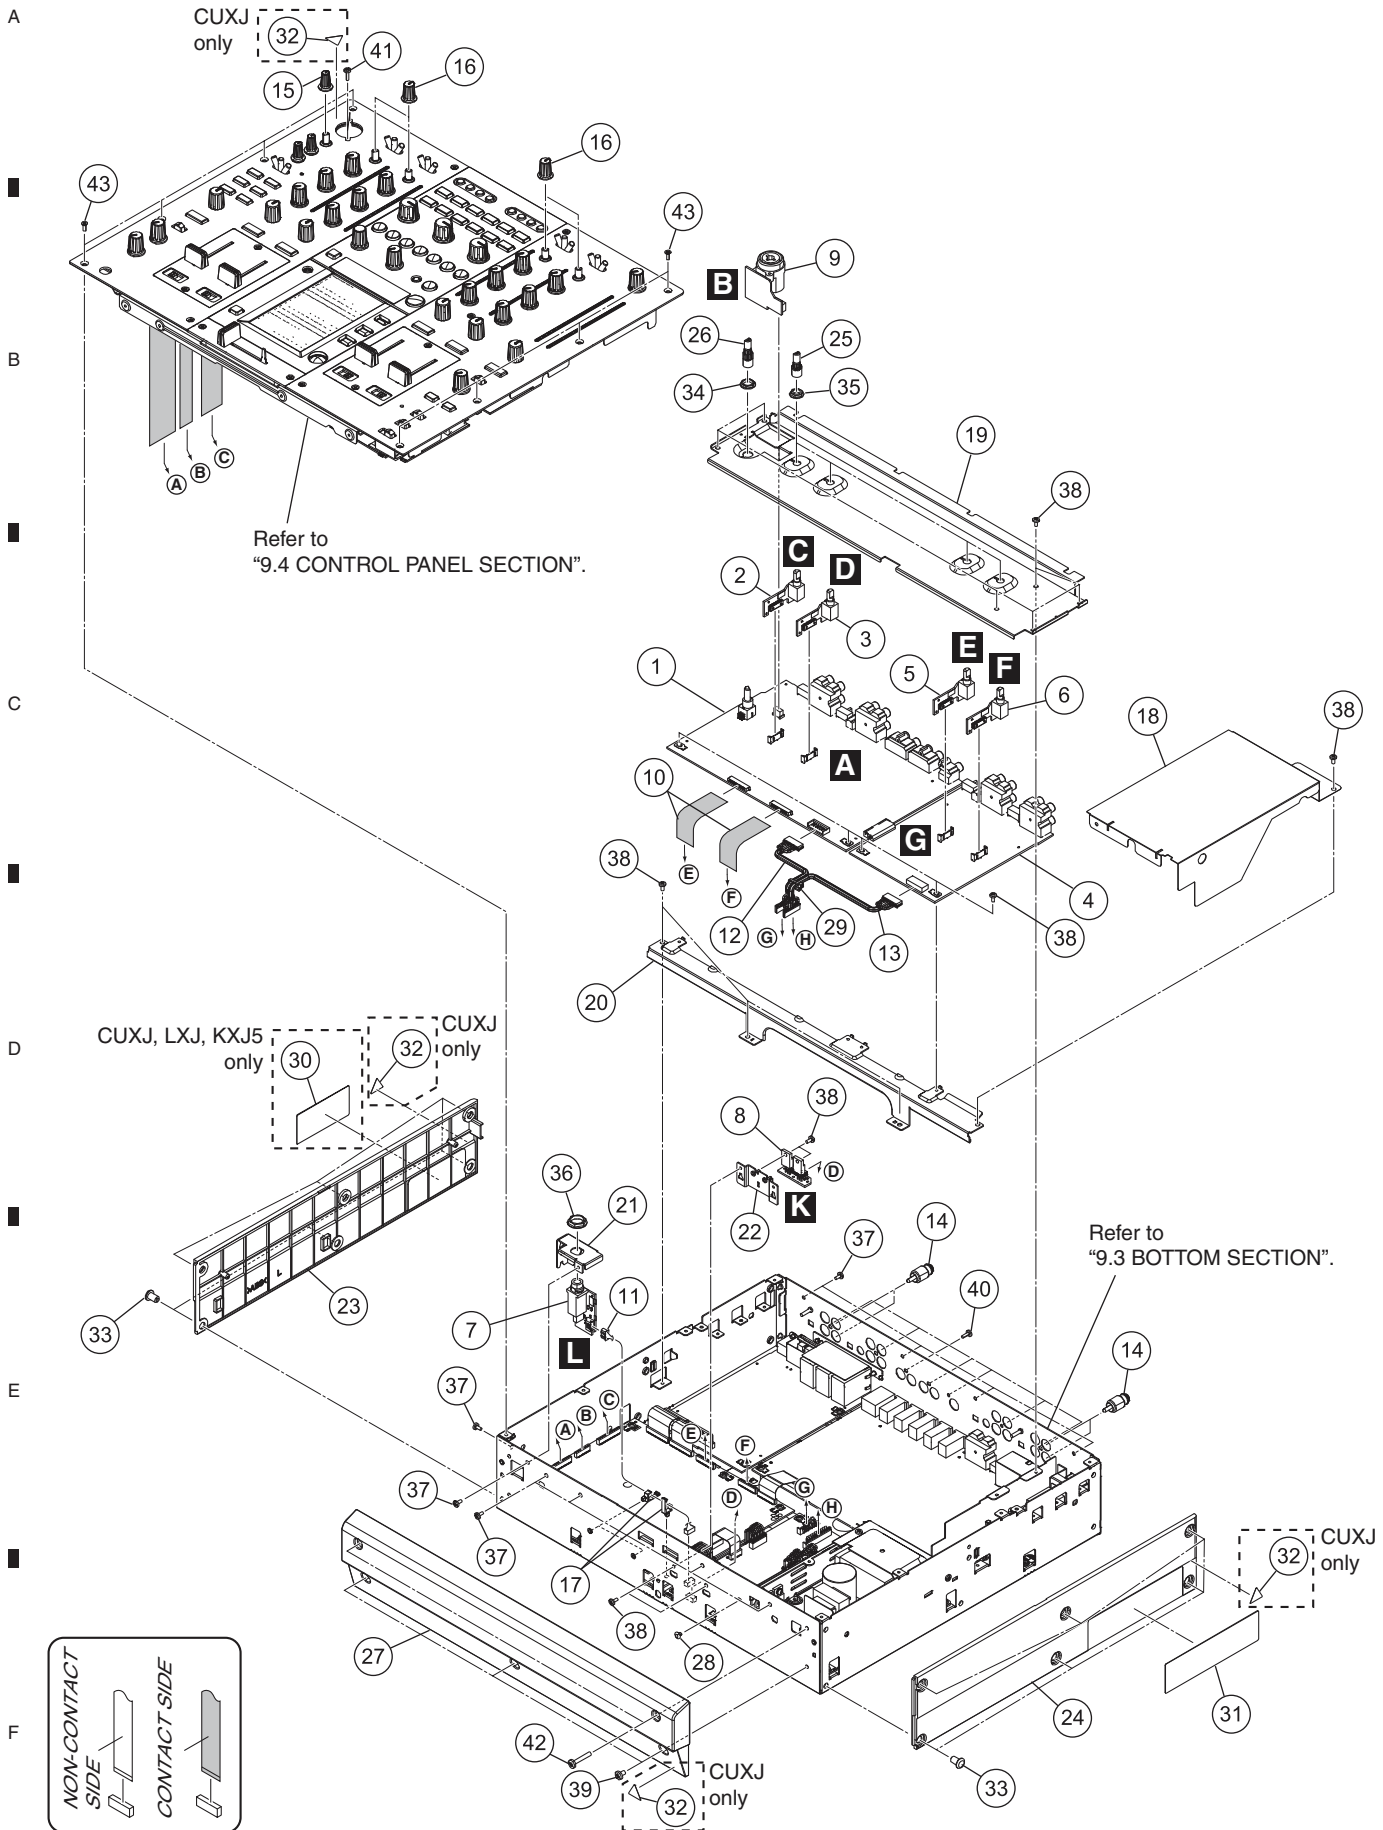

(1) EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	AIN1 Assy	DWX2922	26	Extension Shaft B	DNK5366	
2	TRIM1 Assy	DWX2935	27	Front Panel	DNK5371	A
3	TRIM2 Assy	DWX2936	28	Push Rivet	XEC3034	
4	AIN2 Assy	DWX2923	29	Binder	ZCA-SKB90BK	
5	TRIM3 Assy	DWX2937	NSP 30	Caution Label	See Contrast table (2)	
6	TRIM4 Assy	DWX2938	NSP 31	Name Label	See Contrast table (2)	
7	HPJK Assy	DWX2939	NSP 32	Caution Label	See Contrast table (2)	
8	HREG Assy	DWX2940	33	Rivet (Plastic)	AEC1877	
9	MCJK Assy	DWX2934	34	Flange Nut M9	DBN1008	
10	20P FFC	DDD1510	35	Flange Nut M7	DBN1011	
11	Connector Assy	PF04PP-D20	36	Flange Nut M12	DBN1012	B
12	Connector Assy	PF07EE-D10	37	Screw	BBZ30P060FTB	
13	Connector Assy	PF07EE0D12	38	Screw	BBZ30P060FTC	
14	Short Pin Plug	AKM7008	39	Screw	BCZ40P060FTB	
15	Rotary SW Knob S (B)	DAA1178	40	Screw	BPZ30P080FTB	
16	Rotary SW Knob S (C)	DAA1204	41	Screw	BPZ30P100FTB	
17	Locking Mini Clamp	DEC2439	42	Screw	BSZ40P220FTB	
18	Barrier (W)	DEC3271	43	Screw	CCZ30P080FTB	
19	TRIM Stay	DNF1813				
20	Input Stay	DNF1819				C
21	HP Stay	DNF1820				
22	Heat Sink	DNF1850				
23	Side Panel L	DNK5363				
24	Side Panel R	DNK5364				
25	Extension Shaft A	DNK5365				

(2) CONTRAST TABLE

DJM-2000/SYXJ8, CUXJ, LXJ, KXJ5 and AXJ5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-2000 /SYXJ8	DJM-2000 /CUXJ	DJM-2000 /LXJ	DJM-2000 /KXJ5	DJM-2000 /AXJ5
NSP	30	Caution Label	Not used	DRW2429	DRW2430	DRW2432	Not used
NSP	31	Name Label	DRW2423	DRW2424	DRW2425	DRW2428	DRW2427
NSP	32	Caution Label	Not used	DRW1975	Not used	Not used	Not used

9.3 BOTTOM SECTION

A


B

C

D

E

F

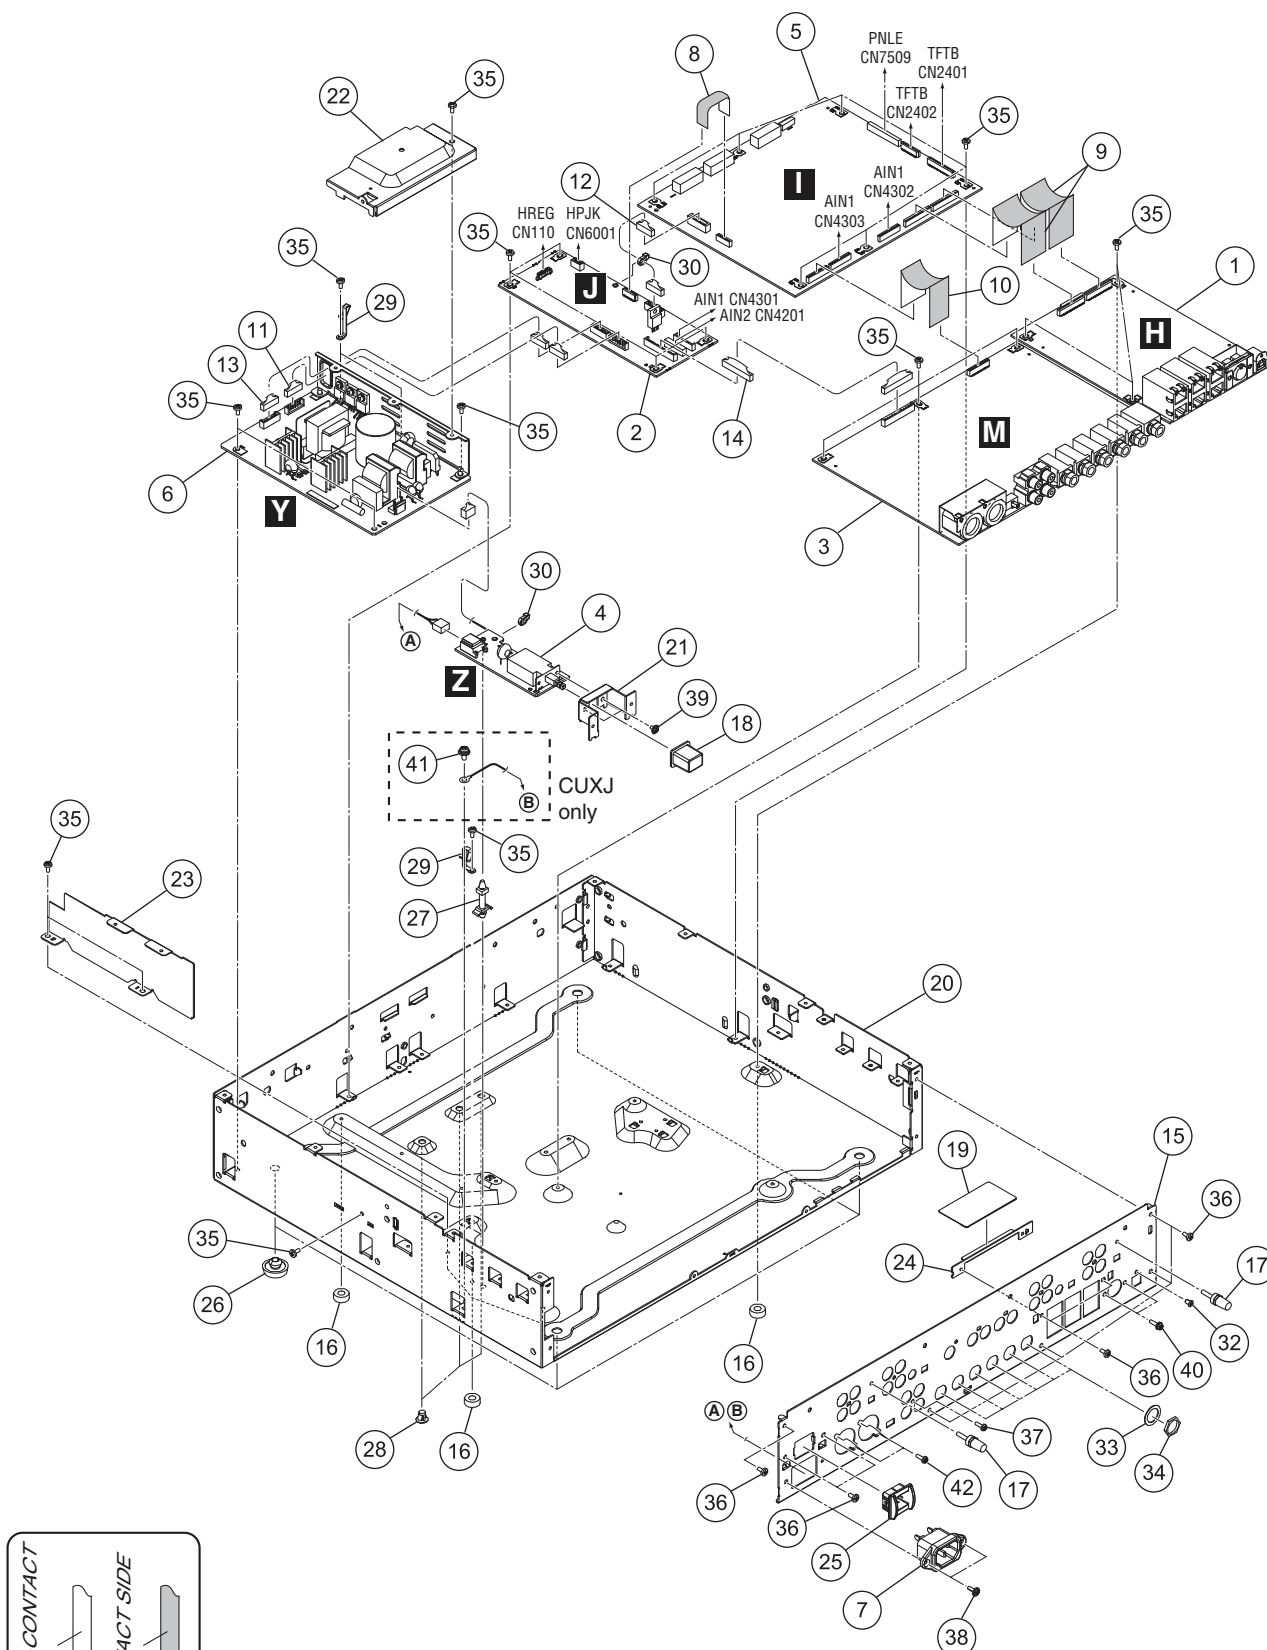

(1) BOTTOM SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.	
	1 PCIF Assy	DWX2925		26 Foot (Rubber)	REC-434	
	2 HAMP Assy	DWX2919	NSP 27	PC Support	VEC1584	A
	3 AOUT Assy	DWX2924	NSP 28	PC Support	VEC1749	
	4 ACSW Assy	DWX2918		29 Cord Clamper (Steel)	RNH-184	
	5 MAIN Assy	DWX2920		30 Binder	ZCA-SKB90BK	
⚠	6 POWER SUPPLY Assy	DWR1473 or DWR1492	31	•••••		
⚠	7 AC Inlet Assy	See Contrast table (2)	32	Screw (M3 x5)	DBA1340	
	8 12P FFC	DDD1507	33	Washer	DEC2920	
	9 26P FFC	DDD1509	34	Nut (M12)	NKX2FNI	
	10 20P FFC	DDD1510	35	Screw	BBZ30P060FTC	
	11 Connector Assy	PF06EE-D20	36	Screw	BBZ30P060FTB	B
	12 Connector Assy	PF08PP-D10	37	Screw	BPZ30P080FTB	
	13 Connector Assy	PF08PP-D20	38	Screw	IBZ30P080FTB	
	14 Connector Assy	PF12EE-D10	39	Screw	IMZ30P040FTC	
	15 Rear Panel	See Contrast table (2)	40	Screw	PMH30P100FTB	
NSP 16	Spacer	AEB7092	41	Screw	See Contrast table (2)	
	17 Terminal Screw	AKE-031	42	Screw	PPZ30P080FTB	
	18 Power Knob	DAC2306				
	19 Barrier (LAN)	DEC3169				
NSP 20	Chassis	DNA1362				C
	21 Bracket PSW	DNF1759				
	22 Power Shield	DNF1815				
	23 AC Shield	DNF1816				
	24 Earth Plate	DNF1858				
	25 Power Knob Guard	DNK4534				

(2) CONTRAST TABLE

DJM-2000/SYXJ8, CUXJ, LXJ, KXJ5 and AXJ5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-2000 /SYXJ8	DJM-2000 /CUXJ	DJM-2000 /LXJ	DJM-2000 /KXJ5	DJM-2000 /AXJ5
⚠	7	AC Inlet Assy (2P)	DKP3762	Not used	DKP3762	DKP3762	DKP3762
⚠	7	AC Inlet Assy (3P)	Not used	DKP3761	Not used	Not used	Not used
	15	Rear Panel	DNC1916	DNC1917	DNC1918	DNC1921	DNC1920
	41	Screw	Not used	PMH40P080FTC	Not used	Not used	Not used

9.4 CONTROL PANEL SECTION

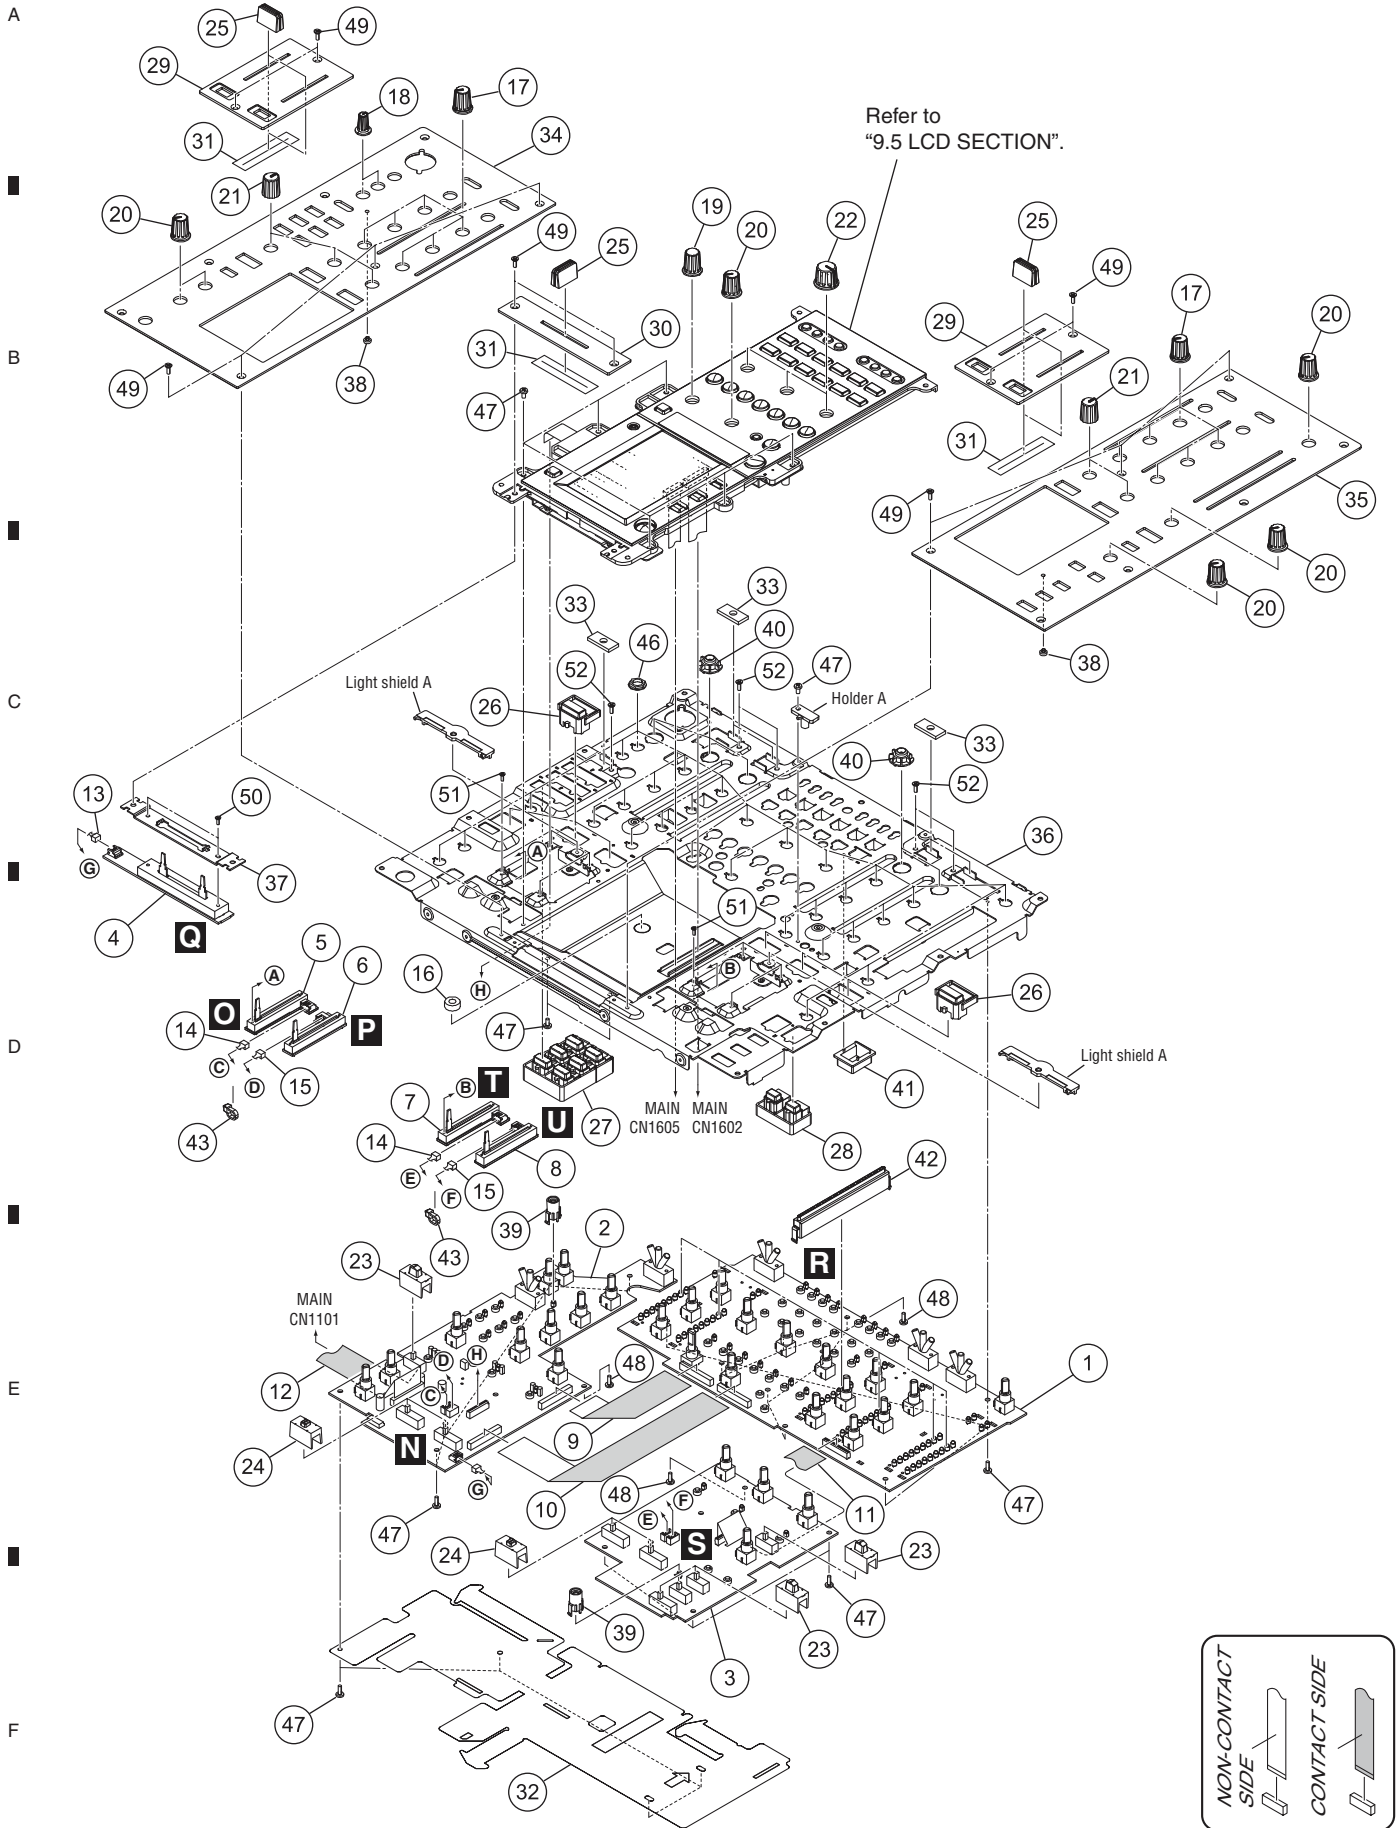



CONTROL PANEL SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	PNCE Assy	DWX2926	46	Flange Nut M9	DBN1008	
2	PNLE Assy	DWX2927	47	Screw	BBZ30P060FTC	A
3	PNRI Assy	DWX2928	48	Screw	BPZ30P080FTB	
4	CRFD Assy	DWX2929	49	Screw	CCZ30P080FTB	
5	CFD1 Assy	DWX2930	50	Screw	IMZ30P040FTC	
6	CFD2 Assy	DWX2931	51	Screw	PMA20P040FTC	■
7	CFD3 Assy	DWX2932	52	Screw	AMZ26P040FTC	
8	CFD4 Assy	DWX2933				
9	32P FFC	DDD1504				
10	32P FFC	DDD1505				
11	25P FFC	DDD1506				B
12	32P FFC	DDD1508				
13	Connector Assy	PF03PP-B10				
14	Connector Assy	PF04PP-B05				
15	Connector Assy	PF04PP2B05				■
NSP	16 Spacer	AEB7092				
	17 Rotary SW Knob (B)	DAA1176				
	18 Rotary SW Knob S (A)	DAA1177				
	19 Rotary SW Knob (C)	DAA1180				
	20 Rotary Knob (BN)	DAA1220				C
	21 Knob (RES)	DAA1250				
	22 Knob (FREQUENCY)	DAA1253				
	23 Slide SW Cap	DAC2400				
	24 Slide SW Cap (W)	DAC2401				■
	25 Slider Knob	DAC2501				
	26 Button (CUE)	DAC2503				
	27 Button (CFX)	DAC2510				
	28 Button (MIDI)	DAC2511				
	29 CHF Panel	DAH2691				D
	30 CRF Panel	DAH2692				
	31 Fader Packing	DEC2903				
	32 Barrier (Panel)	DEC3171				
	33 SW Packing	DED1177				■
	34 Control Panel L	DNB1168				
	35 Control Panel R	DNB1169				
	36 Panel Stay	DNF1812				
	37 CRF Stay	DNF1855				
	38 Lens	DNK4532				E
	39 Lens Holder	DNK4533				
	40 Bush	DNK5367				
	41 Light Shield	DNK5583				
	42 Level Meter Assy	DXB1882				■
	43 Binder	ZCA-SKB90BK				
	44 ●●●●●					
	45 ●●●●●					

9.5 LCD SECTION

Note:

The shape of the groups of buttons 15, 20, 21, and 22 is the same. To identify the attachment position of each group of buttons during reassembly, the initial letter of the name of the left button of a group is engraved on the back of the Center panel (No. 29).

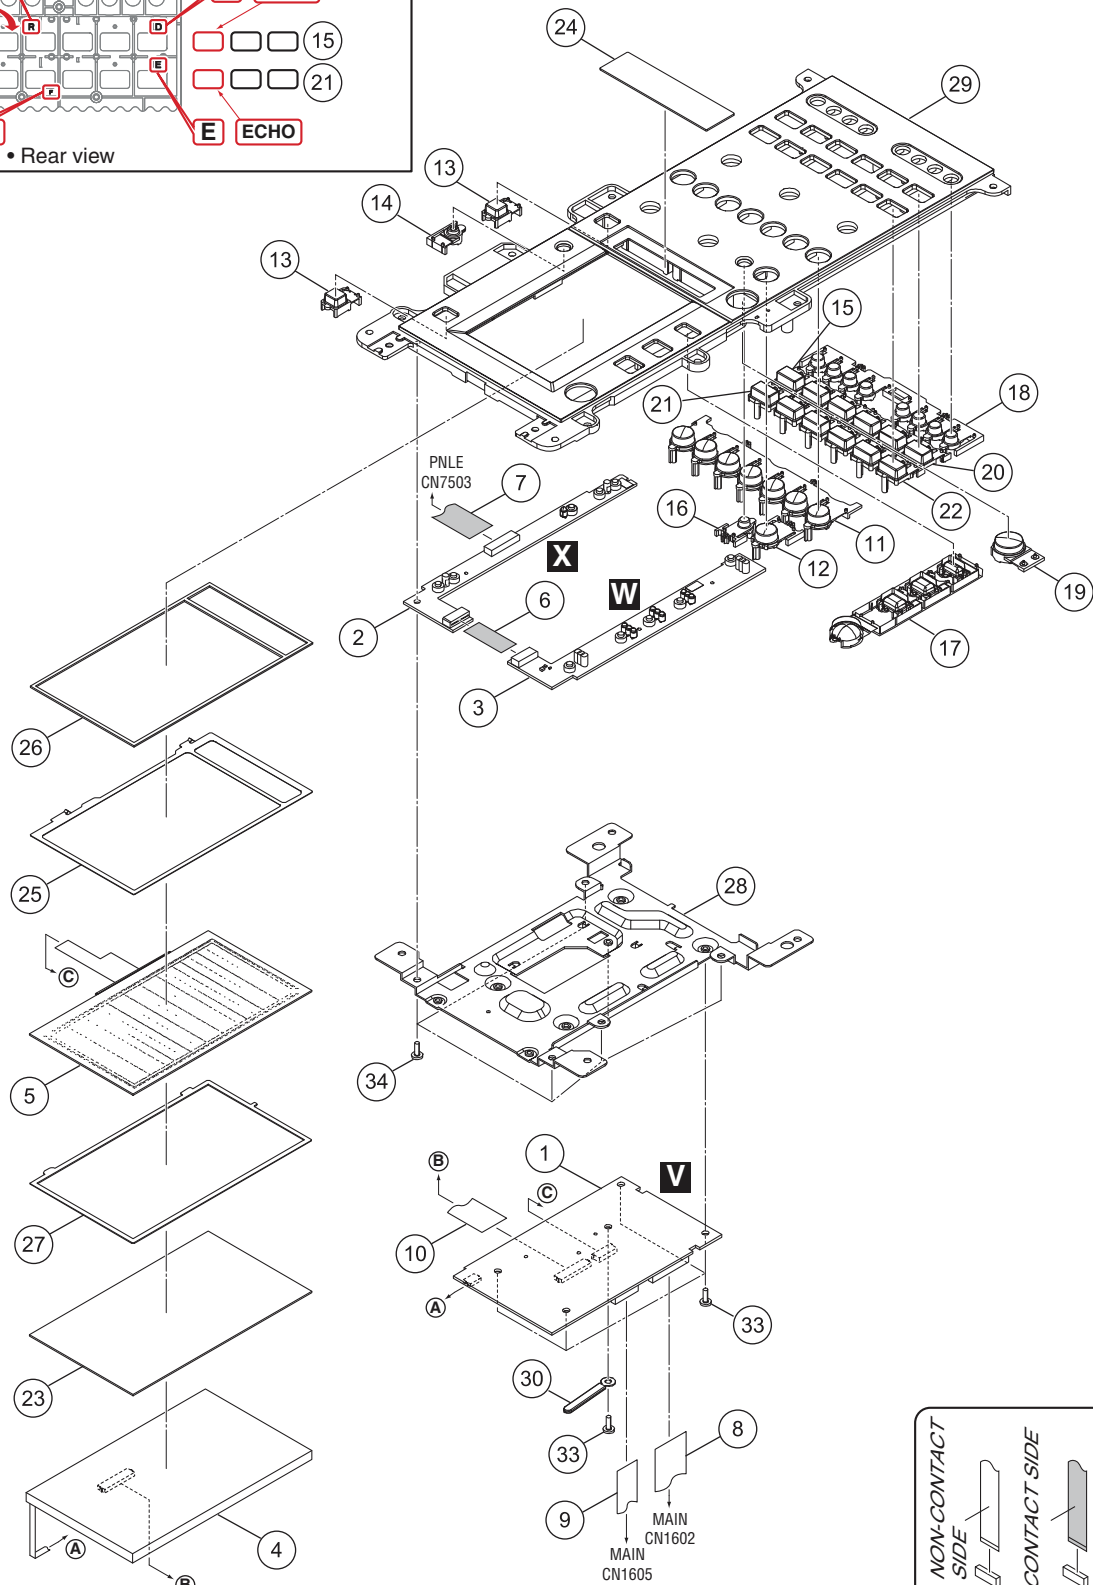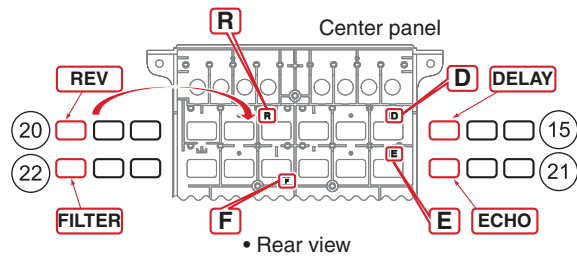

LCD SECTION PARTS LIST

Mark No.	Description	Part No.	
1	TFTB Assy	DWX2921	
2	TPLE Assy	DWX3010	A
3	TPRI Assy	DWX3011	
4	LCD	CWX3868	
5	Touch Panel	DSX1081	
6	12P FFC	DDD1507	■
7	19P FFC	DDD1513	
8	26P FFC	DDD1514	
9	16P FFC	DDD1515	
10	40P FFC	DDD1541	
11	Button (BEAT)	DAC2502	B
12	Button (TAP)	DAC2504	
13	Button (CUE) S	DAC2505	
14	Button (SETTING)	DAC2506	
15	Button (FX SEL A)	DAC2507	■
16	Button (AUTO)	DAC2508	
17	Button (REMIX)	DAC2509	
18	Button (CH SEL)	DAC2512	
19	Button (FX)	DAC2513	
20	Button (FX SEL B)	DAC2597	C
21	Button (FX SEL C)	DAC2598	
22	Button (FX SEL D)	DAC2599	
23	Protect Plate	DAH2767	
24	Display Plate (PC)	DAH2768	
25	TFT Earth Spring	DBK1367	■
26	Touch Panel Pad	DEC3168	
27	Touch Panel Spacer	DEC3269	
28	LCD Stay	DNF1818	
29	Center Panel	DNK5370	D
30	Cord Clamper (Steel)	RNH-184	
31			
32			
33	Screw	BBZ30P060FTC	■
34	Screw	BPZ30P080FTB	

E

■

F

12. PCB PARTS LIST

NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.

● The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

● When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω $\rightarrow$ 56×10^1 $\rightarrow$ 561.....RD1/4PU $\begin{matrix} 5 & 6 & 1 \end{matrix}$ J

47 k Ω $\rightarrow$ 47×10^3 $\rightarrow$ 473.....RD1/4PU $\begin{matrix} 4 & 7 & 3 \end{matrix}$ J

0.5 Ω $\rightarrow$ R50.....RN2H $\begin{matrix} R & 5 & 0 \end{matrix}$ K

1 Ω $\rightarrow$ 1R0.....RS1P $\begin{matrix} 1 & R & 0 \end{matrix}$ K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 k Ω $\rightarrow$ 562×10^1 $\rightarrow$ 5621.....RN1/4PC $\begin{matrix} 5 & 6 & 2 & 1 \end{matrix}$ F

● Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Mark No. Description Part No.

LIST OF ASSEMBLIES

NSP	1..A1TF ASSY	DWM2334
	2..TFTB ASSY	DWX2921
	2..AIN1 ASSY	DWX2922
	2..TRIM1 ASSY	DWX2935
	2..TRIM2 ASSY	DWX2936
NSP	1..A1PC ASSY	DWM2335
	2..AIN2 ASSY	DWX2923
	2..PCIF ASSY	DWX2925
	2..TRIM3 ASSY	DWX2937
	2..TRIM4 ASSY	DWX2938
	2..TPLE ASSY	DWX3010
	2..TPRI ASSY	DWX3011
NSP	1..OUHP ASSY	DWM2336
	2..HAMP ASSY	DWX2919
	2..AOUT ASSY	DWX2924
	2..HPJK ASSY	DWX2939
	2..HREG ASSY	DWX2940
NSP	1..PNLA ASSY	DWM2337
	2..ACSW ASSY	DWX2918
	2..PNCE ASSY	DWX2926
	2..MCJK ASSY	DWX2934
NSP	1..PNLB ASSY	DWM2338
	2..PNLE ASSY	DWX2927
	2..PNRI ASSY	DWX2928
	2..CRFD ASSY	DWX2929
	2..CFD1 ASSY	DWX2930
	2..CFD2 ASSY	DWX2931
	2..CFD3 ASSY	DWX2932
	2..CFD4 ASSY	DWX2933
	1..MAIN ASSY	DWX2920
$\triangle$	1..POWER SUPPLY ASSY	DWR1473 or DWR1492

Mark No. Description Part No.

A AIN1 ASSY SEMICONDUCTORS

IC 3000,3001,3004-3006	NJM4580MD
IC 3002	TC74VHC74FTS1
IC 3003,3302	CS5381-KZ
IC 3007,3306	RNB4580F
IC 3300,3301,3303-3305	NJM4580MD
IC 4300-4303	TC7WU04FU
IC 4314-4319	TC7SH08FUS1
IC 4900	NJM4580MD
IC 4901	AK5358AET
Q 3000,3001,3003,3004	2SK3320
Q 3002,3005-3009,3011	HN1C01FU
Q 3010,3308,3309,3314	RT1N241M
Q 3012,3013,3301,3302	2SK3320
Q 3014-3016,3300,3303	HN1C01FU
Q 3304,3307,3310-3313	HN1C01FU
Q 3305,3306,3316,3317	2SK3320
Q 3315,3318-3320	HN1C01FU
Q 4501	2SC2412K
Q 4900,4901	2SK209
D 3000,3001,3301,3302	1SS355
D 3002-3005,3303-3306	RB706D-40
D 3300	UDZS5R6(B)
D 4904	UDZS3R3(B)
D 4905	RB706D-40
D 4906-4915	HZU3RQ(B1)

MISCELLANEOUS

L 3300,3301 FERRITE CORE	VTF1093
L 4500 FERRITE CORE	VTF1091
JA 3000,3300 JACK	DKB1083
JA 3301 JACK	RKN1004
JA 4300,4301 2P JACK	DKB1098
JA 4500 JACK BOARD	PKB1033
KN 4300,4301 WRAPPING TERMINAL	VNF1084
VR 4900 ROTARY VR	DCS1072
RY 3000,3300 RELAY	VSR1008
S 3000,3300 SLIDE SWITCH	DSH1025
CN 3000,3300 11P PLUG	XKP3065
CN 4300 21P CONNECTOR	21R-1.25FJ
CN 4302,4303 20P CONNECTOR	VKN1312

Mark	No.	Description	Part No.
------	-----	-------------	----------

	CN 4900	CONNECTOR	CKS2643
--	---------	-----------	---------

Mark	No.	Description	Part No.
------	-----	-------------	----------

A	R	3000-3003,3300-3303	RN1/16SE1000D
	R	3004-3007,3304-3307	RN1/16SE4702D
	R	3008,3009,4928-4931	RS1/10SR75R0D
	R	3010,3011,3312,3313	RS1/10SR1803D
	R	3014,3015	RS1/10SR7501D

	R	3016,3017,3032-3035	RN1/16SE4700D
	R	3018,3021,3028,3029	RN1/16SE2001D
	R	3022,3026,3030,3031	RN1/16SE1001D
	R	3024,3068,3324,3329	RN1/16SE4701D
	R	3037,3038,3343,3344	RN1/16SE3002D

B	R	3040,3041,3351,3352	RN1/16SE2002D
	R	3045,3046,3356,3357	RN1/16SE1303D
	R	3052,3053,3358,3359	RS1/10SR3303D
	R	3060,3073,3074,3320	RN1/16SE4700D
	R	3066,3070-3072,3370	RN1/16SE2001D

	R	3076-3083,3380-3387	RN1/16SE1201D
	R	3084,3086,3088,3090	RN1/16SE2200D
	R	3085,3087,3089,3091	RN1/16SE4300D
	R	3092-3095,3396-3399	RN1/16SE6800D
	R	3096,3099,3100,3103	RN1/16SE3300D

C	R	3097,3098,3101,3102	RN1/16SE1001D
	R	3108-3112	RN1/16SE4301D
	R	3321,3336-3339,3366	RN1/16SE4700D
	R	3322,3326,3327	RN1/16SE1001D
	R	3331-3335,3401,3402	RN1/16SE1001D

	R	3372,4904,4905,4909	RN1/16SE4701D
	R	3374-3376	RN1/16SE2001D
	R	3378,3379	RN1/16SE4700D
	R	3388,3390,3392,3394	RN1/16SE2200D
	R	3389,3391,3393,3395	RN1/16SE4300D

D	R	3400,3403,3404,3407	RN1/16SE3300D
	R	3405,3406	RN1/16SE1001D
	R	4527	RS1/10SR1801F
	R	4528	RS1/10SR3901F
	R	4902,4903	RN1/16SE1002D

	R	4906,4908	RN1/16SE1501D
	R	4907	RN1/16SE3300D
	R	4910	RN1/16SE4701D
	R	4911,4913	RN1/16SE3900D
	R	4914	RN1/16SE2200D

	R	4924,4925	RN1/16SE2201D
	R	4926,4932	RN1/16SE1201D
	R	4927	RN1/16SE1500D
E	R	4933,4934	RS1/10SR1803D
		Other Resistors	RS1/10SR###J

Mark	No.	Description	Part No.
------	-----	-------------	----------

	C	3000,3021,3023-3025	CKSRYB104K25
	C	3001,3002,4304-4307	CCSRCH221J50
	C	3003,3004,3007,3008	CCSRCH101J50
	C	3005,3006,4932,4933	CCSRCH331J50
	C	3009,3010	CEHAT471M6R3

	C	3011,3012,4921	CKSRYB471K50
	C	3013,3014	DCE1020
	C	3015,3016,4922,4923	CKSRYB474K10
F	C	3017,3018	CKSRYB223K50
	C	3019,3020,3046,3047	CKSRYB472K50

	C	3022,3026,3056,3057	CEHAZL101M25
--	---	---------------------	--------------

Mark	No.	Description	Part No.
------	-----	-------------	----------

	C	3028,3037-3039,3050	CKSRYB104K25
	C	3029-3032,3034,3035	CFTLA334J50
	C	3036,3333	CEHAZL100M50
	C	3042,3043,3343,3344	CKSRYB103K50

	C	3044,3045,3341,3342	CCSRCH222J50
	C	3048,3345	CEHAZL331M6R3
	C	3049,3055,3346,3350	CEHAZL101M10
	C	3051,3054,3352,3354	CEHAZL220M50
	C	3052,3053,3058-3061	CKSRYB104K25

	C	3062-3065,3361-3364	CCSRCH102J50
	C	3070,3071,3300,3321	CKSRYB104K25
	C	3301-3304,3306-3309	CCSRCH101J50
	C	3305,3310	CFTLA103J50
	C	3317-3320,3347,3348	CKSRYB472K50

	C	3322,3326,3355,3356	CEHAZL101M25
	C	3323-3325,3336-3338	CKSRYB104K25
	C	3328,3329,3331,3332	CFTLA334J50
	C	3334,3335	CFTLA334J50
	C	3349,3351,3353	CKSRYB104K25

	C	3357-3360,3365,3366	CKSRYB104K25
	C	4308-4311,4514,4919	CKSRYB103K50
	C	4312-4315	CCSRCH220J50
	C	4316,4318,4320,4322	CKSRYB104K25
	C	4317,4319,4321,4323	CCSRCH470J50

	C	4362-4368,4370,4371	CKSRYB104K25
	C	4369,4372	CEHAT101M25
	C	4373,4377,4378,4380	CKSRYB104K25
	C	4374-4376,4379,4381	CEAT470M25
	C	4512,4909,4910,4913	CKSRYB104K25

	C	4513	CEAT101M10
	C	4906,4908	CCSRCH471J50
	C	4907	CKSRYB331K50
	C	4911	CEJQNP100M35
	C	4912,4914,4916	CEAT100M50

	C	4915,4918,4924,4925	CKSRYB104K25
	C	4917	CEJQ100M35
	C	4920	CKSRYB103K50
	C	4926-4931	CKSRYB474K10
	C	4934	CKSRYB104K25

	C	4935-4938,4943-4946	CEANP330M16
	C	4947	CKSRYB105K16
	C	4950-4953	CCSRCH101J50

Mark	No.	Description	Part No.
------	-----	-------------	----------

D	2201-2204		UDZS15(B)
---	-----------	--	-----------

Mark	No.	Description	Part No.
------	-----	-------------	----------

	JA 2200	CANON CONNECTOR	DKB1108
	CN 2200	PLUG	CKS3153
	O	MIC SHIELD	DNF1849

Mark	No.	Description	Part No.
------	-----	-------------	----------

R	2201-2204		RN1/16SE1000D
---	-----------	--	---------------

Mark	No.	Description	Part No.
------	-----	-------------	----------

	C	2201-2206	CCSRCH102J50
	C	2207,2208	CFTLA103J50

5	6	7	8
Mark No. Description	Part No.	Mark No. Description	Part No.
C TRIM1 ASSY MISCELLANEOUS VR 2221 POTENTIOMETER CN 2221 11P SOCKET	DCS1103 XKP3076	RY 3600,3900 RELAY	VSR1008
CAPACITORS C 2221	CKSRYB104K25	S 3600,3900 SLIDE SWITCH CN 3600,3900 11P PLUG CN 4200 21P CONNECTOR CN 4201 CONNECTOR POST	DSH1025 XKP3065 21P-1.25FJ S7B-EH
D TRIM2 ASSY MISCELLANEOUS VR 2241 POTENTIOMETER CN 2241 11P SOCKET	DCS1103 XKP3076	RESISTORS R 3600-3603,3900-3903 R 3604-3607,3904-3907 R 3610-3613,3910,3911 R 3614-3617,3661 R 3620,3621,3636-3639 R 3622,3626,3627 R 3624,3629,3672,3924 R 3631-3635,3701,3702 R 3643,3644,3937,3938 R 3651,3652,3940,3941 R 3656,3657,3945,3946 R 3658,3659,3952,3953 R 3666,3678,3679,3916 R 3670,3674-3676,3918 R 3680-3687,3976-3983 R 3688,3690,3692,3694 R 3689,3691,3693,3695 R 3696-3699,3992-3995 R 3700,3703,3704,3707 R 3705,3706,3922,3926 R 3908,3909 R 3914,3915 R 3917,3932-3935,3960 R 3921,3928,3929,3966 R 3927,4010 R 3930,3931,3997,3998 R 3968 R 3970-3972 R 3973,3974 R 3984,3986,3988,3990 R 3985,3987,3989,3991 R 3996,3999,4000,4003 R 4001,4002 R 4008,4009 Other Resistors	RN1/16SE1000D RN1/16SE4702D RS1/10SR1803D RN1/16SE4301D RN1/16SE4700D RN1/16SE1001D RN1/16SE4701D RN1/16SE1001D RN1/16SE3002D RN1/16SE2002D RN1/16SE1303D RS1/10SR3303D RN1/16SE4700D RN1/16SE2001D RN1/16SE1201D RN1/16SE2200D RN1/16SE4300D RN1/16SE6800D RN1/16SE3300D RN1/16SE1001D RS1/10SR75R0D RS1/10SR7501D RN1/16SE4700D RN1/16SE2001D RN1/16SE2201D RN1/16SE1001D RN1/16SE4701D RN1/16SE2001D RN1/16SE4700D RN1/16SE2200D RN1/16SE4300D RN1/16SE3300D RN1/16SE1001D RN1/16SE1201D RS1/10SR###J
CAPACITORS C 2241	CKSRYB104K25		
E TRIM3 ASSY MISCELLANEOUS VR 2261 POTENTIOMETER CN 2261 11P SOCKET	DCS1103 XKP3076		
CAPACITORS C 2261	CKSRYB104K25		
F TRIM4 ASSY MISCELLANEOUS VR 2281 POTENTIOMETER CN 2281 11P SOCKET	DCS1103 XKP3076		
CAPACITORS C 2281	CKSRYB104K25		
G AIN2 ASSY SEMICONDUCTORS IC 3600,3601,3603-3605 IC 3602,3903 IC 3606,3907 IC 3900,3901,3904-3906 IC 3902 Q 3600,3603,3604,3607 Q 3601,3602,3605,3606 Q 3608,3609,3614,3910 Q 3610-3613,3615 Q 3616,3617,3900,3901 Q 3618-3620,3902 Q 3903,3904,3912,3913 Q 3905-3909,3911 Q 3914-3916 D 3600 D 3601,3602,3900,3901 D 3603-3606,3902-3905 D 3607-3612,3906-3909	NJM4580MD CS5381-KZ RNB4580F NJM4580MD TC74VHC74FTS1 HN1C01FU 2SK3320 RT1N241M HN1C01FU 2SK3320 HN1C01FU 2SK3320 HN1C01FU HN1C01FU UDZS5R6(B) 1SS355 RB706D-40 HZU3R0(B1) VTF1093 DKB1083 RKN1004 VNF1084	CAPACITORS C 3600,3900 C 3601-3604,3606-3609 C 3605,3610 C 3617-3620,3647,3648 C 3621,3623-3625 C 3622,3626,3655,3656 C 3628,3629,3631,3632 C 3633,3936 C 3634,3635,3929-3932 C 3636-3638,3649,3651 C 3641,3642,3944,3945 C 3643,3644,3942,3943 C 3645,3948 C 3646,3650,3949,3955 C 3652,3654,3951,3954 C 3653,3657-3660,3665 C 3661-3664,3962-3965	RS1/10SR75R0D RS1/10SR7501D RN1/16SE4700D RN1/16SE2001D RN1/16SE2201D RN1/16SE1001D RN1/16SE4701D RN1/16SE2001D RN1/16SE4700D RN1/16SE2200D RN1/16SE4300D RN1/16SE3300D RN1/16SE1001D RN1/16SE1201D RS1/10SR###J CKSRYB104K50 CCSRCH101J50 CFTLA103J50 CKSRYB472K50 CKSRYB104K25 CEHAZL101M25 CFTLA334J50 CEHAZL100M50 CFTLA334J50 CKSRYB104K25 CCSRCH222J50 CKSRYB103K25 CEHAZL331M6R3 CEHAZL101M10 CEHAZL220M50 CKSRYB104K25 CCSRCH102J50
MISCELLANEOUS L 3600,3601 FERRITE CORE JA 3600,3900 JACK JA 3601 JACK KN 4200,4201 WRAPPING TERMINAL			

Mark	No.	Description	Part No.
------	-----	-------------	----------

A	C	3666,3671,3921	CKSRYB104K25
	C	3672-3677,3973-3976	CKSRYB474K10
	C	3901,3902	CCSRCH221J50
	C	3903,3904,3907,3908	CCSRCH101J50
	C	3905,3906,4219,4220	CCSRCH331J50
	C	3909,3910	CEHAT471M6R3
	C	3911,3912	CKSRYB471K50
	C	3917,3918	CKSRYB223K50

	C	3919,3920,3946,3947	CKSRYB472K50
	C	3922,3926,3956,3957	CEHAZL101M25
	C	3923-3925,3928	CKSRYB104K25
	C	3934,3935	CFTLA334J50
	C	3937-3939,3950,3952	CKSRYB104K25

B	C	3953,3958-3961	CKSRYB104K25
	C	3970-3972,4202-4204	CKSRYB104K25
	C	4200,4201,4205,4211	CEAT470M25
	C	4206,4210	CEHAT101M25
	C	4207-4209,4215,4221	CKSRYB104K25

	C	4216	CEAT470M25
	C	4217,4218 (0.01 u)	DCE1020
	C	4222-4229	CEANP330M16
	C	4230-4233	CCSRCH101J50

Mark	No.	Description	Part No.
------	-----	-------------	----------

0	SHIELD CASE(MIDI)	DNH2736
---	-------------------	---------

RESISTORS

R	2006,2007	RD1/2VM221J
R	2016-2019,2030-2033	RS1/16SS0R0J
R	2020-2029,2148,2223	RS1/8SQ0R0J
R	2056	RS1/10SR3301D
R	2062-2085	RS1/10SR49R9F

R	2096-2111	RS1/16SS0R0J
R	2136	RAB4CQ330J
R	2139,2208,2209	RAB4CQ121J
R	2187	RS1/10SR1200D
R	2189	RN1/16SC10R0D

R	2217-2219	RS1/4SA0R0J
R	2221	RS1/10SR3900D
R	2222	RS1/10SR1801D
	Other Resistors	RS1/10SR###J

CAPACITORS

C	2001,2003,2007,2010	CKSRYB104K25
C	2002,2009,2021,2065	CEAT101M10
C	2004,2011,2025,2057	CKSRYB471K50
C	2005	CFTLA103J50
C	2013,2020,2044-2053	CKSRYB103K50

C	2017,2022,2023,2027	CKSRYB104K25
C	2018,2019	CCSRCH470J50
C	2024	CCSRCH101J50
C	2026,2056	CKSRYB102K16
C	2028,2031,2034,2042	CKSRYB104K25

C	2029,2036	CCSRCH270J50
C	2032,2093	CKSRYB105K16
C	2033	DCH1201
C	2037,2073,2103,2105	CEAT470M25
C	2043,2054,2055	CKSRYB104K25

C	2058,2062	CKSRYB471K50
C	2059-2061,2063,2068	CKSRYB104K25
C	2067	CEAT101M10
C	2072	CCSRCH180J50
C	2074,2077,2079-2090	CKSRYB104K25

C	2075,2129	CEAT221M10
C	2076,2091,2094	CCSRCH102J50
C	2078	CCSRCH200J50
C	2092,2095,2098-2102	CKSRYB104K25
C	2096,2126,2127	CEHAT101M10

C	2104	CKSRYB103K50
C	2108,2109,2115	CEAT470M25
C	2111-2114,2116-2119	CKSRYB104K25
C	2120,2121	CEHAT221M10
C	2124,2125,2132-2139	CKSRYB104K25

C	2142-2147	CKSRYB104K25
---	-----------	--------------

I MAIN ASSY

SEMICONDUCTORS

⚠	IC	1001	BA33BC0WFP
⚠	IC	1002	S-1170B25UC-OTK
⚠	IC	1003-1005	BD9326EFJ
	IC	1007-1010,1103	TC7SH08FUS1
	IC	1101,1104	TC7SHU04FUS1

IC	1102	BU4230G
IC	1105	DYW1787

H PCIF ASSY

SEMICONDUCTORS

IC	2001	TC7S04FU
IC	2002	TUSB3200ACPAH
IC	2003	S-24CS64A0I
IC	2005	TC7SHU04FUS1
IC	2006	TC74LCX32FTS1

IC	2007,2018	TC7SH04FUS1
IC	2008	TC74VHC08FTS1
IC	2009	RTL8201CP-LF
IC	2010	PSB6970HL
IC	2011	TC7SH32FUS1

IC	2012,2013	TC74LCX541FTS1
IC	2014,2015	TC7SH08FUS1
IC	2016,2017	TC7W53FU
IC	2019	PQ200WNA1ZPH
Q	2001	RT1N241M

Q	2002	UM6K1N
Q	2003,2004	2SB1386
D	2001	NNCD6.2MF
D	2003	UDZS5R6(B)
D	2004,2005	1SS355

MISCELLANEOUS

L	2001,2002 CHIP SOLID INDUCTOR	QTL1013
L	2003 COIL	ATH7015
L	2004 CHIP SOLID INDUCTOR	QTL1013
L	2011-2013 INDUCTOR	CTF1394
F	2001 EMI FILTER	DTL1106

F	2003 EMI FILTER	CCG1160
JA	2001 USB CONNECTOR	DKN1237
JA	2002 CONNECTOR	DKN1188
JA	2009-2011 RJ45 CONNECTOR 2*1	DKN1572
KN	2001-2003 WRAPPING TERMINAL	VNF1084

X	2001 CRYSTAL RESONATOR	DSS1136
X	2002 CRYSTAL (25 MHz)	VSS1215
GN	2001,2002 26P CONNECTOR	VKN1430

Mark	No.	Description	Part No.
	IC	1106-1114,1602,1805	TC7SH08FUS1
	IC	1115	TC74HC4052AFT
	IC	1201	XC3S50A-4FTG256C
	IC	1302,1451	D610A003BPYP225
	IC	1303,1452,1701,1702	K4S281632K-UC75
	IC	1304	DYW1789
	IC	1601	R5S77641N300BG
	IC	1703	DYW1790
	IC	1801-1804	DIR9001PW
	IC	1806,1819-1821	TC7SH08FUS1
	IC	1807-1810	TC74LCX157FTS1
	IC	1811,1813,1815,1817	CS8421-CZ
	IC	1812,1814,1816,1818	TC7WH157FU
	IC	1901-1904,1914-1919	TC7SH08FUS1
	IC	1907,1908,1910,1911	CS8421-CZ
	IC	1909	TC7W53FU
	IC	1912	AK4114VQ
	Q	1001,1006,1301,1451	RT1N241M
	Q	1002-1004	2SA1576A
	Q	1005,1101	RT1P241M-11
	Q	1901-1903,1905	RT1N241M
	Q	1904,1906	2SC4154
	D	1004-1006	RSX201L-30
	D	1009,1010,1101-1106	1SS355
	D	1011	UDZS3R3(B)
	D	1301,1451	SML-310DT
	D	1454-1461	1SS355

MISCELLANEOUS

L	1001	INDUCTOR	CTH1253
L	1101	CHIP COIL	LCTAW330J2520
L	1607,1608	INDUCTOR	CTF1394
L	1610	INDUCTOR	CTH1255
L	1611	POWER INDUCTOR	DTH1205
F	1301,1451	COIL	RTF1189
F	1601,1602	EMI FILTER	CCG1160
KN	1001-1006	EARTH METAL FITTING	VNF1109
X	1101	CRYSTAL RESONATOR (20 MHz)	ASS7023
X	1102	CRYSTAL RESONATOR (24 MHz)	ASS7025
CN	1002	12P CONNECTOR	VKN1416
CN	1101	32P CONNECTOR	VKN1436
CN	1102	CONNECTOR	VKN1933
CN	1103,1601,1602	26P CONNECTOR	VKN1430
CN	1104-1106	20P CONNECTOR	VKN1424
CN	1605	16P CONNECTOR	VKN1420
NSP	0	ID LABEL ASSY	AXW7015

RESISTORS

R 1001,1023,1057,1101	RS1/8SQ0R0J
R 1005	RS1/10SR9102D
R 1006	RS1/10SR2202D
R 1007	RS1/10SR2702D
R 1008	RS1/10SR3901F
R 1009	RS1/10SR2402F
R 1010,1016	RS1/10SR1002F
R 1011	RS1/10SR4701F
R 1012	RS1/10SR3302F
R 1013	RS1/10SR8201F
R 1014	RS1/10SR1501F
R 1015	RS1/10SR2201F
R 1029-1033	RS1/4SA0R0J

Mark	No.	Description	Part No.
R	1081-1084		RAB4CQ470J
R	1115,1118,1148,1159		RS1/8SQ0R0J
R	1136,1141,1158		RAB4CQ220J
R	1157,2157-2159		RAB4CQ151J
R	1212,1310,1318,1341		RS1/8SQ0R0J
R	1233,1238-1240		RAB4CQ121J
R	1234-1237,1500,1504		RAB4CQ330J
R	1249,1250		RAB4CQ101J
R	1259-1262		RAB4CQ0R0J
R	1327,1329,1333,1336		RAB4CQ100J
R	1469,1474,1516,1734		RS1/8SQ0R0J
R	1508,1511		RAB4CQ330J
R	1630		RS1/10SR5601F
R	1760,2149-2156,2165		RS1/16SS0R0J
R	1762-1768,2166-2169		RS1/16SS151J
R	1790,1816-1819		RS1/10SR6800D
R	1808-1815,1924		RS1/10SR1002D
R	1857,1863,1869,1875		RN1/16SE2001D
R	1858,1864,1870,1876		RN1/16SE6202D
R	1925		RN1/16SE3901D
R	1928,1931,1937,1962		RN1/16SE2001D
R	1929,1963		RN1/16SE6202D
R	1932,1934,1938		RN1/16SE1602D
R	1958		RN1/16SE1802D
R	1976		RS1/8SQ0R0J
R	2082-2096,2098		RS1/16SS330J
R	2161-2163		RS1/16SS472J
Other Resistors			RS1/10SR###J

CAPACITORS

C 1001,1021-1023	CKSYB106K16
C 1002,1003,1011,1012	CKSSYB104K16
C 1004,1043-1045,1072	CKSYB106K10
C 1010,1013,1052,1054	CEVW101M16
C 1014,1018-1020,1031	CKSSYB104K16
C 1028-1030,1040-1042	CKSRYB104K25
C 1032,1034	CCSRCH222J50
C 1033,1035,1046-1048	CKSSYB104K16
C 1036	CCSRCH102J50
C 1053,1055,1068-1070	CKSSYB104K16
C 1073,1075	CKSYB106K10
C 1076-1079,1103,1107	CKSSYB104K16
C 1101,1111,1113,1129	CEVW101M16
C 1102,1109	CKSSYB105K6R3
C 1104,1114	CCSSCH220J50
C 1105,1116	CCSSCH180J50
C 1106	CKSSYB152K50
C 1108,1223,1358,1647	CKSSYB103K25
C 1110,1112,1115	CKSSYB104K16
C 1117-1120,1130,1131	CKSSYB104K16
C 1121-1127,1943	CKSSYB471K50
C 1132,1202,1305,1321	CEVW101M16
C 1135-1142,1201	CKSSYB104K16
C 1203-1222,1301,1303	CKSSYB104K16
C 1302,1360,1368,1452	DCH1201
C 1304,1306-1317,1319	CKSSYB104K16
C 1320,1322-1357	CKSSYB104K16
C 1361-1367,1451,1453	CKSSYB104K16
C 1454,1456-1469	CKSSYB104K16
C 1455,1470,1711-1713	CEVW101M16

Mark	No.	Description	Part No.
A	C	1471-1506,1510-1515	CKSSYB104K16
	C	1509,1702,1707 (10 u)	DCH1201
	C	1614-1646,1648-1653	CKSSYB104K16
	C	1655,1657,1659-1683	CKSSYB104K16
	C	1685-1687,1703-1706	CKSSYB104K16
■	C	1710,1811-1814	CKSSYB103K25
	C	1714,1716,1805-1810	CKSSYB104K16
	C	1715,1936	CEVW101M16
	C	1801-1804,1823,1825 (10 u)	DCH1201
	C	1815,1817,1819,1821	CKSSYB104K16
B	C	1816,1818,1820,1822	CKSSYB472K50
	C	1824,1826,1828,1830	CKSSYB683K10
	C	1827,1829,1839-1842(10 u)	DCH1201
	C	1831-1834,1847-1861	CKSSYB104K16
	C	1843-1846,1909,1910	CKSSYB103K25
■	C	1862-1865,1907,1908 (10 u)	DCH1201
	C	1901-1904,1911,1912	CKSSYB104K16
	C	1913,1920,1921,1923 (10 u)	DCH1201
	C	1914,1925,1927,1931	CKSSYB103K25
	C	1915,1916,1918,1919	CKSSYB104K16
C	C	1922,1926,1928,1932	CKSSYB104K16
	C	1924,1933 (10 u)	DCH1201
	C	1934,1939-1942,1944	CKSSYB104K16
	C	1945	CKSSYB104K16
	C	1946	CCSSCH102J50
	C	1947	CKSSYB473K10

Mark	No.	Description	Part No.
RESISTORS			
	R	5706-5709	RN1/16SE3901D
	R	5710-5713	RN1/16SE1502D
	R	5714-5717	RN1/16SE3301D
	R	5736,5737	RN1/16SE2201D
	R	5738,5740	RN1/16SE1201D
	R	5742,5744,5745,5747	RN1/16SE4701D
	R	5748-5751	RS1/10SR1001D
	R	5752-5755	RS1/10SR1801D
	R	5756-5759	RD1/2VM6R8J
		Other Resistors	RS1/10SR###J
CAPACITORS			
	C	101	CEAT471M16
	C	102,103,107,108	CEHAT101M25
	C	104-106,114,118	CKSRYB104K50
	C	111	CEAT470M25
	C	115,116,5622,5625	CEHAZL101M25
	C	117	CEAT221M10
	C	119,122	CEHAT101M25
	C	120,121,5605,5606	CKSRYB104K25
	C	5604	CKSRYB103K50
	C	5607	CEAT100M50
	C	5608,5609	CCSRCH681J50
	C	5610-5613	CCSRCH101J50
	C	5616,5617,5623,5624	CKSRYB104K25
	C	5618,5619	CEHAZL101M10
	C	5620,5621	CCSRCH222J50
	C	5632,5633	CKSYB106K16

J HAMP ASSY

SEMICONDUCTORS

D	⚠	IC 103	NJM78M12FA
		IC 5604	AK4382AVT
		IC 5605,5606	NJM4580MD
		Q 5605,5607	2SC4081
		Q 5606,5608,5614,5615	2SA1576A
■		Q 5609,5611	2SC3076
		Q 5610,5612	2SA1241
		Q 5613	2SC3326
		Q 5616,5620	RT1N241M
		Q 5617	RT1P241M-11
■		Q 5618,5619	2SA1576A
		D 5602-5607,5609	1SS355

MISCELLANEOUS

E	J	101	6P JUMPER WIRE	D20PYY0605E
	KN	101-104	WRAPPING TERMINAL	VNF1084
	RY	5601	RELAY	VSR1008
	CN	101	CONNECTOR	B6B-EH
	CN	102,103	PLUG(8P)	KM200NA8
■	CN	104	CONNECTOR	B7B-EH
	CN	105	CONNECTOR	B7B-EH-K
	CN	106	CONNECTOR	B12B-EH
	CN	5601	12P CONNECTOR	VKN1416
	CN	5602	PLUG(4P)	KM200NA4
F	JH	101	6P CABLE HOLDER	51048-0600
	P	104	PROTECTOR(315 MA)	AEK7003
	P	107,109,114	PROTECTOR(400 MA)	AEK7004
	P	108,110,112	PROTECTOR(630 MA)	AEK7006
	P	111	PROTECTOR(500 MA)	AEK7005

K HREG ASSY

SEMICONDUCTORS

⚠	IC 104	NJM79M09FA
⚠	IC 105	NJM78M09FA
	D 5801,5802	RB501V-40

MISCELLANEOUS

CN 110	6P JUMPER CONNECTOR	52151-0610
--------	---------------------	------------

CAPACITORS

C	5801-5804	CKSRYB104K50
---	-----------	--------------

L HPJK ASSY

MISCELLANEOUS

JA 6001	HEADPHONE JACK	DKN1281
CN 6001	L-PLUG(4P)	KM200NA4L

RESISTORS

All Resistors	RS1/10SR###J
---------------	--------------

CAPACITORS

C	6001,6002	CKSRYB104K25
---	-----------	--------------

M AOUT ASSY

SEMICONDUCTORS

IC	5001,5002,5004,5005	TC7SH08FUS1
IC	5007,5008	TC7SH08FUS1
IC	5010	AK4390EF
IC	5011,5012,5203,5204	NJM4580MD
IC	5201,5401,5501	AK4387ET

5			6			7			8		
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.				
	IC	5202,5402,5403,5505	RNB4580F	R	5088,5094,5095		RN1/16SE4700D				
	IC	5404	AK5358AET	R	5089-5093		RN1/16SE6800D				
	IC	5502	NJM4565MD	R	5096,5098,5100,5102		RN1/16SE2701D	A			
	IC	5503,5504	NJM4580MD	R	5097,5099,5101,5103		RN1/16SE5102D				
	Q	5003-5005,5010,5011	HN1C01FU	R	5105,5107,5109,5111		RN1/16SE2200D				
				R	5112-5115		RN1/16SC68R0D				
	Q	5006-5009	2SK3320	R	5116-5119		RN1/16SE2200D				
	Q	5012-5015	2SK3320D1								
	Q	5016,5017,5026-5029	HN1C01FU	R	5120-5127		RD1/4MUF330J				
	Q	5018,5020,5022,5024	2SA1312	R	5128-5131		RD1/2VM220J				
	Q	5019,5021,5023,5025	2SA1162	R	5132-5134,5139		RN1/16SE3901D				
				R	5135,5138,5140,5143		RN1/16SE1001D				
	Q	5030,5032,5034,5036	2SA1312	R	5136,5137,5141,5142		RN1/16SE1501D				
	Q	5031,5033,5035,5037	2SA1162								
	Q	5038,5041,5044,5047	2SC2712	R	5144-5147,5185,5186		RN1/16SE3301D	B			
	Q	5039,5042,5045,5048	2SC5868	R	5208,5227		RS1/10SR5101D				
	Q	5040,5043,5046,5049	2SA2090	R	5209,5211,5228,5233		RS1/10SR4702D				
				R	5210,5230,5415,5416		RS1/10SR4701D				
	Q	5050,5509	RT1N241M	R	5212,5234,5425,5427		RS1/10SR4301D				
	Q	5051	2SC3326								
	Q	5052-5054,5056,5058	2SA1576A	R	5213-5216		RN1/16SE1202D				
	Q	5055,5057,5059,5061	2SC4154	R	5217-5220		RN1/16SE1502D				
	Q	5060,5511	2SA1576A	R	5223,5231,5232,5245		RD1/2VM331J				
				R	5224,5225,5235,5236		RN1/16SE1002D				
				R	5411,5412		RN1/16SE3602D				
	Q	5201,5203,5204,5207	2SK209								
	Q	5202,5205,5206,5208	INC2002AC1	R	5417,5418,5423,5424		RS1/10SR4702D				
	Q	5401,5402	2SK209	R	5421,5422		RS1/10SR4701D	C			
	Q	5403,5404,5501-5508	INC2002AC1	R	5428,5429		RD1/2VM821J				
	Q	5510	2SC4154	R	5508,5509		RN1/16SE5601D				
				R	5510,5511,5514,5515		RN1/16SE6202D				
	Q	5512-5515	HN1C01FU								
	Q	5516,5517	2SC5868	R	5512,5513		RN1/16SE5101D				
	D	5002-5021	1SS355	R	5517		RN1/16SE4701D				
	D	5100	HZU5R1(B1)	R	5518-5521,5526-5529		RS1/10SR4301D				
	D	5401	UDZS3R3(B)	R	5522-5525,5532-5535		RN1/16SE2202D				
				R	5530,5531,5536,5537		RN1/16SE5600D				
	D	5402,5403	RB706D-40								
	D	5405-5408	HZU3R0(B1)	R	5538-5541		RS1/10SR5601D				
				R	5546,5548,5550,5552		RN1/16SE1200D				
				R	5567-5574		RN1/16SE1501D	D			
				R	5596,5597		RS1/10SR2202D				
				R	5599-5602		RS1/10SR3303D				
				R	5627,5628		RN1/16SE3301D				
				Other Resistors			RS1/10SR###J				
MISCELLANEOUS				CAPACITORS							
	JA	5001,5002 CANON CONNECTOR	DKB1093	C	5001-5004,5043		CKSRYB104K50				
	JA	5201 JACK	DKB1083	C	5005,5006,5025,5026		CEHAZL101M10				
	JA	5401 HEADPHONE JACK	DKB1078	C	5007-5010,5012,5013		CKSRYB104K25				
	JA	5402-5404 HP JACK	DKN1452	C	5015,5016,5019-5022		CKSRYB104K25				
	JA	5501,5502 JACK	DKN1249	C	5018,5201,5401,5443		CKSRYB103K50				
	KN	5001-5003 WRAPPING TERMINAL	VNF1084								
	RY	5001,5002 RELAY	VSR1008	C	5023,5024		CEHAZL220M50	E			
	S	5001 SLIDE SWITCH	DSH1063	C	5027-5030		CCSQCH562J50				
	CN	5001 20P CONNECTOR	VKN1424	C	5031-5034,5039-5042		CCSRCH181J50				
	CN	5002 CONNECTOR	B12B-EH	C	5035-5038		CKSRYB272K50				
				C	5044,5048,5057,5084		CEHAZL331M25				
	0	CANON SHIELD	DNF1789	C	5045-5047,5058,5083		CKSRYB104K50				
				C	5049,5051,5053,5055		CKSRYB473K50				
				C	5050,5052,5054,5056		DCH1323				
				C	5059-5062		CKSRYB473K50				
				C	5063-5070		CKSRYB334K25				
				C	5072,5074,5076,5078		CCSRCH120J50	F			
				C	5079-5082		CCSRCH471J50				
				C	5089		CEANP101M16				
				C	5090,5092,5104,5105		CEAT470M25				
	R	5022,5035,5048,5053	RN1/16SE4700D								
	R	5023-5030	RN1/16SE1301D								
	R	5031-5034,5038,5041	RN1/16SE8201D								
	R	5036,5037,5039,5040	RN1/16SE1101D								
	R	5042,5043,5045,5046	RN1/16SE1101D								
	R	5044,5047,5575-5582	RN1/16SE8201D								
	R	5054-5057,5060-5063	RN1/16SE2201D								
	R	5058,5251,5252	RN1/16SE4301D								
	R	5059,5077,5079,5085	RN1/16SE4700D								
	R	5064-5067	RN1/16SE4702D								
	R	5068-5075	RN1/16SE2001D								
	R	5076,5078,5261,5516	RN1/16SE4701D								
	R	5084,5086,5087	RN1/16SE6800D								

Mark	No.	Description	Part No.
A	C	5091,5093,5516,5518	CEHAT101M25
	C	5094-5097,5236,5237(4700 p)	DCE1016
	C	5098,5099,5106,5107	CKSRB104K50
	C	5100-5103	CCSRCH122J50
	C	5110,5111,5220-5222	CEANP100M35
B	C	5190,5203,5204	CKSRB104K25
	C	5191	CKSRB103K25
	C	5192,5193,5209,5210	CCSRCH101J50
	C	5194	CEHAZL100M50
	C	5202,5205,5241-5244	CEAT100M50
C	C	5207,5227,5415,5416	CCSQCH472J50
	C	5208,5228,5417,5418	CCSRCH152J50
	C	5211,5231,5421,5426	CKSRB334K10
	C	5212-5215,5223,5225	CKSRB104K25
	C	5216,5217,5404,5405	CCSRCH101J50
D	C	5218,5234,5427,5429	CCSRCH560J50
	C	5219,5235	CKSRB102K50
	C	5224,5226	CCSRCH151J50
	C	5229,5230,5431,5432	CKSRB473K25
	C	5232,5233,5238,5437	CEANP100M35
E	C	5239,5240,5441,5442 (4700 p)	DCE1016
	C	5402,5407,5411,5412	CEAT100M50
	C	5403,5406,5419,5420	CKSRB104K25
	C	5408,5409	CCSRCH102J50
	C	5422-5424,5430,5433	CEAT100M50
F	C	5425,5428,5435,5436	CKSRB104K25
	C	5434,5439,5502,5505	CEAT100M50
	C	5438	CEANP100M35
	C	5440,5503,5504,5515	CKSRB104K25
	C	5501	CKSRB103K50
G	C	5507,5508,5541,5542	CEAT100M50
	C	5509,5510 (5600 p)	DCE1019
	C	5511,5512	CCSRCH182J50
	C	5513,5514	CCSRCH560J50
	C	5517,5523,5524,5531	CKSRB104K25
H	C	5519-5522,5525-5528	CCSRCH101J50
	C	5529,5530,5533,5534	CEANP470M25
	C	5532,5547-5556	CKSRB104K25
	C	5535-5538 (4700 p)	DCE1016
	C	5543-5546	CKSRB474K10

N PNLE ASSY SEMICONDUCTORS

IC 7501
IC 7503
Q 7506-7512,7514-7518
Q 7519,7521
Q 7520,7522

DYW1788
TC74HC4052AF
2SC4154
RT1N431M
2SB1188

Q 7523,7524
D 7501-7510,7512,7513
D 7515,7517,7519,7527
D 7520-7522,7530-7532
D 7526

2SC4154
1SS355
SLI-343YYW(TUV)
SLI-343URCW(RST)
SLR-343VC(NPQ)

D 7529,7571
D 7533,7534,7538,7541
D 7542,7545-7547
D 7553-7570,7572-7577

SLI-343YYW(TUV)
1SS355
1SS355
1SS355

MISCELLANEOUS

Mark	No.	Description	Part No.
L	7501	CHIP COIL	LCTAW330J2520
	VR 7501,7502	POTENTIOMETER	DCS1106
	VR 7503,7504	VARIABLE RESISTOR	DCS1100
	VR 7505	ROTARY VR	DCS1086
	VR 7506-7509	VARIABLE RESISTOR	DCS1100
S	7543	VARIABLE RESISTOR	DCS1100
	7501	SLIDE SWITCH	DSH1066
	7502,7505,7506,7511	TACT SWITCH	DSG1079
	7509,7513	SLIDE SWITCH	DSH1058
	7512,7515-7518	TACT SWITCH	DSG1079
X	7519,7520	LEVER SWITCH	DSK1026
	7501	CERAMIC RESONATOR	DSS1180
	CN 7501,7502,7509	32P CONNECTOR	VKN1263
	CN 7503	19P CONNECTOR	VKN1250
	CN 7506	PLUG(4P)	KM200NA4
CN	7507	PLUG(4P)	KM200NA4R
	7508	L-PLUG(3P)	KM200NA3L

RESISTORS

All Resistors

RS1/10SR###J

CAPACITORS

C 7501,7504,7506-7509
C 7502,7519,7522
C 7503
C 7505
C 7510-7515,7525-7528

CKSRB104K25
CEJQ101M10
CKSRB103K50
CKSRB105K10
CKSRB471K50

C 7518,7521,7523,7524
C 7529,7530,7535-7542
C 7531-7534
C 7543
C 7544,7545

CKSRB104K25
CKSRB104K25
CKSRB471K50
CEAT471M6R3
CKSRB104K25

O CFD1 ASSY MISCELLANEOUS

VR 8011 VARIABLE RESISTOR
CN 8011 L-PLUG(4P)

DCV1020
KM200NA4L

P CFD2 ASSY MISCELLANEOUS

VR 8021 VARIABLE RESISTOR
CN 8021 PLUG(4P)

DCV1020
KM200NA4LR

Q CRFD ASSY MISCELLANEOUS

VR 8001 VARIABLE RESISTOR
CN 8001 L-PLUG(3P)

DCV1006
KM200NA3L

R PNCE ASSY SEMICONDUCTORS

IC 7000,7001
IC 7002
Q 7007-7016,7032-7034
Q 7017,7019,7021,7023
Q 7018,7020,7022,7024

TC74HC4052AF
NJM2903M
2SC4154
RT1N431M
2SB1188

Q 7025,7027,7035
Q 7026,7028,7036
Q 7029

RT1N431M
2SB1188
RT1P431M

5

6

7

8

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	D	7008,7009,7025,7026	SLR-343VC(NPQ)		S	7805,7806,7810 SLIDE SWITCH	DSH1066
	D	7010-7013,7027-7030	SLI-343YYW(TUV)		CN 7801	25P CONNECTOR	VKN1256
					CN 7802	PLUG(4P)	KM200NA4
	D	7014-7022,7031-7039	SLR-343MC(NPQ)		CN 7803	PLUG(4P)	KM200NA4R
	D	7023,7024,7040,7041	SLI-343URCW(RST)				
	D	7042,7043,7059,7060	SLR-343VC(NPQ)				
	D	7044-7047,7061-7064	SLI-343YYW(TUV)				
	D	7048-7056,7065-7073	SLR-343MC(NPQ)				
	D	7057,7058,7074,7075	SLI-343URCW(RST)				
	D	7076,7077,7091,7092	SLR-343VC(NPQ)				
	D	7078-7081,7093-7096	SLI-343YYW(TUV)				
	D	7082-7090,7097-7105	SLR-343MC(NPQ)				
	D	7106-7109,7111-7113	1SS355				
	D	7115,7116,7119,7120	1SS355				
	D	7122-7124,7129-7133	1SS355				
	D	7142-7152	SLI-343YYW(TUV)				
	D	7153,7170-7176	SLI-343URCW(RST)				
	D	7154	SLR343EC4T(LMN)				
	D	7155-7169	1SS355				
MISCELLANEOUS							
	VR 7000-7011	VARIABLE RESISTOR	DCS1100				
	VR 7012	ROTARY VR	DCS1086				
	VR 7013	VARIABLE RESISTOR	DCS1100				
	S 7000	12MM GS ENCODER	DSX1064				
	S 7002-7005,7007-7009	TACT SWITCH	DSG1079				
	S 7010,7013,7019	LEVER SWITCH	DSK1026				
	S 7012,7016,7018	TACT SWITCH	DSG1079				
	S 7021-7039	TACT SWITCH	DSG1079				
	CN 7000	25P CONNECTOR	VKN1256				
	CN 7001,7002	32P CONNECTOR	VKN1263				
RESISTORS							
	All Resistors		RS1/10SR###J				
CAPACITORS							
	C 7000	CEAT471M6R3					
	C 7001	CEJQ101M10					
	C 7002,7003,7007-7012	CKSRYB104K25					
	C 7004,7005	CKSRYB103K50					
	C 7013-7018,7020,7021	CKSRYB471K50					
	C 7019,7022,7024,7029	CKSRYB104K25					
	C 7023,7025-7028	CKSRYB471K50					
	C 7030-7032	CKSRYB471K50					
	C 7033-7048	CKSRYB104K25					
S PNRI ASSY							
SEMICONDUCTORS							
	Q 7800-7803	2SC4154					
	D 7800,7801,7812-7826	1SS355					
	D 7802,7804,7805,7807	SLI-343YYW(TUV)					
	D 7808,7810	SLI-343YYW(TUV)					
	D 7811	SLR343WBD2PT(Z1)					
	D 7827	SLR-343VC(NPQ)					
	D 7828	1SS355					
MISCELLANEOUS							
	VR 7800	ROTARY VR	DCS1086				
	VR 7801,7803	POTENTIOMETER	DCS1106				
	VR 7802	VARIABLE RESISTOR	DCS1100				
	S 7800-7802	SLIDE SWITCH	DSH1058				
	S 7803,7804,7807-7809	TACT SWITCH	DSG1079				

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	S	7805,7806,7810 SLIDE SWITCH	DSH1066				
	CN 7801	25P CONNECTOR	VKN1256				
	CN 7802	PLUG(4P)	KM200NA4				
	CN 7803	PLUG(4P)	KM200NA4R				

Mark	No.	Description	Part No.
A	D	8123,8124	SLI-343URCW(RST)
	D	8125,8126	SLR343BC4T(JKLM)
	D	8129,8130	SML-012WT(UVWXY)

MISCELLANEOUS

A	S	8106,8110-8113 TACT SWITCH	DSG1079
	CN	8100 12P CONNECTOR	VKN1272

RESISTORS

A	All Resistors	RS1/10SR###J
---	---------------	--------------

X TPLE ASSY

SEMICONDUCTORS

B	Q	8070	2SA1576A
	D	8071,8072	SLI-343YYW(TUV)
	D	8074,8075	1SS355
	D	8076	SLR-343VC(NPQ)

MISCELLANEOUS

■	S	8070,8072,8074 TACT SWITCH	DSG1079
	CN	8070 19P CONNECTOR	VKN1279
	CN	8071 12P CONNECTOR	VKN1272

RESISTORS

C	All Resistors	RS1/10SR###J
---	---------------	--------------

Y POWER SUPPLY ASSY

There is no service parts.

Z ACSW ASSY

MISCELLANEOUS

D	⚠	S 1	SWITCH	DSA1036
	⚠	CN 1	CONNECTOR 2P	2-178496-4
		0	MASK	DEC3212
	⚠	0	CONNECTOR ASSY	DKP3799

CAPACITORS

	⚠	C 1	ACG7030
--	---	-----	---------

■

E

■

F