

JVC

PARTS LIST

CD RECEIVER

KD-A315J

KD-R310J

■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

■ PRECAUTIONS ON PARTS LIST

- The parts identified by the $\triangle$ symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.

■ PRECAUTIONS ON SERVICE

Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND () and the ISOLATED (NEUTRAL) GND ()


1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.
Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

■ DEVIATION TOLERANCE RANGE

DEVIATION TOLERANCE RANGE									
F	G	J	K	M	N	R	H	Z	P
± 1%	± 2%	± 5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

Exploded view of general assembly

Block No.M1MM

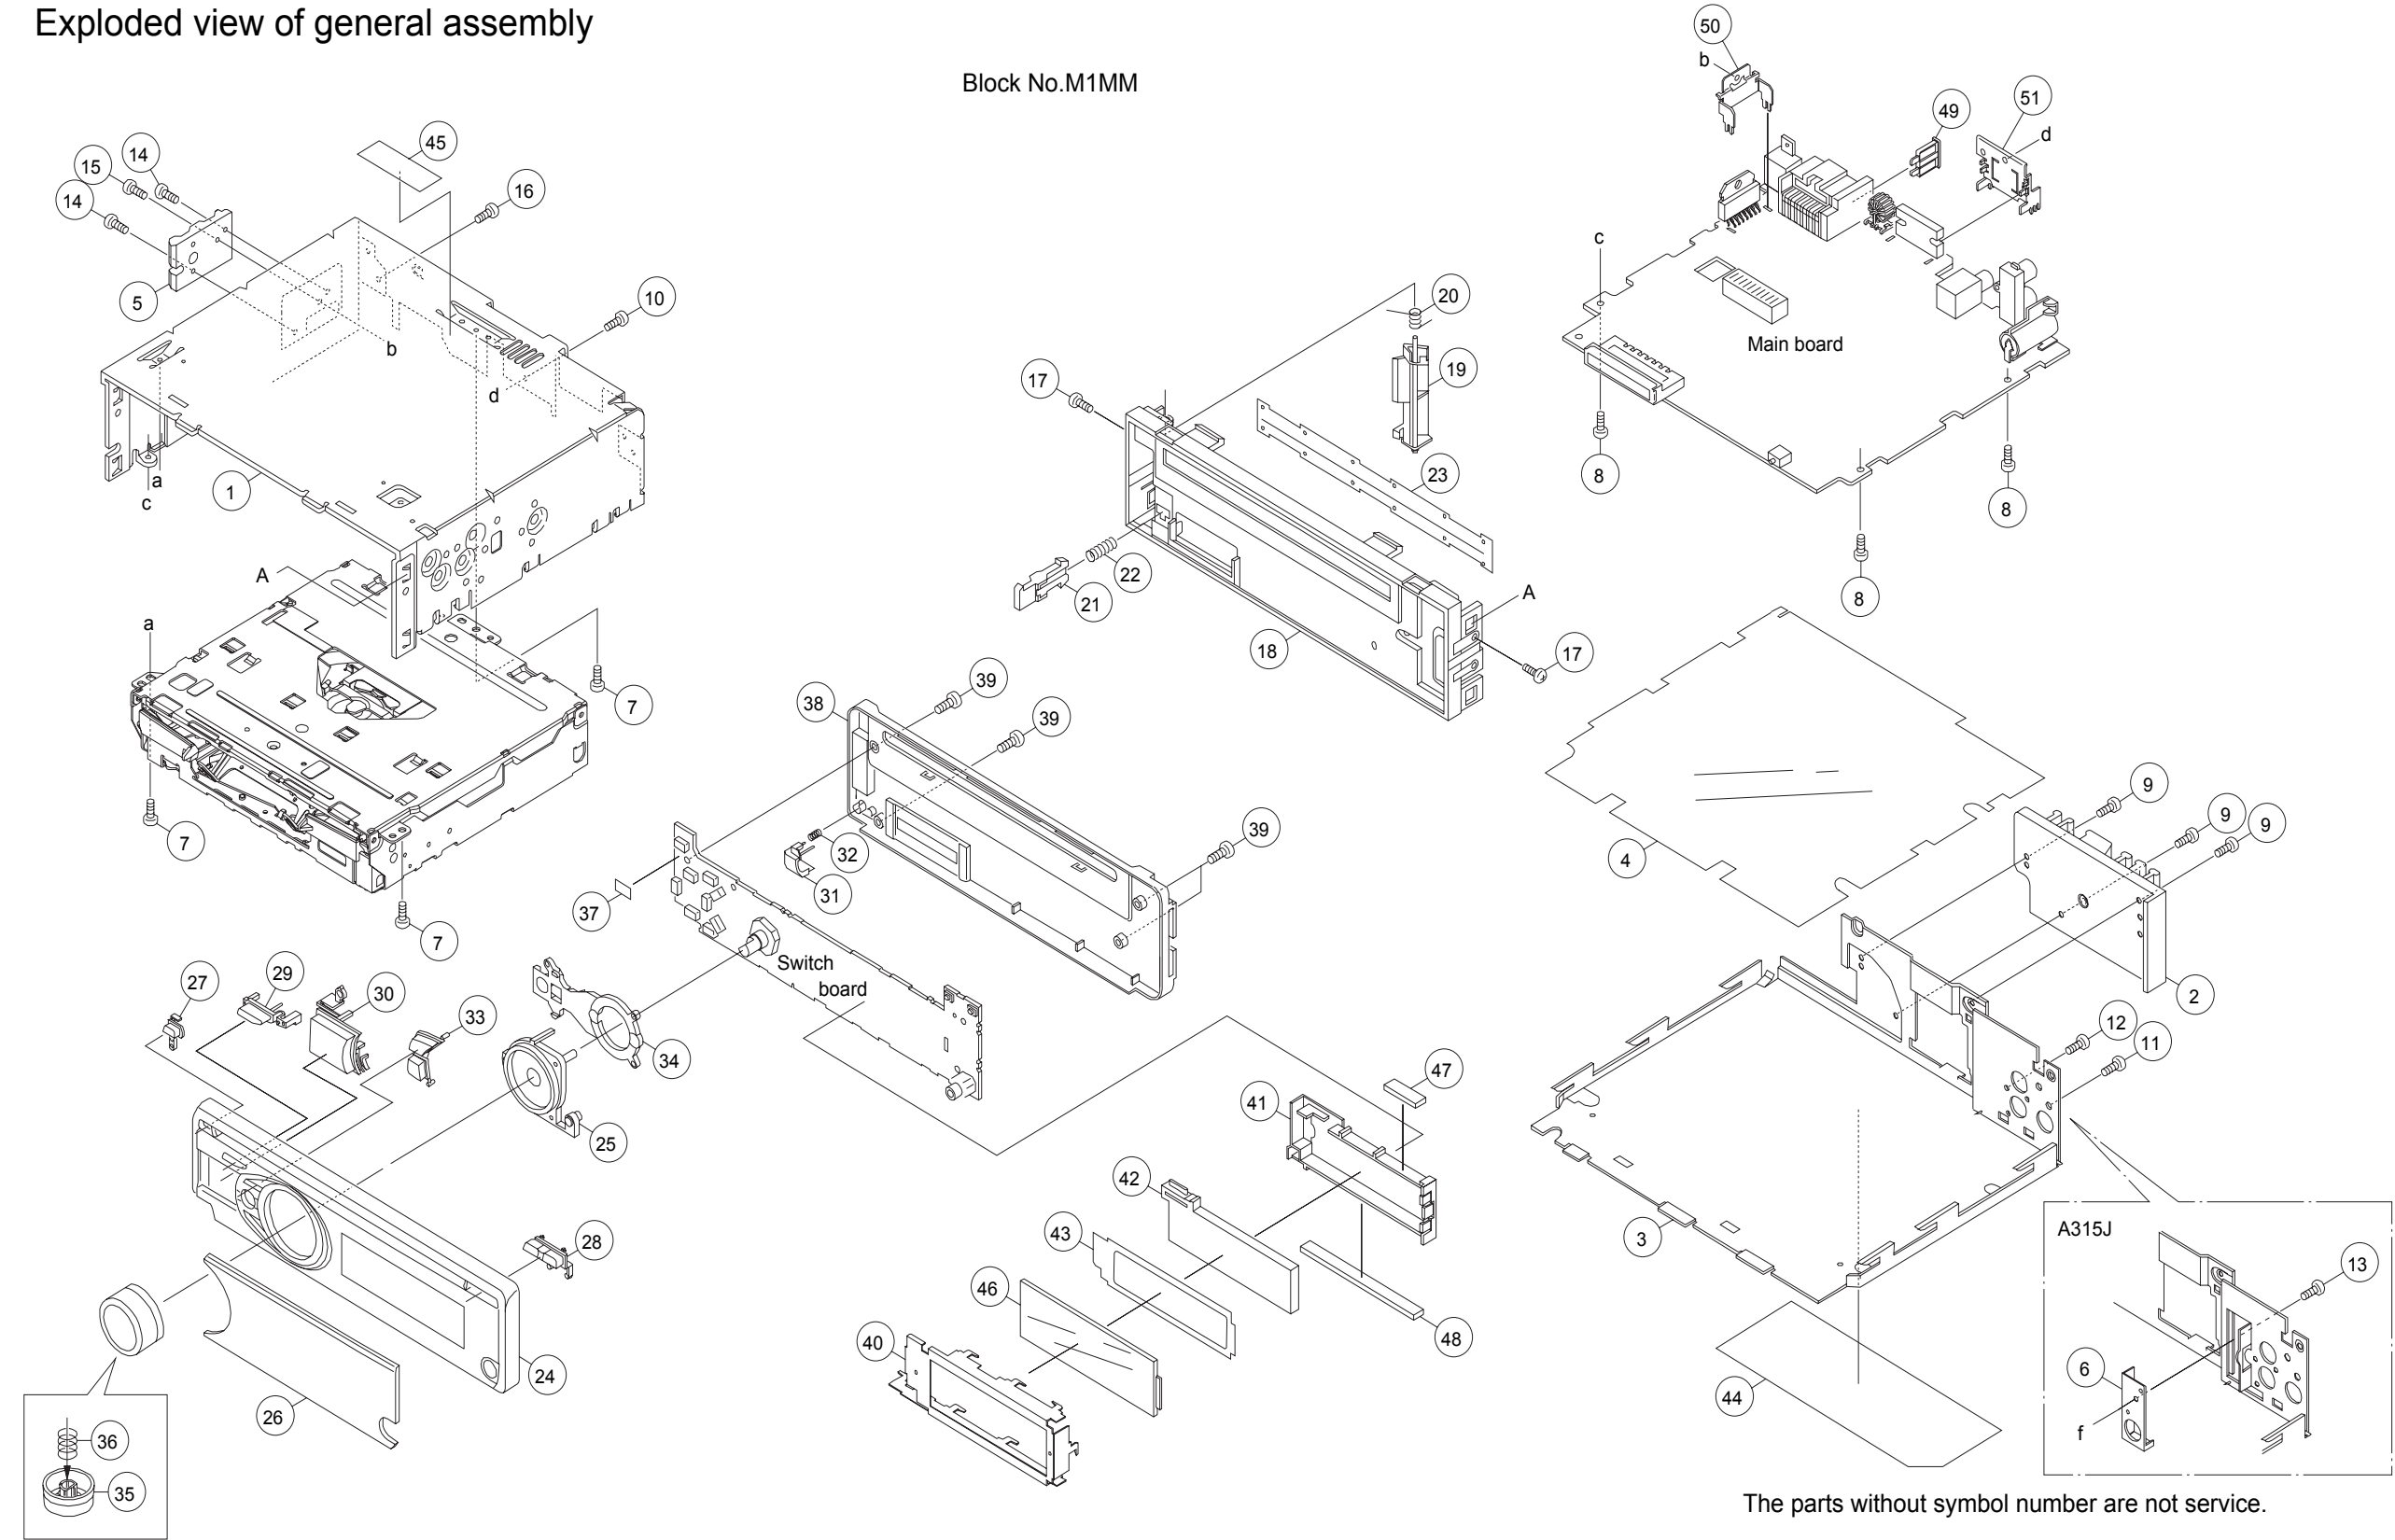


MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
General assembly <M1MM>						
	1	GE10248-001A	TOP CHASSIS		1	A
	1	GE10248-003A	TOP CHASSIS		1	B
	2	GE33323-002A	HEAT SINK		1	
	3	GE20248-002A	BOTTOM COVER		1	A
	3	GE20248-001A	BOTTOM COVER		1	B
	4	GE33325-003A	INSULATOR		1	
	5	GE40395-002A	SIDE PANEL		1	
	6	GE40441-001A	OE HOLDER		1	A
	7	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	8	GE40377-002A	SCREW		3	
	9	GE40377-003A	SPECIAL SCREW		3	
	10	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	11	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	12	QYSDSF2606ZA	TAP SCREW	M2.6 x 6mm	1	
	13	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	1	A
	14	GE40377-002A	SCREW		2	
	15	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	16	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	17	QYSDST2004ZA	TAP SCREW	T.CHASSIS+F.CHASSIS	2	
	18	GE10242-013A	FRONT CHASSIS		1	
	19	GE33792-001A	LOCK LEVER		1	
	20	GE40368-002A	TORSION SPRING		1	
	21	GE32810-001A	RELEASE LEVER		1	
	22	GE30999-008A	COMP.SPRING		1	
	23	GE40432-001A	BLIND		1	
	24	GE10268-002A	FRONT PANEL		1	A
	24	GE10268-001A	FRONT PANEL		1	B
	25	GE33795-001A	RIM LENS		1	
	26	GE33793-005A	FINDER ASSY		1	A
	26	GE33793-001A	FINDER ASSY		1	B
	27	GE33778-001A	EJECT BUTTON		1	
	28	GE33779-001A	DISP. BUTTON		1	
	29	GE33780-001A	SRC BUTTON		1	
	30	GE33781-001A	NAVI BUTTON		1	
	31	GE33782-001A	DETACH BUTTON		1	
	32	GE30999-009A	COMP.SPRING		1	
	33	GE20266-003A	MENU BUTTON		1	
	34	GE33786-001A	LIGHT GUIDE		1	
	35	GE33785-003A	VOL.KNOB		1	A
	35	GE33785-001A	VOL.KNOB		1	B
	36	GE40127-005A	KNOB SPRING		1	
	37	FSYH4036-069	SHEET	FOR NAVI STK	1	
	38	GE10269-002A	REAR COVER		1	
	39	VKZ4777-010	MINI SCREW		4	
	40	GE33787-001A	LCD CASE		1	
	41	GE33788-001A	LENS CASE		1	
	42	GE33789-001A	LCD LENS		1	
	43	GE40480-001A	LIGHTING SHEET		1	
	44	GE33763-001A	NAME PLATE		1	A
	44	GE33766-001A	NAME PLATE		1	B
	45	GE40442-001A	FCC RULE LABEL		1	
	46	QLD0631-001	LCD MODULE		1	
	47	QNZ1002-001	RUBBER CONNE		1	
	48	QNZ1003-001	RUBBER CONNE		1	
△	49	QMFZ064-150-J1	FUSE	15A	1	
	50	GE40439-001A	POWER IC BKT		1	
	51	GE40308-001A	REGULATOR BKT		1	

CD mechanism assembly

Block No.MBMM

FLM-CD5-1D

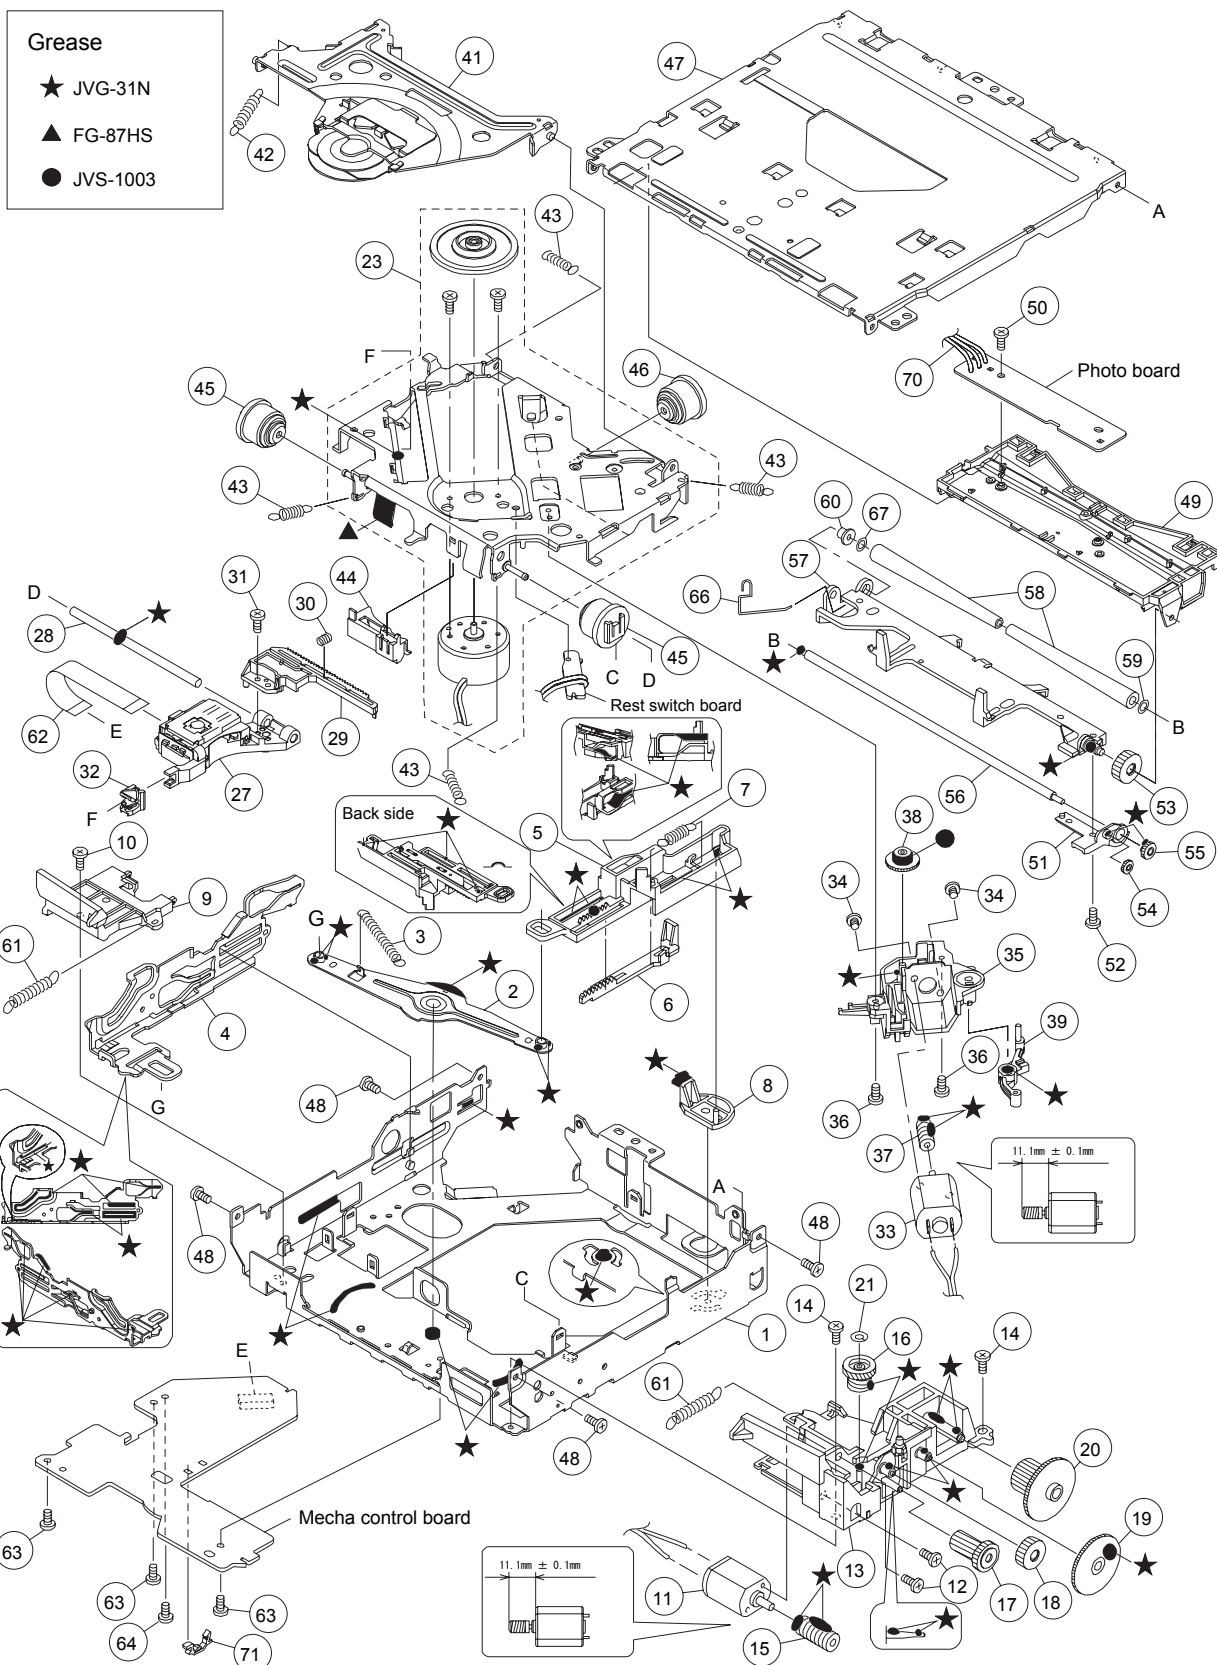

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
FLM-CD5-1D CD mechanism <MBMM>						
1		LV11256-001A	MECHA FRAME		1	A,B
2		LV36800-002A	LINK ARM		1	A,B
3		LV44658-001A	LINK SPRING		1	A,B
4		LV22300-002A	SLIDE CAM (L)		1	A,B
5		LV22298-002A	SLIDE CAM(R)		1	A,B
6		LV36802-001A	LOAD RACK		1	A,B
7		LV44552-001A	RETURN SPRING		1	A,B
8		LV36803-002A	F LOCK LEVER		1	A,B
9		LV36804-002A	CAM COVER		1	A,B
10		VKZ4539-054	MINI SCREW		1	A,B
11		QAR0373-002	MOTOR		1	A,B
12		QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	A,B
13		LV36903-003A	L M BASE ASSY		1	A,B
14		VKZ4539-054	MINI SCREW		2	A,B
15		LV36806-001A	L WORM GEAR		1	A,B
16		LV36805-002A	M WHEEL GEAR		1	A,B
17		LV36807-001A	A WHEEL GEAR		1	A,B
18		LV36808-001A	R ACT GEAR(1)		1	A,B
19		LV36809-001A	LOAD ACT GEAR		1	A,B
20		LV36810-001A	LOADING GEAR		1	A,B
21		QYWDL1230250	SLIT WASHER	3mm/1.2mm x 0.25mm	1	A,B
23		CM-FLMCD1D	SPINDLE MOTOR ASSY		1	A,B
27		QAL1226-001	PICK UP		1	A,B
28		LV44555-001A	MAIN SHAFT		1	A,B
29		LV36799-001A	RACK PLATE		1	A,B
30		LV45227-001A	RACK SPRING		1	A,B
31		QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	A,B
32		LV36813-201A	SUB GUIDE CAP		1	A,B
33		QAR0144-003	MOTOR	2.0V DC	1	A,B
34		QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	A,B
35		LV22296-001A	F MOTOR HOLDER		1	A,B
36		VKZ4539-054	MINI SCREW		2	A,B
37		LV36814-001A	F WORM GEAR		1	A,B
38		LV36815-002A	F WHEEL GEAR		1	A,B
39		LV36816-001A	TRIGGER ARM		1	A,B
41		LV37326-003A	CLAMPER ASSY		1	A,B
42		LV44557-002A	CLAMPER SPRING		1	A,B
43		LV44558-001A	SUS SPRING		4	A,B
44		LV36820-001A	WIRE HOLDER		1	A,B
45		LV36904-001A	DAMPER		2	A,B
46		LV37061-001A	DAMPER		1	A,B
47		LV11260-003A	TOP COVER		1	A,B
48		VKZ4539-054	MINI SCREW		4	A,B
49		LV11264-003A	DISC PLATE		1	A,B
50		LV44586-001A	SPECIAL SCREW		1	A,B
51		LV36801-002A	GEAR HOLDER		1	A,B
52		VKZ4539-054	MINI SCREW		1	A,B
53		LV36821-201A	R ACT GEAR(2)		1	A,B
54		LV36822-201A	R ACT GEAR(3)		1	A,B
55		LV36823-201A	ROLLER GEAR		1	A,B
56		LV44559-003A	ROLLER SHAFT		1	A,B
57		LV22744-001A	R HOLDER ASSY 2		1	A,B
58		LV44560-001A	ROLLER		2	A,B
59		LV44590-001A	WASHER		1	A,B
60		LV45268-001A	ROLLER COLLAR 2		1	A,B
61		LV44562-002A	ROLLER SPRING		2	A,B
62		QAL0817-003	FPC		1	A,B
63		VKZ4539-054	MINI SCREW		3	A,B
64		VKZ4539-054	MINI SCREW		1	A,B
66		LV45269-001A	R HOLDER ROD		1	A,B
67		LV45270-001A	WASHER 2		1	A,B
70		WJS0085-001A-E	E-FL/RB WIRE		1	A,B
71		LV34916-002A	WIRE CLAMP		1	A,B
Electrical parts list Main board <01>						
△	IC1	TEF6606T/V5-X	IC		1	
	IC161	TDA7718N-X	IC		1	
△	IC301	TB2926CHQ	IC		1	
	IC381	NJM2160BV-X	IC		1	A
△	IC501	LA6565-X	IC		1	
△	IC521	MN6627945EE	IC		1	
△	IC701	MN101E16YFL	IC(MCU)		1	
	IC702	S-80824CNNB-G-W	IC		1	
	IC702 or	IC-PST3424U-X	IC		1	
	IC771	R1EX24002ASAA-X	IC		1	
	IC801	74AHCT126PW-X	IC		1	
△	IC901	R2S25400DS-E	IC		1	
	IC981	XC6213B152NG-X	IC		1	
	IC991	XC6213B332NG-X	IC		1	
	Q301	RT1N141C-X	DIGI TRANSISTOR		1	
	Q301 or	UN2211-X	TRANSISTOR		1	
	Q341	IMX9-W	PAIR TRANSISTOR		1	
	Q501	2SA1705/ST-T	TRANSISTOR		1	
	Q521	2SA2188/F-X	TRANSISTOR		1	
	Q781	RT1P141C-X	DIGI TRANSISTOR		1	
	Q781 or	UN2111-X	TRANSISTOR		1	
	Q782	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q782 or	2SC3928A/QR/-X	TRANSISTOR		1	
	Q784	RT1P141C-X	DIGI TRANSISTOR		1	
	Q784 or	UN2111-X	TRANSISTOR		1	
	Q976	RT1N141C-X	DIGI TRANSISTOR		1	

MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
		Q976	or UN2211-X	TRANSISTOR	1	
		Q977	2SA812A/5-6/-X	TRANSISTOR	1	
		Q977	or ISA1530AC1/QR/X	TRANSISTOR	1	
		D341	BAW56-TP-X	SI DIODE	1	
		D341	or MC2836-X	DIODE	1	
		D501	GS1J-LTP-X	DIODE	1	
		D712	HSU119-X	SI DIODE	1	
		D712	or MA111-X	SI DIODE	1	
		D715	RKZ6.2B2KG-X	Z DIODE	1	
		D716	RKZ6.2B2KG-X	Z DIODE	1	
		D717	RKZ6.2B2KG-X	Z DIODE	1	
		D718	RKZ6.2B2KG-X	Z DIODE	1	
		D781	HSU119-X	SI DIODE	1	
		D781	or MA111-X	SI DIODE	1	
		D782	HSU119-X	SI DIODE	1	
		D782	or MA111-X	SI DIODE	1	
		D784	RKZ10B2KG-X	Z DIODE	1	
		D784	or MA8100/M/-X	Z DIODE	1	
△		D901	1N5401-BPC04	SI DIODE	1	
△		D901	or 1N5401-04	SI DIODE	1	
		D902	HSU119-X	SI DIODE	1	
		D902	or MA111-X	SI DIODE	1	
		D971	MBRX130-TP-X	SB DIODE	1	
		D971	or MA22D23-X	SB DIODE	1	
		D972	MBRX130-TP-X	SB DIODE	1	
		D972	or MA22D23-X	SB DIODE	1	
		C1	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1
		C2	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1
		C3	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1
		C4	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	1
		C5	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1
		C6	NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1
		C7	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1
		C10	NCB21AK-105X	C CAPACITOR	1uF 10V K	1
		C11	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C12	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C13	NCB21AK-105X	C CAPACITOR	1uF 10V K	1
		C14	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	1
		C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C22	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1
		C23	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C24	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C25	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C26	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1
		C120	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C162	QTE1H57-475Z	E CAPACITOR	4.7uF 50V	1
		C163	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C164	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C166	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C167	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C168	QTE1C57-106Z	E CAPACITOR	10uF 16V	1
		C169	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1
		C170	QTE1A57-107Z	E CAPACITOR	100uF 10V	1
		C171	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C172	QTE1H57-475Z	E CAPACITOR	4.7uF 50V	1
		C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C174	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C176	QTE1H57-335Z	E CAPACITOR	3.3uF 50V	1
		C178	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C303	QTE1C66-224Z	E CAPACITOR	0.22uF 16V	1
		C304	QTE1C66-224Z	E CAPACITOR	0.22uF 16V	1
		C310	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1
		C313	QTE1C66-224Z	E CAPACITOR	0.22uF 16V	1
		C314	QTE1C66-224Z	E CAPACITOR	0.22uF 16V	1
		C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C316	NCB31AK-105X	C CAPACITOR	1uF 10V K	1
		C317	QTE1C57-226Z	E CAPACITOR	22uF 16V	1
		C318	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1
		C321	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1
		C341	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1
		C351	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1
		C383	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1 A
		C384	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1 A
		C385	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1 A
		C386	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1 A
		C387	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1 A
		C388	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1 A
		C389	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1 A
		C390	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1 A
		C392	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1 A
		C501	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	1
		C505	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1
		C507	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1
		C511	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1
		C513	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1
		C515	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1
		C517	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1
		C518	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1

MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C521	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C522	NCB31CK-333X	C CAPACITOR	0.033uF 16V K	1	
	C524	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C525	NCB31CK-223X	C CAPACITOR	0.022uF 16V K	1	
	C526	NCB31CK-223X	C CAPACITOR	0.022uF 16V K	1	
	C527	NCB31EK-332X	C CAPACITOR	3300pF 25V K	1	
	C528	NDC31HJ-181X	C CAPACITOR	180pF 50V J	1	
	C530	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C531	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C532	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C533	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C534	NCB31EK-332X	C CAPACITOR	3300pF 25V K	1	
	C535	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C536	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C537	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C539	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C540	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C541	NCB31EK-153X	C CAPACITOR	0.015uF 25V K	1	
	C542	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C543	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C544	NCB31EK-823X	C CAPACITOR	0.082uF 25V K	1	
	C547	QTE0J57-476Z	E CAPACITOR	47uF 6.3V	1	
	C548	QTE0J57-476Z	E CAPACITOR	47uF 6.3V	1	
	C549	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C550	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C551	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C552	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C581	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C582	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C583	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C584	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C703	NDC31HJ-8R0X	C CAPACITOR	8pF 50V J	1	
	C704	NDC31HJ-9R0X	C CAPACITOR	9pF 50V J	1	
	C706	NCB31EK-103X	C CAPACITOR	0.01uF 25V K	1	
	C707	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C708	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C709	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C711	QTE0J57-476Z	E CAPACITOR	47uF 6.3V	1	
	C714	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C717	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C718	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C719	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C720	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C721	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C722	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C771	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C781	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	
	C784	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C801	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C901	QEZ0769-278	E CAPACITOR	2700uF	1	
	C902	NCB21EK-474X	C CAPACITOR	0.47uF 25V K	1	
	C903	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C904	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C906	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C912	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C971	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C982	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C984	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C991	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C992	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C993	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	R1	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	
	R2	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	
	R3	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R6	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R7	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R11	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1	
	R16	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R17	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R122	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R161	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R162	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R163	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R164	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R165	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R166	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R167	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R168	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R169	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R171	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	1	
	R172	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	1	
	R301	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R305	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R310	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R341	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R343	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R345	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R347	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R348	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R351	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R353	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R355	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R381	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A
	R382	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A
	R383	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A
	R384	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A
	R385	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A
	R386	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A
	R387	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A
	R388	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A
	R500	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R501	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R502	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R503	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	
	R504	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R506	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R507	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R508	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R509	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R510	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R511	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R512	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R513	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R514	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R515	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R516	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R517	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R518	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R519	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R520	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R521	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R522	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R523	NRS181J-153X	MG RESISTOR	15kΩ 1/8W J	1	
	R524	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R525	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R526	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R527	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R528	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R529	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R533	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	
	R535	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R536	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R537	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R540	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	1	
	R541	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R542	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R543	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R544	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R545	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R546	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R547	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R548	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R549	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R554	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R556	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R558	NRS181J-823X	MG RESISTOR	82kΩ 1/8W J	1	
	R559	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R565	NRS181J-151X	MG RESISTOR	150Ω 1/8W J	1	
	R566	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R581	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R582	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R583	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R584	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R701	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R702	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R703	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R704	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R705	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R708	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R711	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R715	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R716	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R717	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R718	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R719	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R720	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R721	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R722	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R723	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R724	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R725	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R726	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R727	NRS181J-222X	MG RESISTOR	2.2kΩ 1/8W J	1	
	R728	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1	
	R729	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1	
	R730	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R731	NRS181J-561X	MG RESISTOR	560Ω 1/8W J	1	
	R732	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R734	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R736	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R737	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R738	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R739	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R740	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R741	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R742	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R744	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R745	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R746	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R747	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R748	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R749	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R750	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R752	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R781	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R782	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R783	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R784	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R802	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R803	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R804	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R807	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R808	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R809	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R810	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R811	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R812	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R814	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R819	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R901	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	1	
	R903	NRSA02J-472X	MG RESISTOR	4.7kΩ 1/10W J	1	
	R971	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R976	NRSA02J-563X	MG RESISTOR	56kΩ 1/10W J	1	
	R977	NRSA02J-183X	MG RESISTOR	18kΩ 1/10W J	1	
	L1	NQL093K-R47X	P COIL	0.47uH K	1	
	L2	NQL093K-1R8X	P COIL	1.8uH K	1	
	L3	NQL093K-R22X	P COIL	0.22uH K	1	
	L4	QQR1872-001	RF COIL		1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	QQL244J-561Z	COIL	560uH J	1	
	L7	QQL231K-4R7Y	INDUCTOR	4.7uH K	1	
	L8	QQL231K-4R7Y	INDUCTOR	4.7uH K	1	
	L9	NQL093K-R47X	P COIL	0.47uH K	1	
	L120	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L121	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L122	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L701	QQL231K-4R7Y	INDUCTOR	4.7uH K	1	
	L901	QQR1852-001	CHOKE COIL		1	
	L901 or	QQR0703-001	CHOKE COIL		1	
	CN501	QGB2027MD-26	CONNECTOR	B-B (1-26)	1	
	CN701	QGZ1601J1-15	CONNECTOR	(1-15)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	J1	QNB0190-001	ANT TERMINAL		1	
	J1 or	QNB0348-001	ANT TERMINAL		1	
	J321	QNN0832-001	PIN JACK		1	A
	J321	QNN0802-001	PIN JACK		1	B
	J702	QNS0283-001	3.5 JACK		1	A
	J801	QNZ0095-001	CONNECTOR		1	
	S701	QSW0648-001Z	TACT SWITCH		1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X521	QAX0714-001Z	C RESONATOR	16.000MHz	1	
	X701	QAX0667-001Z	C RESONATOR	8.000MHz	1	
	X702	QAX0953-001	CRYSTAL		1	
Switch board <02>						
	IC601	PCA9624PW-X	IC		1	
	IC661	PTC6526LQ-L	IC		1	
	IC681	KSM-2003TN2M	IR DETECT UNIT		1	
	Q627	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q627 or	2SC3928A/QR/-X	TRANSISTOR		1	
	D621	NSSM065T-X	LED		1	
	D622	NSSM065T-X	LED		1	
	D624	NSSM065T-X	LED		1	
	D627	RKZ5.6B2KG-X	Z DIODE		1	
	D627 or	MA8056/M/-X	Z DIODE		1	
	D630	LHQ974/LM/-X	LED		1	
	D631	LHQ974/LM/-X	LED		1	
	D632	LHQ974/LM/-X	LED		1	
	D661	HSU119-X	SI DIODE		1	
	D661 or	MA111-X	SI DIODE		1	
	C622	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C662	NCB31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C663	NCB31CK-223X	C CAPACITOR	0.022uF 16V K	1	
	C665	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C666	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	1	
	C682	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	


MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C687	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C688	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C689	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R608	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R609	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R610	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R611	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R612	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R613	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R624	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R625	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R631	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	
	R644	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	
	R645	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	
	R646	NRS181J-911X	MG RESISTOR	910Ω 1/8W J	1	
	R656	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	
	R657	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	
	R658	NRS181J-751X	MG RESISTOR	750Ω 1/8W J	1	
	R660	NRS181J-394X	MG RESISTOR	390kΩ 1/8W J	1	
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R664	NRS181J-224X	MG RESISTOR	220kΩ 1/8W J	1	
	R665	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R672	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R673	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R681	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R682	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R684	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1	
	R685	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L601	NQR0007-002X	FERRITE BEADS		1	
	L602	NQR0007-002X	FERRITE BEADS		1	
	L603	NQR0007-002X	FERRITE BEADS		1	
	L604	NQR0022-005X	FERRITE BEADS		1	
	CN601	QGZ1601K1-15S	CONNECTOR	(1-15)	1	
	EN601	QSW1231-002	ROTARY ENCODER		1	
	PJ601	QNS0298-001	3.5 JACK		1	
	S601	NSW0326-001X	TACT SWITCH		1	
	S602	NSW0326-001X	TACT SWITCH		1	
	S603	NSW0326-001X	TACT SWITCH		1	
	S604	NSW0326-001X	TACT SWITCH		1	
	S605	NSW0326-001X	TACT SWITCH		1	
	S606	NSW0326-001X	TACT SWITCH		1	
	S607	NSW0326-001X	TACT SWITCH		1	
	S608	NSW0326-001X	TACT SWITCH		1	
	S609	NSW0326-001X	TACT SWITCH		1	
	S610	NSW0326-001X	TACT SWITCH		1	
	S611	NSW0326-001X	TACT SWITCH		1	
FLM-CD5-1D Mecha control board <03>						
	Q101	2SC3928A/R/-X	TRANSISTOR		1	A,B
	Q101	or 2SD601A/R/-X	TRANSISTOR		1	A,B
	Q201	2SC3928A/R/-X	TRANSISTOR		1	A,B
	Q201	or 2SD601A/R/-X	TRANSISTOR		1	A,B
	Q301	PS1191RB22/BC/X	PHOTO TRANSISTOR		1	A,B
	Q302	PS1191RB22/BC/X	PHOTO TRANSISTOR		1	A,B
	D101	AN1105W21/AB/-X	IR LED		1	A,B
	D201	AN1105W21/AB/-X	IR LED		1	A,B
	R101	NRSA02J-391X	MG RESISTOR	390Ω 1/10W J	1	A,B
	R102	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B
	R103	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B
	R104	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B
	R105	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B
	R201	NRSA02J-391X	MG RESISTOR	390Ω 1/10W J	1	A,B
	R202	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B
	R203	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B
	R204	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	A,B
	R205	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B
	CN101	QGB2027LA-26X	CONNECTOR	B-B (1-26)	1	A,B
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	A,B
	SW1	NSW0291-001X	DETECT SWITCH		1	A,B

Packing materials and accessories

Block No.M3MM

No additional / supplemental order of WARRANTY CARDS are available.

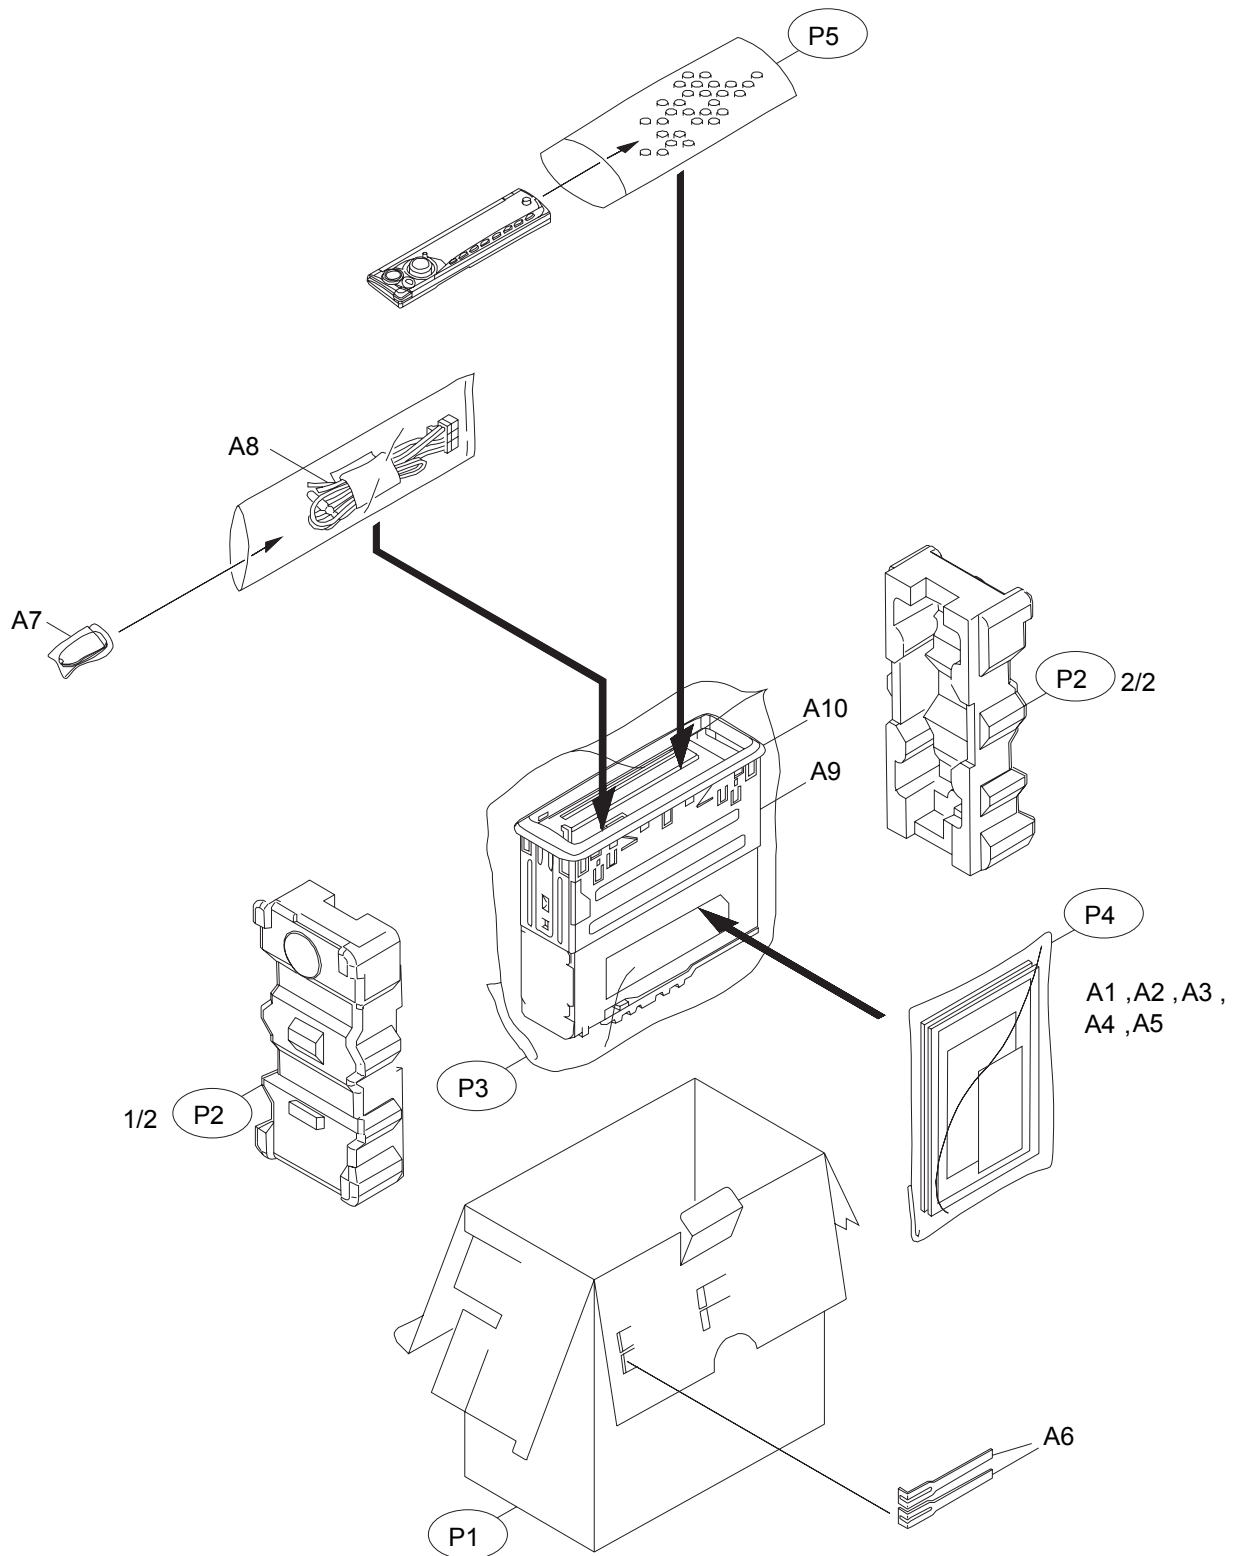

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK
KD-A315J	A	KD-R310J	B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
Packing and accessories <M3MM>						
	A1	GET0626-001A	INST BOOK	RNG SPA FRE	1	
	A2	GET0626-002A	INSALL MANUAL	RNG SPA FRE	1	
	A3	-----	WARRANTY CARD	BT-52008-1	1	
	A4	-----	WARRANTY CARD	BT-51029-3	1	A
	A4	-----	WARRANTY CARD	BT-51018-6	1	B
	A5	BT-51044-1	REGIST CARD		1	
	A6	GE40481-001A	HOOK		2	
	A7	RM-RK50C1	REMOCON UNIT		1	
△	A8	QAM1142-001	CAR CABLE		1	
	A9	GE20267-001A	MOUNTING SLEEVE		1	
	A10	GE20235-014A	TRIM PLATE		1	
	P1	GE33764-002A	CARTON		1	A
	P1	GE33767-001A	CARTON		1	B
	P2	GE10271-001A	CUSHION		1	
	P3	QPC03004315PB	POLY BAG	30cm x 43cm	1	
	P4	FSPG4002-001	POLY BAG		1	
	P5	GE40276-003A	AIR BUBBLE		1	