


EXPLODED VIEW

X92-4030-0x
X92-4440-0x



Parts with the exploded numbers larger than 700 are not supplied.

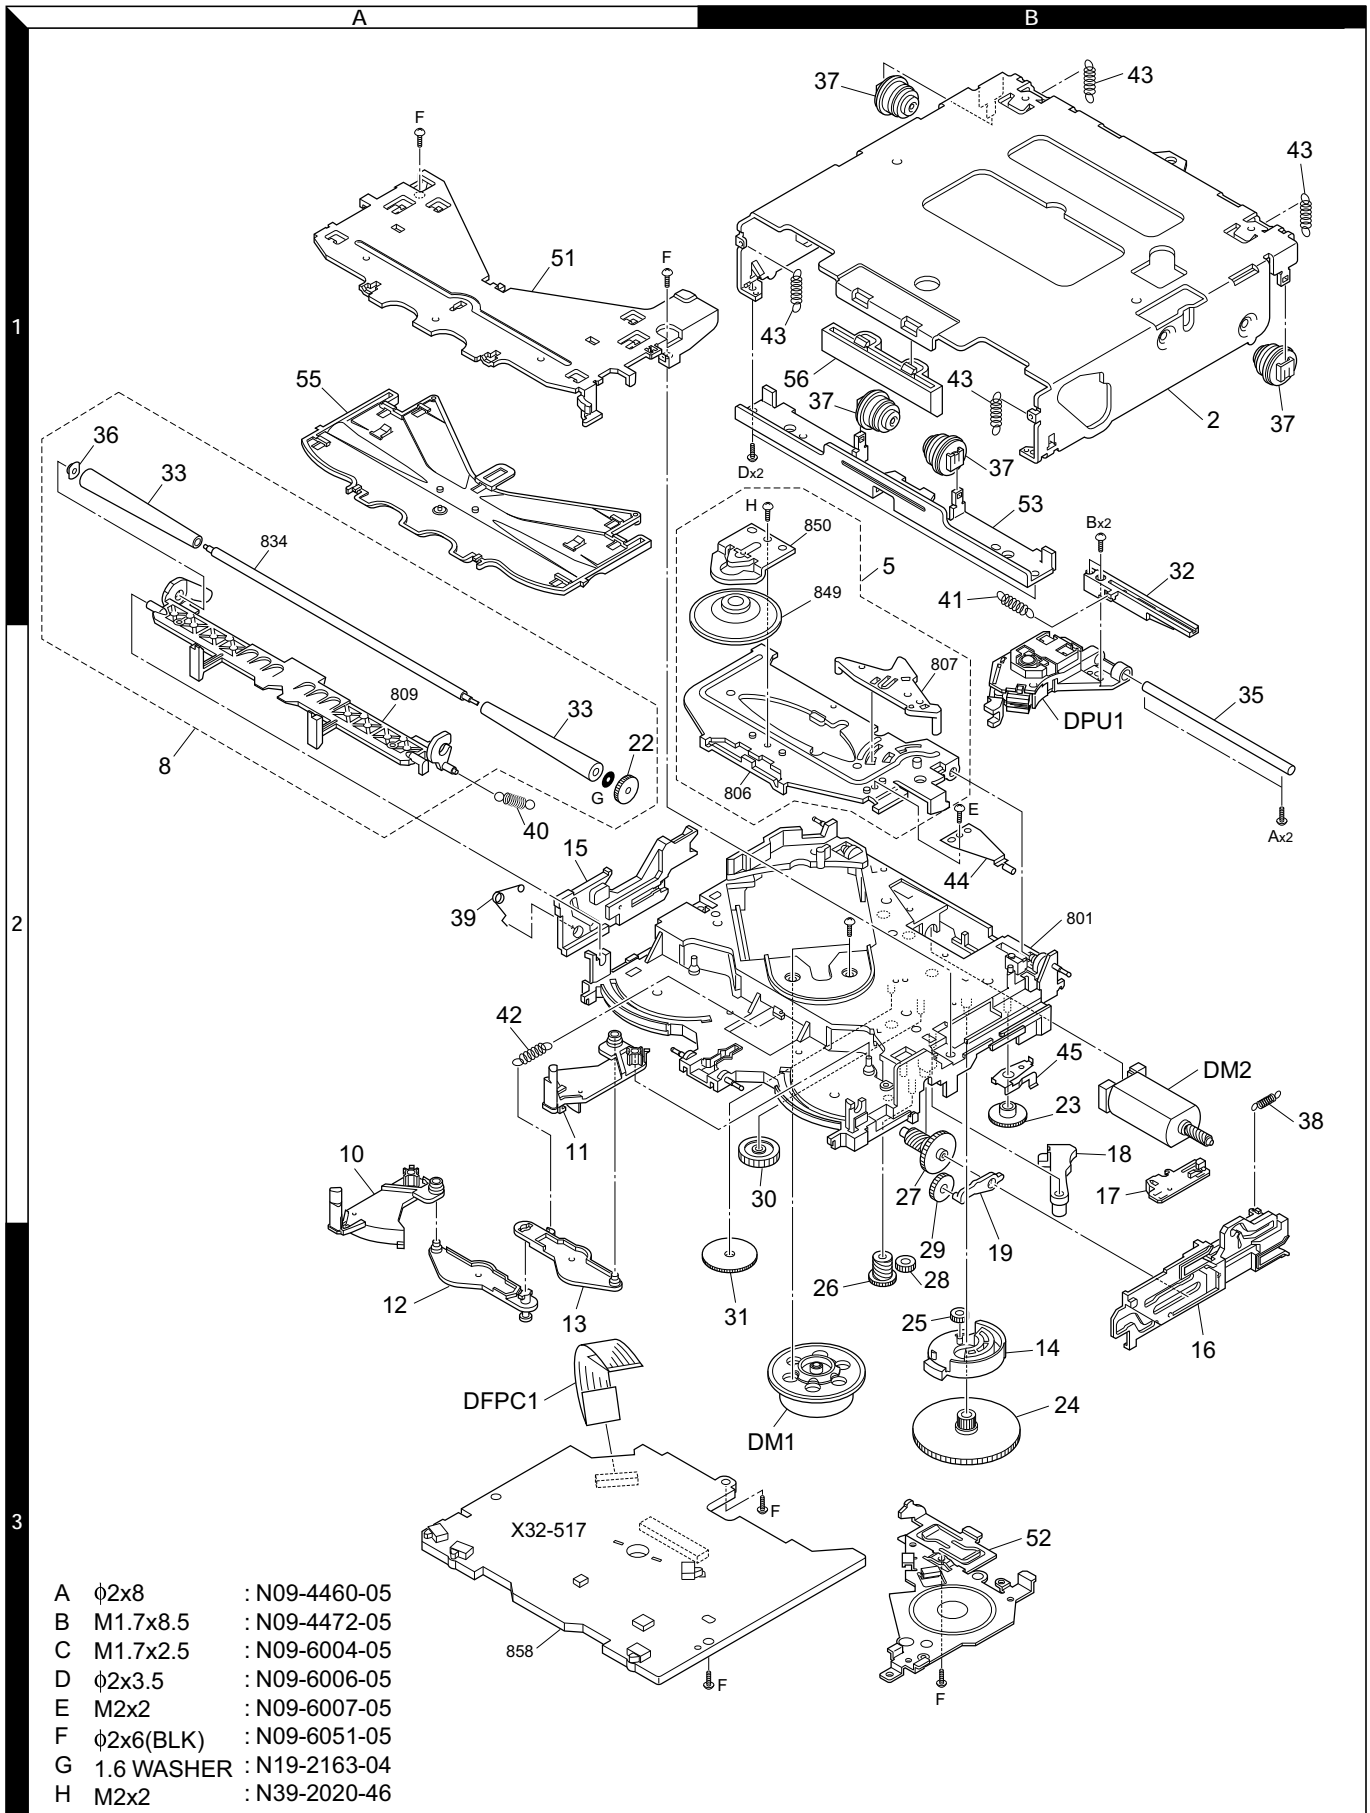

KDC-1020/S/119/S

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KDC-1020/1020S/119/119S					
206	1B	*	A52-0804-02	TOP PLATE	
PA1	3A	*	A64-2556-02	PANEL ASSY	K0
PA1	3A	*	A64-2557-02	PANEL ASSY	M1
PA1	3A	*	A64-2559-02	PANEL ASSY	K1
PA1	3A	*	A64-2679-02	PANEL ASSY	M2
210	3B		B07-3054-02	ESCUTCHEON	K0K1M1
210	3B		B07-3055-02	ESCUTCHEON	M2
211	3A	*	B10-4144-01	FRONT GLASS	K0
211	3A	*	B10-4145-01	FRONT GLASS	M1
211	3A	*	B10-4147-01	FRONT GLASS	K1
211	3A	*	B10-4233-01	FRONT GLASS	M2
-			B46-0100-50	WARRANTY CARD	
-			B58-1344-04	CAUTION CARD	K0K1
-			B58-1365-04	CAUTION CARD	
-		*	B64-2114-00	INST.MANUAL (ENG.FRE.SPA.POR.)	K0K1
-		*	B64-2115-00	INSTRUCTION MANUAL (ENG.T-CHI.)	M1M2
-		*	B64-2116-00	INSTRUCTION MANUAL (ARABIC)	M1M2
-		*	B64-2208-00	INSTRUCTION MANUAL (S-CHINES)	M1
215	1A		D10-4589-04	LEVER	
218	2A	*	E29-1872-02	CONDUCTIVE RUBBER	
△ DC1	1A		E30-4783-05	DC CORD	K0K1
△ DC1	1A		E30-4784-05	DC CORD	M1M2
FC1	2A		E39-0343-05	FLAT CABLE	
△ F1	2B		F52-0006-05	FUSE (MINI BLADE TYPE)	
-		*	H10-4801-02	POLYSTYRENE FOAMED FIXTURE	
-			H25-0329-04	PROTECTION BAG (280X450X0.03)	
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	
-		*	H54-2289-03	ITEM CARTON CASE	K0
-		*	H54-2290-03	ITEM CARTON CASE	M1
-		*	H54-2315-03	ITEM CARTON CASE	K1
-		*	H54-2380-03	ITEM CARTON CASE	M2
229	1A		J21-9641-13	MOUNTING HARDWARE ASSY	
233	3A	*	K24-3823-04	KNOB (SRC)	
234	3A	*	K24-3824-04	KNOB (AUD)	
235	3A	*	K24-3825-03	KNOB (VOL)	
236	3A	*	K24-3826-04	KNOB (EJECT)	
237	3A	*	K25-1396-03	KNOB (PRE1-6,ATT,RESET)	
238	3A	*	K25-1397-03	KNOB (AUTO,CLK,FM,AM)	
241	1A	*	N99-1719-05	SCREW SET	
A	3B		N30-3008-46	PAN HEAD MACHINE SCREW	
B	3A		N80-2006-46	PAN HEAD TAPTITE SCREW	
C	2A		N80-2008-45	PAN HEAD TAPTITE SCREW	
D	1B		N83-3005-46	PAN HEAD TAPTITE SCREW	
DME1	1B	*	X92-4030-00	MECHANISM ASSY	
SWITCH UNIT (X16-1460-13)					
245	2A	*	B11-1358-04	OPTICAL DIFFUSER	
246	2A	*	B11-1359-04	REFLECTION SHEET	
248	2A	*	B19-2130-03	LIGHTING BOARD	
D1-13			B30-1533-05	LED (1608,PG)	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D17,18			B30-1533-05	LED (1608,PG)	
D19			B30-1633-05	LED (WHITE)	
D20			B30-1533-05	LED (1608,PG)	
ED1		*	B38-1079-05	LIQUID CRYSTAL	
C1			CK73GB1H102K	CHIP C 1000PF	K
C2,3			CK73GB1E473K	CHIP C 0.047UF	K
C2,3			CK73GB1H473K	CHIP C 0.047UF	K
C4			CK73GB1H103K	CHIP C 0.010UF	K
C9			CK73GB1H103K	CHIP C 0.010UF	K
249	2A		E29-1829-04	CONDUCTIVE RUBBER	
250	2A		E29-1834-04	CONDUCTIVE RUBBER	
J1			E59-0828-05	RECTANGULAR PLUG	
-		*	J19-5130-04	HOLDER	
R2-4			RK73GB2A471J	CHIP R 470 J	1/10W
R5			RK73GB2A102J	CHIP R 1.0K J	1/10W
R7			RK73GB2A472J	CHIP R 4.7K J	1/10W
R8			RK73GB2A563J	CHIP R 56K J	1/10W
R10			RK73GB2A4R7J	CHIP R 4.7 J	1/10W
R14,15			RK73FB2B331J	CHIP R 330 J	1/8W
R16-20			RK73FB2B511J	CHIP R 510 J	1/8W
R21,22			RK73FB2B221J	CHIP R 220 J	1/8W
IC1			LC75853NE	MOS-IC	
Q1			DTA114EUA	DIGITAL TRANSISTOR	
Q1			UN5111	DIGITAL TRANSISTOR	
ELECTRIC UNIT (X25-9120-14/22)					
C1			C90-5242-05	ELECTRO 3300UF	16WV
C21			CK73GB1H103K	CHIP C 0.010UF	K
C40			CK73GB1H103K	CHIP C 0.010UF	K
C50			CE04NW1E100M	ELECTRO 10UF	25WV
C50,51			CE04NW1E100M	ELECTRO 10UF	25WV
C52-54			CE04NW1C100M	ELECTRO 10UF	16WV
C55			CE04NW1E100M	ELECTRO 10UF	25WV
C56			CE04CW1H100M	ELECTRO 10UF	50WV
C57			C90-2980-05	ELECTRO 220UF	16WV
C58			C90-2962-05	ELECTRO 100UF	16WV
C63			CE04NW1C220M	ELECTRO 22UF	16WV
C101			CE04NW0J101M	ELECTRO 100UF	6.3WV
C102			CK73GB1H103K	CHIP C 0.010UF	K
C103			CK73GB1C104K	CHIP C 0.10UF	K
C103			CK73GB1H104K	CHIP C 0.10UF	K
C104,105			CC73GCH1H150J	CHIP C 15PF	J
C106			CK73GB1H472K	CHIP C 4700PF	K
C142			CK73GB1C104K	CHIP C 0.10UF	K
C142			CK73GB1H104K	CHIP C 0.10UF	K
C201			CE04NW1A470M	ELECTRO 47UF	10WV
C202			CK73GB1H103K	CHIP C 0.010UF	K
C203-205			CE04NW1H2R2M	ELECTRO 2.2UF	50WV
C206			CK73GB1H153K	CHIP C 0.015UF	K
C207			CK73GB1A474K	CHIP C 0.47UF	K
C208,209			CK73GB1C104K	CHIP C 0.10UF	K
C208,209			CK73GB1H104K	CHIP C 0.10UF	K
C210			CK73GB1E333K	CHIP C 0.033UF	K
C210			CK73GB1H333K	CHIP C 0.033UF	K

E : Europe K : North America M : Other Areas

W : Without Europe

K0 : KDC-119

K1 : KDC-119S

M1 : KDC-1020

M2 : KDC-1020S

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9120-14/22)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
C211			CC73GCH1H151J	CHIP C 150PF J		R113,114			RK73GB2A473J	CHIP R 47K J 1/10W	
C223,224			C90-2597-05	ELECTRO 10UF 16WV		R115			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C225			CK73GB1H103K	CHIP C 0.010UF K		R116			RK73GB2A103J	CHIP R 10K J 1/10W	
C251-254			C90-5296-05	NP-ELECT 0.22UF 50WV		R117			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C255			CE04NW1H010M	ELECTRO 1.0UF 50WV		R118			RK73GB2A103J	CHIP R 10K J 1/10W	
C256			CE04NW1A101M	ELECTRO 100UF 10WV	K0K1	R119			RK73GB2A473J	CHIP R 47K J 1/10W	
C256			CE04NW1A330M	ELECTRO 33UF 10WV	M1M2	R121			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C257			CE04NW1H010M	ELECTRO 1.0UF 50WV		R122			RK73GB2A101J	CHIP R 100 J 1/10W	
C258			C90-2935-05	ELECTRO 1.0UF 50WV		R123			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C301			CE04NW1A101M	ELECTRO 100UF 10WV		R125			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C302,303			CK73GB1H103K	CHIP C 0.010UF K		R126			RK73GB2A104J	CHIP R 100K J 1/10W	
C304			CE04CW1A101M	ELECTRO 100UF 10WV		R127			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C305			CK73GB1H103K	CHIP C 0.010UF K		R128			RK73GB2A225J	CHIP R 2.2M J 1/10W	
C306			C90-2594-05	ELECTRO 10UF 10WV		R129,130			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C307			CK73GB1H103K	CHIP C 0.010UF K		R131			RK73GB2A682J	CHIP R 6.8K J 1/10W	
C309			CK73GB1H103K	CHIP C 0.010UF K		R132			RK73GB2A223J	CHIP R 22K J 1/10W	
CN1			E40-9550-05	FLAT CABLE CONNECTOR		R133			RK73GB2A164J	CHIP R 160K J 1/10W	
J1			E04-0312-05	RF COAXIAL CABLE RECEPTACLE		R136			RK73GB2A473J	CHIP R 47K J 1/10W	K0K1
J2			E58-0863-15	RECTANGULAR RECEPTACLE		R136,137			RK73GB2A473J	CHIP R 47K J 1/10W	M1M2
J3			E58-0880-05	RECTANGULAR RECEPTACLE		R138,139			RK73GB2A473J	CHIP R 47K J 1/10W	K0K1
J5			E63-0852-05	PIN JACK		R139			RK73GB2A473J	CHIP R 47K J 1/10W	M1M2
L1			L33-1170-05	CHOKE COIL ASSY		R143			RK73GB2A472J	CHIP R 4.7K J 1/10W	
L2			L33-1807-05	CHOKE COIL		R144			RK73GB2A104J	CHIP R 100K J 1/10W	
L4			L33-1123-05	LINE FILTER COIL		R201			RK73GB2A272J	CHIP R 2.7K J 1/10W	
L101			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)		R202,203			RK73GB2A472J	CHIP R 4.7K J 1/10W	
L201			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)		R223,224			RK73FB2B271J	CHIP R 270 J 1/8W	
L303-306			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)		R251			RK73GB2A472J	CHIP R 4.7K J 1/10W	K0K1
X1			L77-1167-05	CRYSTAL RESONATOR (4.19M)		R254			RK73GB2A472J	CHIP R 4.7K J 1/10W	K0K1
D	2B		N83-3005-46	PAN HEAD TAPTITE SCREW		R255			RK73GB2A333J	CHIP R 33K J 1/10W	
E	2B		N80-3010-46	PAN HEAD TAPTITE SCREW		R256			RK73FB2B102J	CHIP R 1.0K J 1/8W	
F	2B		N83-3020-46	PAN HEAD TAPTITE SCREW		R257	*		RK73GB2A362J	CHIP R 3.6K J 1/10W	
G	2B		N86-2606-46	BINDING HEAD TAPTITE SCREW		R258			RK73GB2A101J	CHIP R 100 J 1/10W	K0K1
CP1			R90-1056-05	MULTIPLE RESISTOR		R258			RK73GB2A221J	CHIP R 220 J 1/10W	M1M2
CP2			R90-1047-05	MULTIPLE RESISTOR		R260			RK73GB2A751J	CHIP R 750 J 1/10W	K0K1
CP3			R90-1046-05	MULTIPLE RESISTOR		R261	*		RK73GB2A100J	CHIP R 10 J 1/10W	M1M2
R10			RK73FB2B303J	CHIP R 30K J 1/8W		R261			RK73GB2A431J	CHIP R 430 J 1/10W	K0K1
R11			RK73GB2A103J	CHIP R 10K J 1/10W		R263			RK73GB2A184J	CHIP R 180K J 1/10W	K0K1
R12			RK73GB2A104J	CHIP R 100K J 1/10W		R263			RK73GB2A432J	CHIP R 4.3K J 1/10W	M1M2
R20			RD14DB2H332J	SMALL-RD 3.3K J 1/2W		R264			RK73GB2A473J	CHIP R 47K J 1/10W	
R22			RK73GB2A103J	CHIP R 10K J 1/10W		R415			RK73GB2A104J	CHIP R 100K J 1/10W	
R23			RK73GB2A104J	CHIP R 100K J 1/10W		W151			R92-2053-05	CHIP R 0 J 1/8W	
R51			RK73GB2A473J	CHIP R 47K J 1/10W		W152			R92-1252-05	CHIP R 0 OHM J 1/16W	
R57	*		RK73FB2B152J	CHIP R 1.5K J 1/8W		W155			R92-1252-05	CHIP R 0 OHM J 1/16W	
R58			RK73GB2A472J	CHIP R 4.7K J 1/10W		W156,157			R92-2053-05	CHIP R 0 J 1/8W	
R67			RK73GB2A103J	CHIP R 10K J 1/10W		W158,159			R92-1252-05	CHIP R 0 OHM J 1/16W	
R71	*		RK73GB2A823J	CHIP R 82K J 1/10W		W160-165			R92-2053-05	CHIP R 0 J 1/8W	
R72	*		RK73GB2A363J	CHIP R 36K J 1/10W		W167-169			R92-1252-05	CHIP R 0 OHM J 1/16W	
R73			RK73GB2A104J	CHIP R 100K J 1/10W		W171-174			R92-1252-05	CHIP R 0 OHM J 1/16W	
R103,104			RK73GB2A222J	CHIP R 2.2K J 1/10W		W176-178			R92-1252-05	CHIP R 0 OHM J 1/16W	M1M2
R105			RK73GB2A471J	CHIP R 470 J 1/10W		W179			R92-2052-05	CHIP R 0 OHM J 1/10W	
R106			RK73GB2A104J	CHIP R 100K J 1/10W		D1			S2V20*A	DIODE	
R107,108			RK73GB2A222J	CHIP R 2.2K J 1/10W		D1			1N5393G-M6	DIODE	
R110			RK73GB2A472J	CHIP R 4.7K J 1/10W		D10			MA4068(N)-M	ZENER DIODE	
						D11			D1F60	DIODE	M1M2
						D12			AM01Z	DIODE	M1M2

E : Europe K : North America M : Other Areas

W : Without Europe

K0 : KDC-119

K1 : KDC-119S

M1 : KDC-1020

M2 : KDC-1020S

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9120-14/22)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D12			DSM1SD2	DIODE	M1M2	A1		*	X86-3510-11	FRONT-END UNIT	
D12			ERA15-02	DIODE	M1M2						
D13			D1F60	DIODE							
D14			AM01Z	DIODE							
D14			DSM1SD2	DIODE							
D14			ERA15-02	DIODE							
D20			MA4068(N)-M	ZENER DIODE							
D40			1SS133	DIODE							
D50			1SS133	DIODE							
D51			HZS9A1L	ZENER DIODE							
D51			MA4082(N)-L	ZENER DIODE							
D70			MA4068(N)-M	ZENER DIODE							
D101			1SS133	DIODE							
D103,104			1SS133	DIODE							
D201,202			MA4068(N)-M	ZENER DIODE							
D251-253			1SS133	DIODE							
D261-263			AM01Z	DIODE	M1M2						
D261-263			DSM1SD2	DIODE	M1M2						
D261-263			ERA15-02	DIODE	M1M2						
D264			D1F60	DIODE	M1M2						
D264		*	S1J	DIODE	M1M2						
D265,266			AM01Z	DIODE	M1M2						
D265,266			DSM1SD2	DIODE	M1M2						
D265,266			ERA15-02	DIODE	M1M2						
D267,268			D1F60	DIODE	M1M2						
D267,268		*	S1J	DIODE	M1M2						
IC1		*	UPD780058GC430	MI-COM IC							
IC2			TDA7407D	ANALOGUE IC							
IC4			TDA7386	ANALOGUE IC	K0K1						
IC4			TDA7560	ANALOGUE IC	M1M2						
IC7			BA4911-V4	ANALOGUE IC							
IC8			HD74HC27FP	MOS-IC							
IC11			S-80835ANNP	MOS-IC							
IC12			BR24C01AF	MEMORY IC							
IC12			BR24C01AF-W	MEMORY IC							
IC12			M24C01-WMN6T	MEMORY IC							
IC12			S-24C01B	MEMORY IC							
Q10			2SC4081	TRANSISTOR							
Q10			2SD1819A	TRANSISTOR							
Q20			2SC4081	TRANSISTOR							
Q20			2SD1819A	TRANSISTOR							
Q40			DTA124EUA	DIGITAL TRANSISTOR							
Q40			UN5112	DIGITAL TRANSISTOR							
Q50			2SA1036K	TRANSISTOR							
Q51			UMC2N	TRANSISTOR							
Q53			UMC2N	TRANSISTOR	M1M2						
Q55			2SD2375	TRANSISTOR							
Q55			2SD2396	TRANSISTOR							
Q70			2SC4081	TRANSISTOR							
Q70			2SD1819A	TRANSISTOR							
Q223,224			DTC143TUA	DIGITAL TRANSISTOR							
Q223,224			UN5216	DIGITAL TRANSISTOR							
Q251			DTC114YUA	DIGITAL TRANSISTOR							
Q251			UN5214	DIGITAL TRANSISTOR							
TH1			PTH9C42BE471Q	POSITIVE RESISTOR							

E : Europe K : North America M : Other Areas

W : Without Europe

K0 : KDC-119

K1 : KDC-119S

M1 : KDC-1020

M2 : KDC-1020S

△ Indicates safety critical components.

X92-4030-0x
X92-4440-0x

PARTS LIST

*New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	D e s t i n a t i o n
CD PLAYER UNIT (X32-5170-0x, X32-5190-0x)					
C1,2 C3 C4 C5 C6			CK73GB0J105K CK73FB1A225K C92-0566-05 CC73GCH1H150J CC73GCH1H020C	CHIP C 1.0UF K CHIP C 2.2UF K CHIP-TAN 10UF 6.3WV CHIP C 15PF J CHIP C 2.0PF C	
C7 C8 C10 C11 C12			CK73GB1C104K CK73GB0J105K CK73GB1H472K CK73GB1H682K CK73GB1H332K	CHIP C 0.10UF K CHIP C 1.0UF K CHIP C 4700PF K CHIP C 6800PF K CHIP C 3300PF K	
C13 C14 C15 C16 C17			CK73GB1C333K CK73GB1H472K CK73GB1E473K CC73GCH1H151J CK73GB1H472K	CHIP C 0.033UF K CHIP C 4700PF K CHIP C 0.047UF K CHIP C 150PF J CHIP C 4700PF K	
C18 C19,20 C21 C23 C24			CC73GCH1H221J CK73GB1C104K CK73FB1A225K CK73GB1H102K CK73GB1E223K	CHIP C 220PF J CHIP C 0.10UF K CHIP C 2.2UF K CHIP C 1000PF K CHIP C 0.022UF K	
C25 C26 C28 C29 C33			CK73GB1H153K CK73GB0J105K CK73GB0J105K CK73GB1C104K CK73GB1C104K	CHIP C 0.015UF K CHIP C 1.0UF K CHIP C 1.0UF K CHIP C 0.10UF K CHIP C 0.10UF K	
C35 C39 C40 C41 C42			CK73GB1C104K CK73GB1H152K CK73GB1H103K CK73EB1C225K CK73GB1H152K	CHIP C 0.10UF K CHIP C 1500PF K CHIP C 0.010UF K CHIP C 2.2UF K CHIP C 1500PF K	
C44 C46 C51 C55 C67,68			CK73GB1H103K CK73GB1E473K CK73GB1C104K CK73GB1C104K CK73GB1C104K	CHIP C 0.010UF K CHIP C 0.047UF K CHIP C 0.10UF K CHIP C 0.10UF K CHIP C 0.10UF K	
C71,72 C77,78 C79,80 C85 C89			CK73GB1H471K CC73GCH1H680J CK73GB1H222K CK73GB1C104K CK73GB1H222K	CHIP C 470PF K CHIP C 68PF J CHIP C 2200PF K CHIP C 0.10UF K CHIP C 2200PF K	
CN1 CN1 CN2 CN2		*	E40-9536-05 E41-0193-05 E40-9339-05 E41-0129-05	FLAT CABLE CONNECTOR (16p) FLAT CABLE CONNECTOR (16p) FLAT CABLE CONNECTOR (22P) FLAT CABLE CONNECTOR	
X1			L78-0572-05	RESONATOR 16.93MHZ	
CP1 CP2 R3 R5 R6		*	R90-1019-05 R90-1014-05 RK73GB2A272J RK73GB2A361J RK73GB2A272J	MULTI-COMP 100 X2 MULTI-COMP 100 X4 CHIP R 2.7K J 1/10W CHIP R 360 J 1/10W CHIP R 2.7K J 1/10W	
R9 R10,11			RK73FB2B100J RK73GB2A103J	CHIP R 10 J 1/8W CHIP R 10K J 1/10W	

Ref. No.	A d d	N e w	Parts No.	Description	D e s t i n a t i o n
R12 R15 R16 R17 R18		*	RK73GB2A912J RK73GB2A824J RK73GB2A223J RK73GB2A433J RK73GB2A392J	CHIP R 9.1K J 1/10W CHIP R 820K J 1/10W CHIP R 22K J 1/10W CHIP R 43K J 1/10W CHIP R 3.9K J 1/10W	
R19 R20 R21 R32 R34		*	RK73GB2A513J RK73GB2A104J RK73GB2A244J RK73GB2A683J RK73GB2A363J	CHIP R 51K J 1/10W CHIP R 100K J 1/10W CHIP R 240K J 1/10W CHIP R 68K J 1/10W CHIP R 36K J 1/10W	
R36 R37 R38 R40 R46		*	RK73GB2A151J RK73GB2A471J RK73GB2A224J RK73GB2A133J RK73GB2A102J	CHIP R 150 J 1/10W CHIP R 470 J 1/10W CHIP R 220K J 1/10W CHIP R 13K J 1/10W CHIP R 1.0K J 1/10W	
R47 R49 R52 R54 R70			RK73GB2A103J RK73GB2A472J RK73GB2A104J RK73GB2A104J RK73GB2A103J	CHIP R 10K J 1/10W CHIP R 4.7K J 1/10W CHIP R 100K J 1/10W CHIP R 100K J 1/10W CHIP R 10K J 1/10W	
R71 R73 R74 R75 R76		*	RK73GB2A113J RK73GB2A473J RK73GB2A123J RK73GB2A333J RK73GB2A103J	CHIP R 11K J 1/10W CHIP R 47K J 1/10W CHIP R 12K J 1/10W CHIP R 33K J 1/10W CHIP R 10K J 1/10W	
R79,80 R81 R82 R84 R101,102		*	RK73GB2A103J RK73GB2A333J RK73GB2A133J RK73GB2A103J RK73GB2A332J	CHIP R 10K J 1/10W CHIP R 33K J 1/10W CHIP R 13K J 1/10W CHIP R 10K J 1/10W CHIP R 3.3K J 1/10W	
R103,104 R107,108 R110 R117,118 R121,122		*	RK73GB2A562J RK73FB2B331J RK73FB2B201J RK73FB2B203J RK73FB2B203J	CHIP R 5.6K J 1/10W CHIP R 330 J 1/8W CHIP R 200 J 1/8W CHIP R 20K J 1/8W CHIP R 20K J 1/8W	
R125,126 R202 R214 R218 R233		*	RK73FB2B203J RK73GB2A104J RK73GB2A104J RK73GB2A473J RK73GB2A622J	CHIP R 20K J 1/8W CHIP R 100K J 1/10W CHIP R 100K J 1/10W CHIP R 47K J 1/10W CHIP R 6.2K J 1/10W	
R234			RK73GB2A103J	CHIP R 10K J 1/10W	
S1,2 S3 S4 S4		*	S68-0863-05 S68-0862-05 S68-0864-05 S68-0864-05	PUSH SWITCH PUSH SWITCH PUSH SWITCH PUSH SWITCH	A2A3 B2B3
D1 D2 D3 D4 IC1			DAN202U MA8051-L DA204U DAN202U AN22000AA	DIODE ZENER DIODE DIODE DIODE ANALOGUE IC	
IC2 IC2 IC2 IC2		*	MN662773KH2 MN662773KH2 MN662774KJ2 MN662774KJ2	MOS-IC MOS-IC MOS-IC MOS-IC	B0B1B2 B3B4B5 A0A1A2 A3A4A5

A0 : X92-4030-00 (DXM-6000W) A3 : X92-4030-03 (DXM-6003W)
A1 : X92-4030-01 (DXM-6001W) A4 : X92-4030-04 (DXM-6004W)
A2 : X92-4030-02 (DXM-6002W) A5 : X92-4030-05 (DXM-6005W)
B0 : X92-4440-00 (DXM-6100W) B3 : X92-4440-03 (DXM-6103W)
B1 : X92-4440-01 (DXM-6101W) B4 : X92-4440-04 (DXM-6104W)
B2 : X92-4440-02 (DXM-6102W) B5 : X92-4440-05 (DXM-6105W)

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	D e s t i n a t i o n
IC4		*	BA5824FP	ANALOGUE IC	
IC6		*	NJM4580M1	ANALOGUE IC	
Q1			MCH6101	TRANSISTOR	
Q2			DTC124EUA	DIGITAL TRANSISTOR	
Q3			DTA143XUA	DIGITAL TRANSISTOR	
Q4			2SA1362(Y)	TRANSISTOR	
Q5			DTC124EUA	DIGITAL TRANSISTOR	
CD MECHANISM ASSY (X92-4030-0x, X92-4440-0x)					
2	1B	*	A10-4827-12	CHASSIS OUTER	
5	2B	*	D10-4576-23	ARM ASSY CLAMP	
8	2A	*	D10-4579-03	LEVER ASSY ROLLER	
10	3A	*	D10-4581-13	ARM DISC-L	
11	2A	*	D10-4582-13	ARM DISC-R	
12	3A	*	D10-4583-03	ARM JOINT-L	
13	3A	*	D10-4584-03	ARM JOINT-R	
14	3B	*	D10-4585-03	ARM CARRIER	
15	2A	*	D10-4586-03	SLIDER L	
16	3B	*	D10-4587-02	SLIDER R	
17	3B	*	D10-4588-03	SLIDER TRIG	
18	3B	*	D10-4595-04	ARM LOCK	
19	3B	*	D10-4596-04	ARM ROLLER	
22	2A	*	D13-2151-04	GEAR ROLLER	
23	2B	*	D13-2152-04	GEAR HELICAL-1	
24	3B	*	D13-2153-04	GEAR SUN	
25	3B	*	D13-2154-04	GEAR PLANET	
26	3B	*	D13-2155-04	WORM 2	
27	3B	*	D13-2156-04	GEAR HELICAL-2	
28	3B	*	D13-2157-04	GEAR LOAD-1	
29	3B	*	D13-2158-04	GEAR LOAD-2	
30	3B	*	D13-2168-04	GEAR PICK-1	
31	3B	*	D13-2171-04	GEAR PICK-2	
32	2B	*	D13-2172-03	RACK (GEAR)	
33	2A	*	D14-0759-04	ROLLER N100X3DIES	
35	2B	*	D21-2382-04	SHAFT PICK	
36	1A	*	D23-0954-04	RETAINER	
37	1B	*	D39-0246-05	DAMPER	
38	2B	*	G01-3072-04	EXTENSION SPRING TRIGGER	
39	2A	*	G01-3073-04	TORSION COIL SPRING ROLLER-L	
40	2A	*	G01-3074-04	EXTENSION SPRING ROLLER-R	
41	2B	*	G01-3075-04	EXTENSION SPRING PICKUP	
42	2A	*	G01-3076-04	EXTENSION SPRING JOINT-SP	
43	1B	*	G01-3077-04	EXTENSION SPRING FLOATING	
44	2B	*	G02-1399-04	FLAT SPRING CLAMP	
45	2B	*	G02-1408-04	FLAT SPRING WORM	
51	1A	*	J21-9676-12	MOUNTING HARDWARE GUIDE-BKT	
52	3B	*	J21-9677-02	MOUNTING HARDWARE GEAR-BKT	
53	1B	*	J21-9678-03	MOUNTING HARDWARE DAMPER-BKT	
55	1A	*	J90-1001-11	GUIDE 1	
56	1B	*	J90-1023-03	GUIDE 2	
DFPC1	3A	*	J84-0128-15	FLEXIBLE P.W.B. PICK-FPC	
A	2B	*	N09-4460-05	TAPTITE SCREW PT2X8-SARA	
B	1B	*	N09-4472-05	MACHINE SCREW PICK-RACK	

Ref. No.	A d d	N e w	Parts No.	Description	D e s t i n a t i o n
C	2B	*	N09-6004-05	MACHINE SCREW M1.7X2.5	
D	1B	*	N09-6006-05	TAPTITE SCREW ST-2X3.5	
E	2B	*	N09-6007-05	MACHINE SCREW M2X2	
F	1A	*	N09-6051-05	TAPTITE SCREW PT2X6-BIND	
G	2A	*	N19-2163-04	FLAT WASHER 1.6X0.25	
H	1B	*	N39-2020-46	MACHIN SCREW M2X2	
DM1	3B	*	T42-1066-04	DC MOTOR ASSY SP	
DM2	2B	*	T42-1067-04	DC MOTOR ASSY LO	
DPU1	2B	*	T25-0223-05	OPTICAL PICKUP HEAD	

A0 : X92-4030-00 (DXM-6000W) A3 : X92-4030-03 (DXM-6003W)
A1 : X92-4030-01 (DXM-6001W) A4 : X92-4030-04 (DXM-6004W)
A2 : X92-4030-02 (DXM-6002W) A5 : X92-4030-05 (DXM-6005W)

B0 : X92-4440-00 (DXM-6100W) B3 : X92-4440-03 (DXM-6103W)
B1 : X92-4440-01 (DXM-6101W) B4 : X92-4440-04 (DXM-6104W)
B2 : X92-4440-02 (DXM-6102W) B5 : X92-4440-05 (DXM-6105W)