


EXPLODED VIEW • PARTS LIST

DCP section

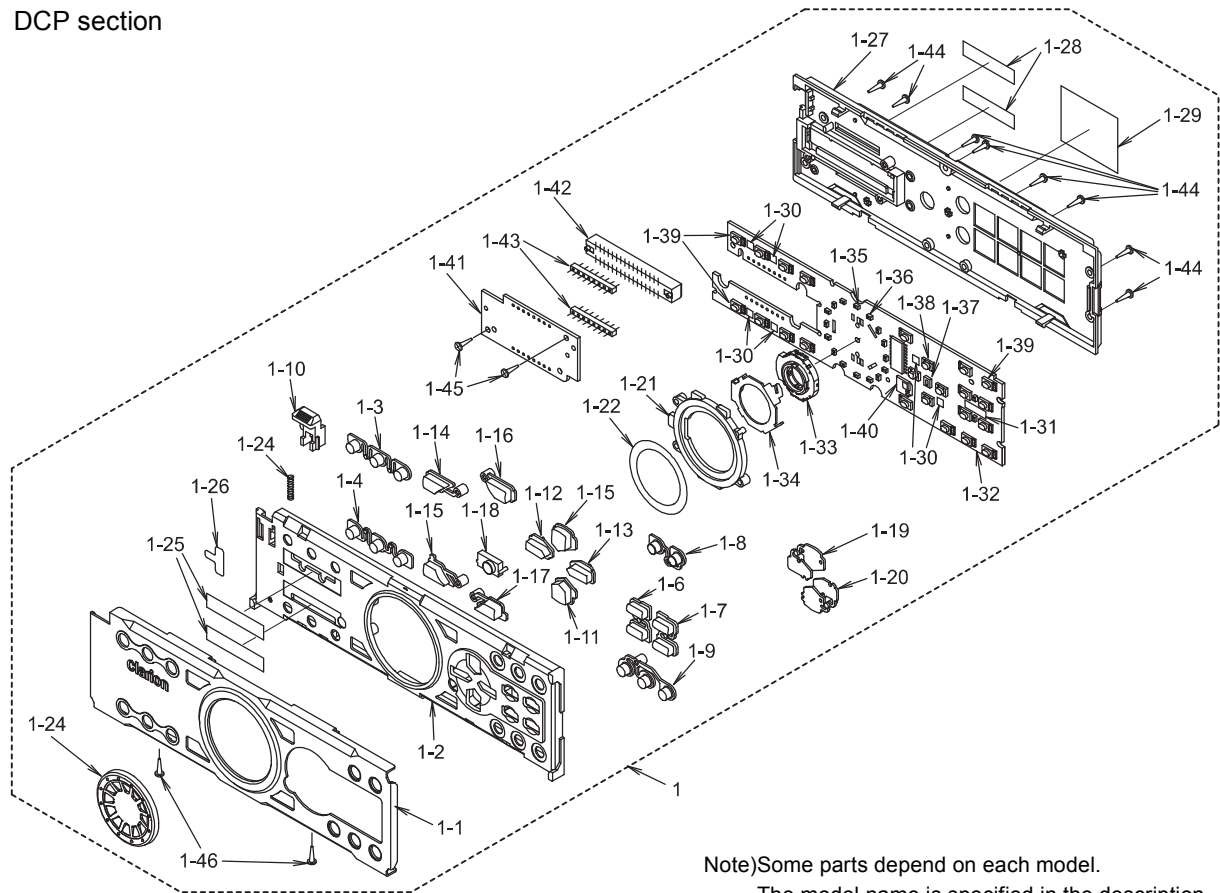


Note)Some parts depend on each model.
The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCY-394-600 DCY-410-800	DCP ASSY(B-A) DCP ASSY(K-A)	1
1-1	371-5708-00 371-5708-04	FACE PANEL(B-A) FACE PANEL(K-A)	1
1-2	370-5990-03	ESCUTCHION	1
1-3	382-6381-01	BUTTON(1-3)	1
1-4	382-6382-01	BUTTON(4-6)	1
1-5	382-6383-00	BUTTON(FNC/BND)	1
1-6	382-6385-00	BUTTON(ENT/ISR)	1
1-7	382-6386-00	BUTTON(AM/DISP)	1
1-8	382-6387-03	BUTTON(SAT/OPEN)	1
1-9	382-6388-02	BUTTON(SC/RP/RD)	1
1-10	382-6389-03 382-6389-02	BUTTON(REL)(B-A) BUTTON(REL)(K-A)	1
1-11	382-6437-00	BUTTON(BND)	1
1-12	382-6438-00	BUTTON(LEFT)	1
1-13	382-6439-00	BUTTON(RIGHT)	1
1-14	382-6440-00	BUTTON(VSD/EQ)	1
1-15	382-6441-00	BUTTON(PL2)	1
1-16	382-6442-00	BUTTON(EQ)	1
1-17	382-6443-00	BUTTON(ADJ)	1
1-18	335-6676-00	IR-FILTER	1
1-19	335-6696-00	BUTTON HOLDER	1
1-20	335-6697-00	BUTTON HOLDER	1
1-21	335-6698-00	ILLUMI PLATE	1
1-22	347-6759-00	FILM	1
1-23	750-6722-00	SPRING	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-24	947-0523-00	KNOB ASSY	1
1-25	347-6707-00	COVER-FILM	2
1-26	347-6710-00	SURGE FILM	1
1-27	335-6675-01	REAR -CVR	1
1-28	347-6708-00	COVER-FILM	2
1-29	347-6709-00	COVER-FILM	1
1-30	345-8727-00	RUBBER PART	6
1-31	345-8744-00	RUBBER PART	1
1-32	039-2100-00	PWB(DCP) (WITHOUT COMPONENT)	1
1-33	013-8004-50	ROTARY SW	1
1-34	331-3322-00	JOG-SW-HOLDER	1
1-35	001-7043-90	DIODE(GREEN)	10
1-36	001-7064-90	DIODE(RED)	8
1-37	001-7040-90	DIODE(BLUE)	1
1-38	013-6507-50	SWITCH	4
1-39	013-6519-50	LUMI SWITCH(R/G)	19
1-40	060-4008-00	IR-RECEIVER	1
1-41	039-2101-00	PWB(CONNECTOR) (WITHOUT COMPONENT)	1
1-42	076-0647-00	PLUG(16P)	1
1-43	076-0658-08	PLUG(8P)	2
1-44	716-0872-11	SCREW(M1.7×6)	8
1-45	716-1764-00	SCREW(M1.7×5)	2
1-46	716-0872-11 716-1764-00	SCREW(M1.7×6)(B-A) SCREW(M1.7×5)(K-A)	2 2

Rear-Escutcheon section

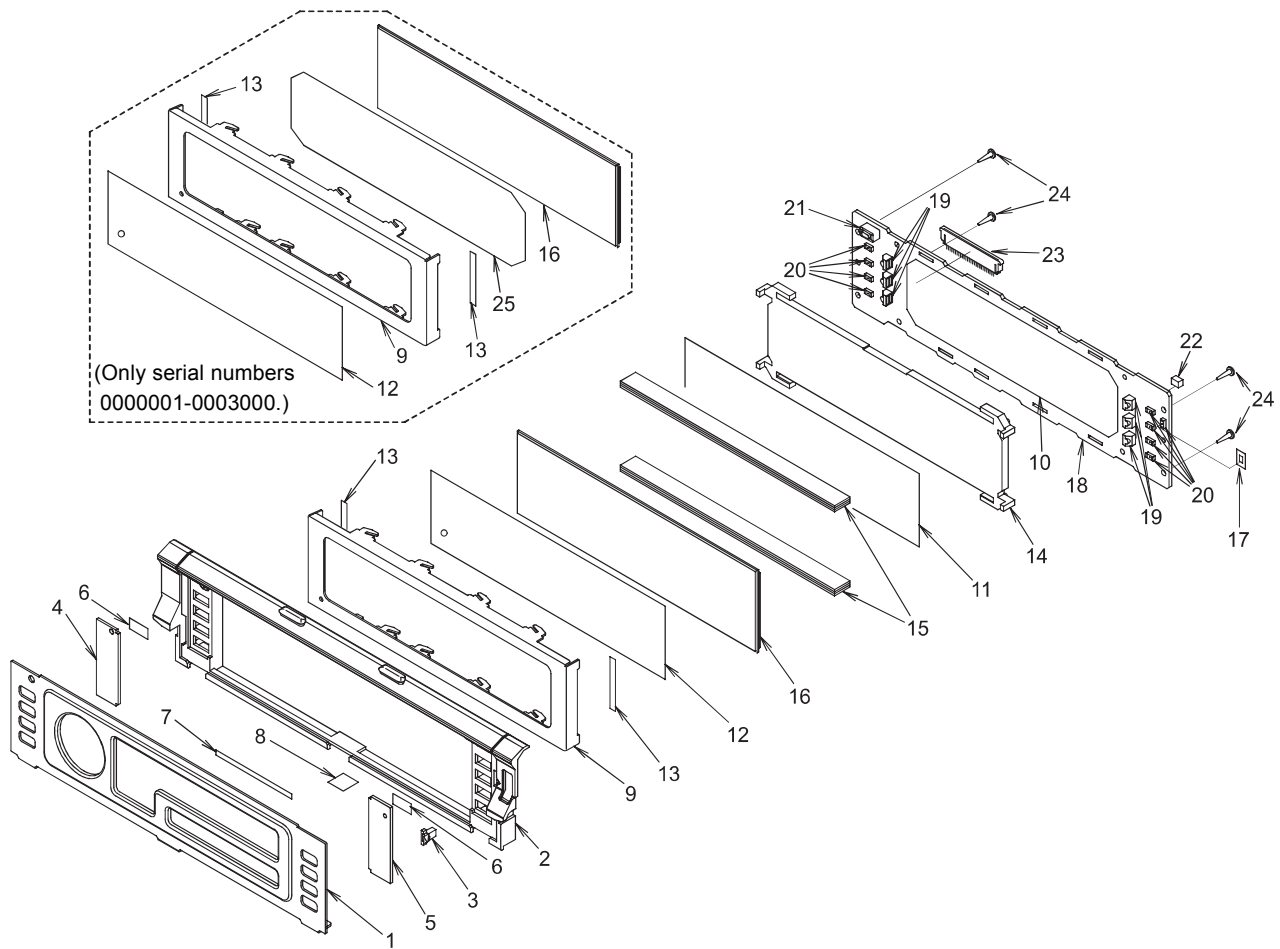

NO.	PART NO.	DESCRIPTION	Q'TY
1	371-5709-01 371-5708-04	FACE PANEL(B-A) FACE PANEL(K-A)	1
2	370-5991-02 370-5991-03	ESCUTCHEON(B-A) FACE PANEL(K-A)	1
3	335-6772-00	ILLUMI PARTS	1
4	347-6665-00	IND-FILM(R)	1
5	347-6666-00	IND-FILM(L)	1
6	347-5161-00	DOUBLE-FACE	2
7	347-6501-00	DOUBLE FACE	1
8	347-6522-00	DOUBLE FACE	1
9	331-3336-01	LCD-CVR (from serial No.0003000)	1
10	347-6606-00	REFLECTOR	1
11	347-6682-00	FILM	1
12	347-6683-01	FILM(from serial No.0003000)	1


NO.	PART NO.	DESCRIPTION	Q'TY
13	347-6813-00	DOUBLE FACE	2
14	335-6682-01	LCD HOLDER	1
15	345-8715-01	RUBBER CONNECT	2
16	379-1227-51	INDICATOR	1
17	345-8726-00	RUBBER PART	1
18	039-2099-00	PWB(LCD) (WITHOUT COMPONENT)	1
19	001-7055-90	DIODE(WHITE)	6
20	001-7062-90	DIODE(RED)	9
21	013-6507-50	SWITCH	1
22	013-7411-50	DETECTOR SWITCH	1
23	074-1195-78	OUTLET SOCKET(28P)	1
24	716-0872-02	PAD SCREW(M1.7×5)	4

NOTE)

Serial numbers 0000001-0003000 are using the following parts.
Keep in mind that there is no compatibility of parts.

NO.	PART NO.	DESCRIPTION	Q'TY
9	331-3336-00	LCD-CVR	1
12	347-6683-00	FILM	1
25	347-6786-00	FILM	1

Inner-Escutcheon section

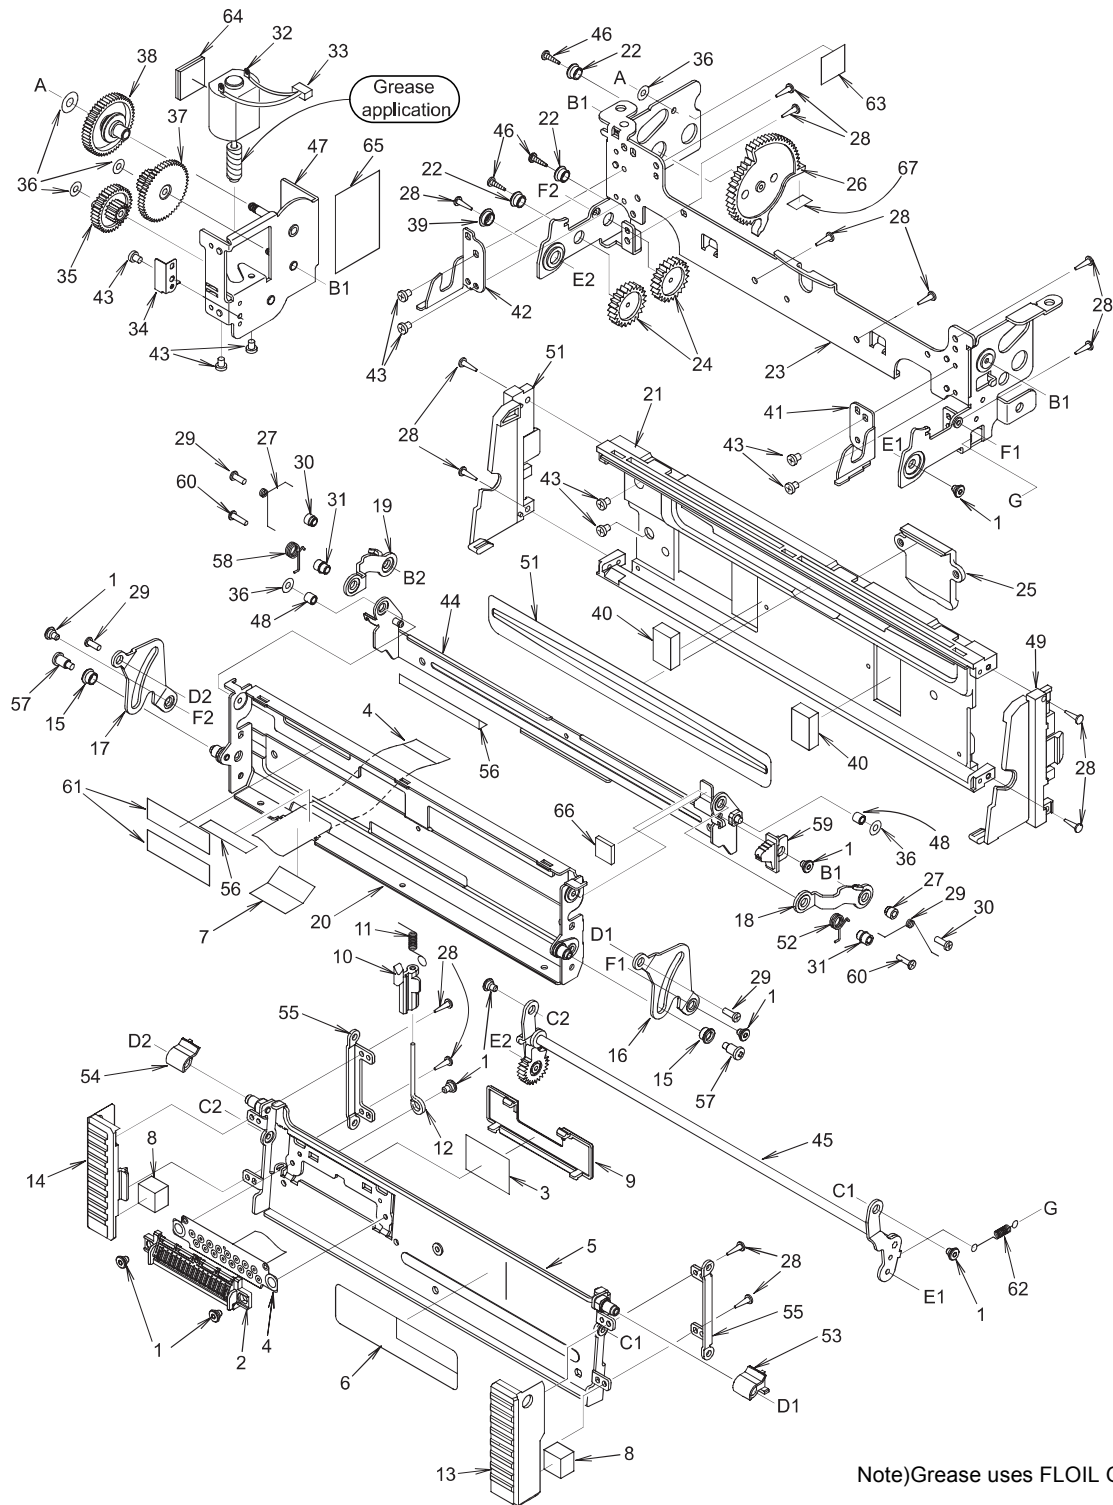

Note) Grease uses FLOIL G-31SB.

NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1715-02	SCREW(M2)	9
2	074-1278-00	OUTLET SOCKET(16P)	1
3	347-6760-00	INSULATOR	1
4	039-1862-00	FPC(WITHOUT COMPONENT)	1
5	947-0525-00	DCP-HOL-ASSY	1
6	291-0098-00	STICKER	1
7	347-6761-00	INSULATOR	1
8	345-8728-00	SPACER(CUSHION)	2
9	335-6678-00	CN-CVR	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	335-6683-00	HOOK	1
11	750-6714-00	SPRING(HOOK)	1
12	341-1770-00	SHAFT(HOOK)	1
13	335-6679-00	SIDE-CVR(FR)	1
14	335-6680-00	SIDE-CVR(FL)	1
15	341-1769-00	ROLLER(ARM)	2
16	331-3329-00	LEVER-MID(R)	1
17	331-3330-01	LEVER-MID(L)	1
18	331-3327-00	LEVER-UP(R)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	331-3328-00	LEVER-UP(L)	1
20	947-0524-00	DISP-HOL-ASSY	1
21	370-6005-02	ESCUTCHEON	1
22	341-1767-00	SPACER(GEAR)	3
23	309-0782-01	FRONT PLATE	1
24	613-0725-01	IDLLER-GEAR	2
25	335-6505-00	ILLUMI PLATE	1
26	613-0726-01	SW-GEAR	1
27	750-6725-00	SPRING(U-ARM)	2
28	716-0872-02	PAD SCREW(M1.7×5)	15
29	780-2005-00	SCREW(M2×5)	4
30	341-1783-00	SPACER(SCREW)	2
31	341-1784-00	SPACER	2
32	634-0023-00	MOTOR-ASSY	1
33	854-4380-01	EXTENSION LEAD	1
34	750-3432-00	SPRING(MOTO)	1
35	613-0720-00	HUS-GEAR	1
36	746-0768-20	WASHER(ϕ 4.3-1.6/t0.5)	6
37	613-0717-00	INPUT GEAR	1
38	947-0513-02	T-LIM-GEAR-ASSY	1
39	341-1791-00	SPACER(GEAR)	1
40	345-8729-00	CUSHION(IN-ES)	2
41	331-3400-01	LINK-HOLDER(R)	1
42	331-3401-01	LINK-HOLDER(L)	1
43	716-1468-20	SCREW(M2×2.5)	9

NO.	PART NO.	DESCRIPTION	Q'TY
44	947-0528-00	INNER-BRKT-ASSY	1
45	947-0519-01	LEVER-LO-ASSY	1
46	716-1758-00	PAD SCREW(M2×5)	3
47	946-0079-01	GEAR-BOX ASSY	1
48	341-1788-00	ROLLER(SIDE)	2
49	335-6765-00	SIDE-CVR	1
50	335-6766-00	SIDE-CVR	1
51	346-0150-02	LEATHER SHEET	1
52	750-6726-00	SPRING(INNER)R	1
53	335-6806-00	FRONT-COVER(R)	1
54	335-6807-00	FRONT-COVER(L)	1
55	331-3480-00	SUPPORT-PLATE	2
56	347-6767-00	FILM	2
57	716-1872-01	SCREW(M2)	2
58	750-6727-00	SPRING(INNER)L	1
59	382-6506-01	BUTTON(EJECT)	1
60	716-3475-00	SCREW(M2×6)	2
61	347-6768-00	SHADE(DISP-H)	2
62	750-6732-01	SPRING	1
63	347-6215-00	SPACER-FILM	1
64	347-6832-00	SPACER(MOTOR)	1
65	347-6536-00	PROTECT SHEET	1
66	347-6762-01	PROTECTOR SHEET	1
67	347-6835-00	SPACER	1

Main section


Exploded view on next page.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCY-394-600 DCY-410-800	DCP ASSY(B-A) DCP ASSY(K-A)	1
2	-----	REAR-ES-ASSY	1
3	-----	INNER-ES-ASSY	1
4	305-0274-31	SIDE CVR(L)	1
5	305-0275-30	SIDE CVR(R)	1
6	307-0616-03	REAR-CVR	1
7	313-1844-00	HEAT SINK	1
8	313-1845-00	HEAT SINK	1
9	313-1651-21	HEAT SINK	1
10	313-1853-00	HEAT SINK	1
11	331-2255-20	IC-HOLDER	1
12	331-2869-00	SHIELD CASE	1
13	331-2945-00	SHIELD CVR(F)	1
14	331-2946-01	SHIELD CVR(R)	1
15	331-3378-00	SW-HOLDER	1
16	039-2096-01	PWB(MAIN) (WITHOUT COMPONENT)	1
17	880-2089B	AM/FM TUNER	1
18	001-7011-96	DIODE(RED)	1
19	051-2038-10	IC(LA47501)	1
20	074-1106-12	OUTLET SOCKET(12P)	2
21	074-1194-00	OUTLET SOCKET(Ce-NET)	1


NO.	PART NO.	DESCRIPTION	Q'TY
22	074-1214-00	OUTLET SOCKET(16P)	1
23	074-1138-76	OUTLET SOCKET(26P)	1
24	074-1198-68	OUTLET SOCKET(18P)	1
25	074-1199-80	OUTLET SOCKET(30P)	1
26	076-0312-02	PLUG(2P)	1
27	013-7106-00	DETECTOR SWITCH	1
28	013-7206-50	DETECTOR SWITCH	1
29	101-0941-00	TRANSISTOR	1
30	103-2012-00	TRANSISTOR	2
31	103-2353-00	TRANSISTOR	1
32	092-4000-51	ANT-RECEPT	1
33	855-5424-50	RCA PIN CORD(6CH)	1
34	855-5458-50	RCA PIN CORD(2CH)	1
35	335-0833-01	LEAD HOLDER	1
36	347-6285-00	INSULATOR	1
37	076-0659-12	PLUG(12P)	2
38	039-2102-00	PWB(SUB) (WITHOUT COMPONENT)	1
39	347-6215-00	SPACER FILM	1
40	331-1709-00	EARTH PLATE	1
41	331-2744-00	STOPPER	1
42	331-2929-00	SHIELD CVR(V)	1

NO.	PART NO.	DESCRIPTION	Q'TY
43	331-2930-00	SHEILD CVR(L)	1
44	345-8513-00	SPACER	1
45	929-0220-83	CD-MECHAISM	1
46	331-3324-00	CD-SUB-BRKT(R)	1
47	331-3417-00	CD-SUB-BRKT(F)	1
48	347-6821-00	SPACER FILM	2
49	347-6705-00	INSULATOR	1
50	347-6729-00	INSULATOR	1
51	816-2569-50	FLAT WIRE	1
52	347-6245-00	FILM	1
53	039-1164-00	FPC(WITHOUT COMPONENT)	1
54	303-0472-00	UPPER-CVR	1

NO.	PART NO.	DESCRIPTION	Q'TY
55	304-0460-01	LOWER-CVR	1
56	714-2603-81	MACHINE SCREW	8
57	716-0872-02	PAD SCREW(M2.6×3)	2
58	714-3006-81	MACHINE SCREW(M1.7×5)	4
59	731-3006-40	TAPTIGHT(M3×6)	1
60	731-3006-80	TAPTIGHT(M3×6)	8
61	731-3008-87	TAPTIGHT(M3×8)	2
62	347-6536-00	PROTECT SHEET	1
63	345-3799-20	RUBBER PART	8
64	347-6681-00	INSULATOR	1
65	345-5192-00	CUSHION(FPC)	1
66	286-9920-01 286-9986-00	SETPLATE(B-A) SETPLATE(K-A)	1

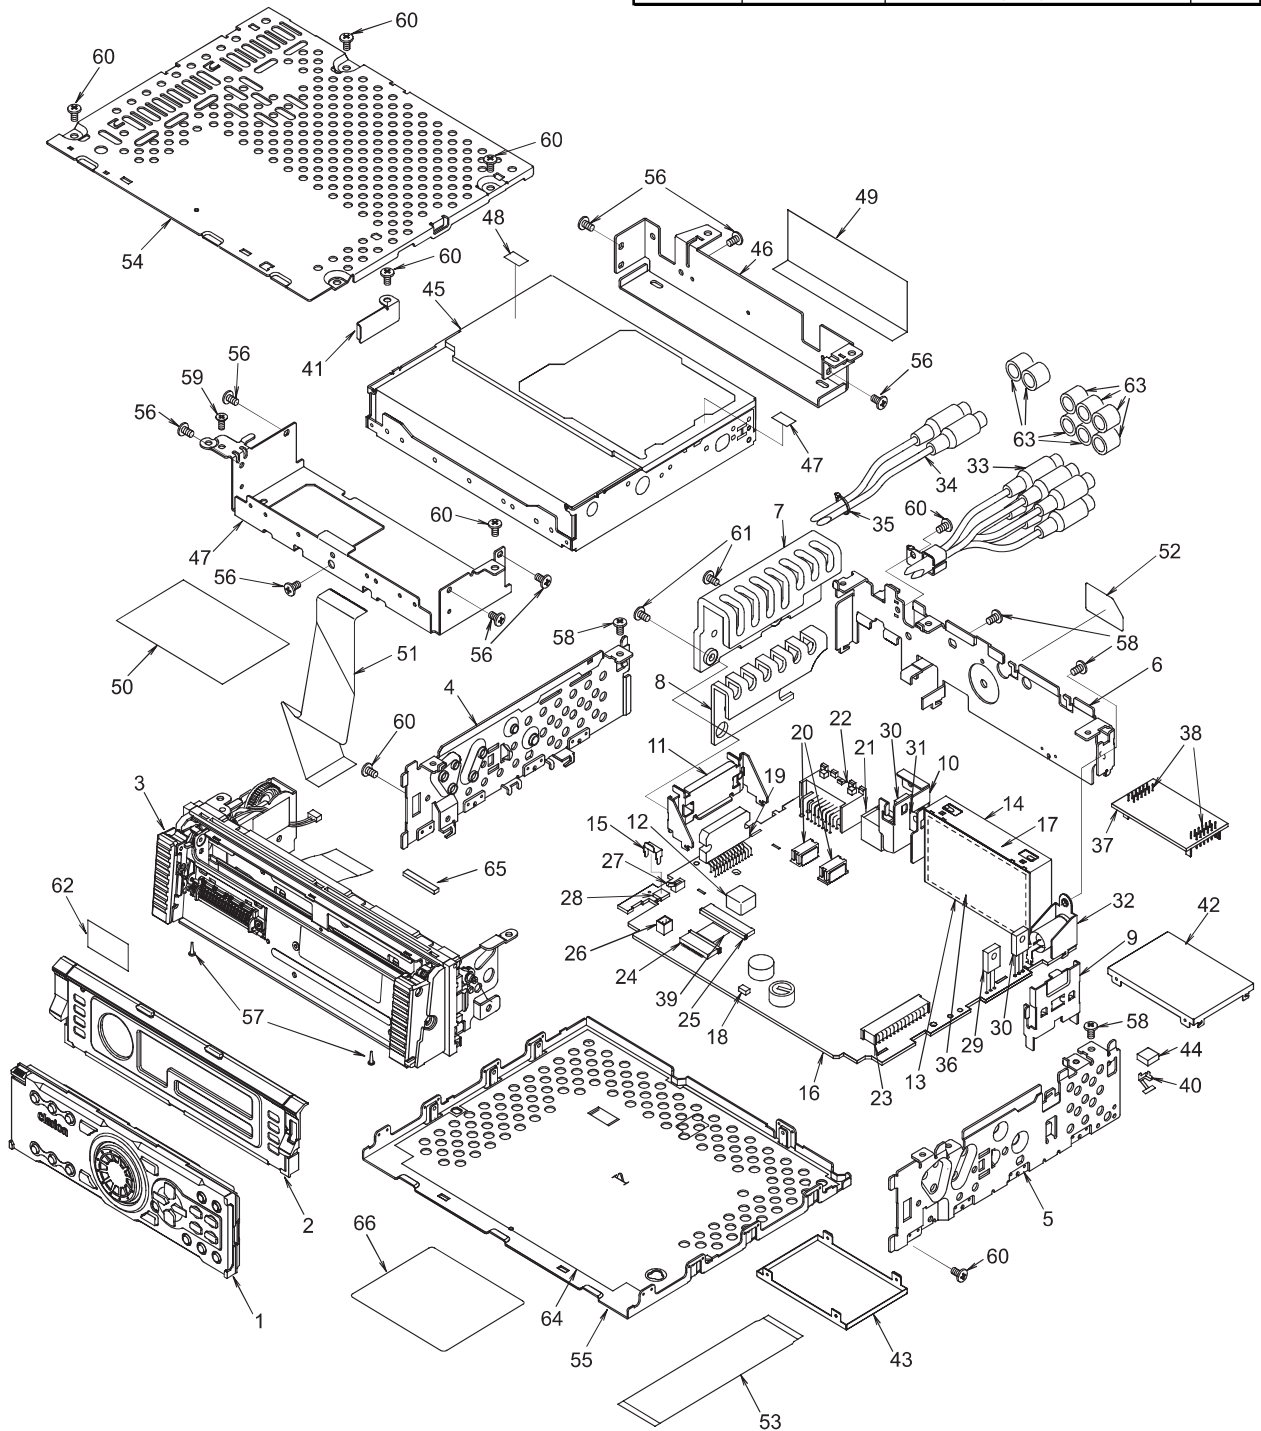

CD mechanism section 929-0220-83

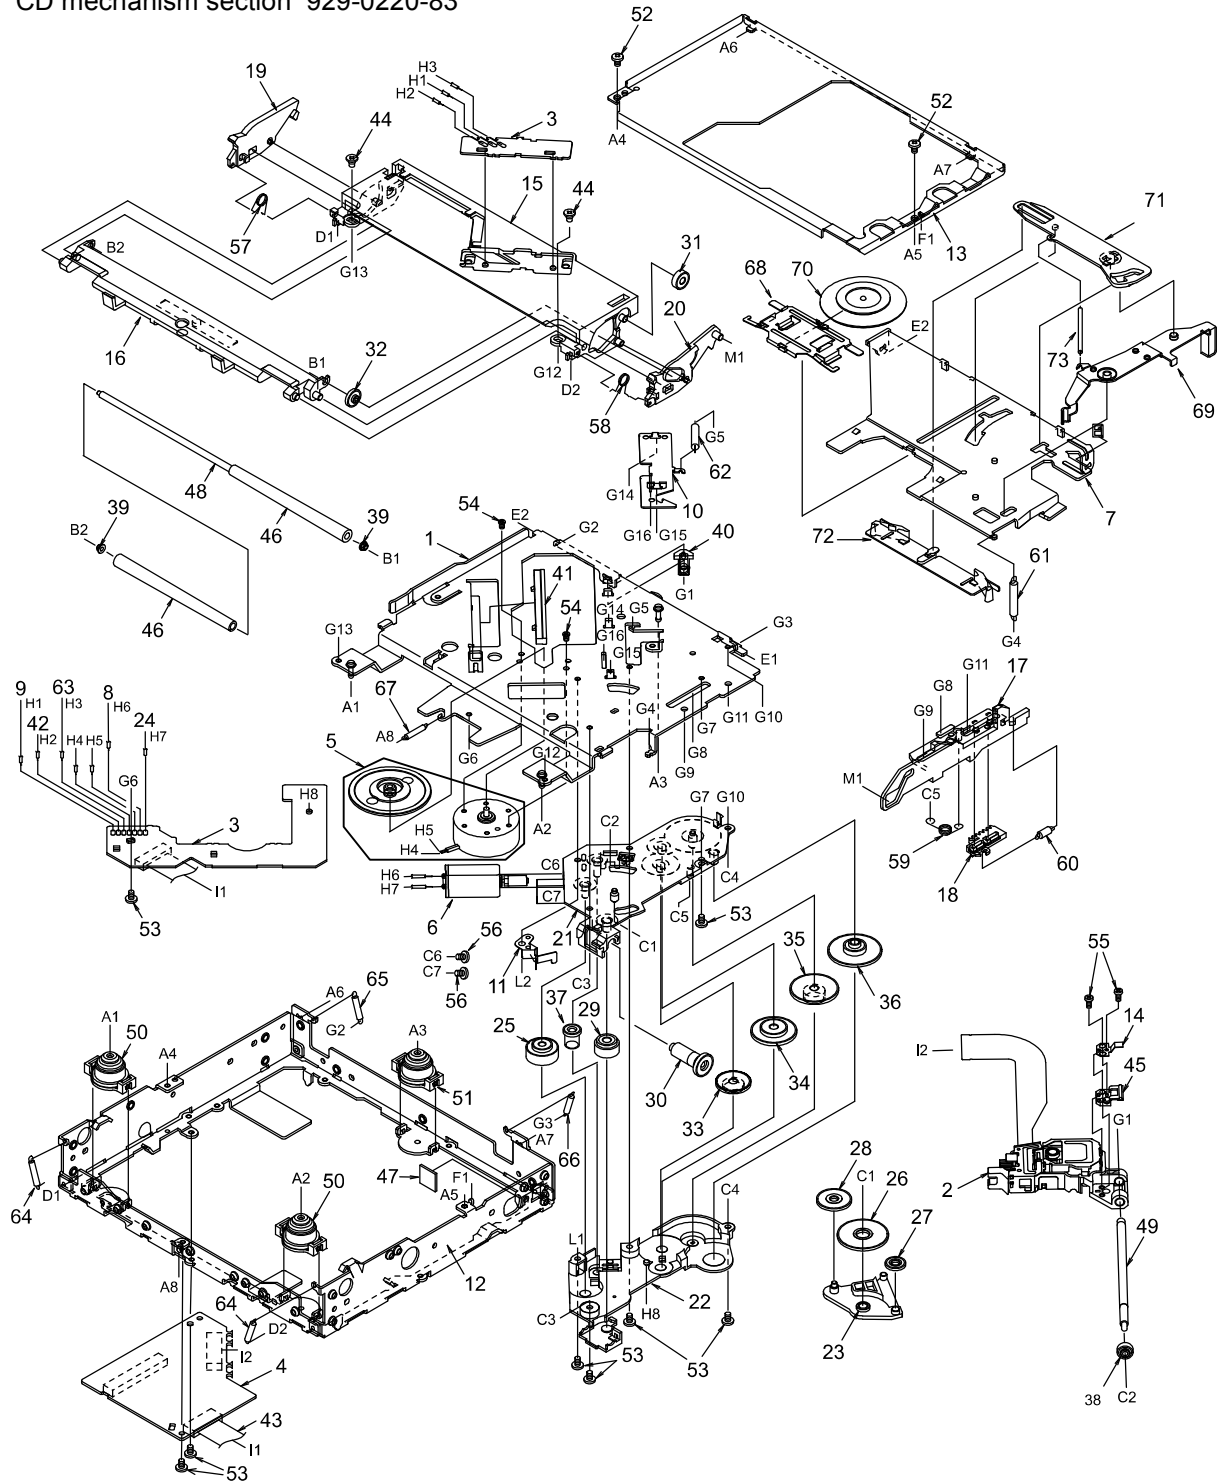

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0060-30	PICK UP UNIT	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1022-24	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1027-25	LOWER CHASSIS	1
13	620-1028-22	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-26	UPPER GUIDE	1
16	621-0599-25	ROLLER GUIDE	1
17	621-0600-25	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM L	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
20	621-0603-25	LOCK ARM R	1	47	345-8704-20	CUSHION RUBBER	1
21	621-0604-22	GEAR BASE	1	48	622-1571-21	ROLLER SHAFT	1
22	621-0605-22	GEAR COVER	1	49	624-0018-01	LEAD SCREW	1
23	621-0606-21	IDLE CASE	1	50	629-0081-20	DAMPER F	2
24	816-2590-00	VINYL COAT WIRE(GRN)	1	51	629-0082-20	DAMPER R	1
25	621-0608-21	SECOND GEAR	1	52	714-2003-81	MACHINE SCREW	2
26	621-0609-20	BASE GEAR	1	53	716-1507-00	SCREW	9
27	621-0610-20	IDLE GEAR A	1	54	716-1733-00	SCREW	2
28	621-0611-20	IDLE GEAR B	1	55	716-3469-00	SPECIAL SCREW	2
29	621-0612-21	ROLLER GEAR A	1	56	716-3446-00	SCREW	2
30	621-0613-20	ROLLER GEAR B	1	57	750-3465-21	ROLLER SPRING L	1
31	621-0614-20	ROLLER GEAR C	1	58	750-3466-20	ROLLER SPRING R	1
32	621-0615-21	ROLLER GEAR D	1	59	750-3467-21	SHIFT SPRING	1
33	621-0616-20	POWER GEAR A	1	60	750-3468-20	RACK SPRING	1
34	621-0617-20	POWER GEAR B	1	61	750-3469-20	CLAMPER SPRING	1
35	621-0618-20	POWER GEAR C	1	62	750-3470-20	ID-LOCK SPRING	1
36	621-0619-20	POWER GEAR D	1	63	816-2592-00	LEAD WIRE(BLU)	1
37	621-0620-20	THREAD GEAR A	1	64	750-3472-21	DR-SPRING F	2
38	621-0621-20	THREAD GEAR B	1	65	750-3473-20	DR-SPRING RA	1
39	621-0622-21	ROLLER SLEEVE	2	66	750-3474-20	DR-SPRING RB	1
40	621-0623-21	LS-HOLDER	1	67	750-3475-21	DR-SPRING C	1
41	621-0624-22	GUIDE RAIL	1	68	620-1023-23	CLAMPER PLATE	1
42	816-2593-00	LEAD WIRE(PUR)	1	69	620-1024-23	SENSOR ARM	1
43	816-2542-01	FLAT WIRE(10P)	1	70	621-0708-20	CLAMPER RING	1
44	716-3473-00	SCREW	2	71	621-0626-20	STOPPER LINK	1
45	621-0709-20	SH-BASE	1	72	621-0627-21	DISC STOPPER	1
46	621-0629-20	LOADING ROLLER	2	73	750-3471-20	SENSOR SPRING	1

■ ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Main PWB(B1) section

Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT	C102	178-4742-78	0.47 μ F	C220	042-0631-50	10V100 μ F
BL1	80-2089B	AM/FM TUNER	C103	178-4742-78	0.47 μ F	C221	163-1063-35	16V10 μ F
C1	168-2232-55	0.022 μ F	C104	178-4742-78	0.47 μ F	C222	184-4763-41	25V47 μ F
C4	163-1053-65	50V1 μ F	C105	178-4742-78	0.47 μ F	C223	168-2232-55	0.022 μ F
C5	168-3332-78	0.033 μ F	C106	163-4763-35	16V47 μ F	C224	172-4731-15	0.047 μ F
C6	168-3332-78	0.033 μ F	C107	163-2263-35	16V22 μ F	C230	042-0631-50	10V100 μ F
C7	183-4763-37	16V47 μ F	C108	172-2231-15	0.022 μ F	C241	163-1063-35	16V10 μ F
C8	168-2232-55	0.022 μ F	C109	163-3353-65	50V3.3 μ F	C242	168-1032-55	0.01 μ F
C9	168-2232-55	0.022 μ F	C110	172-3331-15	0.033 μ F	C243	183-1073-27	10V100 μ F
C10	168-6822-55	6800pF	C111	172-3331-15	0.033 μ F	C244	183-1073-17	6.3V100 μ F
C11	042-0631-50	10V100 μ F	C112	172-3331-15	0.033 μ F	C245	168-1042-78	16V 0.1 μ F
C12	042-0631-50	10V100 μ F	C113	172-3331-15	0.033 μ F	C247	168-1032-55	0.01 μ F
C16	168-1042-78	16V 0.1 μ F	C114	163-1053-65	50V1 μ F	C250	042-0505-81	10V22 μ F
C18	163-1053-65	50V1 μ F	C115	163-1053-65	50V1 μ F	C251	168-1042-78	16V 0.1 μ F
C20	163-4763-15	6.3V47 μ F	C116	168-4722-55	4700pF	C252	042-0452-81	10V220 μ F
C21	168-2232-55	0.022 μ F	C117	166-1011-50	100pF CH	C253	166-2211-50	220pF CH
C22	166-1011-50	100pF CH	C120	166-1011-50	100pF CH	C254	168-1042-78	16V 0.1 μ F
C23	166-1011-50	100pF CH	C121	166-1011-50	100pF CH	C256	042-0505-81	10V22 μ F
C24	166-3311-50	330pF CH	C122	166-1011-50	100pF CH	C257	168-2232-55	0.022 μ F
C25	166-1501-50	15pF CH	C123	166-1011-50	100pF CH	C258	042-0416-52	10V10 μ F TAN
C26	166-1501-50	15pF CH	C124	166-1011-50	100pF CH	C259	042-0505-80	25V1 μ F
C27	166-1011-50	100pF CH	C125	166-1011-50	100pF CH	C260	166-1011-50	100pF CH
C28	168-1032-55	0.01 μ F	C210	042-0423-92	6.3V4.7 μ F	C261	166-1011-50	100pF CH
C29	168-2232-55	0.022 μ F	C211	163-2263-35	16V22 μ F	C301	163-1053-65	50V1 μ F
C30	168-1022-55	1000pF	C212	168-4732-78	0.047 μ F	C302	163-1053-65	50V1 μ F
C55	166-2201-50	22pF CH	C213	163-2263-35	16V22 μ F	C303	166-1201-50	12pF CH
C66	166-2201-50	22pF CH	C214	042-0545-00	16V2200 μ F	C304	166-1201-50	12pF CH
C67	168-1032-55	0.01 μ F	C216	042-0563-71	16V100 μ F	C305	166-1201-50	12pF CH
C68	168-2232-55	0.022 μ F	C217	182-1073-35	16V100 μ F	C306	166-1201-50	12pF CH

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C307	163-1063-35	16V10 μ F	C527	163-1063-35	16V10 μ F	IC502	051-6600-38	CA0008AM
C308	163-2263-35	16V22 μ F	C528	163-1063-35	16V10 μ F	IC503	051-0350-93	NJM4558M
C309	163-1063-35	16V10 μ F	C529	163-1063-35	16V10 μ F	IC504	052-3375-00	M30624MGA-E27GP
C311	043-0264-63	0.01 μ F	C545	163-1063-35	16V10 μ F	IC505	051-5437-08	S-80821ANMP-EDJ
C312	043-0264-63	0.01 μ F	C546	163-1063-35	16V10 μ F	IC506	051-0869-58	NJM2103M
C313	166-1201-50	12pF CH	C547	163-4763-15	6.3V47 μ F	IC509	051-5017-00	TC9482F
C314	166-1201-50	12pF CH	C606	168-4732-78	0.047 μ F	J501	074-1106-12	12P
C315	163-1063-35	16V10 μ F	C612	168-1032-55	0.01 μ F	J502	074-1106-12	12P
C316	163-1063-35	16V10 μ F	C613	042-0576-00	5.5V0.1F	J601	074-1194-00	13P CE-NET
C317	163-1063-35	16V10 μ F	C614	168-1032-55	0.01 μ F	J602	074-1138-76	26P
C318	163-1063-35	16V10 μ F	C615	042-0577-00	6.3V100 μ F	J603	074-1198-68	18P
C319	163-1063-35	16V10 μ F	C616	163-1063-35	16V10 μ F	J604	074-1199-80	30P
C320	163-1063-35	16V10 μ F	C617	168-1022-55	1000pF	J605	076-0312-02	2P
C321	168-4732-78	0.047 μ F	C619	168-4732-78	0.047 μ F	J903	074-1214-00	16P
C326	163-1063-35	16V10 μ F	C620	178-2242-78	0.22 μ F	L1	010-2275-53	220 μ H
C327	163-1063-35	16V10 μ F	C623	166-1011-50	100pF CH	L2	010-2199-71	5.6 μ H J
C328	163-1063-35	16V10 μ F	C627	168-1042-78	16V 0.1 μ F	L3	010-2285-58	BLM21A102FPB
C329	163-1063-35	16V10 μ F	C628	166-1011-50	100pF CH	L4	010-2285-58	BLM21A102FPB
C330	163-1063-35	16V10 μ F	CCT401	010-3042-54	BLA3216A601SG4	L52	010-4046-00	30 μ H
C331	163-1063-35	16V10 μ F	CCT402	010-3042-54	BLA3216A601SG4	L101	010-8024-00	CHOKE
C332	163-1063-35	16V10 μ F	CCT403	010-3042-54	BLA3216A601SG4	L210	010-6003-03	270 μ H
C333	163-1063-35	16V10 μ F	CCT404	010-3042-54	BLA3216A601SG4	L211	010-2323-82	NL252018T-220J
C334	163-1063-35	16V10 μ F	CCT405	010-3042-54	BLA3216A601SG4	L213	010-2323-82	NL252018T-220J
C335	163-1063-35	16V10 μ F	CCT406	010-3042-54	BLA3216A601SG4	L214	010-2230-76	22 μ H
C401	166-1021-50	1000pF CH	D102	001-2403-90	M1F60	L215	010-2285-56	BLM21B222S
C402	166-1021-50	1000pF CH	D103	001-2403-90	M1F60	L401	010-2285-56	BLM21B222S
C403	042-0416-52	10V10 μ F TAN	D104	001-2403-90	M1F60	L403	010-2285-56	BLM21B222S
C404	168-1042-78	16V 0.1 μ F	D105	001-2403-90	M1F60	L409	010-2285-58	BLM21A102FPB
C405	042-0416-52	10V10 μ F TAN	D106	001-2403-90	M1F60	L411	010-2285-58	BLM21A102FPB
C406	042-0416-52	10V10 μ F TAN	D107	001-2403-90	M1F60	L412	010-2285-58	BLM21A102FPB
C407	042-0416-52	10V10 μ F TAN	D108	001-2403-90	M1F60	L413	010-2285-58	BLM21A102FPB
C408	168-1042-78	16V 0.1 μ F	D109	001-2403-90	M1F60	L414	010-2285-58	BLM21A102FPB
C409	168-1042-78	16V 0.1 μ F	D110	001-0529-44	MA8082-M	L415	010-2285-56	BLM21B222S
C412	042-0416-52	10V10 μ F TAN	D200	001-2606-90	M1FS4	L416	010-2285-56	BLM21B222S
C413	042-0416-52	10V10 μ F TAN	D202	001-0504-46	HZS9B2L	L417	010-2285-56	BLM21B222S
C416	168-1042-78	16V 0.1 μ F	D203	001-0592-00	RM4Z	L418	010-2285-56	BLM21B222S
C417	042-0416-52	10V10 μ F TAN	D210	001-0516-90	MA111	L419	010-2285-56	BLM21B222S
C418	168-1042-78	16V 0.1 μ F	D211	001-0516-90	MA111	L421	010-2285-58	BLM21A102FPB
C419	168-1042-78	16V 0.1 μ F	D219	001-0347-11	MA4030M	L422	010-2285-58	BLM21A102FPB
C420	042-0416-52	10V10 μ F TAN	D220	001-0504-33	HZS6B2L	L423	010-2285-58	BLM21A102FPB
C423	168-1042-78	16V 0.1 μ F	D221	001-0466-90	S5688B	L424	010-2285-58	BLM21A102FPB
C424	168-1042-78	16V 0.1 μ F	D222	001-0466-90	S5688B	L425	010-2285-58	BLM21A102FPB
C427	168-1042-78	16V 0.1 μ F	D223	001-0516-90	MA111	L426	010-2285-58	BLM21A102FPB
C428	168-1042-78	16V 0.1 μ F	D224	001-0466-91	S5688G	L427	010-2285-58	BLM21A102FPB
C429	042-0416-52	10V10 μ F TAN	D225	001-0466-91	S5688G	L428	010-2285-56	BLM21B222S
C431	042-0416-52	10V10 μ F TAN	D226	001-0529-35	MA8062-M	L429	010-2285-56	BLM21B222S
C433	168-1042-78	16V 0.1 μ F	D228	001-0347-11	MA4030M	L430	010-2285-56	BLM21B222S
C434	168-1042-78	16V 0.1 μ F	D230	001-0504-42	HZS7C3L	L431	010-2285-56	BLM21B222S
C435	168-1042-78	16V 0.1 μ F	D231	001-0504-35	HZS6C2L	L432	010-2285-56	BLM21B222S
C436	042-0416-52	10V10 μ F TAN	D241	001-0504-45	HZS9B1L	L433	010-2285-56	BLM21B222S
C440	168-1022-55	1000pF	D501	001-0516-90	MA111	L434	010-2285-56	BLM21B222S
C441	168-1042-78	16V 0.1 μ F	D502	001-0516-90	MA111	L435	010-2285-56	BLM21B222S
C442	042-0416-52	10V10 μ F TAN	D503	001-0529-20	MA8039-L	L436	010-2285-56	BLM21B222S
C450	163-1063-35	16V10 μ F	D603	001-0516-90	MA111	L437	010-2285-56	BLM21B222S
C451	163-1063-35	16V10 μ F	D610	001-0516-90	MA111	L441	010-2285-56	BLM21B222S
C452	163-1063-35	16V10 μ F	D651	001-7011-95	CL-150FG-CD	L442	010-2285-56	BLM21B222S
C453	163-1063-35	16V10 μ F	FIL401	060-3110-90	NFM4516P13C204	L450	010-2285-56	BLM21B222S
C454	163-1063-35	16V10 μ F	FIL404	060-3110-90	NFM4516P13C204	L451	010-2285-56	BLM21B222S
C455	163-1063-35	16V10 μ F	IC1	051-6201-90	LC72146M	L452	010-2285-56	BLM21B222S
C456	163-2263-15	6.3V22 μ F	IC101	051-2038-10	LA47501	L453	010-2285-56	BLM21B222S
C457	163-2263-15	6.3V22 μ F	IC201	051-3605-90	NJM2360AM	L602	010-2323-53	NL252018T-2R2J
C458	163-2263-15	6.3V22 μ F	IC220	051-3201-90	AN77L06	L605	010-2198-56	2.2 μ H
C459	163-2263-15	6.3V22 μ F	IC230	051-1014-08	TA7291F	L606	010-2198-56	2.2 μ H
C460	163-2263-15	6.3V22 μ F	IC301	051-0410-38	MC14052BF	L607	010-2198-56	2.2 μ H
C461	163-2263-15	6.3V22 μ F	IC302	051-1811-90	BA3129F	P450	855-5424-50	RCA PIN CORD (6CH)
C462	166-2201-50	22pF CH	IC303	051-3034-90	NJM4558V	P451	855-5458-50	RCA PIN CORD (2CH AUX)
C463	166-2201-50	22pF CH	IC304	051-0556-93	NJM2058M	Q6	190-1162-00	2SA1162
C464	166-2201-50	22pF CH	IC305	051-7232-08	74VHC4066M	Q7	190-1162-00	2SA1162
C465	166-2201-50	22pF CH	IC401	051-6350-00	AK7716VT	Q8	125-2004-93	RN1403
C466	166-2201-50	22pF CH	IC402	051-9109-50	T15M256A-70P	Q201	198-0241-50	2SK241Y.GR
C467	166-2201-50	22pF CH	IC405	051-6379-08	AK4351VT	Q202	103-2353-00	2SD2353
C490	166-1201-50	12pF CH	IC450	051-3026-90	NJM4580V	Q210	190-1298-00	2SA1298
C491	166-1201-50	12pF CH	IC451	051-3026-90	NJM4580V			
C526	163-1063-35	16V10 μ F	IC452	051-3026-90	NJM4580V			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q211	125-2004-96	RN1406	R28	119-1021-15	1/16W 1kΩ	R313	032-0140-89	1/4W 47kΩ 1%
Q212	190-1162-00	2SA1162	R29	119-8211-15	1/16W 820Ω	R314	119-4731-15	1/16W 47kΩ
Q213	192-2712-00	2SC2712	R30	119-1041-15	1/16W 100kΩ	R315	119-1041-15	1/16W 100kΩ
Q220	103-2012-00	2SD2012	R32	119-2221-15	1/16W 2.2kΩ	R316	119-3311-15	1/16W 330Ω
Q221	198-0241-50	2SK241Y.GR	R33	119-1031-15	1/16W 10kΩ	R317	119-1041-15	1/16W 100kΩ
Q222	190-1298-00	2SA1298	R84	119-0000-05	1/16W 0Ω JW	R318	119-1021-15	1/16W 1kΩ
Q223	125-2004-93	RN1403	R101	119-1231-15	1/16W 12kΩ	R319	119-3311-15	1/16W 330Ω
Q224	101-0941-00	2SB941	R102	119-1031-15	1/16W 10kΩ	R320	119-2221-15	1/16W 2.2kΩ
Q225	190-1162-00	2SA1162	R105	119-1021-15	1/16W 1kΩ	R321	119-1021-15	1/16W 1kΩ
Q226	192-2712-00	2SC2712	R106	119-0000-05	1/16W 0Ω JW	R322	119-2231-15	1/16W 22kΩ
Q227	190-1416-00	2SA1416	R200	117-0000-05	1/10W 0Ω JW	R323	119-2231-15	1/16W 22kΩ
Q228	125-2004-93	RN1403	R207	119-1011-15	1/16W 100Ω	R324	119-3311-15	1/16W 330Ω
Q229	190-1416-00	2SA1416	R210	119-1031-15	1/16W 10kΩ	R325	119-1021-15	1/16W 1kΩ
Q230	191-1237-50	2SB1237QR	R211	119-4731-15	1/16W 47kΩ	R326	119-3311-15	1/16W 330Ω
Q232	191-1237-50	2SB1237QR	R212	119-1531-15	1/16W 15kΩ	R328	119-4731-15	1/16W 47kΩ
Q235	193-1802-60	2SD1802FA-R.S.T	R213	119-1031-15	1/16W 10kΩ	R329	119-4731-15	1/16W 47kΩ
Q236	125-0002-93	RN2403	R214	119-4731-15	1/16W 47kΩ	R330	032-0140-52	1/16W 33kΩ 1%
Q237	125-2004-94	RN1404	R215	119-2221-15	1/16W 2.2kΩ	R331	032-0140-52	1/16W 33kΩ 1%
Q238	190-1298-00	2SA1298	R216	119-2221-15	1/16W 2.2kΩ	R332	032-0140-89	1/4W 47kΩ 1%
Q239	125-2004-93	RN1403	R217	119-1031-15	1/16W 10kΩ	R334	032-0140-89	1/4W 47kΩ 1%
Q240	125-2004-96	RN1406	R218	119-1021-15	1/16W 1kΩ	R335	032-0140-52	1/16W 33kΩ 1%
Q241	103-2012-00	2SD2012	R220	119-1031-15	1/16W 10kΩ	R336	032-0140-52	1/16W 33kΩ 1%
Q242	190-1298-00	2SA1298	R221	119-3921-15	1/16W 3.9kΩ	R337	032-0140-89	1/4W 47kΩ 1%
Q243	190-1298-00	2SA1298	R222	119-1801-15	1/16W 18Ω	R338	032-0140-89	1/4W 47kΩ 1%
Q244	125-0002-92	RN2402	R223	119-1031-15	1/16W 10kΩ	R339	119-1021-15	1/16W 1kΩ
Q245	125-2004-96	RN1406	R224	116-1591-15	1/8W 1.5Ω	R340	119-2731-15	1/16W 27kΩ
Q246	125-2004-96	RN1406	R225	116-1591-15	1/8W 1.5Ω	R341	119-2731-15	1/16W 27kΩ
Q247	125-2004-93	RN1403	R226	119-4731-15	1/16W 47kΩ	R344	119-3331-15	1/16W 33kΩ
Q248	125-2004-93	RN1403	R227	119-3321-15	1/16W 3.3kΩ	R346	119-3331-15	1/16W 33kΩ
Q249	125-2004-93	RN1403	R228	119-3321-15	1/16W 3.3kΩ	R347	119-1031-15	1/16W 10kΩ
Q252	125-2004-96	RN1406	R229	116-1591-15	1/8W 1.5Ω	R348	119-1031-15	1/16W 10kΩ
Q253	125-0002-96	RN2406	R232	119-0000-05	1/16W 0Ω JW	R349	119-5631-15	1/16W 56kΩ
Q260	125-2004-93	RN1403	R234	119-1021-15	1/16W 1kΩ	R350	119-1031-15	1/16W 10kΩ
Q261	125-2017-97	RN1427	R235	116-1221-15	1/8W 1.2kΩ	R351	119-1031-15	1/16W 10kΩ
Q262	125-2017-97	RN1427	R236	119-1031-15	1/16W 10kΩ	R352	119-5631-15	1/16W 56kΩ
Q301	193-1306-00	2SD1306	R237	119-1031-15	1/16W 10kΩ	R353	119-1041-15	1/16W 100kΩ
Q302	193-1306-00	2SD1306	R238	119-3321-15	1/16W 3.3kΩ	R354	119-1041-15	1/16W 100kΩ
Q303	193-1306-00	2SD1306	R239	119-1221-15	1/16W 1.2kΩ	R356	119-1041-15	1/16W 100kΩ
Q304	193-1306-00	2SD1306	R240	116-4711-15	1/8W 470Ω	R357	119-1041-15	1/16W 100kΩ
Q305	125-2004-96	RN1406	R242	116-4711-15	1/8W 470Ω	R358	119-1041-15	1/16W 100kΩ
Q306	125-0002-96	RN2406	R243	119-1031-15	1/16W 10kΩ	R359	119-1041-15	1/16W 100kΩ
Q308	125-2004-93	RN1403	R244	111-4700-98	1/4W 47Ω	R360	119-1041-15	1/16W 100kΩ
Q400	192-2712-00	2SC2712	R245	119-1031-15	1/16W 10kΩ	R361	119-1041-15	1/16W 100kΩ
Q450	193-1306-00	2SD1306	R246	116-1591-15	1/8W 1.5Ω	R362	119-1011-15	1/16W 100Ω
Q451	193-1306-00	2SD1306	R247	119-2231-15	1/16W 22kΩ	R363	119-1011-15	1/16W 100Ω
Q452	193-1306-00	2SD1306	R248	119-1031-15	1/16W 10kΩ	R364	119-1011-15	1/16W 100Ω
Q453	193-1306-00	2SD1306	R249	116-1221-15	1/8W 1.2kΩ	R365	119-1011-15	1/16W 100Ω
Q454	193-1306-00	2SD1306	R250	119-1031-15	1/16W 10kΩ	R366	119-4731-15	1/16W 47kΩ
Q455	193-1306-00	2SD1306	R251	116-1221-15	1/8W 1.2kΩ	R367	119-1031-15	1/16W 10kΩ
Q501	125-2004-96	RN1406	R252	116-1521-15	1/8W 1.5kΩ	R368	119-1031-15	1/16W 10kΩ
Q502	125-0002-96	RN2406	R253	119-4711-15	1/16W 470Ω	R380	119-1041-15	1/16W 100kΩ
Q503	192-2712-00	2SC2712	R255	111-4700-98	1/4W 47Ω	R381	119-1041-15	1/16W 100kΩ
Q601	125-2004-92	RN1402	R256	116-1221-15	1/8W 1.2kΩ	R400	119-0000-05	1/16W 0Ω JW
Q602	125-2004-93	RN1403	R257	116-1221-15	1/8W 1.2kΩ	R401	119-1041-15	1/16W 100kΩ
Q603	190-1162-00	2SA1162	R260	116-3911-15	1/8W 390Ω	R402	119-3311-15	1/16W 330Ω
Q604	125-2004-92	RN1402	R261	119-2291-15	1/16W 2.2Ω	R403	119-1041-15	1/16W 100kΩ
Q605	125-2004-92	RN1402	R262	119-2291-15	1/16W 2.2Ω	R404	119-3311-15	1/16W 330Ω
Q606	125-2004-92	RN1402	R263	119-1531-15	1/16W 15kΩ	R405	119-1221-15	1/16W 1.2kΩ
Q617	125-2004-93	RN1403	R264	119-2721-15	1/16W 2.7kΩ	R406	119-1521-15	1/16W 1.5kΩ
R1	119-1021-15	1/16W 1kΩ	R265	116-4711-15	1/8W 470Ω	R410	117-0000-05	1/10W 0Ω JW
R4	119-0000-05	1/16W 0Ω JW	R266	116-4711-15	1/8W 470Ω	R415	119-1011-15	1/16W 100Ω
R7	119-1231-15	1/16W 12kΩ	R267	119-4731-15	1/16W 47kΩ	R416	119-2711-15	1/16W 270Ω
R8	119-1031-15	1/16W 10kΩ	R301	119-1831-15	1/16W 18kΩ	R417	119-2711-15	1/16W 270Ω
R9	119-4741-15	1/16W 470kΩ	R302	119-1831-15	1/16W 18kΩ	R418	119-2711-15	1/16W 270Ω
R10	119-2221-15	1/16W 2.2kΩ	R303	119-3031-15	1/16W 30kΩ	R428	119-0000-05	1/16W 0Ω JW
R14	119-5631-15	1/16W 56kΩ	R304	119-3031-15	1/16W 30kΩ	R434	119-3311-15	1/16W 330Ω
R16	119-2221-15	1/16W 2.2kΩ	R305	032-0140-51	1/16W 15kΩ 1%	R435	119-3311-15	1/16W 330Ω
R18	119-1031-15	1/16W 10kΩ	R306	032-0140-51	1/16W 15kΩ 1%	R441	119-8211-15	1/16W 820Ω
R19	119-1031-15	1/16W 10kΩ	R307	119-4731-15	1/16W 47kΩ	R442	119-8211-15	1/16W 820Ω
R21	119-1021-15	1/16W 1kΩ	R308	032-0140-51	1/16W 15kΩ 1%	R443	119-8211-15	1/16W 820Ω
R24	119-1521-15	1/16W 1.5kΩ	R309	032-0140-51	1/16W 15kΩ 1%	R444	119-8211-15	1/16W 820Ω
R25	119-1521-15	1/16W 1.5kΩ	R310	032-0140-89	1/4W 47kΩ 1%	R445	119-8211-15	1/16W 820Ω
R26	119-1031-15	1/16W 10kΩ	R311	032-0140-89	1/4W 47kΩ 1%	R450	119-1041-15	1/16W 100kΩ
R27	119-1021-15	1/16W 1kΩ	R312	032-0140-89	1/4W 47kΩ 1%	R451	119-1041-15	1/16W 100kΩ

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R453	119-1041-15	1/16W 100kΩ	R498	010-2285-56	BLM21B222S	R638	119-4731-15	1/16W 47kΩ
R455	119-1041-15	1/16W 100kΩ	R499	010-2285-56	BLM21B222S	R639	119-4721-15	1/16W 4.7kΩ
R456	119-1031-15	1/16W 10kΩ	R531	119-0000-05	1/16W 0Ω JW	R640	119-4731-15	1/16W 47kΩ
R457	119-1031-15	1/16W 10kΩ	R532	119-0000-05	1/16W 0Ω JW	R641	119-1831-15	1/16W 18kΩ
R458	119-1031-15	1/16W 10kΩ	R537	119-8221-15	1/16W 8.2kΩ	R642	119-1031-15	1/16W 10kΩ
R459	119-1031-15	1/16W 10kΩ	R538	119-1021-15	1/16W 1kΩ	R643	119-5621-15	1/16W 5.6kΩ
R460	119-1031-15	1/16W 10kΩ	R540	119-2231-15	1/16W 22kΩ	R644	119-1541-15	1/16W 150kΩ
R461	119-1031-15	1/16W 10kΩ	R551	119-2221-15	1/16W 2.2kΩ	R645	119-8221-15	1/16W 8.2kΩ
R462	119-6831-15	1/16W 68kΩ	R552	119-2221-15	1/16W 2.2kΩ	R646	119-4321-15	1/16W 4.3kΩ
R463	119-1231-15	1/16W 12kΩ	R553	119-2221-15	1/16W 2.2kΩ	R660	119-4731-15	1/16W 47kΩ
R464	119-1231-15	1/16W 12kΩ	R555	119-0000-05	1/16W 0Ω JW	R661	119-4731-15	1/16W 47kΩ
R465	119-6831-15	1/16W 68kΩ	R556	119-0000-05	1/16W 0Ω JW	R677	119-1031-15	1/16W 10kΩ
R466	119-1231-15	1/16W 12kΩ	R558	119-0000-05	1/16W 0Ω JW	R679	119-1031-15	1/16W 10kΩ
R467	119-1231-15	1/16W 12kΩ	R560	119-0000-05	1/16W 0Ω JW	R680	119-1021-15	1/16W 1kΩ
R468	119-2231-15	1/16W 22kΩ	R572	119-0000-05	1/16W 0Ω JW	R684	119-0000-05	1/16W 0Ω JW
R469	119-2231-15	1/16W 22kΩ	R573	119-0000-05	1/16W 0Ω JW	R685	119-0000-05	1/16W 0Ω JW
R470	119-2231-15	1/16W 22kΩ	R576	119-3311-15	1/16W 330Ω	R686	119-0000-05	1/16W 0Ω JW
R471	119-2231-15	1/16W 22kΩ	R602	116-1221-15	1/8W 1.2kΩ	R687	119-0000-05	1/16W 0Ω JW
R472	119-2231-15	1/16W 22kΩ	R603	116-6801-15	1/8W 68Ω	R688	119-0000-05	1/16W 0Ω JW
R473	119-2231-15	1/16W 22kΩ	R604	119-3321-15	1/16W 3.3kΩ	R691	119-4731-15	1/16W 47kΩ
R474	119-3311-15	1/16W 330Ω	R605	119-3321-15	1/16W 3.3kΩ	R692	119-0000-05	1/16W 0Ω JW
R475	119-3311-15	1/16W 330Ω	R607	119-2231-15	1/16W 22kΩ	R693	119-0000-05	1/16W 0Ω JW(B-A)
R476	119-3311-15	1/16W 330Ω	R608	119-1031-15	1/16W 10kΩ	-----	-----	NO-USED(K-A)
R477	119-3311-15	1/16W 330Ω	R609	119-4731-15	1/16W 47kΩ	R9001	117-0000-05	1/10W 0Ω JW
R478	119-3311-15	1/16W 330Ω	R610	119-4721-15	1/16W 4.7kΩ	S602	013-7106-00	TKR00120670MM
R479	119-3311-15	1/16W 330Ω	R625	119-1041-15	1/16W 100kΩ	S603	013-7206-50	SPPB530701
R480	119-1021-15	1/16W 1kΩ	R626	119-1041-15	1/16W 100kΩ	SUP51	060-0122-91	DSP-141N-S00B
R481	119-1021-15	1/16W 1kΩ	R627	119-4731-15	1/16W 47kΩ	X1	061-1066-00	7.2MHz
R482	119-1021-15	1/16W 1kΩ	R628	119-4731-15	1/16W 47kΩ	X401	061-3514-90	CX-11F 22.5792MHz
R490	119-3311-15	1/16W 330Ω	R630	119-0000-05	1/16W 0Ω JW	X601	060-1505-50	10MHz
R495	119-1041-15	1/16W 100kΩ	R636	119-2421-15	1/16W 2.4kΩ	X602	060-0100-01	CB13PA-215
R496	119-1041-15	1/16W 100kΩ	R637	119-1241-15	1/16W 120kΩ			

Sub PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C500	042-0416-52	10V10 μF TAN	C523	043-0264-63	0.01 μF	R509	032-0140-80	1/16W 18kΩ 1%
C501	042-0416-52	10V10 μF TAN	C524	043-0264-63	0.01 μF	R510	032-0140-56	1/16W 51kΩ 1%
C502	042-0416-52	10V10 μF TAN	C525	043-0264-63	0.01 μF	R511	032-0140-56	1/16W 51kΩ 1%
C503	042-0416-52	10V10 μF TAN	C540	042-0416-52	10V10 μF TAN	R513	032-0140-98	1/10W 330Ω 1%
C504	042-0416-52	10V10 μF TAN	C541	042-0416-52	10V10 μF TAN	R514	032-0140-98	1/10W 330Ω 1%
C505	042-0416-52	10V10 μF TAN	C542	166-2201-50	22pF CH	R515	032-0140-98	1/10W 330Ω 1%
C506	042-0416-52	10V10 μF TAN	C543	166-2201-50	22pF CH	R516	032-0140-98	1/10W 330Ω 1%
C507	042-0416-52	10V10 μF TAN	IC507	051-3026-90	NJM4580V	R517	032-0140-98	1/10W 330Ω 1%
C508	043-0264-63	0.01 μF	IC508	051-3026-90	NJM4580V	R518	032-0140-98	1/10W 330Ω 1%
C509	166-2711-50	270pF	IC510	051-3026-90	NJM4580V	R519	032-0140-80	1/16W 18kΩ 1%
C510	166-2711-50	270pF	P500	076-0659-12	12P	R520	032-0140-98	1/10W 330Ω 1%
C511	043-0264-63	0.01 μF	P501	076-0659-12	12P	R521	032-0140-80	1/16W 18kΩ 1%
C512	043-0264-63	0.01 μF	R500	032-0140-56	1/16W 51kΩ 1%	R522	032-0140-98	1/10W 330Ω 1%
C513	166-2711-50	270pF	R501	032-0140-56	1/16W 51kΩ 1%	R523	032-0140-80	1/16W 18kΩ 1%
C514	166-2711-50	270pF	R502	032-0140-80	1/16W 18kΩ 1%	R524	032-0140-80	1/16W 18kΩ 1%
C515	043-0264-63	0.01 μF	R503	032-0140-80	1/16W 18kΩ 1%	R565	119-1041-15	1/16W 100kΩ
C518	166-2711-50	270pF	R504	032-0140-56	1/16W 51kΩ 1%	R567	119-1041-15	1/16W 100kΩ
C519	166-2711-50	270pF	R505	032-0140-56	1/16W 51kΩ 1%	R568	119-1531-15	1/16W 15kΩ
C520	166-2711-50	270pF	R506	032-0140-56	1/16W 51kΩ 1%	R569	119-1531-15	1/16W 15kΩ
C521	166-2711-50	270pF	R507	032-0140-56	1/16W 51kΩ 1%	R570	119-2231-15	1/16W 22kΩ
C522	043-0264-63	0.01 μF	R508	032-0140-80	1/16W 18kΩ 1%	R571	119-2231-15	1/16W 22kΩ

Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C710	042-0416-52	10V10 μF TAN	D733	001-7064-90	CL-170SR-CD	R749	119-2221-15	1/16W 2.2kΩ
C711	168-1042-78	16V 0.1 μF	D734	001-7043-90	CL-170FG-CD	R750	119-2221-15	1/16W 2.2kΩ
D721	001-7064-90	CL-170SR-CD	D735	001-7064-90	CL-170SR-CD	R751	119-1221-15	1/16W 1.2kΩ
D722	001-7043-90	CL-170FG-CD	D736	001-7043-90	CL-170FG-CD	R752	119-1221-15	1/16W 1.2kΩ
D723	001-7064-90	CL-170SR-CD	D737	001-7043-90	CL-170FG-CD	R753	119-1221-15	1/16W 1.2kΩ
D724	001-7043-90	CL-170FG-CD	D738	001-7043-90	CL-170FG-CD	R754	119-1221-15	1/16W 1.2kΩ
D725	001-7064-90	CL-170SR-CD	D739	001-7040-90	NSCB100	R755	119-1221-15	1/16W 1.2kΩ
D726	001-7043-90	CL-170FG-CD	D751	001-0516-90	MA111	R756	119-1221-15	1/16W 1.2kΩ
D727	001-7064-90	CL-170SR-CD	D752	001-0516-90	MA111	R757	119-1221-15	1/16W 1.2kΩ
D728	001-7043-90	CL-170FG-CD	D753	001-0516-90	MA111	R758	119-1221-15	1/16W 1.2kΩ
D729	001-7064-90	CL-170SR-CD	D754	001-0516-90	MA111	R759	119-1221-15	1/16W 1.2kΩ
D730	001-7043-90	CL-170FG-CD	D755	001-0516-90	MA111	R760	119-1221-15	1/16W 1.2kΩ
D731	001-7064-90	CL-170SR-CD	IC703	051-6618-18	M6606FP-42A	R761	119-1221-15	1/16W 1.2kΩ
D732	001-7043-90	CL-170FG-CD	IR701	060-4008-00	RS171	R762	119-1221-15	1/16W 1.2kΩ

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R763	119-1221-15	1/16W 1.2kΩ	R783	119-1041-15	1/16W 100kΩ	S715	013-6519-50	LS9J2M-2SR/FG
R764	119-1221-15	1/16W 1.2kΩ	R784	119-2021-15	1/16W 2kΩ	S716	013-6507-50	LS8J2M-T
R765	119-1221-15	1/16W 1.2kΩ	R789	119-1521-15	1/16W 1.5kΩ	S717	013-6519-50	LS9J2M-2SR/FG
R766	119-1221-15	1/16W 1.2kΩ	R790	119-1521-15	1/16W 1.5kΩ	S718	013-6519-50	LS9J2M-2SR/FG
R769	119-1221-15	1/16W 1.2kΩ	S702	013-8004-50	SRGP300/00	S719	013-6519-50	LS9J2M-2SR/FG
R770	119-1221-15	1/16W 1.2kΩ	S703	013-6519-50	LS9J2M-2SR/FG	S720	013-6519-50	LS9J2M-2SR/FG
R771	119-1031-15	1/16W 10kΩ	S704	013-6519-50	LS9J2M-2SR/FG	S721	013-6519-50	LS9J2M-2SR/FG
R772	119-1031-15	1/16W 10kΩ	S705	013-6519-50	LS9J2M-2SR/FG	S722	013-6519-50	LS9J2M-2SR/FG
R773	119-1031-15	1/16W 10kΩ	S706	013-6507-50	LS8J2M-T	S723	013-6519-50	LS9J2M-2SR/FG
R774	119-1031-15	1/16W 10kΩ	S707	013-6519-50	LS9J2M-2SR/FG	S724	013-6507-50	LS8J2M-T
R775	119-1031-15	1/16W 10kΩ	S708	013-6519-50	LS9J2M-2SR/FG	S725	013-6519-50	LS9J2M-2SR/FG
R776	119-1041-15	1/16W 100kΩ	S709	013-6519-50	LS9J2M-2SR/FG	Switch Sub PWB(B4) section		
R777	119-1041-15	1/16W 100kΩ	S710	013-6519-50	LS9J2M-2SR/FG	REF No.	PART No.	DESCRIPTION
R778	119-1041-15	1/16W 100kΩ	S711	013-6507-50	LS8J2M-T	P701	076-0647-00	16P
R779	119-1041-15	1/16W 100kΩ	S712	013-6519-50	LS9J2M-2SR/FG	P702	076-0658-08	8P
R780	119-1041-15	1/16W 100kΩ	S713	013-6519-50	LS9J2M-2SR/FG	P703	076-0658-08	8P
R782	119-1011-15	1/16W 100Ω	S714	013-6519-50	LS9J2M-2SR/FG			

LCD PWB(B5) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C701	168-1032-55	0.01 μF	Q702	125-2004-93	RN1403	R725	032-0140-98	1/10W 330Ω 1%
C702	042-0416-52	10V10 μF TAN	Q703	125-2004-93	RN1403	R726	032-0140-98	1/10W 330Ω 1%
C703	042-0416-50	16V4.7 μF TAN	Q704	125-2004-93	RN1403	R727	032-0140-98	1/10W 330Ω 1%
C704	042-0416-50	16V4.7 μF TAN	Q705	125-2004-93	RN1403	R728	032-0140-98	1/10W 330Ω 1%
C705	042-0416-52	10V10 μF TAN	Q706	125-2004-93	RN1403	R729	032-0140-98	1/10W 330Ω 1%
C706	168-1042-78	16V 0.1 μF	Q707	125-2004-93	RN1403	R730	032-0140-98	1/10W 330Ω 1%
C709	168-1042-78	16V 0.1 μF	Q708	125-2004-93	RN1403	R731	032-0140-98	1/10W 330Ω 1%
D701	001-7062-90	RBR111C	Q710	190-1162-00	2SA1162	R732	119-1811-15	1/16W 180Ω
D702	001-7062-90	RBR111C	Q711	192-2712-51	2SC2712G,L	R733	119-1811-15	1/16W 180Ω
D703	001-7062-90	RBR111C	Q712	125-2004-96	RN1406	R734	119-1811-15	1/16W 180Ω
D704	001-7062-90	RBR111C	R701	116-2711-15	1/8W 270Ω	R735	119-1811-15	1/16W 180Ω
D705	001-7062-90	RBR111C	R702	116-2711-15	1/8W 270Ω	R736	119-1521-15	1/16W 1.5kΩ
D706	001-7062-90	RBR111C	R703	116-2711-15	1/8W 270Ω	R740	119-1041-15	1/16W 100kΩ
D707	001-7062-90	RBR111C	R704	116-2711-15	1/8W 270Ω	R748	119-1031-15	1/16W 10kΩ
D708	001-7062-90	RBR111C	R705	116-2711-15	1/8W 270Ω	R749	119-4731-15	1/16W 47kΩ
D710	001-7055-90	NSCWS405T	R706	116-2711-15	1/8W 270Ω	R781	119-2231-15	1/16W 22kΩ
D711	001-7055-90	NSCWS405T	R707	116-2711-15	1/8W 270Ω	R786	119-4721-15	1/16W 4.7kΩ
D712	001-7055-90	NSCWS405T	R708	116-2711-15	1/8W 270Ω	R787	119-4721-15	1/16W 4.7kΩ
D713	001-7055-90	NSCWS405T	R717	032-0140-00	1/10W 56kΩ 1%	R799	116-2711-15	1/8W 270Ω
D714	001-7055-90	NSCWS405T	R718	032-0140-53	1/16W 2.2kΩ 1%	R9002	119-0000-05	1/16W 0Ω JW
D715	001-7055-90	NSCWS405T	R719	032-0140-98	1/10W 330Ω 1%	R9003	119-0000-05	1/16W 0Ω JW
D716	001-7062-90	RBR111C	R720	032-0140-98	1/10W 330Ω 1%	S701	013-6507-50	LS8J2M-T
IC701	052-7061-00	M30624MGA-F26GP	R721	032-0140-98	1/10W 330Ω 1%	S726	013-7411-50	ESE2131BTXN
IC702	051-6057-00	ML9090A-01GA	R722	032-0140-98	1/10W 330Ω 1%	X701	060-1505-50	10MHz
P701	074-1195-78	28P	R723	032-0140-98	1/10W 330Ω 1%			
Q701	125-2004-93	RN1403	R724	032-0140-98	1/10W 330Ω 1%			

CD PWB section(B6):CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1042-78	0.1 μ F	C207	043-0533-50	0.047 μ F	R109	033-1031-15	1/16W 10k Ω
C102	045-4701-50	47pF	C208	046-6822-58	6800pF	R110	033-1051-15	1/16W 1M Ω
C103	046-4722-58	4700pF	C209	168-1042-78	0.1 μ F	R111	033-3321-15	1/16W 3.3k Ω
C104	168-1042-78	0.1 μ F	C210	043-0533-50	0.047 μ F	R114	033-2211-15	1/16W 220 Ω
C105	046-1532-78	0.015 μ F	C211	168-1042-78	0.1 μ F	R115	033-2211-15	1/16W 220 Ω
C106	046-1032-78	0.01 μ F	C212	168-1042-78	0.1 μ F	R116	033-1031-15	1/16W 10k Ω
C107	046-1032-78	0.01 μ F	C213	045-5096-50	5pF	R117	033-1021-15	1/16W 1k Ω
C108	046-4722-58	4700pF	C214	045-5601-50	56pF	R131	033-4711-15	1/16W 470 Ω
C109	046-1522-58	1500pF	C215	043-0533-50	0.047 μ F	R132	033-2211-15	1/16W 220 Ω
C110	046-3332-78	0.033 μ F	C216	178-1052-78	1 μ F	R201	117-2201-15	1/10W 22 Ω
C111	168-1042-78	0.1 μ F	C217	045-1011-50	100pF	R202	117-2201-15	1/10W 22 Ω
C112	046-3332-78	0.033 μ F	C301	163-1073-35	16V100 μ F	R203	033-1041-15	1/16W 100k Ω
C113	168-1042-78	0.1 μ F	C302	168-1042-78	0.1 μ F	R204	033-1041-15	1/16W 100k Ω
C114	168-1042-78	0.1 μ F	C303	043-0533-50	0.047 μ F	R205	033-1041-15	1/16W 100k Ω
C115	046-4712-58	470pF	D201	001-0516-90	MA111	R206	033-1041-15	1/16W 100k Ω
C116	046-4712-58	470pF	IC101	051-6376-00	TC94A14FA	R207	033-1041-15	1/16W 100k Ω
C117	043-0533-50	0.047 μ F	IC102	051-3279-90	BA033LBSG	R208	033-8231-15	1/16W 82k Ω
C118	043-0533-50	0.047 μ F	IC201	051-5710-90	TA2157F	R209	033-6811-15	1/16W 680 Ω
C119	045-2701-50	27pF	IC301	051-6049-08	BA5983FP-E2	R210	033-6831-15	1/16W 68k Ω
C120	045-1801-50	18pF	J101	074-1228-76	26P	R211	033-1831-15	1/16W 18k Ω
C121	163-1063-35	16V10 μ F	J201	074-1138-65	15P	R212	033-2721-15	1/16W 2.7k Ω
C122	178-1052-78	1 μ F	J301	074-1138-60	10P	R213	033-1011-15	1/16W 100 Ω
C123	046-1032-78	0.01 μ F	L101	010-2285-57	BLM21B102SPT	R214	033-1021-15	1/16W 1k Ω
C124	163-1073-05	4V100 μ F	L102	010-2285-57	BLM21B102SPT	R215	033-1031-15	1/16W 10k Ω
C125	168-1042-78	0.1 μ F	L103	010-2285-57	BLM21B102SPT	R217	033-1041-15	1/16W 100k Ω
C126	168-1042-78	0.1 μ F	L104	010-2285-57	BLM21B102SPT	R218	033-2211-15	1/16W 220 Ω
C129	178-1052-78	1 μ F	L105	010-2285-57	BLM21B102SPT	R301	117-6811-15	1/16W 680 Ω
C201	163-3363-05	4V33 μ F	L401	010-3050-93	10 μ H	R304	033-3921-15	1/16W 3.9k Ω
C202	168-1042-78	0.1 μ F	Q201	131-1188-50	2SB1188	R305	033-3921-15	1/16W 3.9k Ω
C203	178-1052-78	1 μ F	R102	033-5621-15	1/16W 5.6k Ω	R306	033-1041-15	1/16W 100k Ω
C204	163-1073-05	4V100 μ F	R104	033-4731-15	1/16W 47k Ω	R307	033-2211-15	1/16W 220 Ω
C205	163-3363-05	4V33 μ F	R105	033-1041-15	1/16W 100k Ω	X102	060-1528-90	16.934M
C206	168-1042-78	0.1 μ F	R108	033-1531-15	1/16W 15k Ω			

LED PWB section(B7):CD mechanism

REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR
D2	001-7058-90	AN1105W-RR
J1	074-1138-60	10P
Q1	060-4015-90	PS1192H
Q2	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING
S2	013-7413-50	LIMIT