



EXPLODED VIEW / PARTS LIST

Main section

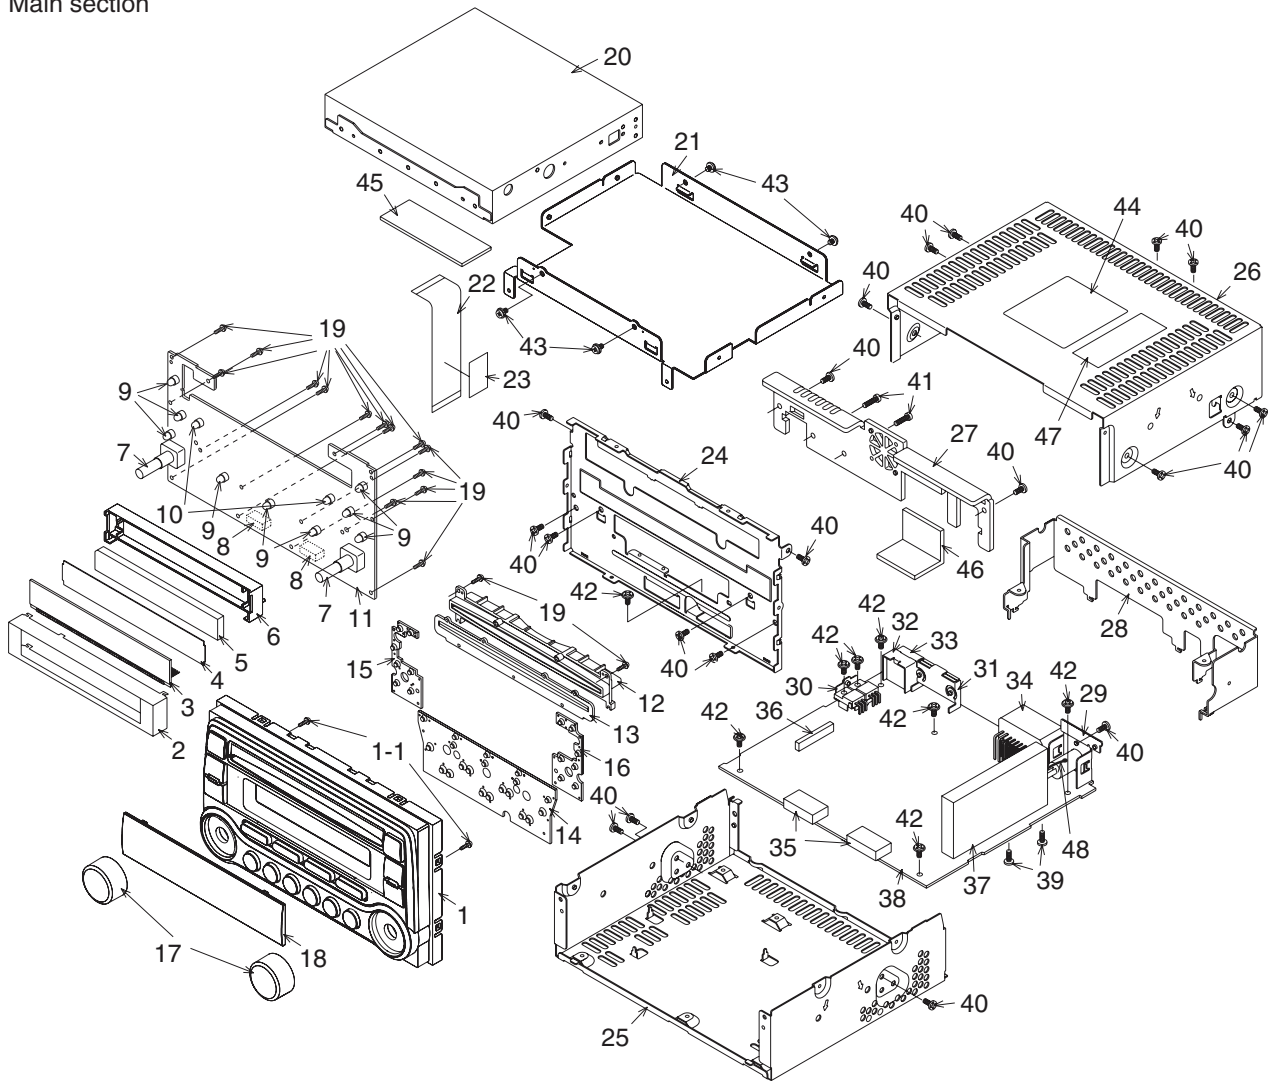

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8099-11	ESCUTCHEON ASSY	1	25	311-1861-01	LOWER CASE	1
1-1	716-0778-00	WAVE SCREW(2X6)	2	26	310-1762-00	UPPER CASE	1
2	331-3883-00	LCD CVR	1	27	313-1856-00	HEAT SINK	1
3	379-1335-52	INDICATOR(LCD)	1	28	331-3722-00	MECH BRKT	1
4	335-7322-00	COLOR FILTER	1	29	331-3444-10	ANT HOLDER	1
5	335-7323-10	LCD ILLUMI	1	30	331-3458-00	TR HOLDER	1
6	335-7291-00	LCD HOLDER	1	31	331-3459-00	IC HOLDER	1
7	016-0014-14	VR W/SHAFT	2	32	331-3460-00	CONNECTOR HOLDER	1
8	074-3000-62	OUTLET SOCKET(4P)	2	33	074-1194-00	OUTLET SOCKET(CeNET)	1
9	017-0420-38	PILOT LAMP(14V 43mA)	9	34	074-4007-20	OUTLET SOCKET(20P)	1
10	017-0429-20	PILOT LAMP(8V 105mA)	2	35	076-0648-12	PLUG	2
11	-----	SWITCH PWB	1	36	074-1192-20	OUTLET SOCKET(20P)	1
12	335-7292-00	DISC GUIDE	1	37	941-0215-72	TUNER PACK	1
13	346-0149-01	LEATHER SHEET	1	38	-----	MAIN PWB	1
14	345-5550-00	RUBBER SW(A)	1	39	778-3006-00	TAP SCREW(3X6)	2
15	345-5551-00	RUBBER SW(B)	1	40	714-2606-81	MACHINE SCREW(M2.6X6)	20
16	345-5552-00	RUBBER SW(C)	1	41	714-2612-81	MACHINE SCREW(M2.6X12)	2
17	380-5634-00	KNOB	2	42	716-0878-00	IT SCREW(M2.6X5)	8
18	373-1072-01	DIAL CVR	1	43	714-2603-81	MACHINE SCREW(M2.6X6)	4
19	716-0778-00	WAVE SCREW(2X6)	16	44	286-6224-15	SETPLATE	1
20	929-0301-84	CD MECH MODULE	1	45	345-5579-00	CUSHION RUBBER	1
21	331-3463-01	MECH BRKT	1	46	345-5384-00	CUSHION	1
22	816-2651-50	FLAT WIRE	1	47	285-1960-00	GUIDE LABEL	1
23	335-7621-00	WIRE SUPPORT	1	48	800-0207-60	VINYL-COAT-WIRE	1
24	309-0795-02	ESCUTCHEON PLATE	1				

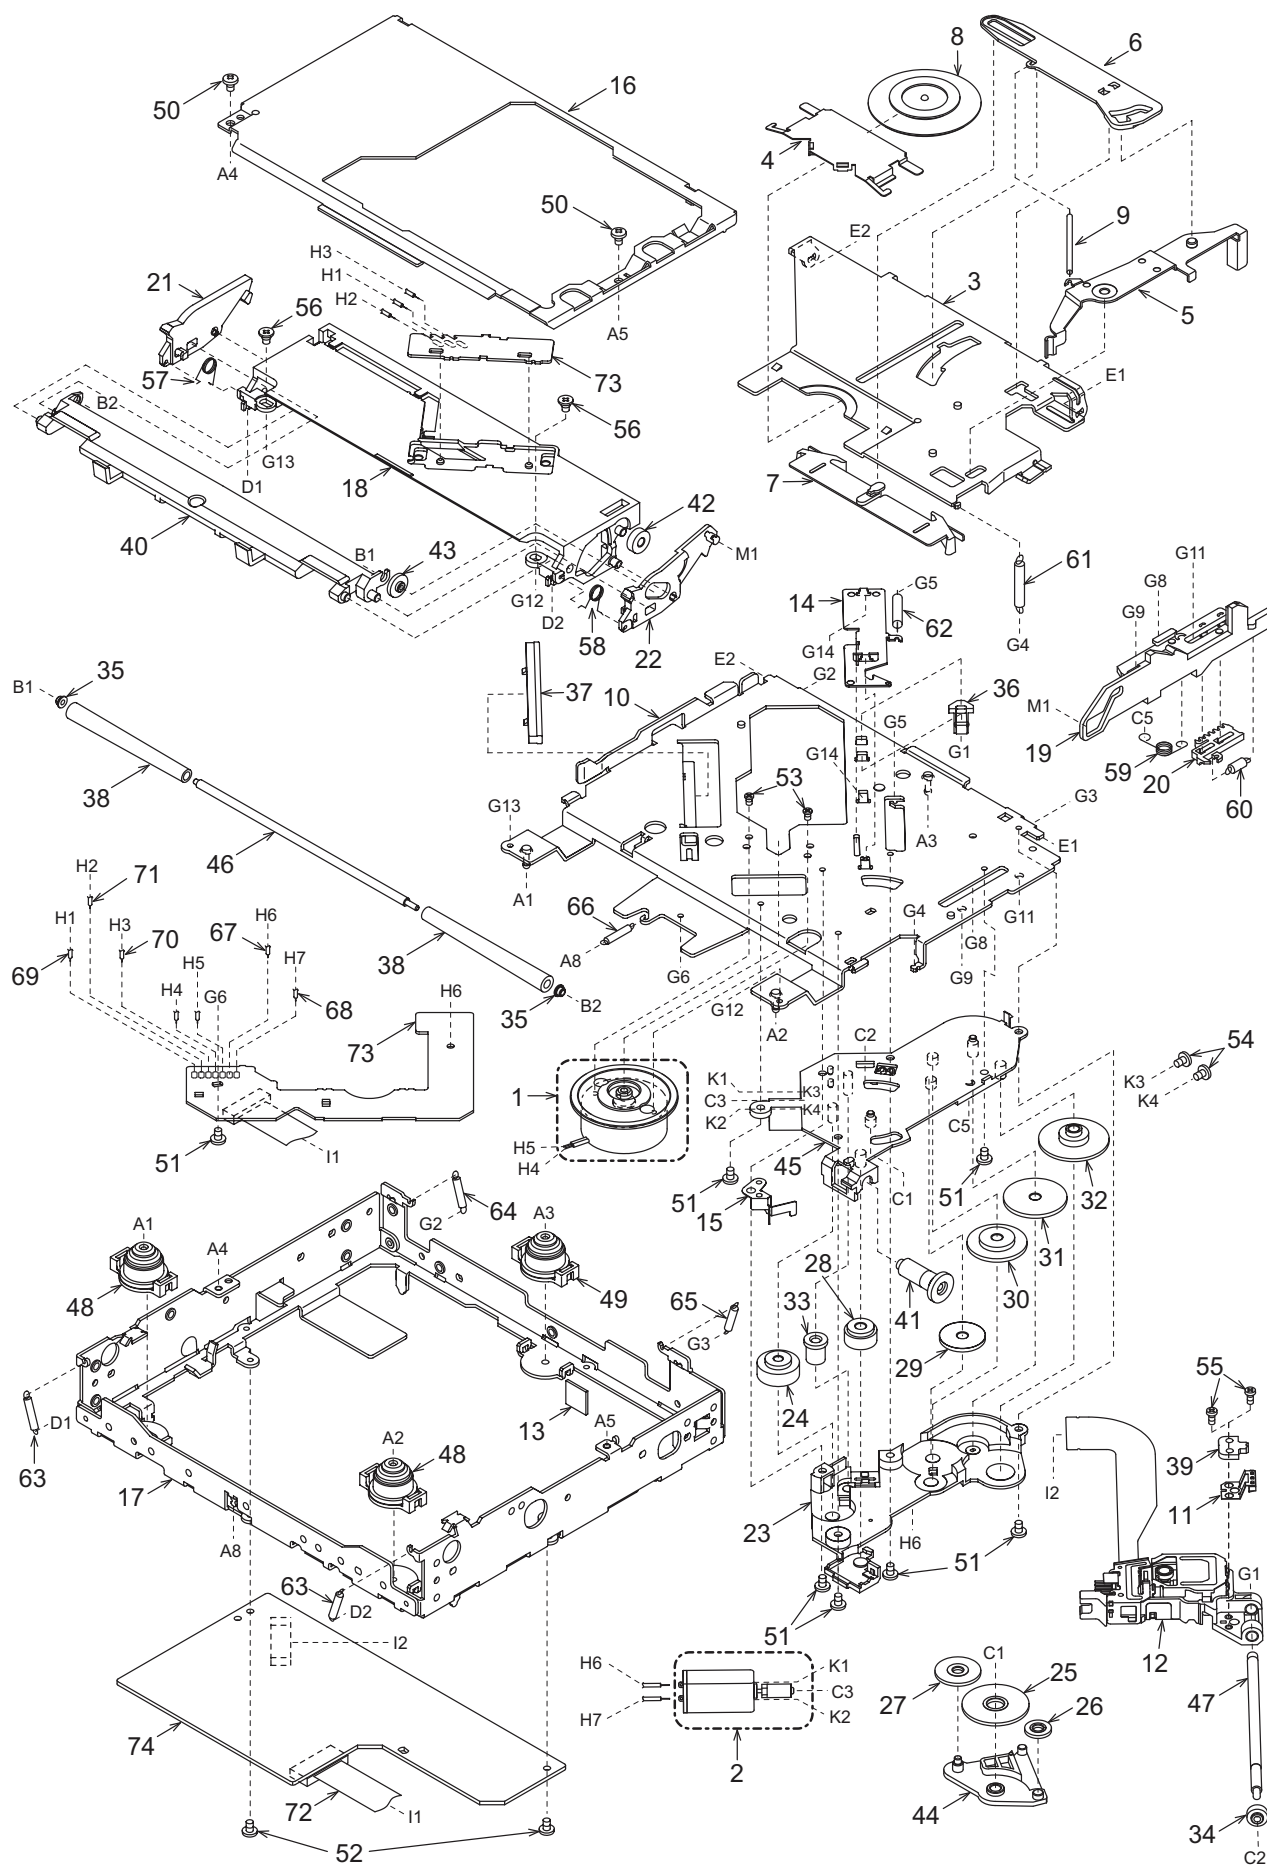

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-182-100	SPD-MOTOR-ASSY	1	38	621-0711-20	LOADING ROLLER	2
2	SMA-183-100	POW-MOTOR-ASSY	1	39	621-1729-20	SH-BASE	1
3	620-1736-22	CLAMPER LINK	1	40	621-0718-21	ROLLER GUIDE	1
4	620-1742-20	CLAMPER PLATE	1	41	621-0719-20	ROLLER GEAR	1
5	620-1737-21	SENSOR ARM	1	42	621-0720-20	ROLLER GEAR C	1
6	621-0626-21	STOPPER LINK	1	43	621-0721-20	ROLLER GEAR D	1
7	621-0627-21	DISC STOPPER	1	44	621-1719-20	IDLE CASE	1
8	621-0708-20	CLAMPER RING	1	45	621-0724-21	GEAR BASE	1
9	750-3471-20	SENSOR SPRING	1	46	622-1660-20	ROLLER SHAFT	1
10	966-1729-21	DRIVE-PLT-ASSY	1	47	624-0018-01	LEAD SCREW	1
11	966-1747-20	SH-RACK-ASSY	1	48	629-0086-20	DAMPER F	2
12	969-0071-31	PICK UP-ASSY	1	49	629-0087-20	DAMPER R	1
13	345-5476-20	CUSHION RUBBER	1	50	714-2003-81	MACHINE SCREW (M2x3)	2
14	620-1738-21	ID-LOCK PLATE	1	51	716-1507-00	SCREW (M2x3)	7
15	620-1739-20	SPRING PLATE	1	52	716-1670-00	SCREW (M2x4)	2
16	620-1740-22	UPPER CHASSIS	1	53	716-1733-00	SCREW (M1.7x2.3)	2
17	620-1585-22	LOWER CHASSIS-W	1	54	716-3551-00	SCREW (M1.4x2.5)	2
18	621-0598-27	UPPER GUIDE	1	55	716-3469-00	SCREW (Φ1.7x4)	2
19	621-0600-26	SHIFT LEVER	1	56	716-3473-00	SCREW (M2x3)	2
20	621-1735-20	RACK	1	57	750-3465-21	ROLLER SPRING L	1
21	621-0602-22	LOCK ARM L	1	58	750-3466-20	ROLLER SPRING R	1
22	621-0603-25	LOCK ARM R	1	59	750-3467-21	SHIFT SPRING	1
23	621-0605-22	GEAR COVER	1	60	750-3468-20	RACK SPRING	1
24	621-0608-21	SECOND GEAR	1	61	750-3469-20	CLAMPER SPRING	1
25	621-0609-20	BASE GEAR	1	62	750-3470-20	ID-LOCK SPRING	1
26	621-0610-20	IDLE GEAR A	1	63	750-3472-21	DR-SPRING F	2
27	621-0611-20	IDLE GEAR B	1	64	750-3473-20	DR-SPRING RA	1
28	621-0612-21	ROLLER GEAR A	1	65	750-3474-20	DR-SPRING RB	1
29	621-0616-20	POWER GEAR A	1	66	750-3475-21	DR-SPRING C	1
30	621-0617-20	POWER GEAR B	1	67	803-4906-60	VINYL-COAT-WIRE (Orange)	1
31	621-0618-20	POWER GEAR C	1	68	816-2590-00	EXTENSION LEAD (Green)	1
32	621-0619-20	POWER GEAR D	1	69	816-2591-00	EXTENSION LEAD (Yellow)	1
33	621-0620-20	THREAD GEAR A	1	70	816-2592-00	EXTENSION LEAD (Blue)	1
34	621-0621-20	THREAD GEAR B	1	71	816-2593-00	EXTENSION LEAD (Purple)	1
35	621-1726-20	ROLLER SLEEVE	2	72	816-2624-50	FLAT WIRE	1
36	621-0623-23	LS-HOLDER	1	73	-----	LED PWB	1
37	621-0624-22	GUIDE RAIL	1	74	-----	CD PWB	1

ELECTRICAL PARTS LIST

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT	C644	188-1063-38	16V 10uF	L101	010-2003-04	30uH(Variable)
BL101	941-0215-72	AM/FM TUNER	C645	188-1063-38	16V 10uF	L103	010-6009-76	22uH J
C107	168-2232-55	0.022uF K	C646	168-3332-78	0.033uF K	L104	010-6009-76	22uH J
C109	178-4742-78	0.47uF	C647	168-5632-78	16V 0.056uF	L202	010-6009-76	22uH J
C113	189-1073-29	10V 100uF	C648	168-5632-78	16V 0.056uF	L301	010-6009-76	22uH J
C114	168-1042-78	16V 0.1uF	C649	168-4712-55	470pF K	L302	010-6009-76	22uH J
C115	168-1042-78	16V 0.1uF	C650	168-4712-55	470pF K	P401	076-0648-12	12P
C116	168-1042-78	16V 0.1uF	C670	188-1073-28	10V 100uF	P402	076-0648-12	12P
C117	166-1801-50	18pF CH	C671	168-1042-78	16V 0.1uF	Q105	192-2712-51	2SC2712 G,L
C118	166-1801-50	18pF CH	C672	188-1073-28	10V 100uF	Q106	192-2712-51	2SC2712 G,L
C119	188-1073-28	10V 100uF	C691	178-1052-78	1uF	Q108	191-1240-00	2SB1240
C120	168-2232-55	0.022uF K	C692	188-1063-38	16V 10uF	Q109	191-1240-00	2SB1240
C121	166-1011-50	100pF CH	C693	188-1063-38	16V 10uF	Q110	191-1240-00	2SB1240
C122	166-1011-50	100pF CH	C694	188-1063-38	16V 10uF	Q201	190-1428-00	2SA1428
C123	042-1458-90	50V 1uF	C695	188-1063-38	16V 10uF	Q202	125-2004-92	RN1402
C124	168-2232-55	0.022uF K	C696	178-1052-78	1uF	Q204	193-1858-00	2SD1858
C125	188-4763-38	16V 47uF	C730	168-1042-78	16V 0.1uF	Q205	193-1858-00	2SD1858
C126	168-1022-55	1000pF	C731	168-1042-78	16V 0.1uF	Q208	190-1428-00	2SA1428
C127	188-4763-38	16V 47uF	C732	168-1042-78	16V 0.1uF	Q209	192-2712-00	2SC2712
C128	166-1011-50	100pF CH	C733	168-1042-78	16V 0.1uF	Q214	103-2012-00	2SD2012
C129	166-1011-50	100pF CH	C734	188-1053-68	50V 1uF	Q215	103-2012-00	2SD2012
C131	168-2232-55	0.022uF K	C735	188-1063-38	16V 10uF	Q219	125-0002-92	RN2402
C132	166-1011-50	100pF CH	C738	188-1053-68	50V 1uF	Q220	125-2004-92	RN1402
C133	166-1011-50	100pF CH	C801	188-1063-38	16V 10uF	Q301	192-2712-00	2SC2712
C138	119-0000-05	1/10W 0 ohm JW	C806	188-4763-38	16V 47uF	Q304	192-2712-00	2SC2712
C204	168-2232-55	0.022uF K	C807	188-1073-28	10V 100uF	Q308	192-2712-00	2SC2712
C205	168-1042-78	16V 0.1uF	C809	172-1041-15	0.1uF	Q309	125-0002-92	RN2402
C206	189-2273-28	10V 220uF	C810	188-1053-68	50V 1uF	Q310	192-2712-00	2SC2712
C209	189-4773-19	6.3V 470uF	C813	042-1586-00	16V 4700uF	Q311	191-1240-00	2SB1240
C213	188-1063-38	16V 10uF	C814	172-1041-15	0.1uF	Q312	192-2712-00	2SC2712
C214	188-1073-28	10V 100uF	C851	168-1032-55	0.01uF K	Q320	193-2118-50	2SD2118F5 R,S
C215	188-4763-38	16V 47uF	C951	168-1042-78	16V 0.1uF	Q401	125-0002-92	RN2402
C216	188-4763-18	6.3V 47uF	C952	188-4763-38	16V 47uF	Q402	125-2004-92	RN1402
C217	168-1042-78	16V 0.1uF	C953	166-2201-50	22pF CH	Q403	193-1858-00	2SD1858
C301	168-1032-55	0.01uF K	C954	166-2201-50	22pF CH	Q404	125-0002-92	RN2402
C302	168-1042-78	16V 0.1uF	C955	166-1007-50	10pF CH	Q405	125-2004-92	RN1402
C303	188-4763-18	6.3V 47uF	C956	166-1007-50	10pF CH	Q407	192-2712-00	2SC2712
C304	168-1032-55	0.01uF K	C957	188-1063-38	16V 10uF	Q409	193-2118-00	2SD2118F5 Q,R,S
C305	168-1032-55	0.01uF K	C958	188-1063-38	16V 10uF	Q701	125-2004-92	RN1402
C306	168-1032-55	0.01uF K	C959	188-1063-38	16V 10uF	Q705	192-2712-00	2SC2712
C307	168-1042-78	16V 0.1uF	C960	188-1063-38	16V 10uF	Q801	190-1428-00	2SA1428
C309	188-1053-68	50V 1uF	C961	168-1042-78	16V 0.1uF	Q802	192-2712-00	2SC2712
C311	168-1022-55	1000pF K	CCT301	050-0140-54	1/32W 1k ohm x4J	Q804	193-2118-00	2SD2118F5 Q,R,S
C312	168-1022-55	1000pF K	D203	001-4301-33	HZU5.6B3	Q807	125-0002-92	RN2402
C313	168-1042-78	16V 0.1uF	D205	001-0347-48	MA4091H	Q808	125-2004-92	RN1402
C314	188-2263-38	16V 22uF	D301	001-0347-69	MA4180M	Q809	191-1240-00	2SB1240
C315	168-1042-78	16V 0.1uF	D303	060-0108-00	1/62P 0 ohm JW	Q810	192-2712-00	2SC2712
C316	042-0559-00	5.5V 0.1F	D304	001-0347-69	MA4180M	R107	119-0000-05	1/10W 0 ohm JW
C318	188-1073-28	10V 100uF	D305	001-4301-32	HZU5.6B2	R112	119-2221-15	1/10W 2.2k ohm
C319	168-1042-78	16V 0.1uF	D306	001-4301-25	HZU4.7B1	R115	119-2221-15	1/10W 2.2k ohm
C320	188-4763-38	16V 47uF	D308	001-0347-69	MA4180M	R116	119-2231-15	1/10W 22k ohm
C401	188-1063-38	16V 10uF	D310	001-0516-90	MA111	R117	111-1001-94	1/4W 10 ohm
C402	188-1063-38	16V 10uF	D312	001-0516-90	MA111	R119	119-5631-15	1/10W 56k ohm
C403	188-1063-38	16V 10uF	D314	001-0466-90	S5688B	R120	119-3321-15	1/10W 3.3k ohm
C404	188-1073-28	10V 100uF	D316	001-0504-36	HZS7A1L	R121	119-2221-15	1/10W 2.2k ohm
C603	188-2253-67	50V 2.2uF	D401	001-0504-39	HZS7B2L	R122	119-4721-15	1/10W 4.7k ohm
C604	168-1532-55	0.015uF K	D402	001-0347-40	MA4075L	R123	119-1021-15	1/10W 1k ohm
C605	168-1532-55	0.015uF K	D403	001-0347-43	MA4082L	R124	119-5121-15	1/10W 5.1k ohm
C606	188-2253-68	50V 2.2uF	D803	001-0347-46	MA4091L	R125	119-1041-15	1/10W 100k ohm
C610	168-4712-55	470pF K	D804	001-0516-90	MA111	R126	119-2221-15	1/10W 2.2k ohm
C611	168-4712-55	470pF K	D805	001-0466-90	S5688B	R128	119-1021-15	1/10W 1k ohm
C619	188-4763-37	16V 47uF	D806	001-0466-90	S5688B	R129	119-1021-15	1/10W 1k ohm
C620	188-4763-17	6.3V 47uF	D807	001-0466-90	S5688B	R131	119-1031-15	1/10W 10k ohm
C622	178-5642-78	0.56uF	D808	001-2015-00	RL253	R132	119-1031-15	1/10W 10k ohm
C623	178-5642-78	0.56uF	IC102	051-6212-18	LC72191JM-UC-TLM	R133	119-2221-15	1/10W 2.2k ohm
C626	188-1053-68	50V 1uF	IC301	051-6600-58	HA12187FP	R134	119-2221-15	1/10W 2.2k ohm
C627	188-1053-68	50V 1uF	IC302	052-3196-00	M30624MGA-630GP	R135	119-1031-15	1/10W 10k ohm
C632	168-1042-78	16V 0.1uF	IC303	051-0869-58	NJM2103M	R136	119-0000-05	1/10W 0 ohm JW
C633	168-1042-78	16V 0.1uF	IC304	051-9400-29	BR93L46F-W	R137	119-3311-15	1/10W 330 ohm
C634	168-1042-78	16V 0.1uF	IC601	051-5027-10	LC75412WH-UC	R140	119-1041-15	1/10W 100k ohm
C635	168-1042-78	16V 0.1uF	IC702	051-2040-00	TA8276H	R202	119-5611-15	1/10W 560 ohm
C640	168-1022-55	1000pF K	IC951	051-0350-93	NJM4558M	R203	119-2221-15	1/10W 2.2k ohm
C641	168-1022-55	1000pF K	J202	074-1192-20	SOCKET(20P)	R206	116-2291-15	1/4W 2.2 ohm
C642	168-1022-55	1000pF K	J301	074-1194-00	SOCKET(Ce NET)	R207	116-2291-15	1/4W 2.2 ohm
C643	168-1022-55	1000pF K	J801	074-4007-20	SOCKET(20P)	R209	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R210	119-3611-15	1/10W 360 ohm	R354	119-3341-15	1/10W 330k ohm	R729	119-1031-15	1/10W 10k ohm
R212	119-0000-05	1/10W 0 ohm JW	R355	119-6831-15	1/10W 68k ohm	R733	119-8221-15	1/10W 8.2k ohm
R214	119-0000-05	1/10W 0 ohm JW	R356	119-5631-15	1/10W 56k ohm	R734	119-2221-15	1/10W 2.2k ohm
R215	119-0000-05	1/10W 0 ohm JW	R357	111-1211-94	1/4W 120 ohm	R735	119-2221-15	1/10W 2.2k ohm
R217	119-0000-05	1/10W 0 ohm JW	R358	119-2241-15	1/10W 220k ohm	R736	119-2221-15	1/10W 2.2k ohm
R223	116-4711-15	1/4W 470 ohm	R359	119-4731-15	1/10W 47k ohm	R737	119-2221-15	1/10W 2.2k ohm
R225	119-4721-15	1/10W 4.7k ohm	R360	119-5631-15	1/10W 15k ohm	R738	119-2221-15	1/10W 2.2k ohm
R226	116-4711-15	1/4W 470 ohm	R361	119-1021-15	1/10W 1k ohm	R739	119-4731-15	1/10W 47k ohm
R227	119-2231-15	1/10W 22k ohm	R363	119-1031-15	1/10W 10k ohm	R740	119-4731-15	1/10W 47k ohm
R230	119-3321-15	1/10W 3.3k ohm	R364	119-1021-15	1/10W 1k ohm	R801	116-4721-15	1/4W 4.7k ohm
R231	116-2291-15	1/4W 2.2 ohm	R365	119-1031-15	1/10W 10k ohm	R802	111-1031-94	1/4W 10k ohm
R232	116-2291-15	1/4W 2.2 ohm	R366	119-2221-15	1/10W 2.2k ohm	R803	119-1031-15	1/10W 10k ohm
R237	111-1511-81	1/2W 150 ohm	R368	119-0000-05	1/10W 0 ohm JW	R804	119-1031-15	1/10W 10k ohm
R306	119-1031-15	1/10W 10k ohm	R370	116-1001-15	1/4W 10 ohm	R805	116-2221-15	1/4W 2.2k ohm
R307	119-4721-15	1/10W 4.7k ohm	R371	119-4721-15	1/10W 4.7k ohm	R806	116-2221-15	1/4W 2.2k ohm
R308	119-4721-15	1/10W 4.7k ohm	R372	119-0000-05	1/10W 0 ohm JW	R815	116-4711-15	1/4W 470 ohm
R309	119-4721-15	1/10W 4.7k ohm	R379	117-6821-15	1/8W 6.8k ohm	R816	111-5621-94	1/4W 5.6k ohm
R310	119-4731-15	1/10W 47k ohm	R401	119-1221-15	1/10W 1.2k ohm	R817	116-2221-15	1/4W 2.2k ohm
R313	119-4731-15	1/10W 47k ohm	R402	032-0092-51	1/8W 1k ohm F	R818	117-1031-15	1/8W 10k ohm
R314	119-4721-15	1/10W 4.7k ohm	R403	032-0092-56	1/8W 22k ohm F	R819	116-2221-15	1/4W 2.2k ohm
R316	032-0140-62	1/10W 1k ohm F	R404	119-1541-15	1/10W 150k ohm	R820	119-3321-15	1/10W 3.3k ohm
R317	119-0000-05	1/10W 0 ohm JW	R405	116-1021-15	1/4W 1k ohm	R821	119-1031-15	1/10W 10k ohm
R319	119-4721-15	1/10W 4.7k ohm	R406	119-2231-15	1/10W 22k ohm	R831	119-0000-05	1/10W 0 ohm JW
R320	119-4721-15	1/10W 4.7k ohm	R407	119-2231-15	1/10W 22k ohm	R832	119-0000-05	1/10W 0 ohm JW
R322	119-0000-05	1/10W 0 ohm JW	R408	116-1591-15	1/4W 1.5 ohm	R851	119-5631-15	1/10W 56k ohm
R323	119-0000-05	1/10W 0 ohm JW	R411	060-0108-00	1/6ZP 0 ohm JW	R852	119-1221-15	1/10W 1.2k ohm
R325	119-1031-15	1/10W 10k ohm	R413	119-0000-05	1/10W 0 ohm JW	R891	119-0000-05	1/10W 0 ohm JW
R328	119-0000-05	1/10W 0 ohm JW	R414	119-4721-15	1/10W 4.7k ohm	R951	119-1031-15	1/10W 10k ohm
R330	119-0000-05	1/10W 0 ohm JW	R417	119-4721-15	1/10W 4.7k ohm	R952	119-1031-15	1/10W 10k ohm
R332	119-0000-05	1/10W 0 ohm JW	R453	119-0000-05	1/10W 0 ohm JW	R953	119-1031-15	1/10W 10k ohm
R334	119-1031-15	1/10W 10k ohm	R603	119-1031-15	1/10W 10k ohm	R954	119-1031-15	1/10W 10k ohm
R335	119-4731-15	1/10W 47k ohm	R605	119-4721-15	1/10W 4.7k ohm	R955	119-1031-15	1/10W 10k ohm
R336	119-4731-15	1/10W 47k ohm	R606	119-1831-15	1/10W 18k ohm	R956	119-1031-15	1/10W 10k ohm
R337	119-4731-15	1/10W 47k ohm	R607	119-1831-15	1/10W 18k ohm	R957	119-1031-15	1/10W 10k ohm
R338	119-4731-15	1/10W 47k ohm	R608	119-4721-15	1/10W 4.7k ohm	R958	119-1031-15	1/10W 10k ohm
R339	117-2231-15	1/8W 22k ohm	R610	119-1031-15	1/10W 10k ohm	R959	119-1021-15	1/10W 1k ohm
R340	111-6801-94	1/4W 68 ohm	R615	119-1221-15	1/10W 1.2k ohm	SUP10	060-0122-20	DSP-141N-S00B
R341	117-2231-15	1/8W 22k ohm	R616	119-1221-15	1/10W 1.2k ohm	T801	009-0670-00	180uH
R342	119-1031-15	1/10W 10k ohm	R620	119-1051-15	1/10W 1M ohm	TH801	002-0222-90	PTH61G30BD
R344	117-5621-15	1/8W 5.6k ohm	R651	119-0000-05	1/10W 0 ohm JW	TM101	073-0762-90	TERMINAL
R345	119-2231-15	1/10W 22k ohm	R652	119-0000-05	1/10W 0 ohm JW	TM102	073-0762-90	TERMINAL
R346	117-1021-15	1/8W 1k ohm	R670	116-2291-15	1/4W 2.2 ohm	TM103	073-0762-90	TERMINAL
R347	119-1021-15	1/10W 1k ohm	R671	116-8211-15	1/4W 820 ohm	TM104	073-0762-90	TERMINAL
R348	119-2231-15	1/10W 22k ohm	R672	116-1021-15	1/4W 1k ohm	X101	061-1066-00	7.2MHZ
R349	119-1031-15	1/10W 10k ohm	R691	119-3331-15	1/10W 33k ohm	X301	060-1533-90	10MHZ
R350	119-1041-15	1/10W 100k ohm	R692	119-3331-15	1/10W 33k ohm	PWB	039-2696-00	PWB(WITHOUT COMPONENT)
R351	119-1041-15	1/10W 100k ohm	R693	119-3331-15	1/10W 33k ohm			
R352	119-6831-15	1/10W 68k ohm	R694	119-3331-15	1/10W 33k ohm			

Switch PWB (B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF	PL903	017-0429-20	8V 105mA	R910	119-0000-05	1/10W 0 ohm JW
C902	168-1042-78	16V 0.1uF	PL904	017-0420-38	14V 40mA	R912	119-0000-05	1/10W 0 ohm JW
C903	168-1042-78	16V 0.1uF	PL905	017-0420-38	14V 40mA	R914	119-0000-05	1/10W 0 ohm JW
C904	168-1042-78	16V 0.1uF	PL907	017-0420-38	14V 40mA	R915	119-3331-15	1/10W 33k ohm
C905	168-1042-78	16V 0.1uF	PL908	017-0420-38	14V 40mA	R916	119-1021-15	1/10W 1k ohm
C906	168-2212-55	220pF K	PL909	017-0420-38	14V 40mA	R917	119-1021-15	1/10W 1k ohm
IC901	051-6052-20	LC75817NTRH8720-UC-E	PL910	017-0420-38	14V 40mA	TH901	002-0306-90	SC20-3J153
J901	074-3000-62	SOCKET(12)	PL911	017-0420-38	14V 40mA	VR901	016-0014-14	VR W/SHAFT
J902	074-3000-62	SOCKET(12P)	PL912	017-0420-38	14V 40mA	VR902	016-0014-14	VR W/SHAFT
L901	010-3406-66	NLV25 22uH J	R904	119-0000-05	1/10W 0 ohm JW	PWB	039-2697-00	PWB(WITHOUT COMPONENT)
LCD901	379-1335-52	INDICATOR(LCD)	R905	119-0000-05	1/10W 0 ohm JW			
PL901	017-0429-20	8V 105mA	R906	119-0000-05	1/10W 0 ohm JW			
PL902	017-0420-38	14V 40mA	R907	119-0000-05	1/10W 0 ohm JW			

CD PWB (B3) section: CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C133	046-1532-78	0.015uF	R7	033-4731-15	1/10W 47k ohm
C4	168-1042-78	16V 0.1uF	C134	168-1042-78	16V 0.1uF	R8	033-1051-15	1/10W 1M ohm
C5	046-1032-78	0.01uF	C135	045-6801-50	50V 68pF	R9	033-3311-15	1/10W 330 ohm
C9	046-4722-58	4700pF	C136	178-1052-78	1uF	R12	033-4731-15	1/10W 47k ohm
C10	045-1011-50	100pF	C138	168-1042-78	16V 0.1uF	R13	033-1041-15	1/10W 100k ohm
C13	168-1042-78	16V 0.1uF	C139	168-1042-78	16V 0.1uF	R14	033-4721-15	1/10W 4.7k ohm
C16	168-1042-78	16V 0.1uF	C140	046-6812-58	680pF	R15	033-4721-15	1/10W 4.7k ohm
C17	046-1032-78	0.01uF	C142	178-1052-78	1uF	R16	033-1021-15	1/10W 1k ohm
C18	178-1052-78	1uF	C144	042-0560-85	6.3V 100uF	R17	033-1021-15	1/10W 1k ohm
C19	046-1032-78	0.01uF	C145	168-1042-78	16V 0.1uF	R19	033-4731-15	1/10W 47k ohm
C20	168-1042-78	16V 0.1uF	C146	168-1042-78	16V 0.1uF	R20	033-4731-15	1/10W 47k ohm
C21	042-0595-53	4V220uF	C147	178-1052-78	1uF	R23	033-2211-15	1/10W 220 ohm
C22	168-1042-78	16V 0.1uF	C148	042-0595-53	4V220uF	R24	033-4731-15	1/10W 47k ohm
C23	168-1042-78	16V 0.1uF	C149	163-1073-35	16V100uF	R28	033-6841-15	1/10W 680k ohm
C24	046-1032-78	0.01uF	C150	168-1042-78	16V 0.1uF	R29	033-6841-15	1/10W 680k ohm
C25	045-8097-50	8pF	C151	178-1052-78	1uF	R30	033-1041-15	1/10W 100k ohm
C26	045-8097-50	8pF	C200	178-1052-78	1uF	R31	033-1031-15	1/10W 10k ohm
C27	042-0416-52	10V10uF TAN	CCT1	050-0145-54	1/16W 47k ohm x4	R32	033-1031-15	1/10W 10k ohm
C28	046-1032-78	0.01uF	CCT2	050-0145-58	2.2k ohm x 4	R33	033-1031-15	1/10W 10k ohm
C29	168-1042-78	16V 0.1uF	CCT3	050-0140-63	1/32W 47k ohm x4J	R34	033-6831-15	1/10W 68k ohm
C30	045-1201-50	12pF	CCT10	050-0140-68	1/32W 3.3k ohm x4J	R35	033-6831-15	1/10W 68k ohm
C31	168-1042-78	16V 0.1uF	D1	001-2610-90	RB480KTL	R36	033-3311-15	1/10W 330 ohm
C32	046-1032-78	0.01uF	D2	001-2610-90	RB480KTL	R43	033-4731-15	1/10W 47k ohm
C33	046-1032-78	0.01uF	D3	001-2610-90	RB480KTL	R44	033-4731-15	1/10W 47k ohm
C34	046-1032-78	0.01uF	D4	001-2610-90	RB480KTL	R45	033-4731-15	1/10W 47k ohm
C35	046-1022-58	1000pF	D5	001-2610-90	RB480KTL	R101	033-1231-15	1/10W 12k ohm
C102	163-1073-35	16V100uF	D6	001-2610-90	RB480KTL	R102	033-3321-15	1/10W 3.3k ohm
C103	046-4722-58	4700pF	D101	001-0367-91	1SS226	R103	033-3331-15	1/10W 33k ohm
C104	046-1032-78	0.01uF	IC1	051-7518-18	SN74LVC139APWR	R104	033-4731-15	1/10W 47k ohm
C105	168-1042-78	16V 0.1uF	IC2	051-3315-90	TPS76316DBVR	R105	033-4731-15	1/10W 47k ohm
C106	168-1042-78	16V 0.1uF	IC3	051-7239-38	SN74AHCT08PWR	R106	033-2211-15	1/10W 220 ohm
C107	042-0416-52	10V10uF TAN	IC5	051-5441-08	BD4828G-TR	R107	033-2211-15	1/10W 220 ohm
C108	168-1042-78	16V 0.1uF	IC6	051-6700-00	TMS320DA140	R108	033-1021-15	1/10W 1k ohm
C109	168-1042-78	16V 0.1uF	IC10	052-5055-34	MBM29DL800BA-90PFTN	R109	033-1021-15	1/10W 1k ohm
C110	168-1042-78	16V 0.1uF	IC11	051-6919-08	NJU6391PE	R110	033-4731-15	1/10W 47k ohm
C111	168-1042-78	16V 0.1uF	IC12	051-7221-58	SN74AHC1G04HDCR	R115	033-0000-05	1/10W 0 ohm
C112	168-4732-78	0.047uF	IC13	051-7280-38	TC7SU04FU-TE85L	R116	033-5621-15	1/10W 5.6k ohm
C113	168-4732-78	0.047uF	IC14	051-7280-38	TC7SU04FU-TE85L	R117	033-4731-15	1/10W 47k ohm
C114	168-1042-78	16V 0.1uF	IC101	051-6069-08	FAN8047G3	R118	033-3341-15	1/10W 330k ohm
C115	045-4701-50	47pF	IC102	051-6399-00	TC94A15F	R119	033-2231-15	1/10W 22k ohm
C116	046-4712-58	470pF	J1	074-1138-65	15P	R120	033-2231-15	1/10W 22k ohm
C117	046-4712-58	470pF	J2	074-1138-60	10P	R121	117-1001-15	1/10W 10 ohm
C118	168-1042-78	16V 0.1uF	J3	074-1237-70	20P	R122	033-2211-15	1/10W 220 ohm
C119	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188PQR	R123	117-6811-15	1/10W 680 ohm
C120	046-1532-78	0.015uF	Q2	125-2004-92	RN1402	R124	032-0162-50	1/10W 0.51 ohm
C121	046-6822-58	6800pF	Q101	131-1188-50	2SB1188PQR	R126	033-1021-15	1/10W 1k ohm
C122	168-1042-78	16V 0.1uF	Q102	131-1188-50	2SB1188PQR	R127	033-1021-15	1/10W 1k ohm
C123	046-1032-78	0.01uF	R1	033-4721-15	1/10W 4.7k ohm	R130	033-1051-15	1/10W 1M ohm
C126	046-3332-78	0.033uF	R2	033-1041-15	1/10W 100k ohm	TM101	073-0768-90	TERMINAL
C127	046-4722-58	4700pF	R3	033-1041-15	1/10W 100k ohm	X1	061-3534-90	16.92MHz
C130	168-1042-78	16V 0.1uF	R4	033-1031-15	1/10W 10k ohm	PWB	039-2429-21	PWB(WITHOUT COMPONENT)
C131	046-1522-58	1500pF	R5	033-2231-15	1/10W 22k ohm			
C132	168-1042-78	16V 0.1uF	R6	033-3911-15	1/10W 390 ohm			

LED PWB (B4) section: CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D11	001-7058-90	AN1105W-RR	Q11	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
D12	001-7058-90	AN1105W-RR	Q12	060-4015-90	PS1192H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J4	074-1138-60	10P	S1	013-7414-50	CHUCKING			