EXPLODED VIEW (UNIT)

Block No.M1MM

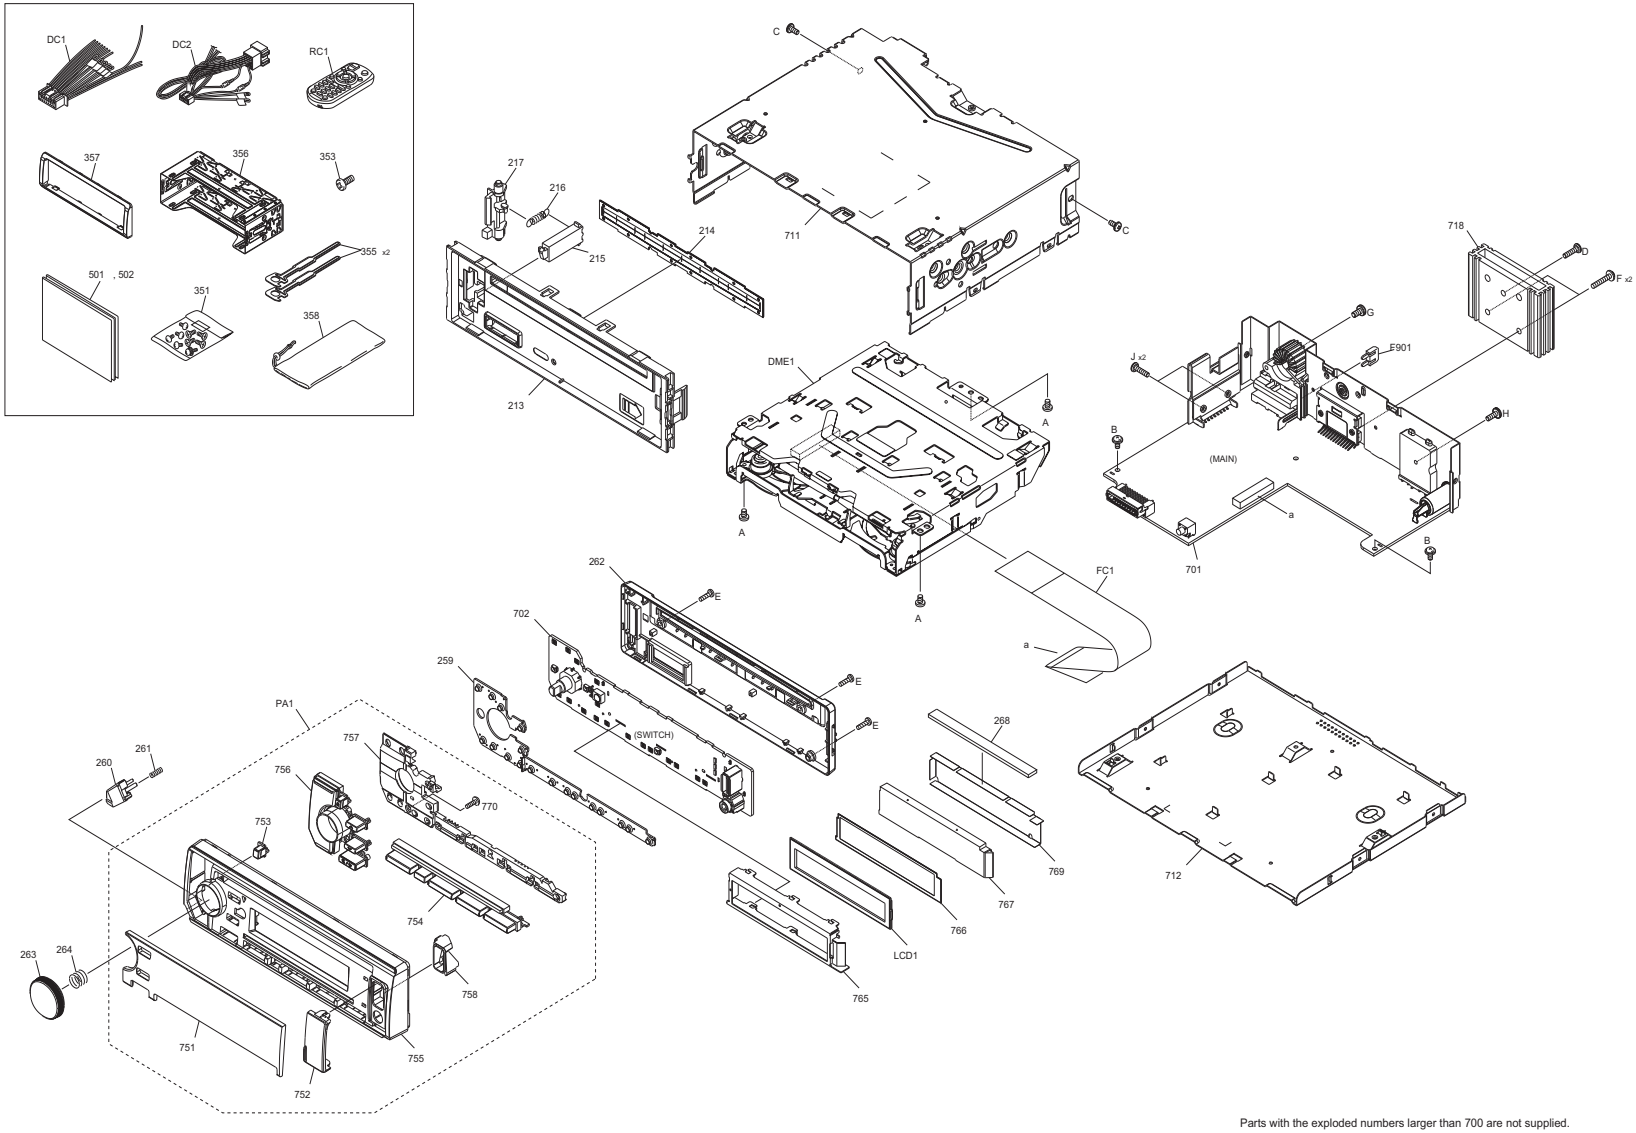

Parts with the exploded numbers larger than 700 are not supplied.

No.WA285

created date:2017-09-08

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
⚠	DC1	E3A-0324-00	DC CORD		1	M1,K0
⚠	DC2	E3A-0320-00	DC CORD		1	E2,E4,E3,E1
	DME1	XJJ-0370-00	CD MECHANISM		1	M1,K0
	DME1	XJJ-0390-00	CD MECHANISM		1	E2,E4,E3,E1
⚠	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	WJT0335-001A-E	E-CARD WIRE		1	
	LCD1	B3H-0034-00	LCD		1	
	PA1	A6D-0098-1L	PANEL ASSY		1	M1
	PA1	A6D-0098-1K	PANEL ASSY		1	E2,E4,E3
	PA1	A6D-0098-19	PANEL ASSY		1	E1
	PA1	A6D-0098-1C	PANEL ASSY		1	K0
	RC1	A7A-0019-00	REMOTE CTL(IR)		1	M1,K0
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	B	LV41200-004A	SPECIAL SCREW		2	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	1	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	3	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSPSG3008ZA	TAP SCREW	M3 x 8mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	2	
	213	A2C-0044-00	SUB PANEL		1	
	214	F1K-0050-00	BLIND PLATE		1	
	215	D1A-0023-00	LEVER		1	
	216	G0A-0027-00	EXTEN.SPRING		1	
	217	D1A-0022-00	LEVER		1	
	259	E2K-0055-00	CONDUCT RUBBER		1	
	260	K2K-0265-00	KNOB		1	
	261	GE30999-013A	COMP.SPRING		1	
	262	A4G-0069-00	REAR COVER		1	
	263	K2K-0215-02	KNOB BASE		1	M1
	263	K2K-0165-00	KNOB BASE		1	E2,E4,E3,E1
	263	K2K-0101-00	KNOB		1	K0
	264	GE40127-005A	KNOB SPRING		1	
	268	QNZ1117-001	RUBBER CONNE		1	
	351	GE40531-001A	SCREW SET		1	M1,K0
	353	QYSPSF2008ZA	TAP SCREW	M2 x 8mm	1	M1,K0
	355	GE40685-001A	HOOK		2	
	356	GE20362-002A	MOUNTING SLEEVE		1	
	357	B0H-0013-00	ESCUTCHEON		1	M1
	357	B0H-0014-00	ESCUTCHEON		1	E2,E4,E3,E1,K0
	358	GE40521-001A	CARRYING CASE		1	M1
	501	B5A-2091-00	INST.MANUAL	ENG ARA	1	M1
	501	B5A-2090-00	INST.MANUAL	ENG RUS UKR	1	E2,E4,E3,E1
	501	B5A-2089-00	INST.MANUAL	ENG FRE SPA	1	K0
	502	B5A-2090-01	INST.MANUAL	FRE SPA GER ITA POR DUT	1	E2,E4,E3,E1
	701	----------	MAIN PWB ASSY	NO SERVICE PART	1	M1
	701	----------	MAIN PWB ASSY	NO SERVICE PART	1	E2,E4,E3
	701	----------	MAIN PWB ASSY	NO SERVICE PART	1	E1
	701	----------	MAIN PWB ASSY	NO SERVICE PART	1	K0
	702	----------	SWITCH PWB ASSY	NO SERVICE PART	1	M1,K0
	702	----------	SWITCH PWB ASSY	NO SERVICE PART	1	E2
	702	----------	SWITCH PWB ASSY	NO SERVICE PART	1	E4
	702	----------	SWITCH PWB ASSY	NO SERVICE PART	1	E3,E1
	711	----------	TOP COVER	NO SERVICE PART	1	M1,K0
	711	----------	TOP COVER	NO SERVICE PART	1	E2,E4,E3,E1
	712	----------	BOTTOM PLATE	NO SERVICE PART	1	
	718	----------	HEAT SINK	NO SERVICE PART	1	
	751	----------	FRONT GLASS	NO SERVICE PART	1	M1
	751	----------	FRONT GLASS	NO SERVICE PART	1	E2,E4,E3
	751	----------	FRONT GLASS	NO SERVICE PART	1	E1
	751	----------	FRONT GLASS	NO SERVICE PART	1	K0
	752	----------	COVER	NO SERVICE PART	1	
	753	----------	PUSH KNOB	NO SERVICE PART	1	
	754	----------	PUSH KNOB	NO SERVICE PART	1	
	755	----------	PANEL	NO SERVICE PART	1	M1
	755	----------	PANEL	NO SERVICE PART	1	E2,E4,E3,E1,K0
	756	----------	KNOB ASSY	NO SERVICE PART	1	M1,E2,E4,E3,E1
	756	----------	KNOB ASSY	NO SERVICE PART	1	K0
	757	----------	LIGHTING BOARD	NO SERVICE PART	1	
	758	----------	LIGHTING BOARD	NO SERVICE PART	1	
	765	----------	LCD CASE	NO SERVICE PART	1	
	766	----------	OPTI.DIFFUSER	NO SERVICE PART	1	
	767	----------	LIGHTING BOARD	NO SERVICE PART	1	
	769	----------	REF.SHEET	NO SERVICE PART	1	
	770	----------	TAP SCREW	NO SERVICE PART	1	

EXPLODED VIEW (CD MECHANISM: XJJ-0370-00)

Block No.MBMM

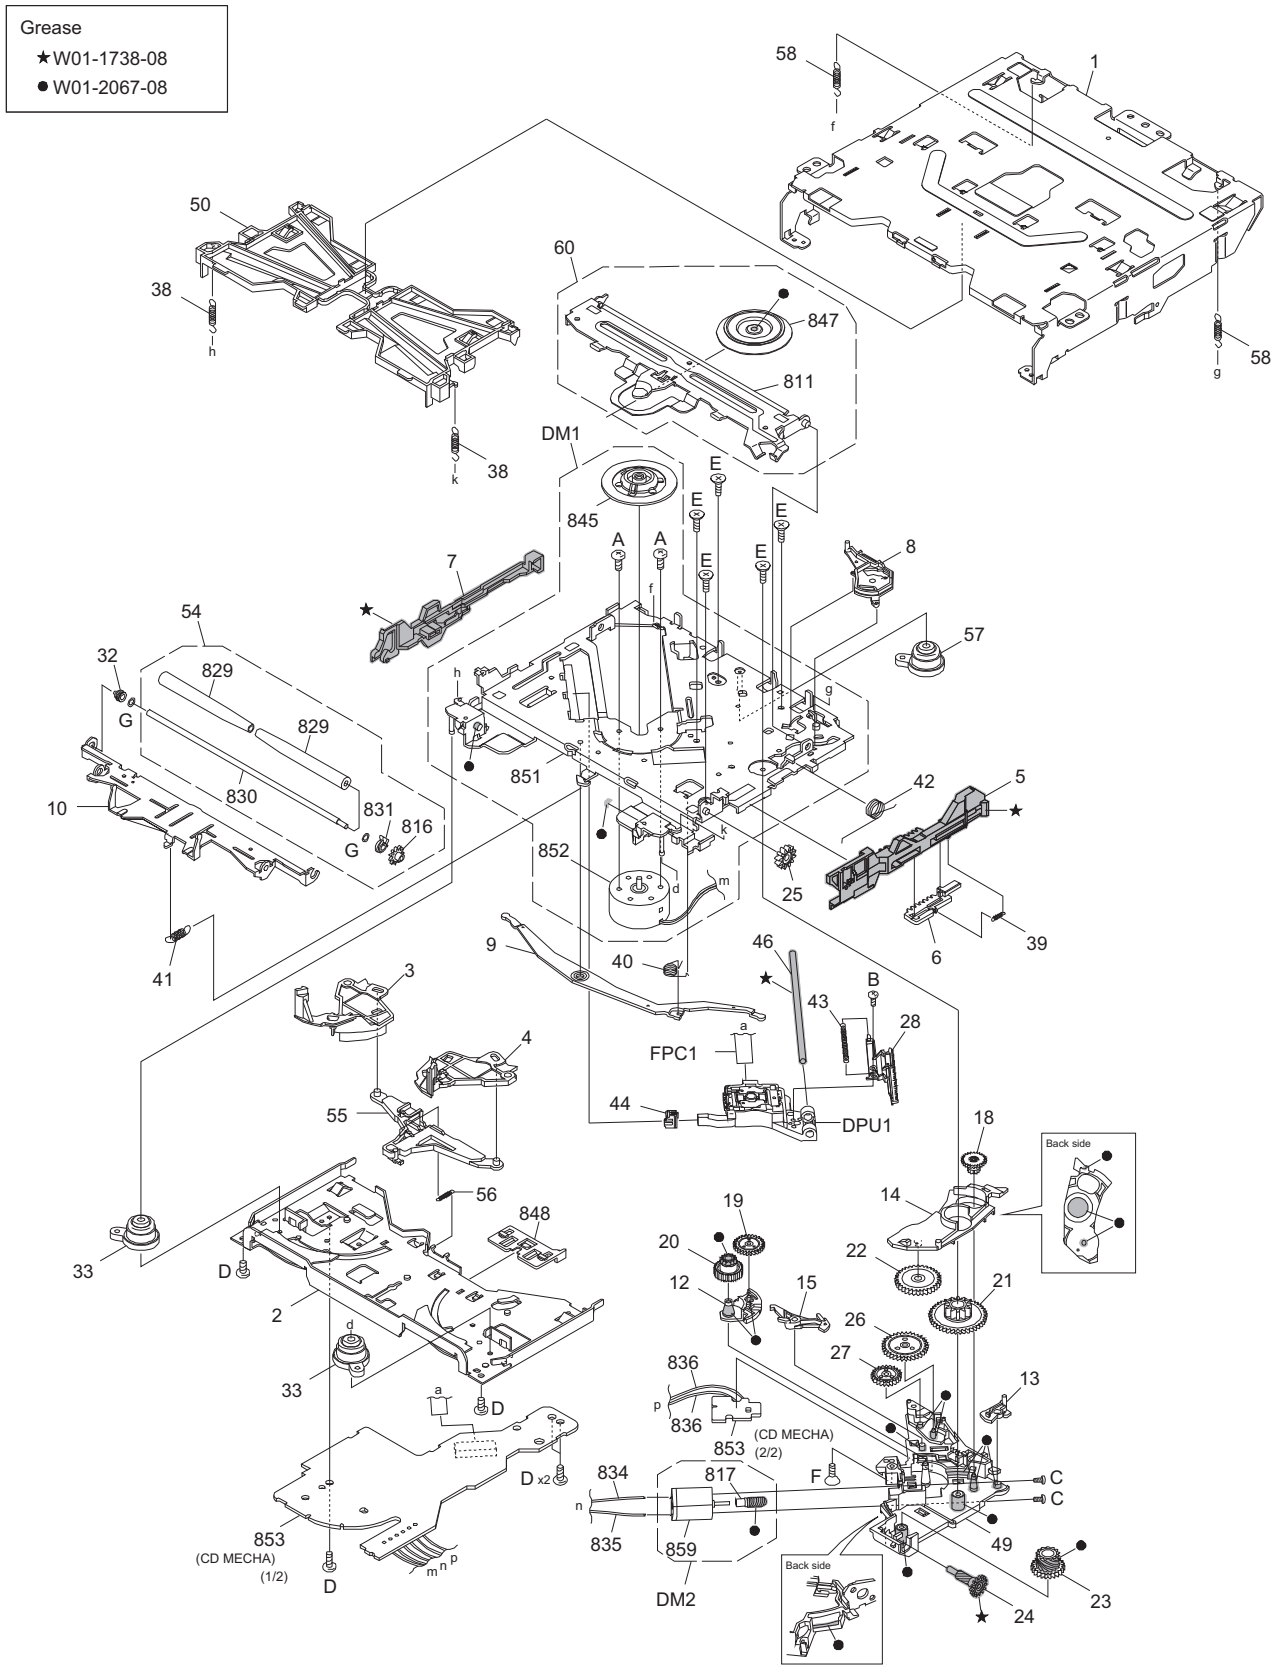

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: XJJ-0370-00) <MBMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	M1,K0
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	M1,K0
	DPU1	T2F-0002-00	CD OPT PICKUP		1	M1,K0
	FPC1	QAL1465-001	FPC		1	M1,K0
	A	LV45568-001A	MINI SCREW		2	M1,K0
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	M1,K0
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	M1,K0
	D	VKZ4539-054	MINI SCREW		5	M1,K0
	E	LV45818-001A	G.HOLDER SCREW		5	M1,K0
	F	LV45815-001A	M. SHAFT SCREW		1	M1,K0
	G	LV45816-001A	ROLLER WASHER		2	M1,K0
	1	LV11877-003A	OUTER CHASSIS		1	M1,K0
	2	LV11878-004A	LOWER CHASSIS		1	M1,K0
	3	LV3A174-002A	DISC ARM L		1	M1,K0
	4	LV3A175-001A	DISC ARM R		1	M1,K0
	5	LV23057-001A	SLIDER R		1	M1,K0
	6	LV3A178-001A	TRIGGER SLIDER		1	M1,K0
	7	LV23058-001A	SLIDER L		1	M1,K0
	8	LV3A179-002A	TRIGGER ARM		1	M1,K0
	9	LV3A173-001A	JOINT LEVER		1	M1,K0
	10	LV23055-003A	ROLLER LEVER		1	M1,K0
	12	LV3A181-002A	TRANSFER ARM		1	M1,K0
	13	LV45797-002A	SL LOCK CAM		1	M1,K0
	14	LV3A182-003A	SL LOCK ARM		1	M1,K0
	15	LV3A183-001A	PICK LOCK ARM		1	M1,K0
	18	LV3A187-002A	HELICAL GEAR 1		1	M1,K0
	19	LV3A188-001A	TRANSFER GEAR		1	M1,K0
	20	LV3A189-001A	LOAD GEAR H		1	M1,K0
	21	LV3A190-001A	DRIVE GEAR		1	M1,K0
	22	LV3A191-001A	JOINT GEAR		1	M1,K0
	23	LV3A192-001A	WORM GEAR 2		1	M1,K0
	24	LV3A193-001A	HELICAL GEAR 2		1	M1,K0
	25	LV3A194-001A	LOAD GEAR V		1	M1,K0
	26	LV3A195-001A	PICK GEAR 1		1	M1,K0
	27	LV3A196-001A	PICK GEAR 2		1	M1,K0
	28	LV3A197-001A	RACK GEAR		1	M1,K0
	32	LV45796-001A	R.RETAINER L		1	M1,K0
	33	D3K-0002-00	DAMPER		2	M1,K0
	38	LV45809-001A	FLOAT SPRING(F)		2	M1,K0
	39	LV45810-001A	TRIGGER SPRING		1	M1,K0
	40	LV45811-001A	LOAD SPRING		1	M1,K0
	41	LV45812-001A	ROLLER SPRING		1	M1,K0
	42	LV45813-002A	CLAMP SPRING		1	M1,K0
	43	LV45814-001A	PICK SPRING		1	M1,K0
	44	LV36813-201A	SUB GUIDE CAP		1	M1,K0
	46	LV44555-001A	MAIN SHAFT		1	M1,K0
	49	LV11881-002A	GEAR HOLDER		1	M1,K0
	50	LV11880-003A	DISC GUIDE		1	M1,K0
	54	CM-FC2-R	ROLLER ASSY		1	M1,K0
	55	D10-7176-03	ARM		1	M1,K0
	56	G01-4809-04	EXTEN.SPRING		1	M1,K0
	57	D3K-0003-00	DAMPER		1	M1,K0
	58	LV45835-001A	FLOAT SPRING(R)		2	M1,K0
	60	LV3A271-001A	CL BASE ASSY		1	M1,K0
	811	----------	CLAMP ARM	NO SERVICE PART	1	M1,K0
	816	----------	ROLLER GEAR	NO SERVICE PART	1	M1,K0
	817	----------	WORM GEAR 1	NO SERVICE PART	1	M1,K0
	829	----------	ROLLER	NO SERVICE PART	2	M1,K0
	830	----------	ROLLER SHAFT	NO SERVICE PART	1	M1,K0
	831	----------	R.RETAINER R	NO SERVICE PART	1	M1,K0
	834	----------	SIN TWIST WIRE	NO SERVICE PART	1	M1,K0
	835	----------	SIN TWIST WIRE	NO SERVICE PART	1	M1,K0
	836	----------	SIN TWIST WIRE	NO SERVICE PART	2	M1,K0
	845	----------	HC TURN TABLE	NO SERVICE PART	1	M1,K0
	847	----------	CLAMPER	NO SERVICE PART	1	M1,K0
	848	----------	WIRE HOLDER	NO SERVICE PART	1	M1,K0
	851	----------	MD CHASSIS ASSY	NO SERVICE PART	1	M1,K0
	852	----------	SPINDLE MOTOR	NO SERVICE PART	1	M1,K0
	853	----------	CD MECHA PWB ASSY	NO SERVICE PART	1	M1,K0
	859	----------	MOTOR	NO SERVICE PART	1	M1,K0

EXPLODED VIEW (CD MECHANISM: XJJ-0390-00)

Block No.MCMM

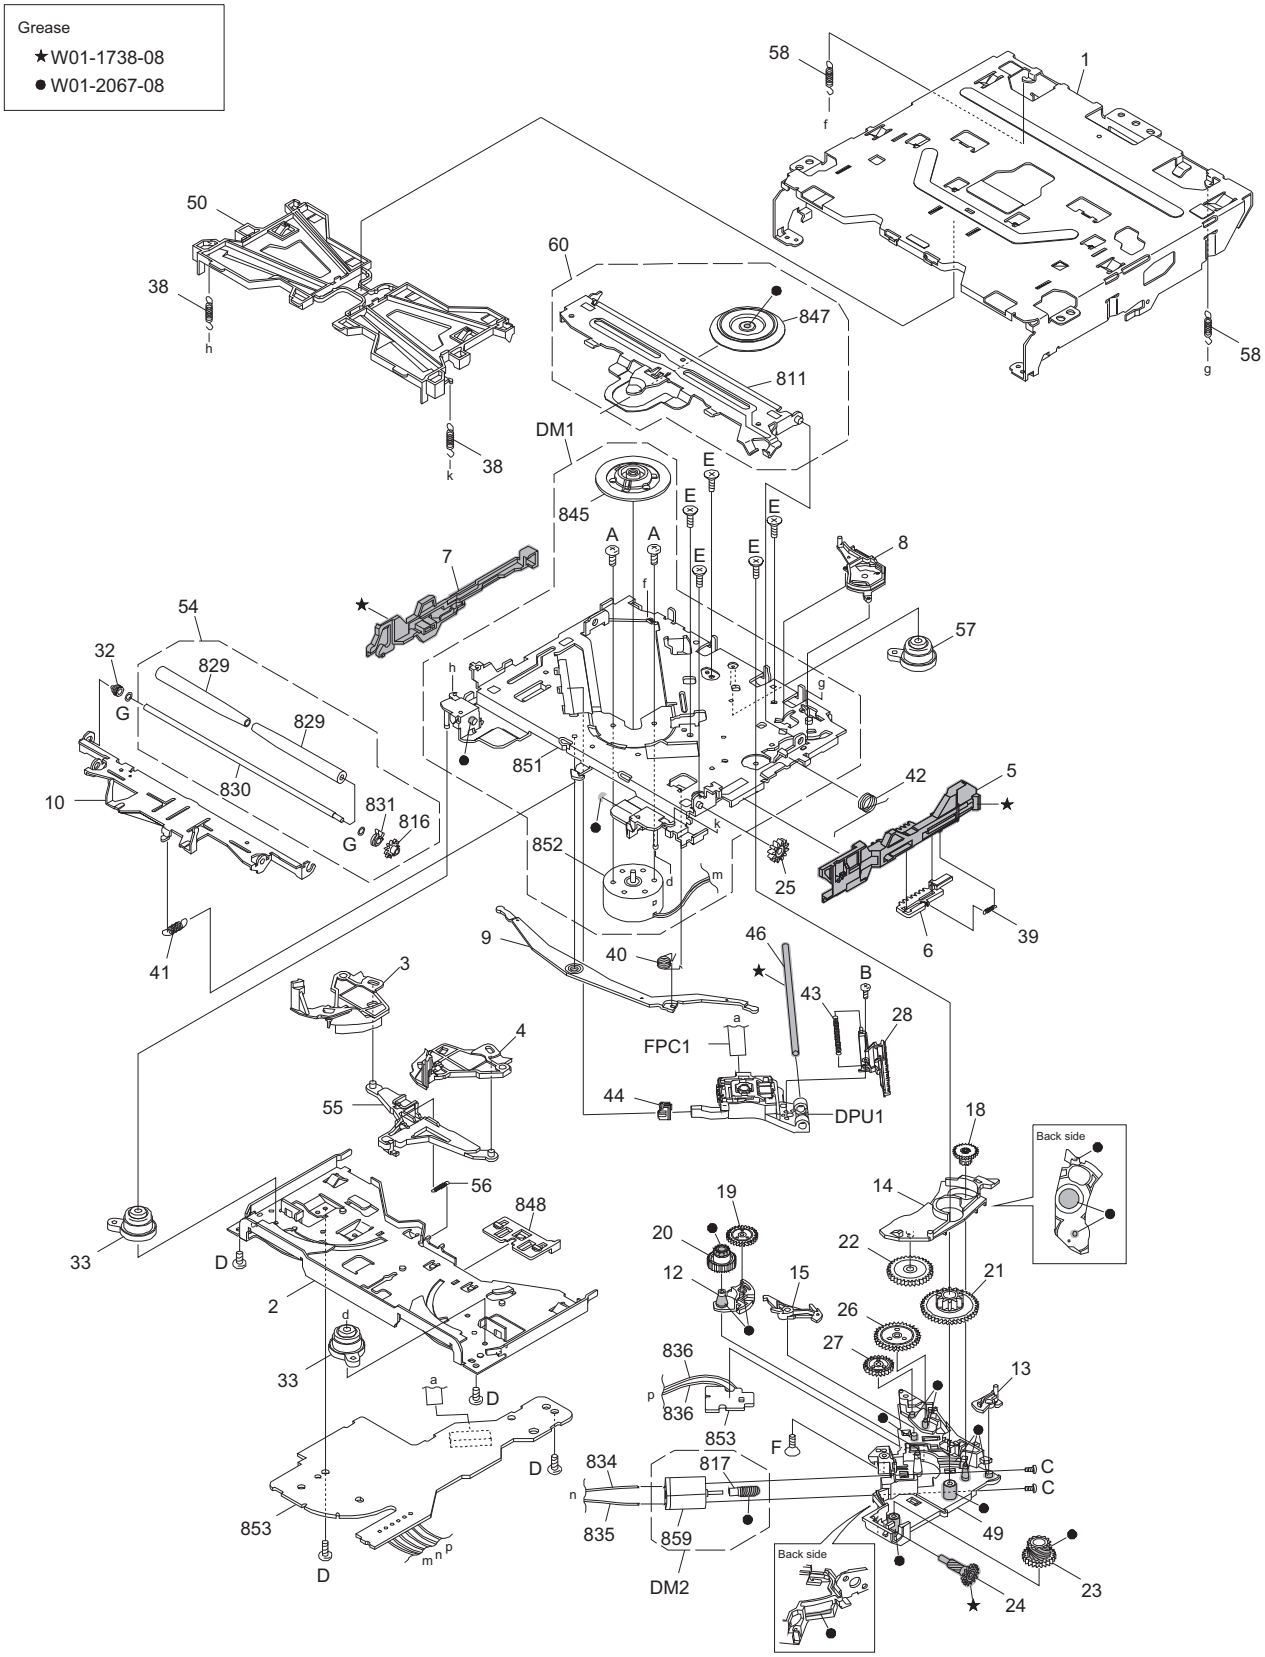

Parts with the exploded numbers larger than 800 are not supplied.

No.WA285

created date:2017-09-08

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: XJJ-0390-00) <MCMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	E2,E4,E3,E1
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	E2,E4,E3,E1
	DPU1	T2F-0002-00	CD OPT PICKUP		1	E2,E4,E3,E1
	FPC1	QAL1465-001	FPC		1	E2,E4,E3,E1
	A	LV45568-001A	MINI SCREW		2	E2,E4,E3,E1
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	E2,E4,E3,E1
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	E2,E4,E3,E1
	D	VKZ4539-054	MINI SCREW		4	E2,E4,E3,E1
	E	LV45818-001A	G.HOLDER SCREW		5	E2,E4,E3,E1
	F	LV45815-001A	M. SHAFT SCREW		1	E2,E4,E3,E1
	G	LV45816-001A	ROLLER WASHER		2	E2,E4,E3,E1
	1	LV11877-003A	OUTER CHASSIS		1	E2,E4,E3,E1
	2	LV11878-004A	LOWER CHASSIS		1	E2,E4,E3,E1
	3	LV3A174-002A	DISC ARM L		1	E2,E4,E3,E1
	4	LV3A175-001A	DISC ARM R		1	E2,E4,E3,E1
	5	LV23057-001A	SLIDER R		1	E2,E4,E3,E1
	6	LV3A178-001A	TRIGGER SLIDER		1	E2,E4,E3,E1
	7	LV23058-001A	SLIDER L		1	E2,E4,E3,E1
	8	LV3A179-002A	TRIGGER ARM		1	E2,E4,E3,E1
	9	LV3A173-001A	JOINT LEVER		1	E2,E4,E3,E1
	10	LV23055-003A	ROLLER LEVER		1	E2,E4,E3,E1
	12	LV3A181-002A	TRANSFER ARM		1	E2,E4,E3,E1
	13	LV45797-002A	SL LOCK CAM		1	E2,E4,E3,E1
	14	LV3A182-003A	SL LOCK ARM		1	E2,E4,E3,E1
	15	LV3A183-001A	PICK LOCK ARM		1	E2,E4,E3,E1
	18	LV3A187-002A	HELICAL GEAR 1		1	E2,E4,E3,E1
	19	LV3A188-001A	TRANSFER GEAR		1	E2,E4,E3,E1
	20	LV3A189-001A	LOAD GEAR H		1	E2,E4,E3,E1
	21	LV3A190-001A	DRIVE GEAR		1	E2,E4,E3,E1
	22	LV3A191-001A	JOINT GEAR		1	E2,E4,E3,E1
	23	LV3A192-001A	WORM GEAR 2		1	E2,E4,E3,E1
	24	LV3A193-001A	HELICAL GEAR 2		1	E2,E4,E3,E1
	25	LV3A194-001A	LOAD GEAR V		1	E2,E4,E3,E1
	26	LV3A195-001A	PICK GEAR 1		1	E2,E4,E3,E1
	27	LV3A196-001A	PICK GEAR 2		1	E2,E4,E3,E1
	28	LV3A197-001A	RACK GEAR		1	E2,E4,E3,E1
	32	LV45796-001A	R.RETAINER L		1	E2,E4,E3,E1
	33	D3K-0002-00	DAMPER		2	E2,E4,E3,E1
	38	LV45809-001A	FLOAT SPRING(F)		2	E2,E4,E3,E1
	39	LV45810-001A	TRIGGER SPRING		1	E2,E4,E3,E1
	40	LV45811-001A	LOAD SPRING		1	E2,E4,E3,E1
	41	LV45812-001A	ROLLER SPRING		1	E2,E4,E3,E1
	42	LV45813-002A	CLAMP SPRING		1	E2,E4,E3,E1
	43	LV45814-001A	PICK SPRING		1	E2,E4,E3,E1
	44	LV36813-201A	SUB GUIDE CAP		1	E2,E4,E3,E1
	46	D2B-0037-00	SHAFT		1	E2,E4,E3,E1
	49	LV11881-002A	GEAR HOLDER		1	E2,E4,E3,E1
	50	LV11880-003A	DISC GUIDE		1	E2,E4,E3,E1
	54	CM-FC2-R	ROLLER ASSY		1	E2,E4,E3,E1
	55	D10-7176-03	ARM		1	E2,E4,E3,E1
	56	G01-4809-04	EXTEN.SPRING		1	E2,E4,E3,E1
	57	D3K-0003-00	DAMPER		1	E2,E4,E3,E1
	58	LV45835-001A	FLOAT SPRING(R)		2	E2,E4,E3,E1
	60	LV3A271-001A	CL BASE ASSY		1	E2,E4,E3,E1
	811	----------	CLAMP ARM	NO SERVICE PART	1	E2,E4,E3,E1
	816	----------	ROLLER GEAR	NO SERVICE PART	1	E2,E4,E3,E1
	817	----------	WORM GEAR 1	NO SERVICE PART	1	E2,E4,E3,E1
	829	----------	ROLLER	NO SERVICE PART	2	E2,E4,E3,E1
	830	----------	ROLLER SHAFT	NO SERVICE PART	1	E2,E4,E3,E1
	831	----------	R.RETAINER R	NO SERVICE PART	1	E2,E4,E3,E1
	834	----------	SIN TWIST WIRE	NO SERVICE PART	1	E2,E4,E3,E1
	835	----------	SIN TWIST WIRE	NO SERVICE PART	1	E2,E4,E3,E1
	836	----------	SIN TWIST WIRE	NO SERVICE PART	2	E2,E4,E3,E1
	845	----------	HC TURN TABLE	NO SERVICE PART	1	E2,E4,E3,E1
	847	----------	CLAMPER	NO SERVICE PART	1	E2,E4,E3,E1
	848	----------	WIRE HOLDER	NO SERVICE PART	1	E2,E4,E3,E1
	851	----------	MD CHASSIS ASSY	NO SERVICE PART	1	E2,E4,E3,E1
	852	----------	SPINDLE MOTOR	NO SERVICE PART	1	E2,E4,E3,E1
	853	----------	CD MECHA PWB ASSY	NO SERVICE PART	1	E2,E4,E3,E1
	859	----------	MOTOR	NO SERVICE PART	1	E2,E4,E3,E1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-210x-0x) <XJ1>						
	IC161	TDA7718C	ANALOG IC		1	
⚠	IC301	JCV8034	ANALOG IC		1	
⚠	IC540	MN6627553APA	ANALOG IC		1	
⚠	IC601	TEF6657HN-X	IC		1	
⚠	IC701	S726A0D216FP	MCU IC		1	
⚠	IC821	W3F-0309-00	ROM IC		1	M1,E2,E4,E3,E1
⚠	IC821	W3F-0309-00	ROM IC		1	K0
	IC831	BU4228F	ANALOG IC		1	
	IC841	S24C02DIK8002	ROM IC		1	
	IC851	BU1CTD3WG	MOS IC		1	
	IC861	MP9942AGJ	ANALOG IC		1	
	IC891	BD2242G-G	MOS IC		1	
⚠	IC901	LV5685PV-H	ANALOG IC		1	
	IC941	BU33TD3WG	MOS IC		1	
	Q250	KRC410E-P	DIGI TRANSISTOR		1	
	Q260	KRC410E-P	DIGI TRANSISTOR		1	
	Q270	KRA303E-P	DIGI TRANSISTOR		1	
	Q271	KTA2014P/Y/	TRANSISTOR		1	
	Q272	KRC403E-P	DIGI TRANSISTOR		1	
	Q273	KRA303E-P	DIGI TRANSISTOR		1	
	Q320	KRC410E-P	DIGI TRANSISTOR		1	E1,K0
	Q330	KRC410E-P	DIGI TRANSISTOR		1	E1,K0
	Q540	2SA2188/E/-X	TRANSISTOR		1	
	Q701	LTA014YEBFS8	DIGI TRANSISTOR		1	
	D100	RSB6.8SM	ZENER DIODE		1	
	D101	RSB6.8SM	ZENER DIODE		1	
	D270	BAW56-TP	DIODE ARRAY		1	
	D271	BAW56-TP	DIODE ARRAY		1	
	D273	1SS355VM	DIODE		1	
	D370	BAW56-TP	DIODE ARRAY		1	
	D390	SM5818PL	SCHOTTKY DIODE		1	
	D391	MBR0530	DIODE		1	
	D400	RB521SM-30	DIODE		1	
	D401	UDZV5.1B	ZENER DIODE		1	
	D601	UDZV5.6B	ZENER DIODE		1	
	D602	UDZV5.6B	ZENER DIODE		1	
	D861	SMD24PL	SCHOTTKY DIODE		1	
	D902	SK34A-L	SCHOTTKY DIODE		1	
	D903	SK34A-L	SCHOTTKY DIODE		1	
⚠	D991	GN3XB	DIODE		1	
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C101	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C102	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C161	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C162	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C163	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C167	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C168	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C169	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C170	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C171	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C177	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C251	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C261	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	
	C304	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C305	CC73HCH1H820J	C CAPACITOR	82pF 50V J	1	
	C312	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C316	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C321	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	E1,K0
	C331	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	E1,K0
	C368	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C369	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C392	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C540	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C544	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C545	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C546	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	
	C547	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C549	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C550	CK73HXR1A154K	C CAPACITOR	0.15uF 10V K	1	
	C552	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	
	C553	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C555	CK73HXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C556	CK73HXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C557	CK73GXR1C334K	C CAPACITOR	0.33uF 16V K	1	
	C558	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C559	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C560	CK73HXR1H681K	C CAPACITOR	680pF 50V K	1	
	C561	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C562	CK73HXR1E153K	C CAPACITOR	0.015uF 25V K	1	
	C563	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C564	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C565	CK73HBB1A823K	C CAPACITOR	0.082uF 10V K	1	
	C567	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C568	CK73GXR1C334K	C CAPACITOR	0.33uF 16V K	1	
	C570	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C571	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C572	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C576	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C577	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C578	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C579	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C583	CC73GCH1H821J	C CAPACITOR	820pF 50V J	1	
	C584	CC73GCH1H821J	C CAPACITOR	820pF 50V J	1	
	C588	CC73GCH1H681J	C CAPACITOR	680pF 50V J	1	
	C589	CC73GCH1H681J	C CAPACITOR	680pF 50V J	1	
	C601	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C602	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C604	CC73GCH1H152J	C CAPACITOR	1500pF 50V J	1	
	C605	CK73GXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C606	CC73HCH1H090D	C CAPACITOR	9pF 50V D	1	
⚠	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C608	CK73GXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C611	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C612	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C614	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	
	C616	CK73GXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C617	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C618	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C619	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C620	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C702	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C703	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C704	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C705	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C706	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C707	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C708	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C709	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C710	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C711	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C713	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C716	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C717	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C782	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C783	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C820	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C821	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C830	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	
	C831	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C832	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C840	CK73HXR1C473K	C CAPACITOR	0.047uF 16V K	1	
	C850	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C851	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C852	CE32BZ0J101M	E CAPACITOR	100uF 6.3V M	1	
	C860	CK73GXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C862	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C863	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C864	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C866	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C867	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C868	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C869	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C870	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C872	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C873	CK73GXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C874	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C875	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C891	CK73GXR1H471K	C CAPACITOR	470pF 50V K	1	
	C892	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C893	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C902	CE32BZ1C221M	E CAPACITOR	220uF 16V M	1	
	C903	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C904	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C905	CE32BZ1C221M	E CAPACITOR	220uF 16V M	1	
	C906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C907	CE32BZ0J101M	E CAPACITOR	100uF 6.3V M	1	
	C908	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C912	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C914	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C916	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C940	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C941	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C942	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C943	CK73GXR1H471K	C CAPACITOR	470pF 50V K	1	
	C990	CD040CY1C222M	E CAPACITOR	2200uF 16V M	1	
	C1000	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1010	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1011	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1012	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1013	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1014	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1015	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1016	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1017	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	M1,K0
	C1033	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1035	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1600	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	M1,E2,E4,E3,E1
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C2015	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C2023	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C2024	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C2025	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C2026	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C2027	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C2028	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C2029	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2031	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C2036	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2037	CK73GXR1H471K	C CAPACITOR	470pF 50V K	1	
	C2038	CK73GXR1H471K	C CAPACITOR	470pF 50V K	1	
	C2041	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2042	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R167	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R168	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R169	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R171	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R252	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R262	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R270	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R271	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	
	R304	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R320	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E1,K0
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E1,K0
	R323	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E1,K0
	R330	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E1,K0
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E1,K0
	R333	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E1,K0
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R402	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	M1,K0
	R403	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	E2,E4,E3,E1
	R421	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R541	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R542	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R544	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R546	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R548	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R551	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R554	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	
	R558	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R559	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R562	RK73GB2A823J	MG RESISTOR	82kΩ 1/10W J	1	
	R567	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R571	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R572	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R573	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R579	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R580	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R587	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R589	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R590	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R600	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	
	R603	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R604	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R605	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R701	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	
	R702	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R703	RK73HB1J162J	MG RESISTOR	1.6kΩ 1/16W J	1	
	R704	RK73HB1J162J	MG RESISTOR	1.6kΩ 1/16W J	1	
	R705	RK73HB1J162J	MG RESISTOR	1.6kΩ 1/16W J	1	
	R706	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R707	RK73HB1J162J	MG RESISTOR	1.6kΩ 1/16W J	1	
	R709	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R711	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R712	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R713	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R714	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R716	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R717	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R719	RK73HB1J911J	MG RESISTOR	910Ω 1/16W J	1	
	R720	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R721	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R722	RK73HB1J911J	MG RESISTOR	910Ω 1/16W J	1	
	R723	RK73GB2A274J	MG RESISTOR	270kΩ 1/10W J	1	
	R724	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R725	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R726	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R727	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R728	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R729	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R730	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R731	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R732	RK73HB1J394J	MG RESISTOR	390kΩ 1/16W J	1	E2,E4,E3,E1
	R732	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1	K0
	R733	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	M1
	R733	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	E2,E4,E3,E1
	R733	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0
	R734	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	1	M1
	R734	RK73HB1J394J	MG RESISTOR	390kΩ 1/16W J	1	E2,E4,E3,E1
	R735	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	M1
	R735	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	E2,E4,E3,E1
	R735	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K0
	R743	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R745	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R748	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R749	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R750	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R751	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R752	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R753	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R754	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R755	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R756	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R758	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R760	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R761	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R762	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R763	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R764	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R766	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R767	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R768	RK73GB2A680J	MG RESISTOR	68Ω 1/10W J	1	
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R821	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R822	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R830	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R840	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R841	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R861	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R864	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R865	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R867	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R868	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R890	RK73HH1J163D	MG RESISTOR	16kΩ 1/16W D	1	
	R892	RK73EB2E391J	MG RESISTOR	390Ω 1/4W J	1	
	R894	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R900	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R901	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R902	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R903	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R905	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R940	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	
	R1062	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1063	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1064	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R1065	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R1070	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R2035	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	RA580	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	
	RA701	RK74GB1J473J	NET RESISTOR	47kΩ 1/16W J	1	
	L540	LB73G0FK-001	CHIP FERRITE		1	
	L574	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	
	L602	LK73H0BUR47K	M.CHIP INDUCTOR		1	
	L603	LK73H0BUR10K	M.CHIP INDUCTOR		1	
	L604	LK73H0BU1R0K	M.CHIP INDUCTOR		1	
	L605	LK73H0BUR22K	M.CHIP INDUCTOR		1	
	L606	LK73H0BUR12K	M.CHIP INDUCTOR		1	
	L607	LK73H0BUR15K	M.CHIP INDUCTOR		1	
	L700	LB73H0AV-002	CHIP FERRITE		1	
	L701	LB73G0ED-002	CHIP FERRITE		1	M1,E2,E4,E3,E1
	L701	LB73G0BK-006	CHIP FERRITE		1	K0
	L709	LB73G0FK-001	CHIP FERRITE		1	
	L710	LB73G0FK-001	CHIP FERRITE		1	
	L777	LB73H0AV-002	CHIP FERRITE		1	
	L778	LB73H0AV-002	CHIP FERRITE		1	
	L820	LB73H0AV-002	CHIP FERRITE		1	
	L821	LB73H0AV-002	CHIP FERRITE		1	
	L822	LB73H0AV-002	CHIP FERRITE		1	
	L823	LB73H0AV-002	CHIP FERRITE		1	
	L824	LB73H0AV-002	CHIP FERRITE		1	
	L825	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	L826	LB73G0FP-001	CHIP FERRITE		1	M1,E2,E4,E3,E1
	L826	LB73G0CB-005	CHIP FERRITE		1	K0
	L827	LB73G0ED-002	CHIP FERRITE		1	M1,E2,E4,E3,E1
	L827	LB73G0BK-006	CHIP FERRITE		1	K0
	L860	LR79Z0JM100M	CHIP INDUCTOR		1	
	L861	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L990	L3D-0043-00	CHOKE COIL		1	
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	
	CN990	E5J-0139-00	R.RECEPTACLE		1	
⚠	F1	F53-0513-08	PATTERN FUSE	4A	1	
⚠	F2	F53-0513-08	PATTERN FUSE	4A	1	
	J321	E6D-0014-00	PIN JACK		1	M1,E2,E4,E3
	J321	E6D-0015-00	PIN JACK		1	E1,K0
	J600	QNB0356-001	ANT TERMINAL		1	
	S830	S7A-0025-00	TACTILE PUSH SW		1	
	VA601	F0K-0265-00	SURGE ABSORBER		1	M1,E2,E4,E3,E1
	VA601	F0K-0040-00	SURGE ABSORBER		1	K0
	X540	L7J-0143-00	QUARTZ CRYSTAL		1	
	X600	L7J-0014-00	QUARTZ CRYSTAL		1	
	X701	L7J-0060-00	QUARTZ CRYSTAL		1	
SWITCH PWB ASSY (XJ6-111x-0x) <XJ6>						
	IC1	BU97520AKV-M	MOS IC		1	
	IC90	SIRD630B6T	IR DETECT UNIT		1	M1,K0
	Q1	KTC4075P/Y/	TRANSISTOR		1	
	Q51	KTC4075EP/Y/	TRANSISTOR		1	
	Q52	KTC4075P/Y/	TRANSISTOR		1	
	Q90	KRA302E-P	DIGI TRANSISTOR		1	M1,K0
	Q91	KRC402E-P	DIGI TRANSISTOR		1	M1,K0
	D1	UDZV5.6B	ZENER DIODE		1	
	D2	SM5818PL	SCHOTTKY DIODE		1	
	D20	SML-D12V8WT	LED		1	
	D21	LRT67DU1V211	LED		1	M1,E3,E1,K0
	D21	QSMTUBB5ZT3Y2	LED		1	E2
	D21	QSMTUGB5ZW7Y2	LED		1	E4
	D22	LRT67DU1V211	LED		1	M1,E3,E1,K0
	D22	QSMTUBB5ZT3Y2	LED		1	E2
	D22	QSMTUGB5ZW7Y2	LED		1	E4
	D23	LRT67DU1V211	LED		1	M1,E3,E1,K0
	D23	QSMTUBB5ZT3Y2	LED		1	E2
	D23	QSMTUGB5ZW7Y2	LED		1	E4
	D24	QSMTUGB5ZW7Y2	LED		1	E4
	D25	SML-D12V8WT	LED		1	M1,E3,E1,K0
	D25	QSMR-C13SBCMN	LED		1	E2
	D26	SML-D12V8WT	LED		1	M1,E3,E1,K0
	D26	QSMR-C13SBCMN	LED		1	E2
	D46	NHSW157B	LED		1	
	D48	NHSW157B	LED		1	
	D80	UDZV5.1B	ZENER DIODE		1	
	D81	UDZV5.1B	ZENER DIODE		1	
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C4	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-1030U	M1	KDC-120UB	E2	KDC-120UG	E4	KDC-120UR	E3
KDC-152R	E1	KDC-MP172U	K0				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C82	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	M1,K0
	R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R21	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R22	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R23	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R24	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	M1,E3,E1,K0
	R24	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	E2,E4
	R25	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	E4
	R26	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	M1,E3,E1,K0
	R26	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	E2
	R48	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	
	R50	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R51	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	CN1	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	
	FL80	L7K-0030-00	FILTER		1	
	J60	QNS0320-001	3.5 JACK		1	
	J80	E5J-0069-00	USB TERMINAL		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	
CD MECHA PWB ASSY (LVA20106-01A) <LVA>						
	IC1	BD8266EFV-M	ANALOG IC		1	M1,K0
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	M1,K0
	C54	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	M1,K0
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	M1,K0
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	M1,K0
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	M1,K0
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	M1,K0
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	M1,K0
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	M1,K0
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	M1,K0
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	M1,K0
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	M1,K0
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	M1,K0
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	M1,K0
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	M1,K0
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	M1,K0
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	M1,K0
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	M1,K0
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	M1,K0
	CN1	EC720AE-1024B	FFC FPC CONNE		1	M1,K0
	CN2	EC720AK-0515A	FFC FPC CONNE		1	M1,K0
	SW1	NSW0291-001X	DETECT SWITCH		1	M1,K0
	SW2	NSW0291-001X	DETECT SWITCH		1	M1,K0
	SW3	S6J-0002-00	PUSH SWITCH		1	M1,K0
CD MECHA PWB ASSY (XJD-0010-00) <XJD>						
	IC1	BD8266EFV-M	ANALOG IC		1	E2,E4,E3,E1
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E2,E4,E3,E1
	C54	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	E2,E4,E3,E1
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E2,E4,E3,E1
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	E2,E4,E3,E1
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	E2,E4,E3,E1
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	E2,E4,E3,E1
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	E2,E4,E3,E1
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	E2,E4,E3,E1
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E2,E4,E3,E1
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E2,E4,E3,E1
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E2,E4,E3,E1
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E2,E4,E3,E1
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E2,E4,E3,E1
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E2,E4,E3,E1
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	E2,E4,E3,E1
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	E2,E4,E3,E1
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	E2,E4,E3,E1
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	E2,E4,E3,E1
	CN1	EC720AE-1024B	FFC FPC CONNE		1	E2,E4,E3,E1
	CN2	EC720AK-0515A	FFC FPC CONNE		1	E2,E4,E3,E1
	S1	S6J-0001-00	PUSH SWITCH		1	E2,E4,E3,E1
	S2	S6J-0001-00	PUSH SWITCH		1	E2,E4,E3,E1
	S3	S6J-0002-00	PUSH SWITCH		1	E2,E4,E3,E1