9. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to ▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*

9.1 PACKING

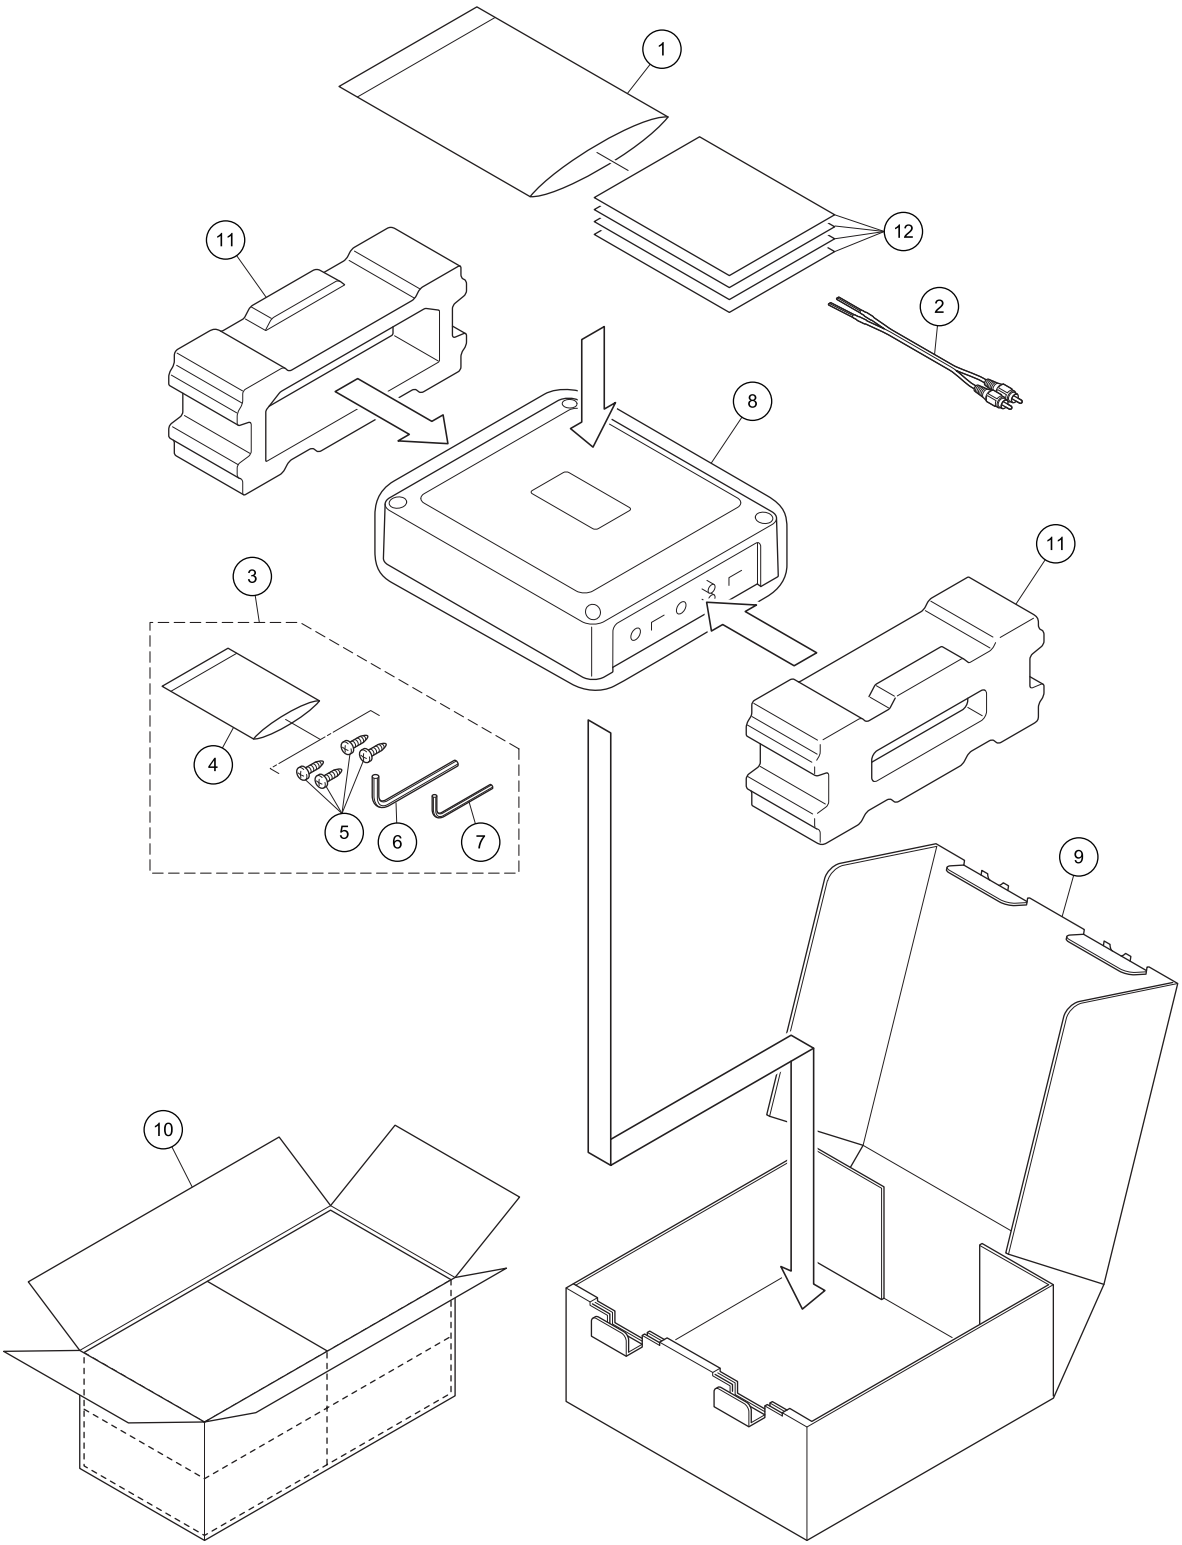

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Polyethylene Bag	CEG1116
	2	Cord Assy	YDE5010
	3	Screw Assy	YEA5035
*	4	Polyethylene Sheet	CNM4338
	5	Screw	YBA5003
	6	Shaft	YLP5003
	7	Shaft	YLP5004
	8	Polyethylene Bag	See Contrast table(2)
	9	Unit Box	See Contrast table(2)
	10	Contain Box	See Contrast table(2)
	11	Protector	YHP5036
	12-1	Owner's Manual	See Contrast table(2)
	12-2	Owner's Manual	See Contrast table(2)
*	12-3	Card	See Contrast table(2)
*	12-4	Warranty Card	See Contrast table(2)

(2) CONTRAST TABLE

GM-D7400M/XS/UC, GM-D7400M/XS/EW5, GM-D7400M/XS/ES and GM-D7400M/XU/CN5 are constructed the same except for the following:

Mark	No.	Description	D7400M/XS/UC	D7400M/XS/EW5	D7400M/XS/ES	D7400M/XU/CN5
	8	Polyethylene Bag	YEG5004	YEG5003	YEG5003	YEG5003
	9	Unit Box	YHG5172	YHG5171	YHG5170	YHG5169
	10	Contain Box	YHL5174	YHL5173	YHL5172	YHL5171
	12-1	Owner's Manual	YRD5160	YRD5159	YRD5157	YRB5070
	12-2	Owner's Manual	Not used	Not used	YRD5158	Not used
*	12-3	Card	ARY1048	Not used	Not used	Not used
*	12-4	Warranty Card	Not used	CRY1265	Not used	ARY7046

Owner's Manual,Installation Manual

Part No.	Language
YRD5160	English, French, Spanish
YRD5159	English, Spanish, German, French, Italian, Dutch, Russian
YRD5157	English, Spanish
YRD5158	Portuguese(B), Arabic
YRB5070	Traditional Chinese

9.2 EXTERIOR

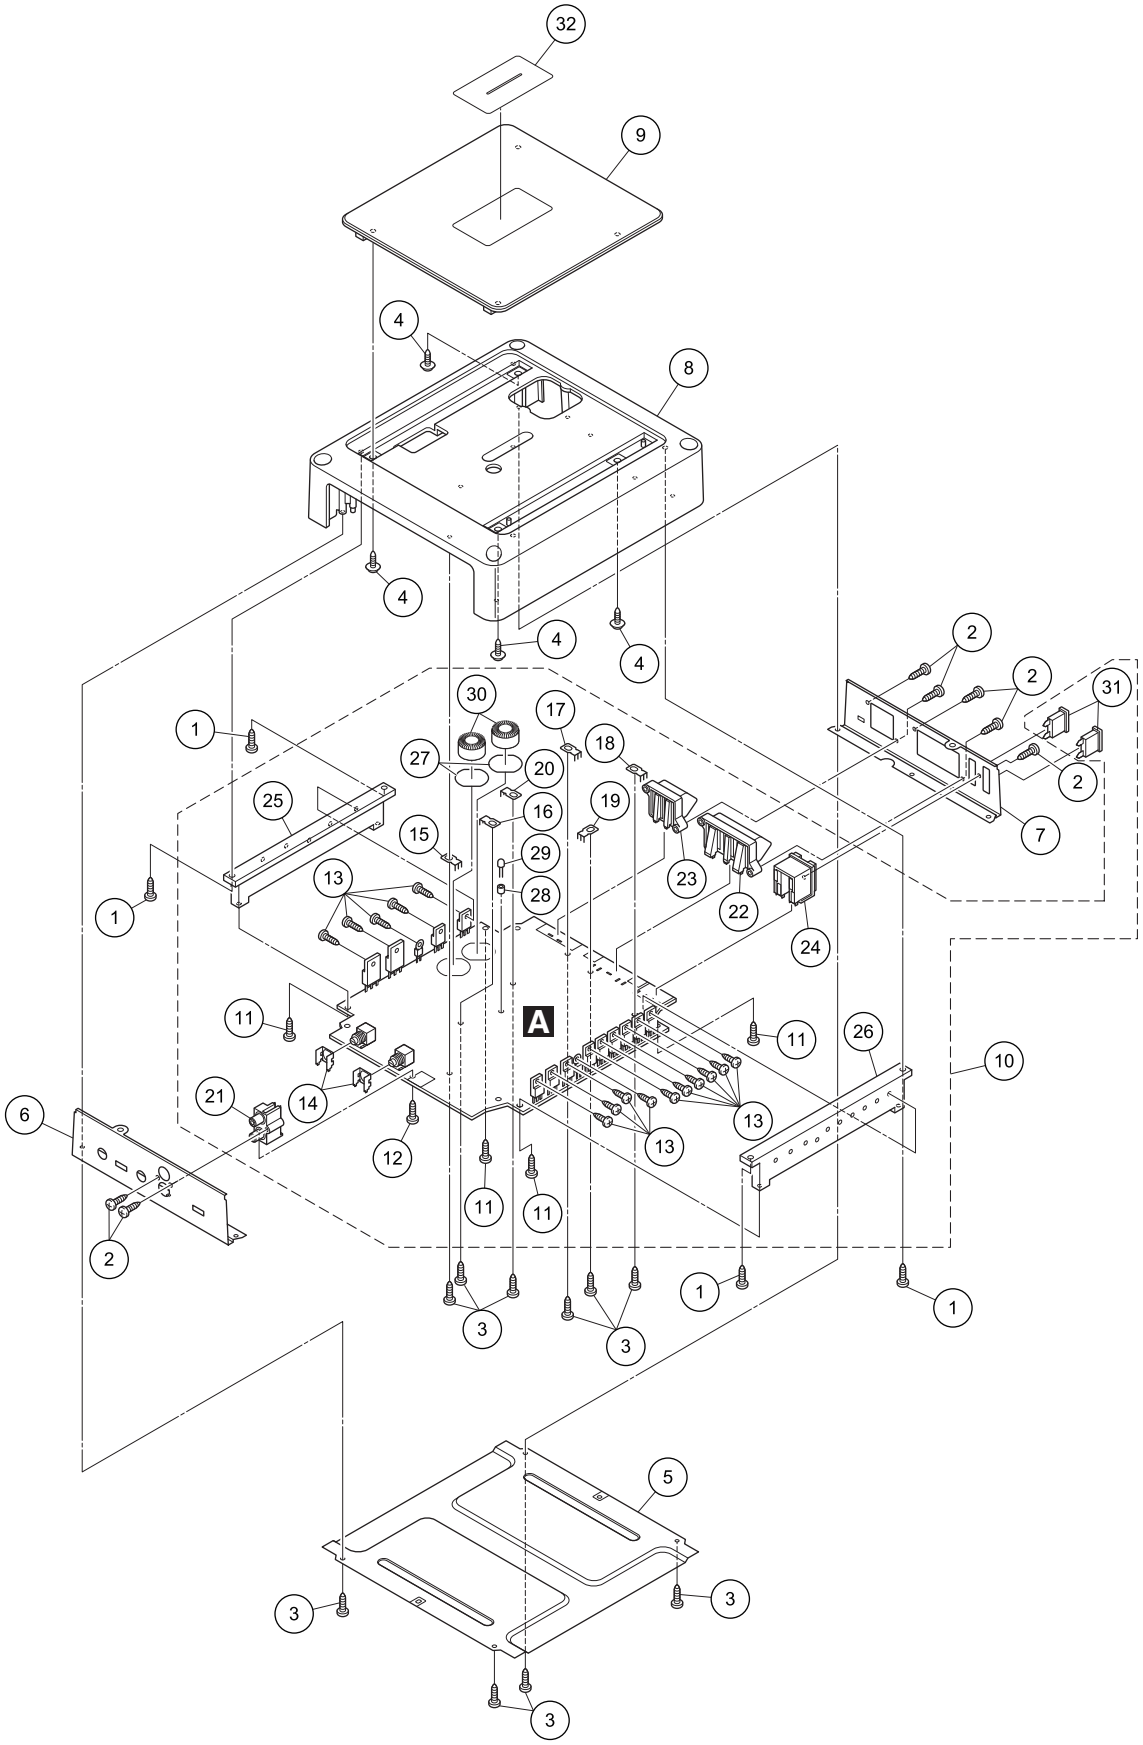
32
9
4
8
4
4
4
2
2
31
2
7
1
30
17
18
27
20
25
16
19
15
29
23
13
28
22
24
1
A
11
11
26
10
21
14
13
6
12
13
11
11
2
3
3
1
1
5
3
3
3

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BBZ30P100FTB
	2	Screw	BPZ30P100FTB
	3	Screw(M3 x 8)	CBA2011
	4	Screw	IBZ30P100FTC
	5	Case	YNB5035
	6	Panel	YNB5038
	7	Panel	See Contrast table(2)
	8	Heat Sink	YNR5098
	9	Cover	YNR5100
	10	Amp Unit	See Contrast table(2)
	11	Screw	BBZ30P080FSN
	12	Screw	BPZ30P100FSN
	13	Screw(M3 x 8)	CBA2011
	14	Holder	CND2466
	15	Terminal(CN103)	VNF1084
	16	Terminal(CN301)	VNF1084
	17	Terminal(CN302)	VNF1084
	18	Terminal(CN602)	VNF1084
	19	Terminal(CN605)	VNF1084
	20	Terminal(CN606)	VNF1084
	21	RCA Pin Jack(CN101)	YKB5009
	22	Terminal(CN601)	YKE5015
	23	Terminal(CN303)	YKE5016
	24	Fuse Holder(CN603)	YKR5002
	25	Sub Heat Sink	YNR5105
	26	Sub Heat Sink	YNR5106
	27	Insulator	YNM5045
	28	Spacer	YNS5118
	29	LED(D606)	NSPB346BS-5859
	30	Choke Coil(L602, L603)	CTH1362
⚠	31	Fuse(25 A)	CEK1329
*	32	Badge	YAH5041

(2) CONTRAST TABLE

GM-D7400M/XS/UC, GM-D7400M/XS/EW5, GM-D7400M/XS/ES and GM-D7400M/XU/CN5 are constructed the same except for the following:

Mark	No.	Description	D7400M/XS/UC	D7400M/XS/EW5	D7400M/XS/ES	D7400M/XU/CN5
	7	Panel	YNB5041	YNB5039	YNB5039	YNB5039
	10	Amp Unit	YWH5028	YWH5026	YWH5026	YWH5026

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

Chip Resistor

RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Circuit Symbol and No. **Part No.**

Unit Number : YWH5028(UC)

Unit Number : YWH5026(ES,EW5,CN5)

Unit Name : Amp Unit

A

Unit Number : YWH5028(UC)

Unit Number : YWH5026(ES,EW5,CN5)

Unit Name : Amp Unit

MISCELLANEOUS

IC 101	(B,33,48) IC	NJM2068MD
IC 102	(B,48,53) IC	NJM2068MD
IC 103	(B,21,86) IC	NJM4558MD
IC 104	(B,28,106) IC	NJM4558MD
IC 105	(B,29,128) IC	NJM4558MD
IC 301	(B,31,87) IC	NJM311M
IC 302	(B,40,106) IC	NJM311M
IC 303	(B,42,78) IC	TC74AC14F
IC 305	(B,64,98) IC	TND505MD
IC 601	(A,84,77) IC	PA2027A
IC 602	(B,97,47) IC	UPC494GS
IC 603	(A,59,37) IC	TA78L005AP
Q 301	(B,44,90) Transistor	IMT4
Q 302	(B,45,157) Transistor	2SC5565
Q 303	(B,45,148) Transistor	2SA2012
Q 304	(B,39,148) Transistor	2SC5565
Q 305	(B,39,157) Transistor	2SA2012
Q 306	(A,84,187) FET	FKP250A
Q 307	(A,60,187) FET	FKP250A
Q 601	(B,97,76) Transistor	2SC4081
Q 602	(B,94,74) Chip Transistor	2SA1576A
Q 603	(B,91,66) Chip Transistor	DTA114EUA
Q 604	(B,87,62) Chip Transistor	DTC114TUA
Q 605	(A,70,66) Transistor	2SB1243
Q 606	(B,103,54) Transistor	2SC4081
Q 607	(B,106,54) Chip Transistor	DTC114TUA
Q 608	(B,112,38) Transistor	2SD1766

Circuit Symbol and No. **Part No.**

Q 609	(B,101,31) Transistor	2SB1188
Q 610	(B,112,31) Transistor	2SB1188
Q 611	(B,101,38) Transistor	2SD1766
Q 612	(A,161,6) Transistor	FKV550N
Q 613	(A,123,6) Transistor	FKV550N
Q 614	(A,148,6) Transistor	FKV550N
Q 615	(A,111,6) Transistor	FKV550N
Q 616	(A,136,6) Transistor	FKV550N
Q 617	(A,98,6) Transistor	FKV550N
Q 620	(A,46,5) Transistor	2SD2395
Q 621	(A,61,5) Transistor	2SB1566
Q 622	(A,76,5) Transistor	2SD2395
Q 691	(B,26,31) Chip Transistor	DTC124EUA
Q 901	(B,26,169) Transistor	2SA1579
Q 902	(B,9,162) Transistor	2SC4102
Q 903	(B,12,162) Transistor	2SC4102
Q 904	(B,9,156) Transistor	2SA1579
Q 905	(B,12,156) Transistor	2SA1579
Q 911	(B,19,160) Transistor	2SC4102
Q 912	(B,26,158) Chip Transistor	2SA1576A
Q 921	(B,192,160) Transistor	2SC4081
Q 922	(B,196,156) Transistor	2SC4081
Q 923	(B,192,156) Chip Transistor	2SA1576A
Q 931	(B,54,90) Transistor	2SA1579
Q 932	(B,51,95) Transistor	2SC4081
Q 933	(B,57,91) Chip Transistor	DTC114YUA
Q 941	(B,77,51) Transistor	2SC4081
Q 942	(B,77,56) Chip Digital Transistor	DTA124EUA
D 101	(B,11,64) Diode	1SR154-400
D 102	(B,20,64) Diode	1SR154-400
D 301	(B,37,137) Diode	MA111
D 302	(B,40,137) Diode	MA111
D 303	(B,44,70) Diode	MA111
D 304	(B,47,70) Diode	MA111
D 305	(B,51,77) Diode	MA111
D 309	(B,75,99) Diode	RF101L2S
D 601	(A,183,64) Diode	RM4Z-LFJ4
D 602	(B,97,82) Diode	UDZS7R5(B)
D 603	(B,91,78) Diode	1SR154-400
D 604	(B,87,73) Diode	1SR154-400
D 605	(B,62,77) Diode	MA111

Circuit Symbol and No.		Part No.
D 606	(A,105,96) LED	NSPB346BS-5859
D 607	(B,109,53) Diode	MA111
D 608	(B,103,66) Diode	DAN202U
D 609	(B,96,66) Diode	DAN202U
D 610	(A,137,186) Diode	FML22S
D 611	(A,164,186) Diode	FML22R
D 612	(B,43,24) Diode	UDZS16(B)
D 613	(B,62,24) Diode	UDZS16(B)
D 614	(B,54,34) Diode	MA111
D 615	(B,80,24) Diode	UDZS13(B)
D 691	(B,21,31) Diode	DAN202U
D 901	(B,32,165) Diode	MA111
D 911	(B,32,159) Diode	MA111
D 921	(B,201,160) Diode	MA111
D 922	(B,188,155) Diode	MA111
D 941	(B,67,53) Diode	MA111
ZNR101	(B,8,70) Surge Protector	CSA30-201N
ZNR102	(B,17,70) Surge Protector	CSA30-201N
L 301	(A,70,150) Choke Coil 93.75 µH	YTH5009
L 601	(A,167,57) Choke Coil 50 µH	YTH5010
L 602	(A,142,150) Choke Coil 320 µH	CTH1362
L 603	(A,169,150) Choke Coil 320 µH	CTH1362
T 601	(A,135,61) Transformer(ES,EW5,CN5)	YTT5009
TH601	(A,115,184) Thermistor	CCX1013
TH602	(A,88,7) Thermistor	CCX1013
TH603	(A,112,58) Thermistor	CCX1064
TH604	(A,50,136) Thermistor	CCX1064
S 101	(A,11,52) Slide Switch(RCA/SP)	CSH1042
S 102	(A,9,130) Switch(BASS BOOST)	CSH1029
S 601	(A,205,159) Slide Switch(BFC)	CSH1072
VR101	(A,17,109) Variable Resistor 20 kohm(C)	YCS5002
VR102	(A,17,148) Volume 10 kohm(A)	CCS1265
VR301	(A,39,125) Semi-fixed 10 kohm(OB)	CCP1506
⚠FU601	Fuse 25 A	CEK1329
⚠FU602	Fuse 25 A	CEK1329

RESISTORS

R 101	(A,23,37)	RD1/4PU683J
R 102	(A,23,47)	RD1/4PU683J
R 103	(B,27,37)	RS1/16S471J
R 104	(B,43,43)	RS1/16S471J
R 105	(B,35,39)	RS1/16S223J
R 106	(B,51,45)	RS1/16S223J
R 107	(B,29,47) 10 kohm	CCN1152
R 108	(B,43,52) 10 kohm	CCN1152
R 109	(B,37,48) 10 kohm	CCN1152
R 110	(B,52,53) 10 kohm	CCN1152
R 111	(B,29,51) 10 kohm	CCN1152
R 112	(B,43,57) 10 kohm	CCN1152
R 113	(B,32,55) 10 kohm	CCN1152
R 114	(B,47,60) 10 kohm	CCN1152
R 115	(B,35,55)	RS1/16S222J
R 116	(B,50,60)	RS1/16S222J
R 118	(B,15,103)	RS1/16S272J
R 119	(B,22,102)	RS1/16S272J
R 120	(B,26,99)	RS1/16S182J
R 121	(B,24,109)	RS1/16S101J
R 122	(B,14,145)	RS1/16S470J
R 123	(B,30,99)	RS1/16S182J
R 124	(B,26,113)	RS1/16S273J
R 125	(B,30,121)	RS1/16S222J
R 126	(B,30,113)	RS1/16S331J
R 127	(B,33,121)	RS1/16S472J
R 131	(B,17,128)	RS1/16S104J
R 132	(B,17,126)	RS1/16S122J
R 133	(B,17,124)	RS1/16S121J
R 301	(B,36,132)	RS1/16S223J
R 302	(B,42,132)	RS1/16S223J
R 303	(B,38,132)	RS1/16S203J
R 304	(B,40,132)	RS1/16S153J
R 305	(B,28,135)	RS1/16S332J
R 306	(B,31,135)	RS1/16S105J
R 307	(B,36,106)	RS1/16S102J
R 308	(B,41,99)	RS1/16S222J
R 309	(B,35,87)	RS1/16S223J
R 310	(B,32,80)	RS1/16S562J
R 311	(B,27,90)	RS1/16S273J
R 312	(A,36,95)	RD1/4PU332J
R 313	(B,35,99)	RS1/16S223J
R 314	(B,37,99)	RS1/16S104J
R 315	(B,40,113)	RS1/16S102J
R 316	(B,44,106)	RS1/16S562J
R 317	(B,42,71)	RS1/16S122J
R 318	(B,49,77)	RS1/16S122J
R 319	(B,39,85)	RS1/16S332J
R 320	(B,41,85)	RS1/16S332J
R 321	(B,41,93)	RS1/16S822J
R 322	(B,45,97)	RS1/16S822J
R 323	(A,78,97)	RD1/4PU1R0J
R 324	(A,45,166)	RD1/4PU1R0J
R 325	(A,42,166)	RD1/4PU1R0J
R 326	(B,50,163)	RS1/16S104J
R 327	(B,37,163)	RS1/16S104J
R 328	(A,107,171)	RS1/2PMF220J
R 330	(A,68,171)	RS1/2PMF220J
R 332	(A,79,171)	RS2PMF100J
R 333	(A,51,171)	RS2PMF100J
R 334	(A,107,156) 10 mohm	YCN5005
R 335	(A,91,146) 10 mohm	YCN5005
R 336	(A,58,129)	RS2PMF4R7J
R 339	(A,50,159)	RS1PMF333J
R 340	(A,24,147)	RS1/2PMF223J
R 341	(A,30,143)	RD1/4PU102J
R 342	(A,35,139)	RD1/4PU222J
R 601	(A,204,111)	RD1/4PU222J
R 602	(B,99,79)	RS1/16S473J
R 603	(B,93,81)	RS1/16S103J
R 604	(B,95,79)	RS1/16S103J
R 605	(B,97,72)	RS1/16S222J
R 606	(B,94,71)	RS1/16S472J
R 607	(B,74,83)	RS1/16S392J
R 608	(B,79,83)	RS1/16S392J
R 609	(B,82,83)	RS1/16S103J
R 610	(B,71,83)	RS1/16S472J
R 611	(A,67,61)	RD1/4PU221J
R 612	(A,73,61)	RD1/4PU152J
R 613	(B,88,66)	RS1/16S223J
R 614	(B,83,66)	RS1/16S223J
R 615	(B,81,66)	RS1/16S223J

Circuit Symbol and No.			Part No.
R 616	(A,63,74)		RD1/4PU472J
R 617	(A,60,69)		RD1/4PU101J
R 618	(A,106,71)		RD1/4PU392J
R 619	(A,101,77)		RD1/4PU471J
R 620	(A,104,84)		RD1/4PU471J
R 621	(B,100,54)	(ES,EW5,CN5)	RS1/16S105J
R 622	(B,99,54)		RS1/16S153J
R 623	(B,93,54)		RS1/16S242J
R 624	(B,92,54)		RS1/16S182J
R 625	(B,90,54)		RS1/16S273J
R 626	(B,101,62)		RS1/16S272J
R 627	(B,103,62)		RS1/16S272J
R 628	(B,94,62)		RS1/16S272J
R 629	(B,96,62)		RS1/16S272J
R 630	(B,97,40)		RS1/16S472J
R 631	(B,95,40)		RS1/16S472J
R 632	(B,93,37)		RS1/16S472J
R 633	(B,90,42)		RS1/16S683J
R 634	(B,92,39)		RS1/16S392J
R 635	(A,96,30)		RD1/4PU332J
R 636	(A,108,41)		RD1/4PU332J
R 637	(A,105,28)		RD1/4PU472J
R 638	(A,115,33)		RD1/4PU472J
R 639	(A,123,26)		RS1/2PMF121J
R 640	(A,161,26)		RS1/2PMF121J
R 641	(A,111,26)		RS1/2PMF121J
R 642	(A,148,26)		RS1/2PMF121J
R 643	(A,98,26)		RS1/2PMF121J
R 644	(A,136,26)		RS1/2PMF121J
R 647	(A,119,33)		RS1/2PMF220J
R 648	(A,136,35)		RS1/2PMF220J
R 649	(A,116,77)		RS1/2PMF220J
R 650	(A,149,88)		RS1/2PMF220J
R 651	(A,112,76)		RS1/2PMF220J
R 652	(A,40,30)		RS1/2PMF100J
R 653	(A,69,31)		RS1/2PMF100J
R 654	(A,45,18)		RD1/4PU222J
R 655	(A,67,18)		RD1/4PU222J
R 656	(A,87,32)		RS1PMF220J
R 657	(A,85,18)		RS1PMF333J
R 671	(B,84,43)		RS1/16S272J
R 691	(B,21,27)		RS1/16S683J
R 901	(B,27,162)		RS1/16S222J
R 902	(B,29,162)		RS1/16S104J
R 903	(B,6,160)		RS1/16S473J
R 904	(B,30,169)		RS1/16S104J
R 905	(B,30,166)		RS1/16S473J
R 906	(B,6,156)		RS1/16S472J
R 907	(B,15,158)		RS1/16S472J
R 908	(B,15,162)		RS1/16S473J
R 909	(B,15,154)		RS1/16S104J
R 911	(B,21,153)		RS1/16S102J
R 912	(B,22,158)		RS1/16S104J
R 913	(B,26,155)		RS1/16S103J
R 914	(B,29,158)		RS1/16S223J
R 915	(B,30,155)		RS1/16S103J
R 921	(A,177,162)		RD1/4PU473J
R 922	(B,186,155)		RS1/16S472J
R 923	(B,177,166)		RS1/16S104J
R 924	(B,196,160)		RS1/16S472J
R 925	(B,194,162)		RS1/16S472J
R 931	(B,54,86)		RS1/16S332J
R 932	(B,57,97)		RS1/16S103J
R 933	(B,50,87)		RS1/16S472J
R 934	(B,52,86)		RS1/16S822J
R 941	(B,80,54)		RS1/16S472J
R 942	(B,73,54)		RS1/16S102J
R 943	(B,71,54)		RS1/16S333J

CAPACITORS

C 101	(A,18,42)	CEAT100M50
C 102	(A,18,52)	CEAT100M50
C 103	(B,30,39)	CCSRCH471J50
C 104	(B,45,43)	CCSRCH471J50
C 105	(A,33,36)	CEAT100M50
C 106	(A,47,41)	CEAT100M50
C 107	(B,6,70)	CKSQYB102K50
C 108	(B,14,70)	CKSQYB102K50
C 109	(B,39,48)	CKSQYB223K50
C 110	(B,54,53)	CKSQYB223K50
C 111	(B,27,51)	CCSRCH271J50
C 112	(B,41,57)	CCSRCH271J50
C 113	(B,30,55)	CCSRCH271J50
C 114	(B,45,60)	CCSRCH271J50
C 115	(B,36,55)	CKSRYB103K50
C 116	(B,43,48)	CKSRYB103K50
C 117	(B,28,43)	CKSRYB103K50
C 118	(B,51,60)	CKSRYB103K50
C 121	(B,25,86)	CKSRYB103K50
C 122	(A,21,98)	CFTNA274J50
C 123	(A,17,98)	CFTLA154J50
C 124	(B,19,79)	CKSRYB103K50
C 125	(A,33,97)	CFTNA273J50
C 126	(A,18,119)	CEAT4R7M50
C 127	(B,28,113)	CKSQYB224K50
C 128	(B,35,121)	CKSRYB103K50
C 129	(B,34,128)	CKSRYB103K50
C 130	(B,25,128)	CKSRYB103K50
C 131	(B,24,102)	CKSRYB103K50
C 132	(B,31,113)	CKSRYB103K50
C 301	(A,20,138)	CEAT220M50
C 302	(B,32,135)	CKSRYB222K50
C 303	(B,30,80)	CCSRCH471J50
C 304	(B,28,80)	CKSRYB103K50
C 307	(B,33,94)	CKSRYB103K50
C 309	(B,42,99)	CKSRYB103K50
C 310	(B,39,99)	CCSRCH471J50
C 311	(B,33,80)	CKSRYB103K50
C 312	(B,39,71)	CKSRYB221K50
C 313	(B,42,113)	CKSRYB103K50
C 314	(B,49,81)	CKSRYB104K50
C 315	(B,51,81)	CKSRYB221K50
C 318	(A,71,102)	CEAT100M50
C 319	(A,55,96)	CEAT101M16
C 320	(B,66,104)	CKSYB475K25
C 321	(B,60,104)	CKSRYB104K50
C 322	(B,71,99)	CKSQYB104K50
C 323	(B,39,153)	CKSRYB474K16
C 324	(A,51,106)	CFTNA103J2A
C 325	(A,48,101)	CEAT100M2A

Circuit Symbol and No.		Part No.
C 326	(B,53,163)	CKSQYB472K50
C 327	(B,35,163)	CKSQYB472K50
C 328	(A,76,173)	CQMA102K2E
C 329	(A,54,173)	CQMA102K2E
C 334	(A,97,131) 4.7 µF	CCE1036
C 335	(A,62,118) 4.7 µF	CCE1036
C 338	(B,196,138) 2 200 pF	CCG1248
C 339	(B,203,121)	CKSQYB103K50
C 340	(B,201,121)	CKSQYB102K50
C 341	(B,24,144)	CKSRYB471K50
C 349	(B,45,153)	CKSRYB474K16
C 350	(A,99,151) 1 µF	CCE1035
C 351	(A,98,164) 1 µF	CCE1035
C 601	(B,192,76)	CKSQYB104K50
C 602	(B,194,76)	CKSQYB103K50
C 603	(B,197,76)	CKSQYB102K50
C 604	(B,167,44)	CKSRYB103K50
C 605	(B,204,85)	CKSQYB104K50
C 606	(B,202,85)	CKSQYB103K50
C 607	(B,200,85)	CKSQYB102K50
C 608	(B,97,79)	CKSRYB103K50
C 609	(B,84,85)	CKSRYB103K50
C 610	(A,80,81)	CEAT100M50
C 611	(A,74,81)	CEAT100M50
C 612	(A,86,81)	CEAT101M16
C 613	(B,88,83)	CKSRYB103K50
C 614	(B,86,66)	CKSRYB104K50
C 615	(B,66,73)	CKSRYB102K50
C 616	(A,62,66)	CEAT220M50
C 617	(B,84,66)	CKSRYB104K50
C 618	(A,78,66)	CEAT220M25
C 619	(A,66,81)	CEAT471M16
C 620	(B,101,96)	CKSRYB104K50
C 621	(B,97,54)	CKSRYB102K50
C 622	(B,95,54)	CKSRYB472K50
C 623	(A,87,50)	CEANP221M10
C 624	(B,100,62)	CKSRYB104K50
C 625	(B,105,62)	CKSRYB104K50
C 626	(B,93,62)	CKSRYB104K50
C 627	(B,98,62)	CKSRYB104K50
C 628	(B,90,46)	CKSRYB105K16
C 629	(B,103,47)	CKSRYB223K50
C 630	(A,105,44)	CEAT221M16
C 631	(A,87,44)	CFTLA103J50
C 632	(B,90,38)	CKSQYB224K16
C 633	(A,123,39)	CQMA472J50
C 634	(A,155,35)	CQMA472J50
C 635	(A,167,73) 3 900 µF/16 V	YCH5003(P35)
C 636	(A,185,73) 3 900 µF/16 V	YCH5003(P35)
C 637	(A,121,86)	CQMA102K2E
C 638	(A,134,90)	CQMA102K2E
C 639	(A,112,83)	CQMA102K2E
C 640	(A,156,110) 3 300 µF/50 V	CCH1813(P35)
C 641	(A,175,110) 3 300 µF/50 V	CCH1813(P35)
C 642	(A,156,129) 3 300 µF/50 V	CCH1813(P35)
C 643	(A,175,129) 3 300 µF/50 V	CCH1813(P35)
C 644	(B,156,114)	CKSRYB104K50
C 645	(B,182,113)	CKSRYB104K50
C 646	(B,156,125)	CKSRYB104K50
C 647	(B,182,125)	CKSRYB104K50

Circuit Symbol and No.		Part No.
C 648	(A,46,22)	CEAT100M50
C 649	(A,65,27)	CEAT100M50
C 650	(A,40,22)	CEAT470M25
C 651	(A,59,27)	CEAT470M25
C 652	(B,38,24)	CKSRYB103K50
C 653	(B,57,24)	CKSRYB103K50
C 654	(A,53,22)	CEAT470M25
C 655	(A,71,27)	CEAT470M25
C 656	(B,56,33)	CKSRYB103K50
C 657	(B,74,24)	CKSRYB103K50
C 658	(B,62,33)	CKSQYB334K50
C 659	(B,49,34)	CKSRYB104K50
C 660	(A,51,37)	CEAT100M50
C 671	(A,83,22)	CEAT100M50
C 672	(A,77,22)	CEAT470M25
C 674	(A,94,22)	CEAT470M25
C 675	(B,91,24)	CKSRYB473K50
C 691	(B,25,27)	CKSQYB105K25
C 901	(B,25,162)	CKSRYB103K50
C 902	(B,26,165)	CKSRYB103K50
C 903	(B,29,166)	CKSRYB104K50
C 911	(B,18,153)	CKSRYB103K50
C 912	(B,19,156)	CKSRYB102K50
C 913	(B,26,153)	CKSRYB104K50
C 914	(B,29,155)	CKSRYB104K50
C 921	(A,186,161)	CEANP221M10
C 931	(B,50,90)	CKSRYB473K50
C 941	(B,74,54)	CKSRYB474K16