



EXPLODED VIEW / PARTS LIST

Panel section

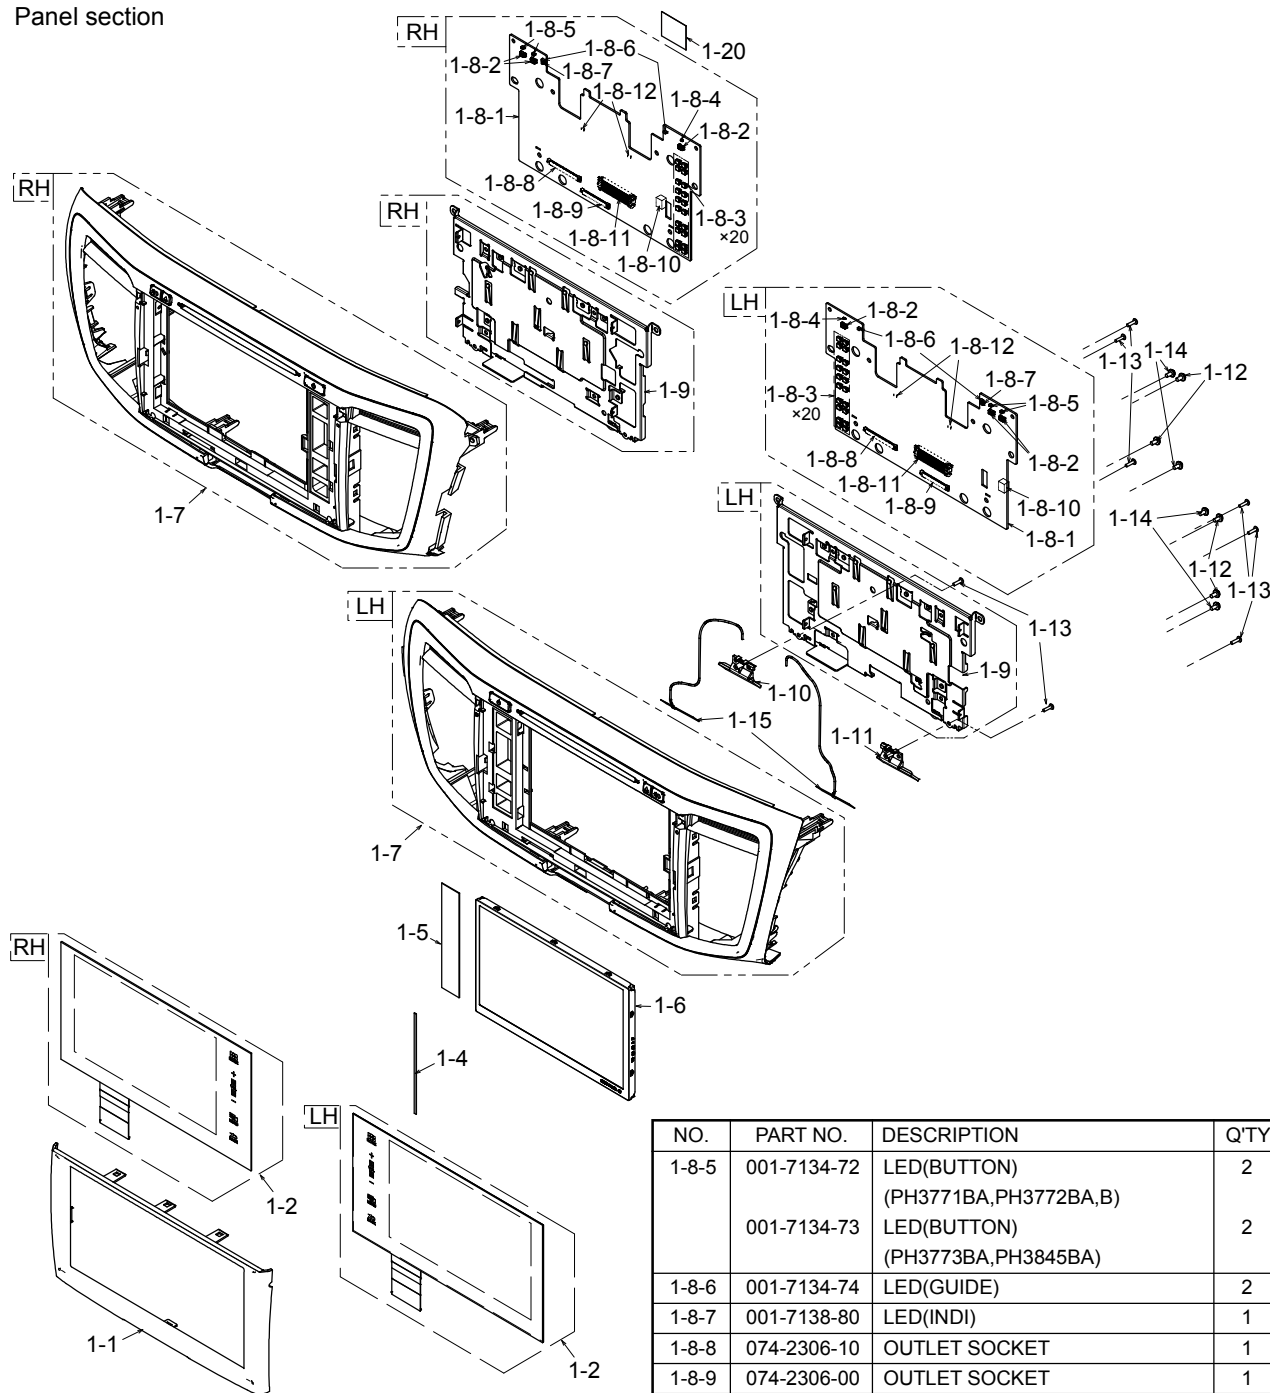

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	*Unused number	-
1-1	372-3255-00	FRONT CVR	1
1-2	948-8834-00	TOUCH PANEL-ASSY	1
1-3	-----	*Unused number	-
1-4	347-9500-00	CUSHION V	1
1-5	347-9549-00	ILLUMI SHEET	1
1-6	379-0506-00	TFT	1
1-7	940-8847-01	ES-ASSY(PH3771BA,PH3772BA,B)	1
	940-8847-11	ES-ASSY(PH3773BA,PH3845BA)	1
1-8	-----	*Unused number	-
1-8-1	-----	PANEL PWB(462000-039)	1
1-8-2	013-6312-50	SWITCH	3
1-8-3	001-7148-96	LED(ICON)	20
1-8-4	001-7115-92	DIODE(POWER)	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-8-5	001-7134-72	LED(BUTTON) (PH3771BA,PH3772BA,B)	2
	001-7134-73	LED(BUTTON) (PH3773BA,PH3845BA)	2
1-8-6	001-7134-74	LED(GUIDE)	2
1-8-7	001-7138-80	LED(INDI)	1
1-8-8	074-2306-10	OUTLET SOCKET	1
1-8-9	074-2306-00	OUTLET SOCKET	1
1-8-10	074-2305-59	OUTLET SOCKET	1
1-8-11	074-3072-90	OUTLET SOCKET	1
1-8-12	092-2203-00	ANT-RECEPT	2
1-9	331-5830-01	LCD-HOLDER(LH)	1
1-10	336-0104-00	ANT HOLDER L	1
1-11	336-0105-00	ANT HOLDER R	1
1-12	780-2604-50	IT SCREW	4
1-13	716-0778-52	SPECIAL SCREW	8
1-14	714-2603-8H	MACHINE SCREW	4
1-15	060-8180-20	FILM-ANT	2
1-16	-----	*Unused number	-
1-17	-----	*Unused number	-
1-18	-----	*Unused number	-
1-19	-----	*Unused number	-
1-20	-----	*Not mounted (BT AUTHENTICATION LABEL)	-



NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	*Unused number	-	5	312-0551-02	INNER-CHASSIS	1
2	-----	*Unused number	-	6	-----	*Not mounted(HEAT SINK)	-
2-1	-----	AUDIO PWB(461600-039)	1	7	331-5773-01	FAN-HOLDER	1
2-2	-----	*Unused number	-	8	020-3061-30	DC-MOTOR	1
2-2-1	-----	*Not mounted(SHIELD CASE-U)	-	9	307-0855-43	BACK-CVR(B)	1
2-2-2	-----	*Not mounted(SHIELD CASE-B)	-	10	310-2071-01	TOP-CASE	1
2-3	074-2306-90	OUTLET SOCKET(40P)	1	11	331-5692-01	SD COVER	1
2-4	-----	*Not mounted (OUTLET SOCKET 50P)	-	12	347-9412-00	SHADE	1
2-5	074-2306-10	OUTLET SOCKET(60P)	1	13	311-2113-01	BOTTOM-CASE	1
2-6	074-2306-30	OUTLET SOCKET(80P)	1	14	313-2231-00	HEAT SINK(SOC)	1
2-7	076-6021-56	PLUG	1	15	309-2015-00	FRONT PLATE	1
2-8	074-4118-24	OUTLET SOCKET	1	16	929-5430-80	CD-MECH-MODULE	1
2-9	-----	*Not mounted(OUTLET SOCKET)	-	17	331-5835-01	MECH-BRKT(CD)	1
2-10	074-4017-12	OUTLET SOCKET	1	18	347-9551-00	CUSHION A	1
2-11	-----	*Not mounted(ANT RECEPT)	-	19	347-9552-00	CUSHION B	2
2-12	331-5837-01	PWB-HOLDER(AD)	1	20	-----	*Not mounted(CUSHION C)	-
2-13	331-5838-01	CN-HOLDER(AD)	1	21	-----	*Not mounted (DVD MECH MODULE)	-
2-14	-----	*Not mounted(MACHINE SCREW)	-	22	-----	*Not mounted(DVD MECH-BRKT)	-
2-15	-----	*Not mounted(IT SCREW)	-	23	345-7413-00	CUSHION	1
2-16	-----	*Not mounted(IC)	-	24	854-4677-50	EXTENSION LEAD(10P)	1
2-17	-----	*Not mounted(IC)	-	25	854-4681-50	EXTENSION LEAD(6P)	1
3	-----	*Unused number	-	26	816-3181-06	FLAT WIRE(60P)	1
3-1	-----	IF PWB(461900-039)	1	27	816-3182-05	FLAT WIRE(80P)	1
3-2	074-2306-90	OUTLET SOCKET(40P)	1	28	816-3167-06	FLAT WIRE(for CD)(40P)	1
3-3	076-6021-60	PLUG	1	29	-----	*Not mounted (FLAT WIRE for DVD)(50P)	-
3-4	074-2306-10	OUTLET SOCKET(60P)	1	30	816-3180-05	FLAT WIRE(40P)	1
3-5	076-6021-56	PLUG	1	31	714-2604-8B	MACHINE SCREW(M2.6x4)	30
3-6	074-4017-28	OUTLET SOCKET	1	32	780-2604-50	IT SCREW(M2.6x4)	1
3-7	074-4017-20	OUTLET SOCKET	1	33	780-2614-53	D-SEMS-SCREW	2
3-8	076-0569-02	PLUG	1	34	716-1553-50	SPECIAL SCREW	6
3-9	092-2253-01	ANT-RECEPT	1	35	716-3504-80	SPECIAL SCREW	10
3-10	-----	*Not mounted(OUTLET SOCKET)	-	36	336-0061-01	INST-HOLDER	1
3-11	331-5839-00	CN-HOLDER(IF)	1	37	735-2606-1B	D-SEMS-SCREW	6
4	-----	*Unused number	-	38	-----	SETPLATE(PH3771BA:158516-276)	1
4-1	-----	CPU PWB(461800-039)	1		-----	SETPLATE(PH3772BA:158517-276)	1
4-2	074-2306-90	OUTLET SOCKET(40P)	1		-----	SETPLATE(PH3773BA:158518-276)	1
4-3	076-6023-07	PLUG	1		-----	SETPLATE(PH3845BA:158577-276)	1
4-4	076-6021-60	PLUG	1		-----	SETPLATE(PH3772BB:158589-276)	1
4-5	076-3072-90	PLUG(BtoB)	1	39	-----	XM CODE LABEL(PH3772BA:094508-290)	1
4-6	074-2306-30	OUTLET SOCKET(80P)	1		-----	XM CODE LABEL(PH3771BA:104107-290)	1
4-7	-----	*Not mounted(OUTLET SOCKET)	-		-----	XM CODE LABEL(PH3772BB:104108-290)	1
4-8	-----	*Not mounted(OUTLET SOCKET)	-		-----	XM CODE LABEL(PH3773BA:104109-290)	1
4-9	-----	*Not mounted(OUTLET SOCKET)	-		-----	XM CODE LABEL(PH3845BA:104112-290)	1
4-10	074-4099-30	OUTLET SOCKET	1	40	347-9585-00	INSULATOR	1
4-11	074-4099-00	OUTLET SOCKET	1	41	335-7317-00	CLIP	6
4-12	-----	*Not mounted(OUTLET SOCKET)	-	42	345-8764-00	SHIELD SHEET	1
4-13	-----	*Not mounted(OUTLET SOCKET)	-	43	347-9574-01	PROTECTION SHEET	1
4-14	074-4126-00	OUTLET SOCKET	1	44	-----	*Not mounted(SD CARD)	-
4-15	074-4017-24	OUTLET SOCKET	1	45	716-0878-50	SPECIAL SCREW(M2.6x5)	14
4-16	092-2249-00	ANT-RECEPT	1	46	-----	*Not mounted(NAVI LABEL)	-
4-17	331-5840-00	PWB-HOLDER(CPU)	1	47	-----	*Not mounted(HLC LABEL)	-
4-18	331-5841-01	CN-HOLDER(CPU)	1	48	-----	*Not mounted(GREENWAVE LABEL)	-
4-19	-----	*Not mounted(MACHINE SCREW)	-	49	-----	*Not mounted(PTA LABEL)	-
4-20	-----	*Not mounted(CPU-SEN-HOLDER)	-				

ELECTRICAL PARTS LIST

PANEL PWB(B1) section

* Neither the part numbers of parts on which software is written, nor part numbers of parts for which replacement is prohibited in the production process are listed in the parts list.

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C102	043-4306-90	1uF	C324	043-0559-90	6.3V 22uF	L201	010-2285-31	SN1D
C103	043-4306-90	1uF	C325	168-1052-78	16V 1uF K			BLM21PG331
C104	043-4306-90	1uF	C326	043-7707-90	50V 10uF			SN1D
C105	043-4306-90	1uF	C327	AAZ0293	25V 10uF 10%	L202	010-2285-31	BLM21PG331
C106	043-4306-90	1uF	C328	046-1022-58	50V 1000pF			SN1D
C107	043-4306-90	1uF	C329	046-1022-58	50V 1000pF	L304	010-3111-91	220ohm
C108	043-4306-90	1uF	C332	042-4035-95	16V 100uF	L305	010-3111-91	220ohm
C109	043-4306-90	1uF	C333	168-1052-78	16V 1uF K	L307	010-3417-90	10uH
C110	043-4306-90	1uF	C336	043-4306-90	1uF	L308	010-3558-52	NRS4018T100
C112	046-1042-78	0.1uF K B	C337	043-4306-90	1uF			MDGJV
C113	046-1042-78	0.1uF K B	C338	168-1052-78	16V 1uF K	P101	076-6000-59	9P
C114	043-4306-90	1uF	C339	168-1052-78	16V 1uF K	Q401	CAZ0331	2SC4081T106R
C115	043-4306-90	1uF	C340	043-5709-90	50V 1uF K	Q402	CAZ0372	2SD1766T100R
C116	166-1007-50	10pF CH	C342	043-0602-90	10uF	Q404	CAZ0331	2SC4081T106R
C117	166-1007-50	10pF CH	C343	045-1011-50	100pFJ CH	Q405	CAZ0331	2SC4081T106R
C118	166-1007-50	10pF CH	C349	043-5709-90	50V 1uF K	Q406	CAZ0331	2SC4081T106R
C119	166-1007-50	10pF CH	C350	043-5709-90	50V 1uF K	Q407	CAZ0331	2SC4081T106R
C120	166-1007-50	10pF CH	C351	043-5709-90	50V 1uF K	Q408	CAZ0331	2SC4081T106R
C121	166-1007-50	10pF CH	C352	043-5709-90	50V 1uF K	R101	033-0000-05	1/16W 0 ohm
C122	166-1007-50	10pF CH	C353	043-5709-90	50V 1uF K	R102	033-1031-15	1/16W 10k ohm J
C123	166-1007-50	10pF CH	C354	043-5709-90	50V 1uF K	R104	033-0000-05	1/16W 0 ohm
C124	166-1007-50	10pF CH	C355	043-5709-90	50V 1uF K	R105	033-0000-05	1/16W 0 ohm
C125	166-1007-50	10pF CH	C356	043-5709-90	50V 1uF K	R106	033-0000-05	1/16W 0 ohm
C126	166-1007-50	10pF CH	C357	043-5709-90	50V 1uF K	R107	033-0000-05	1/16W 0 ohm
C127	166-1007-50	10pF CH	C358	043-5709-90	50V 1uF K	R108	033-1011-15	1/16W 100 ohm J
C128	166-1007-50	10pF CH	C359	043-5709-90	50V 1uF K	R109	033-1011-15	1/16W 100 ohm J
C129	166-1007-50	10pF CH	C360	043-5709-90	50V 1uF K	R113	033-1011-15	1/16W 100 ohm J
C130	166-1007-50	10pF CH	C361	043-5709-90	50V 1uF K	R115	033-3301-15	1/16W 33 ohm J
C131	166-1007-50	10pF CH	C362	043-5709-90	50V 1uF K	R119	033-3301-15	1/16W 33 ohm J
C132	166-1007-50	10pF CH	C402	042-4035-98	16V 47uF	R120	033-3301-15	1/16W 33 ohm J
C133	166-1007-50	10pF CH	C403	168-1052-78	16V 1uF K	R122	032-0221-57	1/16W 13k ohm F
C134	166-1007-50	10pF CH	D401	001-7148-96	NSSB064-1223	R123	032-0221-10	1/16W 15k ohm F
C135	166-1007-50	10pF CH	D402	001-7148-96	NSSB064-1223	R124	033-1031-15	1/16W 10k ohm J
C136	166-1007-50	10pF CH	D403	001-7148-96	NSSB064-1223	R151	033-0000-05	1/16W 0 ohm
C137	166-1007-50	10pF CH	D404	001-7148-96	NSSB064-1223			(For PH3773BA)
C138	166-1007-50	10pF CH	D405	001-7148-96	NSSB064-1223	R180	119-0000-05	1/10W 0 ohm JW
C139	166-1007-50	10pF CH	D406	001-7148-96	NSSB064-1223	R181	119-0000-05	1/10W 0 ohm JW
C140	166-1007-50	10pF CH	D407	001-7148-96	NSSB064-1223	R184	117-1511-15	1/8W 150 ohm
C141	166-1007-50	10pF CH	D408	001-7148-96	NSSB064-1223	R186	119-0000-05	1/10W 0 ohm JW
C142	166-1007-50	10pF CH	D409	001-7148-96	NSSB064-1223	R187	119-0000-05	1/10W 0 ohm JW
C143	166-1007-50	10pF CH	D410	001-7148-96	NSSB064-1223	R205	033-0000-05	1/16W 0 ohm
C144	166-1007-50	10pF CH	D411	001-7148-96	NSSB064-1223	R206	033-0000-05	1/16W 0 ohm
C145	166-1007-50	10pF CH	D412	001-7148-96	NSSB064-1223	R209	032-0221-02	1/16W 33 ohm 1%
C146	166-1007-50	10pF CH	D413	001-7148-96	NSSB064-1223	R210	032-0221-02	1/16W 33 ohm 1%
C147	043-4306-90	1uF	D414	001-7148-96	NSSB064-1223	R212	032-0221-02	1/16W 33 ohm 1%
C149	046-1032-78	0.01uF K B	D415	001-7148-96	NSSB064-1223	R217	032-0221-91	1/16W 18 ohm F
C150	046-1022-58	50V 1000pF	D416	001-7148-96	NSSB064-1223	R218	032-0221-91	1/16W 18 ohm F
C151	045-1011-50	100pFJ CH	D417	001-7148-96	NSSB064-1223	R221	033-3331-15	1/16W 33k ohm J
C152	046-2222-58	2200pF K B	D418	001-7148-96	NSSB064-1223	R222	033-3331-15	1/16W 33k ohm J
C153	166-1007-50	10pF CH	D419	001-7148-96	NSSB064-1223	R223	033-3011-15	1/16W 300 ohm J
C154	042-4057-92	6.3V 100uF	D420	001-7148-96	NSSB064-1223	R224	033-3011-15	1/16W 300 ohm J
C155	165-4763-35	16V 47uF	D421	001-7134-72	NHSB046A-1220	R225	033-3011-15	1/16W 300 ohm J
C156	043-4306-90	1uF			(For PH3771/2B)	R226	033-3011-15	1/16W 300 ohm J
C157	043-4306-90	1uF		001-7134-73	NHSB046A-1221	R301	119-0000-05	1/10W 0 ohm JW
C158	165-1073-15	6.3V 100uF			(For PH3773B)	R302	119-0000-05	1/10W 0 ohm JW
C201	042-4057-91	6.3V 22uF	D422	001-7134-72	NHSB046A-1220	R303	119-0000-05	1/10W 0 ohm JW
C202	046-1032-78	0.01uF K B			(For PH3771/2B)	R304	117-0000-05	1/8W 0 ohm JW
C204	043-4306-90	1uF		001-7134-73	NHSB046A-1221	R324	032-0221-04	1/16W 10 ohm F
C205	046-1032-78	0.01uF K B			(For PH3773B)	R326	032-0221-04	1/16W 10 ohm F
C206	043-4306-90	1uF	D423	001-7115-92	VUG1111C	R329	033-0000-05	1/16W 0 ohm
C207	043-4306-90	1uF	D424	001-7134-74	NHSB046A-1222	R330	033-0000-05	1/16W 0 ohm
C208	046-1032-78	0.01uF K B	D425	001-7134-74	NHSB046A-1222	R331	033-0000-05	1/16W 0 ohm
C210	042-4057-91	6.3V 22uF	D427	001-7138-80	SMLS14EETT68	R332	033-0000-05	1/16W 0 ohm
C215	046-1022-58	50V 1000pF	IC101	051-6117-91	ATMXT768E-AB	R333	032-0210-45	1/10W 18 ohm F
C217	042-4057-91	6.3V 22uF	IC102	051-3774-90	NJM11100F1	R334	119-3391-15	1/10W 3.3 ohm
C218	165-1073-15	6.3V 100uF	IC201	060-8169-90	UGKZ2-H-05A	R335	119-5691-15	1/10W 5.6 ohm
C219	165-1073-15	6.3V 100uF			(WIFI&BT-MODULE)	R336	119-0000-05	1/10W 0 ohm JW
C301	AAZ0254	50V 0.1uF	J101	074-2306-10	60P	R337	AQZ0483	1/10W 12 ohm 1%
C302	AAZ0254	50V 0.1uF	J201	092-2203-00	ANT-RECEPT	R338	AQZ0489	1/10W 39 ohm 1%
C303	AAZ0254	50V 0.1uF	J202	092-2203-00	ANT-RECEPT	R339	AQZ0484	1/10W 15 ohm 1%
C319	042-4057-90	16V 47uF	J301	074-3072-90	90P	R340	119-2291-15	1/10W 2.2 ohm
C320	165-4763-35	16V 47uF	J302	074-2306-00	50P	R341	AQZ0483	1/10W 12 ohm 1%
C322	043-0567-90	25V 22uF	J303	074-2305-59	9P	R342	AQZ0489	1/10W 39 ohm 1%
C323	168-1052-78	16V 1uF K	L102	BMZ0211	BLM18PG121	R343	AQZ0483	1/10W 12 ohm 1%

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R344	119-0000-05	1/10W 0 ohm JW	R410	032-0210-68	1/10W 220 ohm F	R473	032-0210-50	1/10W 360 ohm F
R345	032-0210-37	1/10W 27 ohm F	R411	032-0210-00	1/10W 330 ohm F	R474	032-0210-72	1/10W 1.8k ohm 1%
R346	119-5691-15	1/10W 5.6 ohm	R413	032-0210-68	1/10W 220 ohm F	R475	033-5621-15	1/16W 5.6k ohm J
R347	AQZ0489	1/10W 39 ohm 1%	R414	032-0210-00	1/10W 330 ohm F	R476	033-1031-15	1/16W 10k ohm J
R348	032-0210-85	1/10W 150 ohm F	R415	033-4721-15	1/16W 4.7k ohm J	R478	032-0210-35	1/10W 120 ohm F
R349	032-0210-03	1/10W 10 ohm F	R417	032-0210-38	1/10W 110 ohm F	R479	032-0210-77	1/10W 1.5k ohm F
R350	032-0210-73	1/10W 390 ohm 1%	R418	032-0210-00	1/10W 330 ohm F	R480	033-5621-15	1/16W 5.6k ohm J
R351	032-0210-68	1/10W 220 ohm F	R419	033-2231-15	1/16W 22k ohm J	R481	033-1031-15	1/16W 10k ohm J
R352	032-0210-85	1/10W 150 ohm F	R421	032-0210-38	1/10W 110 ohm F	R483	032-0210-55	1/10W 2.2k ohm F
R353	032-0210-00	1/10W 330 ohm F	R422	032-0210-00	1/10W 330 ohm F	R484	032-0210-81	1/10W 2.7k ohm F
R354	032-0210-85	1/10W 150 ohm F	R424	032-0210-25	1/10W 68 ohm F	R485	032-0221-83	1/16W 3.3k ohm F
R355	119-2291-15	1/10W 2.2 ohm	R425	032-0210-73	1/10W 390 ohm 1%	R487	032-0210-55	1/10W 2.2k ohm F
R356	032-0210-85	1/10W 150 ohm F	R427	032-0210-25	1/10W 68 ohm F	R488	032-0210-81	1/10W 2.7k ohm F
R357	032-0210-00	1/10W 330 ohm F	R428	032-0210-73	1/10W 390 ohm 1%	R489	033-2231-15	1/16W 22k ohm J
R358	032-0210-85	1/10W 150 ohm F	R430	032-0210-03	1/10W 10 ohm F	R494	032-0210-00	1/10W 330 ohm F
R359	032-0210-68	1/10W 220 ohm F	R431	032-0210-80	1/10W 270 ohm F	R495	032-0210-40	1/10W 1.3k ohm F
R360	032-0210-73	1/10W 390 ohm 1%	R433	032-0210-03	1/10W 10 ohm F	R496	119-0000-05	1/10W 0 ohm JW
R361	032-0210-08	1/10W 100 ohm F	R434	032-0210-80	1/10W 270 ohm F	R497	033-5621-15	1/16W 5.6k ohm J
R362	119-0000-05	1/10W 0 ohm JW	R436	032-0210-30	1/10W 56 ohm F	R498	033-1031-15	1/16W 10k ohm J
R363	119-2201-15	1/10W 22 ohm	R437	032-0210-92	1/10W 560 ohm F	RN104	050-0156-78	1/16W 1k ohm x4
R364	119-0000-05	1/10W 0 ohm JW	R440	032-0210-30	1/10W 56 ohm F	RN105	050-0156-78	1/16W 1k ohm x4
R368	032-0221-99	1/16W 100 ohm 1%	R441	032-0210-92	1/10W 560 ohm F	RN106	050-0156-78	1/16W 1k ohm x4
R369	032-0221-99	1/16W 100 ohm 1%	R443	032-0210-30	1/10W 56 ohm F	RN107	050-0156-78	1/16W 1k ohm x4
R370	032-0221-99	1/16W 100 ohm 1%	R444	032-0210-92	1/10W 560 ohm F	RN108	050-0156-78	1/16W 1k ohm x4
R371	032-0221-99	1/16W 100 ohm 1%	R446	032-0210-30	1/10W 56 ohm F	RN109	050-0156-78	1/16W 1k ohm x4
R372	032-0221-99	1/16W 100 ohm 1%	R447	032-0210-92	1/10W 560 ohm F	RN110	050-0156-78	1/16W 1k ohm x4
R373	033-1011-15	1/16W 100 ohm J	R449	032-0210-08	1/10W 100 ohm F	RN111	050-0156-78	1/16W 1k ohm x4
R376	033-1011-15	1/16W 100 ohm J	R450	032-0210-00	1/10W 330 ohm F	RN201	050-0156-59	1/16W 33 ohm x4
R377	033-1011-15	1/16W 100 ohm J	R452	032-0210-08	1/10W 100 ohm F	RN202	050-0156-59	1/16W 33 ohm x4
R380	033-0000-05	1/16W 0 ohm	R453	032-0210-00	1/10W 330 ohm F	RN203	050-0156-52	1/16W 100 ohm x4
R381	033-0000-05	1/16W 0 ohm	R455	AQZ0484	1/10W 15 ohm 1%	RN301	050-0156-52	1/16W 100 ohm x4
R383	033-0000-05	1/16W 0 ohm	R456	032-0210-13	1/10W 300 ohm 1%	RN302	050-0156-57	1/16W 10k ohm x4
R384	033-0000-05	1/16W 0 ohm	R458	AQZ0484	1/10W 15 ohm 1%	RN303	050-0156-70	1/16W 10 ohm x4
R390	033-0000-05	1/16W 0 ohm	R459	032-0210-13	1/10W 300 ohm 1%	RN304	050-0156-70	1/16W 10 ohm x4
R391	119-1011-15	1/10W 100 ohm	R461	032-0210-85	1/10W 150 ohm F	SW301	013-6312-50	SKRP-ABE-010
R392	119-0000-05	1/10W 0 ohm JW	R462	032-0210-00	1/10W 330 ohm F	SW302	013-6312-50	SKRP-ABE-010
R394	032-0221-83	1/16W 3.3k ohm F	R464	032-0210-85	1/10W 150 ohm F	SW303	013-6312-50	SKRP-ABE-010
R396	033-3331-15	1/16W 33k ohm J	R465	032-0210-00	1/10W 330 ohm F	PWB	039-4620-00	PWB(WITHOUT COMPONENTS)
R404	032-0210-45	1/10W 18 ohm F	R466	033-5621-15	1/16W 5.6k ohm J			
R405	032-0210-73	1/10W 390 ohm 1%	R467	033-1031-15	1/16W 10k ohm J			
R407	119-0000-05	1/10W 0 ohm JW	R469	AQZ0489	1/10W 39 ohm 1%			
R408	032-0210-74	1/10W 470 ohm F	R470	032-0210-81	1/10W 2.7k ohm F			

AUDIO PWB(B2) section

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C101	042-4035-92	6.3V 220uF	C133	043-4306-90	1uF	C157	043-4306-90	1uF
C1025	046-1042-78	0.1uF K B	C1330	043-5709-90	50V 1uF K	C158	043-4306-90	1uF
C1027	043-4402-90	16V 1uF	C1334	043-0603-90	16V 10uF	C160	042-4035-91	6.3V 100uF
C1028	043-4402-90	16V 1uF	C1336	168-1052-78	16V 1uF K	C161	042-4035-84	6.3V 100uF
C1029	046-4722-38	50V 4700pF	C1337	042-4035-95	16V 100uF	C163	045-1011-50	100pFJ CH
C103	043-4306-90	1uF	C134	043-4306-90	1uF	C164	045-1011-50	100pFJ CH
C104	042-4035-92	6.3V 220uF	C1340	043-4402-90	16V 1uF	C165	043-4306-90	1uF
C105	043-4306-90	1uF	C1343	168-1052-78	16V 1uF K	C167	046-1042-78	0.1uF K B
C106	043-4306-90	1uF	C1344	043-0573-90	10V 22uF	C201	043-0570-90	16V 2.2uF K
C107	043-4306-90	1uF	C1345	043-4306-90	1uF	C202	043-0570-90	16V 2.2uF K
C109	043-4306-90	1uF	C1346	045-1007-50	10 +/-0.5pF CH	C203	043-0570-90	16V 2.2uF K
C110	043-4306-90	1uF	C1347	046-3922-58	3900pF K B	C204	043-0570-90	16V 2.2uF K
C1103	043-4402-90	16V 1uF	C1348	043-0603-90	16V 10uF	C209	046-1022-58	50V 1000pF
C1104	046-1042-78	0.1uF K B	C1349	043-7707-90	50V 10uF	C210	046-1022-58	50V 1000pF
C1106	043-4402-90	16V 1uF	C135	046-1032-78	0.01uF K B	C211	045-1011-50	100pFJ CH
C1108	043-4402-90	16V 1uF	C1350	168-1032-55	0.01uF K	C212	045-1011-50	100pFJ CH
C1111	165-1073-35	16V 100uF	C1353	168-1042-38	50V 0.1uF K	C213	045-1011-50	100pFJ CH
C1112	042-4035-90	6.3V 22uF	C1354	043-7300-90	10V 47uF	C214	045-1011-50	100pFJ CH
C1113	043-4402-90	16V 1uF	C1357	168-1052-78	16V 1uF K	C222	046-1042-78	0.1uF K B
C1114	043-4306-90	1uF	C1358	045-5096-50	5pF +/-0.25pF CH	C223	168-4752-98	4.7uF K
C112	043-4306-90	1uF	C1359	046-3322-58	3300pF K B	C224	168-4752-98	4.7uF K
C114	043-4306-90	1uF	C136	043-4306-90	1uF	C225	046-1042-78	0.1uF K B
C115	043-4306-90	1uF	C1360	168-1042-38	50V 0.1uF K	C226	046-1042-78	0.1uF K B
C116	043-4306-90	1uF	C1361	168-1042-38	50V 0.1uF K	C227	046-1042-78	0.1uF K B
C117	043-4306-90	1uF	C1364	043-0563-90	16V 47uF	C228	046-1042-78	0.1uF K B
C118	043-4306-90	1uF	C1365	168-1052-78	16V 1uF K	C229	043-4402-90	16V 1uF
C119	043-4306-90	1uF	C1366	043-4306-90	1uF	C230	043-4402-90	16V 1uF
C1205	166-2221-50	2200pF CH	C1367	168-1042-38	50V 0.1uF K	C231	043-4306-90	1uF
C121	043-4306-90	1uF	C1368	043-7707-90	50V 10uF	C232	046-1042-78	0.1uF K B
C1211	046-3332-78	0.033uF K B	C1369	042-4046-91	25V 220uF	C233	046-1042-78	0.1uF K B
C1212	168-1042-38	50V 0.1uF K	C137	043-4306-90	1uF	C234	045-1007-50	10 +/-0.5pF CH
C1218	043-8000-90	50V 0.1uF	C1370	165-1073-15	6.3V 100uF	C235	046-1042-78	0.1uF K B
C1219	043-5709-90	50V 1uF K	C1372	042-4035-95	16V 100uF	C237	045-1007-50	10 +/-0.5pF CH
C122	043-4306-90	1uF	C1375	043-7700-90	50V 4.7uF	C238	168-4752-98	4.7uF K
C1220	043-4306-90	1uF	C1377	043-7700-90	50V 4.7uF	C239	043-4402-90	16V 1uF
C1221	166-1021-50	1000pF CH	C1378	042-4034-90	25V 470uF	C240	042-0560-85	6.3V 100uF
C1222	166-1021-50	1000pF CH	C1380	046-1042-78	0.1uF K B	C241	043-4402-90	16V 1uF
C1223	166-1021-50	1000pF CH	C1382	043-4402-90	16V 1uF	C242	046-1042-78	0.1uF K B
C1224	166-1021-50	1000pF CH	C1383	042-1784-90	16V 470uF	C243	046-1042-78	0.1uF K B
C1225	043-5709-90	50V 1uF K	C1384	043-5709-90	50V 1uF K	C245	043-4402-90	16V 1uF
C1226	042-4441-00	25V 4700uF	C1385	165-1063-35	16V 10uF	C247	168-1042-78	16V 0.1uF K
C1228	046-1022-58	50V 1000pF	C1386	043-4306-90	1uF	C248	168-1052-78	16V 1uF K
C1229	046-1022-58	50V 1000pF	C1387	165-1063-35	16V 10uF	C249	046-1042-78	0.1uF K B
C123	045-1011-50	100pFJ CH	C139	043-4306-90	1uF	C250	046-1022-58	50V 1000pF
C1234	043-4306-90	1uF	C1390	168-1052-78	16V 1uF K	C251	043-4402-90	16V 1uF
C1235	166-1021-50	1000pF CH	C1392	046-2212-58	220pF K B	C252	165-2263-15	6.3V 22uF
C1236	166-1021-50	1000pF CH	C1393	046-2222-58	2200pF K B	C253	043-0559-90	6.3V 22uF
C1237	166-1021-50	1000pF CH	C1394	046-2222-58	2200pF K B	C254	168-1062-98	10uF K
C1238	166-1021-50	1000pF CH	C1395	168-1032-55	0.01uF K	C255	043-4402-90	16V 1uF
C1239	168-2242-58	0.22uF K	C1396	043-5709-90	50V 1uF K	C256	043-4402-90	16V 1uF
C124	043-4306-90	1uF	C1397	046-2222-58	2200pF K B	C257	168-1052-78	16V 1uF K
C1240	168-2242-58	0.22uF K	C1398	046-1022-58	50V 1000pF	C259	043-4402-90	16V 1uF
C1241	168-1032-55	0.01uF K	C1399	046-1022-58	50V 1000pF	C260	043-4402-90	16V 1uF
C1242	165-1063-55	35V 10uF	C1401	043-7400-90	16V 22uF	C261	043-4402-90	16V 1uF
C1244	043-0566-90	50V 2.2uF K	C1402	168-1052-78	16V 1uF K	C262	043-4402-90	16V 1uF
C1245	043-0566-90	50V 2.2uF K	C1403	043-4306-90	1uF	C263	046-1042-78	0.1uF K B
C1248	168-1042-38	50V 0.1uF K	C1404	042-0560-85	6.3V 100uF	C269	046-1042-78	0.1uF K B
C1249	043-4306-90	1uF	C1405	168-1022-55	1000pF K	C270	165-1073-35	16V 100uF
C125	043-4306-90	1uF	C1406	178-1052-78	25V 1uF	C271	046-2232-78	0.022uF K B
C1251	042-4034-90	25V 470uF	C1407	165-2263-35	16V 22uF	C272	046-3322-58	3300pF K B
C1252	043-5709-90	50V 1uF K	C1408	043-4402-90	16V 1uF	C273	046-3322-58	3300pF K B
C1253	043-8000-90	50V 0.1uF	C141	043-4306-90	1uF	C275	165-4763-15	6.3V 47uF
C1254	043-8000-90	50V 0.1uF	C1416	165-2263-15	6.3V 22uF	C276	046-3322-58	3300pF K B
C1259	042-4034-90	25V 470uF	C1417	043-4306-90	1uF	C277	046-3322-58	3300pF K B
C126	045-1011-50	100pFJ CH	C1418	042-0560-85	6.3V 100uF	C278	046-3322-58	3300pF K B
C128	043-4306-90	1uF	C1419	043-4306-90	1uF	C279	046-3322-58	3300pF K B
C129	043-4306-90	1uF	C142	043-4306-90	1uF	C280	168-1052-78	16V 1uF K
C130	043-4306-90	1uF	C1420	046-2222-58	2200pF K B	C281	168-1052-78	16V 1uF K
C1301	046-1042-78	0.1uF K B	C1421	165-1073-35	16V 100uF	C282	046-1042-78	0.1uF K B
C1302	042-4034-92	25V 680uF	C1422	046-1022-58	50V 1000pF	C283	046-1042-78	0.1uF K B
C1303	168-1042-78	16V 0.1uF K	C143	043-4306-90	1uF	C284	046-1042-78	0.1uF K B
C1304	168-1042-78	16V 0.1uF K	C153	168-1052-78	16V 1uF K	C285	046-1042-78	0.1uF K B
C131	043-4306-90	1uF	C154	043-4306-90	1uF	C286	042-0638-51	16V 220uF
C1314	046-1042-78	0.1uF K B	C155	045-1201-50	12pFJ CH	C287	042-0560-85	6.3V 100uF
C1329	043-5709-90	50V 1uF K	C156	045-1201-50	12pFJ CH	C288	043-4402-90	16V 1uF

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C289	043-4402-90	16V 1uF	C611	166-1011-50	100pF CH	IC201	-----	SAF7741HV/ N127ZK (DSP) (Exposed die pad) (674713-051)
C290	168-1022-55	1000pF K	C613	043-4402-90	16V 1uF			
C292	042-0638-51	16V 220uF	C615	165-2263-35	16V 22uF			
C294	165-2263-15	6.3V 22uF	C616	165-2263-35	16V 22uF			
C295	043-0559-90	6.3V 22uF	C619	165-1073-35	16V 100uF			
C296	165-2263-15	6.3V 22uF	C620	043-4402-90	16V 1uF	IC202	051-3516-90	S-1132B33-U5T1G
C297	046-1042-78	0.1uF K B	C621	165-4763-35	16V 47uF	IC203	051-3328-90	S-1323B18NB- N8D-TF
C298	043-4402-90	16V 1uF	C701	043-4402-90	16V 1uF			
C299	165-4763-15	6.3V 47uF	C710	166-1021-50	1000pF CH	IC501	051-6768-90	PCM1690IDCARQ1
C402	043-2701-90	50V 10uF	C711	166-1021-50	1000pF CH	IC502	051-3042-90	OPA2134UA
C404	043-4402-90	16V 1uF	C713	045-2011-50	50V 200pF	IC503	051-3010-90	NJM4580E
C501	042-0638-51	16V 220uF	C714	045-2011-50	50V 200pF	IC504	051-3010-90	NJM4580E
C502	042-0638-51	16V 220uF	C715	043-0603-90	16V 10uF	IC505	051-3010-90	NJM4580E
C503	043-4402-90	16V 1uF	C717	046-2222-58	2200pF K B	IC506	051-3010-90	NJM4580E
C504	042-0560-85	6.3V 100uF	C718	046-2222-58	2200pF K B	IC507	051-3774-90	NJM11100F1
C506	166-1021-50	1000pF CH	C719	166-2221-50	2200pF CH	IC601	051-3010-90	NJM4580E
C508	168-1052-78	16V 1uF K	C720	166-2221-50	2200pF CH	IC701	051-6676-90	CA0013BM
C509	165-1073-35	16V 100uF	C721	166-2221-50	2200pF CH	IC901	051-7202-90	MC74VHC1G32 DFT2G
C511	165-2263-35	16V 22uF	C722	166-2221-50	2200pF CH			
C513	168-1052-78	16V 1uF K	C814	168-1042-38	50V 0.1uF K	J101	074-2255-09	FH33-9S-0.5SH 9P
C516	165-2263-35	16V 22uF	C903	AAZ0264	16V 1uF	J1201	074-4118-24	24P
C517	165-2263-35	16V 22uF	C909	043-4306-90	1uF	J1401	074-2306-90	40P
C518	165-2263-35	16V 22uF	D101	001-2633-90	1SS388-TPL3,F	J701	074-4017-12	12P
C519	165-2263-35	16V 22uF	D102	001-2633-90	1SS388-TPL3,F	J702	074-4031-08	OUTLET SOCKET
C520	165-2263-35	16V 22uF	D1201	001-2403-90	M1F60	J901	074-2306-10	60P
C521	165-2263-35	16V 22uF	D1203	001-2630-90	1SS420-TPL3,F	J902	074-2306-30	80P
C522	165-2263-35	16V 22uF	D1204	001-2630-90	1SS420-TPL3,F	L101	010-3104-54	600 ohm/100MHz
C523	165-2263-35	16V 22uF	D1205	001-1325-90	1SS387	L102	010-3104-54	600 ohm/100MHz
C524	166-4711-50	470pF CH	D1206	001-1325-90	1SS387	L1102	010-3127-91	220 ohm/100MHz
C525	166-4711-50	470pF CH	D1207	001-1325-90	1SS387	L1103	010-3104-54	600 ohm/100MHz
C526	166-4711-50	470pF CH	D1208	001-1325-90	1SS387	L1201	010-3105-62	1k ohm/100MHz
C527	166-4711-50	470pF CH	D1209	001-2403-90	M1F60	L1202	010-3105-62	1k ohm/100MHz
C528	166-4711-50	470pF CH	D1307	001-2633-90	1SS388-TPL3,F	L1203	010-3104-54	600 ohm/100MHz
C529	166-4711-50	470pF CH	D1309	001-2633-90	1SS388-TPL3,F	L1206	010-8070-00	60uH
C530	166-4711-50	470pF CH	D1310	001-2633-90	1SS388-TPL3,F	L1207	010-8067-00	DN-CL2733-5
C531	166-4711-50	470pF CH	D1312	001-2629-90	D1FM3-5063	L1208	010-3105-62	1k ohm/100MHz
C532	166-1011-50	100pF CH	IC101	051-7202-90	MC74VHC1G 32DFT2G	L1209	010-3105-62	1k ohm/100MHz
C533	166-1011-50	100pF CH	IC102	051-3724-80	S-1172B1C-E6T1U	L1306	010-3545-53	22uH
C534	166-1011-50	100pF CH	IC103	-----	R5S72691P266FP (MICOM)(BGA) (043630-052)	L1307	010-3545-53	22uH
C535	166-1011-50	100pF CH				L1308	010-3580-50	4.7uH
C536	166-1011-50	100pF CH	IC104	051-5481-90	S-1009N30I- M5T1U	L1309	010-3104-54	600 ohm/100MHz
C537	166-1011-50	100pF CH				L1310	010-3104-50	30 ohm/100MHz
C538	166-1011-50	100pF CH				L1401	010-3104-50	30 ohm/100MHz
C539	166-1011-50	100pF CH	IC105	051-9854-00	S25FL164K0XMF I010	L1402	010-3104-50	30 ohm/100MHz
C540	043-4402-90	16V 1uF				L1403	010-3104-50	30 ohm/100MHz
C541	043-4402-90	16V 1uF	IC106	051-7221-18	TC7SH04FU	L1404	010-3104-50	30 ohm/100MHz
C542	043-4402-90	16V 1uF	IC1102	051-6746-90	AK4113VF	L1405	010-3104-54	600 ohm/100MHz
C543	043-4402-90	16V 1uF	IC1105	051-7566-90	NLV27WZU04DFT 2G	L1406	010-3104-54	600 ohm/100MHz
C546	165-2263-35	16V 22uF				L201	010-3104-54	600 ohm/100MHz
C547	165-2263-35	16V 22uF	IC1106	051-7566-90	NLV27WZU04DFT 2G	L202	010-3104-54	600 ohm/100MHz
C548	165-2263-35	16V 22uF				L206	010-3104-54	600 ohm/100MHz
C549	165-2263-35	16V 22uF				L211	010-3104-54	600 ohm/100MHz
C550	165-1063-35	16V 10uF	IC1203	051-7202-90	MC74VHC1G32 DFT2G	L220	010-3104-54	600 ohm/100MHz
C551	165-1063-35	16V 10uF				L222	010-3104-54	600 ohm/100MHz
C552	165-1063-35	16V 10uF	IC1204	051-5811-90	L9637D	L223	010-3104-54	600 ohm/100MHz
C553	165-1063-35	16V 10uF	IC1205	051-7547-90	SN74LVC1G07 DCKR	L225	010-3108-57	MP22012S102 AT000
C554	043-4402-90	16V 1uF						
C555	043-4402-90	16V 1uF	IC1301	051-5468-80	XC6118N10AMR-G	L226	010-3104-54	600 ohm/100MHz
C560	046-1032-78	0.01uF K B	IC1302	051-5468-80	XC6118N10AMR-G	L227	010-3108-57	MP22012S102 AT000
C561	045-1011-50	100pF CH	IC1304	-----	BD00D0AWHFP- TR (Voltage regulator) (Thermal pad) (370990-051)	L401	119-0000-05	1/10W 0 ohm JW
C562	166-1021-50	1000pF CH				L503	010-3104-54	600 ohm/100MHz
C563	042-0638-51	16V 220uF				L504	010-3104-54	600 ohm/100MHz
C564	042-0638-51	16V 220uF				L701	010-3104-54	600 ohm/100MHz
C565	042-0638-51	16V 220uF				L801	119-0000-05	1/10W 0 ohm JW
C566	042-0638-51	16V 220uF	IC1305	051-3519-90	NJU7771F05-TE2	P901	076-6021-56	6P
C567	042-4035-94	16V 22uF	IC1307	051-3767-90	BD00GC0EEFJ- ME2	Q1001	125-7016-90	RZQ050P01TR
C568	043-4402-90	16V 1uF				Q1002	192-4116-00	2SC4116
C573	168-1052-78	16V 1uF K	IC1308	051-3941-90	BD2232G-GTR	Q101	190-1586-00	2SA1586 O,Y,G
C574	166-1021-50	1000pF CH	IC1309	-----	MAX16933ATIR/ V+T (Buck Controller) (TQFN-EP) (366390-051)	Q102	125-7016-90	RZQ050P01TR
C575	166-1021-50	1000pF CH				Q1201	125-2046-91	DTC114EUBTL
C576	166-1021-50	1000pF CH				Q1203	125-7011-90	RSR025P03TL
C577	046-1022-58	50V 1000pF				Q1204	192-4081-00	2SC4081
C601	165-2263-35	16V 22uF				Q1305	125-0035-91	DTA114EUBTL
C602	165-2263-35	16V 22uF	IC1401	051-3579-90	S1112B15MCL 6ATFG	Q1306	192-4081-00	2SC4081
C605	166-4711-50	470pF CH				Q1307	125-8044-90	SH8K15GZETB
C606	166-4711-50	470pF CH	IC1402	051-3766-90	BD00HC5EEFJ- ME2	Q1308	125-8044-90	SH8K15GZETB
C609	166-1011-50	100pF CH						

REF NO.	PART NO.	DESCRIPTION
Q1309	125-7016-90	RZQ050P01TR
Q1310	192-4116-00	2SC4116
Q1401	125-2046-91	DTC114EUBTL
Q1402	191-1197-50	2SB1197K Q,R
Q1403	125-2046-91	DTC114EUBTL
Q1404	191-1197-50	2SB1197K Q,R
Q201	125-7007-90	Si5441BDC-TI-E3
Q510	193-1306-00	2SD1306
Q511	193-1306-00	2SD1306
Q512	193-1306-00	2SD1306
Q513	193-1306-00	2SD1306
Q514	193-1306-00	2SD1306
Q515	193-1306-00	2SD1306
Q516	193-1306-00	2SD1306
Q517	193-1306-00	2SD1306
Q603	190-2088-00	2SA2088-T106
Q606	125-2038-92	RN1902
Q607	193-1306-00	2SD1306
Q608	193-1306-00	2SD1306
Q701	192-4081-00	2SC4081
Q901	192-4081-00	2SC4081
Q902	191-1197-50	2SB1197K Q,R
Q903	192-4081-00	2SC4081
R101	033-3301-15	1/16W 33 ohm J
R1017	032-0221-51	1/16W 4.7k ohm F
R1018	033-2221-15	1/16W 2.2k ohm J
R1019	032-0221-74	1/16W 10k ohm 1%
R102	033-3301-15	1/16W 33 ohm J
R1020	032-0221-74	1/16W 10k ohm 1%
R1021	119-1021-15	1/10W 1k ohm
R103	033-3301-15	1/16W 33 ohm J
R1031	119-0000-05	1/10W 0 ohm JW
R104	033-0000-05	1/16W 0 ohm
R109	032-0221-75	1/16W 47k ohm F
R110	032-0221-75	1/16W 47k ohm F
R1109	033-0000-05	1/16W 0 ohm
R111	033-0000-05	1/16W 0 ohm
R1115	032-0221-10	1/16W 15k ohm F
R1118	033-3301-15	1/16W 33 ohm J
R1120	032-0221-74	1/16W 10k ohm 1%
R1121	032-0225-87	1/16W 75 ohm +/- 0.5%
R1124	033-0000-05	1/16W 0 ohm
R1125	033-0000-05	1/16W 0 ohm
R1126	032-0221-75	1/16W 47k ohm F
R1127	032-0221-75	1/16W 47k ohm F
R1128	032-0221-74	1/16W 10k ohm 1%
R1129	032-0221-74	1/16W 10k ohm 1%
R1130	033-0000-05	1/16W 0 ohm
R1131	033-0000-05	1/16W 0 ohm
R1132	032-0221-74	1/16W 10k ohm 1%
R1133	032-0221-74	1/16W 10k ohm 1%
R1140	032-0221-74	1/16W 10k ohm 1%
R1141	033-3301-15	1/16W 33 ohm J
R1143	032-0221-74	1/16W 10k ohm 1%
R1144	032-0221-74	1/16W 10k ohm 1%
R1145	032-0225-87	1/16W 75 ohm +/- 0.5%
R1146	119-0000-05	1/10W 0 ohm JW
R115	032-0221-74	1/16W 10k ohm 1%
R116	032-0221-09	1/16W 33k ohm F
R117	032-0221-75	1/16W 47k ohm F
R118	032-0221-06	1/16W 100k ohm F
R120	032-0221-75	1/16W 47k ohm F
R121	032-0221-75	1/16W 47k ohm F
R1213	032-0140-80	1/10W 18k ohm F
R1214	032-0210-58	1/10W 12k ohm F
R1228	116-5621-15	1/4W 5.6k ohm
R1229	032-0175-04	1/4W 4.7k ohm J
R1230	033-3301-15	1/16W 33 ohm J
R1231	032-0209-50	1/4W 82 ohm D
R1232	032-0209-50	1/4W 82 ohm D
R1236	032-0221-72	1/16W 470 ohm F
R1237	032-0221-72	1/16W 470 ohm F
R1238	033-3931-15	1/16W 39k ohm J
R1239	032-0210-90	1/10W 100k ohm F
R1240	032-0221-10	1/16W 15k ohm F

REF NO.	PART NO.	DESCRIPTION
R1241	119-1541-15	1/10W 150k ohm
R1242	032-0221-08	1/16W 1k ohm F
R1243	032-0221-08	1/16W 1k ohm F
R1244	032-0221-09	1/16W 33k ohm F
R125	032-0221-75	1/16W 47k ohm F
R1250	032-0221-51	1/16W 4.7k ohm F
R1253	117-0000-05	1/8W 0 ohm JW
R126	032-0221-75	1/16W 47k ohm F
R127	032-0221-09	1/16W 33k ohm F
R128	032-0221-09	1/16W 33k ohm F
R129	033-3301-15	1/16W 33 ohm J
R130	033-6801-15	1/16W 68 ohm J
R1301	032-0221-99	1/16W 100 ohm 1%
R1302	119-0000-05	1/10W 0 ohm JW
R1303	032-0221-93	1/16W 470k ohm F
R1304	032-0221-06	1/16W 100k ohm F
R1305	033-0000-05	1/16W 0 ohm
R1308	032-0221-99	1/16W 100 ohm 1%
R131	033-4701-15	1/16W 47 ohm J
R132	032-0221-75	1/16W 47k ohm F
R1321	032-0221-93	1/16W 470k ohm F
R1324	032-0221-34	1/16W 51k ohm F
R1325	032-0140-95	1/10W 20k ohm F
R1326	032-0221-74	1/16W 10k ohm 1%
R1327	032-0221-99	1/16W 100 ohm 1%
R133	032-0221-75	1/16W 47k ohm F
R1330	032-0221-11	1/16W 5.6k ohm F
R1331	032-0210-55	1/10W 2.2k ohm F
R134	032-0221-75	1/16W 47k ohm F
R1347	032-0221-65	1/16W 68k ohm F
R1348	032-0221-61	1/16W 6.8k ohm F
R1349	032-0221-61	1/16W 6.8k ohm F
R135	032-0221-74	1/16W 10k ohm 1%
R1358	032-0221-50	1/16W 43k ohm F
R1359	033-0000-05	1/16W 0 ohm
R1360	032-0210-06	1/10W 8.2k ohm F
R1361	032-0221-56	1/16W 22k ohm F
R1362	032-0225-54	1/16W 75k ohm +/- 0.5%
R1363	032-0221-74	1/16W 10k ohm 1%
R1365	033-3391-15	1/16W 3.3 ohm J
R1366	033-3391-15	1/16W 3.3 ohm J
R1368	033-0000-05	1/16W 0 ohm
R1369	033-0000-05	1/16W 0 ohm
R137	032-0221-74	1/16W 10k ohm 1%
R1370	033-0000-05	1/16W 0 ohm
R1371	033-4791-15	1/16W 4.7 ohm
R1373	032-0225-58	1/16W 20k ohm +/- 0.5%
R1374	033-0000-05	1/16W 0 ohm
R1375	032-0221-75	1/16W 47k ohm F
R1376	033-0000-05	1/16W 0 ohm
R1377	032-0221-07	1/16W 56k ohm F
R1378	033-0000-05	1/16W 0 ohm
R1379	033-0000-05	1/16W 0 ohm
R1380	033-0000-05	1/16W 0 ohm
R1381	033-0000-05	1/16W 0 ohm
R1382	033-4791-15	1/16W 4.7 ohm
R1384	032-0225-58	1/16W 20k ohm +/- 0.5%
R1385	032-0221-10	1/16W 15k ohm F
R1386	032-0221-06	1/16W 100k ohm F
R1388	032-0248-51	3/4W 20m ohm F
R1389	032-0248-51	3/4W 20m ohm F
R139	032-0221-75	1/16W 47k ohm F
R1390	119-0000-05	1/10W 0 ohm JW
R1393	032-0221-51	1/16W 4.7k ohm F
R1394	033-2221-15	1/16W 2.2k ohm J
R1395	032-0221-74	1/16W 10k ohm 1%
R1396	032-0221-74	1/16W 10k ohm 1%
R1397	032-0221-99	1/16W 100 ohm 1%
R1398	033-0000-05	1/16W 0 ohm
R1399	033-0000-05	1/16W 0 ohm
R140	032-0221-75	1/16W 47k ohm F
R1405	032-0221-06	1/16W 100k ohm F
R1406	033-0000-05	1/16W 0 ohm
R1407	032-0221-74	1/16W 10k ohm 1%

REF NO.	PART NO.	DESCRIPTION
R1408	032-0221-83	1/16W 3.3k ohm F
R1409	032-0221-56	1/16W 22k ohm F
R141	032-0221-08	1/16W 1k ohm F
R1410	032-0221-51	1/16W 4.7k ohm F
R1411	033-5611-15	1/16W 560 ohm J
R1413	032-0221-74	1/16W 10k ohm 1%
R1414	033-5611-15	1/16W 560 ohm J
R1416	033-0000-05	1/16W 0 ohm
R1417	032-0221-06	1/16W 100k ohm F
R1418	119-0000-05	1/10W 0 ohm JW
R142	032-0221-75	1/16W 47k ohm F
R143	032-0221-06	1/16W 100k ohm F
R144	032-0221-75	1/16W 47k ohm F
R145	032-0221-75	1/16W 47k ohm F
R146	032-0221-74	1/16W 10k ohm 1%
R147	032-0221-75	1/16W 47k ohm F
R148	032-0221-75	1/16W 47k ohm F
R149	032-0221-75	1/16W 47k ohm F
R150	032-0221-74	1/16W 10k ohm 1%
R151	033-3301-15	1/16W 33 ohm J
R152	032-0221-74	1/16W 10k ohm 1%
R153	032-0221-74	1/16W 10k ohm 1%
R154	033-3301-15	1/16W 33 ohm J
R156	032-0221-74	1/16W 10k ohm 1%
R157	032-0221-74	1/16W 10k ohm 1%
R158	032-0221-99	1/16W 100 ohm 1%
R159	032-0221-75	1/16W 47k ohm F
R160	032-0221-99	1/16W 100 ohm 1%
R161	032-0221-75	1/16W 47k ohm F
R162	032-0221-74	1/16W 10k ohm 1%
R163	032-0221-74	1/16W 10k ohm 1%
R164	032-0221-74	1/16W 10k ohm 1%
R165	032-0221-99	1/16W 100 ohm 1%
R166	033-0000-05	1/16W 0 ohm
R167	033-3301-15	1/16W 33 ohm J
R168	033-3921-15	1/16W 3.9k ohm J
R169	032-0221-74	1/16W 10k ohm 1%
R170	032-0221-75	1/16W 47k ohm F
R171	032-0221-51	1/16W 4.7k ohm F
R172	033-0000-05	1/16W 0 ohm
R173	033-3921-15	1/16W 3.9k ohm J
R175	033-5621-15	1/16W 5.6k ohm J
R176	032-0221-51	1/16W 4.7k ohm F
R177	032-0221-51	1/16W 4.7k ohm F
R178	033-3921-15	1/16W 3.9k ohm J
R179	033-3921-15	1/16W 3.9k ohm J
R180	032-0221-76	1/16W 24k ohm F
R181	032-0221-74	1/16W 10k ohm 1%
R183	033-3321-15	1/16W 3.3k ohm J
R184	033-0000-05	1/16W 0 ohm
R185	032-0221-99	1/16W 100 ohm 1%
R186	032-0221-99	1/16W 100 ohm 1%
R191	032-0221-99	1/16W 100 ohm 1%
R193	032-0221-99	1/16W 100 ohm 1%
R194	032-0221-99	1/16W 100 ohm 1%
R196	032-0221-51	1/16W 4.7k ohm F
R197	033-3301-15	1/16W 33 ohm J
R198	033-3301-15	1/16W 33 ohm J
R199	033-3301-15	1/16W 33 ohm J
R201	033-5601-15	1/16W 56 ohm J
R203	032-0221-09	1/16W 33k ohm F
R204	032-0221-09	1/16W 33k ohm F
R205	032-0221-09	1/16W 33k ohm F
R206	032-0221-09	1/16W 33k ohm F
R2101	032-0221-08	1/16W 1k ohm F
R2102	033-0000-05	1/16W 0 ohm
R2103	033-0000-05	1/16W 0 ohm
R2107	032-0221-75	1/16W 47k ohm F
R2112	033-3301-15	1/16W 33 ohm J
R2126	032-0221-74	1/16W 10k ohm 1%
R2129	033-3301-15	1/16W 33 ohm J
R213	032-0221-09	1/16W 33k ohm F
R2130	032-0221-75	1/16W 47k ohm F
R2132	032-0221-75	1/16W 47k ohm F
R2133	033-3301-15	1/16W 33 ohm J
R2134	033-3301-15	1/16W 33 ohm J
R2135	032-0221-74	1/16W 10k ohm 1%

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R214	032-0221-09	1/16W 33k ohm F	R281	032-0221-99	1/16W 100 ohm 1%	R613	032-0210-58	1/10W 12k ohm F
R2142	032-0221-74	1/16W 10k ohm 1%	R282	032-0221-99	1/16W 100 ohm 1%	R615	032-0210-10	1/10W 13k ohm
R2143	032-0221-74	1/16W 10k ohm 1%	R289	032-0210-03	1/10W 10 ohm F	R617	032-0210-10	1/10W 13k ohm
R2144	032-0221-75	1/16W 47k ohm F	R290	032-0210-03	1/10W 10 ohm F	R619	117-1011-15	1/8W 100 ohm
R2146	032-0221-75	1/16W 47k ohm F	R291	033-0000-05	1/16W 0 ohm	R623	117-1011-15	1/8W 100 ohm
R2147	032-0221-75	1/16W 47k ohm F	R293	033-0000-05	1/16W 0 ohm	R631	033-0000-05	1/16W 0 ohm
R215	032-0221-09	1/16W 33k ohm F	R296	033-3301-15	1/16W 33 ohm J	R641	033-3321-15	1/16W 3.3k ohm J
R2155	033-0000-05	1/16W 0 ohm	R297	033-3301-15	1/16W 33 ohm J	R642	117-2211-15	1/8W 220 ohm
R216	032-0221-09	1/16W 33k ohm F	R298	033-5601-15	1/16W 56 ohm J	R643	119-1021-15	1/10W 1k ohm
R2161	033-0000-05	1/16W 0 ohm	R299	033-5601-15	1/16W 56 ohm J	R644	119-1021-15	1/10W 1k ohm
R2162	032-0221-75	1/16W 47k ohm F	R300	119-0000-05	1/10W 0 ohm JW	R645	117-3301-15	1/8W 33 ohm
R2163	032-0221-75	1/16W 47k ohm F	R501	119-1021-15	1/10W 1k ohm	R646	117-3301-15	1/8W 33 ohm
R2164	032-0221-75	1/16W 47k ohm F	R502	119-1021-15	1/10W 1k ohm	R647	032-0221-74	1/16W 10k ohm 1%
R2165	032-0221-75	1/16W 47k ohm F	R503	119-1021-15	1/10W 1k ohm	R648	032-0210-55	1/10W 2.2k ohm F
R2166	032-0221-75	1/16W 47k ohm F	R504	119-1021-15	1/10W 1k ohm	R703	116-1011-15	1/4W 100 ohm
R2167	032-0221-75	1/16W 47k ohm F	R505	119-1021-15	1/10W 1k ohm	R704	116-1011-15	1/4W 100 ohm
R217	033-0000-05	1/16W 0 ohm	R506	033-3301-15	1/16W 33 ohm J	R705	116-6801-15	1/4W 68 ohm
R2170	033-3301-15	1/16W 33 ohm J	R508	117-2211-15	1/8W 220 ohm	R706	032-0221-74	1/16W 10k ohm 1%
R2171	032-0221-99	1/16W 100 ohm 1%	R509	119-1021-15	1/10W 1k ohm	R707	032-0221-74	1/16W 10k ohm 1%
R2172	032-0221-99	1/16W 100 ohm 1%	R510	119-1021-15	1/10W 1k ohm	R708	032-0175-07	1/4W 120 ohm J
R2173	032-0221-99	1/16W 100 ohm 1%	R511	119-1021-15	1/10W 1k ohm	R717	116-4731-15	1/4W 47k ohm
R2174	033-0000-05	1/16W 0 ohm	R522	032-0210-58	1/10W 12k ohm F	R718	116-4731-15	1/4W 47k ohm
R2175	032-0221-75	1/16W 47k ohm F	R523	032-0210-58	1/10W 12k ohm F	R723	032-0175-05	1/4W 47k ohm J
R2176	033-0000-05	1/16W 0 ohm	R524	032-0210-58	1/10W 12k ohm F	R724	032-0175-05	1/4W 47k ohm J
R2177	033-0000-05	1/16W 0 ohm	R525	032-0210-58	1/10W 12k ohm F	R725	032-0175-05	1/4W 47k ohm J
R2178	033-0000-05	1/16W 0 ohm	R526	032-0210-58	1/10W 12k ohm F	R726	032-0175-05	1/4W 47k ohm J
R2179	032-0221-93	1/16W 470k ohm F	R527	032-0210-58	1/10W 12k ohm F	R727	116-5111-15	1/4W 510 ohm
R218	033-0000-05	1/16W 0 ohm	R528	032-0210-58	1/10W 12k ohm F	R728	116-5111-15	1/4W 510 ohm
R2180	033-0000-05	1/16W 0 ohm	R529	032-0210-58	1/10W 12k ohm F	R729	116-5111-15	1/4W 510 ohm
R2181	033-2221-15	1/16W 2.2k ohm J	R530	032-0210-58	1/10W 12k ohm F	R730	116-5111-15	1/4W 510 ohm
R2182	032-0221-72	1/16W 470 ohm F	R531	032-0210-58	1/10W 12k ohm F	R732	033-0000-05	1/16W 0 ohm
R2184	032-0221-75	1/16W 47k ohm F	R532	032-0210-58	1/10W 12k ohm F	R901	032-0210-55	1/10W 2.2k ohm F
R2185	032-0221-08	1/16W 1k ohm F	R533	032-0210-58	1/10W 12k ohm F	R902	032-0221-74	1/16W 10k ohm 1%
R2187	033-0000-05	1/16W 0 ohm	R534	032-0210-58	1/10W 12k ohm F	R903	032-0221-74	1/16W 10k ohm 1%
R219	033-0000-05	1/16W 0 ohm	R535	032-0210-58	1/10W 12k ohm F	R904	032-0221-74	1/16W 10k ohm 1%
R220	033-0000-05	1/16W 0 ohm	R536	032-0210-58	1/10W 12k ohm F	R905	032-0221-74	1/16W 10k ohm 1%
R223	032-0221-74	1/16W 10k ohm 1%	R537	032-0210-10	1/10W 13k ohm	R906	032-0221-74	1/16W 10k ohm 1%
R226	032-0221-99	1/16W 100 ohm 1%	R538	032-0210-58	1/10W 12k ohm F	R907	119-2421-15	1/10W 2.4k ohm
R227	032-0221-74	1/16W 10k ohm 1%	R539	032-0210-10	1/10W 13k ohm	R915	033-0000-05	1/16W 0 ohm
R228	032-0221-74	1/16W 10k ohm 1%	R540	032-0210-10	1/10W 13k ohm	R916	033-0000-05	1/16W 0 ohm
R229	032-0210-36	1/10W 22 ohm F	R541	032-0210-10	1/10W 13k ohm	R923	119-0000-05	1/10W 0 ohm JW
R230	032-0225-87	1/16W 75 ohm +/- 0.5%	R542	032-0210-10	1/10W 13k ohm	R924	119-0000-05	1/10W 0 ohm JW
R231	033-3301-15	1/16W 33 ohm J	R543	032-0210-10	1/10W 13k ohm	R936	033-0000-05	1/16W 0 ohm
R232	032-0221-99	1/16W 100 ohm 1%	R544	032-0210-10	1/10W 13k ohm	R938	033-0000-05	1/16W 0 ohm
R234	032-0225-87	1/16W 75 ohm +/- 0.5%	R545	032-0210-10	1/10W 13k ohm	RN107	050-0156-59	1/16W 33 ohm x4
R235	119-0000-05	1/10W 0 ohm JW	R550	117-1011-15	1/8W 100 ohm	RN108	050-0156-56	1/16W 4.7k ohm x4
R236	033-5601-15	1/16W 56 ohm J	R552	117-1011-15	1/8W 100 ohm	RN109	050-0156-52	1/16W 100 ohm x4
R238	033-5601-15	1/16W 56 ohm J	R554	117-1011-15	1/8W 100 ohm	RN110	050-0156-52	1/16W 100 ohm x4
R239	033-5601-15	1/16W 56 ohm J	R556	117-1011-15	1/8W 100 ohm	RN111	050-0156-52	1/16W 100 ohm x4
R240	033-5601-15	1/16W 56 ohm J	R558	117-1011-15	1/8W 100 ohm	RN112	050-0156-52	1/16W 100 ohm x4
R241	033-5601-15	1/16W 56 ohm J	R560	117-1011-15	1/8W 100 ohm	RN202	050-0156-59	1/16W 33 ohm x4
R243	033-5601-15	1/16W 56 ohm J	R562	117-1011-15	1/8W 100 ohm	RN204	050-0156-64	1/16W 100k ohm x4
R245	119-0000-05	1/10W 0 ohm JW	R564	117-1011-15	1/8W 100 ohm	RN501	050-0156-59	1/16W 33 ohm x4
R246	119-0000-05	1/10W 0 ohm JW	R567	119-0000-05	1/10W 0 ohm JW	RN901	050-0156-53	1/16W 0 ohm x4
R248	119-0000-05	1/10W 0 ohm JW	R568	119-0000-05	1/10W 0 ohm JW	RN902	050-0156-53	1/16W 0 ohm x4
R249	033-5601-15	1/16W 56 ohm J	R569	119-0000-05	1/10W 0 ohm JW	RN903	050-0156-53	1/16W 0 ohm x4
R250	033-5601-15	1/16W 56 ohm J	R570	119-0000-05	1/10W 0 ohm JW	TH101	002-0315-00	TN10-3U153JT
R251	033-5601-15	1/16W 56 ohm J	R583	032-0221-62	1/16W 8.2k ohm F	TH1201	002-0328-90	miniSMDC050F-2
R252	119-0000-05	1/10W 0 ohm JW	R584	032-0221-74	1/16W 10k ohm 1%	VR1201	001-9213-50	EZJZ1V270EA
R253	119-0000-05	1/10W 0 ohm JW	R588	032-0221-62	1/16W 8.2k ohm F	VR1202	001-9213-50	EZJZ1V270EA
R259	033-0000-05	1/16W 0 ohm	R589	033-3301-15	1/16W 33 ohm J	VR1203	001-9213-50	EZJZ1V270EA
R260	119-0000-05	1/10W 0 ohm JW	R590	033-3301-15	1/16W 33 ohm J	X101	061-3614-90	NX3225GA 12.8M
R261	119-0000-05	1/10W 0 ohm JW	R591	117-3301-15	1/8W 33 ohm	X201	061-3589-90	41.6MHz
R262	032-0221-74	1/16W 10k ohm 1%	R592	117-3301-15	1/8W 33 ohm	ZD1201	001-4912-90	SM5S22A-HE3/2D
R264	033-0000-05	1/16W 0 ohm	R593	117-3301-15	1/8W 33 ohm	ZD1301	001-0529-32	MA8056-M
R265	033-0000-05	1/16W 0 ohm	R594	117-3301-15	1/8W 33 ohm	ZD501	001-4305-19	UDZSTE-17 5.1B
R266	033-0000-05	1/16W 0 ohm	R595	117-3301-15	1/8W 33 ohm	ZD601	001-4305-19	UDZSTE-17 5.1B
R267	033-0000-05	1/16W 0 ohm	R596	117-3301-15	1/8W 33 ohm	ZD701	001-0529-35	MA8062-M
R269	119-0000-05	1/10W 0 ohm JW	R597	117-3301-15	1/8W 33 ohm	ZD702	001-0529-35	MA8062-M
R270	119-0000-05	1/10W 0 ohm JW	R598	117-3301-15	1/8W 33 ohm	ZD703	001-4305-32	UDZSTE-17 18B
R271	119-0000-05	1/10W 0 ohm JW	R599	119-0000-05	1/10W 0 ohm JW	ZD901	001-0529-26	MA8047-M
R272	119-0000-05	1/10W 0 ohm JW	R607	032-0210-58	1/10W 12k ohm F	ZD903	001-0529-47	MA8091-M
			R608	032-0210-58	1/10W 12k ohm F	PWB	039-4616-00	PWB(WITHOUT COMPONENTS)
			R611	032-0210-58	1/10W 12k ohm F			

CPU PWB(B4) section

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C331	046-1042-78	0.1uF K B	C516	046-1042-78	0.1uF K B	C1227	043-5709-90	50V 1uF K
C332	046-1042-78	0.1uF K B	C517	043-0605-90	10V 2.2uF	C1228	046-1042-78	0.1uF K B
C333	046-1042-78	0.1uF K B	C518	046-1042-78	0.1uF K B	C123	046-1042-78	0.1uF K B
C334	046-1042-78	0.1uF K B	C519	168-1052-78	16V 1uF K	C1230	168-3312-55	330pF K
C335	046-1042-78	0.1uF K B	C520	168-1052-78	16V 1uF K	C1231	168-2222-55	2200pF K
C336	046-1042-78	0.1uF K B	C522	043-7402-90	16V 22uF	C1232	168-2222-55	2200pF K
C337	046-1042-78	0.1uF K B	C523	043-0605-90	10V 2.2uF	C1233	168-2222-55	2200pF K
C338	046-1042-78	0.1uF K B	C524	043-0605-90	10V 2.2uF	C1234	168-2222-55	2200pF K
C339	046-1042-78	0.1uF K B	C525	043-0605-90	10V 2.2uF	C126	046-1042-78	0.1uF K B
C340	043-0603-90	16V 10uF	C526	043-0605-90	10V 2.2uF	C129	046-1042-78	0.1uF K B
C341	043-0603-90	16V 10uF	C527	043-0605-90	10V 2.2uF	C130	046-1042-78	0.1uF K B
C342	046-1042-78	0.1uF K B	C528	043-0605-90	10V 2.2uF	C1303	043-7504-90	22uF
C343	046-1042-78	0.1uF K B	C529	043-0605-90	10V 2.2uF	C1304	046-3322-58	3300pF K B
C344	046-1042-78	0.1uF K B	C530	045-1801-50	18pFJ CH	C131	046-1042-78	0.1uF K B
C345	043-0603-90	16V 10uF	C531	042-4035-94	16V 22uF	C1310	043-7504-90	22uF
C346	046-1042-78	0.1uF K B	C1003	046-1042-78	0.1uF K B	C1311	046-3322-58	3300pF K B
C347	043-0603-90	16V 10uF	C1004	043-0605-90	10V 2.2uF	C1312	166-6097-50	6pF +/-0.5pF CH
C348	043-0603-90	16V 10uF	C1005	043-0603-90	16V 10uF	C1313	166-6097-50	6pF +/-0.5pF CH
C349	043-4200-90	6.3V 2.2uF	C1006	046-1042-78	0.1uF K B	C1314	043-0567-90	25V 22uF
C350	043-4200-90	6.3V 2.2uF	C1007	046-1042-78	0.1uF K B	C132	046-1042-78	0.1uF K B
C351	043-4200-90	6.3V 2.2uF	C1008	043-0603-90	16V 10uF	C133	046-1042-78	0.1uF K B
C352	043-4200-90	6.3V 2.2uF	C1009	168-4742-78	0.47uF K	C134	046-1042-78	0.1uF K B
C353	043-4200-90	6.3V 2.2uF	C101	045-1011-50	100pFJ CH	C135	046-1042-78	0.1uF K B
C354	043-4200-90	6.3V 2.2uF	C1011	043-0605-90	10V 2.2uF	C1350	166-6097-50	6pF +/-0.5pF CH
C355	046-1042-78	0.1uF K B	C1014	165-4763-15	6.3V 47uF	C1351	166-6097-50	6pF +/-0.5pF CH
C356	046-1032-78	0.01uF K B	C1015	046-1042-78	0.1uF K B	C1352	043-0567-90	25V 22uF
C357	046-1042-78	0.1uF K B	C1016	046-1042-78	0.1uF K B	C1355	043-4402-90	16V 1uF
C358	043-4200-90	6.3V 2.2uF	C102	046-1032-78	0.01uF K B	C1356	043-4402-90	16V 1uF
C359	046-1042-78	0.1uF K B	C103	046-1032-78	0.01uF K B	C1357	043-4402-90	16V 1uF
C360	046-1032-78	0.01uF K B	C104	046-1032-78	0.01uF K B	C1358	043-4402-90	16V 1uF
C361	046-1042-78	0.1uF K B	C109	046-1042-78	0.1uF K B	C136	046-1042-78	0.1uF K B
C362	043-0603-90	16V 10uF	C110	046-1042-78	0.1uF K B	C1360	168-1052-78	16V 1uF K
C363	043-0603-90	16V 10uF	C1101	043-4306-90	1uF	C1361	043-0603-90	16V 10uF
C365	043-4200-90	6.3V 2.2uF	C1102	043-4306-90	1uF	C137	046-1042-78	0.1uF K B
C367	043-4200-90	6.3V 2.2uF	C1103	043-4306-90	1uF	C140	046-1042-78	0.1uF K B
C368	043-4200-90	6.3V 2.2uF	C1104	043-4306-90	1uF	C1401	168-3322-55	3300pF K
C369	043-4200-90	6.3V 2.2uF	C1105	043-4306-90	1uF	C1402	168-3322-55	3300pF K
C372	046-1042-78	0.1uF K B	C1106	045-9097-50	9pF +/-0.5pF CH	C1403	168-3322-55	3300pF K
C373	046-1042-78	0.1uF K B	C1107	045-9097-50	9pF +/-0.5pF CH	C1404	046-1042-78	0.1uF K B
C374	046-1042-78	0.1uF K B	C1109	043-4306-90	1uF	C142	046-1042-78	0.1uF K B
C375	043-0603-90	16V 10uF	C111	046-1042-78	0.1uF K B	C144	046-1042-78	0.1uF K B
C376	046-1042-78	0.1uF K B	C1110	043-4306-90	1uF	C145	046-1042-78	0.1uF K B
C377	046-1042-78	0.1uF K B	C1111	043-4306-90	1uF	C146	046-1042-78	0.1uF K B
C378	046-1042-78	0.1uF K B	C1112	043-4306-90	1uF	C148	046-1042-78	0.1uF K B
C379	046-1042-78	0.1uF K B	C1113	043-4402-90	16V 1uF	C150	046-1042-78	0.1uF K B
C380	042-4035-91	6.3V 100uF	C1114	043-4402-90	16V 1uF	C1501	043-7402-90	16V 22uF
C381	046-1042-78	0.1uF K B	C1115	042-4057-90	16V 47uF	C1502	168-1052-78	16V 1uF K
C3811	043-5709-90	50V 1uF K	C1116	042-4057-90	16V 47uF	C1503	043-7200-90	6.3V 47uF
C3815	042-4046-92	35V 100uF	C1117	043-4402-90	16V 1uF	C1506	046-1022-58	50V 1000pF
C3819	043-7700-90	50V 4.7uF	C1118	042-4035-95	16V 100uF	C1507	046-4732-78	0.047uF K B
C382	046-1042-78	0.1uF K B	C112	046-1042-78	0.1uF K B	C1508	045-1007-50	10 +/-0.5pF CH
C3821	043-0568-90	25V 2.2uF	C1120	168-1052-78	16V 1uF K	C1509	046-1042-78	0.1uF K B
C383	046-1042-78	0.1uF K B	C1121	168-1052-78	16V 1uF K	C1510	043-7201-90	6.3V 100uF
C401	046-1042-78	0.1uF K B	C1122	046-1042-78	0.1uF K B	C1511	168-1052-78	16V 1uF K
C402	045-1096-50	1pF 50V	C1124	042-4035-96	6.3V 47uF	C1512	043-0559-90	6.3V 22uF
C403	046-1042-78	0.1uF K B	C1126	043-7402-90	16V 22uF	C1513	043-0559-90	6.3V 22uF
C404	045-2096-50	2pF +/-0.25pF CH	C113	046-1042-78	0.1uF K B	C1515	046-1022-58	50V 1000pF
C405	046-1042-78	0.1uF K B	C115	046-1042-78	0.1uF K B	C1516	046-4732-78	0.047uF K B
C406	046-1042-78	0.1uF K B	C117	046-1042-78	0.1uF K B	C1517	045-1007-50	10 +/-0.5pF CH
C408	046-1032-78	0.01uF K B	C120	046-1042-78	0.1uF K B	C1518	046-1042-78	0.1uF K B
C418	046-1032-78	0.01uF K B	C1201	168-3312-55	330pF K	C1522	043-7707-90	50V 10uF
C420	043-4306-90	1uF	C1202	045-1801-50	18pFJ CH	C1523	043-5709-90	50V 1uF K
C422	165-4763-15	6.3V 47uF	C1204	166-1011-50	100pF CH	C1524	043-0604-90	25V 10uF B
C423	165-4763-15	6.3V 47uF	C121	046-1042-78	0.1uF K B	C1525	168-1052-78	16V 1uF K
C505	046-1042-78	0.1uF K B	C1212	168-1042-38	50V 0.1uF K	C1526	043-7400-90	16V 22uF
C506	043-0605-90	10V 2.2uF	C1213	168-1042-38	50V 0.1uF K	C1527	168-1052-78	16V 1uF K
C507	046-1042-78	0.1uF K B	C1214	043-5600-90	0.10uF	C1528	046-1022-58	50V 1000pF
C508	046-1042-78	0.1uF K B	C1215	046-1032-78	0.01uF K B	C1529	168-1052-78	16V 1uF K
C509	043-0605-90	10V 2.2uF	C1216	046-1042-78	0.1uF K B	C153	046-1042-78	0.1uF K B
C510	046-1042-78	0.1uF K B	C1218	046-1042-78	0.1uF K B	C1530	168-1052-78	16V 1uF K
C511	046-1042-78	0.1uF K B	C1219	168-3322-55	3300pF K	C1532	168-1052-78	16V 1uF K
C512	046-1042-78	0.1uF K B	C122	046-1042-78	0.1uF K B	C1534	168-1052-78	16V 1uF K
C513	046-1042-78	0.1uF K B	C1224	046-1032-78	0.01uF K B	C1535	043-0559-90	6.3V 22uF
C514	046-1042-78	0.1uF K B	C1225	043-4402-90	16V 1uF	C1539	168-1062-98	10uF K
C515	046-1042-78	0.1uF K B	C1226	043-0603-90	16V 10uF	C154	046-1042-78	0.1uF K B

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C1541	168-1062-98	10uF K	C177	046-1042-78	0.1uF K B	C662	045-4701-50	47pF CH
C1542	046-1042-78	0.1uF K B	C178	046-1042-78	0.1uF K B	C663	043-4700-95	50V 33pF
C1543	042-4035-92	6.3V 220uF	C179	046-1042-78	0.1uF K B	C705	168-3332-78	0.033uF K
C1544	046-1032-78	0.01uF K B	C180	046-1042-78	0.1uF K B	C711	043-4402-90	16V 1uF
C1545	046-1032-78	0.01uF K B	C181	046-1042-78	0.1uF K B	C713	165-2263-15	6.3V 22uF
C1546	168-1052-78	16V 1uF K	C182	043-6400-90	16V 4.7uF K	C714	043-4306-90	1uF
C1547	168-1052-78	16V 1uF K	C183	043-6400-90	16V 4.7uF K	C716	043-4402-90	16V 1uF
C1548	043-0603-90	16V 10uF	C184	043-6400-90	16V 4.7uF K	C717	165-2263-15	6.3V 22uF
C1549	043-6400-90	16V 4.7uF K	C185	043-6400-90	16V 4.7uF K	C718	165-2263-15	6.3V 22uF
C1550	046-1042-78	0.1uF K B	C186	046-1042-78	0.1uF K B	C719	043-4402-90	16V 1uF
C1551	043-0603-90	16V 10uF	C187	046-1042-78	0.1uF K B	C722	043-4306-90	1uF
C1552	043-6400-90	16V 4.7uF K	C188	046-1042-78	0.1uF K B	C723	046-1042-78	0.1uF K B
C1553	046-1042-78	0.1uF K B	C189	046-1042-78	0.1uF K B	C724	046-1042-78	0.1uF K B
C1554	043-7200-90	6.3V 47uF	C190	046-1042-78	0.1uF K B	C725	046-1042-78	0.1uF K B
C1555	043-0605-90	10V 2.2uF	C191	046-1042-78	0.1uF K B	C726	046-1042-78	0.1uF K B
C1558	042-4035-95	16V 100uF	C192	046-1042-78	0.1uF K B	C727	046-1042-78	0.1uF K B
C1559	042-4046-92	35V 100uF	C193	046-1042-78	0.1uF K B	C728	046-1042-78	0.1uF K B
C1567	046-1042-78	0.1uF K B	C194	046-1042-78	0.1uF K B	C729	046-1042-78	0.1uF K B
C1568	043-0603-90	16V 10uF	C195	046-1042-78	0.1uF K B	C730	046-1042-78	0.1uF K B
C1569	178-1062-88	10uF	C196	046-1042-78	0.1uF K B	C731	168-3332-78	0.033uF K
C1570	045-2201-50	22pFJ CH	C197	168-1062-98	10uF K	C732	043-4306-90	1uF
C1571	165-4763-35	16V 47uF	C198	043-7200-90	6.3V 47uF	C735	043-4306-90	1uF
C1573	165-4763-35	16V 47uF	C201	046-1042-78	0.1uF K B	C736	168-3332-78	0.033uF K
C1575	165-4763-15	6.3V 47uF	C202	046-1042-78	0.1uF K B	C740	046-3332-78	0.033uF K B
C1576	046-1042-78	0.1uF K B	C203	046-1042-78	0.1uF K B	C743	046-1022-58	50V 1000pF
C1577	046-1042-78	0.1uF K B	C204	045-1011-50	100pFJ CH	C748	043-4306-90	1uF
C1578	165-4763-15	6.3V 47uF	C205	045-1011-50	100pFJ CH	C749	043-4306-90	1uF
C1579	046-1042-78	0.1uF K B	C301	046-1042-78	0.1uF K B	C750	043-4306-90	1uF
C1580	165-4763-15	6.3V 47uF	C302	046-1042-78	0.1uF K B	C751	043-4306-90	1uF
C1582	165-2263-35	16V 22uF	C303	046-1032-78	0.01uF K B	C801	ADZ0265	35V 47uF
C1585	043-4306-90	1uF	C304	046-1042-78	0.1uF K B	C802	043-0576-90	50V 10uF
C1586	043-4306-90	1uF	C305	168-1062-98	10uF K	C803	043-6705-90	50V 1uF
C1587	043-4306-90	1uF	C306	046-1042-78	0.1uF K B	C804	045-1011-50	100pFJ CH
C1589	045-1011-50	100pFJ CH	C307	046-1032-78	0.01uF K B	C805	043-0570-90	16V 2.2uF K
C1590	045-1011-50	100pFJ CH	C308	046-1042-78	0.1uF K B	C806	043-0574-90	25V 1.0uF
C1591	046-1022-58	50V 1000pF	C309	046-1042-78	0.1uF K B	C807	043-0574-90	25V 1.0uF
C1592	043-7300-90	10V 47uF	C310	046-1042-78	0.1uF K B	C808	043-0576-90	50V 10uF
C1593	043-4306-90	1uF	C311	046-1042-78	0.1uF K B	C809	043-5709-90	50V 1uF K
C1601	046-1042-78	0.1uF K B	C312	046-1042-78	0.1uF K B	C810	046-6832-78	0.068uF K B
C1602	046-1042-78	0.1uF K B	C313	043-4200-90	6.3V 2.2uF	C811	043-7504-90	22uF
C1603	043-0603-90	16V 10uF	C314	043-4200-90	6.3V 2.2uF	C812	045-3311-50	330pFJ CH
C1605	046-1042-78	0.1uF K B	C315	043-4200-90	6.3V 2.2uF	C813	043-0604-90	25V 10uF B
C1606	046-1042-78	0.1uF K B	C316	043-4200-90	6.3V 2.2uF	C814	168-8232-78	0.082uF K
C1607	046-1042-78	0.1uF K B	C317	043-4200-90	6.3V 2.2uF	C815	168-5632-78	16V 0.056uF K
C161	046-1042-78	0.1uF K B	C318	043-4200-90	6.3V 2.2uF	C816	043-0603-90	16V 10uF
C1610	043-0602-90	10uF	C319	043-4200-90	6.3V 2.2uF	C817	043-0603-90	16V 10uF
C1611	046-1042-78	0.1uF K B	C320	043-4200-90	6.3V 2.2uF	C818	043-6705-90	50V 1uF
C1612	165-4763-15	6.3V 47uF	C321	043-4200-90	6.3V 2.2uF	C821	168-2232-55	0.022uF K
C162	046-1042-78	0.1uF K B	C322	043-7201-90	6.3V 100uF	C822	046-6832-78	0.068uF K B
C163	046-1042-78	0.1uF K B	C323	043-7201-90	6.3V 100uF	C823	168-4732-58	50V 0.047uF K
C166	046-1042-78	0.1uF K B	C324	043-7201-90	6.3V 100uF	C824	AAZ0261	25V 1uF
C167	046-1042-78	0.1uF K B	C325	043-7201-90	6.3V 100uF	C825	043-7707-90	50V 10uF
C168	046-1042-78	0.1uF K B	C326	043-7201-90	6.3V 100uF	C826	046-4732-78	0.047uF K B
C169	046-1042-78	0.1uF K B	C327	046-1042-78	0.1uF K B	C827	046-1042-78	0.1uF K B
C170	046-1042-78	0.1uF K B	C328	046-1042-78	0.1uF K B	C829	043-5709-90	50V 1uF K
C1702	043-0605-91	6.3V 4.7uF	C329	046-1042-78	0.1uF K B	C830	043-5709-90	50V 1uF K
C1703	043-0519-50	0.1uF	C330	046-1042-78	0.1uF K B	C833	045-1011-50	100pFJ CH
C1705	043-0605-91	6.3V 4.7uF	C601	046-1042-78	0.1uF K B	C834	045-1011-50	100pFJ CH
C1706	043-0605-91	6.3V 4.7uF	C602	045-2201-50	22pFJ CH	C838	ADZ0265	35V 47uF
C1707	046-1042-78	0.1uF K B	C603	AAZ0292	10V 10uF	C842	043-5709-90	50V 1uF K
C1708	046-1042-78	0.1uF K B	C604	043-4402-90	16V 1uF	C843	045-1011-50	100pFJ CH
C1709	043-0605-91	6.3V 4.7uF	C628	046-1042-78	0.1uF K B	C846	ADZ0265	35V 47uF
C171	046-1042-78	0.1uF K B	C635	043-4306-90	1uF	C847	ADZ0265	35V 47uF
C1713	043-0605-91	6.3V 4.7uF	C636	046-1042-78	0.1uF K B	C848	045-1011-50	100pFJ CH
C1714	043-0605-91	6.3V 4.7uF	C637	043-6400-90	16V 4.7uF K	C849	168-1022-55	1000pF K
C1716	046-1042-78	0.1uF K B	C646	045-1007-50	10 +/-0.5pF CH	C850	168-1042-38	50V 0.1uF K
C1717	046-1042-78	0.1uF K B	C647	043-4306-90	1uF	C851	168-1042-38	50V 0.1uF K
C1718	046-1042-78	0.1uF K B	C648	043-4306-90	1uF	C852	168-1042-38	50V 0.1uF K
C1719	046-1042-78	0.1uF K B	C651	043-4306-90	1uF	C853	046-1042-78	0.1uF K B
C172	046-1042-78	0.1uF K B	C652	043-0605-90	10V 2.2uF	C854	ADZ0265	35V 47uF
C1720	046-1042-78	0.1uF K B	C653	043-4306-90	1uF	C895	046-1022-58	50V 1000pF
C1721	042-4035-98	16V 47uF	C654	043-4306-90	1uF	C896	043-5709-90	50V 1uF K
C1722	042-4035-98	16V 47uF	C655	043-0602-90	10uF	C897	043-5709-90	50V 1uF K
C173	046-1042-78	0.1uF K B	C658	043-4306-90	1uF	C898	043-5709-90	50V 1uF K
C174	046-1042-78	0.1uF K B	C659	043-4306-90	1uF	C901	046-1042-78	0.1uF K B
C175	046-1042-78	0.1uF K B	C660	043-0602-90	10uF	C904	043-0574-90	25V 1.0uF
C176	046-1042-78	0.1uF K B	C661	166-3096-50	3pF +/-0.25pF CK	C907	043-4402-90	16V 1uF

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
C914	046-2232-78	0.022uF K B			(Thermal pad)	IC903	051-7222-60	MC74VHC1G08
C915	046-2232-78	0.022uF K B			(696090-051)			DFT2G
C916	168-2232-55	0.022uF K	IC1401	051-7563-90	NLV27WZ16DFT2G	J1001	074-2306-30	80P
C917	AAZ0261	25V 1uF	IC1501	051-3785-90	BD35395FJ-ME2	J1002	074-2306-90	40P
C918	043-0605-90	10V 2.2uF	IC1502	-----	SC187ULTRT	J1201	074-4017-24	24P
C920	168-1052-78	16V 1uF K			(Thermal pad)	J1301	074-4099-00	MX49004HQ1
C921	168-2242-58	0.022uF K			(363690-051)	J1304	074-4099-30	5P
D1001	001-2630-90	1SS420-TPL3,F	IC1503	-----	SC187ULTRT	J1701	074-4126-00	MX48A02HQ6
D1002	001-2630-90	1SS420-TPL3,F			(Thermal pad)	J401	074-2255-09	FH33-9S-0.5SH 9P
D1003	001-2630-90	1SS420-TPL3,F			(363690-051)	L1003	010-3127-91	220 ohm/100MHz
D1101	001-0516-90	MA111	IC1504	051-3707-80	S-1133B00-U5T1U	L1004	BMZ0211	BLM18PG121
D1102	001-0516-90	MA111	IC1505	-----	SC183CULTRT			SN1D
D1104	001-4338-50	RClamp0584J.TCT			(PAD)	L1010	010-3114-53	MMZ1005S601CT
D1105	001-4338-50	RClamp0584J.TCT			(358800-051)	L1011	010-3114-53	MMZ1005S601CT
D1106	001-4338-50	RClamp0584J.TCT	IC1506	051-3774-90	NJM11100F1	L1014	010-3114-53	MMZ1005S601CT
D1203	001-0516-90	MA111	IC1507	051-3761-90	BD00HC0EEFJ-ME2	L1015	010-3114-53	MMZ1005S601CT
D1204	001-2412-90	RR264M-400				L1101	BMZ0211	BLM18PG121
D1205	001-2412-90	RR264M-400	IC1508	051-3774-90	NJM11100F1			SN1D
D1206	001-2403-90	M1F60	IC1511	-----	TLV62065TDSGR	L1102	BMZ0211	BLM18PG121
D1211	001-2630-90	1SS420-TPL3,F			Q1			SN1D
D1212	001-0516-90	MA111			(Step Down	L1103	BMZ0211	BLM18PG121
D1301	001-2410-90	D3F60			Converter)			SN1D
D1401	001-4910-90	DF5A6.8F-L,F			(SON Package)	L1104	BMZ0211	BLM18PG121
D1402	001-4910-90	DF5A6.8F-L,F			(366490-051)			SN1D
D1602	001-1325-90	1SS387	IC1601	CUZ0502	TC7WH123FKF	L1105	BMZ0211	BLM18PG121
D1701	001-4338-50	RClamp0584J.TCT	IC1603	051-7202-90	MC74VHC1G32			SN1D
D602	001-2630-90	1SS420-TPL3,F			DFT2G	L1201	010-2285-70	120 ohm/100MHz
D801	001-2620-90	RB060L-40	IC1604	051-7222-60	MC74VHC1G08	L1203	010-2285-70	120 ohm/100MHz
D802	001-2620-90	RB060L-40			DFT2G	L1204	010-2285-70	120 ohm/100MHz
D803	001-2620-90	RB060L-40	IC1605	051-7202-90	MC74VHC1G32	L1205	010-2285-70	120 ohm/100MHz
D804	001-2630-90	1SS420-TPL3,F			DFT2G	L1206	010-2285-70	120 ohm/100MHz
D805	001-2630-90	1SS420-TPL3,F	IC1606	051-7222-60	MC74VHC1G08	L1207	010-2285-70	120 ohm/100MHz
D806	001-2660-90	RB050L-60DDTE25			DFT2G	L1208	010-3458-51	LBC2518T220MV
FC601	060-2234-90	WFC72F1575CH	IC1609	051-7560-90	TC7SH17FU	L1301	BEZ0122	DLP11SN900HL2L
IC1001	051-6718-90	AK5357VT-E2			(TE85L,F)	L1304	BEZ0122	DLP11SN900HL2L
IC1003	051-7237-28	TC7WH08FU	IC1702	-----	DS90UB301QSQ/	L1306	010-3104-54	600 ohm/100MHz
IC1004	051-7202-90	MC74VHC1G32			NOPB	L1501	010-3564-50	1.5uH
		DFT2G			(LVDS)	L1502	010-3564-50	1.5uH
IC101	-----	R8A77930DB21BG			(Thermal pad)	L1504	010-3108-56	100MHz
		#U0			(802190-051)	L1508	010-3548-50	2.2uH
		(SoC)(BGA)	IC201	051-5488-90	NJU7707F03A1-	L1510	010-3547-51	1.0uH
		(044400-052)			TE2	L1512	BMZ0211	BLM18PG121
IC102	-----	MT41K256M16HA	IC202	051-7547-90	SN74LVC1G07			SN1D
		125IT:E			DCKR	L1513	010-3108-56	100MHz
		(BGA)	IC203	051-7547-90	SN74LVC1G07	L1514	010-3108-56	100MHz
		(DDR3-SDRAM)			DCKR	L1515	BMZ0211	BLM18PG121
		(934210-051)	IC401	051-6934-90	MFI341S2313			SN1D
IC103	-----	MT41K256M16HA	IC402 ▲	051-6226-41	CY25404ZXI-241T	L1516	BMZ0211	BLM18PG121
		125IT:E	IC501	-----	MTFC8GLGDQ-ATI			SN1D
		(BGA)			Z	L1517	BMZ0211	BLM18PG121
		(DDR3-SDRAM)			(MultiMediaCard			SN1D
		(934210-051)			controller)	L1701	010-3124-97	1000 ohm/100MHz
IC106	-----	S25FL127SABMFI			(FBGA)	L1702	BEZ0122	DLP11SN900HL2L
		000			(986000-051)	L1703	010-3124-97	1000 ohm/100MHz
		(SPI-FLASH)	IC606	051-6945-90	NCP380HSNAJ	L201	010-3114-56	MMZ1005Y301CT
		(985500-051)			AAT1G	L301	BMZ0211	BLM18PG121
IC1101	-----	MN864779CTUB	IC607	-----	UBX-G7020-			SN1D
		(HDMI Rx IC)			KT-C1010 A	L302	BMZ0211	BLM18PG121
		(BGA type)			(GPS Receiver)			SN1D
		(649200-051)			(QFN package)	L303	BMZ0211	BLM18PG121
IC1102	-----	BD00IA5EEFJ-ME2			(462990-051)			SN1D
		(LDO REG)	IC703	051-6479-00	AK8858VQ	L304	BMZ0211	BLM18PG121
		(Exposed Pad)	IC801	-----	OZ528ILN-B1-0-TR			SN1D
		(376390-051)			(Thermal pad)	L305	BMZ0211	BLM18PG121
IC1103	051-7222-60	MC74VHC1G08			(394090-051)			SN1D
		DFT2G	IC802	-----	BD9465MUV-ME2	L306	BMZ0211	BLM18PG121
IC1202	051-7281-60	MC74VHC1G14			(LED driver)(QFN)			SN1D
		DFT2G			(611690-051)	L307	BMZ0211	BLM18PG121
IC1203	051-3407-90	TA75S393F	IC803	051-7221-48	TC7S204FU			SN1D
IC1204	051-6663-80	TJA1042T/3,118	IC804	-----	BD00D0AWHFP-	L308	BMZ0211	BLM18PG121
IC1205	051-7262-48	TC7WH14FU-			TR			SN1D
		TE12L,F			(Voltage regulator)	L401	BMZ0211	BLM18PG121
IC1302	051-3776-90	NJM2815GM1-51A			(Thermal pad)			SN1D
IC1304	051-3776-70	NJM2816GM1-			(370990-051)	L402	BMZ0211	BLM18PG121
		51A(TE2)	IC901	051-7202-90	MC74VHC1G32			SN1D
		TPS2546QRTER			DFT2G	L502	BMZ0211	BLM18PG121
IC1306	-----	Q1	IC902	051-3079-90	NJM2742V			SN1D

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
L605	BMZ0221	BLM15AG601 SN1D	NF321	060-3138-90	NFM18PC105 R0J3D	R1029	033-0000-05	1/16W 0 ohm
L606	010-3101-66	MLK1005S22NJT	P1401	076-6023-07	7P	R1030	032-0221-02	1/16W 33 ohm 1%
L608	119-0000-05	1/10W 0 ohm JW	P1501	076-6021-60	10P	R1033	119-0000-05	1/10W 0 ohm JW
L610	010-3113-90	1k ohm/100MHz	P601	092-2249-00	ANT-RECEPT	R1036	119-0000-05	1/10W 0 ohm JW
L611	010-3127-91	220 ohm/100MHz	P901	076-3072-90	90P	R1037	032-0221-99	1/16W 100 ohm 1%
L612	010-3101-61	8.2nH	Q1004	125-0035-91	DTA114EUBTL	R1038	033-0000-05	1/16W 0 ohm
L701	010-3127-94	BLM18PG331 SN1D	Q1005	125-2046-91	DTC114EUBTL	R1039	033-0000-05	1/16W 0 ohm
L702	010-3127-94	BLM18PG331 SN1D	Q1101	125-2046-91	DTC114EUBTL	R104	032-0221-90	1/16W 240 ohm 1%
L703	010-3127-94	BLM18PG331 SN1D	Q1102	125-0035-91	DTA114EUBTL	R1041	033-0000-05	1/16W 0 ohm
L706	010-3103-62	600 ohm/100MHz	Q1201	CAZ0331	2SC4081T106R	R1042	032-0221-75	1/16W 47k ohm F
L707	010-3103-62	600 ohm/100MHz	Q1202	CAZ0331	2SC4081T106R	R1045	119-0000-05	1/10W 0 ohm JW
L801	010-3057-92	47uH 620mA	Q1205	190-1576-60	2SA1576UBTL	R1046	119-0000-05	1/10W 0 ohm JW
L802	010-3514-90	15uH M	Q1206	125-0035-91	DTA114EUBTL	R1047	119-0000-05	1/10W 0 ohm JW
L803	010-3057-92	47uH 620mA	Q1207	CAZ0331	2SC4081T106R	R1048	119-0000-05	1/10W 0 ohm JW
L804	010-3057-92	47uH 620mA	Q1210	125-9028-90	UMX1N-TN	R1049	119-0000-05	1/10W 0 ohm JW
L805	010-3550-50	33uH	Q1212	CAZ0331	2SC4081T106R	R1056	032-0221-15	1/16W 56 ohm
L806	010-3550-50	33uH	Q1213	CAZ0331	2SC4081T106R	R1057	032-0221-15	1/16W 56 ohm
L901	010-3127-91	220 ohm/100MHz	Q1214	190-1576-60	2SA1576UBTL	R1058	033-0000-05	1/16W 0 ohm
L903	010-3127-91	220 ohm/100MHz	Q1503	192-4116-00	2SC4116	R1059	033-0000-05	1/16W 0 ohm
L904	010-3127-91	220 ohm/100MHz	Q1504	125-7016-90	RZQ050P01TR	R1069	032-0221-02	1/16W 33 ohm 1%
L905	BMZ0211	BLM18PG121 SN1D	Q1604	125-2046-91	DTC114EUBTL	R1071	032-0221-74	1/16W 10k ohm 1%
L906	BMZ0211	BLM18PG121 SN1D	Q401	125-2046-91	DTC114EUBTL	R1074	032-0221-08	1/16W 1k ohm F
L907	BMZ0211	BLM18PG121 SN1D	Q4801	125-2027-92	DTC124EUA	R1101	033-0000-05	1/16W 0 ohm
L908	BMZ0211	BLM18PG121 SN1D	Q4804	CAZ0331	2SC4081T106R	R1102	032-0221-02	1/16W 33 ohm 1%
L909	010-3127-91	220 ohm/100MHz	Q4805	125-2027-91	DTC114EUA	R1104	032-0221-55	1/16W 1.5k ohm F
L910	010-3127-91	220 ohm/100MHz	Q501	191-1197-50	2SB1197K Q,R	R1105	032-0221-56	1/16W 22k ohm F
NF1101	010-3612-90	EXC28CG900U	Q502	125-2046-91	DTC114EUBTL	R1106	032-0221-09	1/16W 33k ohm F
NF1102	010-3612-90	EXC28CG900U	Q801	CAZ0331	2SC4081T106R	R1107	032-0221-02	1/16W 33 ohm 1%
NF1201	010-3609-90	DLW43SH510XK2L	Q802	190-1576-60	2SA1576UBTL	R1108	033-0000-05	1/16W 0 ohm
NF301	060-3138-90	NFM18PC105 R0J3D	Q804	125-2027-92	DTC124EUA	R1109	033-0000-05	1/16W 0 ohm
NF302	060-3138-90	NFM18PC105 R0J3D	Q805	125-0021-92	DTA124EUA	R1110	032-0221-75	1/16W 47k ohm F
NF303	060-3138-90	NFM18PC105 R0J3D	Q807	190-1576-60	2SA1576UBTL	R1111	032-0221-02	1/16W 33 ohm 1%
NF304	060-3138-90	NFM18PC105 R0J3D	Q808	CAZ0331	2SC4081T106R	R1112	032-0221-75	1/16W 47k ohm F
NF305	060-3138-90	NFM18PC105 R0J3D	Q809	125-2027-91	DTC114EUA	R1113	032-0221-75	1/16W 47k ohm F
NF306	060-3138-90	NFM18PC105 R0J3D	Q810	CAZ0331	2SC4081T106R	R1114	032-0221-75	1/16W 47k ohm F
NF307	060-3138-90	NFM18PC105 R0J3D	Q811	190-1576-60	2SA1576UBTL	R1115	032-0221-51	1/16W 4.7k ohm F
NF308	060-3138-90	NFM18PC105 R0J3D	Q812	125-8032-90	RVQ040N05 TR	R1118	032-0210-65	1/10W 27k ohm F
NF309	060-3138-90	NFM18PC105 R0J3D	Q813	125-8062-90	RHU002N06 FRAT106	R1121	119-1011-15	1/10W 100 ohm
NF310	060-3138-90	NFM18PC105 R0J3D	Q814	125-8062-90	RHU002N06 FRAT106	R1122	119-1011-15	1/10W 100 ohm
NF311	060-3138-90	NFM18PC105 R0J3D	Q815	125-8062-90	RHU002N06 FRAT106	R1123	119-0000-05	1/10W 0 ohm JW
NF312	060-3138-90	NFM18PC105 R0J3D	Q816	125-8062-90	RHU002N06 FRAT106	R1124	119-1021-15	1/10W 1k ohm
NF313	060-3130-91	NFM121PC475 B1A3D	Q817	125-8062-90	RHU002N06 FRAT106	R1125	032-0221-06	1/16W 100k ohm F
NF314	060-3138-90	NFM18PC105 R0J3D	Q818	125-8062-90	RHU002N06 FRAT106	R1126	032-0221-74	1/16W 10k ohm 1%
NF315	060-3138-90	NFM18PC105 R0J3D	Q819	192-5810-00	2SC5810 TE12L	R1127	032-0221-29	1/16W 5.1k ohm 1%
NF316	060-3138-90	NFM18PC105 R0J3D	Q820	125-2046-91	DTC114EUBTL	R1128	033-0000-05	1/16W 0 ohm
NF317	060-3138-90	NFM18PC105 R0J3D	Q821	125-8062-90	RHU002N06 FRAT106	R1129	032-0221-83	1/16W 3.3k ohm F
NF318	060-3138-90	NFM18PC105 R0J3D	Q901	125-2046-97	DTC114YUB TL	R113	033-0000-05	1/16W 0 ohm
NF319	060-3138-90	NFM18PC105 R0J3D	Q902	190-1576-60	2SA1576UBTL	R1202	032-0221-74	1/16W 10k ohm 1%
NF320	060-3138-90	NFM18PC105 R0J3D	Q906	125-2027-91	DTC114EUA	R1203	032-0221-74	1/16W 10k ohm 1%
			Q907	125-2027-91	DTC114EUA	R1204	116-1011-15	1/4W 100 ohm
			Q908	125-2027-91	DTC114EUA	R1205	032-0221-74	1/16W 10k ohm 1%
			R1005	032-0221-08	1/16W 1k ohm F	R1206	032-0221-74	1/16W 10k ohm 1%
			R1006	032-0221-08	1/16W 1k ohm F	R1209	032-0221-99	1/16W 100 ohm 1%
			R1008	119-2201-15	1/10W 22 ohm	R1214	119-2221-15	1/10W 2.2k ohm
			R1009	119-2201-15	1/10W 22 ohm	R1215	119-1521-15	1/10W 1.5k ohm
			R101	032-0221-75	1/16W 47k ohm F	R1216	032-0221-83	1/16W 3.3k ohm F
			R1010	032-0221-08	1/16W 1k ohm F	R1226	116-5621-15	1/4W 5.6k ohm
			R1011	119-2201-15	1/10W 22 ohm	R1228	032-0221-74	1/16W 10k ohm 1%
			R1012	033-0000-05	1/16W 0 ohm	R1230	032-0221-11	1/16W 5.6k ohm F
			R1013	033-0000-05	1/16W 0 ohm	R1231	119-1531-15	1/10W 15k ohm
			R1016	033-0000-05	1/16W 0 ohm	R1232	032-0221-09	1/16W 33k ohm F
			R1017	033-0000-05	1/16W 0 ohm	R1233	032-0221-74	1/16W 10k ohm 1%
			R1018	033-0000-05	1/16W 0 ohm	R1234	032-0221-74	1/16W 10k ohm 1%
			R1019	033-0000-05	1/16W 0 ohm	R1235	032-0221-08	1/16W 1k ohm F
			R1020	033-0000-05	1/16W 0 ohm	R1236	032-0221-51	1/16W 4.7k ohm F
			R1021	033-0000-05	1/16W 0 ohm	R1237	033-5641-15	1/16W 560k ohm J
			R1022	033-0000-05	1/16W 0 ohm	R1238	032-0221-99	1/16W 100 ohm 1%
			R1027	032-0221-74	1/16W 10k ohm 1%	R1239	032-0176-00	1/3W 1k ohm J
			R1028	032-0221-75	1/16W 47k ohm F	R1240	032-0221-52	1/16W 1.8k ohm F

REF NO.	PART NO.	DESCRIPTION
R1258	116-1011-15	1/4W 100 ohm
R1259	116-1011-15	1/4W 100 ohm
R126	032-0221-90	1/16W 240 ohm 1%
R1260	119-1031-15	1/10W 10k ohm
R1261	119-1031-15	1/10W 10k ohm
R1262	032-0221-74	1/16W 10k ohm 1%
R1265	033-0000-05	1/16W 0 ohm
R1266	033-0000-05	1/16W 0 ohm
R1267	032-0221-51	1/16W 4.7k ohm F
R1268	032-0221-51	1/16W 4.7k ohm F
R1269	032-0221-99	1/16W 100 ohm 1%
R127	032-0221-90	1/16W 240 ohm 1%
R1271	033-0000-05	1/16W 0 ohm
R1272	119-0000-05	1/10W 0 ohm JW
R1273	119-0000-05	1/10W 0 ohm JW
R1277	032-0210-56	1/10W 22k ohm F
R1278	032-0210-56	1/10W 22k ohm F
R128	032-0221-00	1/16W 68 ohm 1%
R1303	032-0221-83	1/16W 3.3k ohm F
R1304	032-0221-06	1/16W 100k ohm F
R1307	033-0000-05	1/16W 0 ohm
R1309	033-0000-05	1/16W 0 ohm
R1314	033-0000-05	1/16W 0 ohm
R1316	033-0000-05	1/16W 0 ohm
R1317	033-0000-05	1/16W 0 ohm
R1319	119-0000-05	1/10W 0 ohm JW
R1321	033-0000-05	1/16W 0 ohm
R1322	032-0221-51	1/16W 4.7k ohm F
R1323	032-0221-06	1/16W 100k ohm F
R1327	032-0221-75	1/16W 47k ohm F
R1328	032-0221-75	1/16W 47k ohm F
R1344	032-0221-74	1/16W 10k ohm 1%
R1347	033-0000-05	1/16W 0 ohm
R1349	033-0000-05	1/16W 0 ohm
R1351	032-0221-06	1/16W 100k ohm F
R1352	032-0221-33	1/16W 20k ohm F
R1354	033-0000-05	1/16W 0 ohm
R1355	033-0000-05	1/16W 0 ohm
R1401	032-0210-64	1/10W 1k ohm F
R1402	119-1021-15	1/10W 1k ohm
R1403	119-1021-15	1/10W 1k ohm
R1404	032-0221-74	1/16W 10k ohm 1%
R1405	032-0221-99	1/16W 100 ohm 1%
R1406	032-0221-74	1/16W 10k ohm 1%
R148	032-0221-99	1/16W 100 ohm 1%
R1501	032-0221-06	1/16W 100k ohm F
R1502	033-1091-15	1/16W 1 ohm
R1505	033-0000-05	1/16W 0 ohm
R1507	032-0221-06	1/16W 100k ohm F
R1508	032-0221-06	1/16W 100k ohm F
R1509	033-1091-15	1/16W 1 ohm
R1512	033-0000-05	1/16W 0 ohm
R1514	032-0221-06	1/16W 100k ohm F
R1517	032-0221-55	1/16W 1.5k ohm F
R1518	032-0221-95	1/16W 2.7k ohm F
R1519	033-0000-05	1/16W 0 ohm
R1520	033-0000-05	1/16W 0 ohm
R1521	033-0000-05	1/16W 0 ohm
R1522	032-0221-04	1/16W 10 ohm F
R1523	032-0221-76	1/16W 24k ohm F
R1526	032-0221-06	1/16W 100k ohm F
R1527	032-0221-75	1/16W 47k ohm F
R1528	033-4711-15	1/16W 47k ohm J
R1529	032-0225-62	1/16W 56k ohm +/- 0.5%
R153	032-0221-00	1/16W 68 ohm 1%
R1530	032-0221-51	1/16W 4.7k ohm F
R1531	032-0221-74	1/16W 10k ohm 1%
R1532	032-0221-76	1/16W 24k ohm F
R1533	033-2221-15	1/16W 2.2k ohm J
R1534	032-0221-06	1/16W 100k ohm F
R1535	032-0221-74	1/16W 10k ohm 1%
R1536	032-0221-74	1/16W 10k ohm 1%
R1540	032-0221-59	1/16W 220 ohm F
R1541	032-0221-74	1/16W 10k ohm 1%
R155	033-2701-15	1/16W 27 ohm J
R1550	033-0000-05	1/16W 0 ohm

REF NO.	PART NO.	DESCRIPTION
R1552	033-0000-05	1/16W 0 ohm
R1554	032-0221-32	1/16W 220k ohm F
R1555	032-0221-29	1/16W 5.1k ohm 1%
R1556	032-0221-94	1/16W 180k ohm F
R1557	032-0210-00	1/10W 330 ohm F
R1558	032-0210-00	1/10W 330 ohm F
R1559	032-0210-00	1/10W 330 ohm F
R156	033-2701-15	1/16W 27 ohm J
R1562	033-0000-05	1/16W 0 ohm
R1564	032-0210-00	1/10W 330 ohm F
R1565	032-0210-00	1/10W 330 ohm F
R1567	119-4711-15	1/10W 470 ohm
R157	033-2701-15	1/16W 27 ohm J
R158	033-2701-15	1/16W 27 ohm J
R159	033-2701-15	1/16W 27 ohm J
R160	033-2701-15	1/16W 27 ohm J
R1601	032-0221-75	1/16W 47k ohm F
R1608	032-0221-75	1/16W 47k ohm F
R1609	032-0221-75	1/16W 47k ohm F
R161	033-2701-15	1/16W 27 ohm J
R1611	032-0221-75	1/16W 47k ohm F
R1613	033-4711-15	1/16W 470 ohm J
R1614	033-0000-05	1/16W 0 ohm
R162	033-2701-15	1/16W 27 ohm J
R163	033-2701-15	1/16W 27 ohm J
R164	033-2701-15	1/16W 27 ohm J
R165	033-2701-15	1/16W 27 ohm J
R166	033-2701-15	1/16W 27 ohm J
R167	033-2701-15	1/16W 27 ohm J
R168	033-2701-15	1/16W 27 ohm J
R169	033-2701-15	1/16W 27 ohm J
R170	033-2701-15	1/16W 27 ohm J
R1708	033-0000-05	1/16W 0 ohm
R1709	033-0000-05	1/16W 0 ohm
R171	033-2701-15	1/16W 27 ohm J
R1710	032-0221-51	1/16W 4.7k ohm F
R172	033-2701-15	1/16W 27 ohm J
R173	033-2701-15	1/16W 27 ohm J
R175	033-2701-15	1/16W 27 ohm J
R176	033-2701-15	1/16W 27 ohm J
R177	032-0221-74	1/16W 10k ohm 1%
R179	033-2701-15	1/16W 27 ohm J
R180	033-2701-15	1/16W 27 ohm J
R181	033-2701-15	1/16W 27 ohm J
R182	033-2701-15	1/16W 27 ohm J
R183	033-2701-15	1/16W 27 ohm J
R184	032-0221-33	1/16W 20k ohm F
R185	032-0221-33	1/16W 20k ohm F
R186	032-0221-33	1/16W 20k ohm F
R187	032-0221-33	1/16W 20k ohm F
R188	032-0221-33	1/16W 20k ohm F
R189	032-0221-33	1/16W 20k ohm F
R190	032-0221-33	1/16W 20k ohm F
R191	032-0221-33	1/16W 20k ohm F
R192	032-0221-33	1/16W 20k ohm F
R193	032-0221-33	1/16W 20k ohm F
R194	032-0221-33	1/16W 20k ohm F
R195	032-0221-33	1/16W 20k ohm F
R196	032-0221-99	1/16W 100 ohm 1%
R197	032-0221-99	1/16W 100 ohm 1%
R198	032-0221-99	1/16W 100 ohm 1%
R199	032-0221-51	1/16W 4.7k ohm F
R2001	032-0221-02	1/16W 33 ohm 1%
R2002	032-0221-02	1/16W 33 ohm 1%
R2004	032-0221-99	1/16W 100 ohm 1%
R201	032-0221-02	1/16W 33 ohm 1%
R202	032-0221-02	1/16W 33 ohm 1%
R203	032-0221-02	1/16W 33 ohm 1%
R204	032-0221-02	1/16W 33 ohm 1%
R205	032-0221-02	1/16W 33 ohm 1%
R206	032-0221-02	1/16W 33 ohm 1%
R207	033-6801-15	1/16W 68 ohm J
R208	032-0221-02	1/16W 33 ohm 1%
R209	032-0221-02	1/16W 33 ohm 1%
R210	032-0221-74	1/16W 10k ohm 1%
R211	032-0221-74	1/16W 10k ohm 1%

REF NO.	PART NO.	DESCRIPTION
R212	032-0221-02	1/16W 33 ohm 1%
R213	032-0221-02	1/16W 33 ohm 1%
R214	032-0221-02	1/16W 33 ohm 1%
R215	032-0221-02	1/16W 33 ohm 1%
R216	033-3911-15	1/16W 390 ohm J
R217	032-0221-02	1/16W 33 ohm 1%
R218	032-0221-02	1/16W 33 ohm 1%
R219	032-0221-74	1/16W 10k ohm 1%
R220	032-0221-02	1/16W 33 ohm 1%
R221	032-0221-02	1/16W 33 ohm 1%
R222	032-0221-02	1/16W 33 ohm 1%
R224	033-4701-15	1/16W 47 ohm J
R225	032-0221-74	1/16W 10k ohm 1%
R226	032-0221-74	1/16W 10k ohm 1%
R227	032-0221-74	1/16W 10k ohm 1%
R228	032-0221-02	1/16W 33 ohm 1%
R229	032-0221-02	1/16W 33 ohm 1%
R230	032-0221-02	1/16W 33 ohm 1%
R231	032-0221-74	1/16W 10k ohm 1%
R233	119-0000-05	1/10W 0 ohm JW
R234	032-0221-83	1/16W 3.3k ohm F
R235	032-0221-02	1/16W 33 ohm 1%
R236	032-0221-02	1/16W 33 ohm 1%
R242	032-0221-02	1/16W 33 ohm 1%
R243	032-0221-02	1/16W 33 ohm 1%
R245	032-0221-74	1/16W 10k ohm 1%
R249	032-0221-02	1/16W 33 ohm 1%
R250	032-0221-74	1/16W 10k ohm 1%
R252	032-0221-08	1/16W 1k ohm F
R256	032-0221-74	1/16W 10k ohm 1%
R257	032-0221-02	1/16W 33 ohm 1%
R258	032-0221-02	1/16W 33 ohm 1%
R259	032-0221-02	1/16W 33 ohm 1%
R260	033-2221-15	1/16W 2.2k ohm J
R261	033-2221-15	1/16W 2.2k ohm J
R262	032-0221-02	1/16W 33 ohm 1%
R263	032-0221-02	1/16W 33 ohm 1%
R264	032-0221-02	1/16W 33 ohm 1%
R267	032-0221-02	1/16W 33 ohm 1%
R268	032-0221-02	1/16W 33 ohm 1%
R270	033-2221-15	1/16W 2.2k ohm J
R271	032-0221-02	1/16W 33 ohm 1%
R273	032-0221-02	1/16W 33 ohm 1%
R274	032-0221-02	1/16W 33 ohm 1%
R275	032-0221-02	1/16W 33 ohm 1%
R276	032-0221-02	1/16W 33 ohm 1%
R277	032-0221-02	1/16W 33 ohm 1%
R278	032-0221-51	1/16W 4.7k ohm F
R279	032-0221-74	1/16W 10k ohm 1%
R280	032-0221-08	1/16W 1k ohm F
R281	032-0221-02	1/16W 33 ohm 1%
R282	033-2221-15	1/16W 2.2k ohm J
R283	032-0221-51	1/16W 4.7k ohm F
R285	032-0221-74	1/16W 10k ohm 1%
R286	032-0221-74	1/16W 10k ohm 1%
R287	032-0221-74	1/16W 10k ohm 1%
R290	032-0221-02	1/16W 33 ohm 1%
R292	032-0221-51	1/16W 4.7k ohm F
R293	032-0221-74	1/16W 10k ohm 1%
R294	032-0221-74	1/16W 10k ohm 1%
R296	032-0221-74	1/16W 10k ohm 1%
R297	032-0221-74	1/16W 10k ohm 1%
R298	032-0221-74	1/16W 10k ohm 1%
R299	032-0221-74	1/16W 10k ohm 1%
R301	033-1091-15	1/16W 1 ohm
R302	119-0000-05	1/10W 0 ohm JW
R306	033-1091-15	1/16W 1 ohm
R307	033-1091-15	1/16W 1 ohm
R308	033-1091-15	1/16W 1 ohm
R309	033-1091-15	1/16W 1 ohm
R310	033-1091-15	1/16W 1 ohm
R311	032-0221-52	1/16W 1.8k ohm F
R312	032-0221-52	1/16W 1.8k ohm F
R313	033-1091-15	1/16W 1 ohm
R314	033-1091-15	1/16W 1 ohm
R315	033-1091-15	1/16W 1 ohm
R316	033-1091-15	1/16W 1 ohm

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R317	033-1091-15	1/16W 1 ohm	R620	032-0225-52	1/16W 10k ohm	R845	032-0210-64	1/10W 1k ohm F
R319	033-1091-15	1/16W 1 ohm			0.5%	R846	032-0215-61	1/10W 7.5k ohm(F)
R321	033-1091-15	1/16W 1 ohm	R626	116-1001-15	1/4W 10 ohm	R847	032-0246-52	3/4W 0.11 ohm
R322	033-1091-15	1/16W 1 ohm	R627	032-0221-75	1/16W 47k ohm F	R848	032-0246-52	3/4W 0.11 ohm
R323	033-1091-15	1/16W 1 ohm	R629	033-0000-05	1/16W 0 ohm	R849	033-0000-05	1/16W 0 ohm
R324	033-1091-15	1/16W 1 ohm	R631	032-0221-02	1/16W 33 ohm 1%	R850	032-0221-84	1/16W 27k ohm F
R325	033-1091-15	1/16W 1 ohm	R701	119-1011-15	1/10W 100 ohm	R851	032-0221-38	1/16W 300k ohm
R326	033-1091-15	1/16W 1 ohm	R702	033-0000-05	1/16W 0 ohm	R852	032-0221-07	1/16W 56k ohm F
R401	032-0221-51	1/16W 4.7k ohm F	R707	119-0000-05	1/10W 0 ohm JW	R853	032-0221-60	1/16W 3.9k ohm F
R410	032-0221-74	1/16W 10k ohm 1%	R709	AQZ0491	1/10W 47 ohm 1%	R854	032-0221-51	1/16W 4.7k ohm F
R411	033-0000-05	1/16W 0 ohm	R710	032-0221-88	1/16W 30 ohm F	R855	032-0221-09	1/16W 33k ohm F
R412	032-0221-99	1/16W 100 ohm 1%	R715	119-0000-05	1/10W 0 ohm JW	R856	032-0221-84	1/16W 27k ohm F
R414	032-0221-02	1/16W 33 ohm 1%	R717	AQZ0491	1/10W 47 ohm 1%	R858	032-0221-99	1/16W 100 ohm 1%
R416	033-1001-15	1/16W 10 ohm J	R718	032-0221-88	1/16W 30 ohm F	R861	032-0221-70	1/16W 680k ohm F
R418	032-0221-02	1/16W 33 ohm 1%	R739	032-0221-02	1/16W 33 ohm 1%	R862	032-0221-64	1/16W 39k ohm F
R421	033-1001-15	1/16W 10 ohm J	R740	032-0221-61	1/16W 6.8k ohm F	R863	032-0221-85	1/16W 82k ohm F
R422	032-0221-83	1/16W 3.3k ohm F	R747	032-0221-88	1/16W 30 ohm F	R864	116-7511-15	1/4W 750 ohm
R437	032-0221-74	1/16W 10k ohm 1%	R749	032-0221-00	1/16W 68 ohm 1%	R865	033-1101-15	1/16W 11 ohm
R441	032-0221-08	1/16W 1k ohm F	R754	AQZ0491	1/10W 47 ohm 1%	R866	033-0000-05	1/16W 0 ohm
R442	032-0221-04	1/16W 10 ohm F	R755	032-0221-88	1/16W 30 ohm F	R867	032-0221-51	1/16W 4.7k ohm F
R445	032-0221-74	1/16W 10k ohm 1%	R756	033-0000-05	1/16W 0 ohm	R868	032-0221-51	1/16W 4.7k ohm F
R446	033-2201-15	1/16W 22 ohm J	R757	032-0221-83	1/16W 3.3k ohm F	R869	032-0221-51	1/16W 4.7k ohm F
R448	032-0221-74	1/16W 10k ohm 1%	R796	AQZ0491	1/10W 47 ohm 1%	R870	032-0221-51	1/16W 4.7k ohm F
R449	032-0221-74	1/16W 10k ohm 1%	R8003	032-0221-08	1/16W 1k ohm F	R871	032-0221-51	1/16W 4.7k ohm F
R450	032-0221-74	1/16W 10k ohm 1%	R8005	032-0221-28	1/16W 360k ohm	R872	032-0221-09	1/16W 33k ohm F
R452	032-0221-74	1/16W 10k ohm 1%			1%	R873	032-0221-95	1/16W 2.7k ohm F
R454	032-0221-74	1/16W 10k ohm 1%	R8006	032-0221-56	1/16W 22k ohm F	R876	032-0221-51	1/16W 4.7k ohm F
R455	032-0221-74	1/16W 10k ohm 1%	R8007	033-1251-15	1/16W 1.2M ohm J	R878	032-0221-51	1/16W 4.7k ohm F
R456	032-0221-74	1/16W 10k ohm 1%	R8008	032-0802-00	1/16W 300k ohm F	R879	032-0221-85	1/16W 120k ohm F
R457	032-0221-74	1/16W 10k ohm 1%	R8009	033-2751-15	1/16W 2.7M ohm J	R880	032-0225-68	1/16W 5.6k ohm +/-
R458	032-0221-74	1/16W 10k ohm 1%	R801	032-0221-83	1/16W 3.3k ohm F			0.5%
R459	032-0221-74	1/16W 10k ohm 1%	R8010	032-0221-28	1/16W 360k ohm	R881	032-0225-74	1/16W 6.8k ohm +/-
R460	032-0221-74	1/16W 10k ohm 1%			1%			0.5%
R462	032-0221-74	1/16W 10k ohm 1%	R8011	033-5651-15	1/16W 5.6M ohm J	R882	032-0221-11	1/16W 5.6k ohm F
R463	032-0221-74	1/16W 10k ohm 1%	R8012	033-5641-15	1/16W 560k ohm J	R883	032-0221-74	1/16W 10k ohm 1%
R464	032-0221-74	1/16W 10k ohm 1%	R8013	032-0221-70	1/16W 680k ohm F	R884	033-0000-05	1/16W 0 ohm
R465	032-0221-74	1/16W 10k ohm 1%	R8014	032-0221-86	1/16W 82k ohm F	R886	116-7511-15	1/4W 750 ohm
R466	032-0221-74	1/16W 10k ohm 1%	R8015	033-1061-15	1/16W 10M ohm J	R887	032-0221-51	1/16W 4.7k ohm F
R467	032-0221-74	1/16W 10k ohm 1%	R8016	033-2251-15	1/16W 2.2M ohm J	R889	119-0000-05	1/10W 0 ohm JW
R468	032-0221-74	1/16W 10k ohm 1%	R8017	033-1061-15	1/16W 10M ohm J	R890	032-0221-99	1/16W 100 ohm 1%
R469	032-0221-74	1/16W 10k ohm 1%	R8018	033-1061-15	1/16W 10M ohm J	R891	119-0000-05	1/10W 0 ohm JW
R470	032-0221-74	1/16W 10k ohm 1%	R802	032-0221-65	1/16W 68k ohm F	R892	119-0000-05	1/10W 0 ohm JW
R471	032-0221-74	1/16W 10k ohm 1%	R803	032-0210-73	1/10W 390 ohm 1%	R893	119-0000-05	1/10W 0 ohm JW
R472	032-0221-74	1/16W 10k ohm 1%	R804	119-2231-15	1/10W 22k ohm	R895	033-0000-05	1/16W 0 ohm
R474	032-0221-74	1/16W 10k ohm 1%	R806	032-0210-40	1/10W 1.3k ohm F	R896	033-0000-05	1/16W 0 ohm
R475	032-0221-74	1/16W 10k ohm 1%	R807	032-0210-81	1/10W 2.7k ohm F	R897	033-0000-05	1/16W 0 ohm
R476	032-0221-74	1/16W 10k ohm 1%	R808	032-0210-16	1/10W 1.2k ohm F	R898	032-0221-83	1/16W 3.3k ohm F
R477	119-0000-05	1/10W 0 ohm JW	R809	032-0210-36	1/10W 22 ohm F	R901	032-0221-74	1/16W 10k ohm 1%
R478	119-0000-05	1/10W 0 ohm JW	R810	032-0210-58	1/10W 12k ohm F	R902	032-0221-83	1/16W 3.3k ohm F
R479	119-0000-05	1/10W 0 ohm JW	R811	032-0210-85	1/10W 150 ohm F	R903	032-0221-33	1/16W 20k ohm F
R480	119-0000-05	1/10W 0 ohm JW	R812	032-0221-51	1/16W 4.7k ohm F	R904	032-0221-08	1/16W 1k ohm F
R4801	116-3911-15	1/4W 390 ohm	R813	032-0221-74	1/16W 10k ohm 1%	R905	032-0221-84	1/16W 27k ohm F
R4802	032-0221-56	1/16W 22k ohm F	R814	032-0221-74	1/16W 10k ohm 1%	R906	032-0221-84	1/16W 27k ohm F
R507	032-0221-75	1/16W 47k ohm F	R815	119-2221-15	1/10W 2.2k ohm	R911	033-8211-15	1/16W 820 ohm J
R508	032-0221-74	1/16W 10k ohm 1%	R816	032-0221-74	1/16W 10k ohm 1%	R912	032-0221-56	1/16W 22k ohm F
R509	033-5611-15	1/16W 560 ohm J	R818	032-0221-51	1/16W 4.7k ohm F	R917	032-0221-99	1/16W 100 ohm 1%
R510	032-0221-08	1/16W 1k ohm F	R821	032-0221-59	1/16W 220 ohm F	R949	032-0221-84	1/16W 27k ohm F
R511	033-2221-15	1/16W 2.2k ohm J	R822	032-0221-33	1/16W 20k ohm F	R950	032-0221-84	1/16W 27k ohm F
R514	032-0221-02	1/16W 33 ohm 1%	R823	033-4711-15	1/16W 470 ohm J	R951	032-0221-56	1/16W 22k ohm F
R515	032-0221-02	1/16W 33 ohm 1%	R824	032-0210-88	1/10W 5.1k ohm F	R952	032-0221-56	1/16W 22k ohm F
R516	032-0221-02	1/16W 33 ohm 1%	R825	032-0210-83	1/10W 3.9k ohm	R953	033-2201-15	1/16W 22 ohm J
R517	032-0221-02	1/16W 33 ohm 1%			1%	R954	032-0221-61	1/16W 6.8k ohm F
R518	032-0221-02	1/16W 33 ohm 1%	R826	032-0210-52	1/10W 10k ohm F	R968	032-0221-99	1/16W 100 ohm 1%
R519	032-0221-02	1/16W 33 ohm 1%	R827	032-0210-95	1/10W 2k ohm F	R969	032-0221-99	1/16W 100 ohm 1%
R520	032-0221-02	1/16W 33 ohm 1%	R828	032-0210-26	1/10W 82 ohm F	R971	032-0210-31	1/10W 180 ohm F
R521	032-0221-02	1/16W 33 ohm 1%	R829	032-0221-83	1/16W 3.3k ohm F	R973	033-0000-05	1/16W 0 ohm
R522	032-0221-02	1/16W 33 ohm 1%	R831	032-0221-56	1/16W 22k ohm F	R974	033-0000-05	1/16W 0 ohm
R524	033-0000-05	1/16W 0 ohm	R832	032-0221-56	1/16W 22k ohm F	R975	033-0000-05	1/16W 0 ohm
R525	032-0221-75	1/16W 47k ohm F	R833	032-0221-75	1/16W 47k ohm F	R976	033-0000-05	1/16W 0 ohm
R528	032-0221-74	1/16W 10k ohm 1%	R837	032-0221-86	1/16W 82k ohm F	R977	033-0000-05	1/16W 0 ohm
R601	033-0000-05	1/16W 0 ohm	R838	032-0221-09	1/16W 33k ohm F	R978	032-0221-02	1/16W 33 ohm 1%
R602	033-0000-05	1/16W 0 ohm	R839	032-0210-75	1/10W 820 ohm F	R979	032-0221-02	1/16W 33 ohm 1%
R612	033-0000-05	1/16W 0 ohm	R840	032-0210-00	1/10W 330 ohm F	R980	032-0221-02	1/16W 33 ohm 1%
R613	033-0000-05	1/16W 0 ohm	R841	032-0210-75	1/10W 820 ohm F	R981	032-0221-02	1/16W 33 ohm 1%
R618	116-1001-15	1/4W 10 ohm	R842	032-0210-00	1/10W 330 ohm F	R982	119-0000-05	1/10W 0 ohm JW
R619	032-0225-55	1/16W 7.5k ohm +/-	R843	032-0210-70	1/10W 680 ohm 1%	R983	119-0000-05	1/10W 0 ohm JW
		0.5%	R844	032-0210-63	1/10W 3k ohm F	R986	119-0000-05	1/10W 0 ohm JW

REF NO.	PART NO.	DESCRIPTION
RN1006	050-0156-53	1/16W 0 ohm x4
RN101	050-0157-09	1/16W 15 ohm x2
RN1010	050-0156-53	1/16W 0 ohm x4
RN102	050-0157-09	1/16W 15 ohm x2
RN103	050-0157-09	1/16W 15 ohm x2
RN104	050-0157-09	1/16W 15 ohm x2
RN1101	050-0156-59	1/16W 33 ohm x4
RN1102	050-0156-59	1/16W 33 ohm x4
RN1103	050-0156-59	1/16W 33 ohm x4
RN1104	050-0156-59	1/16W 33 ohm x4
RN1105	050-0156-59	1/16W 33 ohm x4
RN1301	050-0156-53	1/16W 0 ohm x4
RN201	050-0156-57	1/16W 10k ohm x4
RN204	050-0156-59	1/16W 33 ohm x4
RN205	050-0156-59	1/16W 33 ohm x4
RN206	050-0156-59	1/16W 33 ohm x4
RN207	050-0156-59	1/16W 33 ohm x4
RN209	050-0156-59	1/16W 33 ohm x4

REF NO.	PART NO.	DESCRIPTION
RN210	050-0140-69	1/32W 56 ohm x4J
RN211	050-0156-77	1/16W 68 ohm x4
RN217	050-0156-59	1/16W 33 ohm x4
RN218	050-0156-55	1/16W 2.2k ohm x4
RN219	050-0140-55	1/32W 2.2k ohmx4J
RN220	050-0156-57	1/16W 10k ohm x4
RN221	050-0156-63	1/16W 47k ohm x4
RN222	050-0156-63	1/16W 47k ohm x4
RN223	050-0156-59	1/16W 33 ohm x4
RN501	050-0156-63	1/16W 47k ohm x4
RN701	050-0156-59	1/16W 33 ohm x4
RN702	050-0156-59	1/16W 33 ohm x4
RN901	050-0156-53	1/16W 0 ohm x4
RN902	050-0156-59	1/16W 33 ohm x4
SUP1301	001-4323-90	RCLAMP0502A
SUP1303	001-4323-90	RCLAMP0502A
VR1204	001-9213-50	EZJZ1V270EA
VR1206	001-9213-50	EZJZ1V270EA

REF NO.	PART NO.	DESCRIPTION
VR1207	001-9210-50	AVR-M1608C270MTAAD
X1101	061-3608-90	FA-238 27MHz
X401	061-3593-80	NX3225GA 48MHz
X601	061-4568-90	DSB221SDM 26MHz
X604	061-9227-80	32.768KHz
ZD1201	001-4330-32	UDZV TE-17 18B
ZD1202	001-4330-32	UDZV TE-17 18B
ZD1204	001-0529-32	MA8056-M
ZD1205	001-0529-47	MA8091-M
ZD1206	001-0529-47	MA8091-M
ZD1207	001-4330-32	UDZV TE-17 18B
ZD1208	001-0529-14	MA8030-L
ZD801	001-0529-44	MA8082-M
PWB	039-4618-00	PWB(WITHOUT COMPONENTS)

△
IF PWB(B5) section : PH-3771B-A, PH-3772B-A, PH-3773B-A

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
ANT101	092-2253-01	ANT-RECEPT	C510	043-4402-90	16V 1uF	D503	001-0516-90	MA111
C101	046-1022-58	50V 1000pF	C511	165-1073-35	16V 100uF	D702	001-2633-90	1SS388-TPL3,F
C102	046-1022-58	50V 1000pF	C512	046-1032-78	0.01uF K B	D703	001-2633-90	1SS388-TPL3,F
C103	046-1022-58	50V 1000pF	C513	043-7400-90	16V 22uF	FE101	△ -----	TUNER PACK (XMT-DP146) (For PH3771/3B)
C104	046-1022-58	50V 1000pF	C514	045-1011-50	100pFJ CH		△ -----	TUNER PACK (XMT-DP1166) (For PH3772B)
C108	042-4025-90	16V 47uF	C610	165-1073-35	16V 100uF	IC102	051-3761-90	BD00HC0EEFJ- ME2
C109	042-4035-95	16V 100uF	C614	042-0638-51	16V 220uF	IC103	051-3770-90	BD00HA3EEFJ- ME2
C110	043-4306-90	1uF	C616	043-4402-90	16V 1uF	IC205	051-3034-90	NJM4558V
C111	046-1042-78	0.1uF K B	C618	043-4402-90	16V 1uF	IC206	051-3034-90	NJM4558V
C112	046-1022-58	50V 1000pF	C619	165-4763-35	16V 47uF	IC207	051-3774-90	NJM11100F1
C113	046-1022-58	50V 1000pF	C701	043-5709-90	50V 1uF K	IC210	051-3034-90	NJM4558V
C118	045-1801-50	18pFJ CH	C702	178-1052-78	25V 1uF	IC302	051-6663-80	TJA1042T/3,118
C119	045-1801-50	18pFJ CH	C703	042-4442-01	25V 1000uF	IC303	051-3711-60	S-1142D50H- E6T2U
C124	042-4035-98	16V 47uF	C704	042-4442-01	25V 1000uF	IC501	051-5848-90	IL207AT
C125	043-0311-20	1uF 10V	C705	165-1063-55	35V 10uF	IC502	051-7249-90	TC7WH04FK
C126	043-0311-20	1uF 10V	C706	042-4035-85	16V 22uF	IC503	051-3774-90	NJM11100F1
C127	042-4035-98	16V 47uF	C707	165-2263-35	16V 22uF	IC701	051-3741-91	NJW4184U2-33A
C128	168-1052-78	16V 1uF K	C708	043-4306-90	1uF	IC702	051-3519-90	NJU7771F05-TE2
C129	168-1052-78	16V 1uF K	C709	042-0638-51	16V 220uF	IC703	-----	MAX16933ATIR/ V+T (Buck Controller) (TQFN-EP) (366390-051)
C130	043-0603-90	16V 10uF	C710	042-4035-98	16V 47uF	J201	074-4017-28	28P
C131	165-4763-35	16V 47uF	C711	043-4402-90	16V 1uF	J301	074-4017-20	20P
C202	168-1052-78	16V 1uF K	C713	045-5096-50	5pF +/-0.25pF CH	J601	074-2306-10	60P
C203	045-1011-50	100pFJ CH	C714	046-2222-58	2200pF K B	J602	074-2306-90	40P
C206	043-0570-90	16V 2.2uF K	C715	043-0603-90	16V 10uF	L102	010-3104-53	220 ohm/100MHz
C210	046-1042-78	0.1uF K B	C716	043-5709-90	50V 1uF K	L103	010-3104-53	220 ohm/100MHz
C244	043-4402-90	16V 1uF	C717	168-1042-38	50V 0.1uF K	L104	010-3104-53	220 ohm/100MHz
C245	043-0603-90	16V 10uF	C720	168-1042-38	50V 0.1uF K	L202	010-3442-50	LBM2016T3R3J
C249	043-4402-90	16V 1uF	C725	045-1007-50	10 +/-0.5pF CH	L206	010-3104-54	600 ohm/100MHz
C250	168-1052-78	16V 1uF K	C726	046-2222-58	2200pF K B	L301	010-3105-62	1k ohm/100MHz
C263	168-1042-38	50V 0.1uF K	C727	168-1042-38	50V 0.1uF K	L307	BMZ0211	BLM18PG121 SN1D
C266	046-1032-78	0.01uF K B	C728	168-1042-38	50V 0.1uF K	L308	010-3104-53	220 ohm/100MHz
C267	045-1011-50	100pFJ CH	C733	168-1042-38	50V 0.1uF K	L309	010-3105-62	1k ohm/100MHz
C268	043-0603-90	16V 10uF	C734	043-7707-90	50V 10uF	L310	010-3105-62	1k ohm/100MHz
C269	046-3312-58	330pF K B	C735	043-7700-90	50V 4.7uF	L311	010-3105-62	1k ohm/100MHz
C270	046-2222-58	2200pF K B	C736	043-7700-90	50V 4.7uF	L600	010-3104-53	220 ohm/100MHz
C271	043-0570-90	16V 2.2uF K	C737	043-7300-90	10V 47uF	L601	010-3127-91	220 ohm/100MHz
C272	043-4402-90	16V 1uF	C738	043-7300-90	10V 47uF	L602	010-3127-91	220 ohm/100MHz
C273	043-0603-90	16V 10uF	C740	042-4035-91	6.3V 100uF	L701	010-3105-62	1k ohm/100MHz
C274	046-3312-58	330pF K B	C742	042-4035-95	16V 100uF	L702	010-3075-56	10uH
C275	046-2222-58	2200pF K B	C743	043-0563-90	16V 47uF	L703	010-3075-57	22uH
C276	AAZ0254	50V 0.1uF	C744	043-7700-90	50V 4.7uF	L704	010-3581-50	NRS8040T4R7 NJGJV
C282	043-0603-90	16V 10uF	C745	043-7700-90	50V 4.7uF	L705	010-3104-55	MPZ1608S102AT
C283	043-4402-90	16V 1uF	C746	168-2222-55	2200pF K	P501	076-0569-02	2P
C284	043-0575-90	25V 0.47uF	C747	168-1042-78	16V 0.1uF K	P701	076-6021-56	6P
C285	046-1042-78	0.1uF K B	C748	168-1042-78	16V 0.1uF K	P702	076-6021-60	10P
C286	046-1042-78	0.1uF K B	C749	043-4306-90	1uF	Q201	192-4081-00	2SC4081
C287	046-1042-78	0.1uF K B	C751	045-2701-50	27pFJ CH	Q204	191-1197-50	2SB1197K Q,R
C288	046-1042-78	0.1uF K B	C752	042-4035-82	25V 47uF	Q205	125-2026-91	UNR5211G
C289	165-2263-35	16V 22uF	C753	AAZ0264	16V 1uF	Q206	125-2046-91	DTC114EUBTL
C292	166-2221-50	2200pF CH	C754	046-1022-58	50V 1000pF	Q207	190-1586-00	2SA1586 O,Y,G
C293	168-2222-55	2200pF K	C755	AAZ0264	16V 1uF	Q309	125-9028-90	UMX1N-TN
C295	168-2232-55	0.022uF K	C756	046-1022-58	50V 1000pF	Q501	192-4081-00	2SC4081
C296	168-2222-55	2200pF K	C757	046-1522-58	1500pF K B	Q502	191-1197-50	2SB1197K Q,R
C330	043-4402-90	16V 1uF	C758	046-1522-58	1500pF K B	Q503	125-2026-91	UNR5211G
C331	165-4763-35	16V 47uF	C759	043-5709-90	50V 1uF K	Q701	125-8048-90	SQJ942EP-T1-GE3
C332	043-5709-90	50V 1uF K	C760	168-2222-55	2200pF K	Q702	125-8048-90	SQJ942EP-T1-GE3
C333	178-1055-79	1uF	C761	043-7707-90	50V 10uF	R101	033-1031-15	1/16W 10k ohm J
C337	046-3322-58	3300pF K B	C762	046-1022-58	50V 1000pF	R106	033-0000-05	1/16W 0 ohm
C338	046-1042-78	0.1uF K B	C763	046-1022-58	50V 1000pF	R112	033-3311-15	1/16W 330 ohm J
C339	165-1063-55	35V 10uF	D101	001-2403-90	M1F60	R115	033-0000-05	1/16W 0 ohm
C342	ADZ0336	16V 22uF	D1312	001-2669-90	RBQ10B65AFHTL	R117	032-0221-08	1/16W 1k ohm F
C343	043-0603-90	16V 10uF	D201	001-0367-91	1SS226	R120	032-0221-08	1/16W 1k ohm F
C345	168-2242-58	0.22uF K	D203	001-2644-90	RB161M-20FTR			
C349	043-0566-90	50V 2.2uF K	D205	001-2412-90	RR264M-400			
C350	168-1022-55	1000pF K	D207	001-2403-90	M1F60			
C351	168-1022-55	1000pF K	D208	001-2403-90	M1F60			
C501	168-2212-55	220pF K	D301	001-2630-90	1SS420-TPL3,F			
C502	168-2212-55	220pF K	D302	001-1325-90	1SS387			
C503	046-1032-78	0.01uF K B	D303	001-1325-90	1SS387			
C504	045-1011-50	100pFJ CH	D308	001-2412-90	RR264M-400			
C505	046-1045-59	0.1uF Z F	D310	001-1325-90	1SS387			
C506	046-1032-78	0.01uF K B	D311	001-1325-90	1SS387			
C507	168-2212-55	220pF K	D313	001-2630-90	1SS420-TPL3,F			
C508	168-2212-55	220pF K	D501	001-0516-90	MA111			
C509	168-1052-78	16V 1uF K	D502	001-0367-91	1SS226			

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R123	032-0221-08	1/16W 1k ohm F	R280	032-0092-51	1/8W 1k ohm F	R634	033-0000-05	1/16W 0 ohm
R125	033-3301-15	1/16W 33 ohm J	R281	117-2221-15	1/8W 2.2k ohm	R636	033-0000-05	1/16W 0 ohm
R126	033-3301-15	1/16W 33 ohm J	R283	119-0000-05	1/10W 0 ohm JW	R651	033-0000-05	1/16W 0 ohm
R127	033-3301-15	1/16W 33 ohm J	R289	032-0225-59	1/16W 4.3k ohm 0.5%	R652	033-0000-05	1/16W 0 ohm
R131	033-0000-05	1/16W 0 ohm	R290	033-3331-15	1/16W 33k ohm J	R653	033-0000-05	1/16W 0 ohm
R133	119-2221-15	1/10W 2.2k ohm	R296	032-0221-60	1/16W 3.9k ohm F	R658	033-0000-05	1/16W 0 ohm
R134	033-0000-05	1/16W 0 ohm	R297	032-0221-95	1/16W 2.7k ohm F	R661	033-0000-05	1/16W 0 ohm
R136	033-0000-05	1/16W 0 ohm (For PH3771/3B)	R298	119-0000-05	1/10W 0 ohm JW	R662	033-0000-05	1/16W 0 ohm
R137	033-0000-05	1/16W 0 ohm (For PH3772B)	R299	116-1011-15	1/4W 100 ohm	R677	033-0000-05	1/16W 0 ohm
R138	032-0221-50	1/16W 43k ohm F	R301	032-0209-50	1/4W 82 ohm D	R678	033-0000-05	1/16W 0 ohm
R139	033-0000-05	1/16W 0 ohm	R302	032-0210-74	1/10W 470 ohm F	R679	033-0000-05	1/16W 0 ohm
R140	032-0221-62	1/16W 8.2k ohm F	R304	119-0000-05	1/10W 0 ohm JW	R680	033-0000-05	1/16W 0 ohm
R141	119-0000-05	1/10W 0 ohm JW	R333	032-0210-64	1/10W 1k ohm F	R701	032-0221-09	1/16W 33k ohm F
R142	032-0221-50	1/16W 43k ohm F	R339	032-0221-08	1/16W 1k ohm F	R702	032-0221-65	1/16W 68k ohm F
R143	033-0000-05	1/16W 0 ohm	R340	119-0000-05	1/10W 0 ohm JW	R704	033-0000-05	1/16W 0 ohm
R144	032-0221-62	1/16W 8.2k ohm F	R341	119-0000-05	1/10W 0 ohm JW	R705	033-3391-15	1/16W 3.3 ohm J
R145	033-0000-05	1/16W 0 ohm	R342	119-0000-05	1/10W 0 ohm JW	R706	033-3391-15	1/16W 3.3 ohm J
R146	033-0000-05	1/16W 0 ohm	R347	032-0210-59	1/10W 5.6k ohm F	R708	033-0000-05	1/16W 0 ohm
R147	119-0000-05	1/10W 0 ohm JW	R348	032-0210-56	1/10W 22k ohm F	R709	033-0000-05	1/16W 0 ohm
R148	033-0000-05	1/16W 0 ohm	R349	AQZ0692	1/3W 1.2k ohm J	R710	033-0000-05	1/16W 0 ohm
R149	033-0000-05	1/16W 0 ohm	R350	119-0000-05	1/10W 0 ohm JW	R711	033-4791-15	1/16W 4.7 ohm
R203	116-6811-15	1/4W 680 ohm	R351	033-4731-15	1/16W 47k ohm J	R712	032-0225-58	1/16W 20k ohm +/- 0.5%
R204	032-0221-74	1/16W 10k ohm 1%	R358	032-0209-50	1/4W 82 ohm D	R713	032-0221-10	1/16W 15k ohm F
R205	032-0221-63	1/16W 12k ohm F	R359	032-0221-72	1/16W 470 ohm F	R714	032-0221-06	1/16W 100k ohm F
R207	033-1031-15	1/16W 10k ohm J	R360	032-0221-08	1/16W 1k ohm F	R715	032-0221-72	1/16W 470 ohm F
R208	033-1031-15	1/16W 10k ohm J	R501	116-5101-15	1/4W 51 ohm	R716	032-0221-56	1/16W 22k ohm F
R209	032-0221-08	1/16W 1k ohm F	R502	033-1541-15	1/16W 150k ohm J	R717	032-0221-72	1/16W 470 ohm F
R211	119-0000-05	1/10W 0 ohm JW	R503	032-2221-15	1/16W 2.2k ohm J	R718	033-0000-05	1/16W 0 ohm
R235	033-1031-15	1/16W 10k ohm J	R504	033-1031-15	1/16W 10k ohm J	R719	033-0000-05	1/16W 0 ohm
R236	033-2731-15	1/16W 27k ohm J	R505	116-1511-15	1/4W 150 ohm	R720	033-0000-05	1/16W 0 ohm
R237	032-0176-00	1/3W 1k ohm J	R506	116-2711-15	1/4W 270 ohm	R721	033-4791-15	1/16W 4.7 ohm
R238	119-0000-05	1/10W 0 ohm JW	R511	119-0000-05	1/10W 0 ohm JW	R722	032-0225-58	1/16W 20k ohm +/- 0.5%
R242	119-0000-05	1/10W 0 ohm JW	R513	119-0000-05	1/10W 0 ohm JW	R723	033-0000-05	1/16W 0 ohm
R248	119-0000-05	1/10W 0 ohm JW	R516	032-0221-65	1/16W 68k ohm F	R724	032-0221-75	1/16W 47k ohm F
R252	032-0225-70	1/16W 130k ohm 0.5%	R517	032-0221-09	1/16W 33k ohm F	R725	032-0253-50	2W 8m ohm
R253	032-0221-76	1/16W 24k ohm F	R518	033-4731-15	1/16W 47k ohm J	R726	032-0253-50	2W 8m ohm
R265	116-1021-15	1/4W 1k ohm	R520	119-0000-05	1/10W 0 ohm JW	R728	033-0000-05	1/16W 0 ohm
R266	116-1051-15	1/4W 1M ohm	R521	119-0000-05	1/10W 0 ohm JW	R729	033-1011-15	1/16W 100 ohm J
R270	119-0000-05	1/10W 0 ohm JW	R522	119-0000-05	1/10W 0 ohm JW	R730	119-0000-05	1/10W 0 ohm JW
R273	032-0210-71	1/10W 16k ohm 1%	R523	032-0092-51	1/8W 1k ohm F	R731	119-0000-05	1/10W 0 ohm JW
R274	032-0221-09	1/16W 33k ohm F	R524	117-2221-15	1/8W 2.2k ohm	R732	119-0000-05	1/10W 0 ohm JW
R275	032-0225-64	1/16W 9.1k ohm +/- 0.5%	R526	033-0000-05	1/16W 0 ohm	R733	119-0000-05	1/10W 0 ohm JW
R276	032-0221-11	1/16W 5.6k ohm F	R529	033-0000-05	1/16W 0 ohm	R734	119-0000-05	1/10W 0 ohm JW
R277	032-0210-71	1/10W 16k ohm 1%	R530	033-0000-05	1/16W 0 ohm	R735	119-0000-05	1/10W 0 ohm JW
R278	032-0221-57	1/16W 13k ohm F	R622	033-0000-05	1/16W 0 ohm	R736	116-1811-15	1/4W 180 ohm
R279	032-0221-09	1/16W 33k ohm F	R624	033-0000-05	1/16W 0 ohm	VR201	001-9213-50	EZJZ1V270EA
			R626	033-0000-05	1/16W 0 ohm	PWB	039-4619-00	PWB(WITHOUT COMPONENTS)
			R629	033-0000-05	1/16W 0 ohm			
			R630	033-0000-05	1/16W 0 ohm			

△
IF PWB(B5) section : PH-3845B-A

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
ANT101	092-2253-01	ANT-RECEPT	C618	043-4402-90	16V 1uF	IC206	051-3034-90	NJM4558V
C101	046-1022-58	50V 1000pF	C619	165-4763-35	16V 47uF	IC207	051-3774-90	NJM11100F1
C102	046-1022-58	50V 1000pF	C701	043-5709-90	50V 1uF K	IC210	051-3034-90	NJM4558V
C103	046-1022-58	50V 1000pF	C702	178-1052-78	25V 1uF	IC302	051-6663-80	TJA1042T/3,118
C104	046-1022-58	50V 1000pF	C703	042-4442-01	25V 1000uF	IC303	051-3711-60	S-1142D50H-E6T2U
C108	042-4025-90	16V 47uF	C704	042-4442-01	25V 1000uF	IC503	051-3774-90	NJM11100F1
C109	042-4035-95	16V 100uF	C705	165-1063-55	35V 10uF	IC701	051-3741-91	NJW4184U2-33A
C110	043-4306-90	1uF	C706	042-4035-85	16V 22uF	IC702	051-3519-90	NJU7771F05-TE2
C111	046-1042-78	0.1uF K B	C707	165-2263-35	16V 22uF	IC703	-----	MAX16933ATIR/V+T (Buck Controller) (TQFN-EP) (366390-051)
C112	046-1022-58	50V 1000pF	C708	043-4306-90	1uF	J201	074-4017-28	28P
C113	046-1022-58	50V 1000pF	C709	042-0638-51	16V 220uF	J301	074-4017-20	20P
C118	045-1801-50	18pFJ CH	C710	042-4035-98	16V 47uF	J601	074-2306-10	60P
C119	045-1801-50	18pFJ CH	C711	043-4402-90	16V 1uF	J602	074-2306-90	40P
C124	042-4035-98	16V 47uF	C713	045-5096-50	5pF +/-0.25pF CH	L102	010-3104-53	220 ohm/100MHz
C125	043-0311-20	1uF 10V	C714	046-2222-58	2200pF K B	L103	010-3104-53	220 ohm/100MHz
C126	043-0311-20	1uF 10V	C715	043-0603-90	16V 10uF	L104	010-3104-53	220 ohm/100MHz
C127	042-4035-98	16V 47uF	C716	043-5709-90	50V 1uF K	L202	010-3442-50	LBM2016T3R3J
C128	168-1052-78	16V 1uF K	C717	168-1042-38	50V 0.1uF K	L206	010-3104-54	600 ohm/100MHz
C129	168-1052-78	16V 1uF K	C720	168-1042-38	50V 0.1uF K	L301	010-3105-62	1k ohm/100MHz
C130	043-0603-90	16V 10uF	C725	045-1007-50	10 +/-0.5pF CH	L307	BMZ0211	BLM18PG121 SN1D
C131	165-4763-35	16V 47uF	C726	046-2222-58	2200pF K B	L308	010-3104-53	220 ohm/100MHz
C202	168-1052-78	16V 1uF K	C727	168-1042-38	50V 0.1uF K	L309	010-3105-62	1k ohm/100MHz
C203	045-1011-50	100pFJ CH	C728	168-1042-38	50V 0.1uF K	L310	010-3105-62	1k ohm/100MHz
C206	043-0570-90	16V 2.2uF K	C733	168-1042-38	50V 0.1uF K	L311	010-3105-62	1k ohm/100MHz
C210	046-1042-78	0.1uF K B	C734	043-7707-90	50V 10uF	L600	010-3104-53	220 ohm/100MHz
C244	043-4402-90	16V 1uF	C735	043-7700-90	50V 4.7uF	L601	010-3127-91	220 ohm/100MHz
C245	043-0603-90	16V 10uF	C736	043-7700-90	50V 4.7uF	L602	010-3127-91	220 ohm/100MHz
C249	043-4402-90	16V 1uF	C737	043-7300-90	10V 47uF	L701	010-3105-62	1k ohm/100MHz
C250	168-1052-78	16V 1uF K	C738	043-7300-90	10V 47uF	L702	010-3075-56	10uH
C263	168-1042-38	50V 0.1uF K	C740	042-4035-91	6.3V 100uF	L703	010-3075-57	22uH
C266	046-1032-78	0.01uF K B	C742	042-4035-95	16V 100uF	L704	010-3581-50	NRS8040T4R7 NJGJV
C267	045-1011-50	100pFJ CH	C743	043-0563-90	16V 47uF	L705	010-3104-55	MPZ1608S102AT
C268	043-0603-90	16V 10uF	C744	043-7700-90	50V 4.7uF	P501	076-0569-02	2P
C269	046-3312-58	330pF K B	C745	043-7700-90	50V 4.7uF	P701	076-6021-56	6P
C270	046-2222-58	2200pF K B	C746	168-2222-55	2200pF K	P702	076-6021-60	10P
C271	043-0570-90	16V 2.2uF K	C747	168-1042-78	16V 0.1uF K	Q201	192-4081-00	2SC4081
C272	043-4402-90	16V 1uF	C748	168-1042-78	16V 0.1uF K	Q204	191-1197-50	2SB1197K Q,R
C273	043-0603-90	16V 10uF	C749	043-4306-90	1uF	Q205	125-2026-91	UNR5211G
C274	046-3312-58	330pF K B	C751	045-2701-50	27pFJ CH	Q206	125-2046-91	DTC114EUBTL
C275	046-2222-58	2200pF K B	C752	042-4035-82	25V 47uF	Q207	190-1586-00	2SA1586 O,Y,G
C276	AAZ0254	50V 0.1uF	C753	AAZ0264	16V 1uF	Q309	125-9028-90	UMX1N-TN
C282	043-0603-90	16V 10uF	C754	046-1022-58	50V 1000pF	Q701	125-8048-90	SQJ942EP-T1-GE3
C283	043-4402-90	16V 1uF	C755	AAZ0264	16V 1uF	Q702	125-8048-90	SQJ942EP-T1-GE3
C284	043-0575-90	25V 0.47uF	C756	046-1022-58	50V 1000pF	R101	033-1031-15	1/16W 10k ohm J
C285	046-1042-78	0.1uF K B	C757	046-1522-58	1500pF K B	R106	033-0000-05	1/16W 0 ohm
C286	046-1042-78	0.1uF K B	C758	046-1522-58	1500pF K B	R112	033-3311-15	1/16W 330 ohm J
C287	046-1042-78	0.1uF K B	C759	043-5709-90	50V 1uF K	R115	033-0000-05	1/16W 0 ohm
C288	046-1042-78	0.1uF K B	C760	168-2222-55	2200pF K	R117	032-0221-08	1/16W 1k ohm F
C289	165-2263-35	16V 22uF	C761	043-7707-90	50V 10uF	R120	032-0221-08	1/16W 1k ohm F
C292	166-2221-50	2200pF CH	C762	046-1022-58	50V 1000pF	R123	032-0221-08	1/16W 1k ohm F
C293	168-2222-55	2200pF K	C763	046-1022-58	50V 1000pF	R125	033-3301-15	1/16W 33 ohm J
C295	168-2232-55	0.022uF K	D101	001-2403-90	M1F60	R126	033-3301-15	1/16W 33 ohm J
C296	168-2222-55	2200pF K	D201	001-0367-91	1SS226	R127	033-3301-15	1/16W 33 ohm J
C330	043-4402-90	16V 1uF	D203	001-2644-90	RB161M-20FTR	R131	033-0000-05	1/16W 0 ohm
C331	165-4763-35	16V 47uF	D205	001-2412-90	RR264M-400	R133	119-2221-15	1/10W 2.2k ohm
C332	043-5709-90	50V 1uF K	D207	001-2403-90	M1F60	R136	033-0000-05	1/16W 0 ohm
C333	178-1055-79	1uF	D208	001-2403-90	M1F60	R138	032-0221-50	1/16W 43k ohm F
C337	046-3322-58	3300pF K B	D301	001-2630-90	1SS420-TPL3,F	R139	033-0000-05	1/16W 0 ohm
C338	046-1042-78	0.1uF K B	D302	001-1325-90	1SS387	R140	032-0221-62	1/16W 8.2k ohm F
C339	165-1063-55	35V 10uF	D303	001-1325-90	1SS387	R141	119-0000-05	1/10W 0 ohm JW
C342	ADZ0336	16V 22uF	D308	001-2412-90	RR264M-400	R142	032-0221-50	1/16W 43k ohm F
C343	043-0603-90	16V 10uF	D310	001-1325-90	1SS387	R143	033-0000-05	1/16W 0 ohm
C345	168-2242-58	0.22uF K	D311	001-1325-90	1SS387	R144	032-0221-62	1/16W 8.2k ohm F
C349	043-0566-90	50V 2.2uF K	D313	001-2630-90	1SS420-TPL3,F	R145	033-0000-05	1/16W 0 ohm
C350	168-1022-55	1000pF K	D702	001-2633-90	1SS388-TPL3,F	R146	033-0000-05	1/16W 0 ohm
C351	168-1022-55	1000pF K	D703	001-2633-90	1SS388-TPL3,F	R147	119-0000-05	1/10W 0 ohm JW
C509	168-1052-78	16V 1uF K	D1312	001-2669-90	RBQ10B65AFHTL	R148	033-0000-05	1/16W 0 ohm
C510	043-4402-90	16V 1uF	FE101	-----	TUNER PACK (XMT-DP146) (026250-941)	R149	033-0000-05	1/16W 0 ohm
C511	165-1073-35	16V 100uF	IC102	051-3761-90	BD00HC0EEFJ-ME2			
C512	046-1032-78	0.01uF K B	IC103	051-3770-90	BD00HA3EEFJ-ME2			
C513	043-7400-90	16V 22uF	IC205	051-3034-90	NJM4558V			
C514	045-1011-50	100pFJ CH						
C610	165-1073-35	16V 100uF						
C614	042-0638-51	16V 220uF						
C616	043-4402-90	16V 1uF						

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
R203	116-6811-15	1/4W 680 ohm	R333	032-0210-64	1/10W 1k ohm F	R701	032-0221-09	1/16W 33k ohm F
R204	032-0221-74	1/16W 10k ohm 1%	R339	032-0221-08	1/16W 1k ohm F	R702	032-0221-65	1/16W 68k ohm F
R205	032-0221-63	1/16W 12k ohm F	R340	119-0000-05	1/10W 0 ohm JW	R704	033-0000-05	1/16W 0 ohm
R207	033-1031-15	1/16W 10k ohm J	R341	119-0000-05	1/10W 0 ohm JW	R705	033-3391-15	1/16W 3.3 ohm J
R208	033-1031-15	1/16W 10k ohm J	R342	119-0000-05	1/10W 0 ohm JW	R706	033-3391-15	1/16W 3.3 ohm J
R209	032-0221-08	1/16W 1k ohm F	R347	032-0210-59	1/10W 5.6k ohm F	R708	033-0000-05	1/16W 0 ohm
R211	119-0000-05	1/10W 0 ohm JW	R348	032-0210-56	1/10W 22k ohm F	R709	033-0000-05	1/16W 0 ohm
R235	033-1031-15	1/16W 10k ohm J	R349	AQZ0692	1/3W 1.2k ohm J	R710	033-0000-05	1/16W 0 ohm
R236	033-2731-15	1/16W 27k ohm J	R350	119-0000-05	1/10W 0 ohm JW	R711	033-4791-15	1/16W 4.7 ohm
R237	032-0176-00	1/3W 1k ohm J	R351	033-4731-15	1/16W 47k ohm J	R712	032-0225-58	1/16W 20k ohm +/- 0.5%
R238	119-0000-05	1/10W 0 ohm JW	R358	032-0209-50	1/4W 82 ohm D	R713	032-0221-10	1/16W 15k ohm F
R242	119-0000-05	1/10W 0 ohm JW	R359	032-0221-72	1/16W 470 ohm F	R714	032-0221-06	1/16W 100k ohm F
R248	119-0000-05	1/10W 0 ohm JW	R360	032-0221-08	1/16W 1k ohm F	R715	032-0221-72	1/16W 470 ohm F
R252	032-0225-70	1/16W 130k ohm 0.5%	R511	119-0000-05	1/10W 0 ohm JW	R716	032-0221-56	1/16W 22k ohm F
R253	032-0221-76	1/16W 24k ohm F	R513	119-0000-05	1/10W 0 ohm JW	R717	032-0221-72	1/16W 470 ohm F
R265	116-1021-15	1/4W 1k ohm	R516	032-0221-65	1/16W 68k ohm F	R718	033-0000-05	1/16W 0 ohm
R266	116-1051-15	1/4W 1M ohm	R517	032-0221-09	1/16W 33k ohm F	R719	033-0000-05	1/16W 0 ohm
R270	119-0000-05	1/10W 0 ohm JW	R518	033-4731-15	1/16W 47k ohm J	R720	033-0000-05	1/16W 0 ohm
R273	032-0210-71	1/10W 16k ohm 1%	R520	119-0000-05	1/10W 0 ohm JW	R721	033-4791-15	1/16W 4.7 ohm
R274	032-0221-09	1/16W 33k ohm F	R521	119-0000-05	1/10W 0 ohm JW	R722	032-0225-58	1/16W 20k ohm +/- 0.5%
R275	032-0225-64	1/16W 9.1k ohm +/- 0.5%	R522	119-0000-05	1/10W 0 ohm JW	R723	033-0000-05	1/16W 0 ohm
R276	032-0221-11	1/16W 5.6k ohm F	R529	033-0000-05	1/16W 0 ohm	R724	032-0221-75	1/16W 47k ohm F
R277	032-0210-71	1/10W 16k ohm 1%	R530	033-0000-05	1/16W 0 ohm	R725	032-0253-50	2W 8m ohm
R278	032-0221-57	1/16W 13k ohm F	R622	033-0000-05	1/16W 0 ohm	R726	032-0253-50	2W 8m ohm
R279	032-0221-09	1/16W 33k ohm F	R624	033-0000-05	1/16W 0 ohm	R728	033-0000-05	1/16W 0 ohm
R280	032-0092-51	1/8W 1k ohm F	R626	033-0000-05	1/16W 0 ohm	R729	033-1011-15	1/16W 100 ohm J
R281	117-2221-15	1/8W 2.2k ohm	R629	033-0000-05	1/16W 0 ohm	R730	119-0000-05	1/10W 0 ohm JW
R283	119-0000-05	1/10W 0 ohm JW	R630	033-0000-05	1/16W 0 ohm	R731	119-0000-05	1/10W 0 ohm JW
R289	032-0225-59	1/16W 4.3k ohm 0.5%	R634	033-0000-05	1/16W 0 ohm	R732	119-0000-05	1/10W 0 ohm JW
R290	033-3331-15	1/16W 33k ohm J	R636	033-0000-05	1/16W 0 ohm	R733	119-0000-05	1/10W 0 ohm JW
R296	032-0221-60	1/16W 3.9k ohm F	R651	033-0000-05	1/16W 0 ohm	R734	119-0000-05	1/10W 0 ohm JW
R297	032-0221-95	1/16W 2.7k ohm F	R652	033-0000-05	1/16W 0 ohm	R735	119-0000-05	1/10W 0 ohm JW
R298	119-0000-05	1/10W 0 ohm JW	R653	033-0000-05	1/16W 0 ohm	R736	116-1811-15	1/4W 180 ohm
R299	116-1011-15	1/4W 100 ohm	R658	033-0000-05	1/16W 0 ohm	VR201	001-9213-50	EZJZ1V270EA
R301	032-0209-50	1/4W 82 ohm D	R661	033-0000-05	1/16W 0 ohm	PWB	039-4619-00	PWB(WITHOUT COMPONENTS)
R302	032-0210-74	1/10W 470 ohm F	R662	033-0000-05	1/16W 0 ohm			
R304	119-0000-05	1/10W 0 ohm JW	R677	033-0000-05	1/16W 0 ohm			
			R678	033-0000-05	1/16W 0 ohm			
			R679	033-0000-05	1/16W 0 ohm			
			R680	033-0000-05	1/16W 0 ohm			