A	M3 x 6	: N09-2077-05
B	M2.6 x 6 (OC) BLK	: N33-2606-45
C	M2.6 x 6	: N83-2606-46
D	M2.6 x 8 (Br-Tap)	: N87-2608-46
E	M2.6 x 6 (F-Tap)	: N88-2606-46

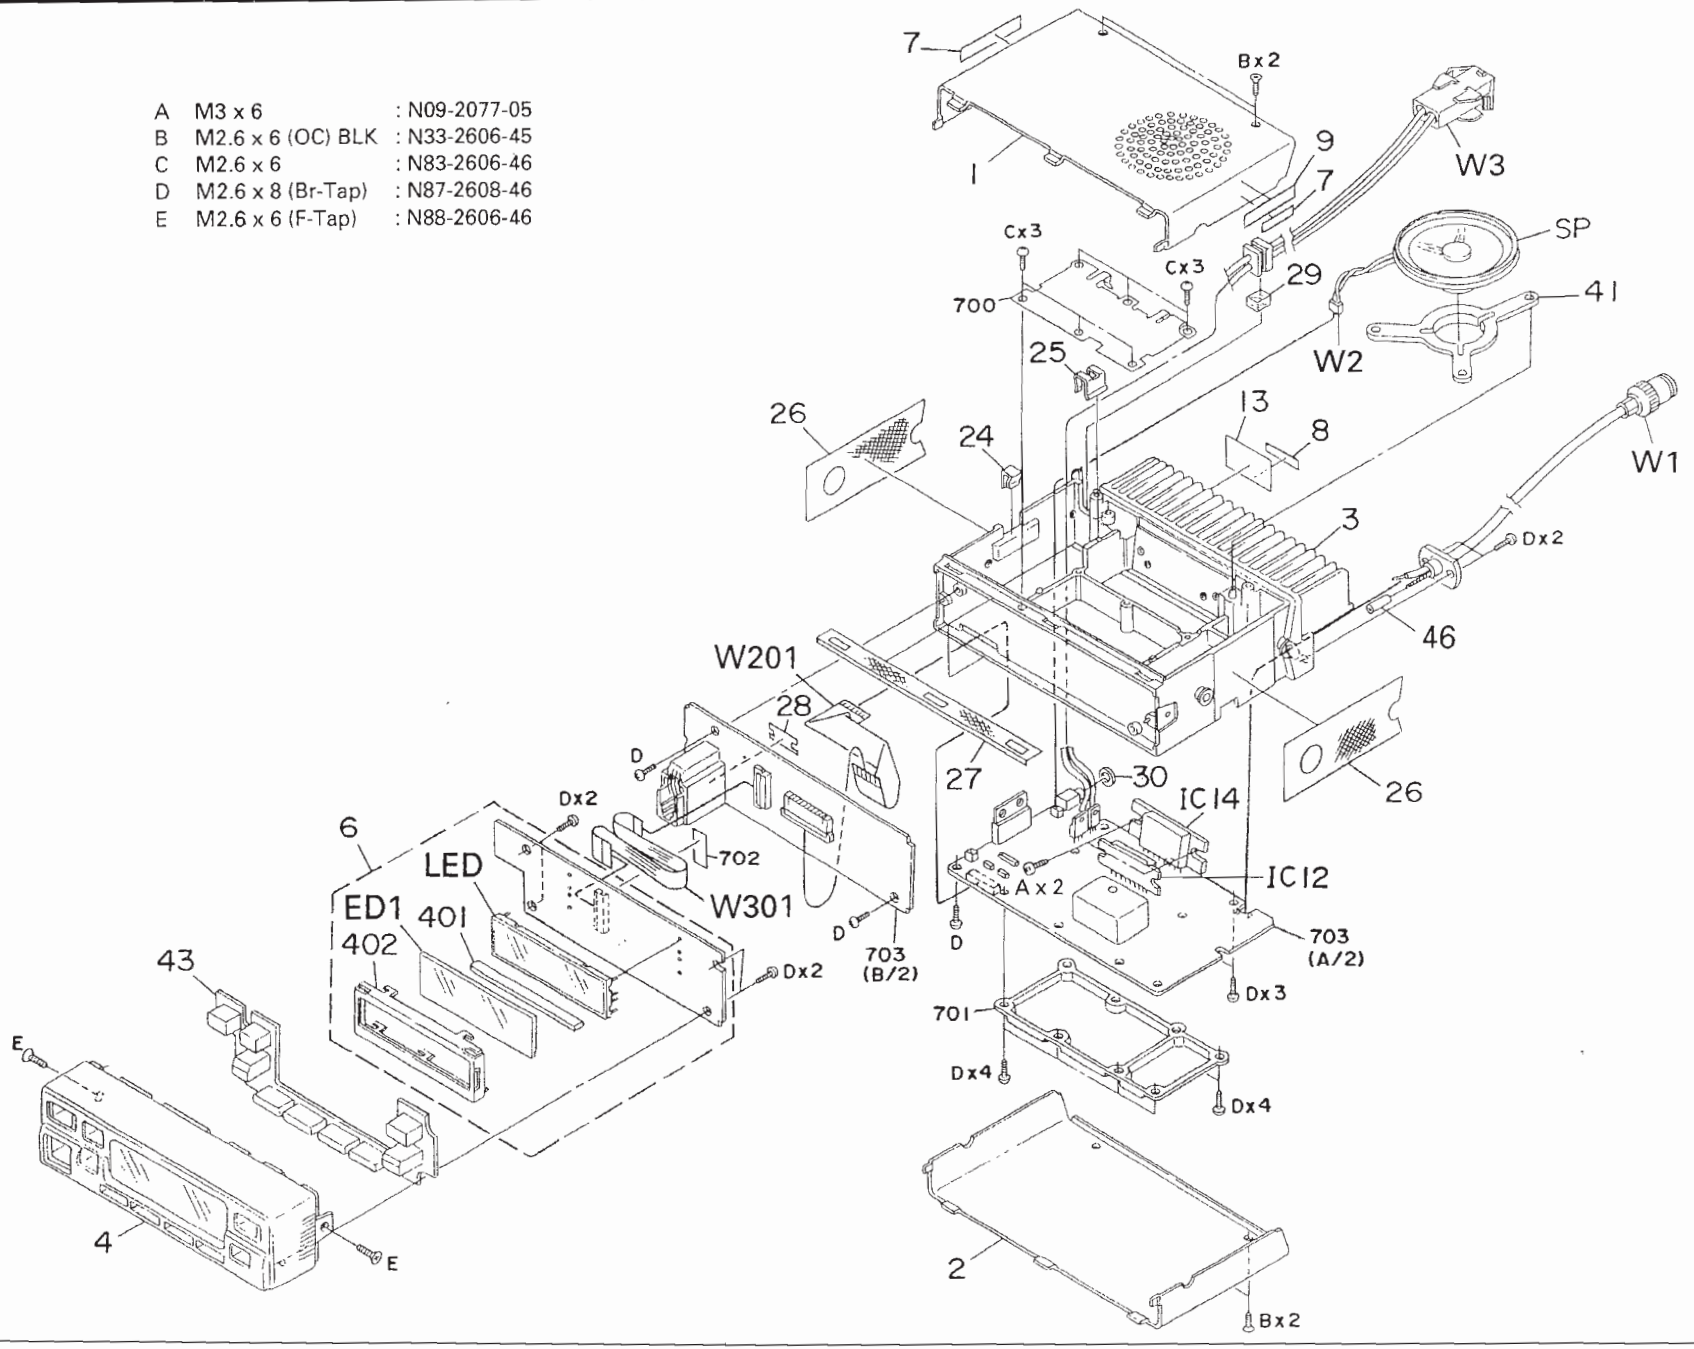

EXPLODED VIEW

TK-940/941

PACKING

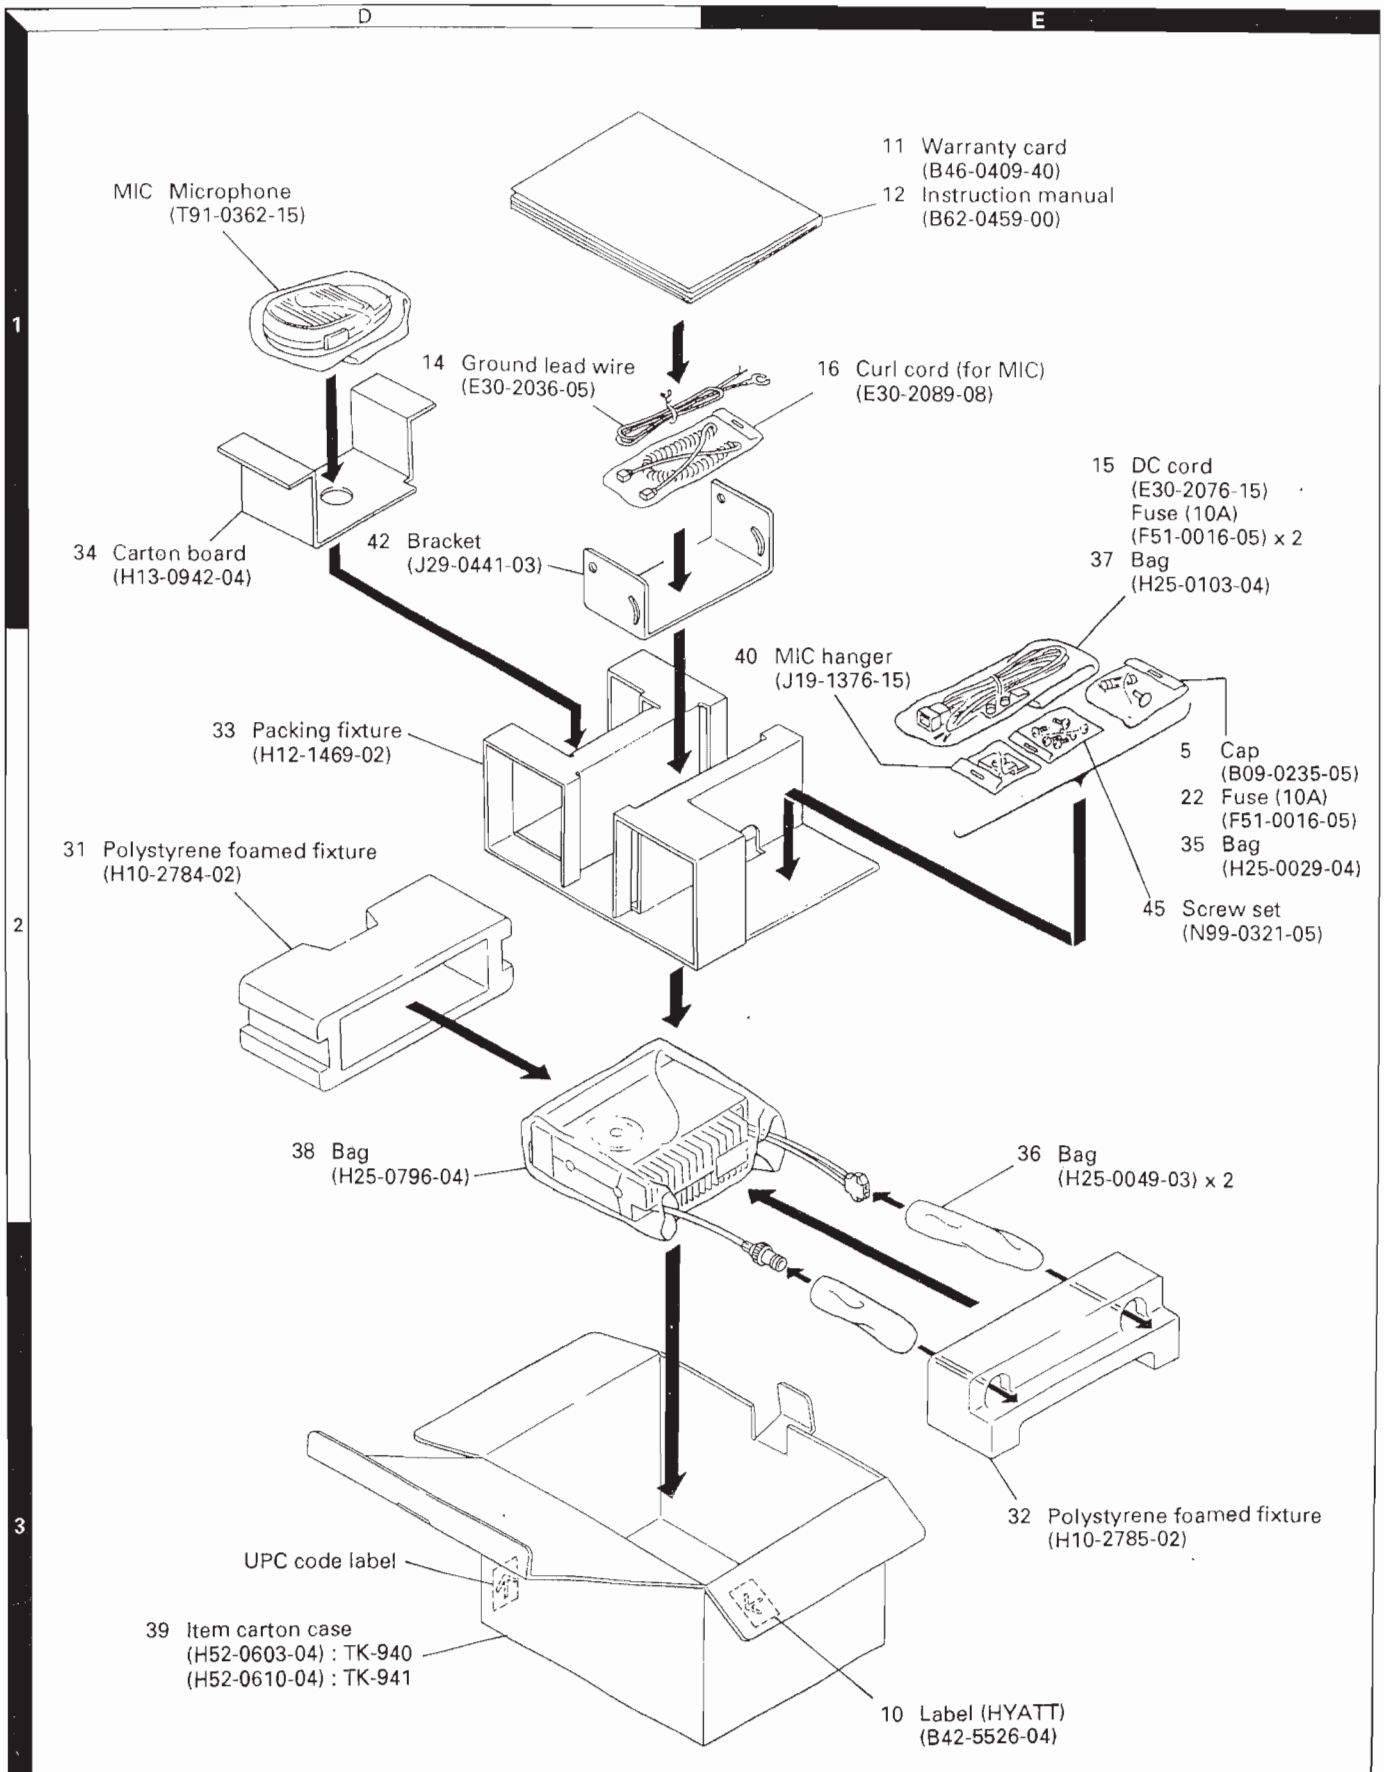
D
E
1
2
3
MIC Microphone
(T91-0362-15)
11 Warranty card
(B46-0409-40)
12 Instruction manual
(B62-0459-00)
14 Ground lead wire
(E30-2036-05)
16 Curl cord (for MIC)
(E30-2089-08)
15 DC cord
(E30-2076-15)
Fuse (10A)
(F51-0016-05) x 2
37 Bag
(H25-0103-04)
34 Carton board
(H13-0942-04)
42 Bracket
(J29-0441-03)
40 MIC hanger
(J19-1376-15)
33 Packing fixture
(H12-1469-02)
5 Cap
(B09-0235-05)
22 Fuse (10A)
(F51-0016-05)
35 Bag
(H25-0029-04)
45 Screw set
(N99-0321-05)
31 Polystyrene foamed fixture
(H10-2784-02)
38 Bag
(H25-0796-04)
36 Bag
(H25-0049-03) x 2
32 Polystyrene foamed fixture
(H10-2785-02)
UPC code label
39 Item carton case
(H52-0603-04) : TK-940
(H52-0610-04) : TK-941
10 Label (HYATT)
(B42-5526-04)

PARTS LIST

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

TK-940/941

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
			TK-940/941			
1	1B		A01-1065-03	METALLIC CABINET(UPPER)		
2	2B		A01-1066-03	METALLIC CABINET(LOWER)		
3	1C	*	A10-1344-01	CHASSIS		
4	2A	*	A62-0349-03	PANEL ASSY		
5	2E	*	B09-0235-05	CAP :ACSY		
6	2A	*	B38-0731-05	LCD ASSY		
7	1B,1C		B42-2455-04	LABEL (M4×8 MAX)		
8	1C		B42-3343-04	LABEL (S/NO)		
9	1C		B42-3394-14	LABEL		
10	3E		B42-5526-04	LABEL (HYATT)		
11	1E		B46-0409-40	WARRANTY CARD		
12	1E	*	B62-0459-00	INSTRUCTION MANUAL		
13	1C	*	B72-0705-04	MODEL NAME PLATE	940	
13	1C	*	B72-0752-04	MODEL NAME PLATE	941	
14	1D		E30-2036-05	GROUND LEAD WIRE :ACSY		
15	2E		E30-2076-15	DC CORD :ACSY		
16	1E		E30-2089-08	CURL CORD(FOR MIC) :ACSY		
W3	1C		E30-2172-15	DC CORD ASSY		
W1	1C		E30-3031-15	ANT CABLE ASSY		
W301	2B	*	E37-0460-05	FLAT CABLE(DISPLY-CONT UNIT)		
W2	1C	*	E37-0461-05	LEAD WIRE WITH CONNECTOR(SP:2P)		
W201	2B	*	E37-0470-05	FLAT CABLE(CONT-TXRX UNIT)		
700	1B	*	F10-2125-04	SHIELDING PLATE(PLL)		
701	2B	*	F10-2126-03	SHIELDING COVER(PLL)		
22	2E		F51-0016-05	FUSE (10A) :ACSY		
-	2E		F51-0016-05	FUSE (10A)･･･2pcs(DC CORD)		
24	1B		G02-0576-14	FLAT SPRING (AF IC)		
25	1B		G02-0711-04	FLAT SPRING (APC/AVR)		
26	1B,2C	*	G10-0764-04	FIBROUS SHEET(CHASSIS)		
27	2B	*	G10-0765-04	FIBROUS SHEET(CHASSIS)		
28	2B	*	G11-0728-04	SHEET (MODULAR JACK)		
29	1C	*	G13-1468-04	CUSHION (DC CORD)		
702	2B		G13-0921-04	CUSHION (LCD ASSY)		
30	2B	*	G53-0776-04	PACKING (PHONE JACK)		
31	2D	*	H10-2784-02	POLYSTYRENE FOAMED FIXTURE		
32	3E	*	H10-2785-02	POLYSTYRENE FOAMED FIXTURE		
33	2D	*	H12-1469-02	PACKING FIXTURE		
34	1D	*	H13-0942-04	CARTON BOARD		
35	2E		H25-0029-04	BAG (60×110)		
36	3E		H25-0049-03	BAG		
37	2E		H25-0103-04	BAG (125×250)		
38	2D	*	H25-0796-04	BAG		
39	3D	*	H52-0603-04	ITEM CARTON CASE	940	
39	3D	*	H52-0610-04	ITEM CARTON CASE	941	
40	2E		J19-1376-15	MIC HANGER :ACSY		
41	1C		J19-1434-04	HOLDER(SP)		
42	1D		J29-0441-03	BRACKET :ACSY		
43	2A	*	K29-4928-02	KEY TOP		
A	2B		N09-2077-05	SEMS SCREW(FINAL MODULE)		
B	1C,2C		N33-2606-45	OVAL HEAD MACHIN SCREW(CASE)		
C	1B,1C		N83-2606-46	PAN HEAD TAPTITE SCREW		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert.

TK-940/941
TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
D	2B,1C		N87-2608-46	BRAZIER HEAD TAPTITE SCREW				
E	2A		N88-2606-46	FLAT HEAD TAPTITE SCREW(PANNEL)				
45	2B		N99-0321-05	SCREW SET		:ACSY		
46	1C		212-2013-05	INSULATING TUBE (ANT CABLE)				
SP	1C		T07-0246-05	SPEAKER (16 OHM 1W)				
MIC	1D		T91-0362-15	MICROPHONE		:ACSY		
IC14	2C		MHW820-1	IC(POWER MODULE)･･FINAL)			940	
IC14	2C		MHW820-3	IC(POWER MODULE)･･FINAL)			941	
IC12	2C		M57775	IC(POWER MODULE)･･DRIVE)			940	
IC12	2C		M57781	IC(POWER MODULE)･･DRIVE)			941	
703	2B,2C	*	X57-4590-10	TX-RX UNIT (A/2,B/2)			940	
703	2B,2C	*	X57-4590-11	TX-RX UNIT (A/2,B/2)			941	
TX-RX UNIT (X57-4590-XX) -10 : TK-940 -11 : TK-941								
C1 ,2			CC73GCH1H101J	CHIP C	100PF	J		
C3			CK73GB1H102K	CHIP C	1000PF	K		
C4 -10			CC73GCH1H101J	CHIP C	100PF	J		
C12 -16			CC73GCH1H101J	CHIP C	100PF	J		
C17			CE04EW1E471M	ELECTRO	470UF	25WV		
C19			CK73GB1H471K	CHIP C	470PF	K		
C20 ,21			CK73GB1H102K	CHIP C	1000PF	K		
C23			C92-0004-05	CHIP TAN	1.0UF	16WV		
C24			C92-0036-05	ELECTRO	4.7UF	16WV		
C25			CK73GB1H471K	CHIP C	470PF	K		
C26			CK73GB1H103K	CHIP C	0.01UF	K		
C27			C92-0507-05	CHIP TAN	4.7UF	6.3WV		
C28			CK73GB1H471K	CHIP C	470PF	K		
C29			C92-0004-05	CHIP TAN	1.0UF	16WV		
C30			CK73FB1E104K	CHIP C	0.10UF	K		
C31			CK73GB1H103K	CHIP C	0.01UF	K		
C32			CK73GB1H472K	CHIP C	4700PF	K		
C33			CK73GB1H103K	CHIP C	0.01UF	K		
C34			CK73GB1H102K	CHIP C	1000PF	K		
C35			CK73GB1H103K	CHIP C	0.01UF	K		
C37			CK73GB1H103K	CHIP C	0.01UF	K		
C38			CC73GCH1H101J	CHIP C	100PF	J		
C39			CK73GB1H103K	CHIP C	0.01UF	K		
C41			C92-0507-05	CHIP TAN	4.7UF	6.3WV		
C42			C92-0543-05	CHIP TAN	3.3UF	10WV		
C43 ,44			C92-0507-05	CHIP TAN	4.7UF	6.3WV		
C45			CC73GCH1H101J	CHIP C	100PF	J		
C46			CK73GB1H102K	CHIP C	1000PF	K		
C47			CK73FF1C105Z	CHIP C	1.0UF	Z		
C48			CK73FB1E104K	CHIP C	0.10UF	K		
C49			CK73GB1H682K	CHIP C	6800PF	K		
C50			CK73FB1E104K	CHIP C	0.10UF	K		
C51			CK73GB1H102K	CHIP C	1000PF	K		
C52			CK73GB1H682K	CHIP C	6800PF	K		
C53			C92-0543-05	CHIP TAN	3.3UF	10WV		
C54 ,55			CC73GCH1H270J	CHIP C	27PF	J		
C56			CK73GB1H682K	CHIP C	6800PF	K		
C57			CC73GCH1H100D	CHIP C	10PF	D		
C58			CK73GB1H103K	CHIP C	0.01UF	K		
C59 ,60			CC73GCH1H221J	CHIP C	220PF	J		
C61			C92-0041-05	ELECTRO	10UF	10WV		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
C62			CK73GB1H103K	CHIP C	0.01UF	K		
C63			CK73GB1H102K	CHIP C	1000PF	K		
C64			CK73GB1H103K	CHIP C	0.01UF	K		
C65			CC73GCH1H101J	CHIP C	100PF	J		
C66			CK73GB1H102K	CHIP C	1000PF	K		
C67			C92-0546-05	CHIP TAN	68UF	6.3WV		
C68 ,69			CK73GB1H103K	CHIP C	0.01UF	K		
C70			CK73GB1H102K	CHIP C	1000PF	K		
C71		*	C92-0044-05	ELECTRO	47UF	10WV		
C72			CC73GCH1H101J	CHIP C	100PF	J		
C73			CK73GB1H102K	CHIP C	1000PF	K		
C74		*	C92-0044-05	ELECTRO	47UF	10WV		
C75			C92-0004-05	CHIP TAN	1.0UF	16WV		
C76 ,77			CK73GB1H103K	CHIP C	0.01UF	K		
C78			CK73FB1E104K	CHIP C	0.10UF	K		
C79			C92-0507-05	CHIP TAN	4.7UF	6.3WV		
C80			CK73GB1C104K	CHIP C	0.10UF	K		
C81			C92-0040-05	ELECTRO	47UF	16WV		
C82			CK73GB1H103K	CHIP C	0.01UF	K		
C83			CC73GCH1H030C	CHIP C	3PF	C		
C84 ,85			CK73GB1H102K	CHIP C	1000PF	K		
C86			CC73GCH1H101J	CHIP C	100PF	J		
C87			CC73GCH1H470J	CHIP C	47PF	J		
C88			CC73GCH1H080D	CHIP C	8PF	D	940	
C88			CC73GCH1H110J	CHIP C	11PF	J	941	
C89			CC73GCH1H470J	CHIP C	47PF	J		
C90			CC73GCH1H030C	CHIP C	3PF	C		
C91			CK73GB1H471K	CHIP C	470PF	K		
C92			CK73GB1H102K	CHIP C	1000PF	K		
C93			CK73FF1C105Z	CHIP C	1.0UF	Z		
C94			CC73GCH1H101J	CHIP C	100PF	J		
C95			CK73GB1H471K	CHIP C	470PF	K		
C96			CK73GB1H102K	CHIP C	1000PF	K		
C97		*	C92-0044-05	ELECTRO	47UF	10WV		
C98			CC73GCH1H101J	CHIP C	100PF	J		
C99		*	C92-0044-05	ELECTRO	47UF	10WV		
C101			CC73GCH1H101J	CHIP C	100PF	J		
C102			CK73GB1H103K	CHIP C	0.01UF	K		
C103			CC73GCH1H270J	CHIP C	27PF	J	940	
C103			CC73GCH1H330J	CHIP C	33PF	J	941	
C104			CC73GCH1H470J	CHIP C	47PF	J		
C105			CK73GB1H471K	CHIP C	470PF	K		
C107			CC73GCH1H101J	CHIP C	100PF	J		
C108			C92-0040-05	ELECTRO	47UF	16WV		
C109			CK73GB1H102K	CHIP C	1000PF	K		
C110			CE04EW1A471M	ELECTRO	470UF	10WV		
C111			CQ92M1H104K	MYLAR C	0.10UF	K		
C112			CC73GCH1HR75C	CHIP C	0.75PF	C		
C113,114			CK73GB1H102K	CHIP C	1000PF	K		
C115			CC73GCH1HR75C	CHIP C	0.75PF	C	940	
C115			CC73GCH1H010C	CHIP C	1PF	C	941	
C116			CC73GCH1H470J	CHIP C	47PF	J		
C117			CK73GB1H102K	CHIP C	1000PF	K		
C118			C92-0004-05	CHIP TAN	1.0UF	16WV		
C119			CK73GB1H102K	CHIP C	1000PF	K		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-4590-XX)

Ref No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
C120			CC73GCH1H470J	CHIP C	47PF	J		
C121			CK73GB1H102K	CHIP C	1000PF	K		
C122			CC73GCH1H020C	CHIP C	2.0PF	C		
C123			CK73GB1H102K	CHIP C	1000PF	K		
C124			CC73GCH1H470J	CHIP C	47PF	J		
C125			C92-0040-05	ELECTRO	47UF	16WV		
C126			CK73GB1H102K	CHIP C	1000PF	K		
C127			CK73FB1H473K	CHIP C	0.047UF	K		
C128			CK73GB1H102K	CHIP C	1000PF	K		
C129			CC73GCH1H101J	CHIP C	100PF	J		
C130			C92-0040-05	ELECTRO	47UF	16WV		
C131			CK73GB1H102K	CHIP C	1000PF	K		
C132			CC73GCH1H101J	CHIP C	100PF	J		
C133			CK73GB1H102K	CHIP C	1000PF	K		
C134			CC73GCH1H470J	CHIP C	47PF	J		
C135			CK73GB1H103K	CHIP C	0.01UF	K		
C136			CC73GCH1H101J	CHIP C	100PF	J		
C137			C92-0040-05	ELECTRO	47UF	16WV		
C138,139			CK73GB1H102K	CHIP C	1000PF	K		
C140			CC73GCH1H030C	CHIP C	3PF	C		
C141			CC73GCH1H470J	CHIP C	47PF	J		
C142			CK73GB1H102K	CHIP C	1000PF	K		
C143			CK73FB1E104K	CHIP C	0.10UF	K		
C144			CC73GCH1H101J	CHIP C	100PF	J		
C145		*	C93-0550-05	FIXED C	1PF		941	
C145		*	C93-0552-05	FIXED C	2PF		940	
C146			CK73GB1H102K	CHIP C	1000PF	K		
C147			CC73GCH1H470J	CHIP C	47PF	J		
C148			CK73GB1H102K	CHIP C	1000PF	K		
C149		*	C93-0552-05	FIXED C	2PF		940	
C150,151			CC73GCH1H101J	CHIP C	100PF	J		
C152			CC73GCH1H010C	CHIP C	1PF	C	940	
C152			CC73GCH1H1R5C	CHIP C	1.5PF	C	941	
C153			CC73GCH1H470J	CHIP C	47PF	J		
C154			CK73EB1H102K	CHIP C	1000PF	K		
C155		*	C93-0556-05	FIXED C	6PF			
C156		*	C93-0552-05	FIXED C	2PF			
C157		*	C93-0550-05	FIXED C	1PF			
C158			C92-0507-05	CHIP TAN	4.7UF	6.3WV		
C159			CC73FCH1H470J	CHIP C	47PF	J		
C160			CC73GCH1H101J	CHIP C	100PF	J		
C161			C92-0004-05	CHIP TAN	1.0UF	16WV		
C162			CK73FB1E104K	CHIP C	0.10UF	K		
C163			CK73GB1H103K	CHIP C	0.01UF	K		
C201			CK73GB1H102K	CHIP C	1000PF	K		
C211			CC73GCH1H101J	CHIP C	100PF	J		
C213			CC73GCH1H101J	CHIP C	100PF	J		
C220-222			CC73GCH1H101J	CHIP C	100PF	J		
C224			CC73GCH1H101J	CHIP C	100PF	J		
C225			C92-0009-05	CHIP TAN	4.7UF	10WV		
C226			CK73GB1H103K	CHIP C	0.01UF	K		
C227,228			CC73GCH1H101J	CHIP C	100PF	J		
C229,230			CK73GB1H103K	CHIP C	0.01UF	K		
C231			C92-0507-05	CHIP TAN	4.7UF	6.3WV		
C232,233			CK73FB1E273K	CHIP C	0.027UF	K		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C234			CK73GB1E223K	CHIP C 0.022UF K		
C235			CC73GCH1H101J	CHIP C 100PF J	940	
C235			CC73GCH1H330J	CHIP C 33PF J	941	
C236			CC73GCH1H101J	CHIP C 100PF J		
C237			CK73FB1E273K	CHIP C 0.027UF K		
C238			CK73GB1H222K	CHIP C 2200PF K		
C239			CK73GB1E223K	CHIP C 0.022UF K		
C240			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C241			CC73GCH1H470J	CHIP C 47PF J		
C242,243			CC73GCH1H101J	CHIP C 100PF J		
C244			CK73GB1E223K	CHIP C 0.022UF K		
C245			CC73GCH1H100D	CHIP C 10PF D		
C246			CK73GB1E223K	CHIP C 0.022UF K		
C247			C92-0004-05	CHIP TAN 1.0UF 16WV		
C248			CK73GB1E223K	CHIP C 0.022UF K		
C249,250			CK73GB1H102K	CHIP C 1000PF K		
C251			CC73GCH1H101J	CHIP C 100PF J		
C252			CK73GB1H122K	CHIP C 1200PF K		
C253			CC73FCH1H751J	CHIP C 750PF J		
C254			CC73GCH1H181J	CHIP C 180PF J		
C255			C92-0041-05	ELECTRO 10UF 10WV		
C256			CK73GB1H332K	CHIP C 3300PF K		
C257			CK73GB1H472K	CHIP C 4700PF K		
C260			CK73GB1H103K	CHIP C 0.01UF K		
C263			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C264			CC73GCH1H101J	CHIP C 100PF J		
C265			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C266			CC73GCH1H470J	CHIP C 47PF J		
CN1		*	E40-5737-05	PIN CONNECTOR ASSY (8P)		
CN2 ,3		*	E40-5738-05	PIN CONNECTOR ASSY (3P)		
CN4			E40-3247-05	PIN CONNECTOR ASSY (3P)		
CN5			E40-3246-05	PIN CONNECTOR ASSY (2P)		
CN6		*	E40-5733-05	FLAT CABLE CONNECTOR(24P)		
CN201		*	E40-5733-05	FLAT CABLE CONNECTOR(24P)		
CN203			E40-5585-05	PIN ASSY SOCKET		
CN205		*	E40-5710-05	FLAT CABLE CONNECTOR(9P)		
J1			E11-0408-05	PHONE JACK		
J201		*	E58-0426-05	MODULAR JACK		
F1			F53-0108-05	FUSE (1.8A)		
-			J30-0545-05	SPACER		
CD1			L79-1013-05	DISCRI COIL (455KHZ)		
CF1			L72-0372-05	CERAMIC FILTER(455KHZ)	940	
CF1			L72-0376-05	CERAMIC FILTER(455KHZ)	941	
L1			L40-6885-34	SMALL FIXED INDUCTOR(680NH)	940	
L1			L40-8281-34	SMALL FIXED INDUCTOR(820NH)	941	
L2			L40-1295-34	SMALL FIXED INDUCTOR(1.2UH)		
L3			L40-1871-36	SMALL FIXED INDUCTOR(18NH)		
L4			L40-2781-37	SMALL FIXED INDUCTOR(0.27UH)	940	
L4		*	L40-3381-37	SMALL FIXED INDUCTOR(0.33UH)	941	
L5		*	L40-1581-37	SMALL FIXED INDUCTOR(0.15UH)	940	
L5		*	L40-2281-37	SMALL FIXED INDUCTOR(0.22UH)	941	
L6		*	L79-1152-05	FILTER(860MHZ)	940	
L6		*	L79-1153-05	FILTER(938MHZ)	941	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
L7		*	L40-1071-36	SMALL FIXED INDUCTOR(10NH)		
L8		*	L40-6861-36	SMALL FIXED INDUCTOR(6.8NH)		
L9		*	L79-1152-05	FILTER(860MHZ)	940	
L9		*	L79-1153-05	FILTER(938MHZ)	941	
L10			L34-1306-15	COIL (5.5T)		
L11			L34-1307-05	COIL (2T)	940	
L11			L34-1313-05	COIL (2T)	941	
L12			L34-1306-15	COIL (5.5T)		
L13			L34-1307-05	COIL (2T)	940	
L13			L34-1313-05	COIL (2T)	941	
L14			L34-1317-05	COIL (3.5T)		
L15		*	L40-2291-37	SMALL FIXED INDUCTOR(2.2UH)		
L51		*	L33-1264-05	SMALL FIXED INDUCTOR(5.6NH)	941	
L51			L40-6861-35	SMALL FIXED INDUCTOR(6.8NH)	940	
L52		*	L33-1263-05	SMALL FIXED INDUCTOR(4.7NH)	941	
L52			L40-6861-35	SMALL FIXED INDUCTOR(6.8NH)	940	
X1		*	L77-1563-05	VCXO (12.8MHZ)	940	
X1		*	L77-1564-05	VCXO (12.8MHZ)	941	
X2			L77-1431-05	CRYSTAL RESONATOR(44.5825MHZ)	940	
X2			L77-1434-05	CRYSTAL RESONATOR(38.5825MHZ)	941	
X201			L78-0308-05	RESONATOR		
XF1		*	L71-0445-05	MCF (45.0375MHZ)	940	
XF1		*	L71-0446-05	MCF (39.0375MHZ)	941	
R1 ,2			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R3			RK73GB1J103J	CHIP R 10K J 1/16W		
R4			R92-1252-05	CHIP R 0 OHM		
R5 ,6			R92-0670-05	CHIP R 0 OHM		
R7 -12			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R13			R92-1252-05	CHIP R 0 OHM		
R14			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R15			R92-1252-05	CHIP R 0 OHM		
R16			RK73GB1J103J	CHIP R 10K J 1/16W		
R17			RK73GB1J104J	CHIP R 100K J 1/16W		
R18			RK73GB1J123J	CHIP R 12K J 1/16W		
R19			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R21			RK73GB1J153J	CHIP R 15K J 1/16W		
R22			RK73GB1J104J	CHIP R 100K J 1/16W		
R23			RK73GB1J471J	CHIP R 470 J 1/16W		
R24			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R25			RK73GB1J154J	CHIP R 150K J 1/16W	941	
R25			RK73GB1J473J	CHIP R 47K J 1/16W	940	
R26			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R27			RK73GB1J224J	CHIP R 220K J 1/16W	940	
R27			RK73GB1J474J	CHIP R 470K J 1/16W	941	
R28			RK73GB1J104J	CHIP R 100K J 1/16W		
R29			RK73GB1J223J	CHIP R 22K J 1/16W		
R30			RK73GB1J104J	CHIP R 100K J 1/16W		
R31			RK73GB1J223J	CHIP R 22K J 1/16W		
R32			RK73GB1J183J	CHIP R 18K J 1/16W		
R33			RK73GB1J470J	CHIP R 47 J 1/16W	940	
R33			RK73GB1J680J	CHIP R 68 J 1/16W	941	
R34 -36			RK73GB1J473J	CHIP R 47K J 1/16W		
R37			RK73GB1J103J	CHIP R 10K J 1/16W		
R38			RK73GB1J[illegible]2J	CHIP R [illegible] J 1/16W		

L:Scandinavia **K:**USA **C:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

※ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
R39			RK73GB1J224J	CHIP R	220K	J 1/16W		
R40			RK73GB1J152J	CHIP R	1.5K	J 1/16W		
R41 ,42			RK73GB1J472J	CHIP R	4.7K	J 1/16W		
R43			RK73GB1J473J	CHIP R	47K	J 1/16W		
R44			RK73GB1J220J	CHIP R	22	J 1/16W		
R45			RK73GB1J273J	CHIP R	27K	J 1/16W		
R46			RK73GB1J473J	CHIP R	47K	J 1/16W		
R47			RK73GB1J223J	CHIP R	22K	J 1/16W		
R48			RK73GB1J563J	CHIP R	56K	J 1/16W		
R49			RK73GB1J104J	CHIP R	100K	J 1/16W		
R50			RK73GB1J472J	CHIP R	4.7K	J 1/16W		
R51			RK73GB1J104J	CHIP R	100K	J 1/16W		
R52			RK73GB1J220J	CHIP R	22	J 1/16W		
R53			R92-1252-05	CHIP R	0 OHM			
R54			RK73GB1J824J	CHIP R	820K	J 1/16W		
R55 ,56			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R58			RK73GB1J824J	CHIP R	820K	J 1/16W		
R59			RK73GB1J122J	CHIP R	1.2K	J 1/16W		
R60 ,61			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R62			RK73GB1J104J	CHIP R	100K	J 1/16W		
R63			RK73GB1J822J	CHIP R	8.2K	J 1/16W		
R64			RK73GB1J104J	CHIP R	100K	J 1/16W		
R65			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R66			RK73GB1J152J	CHIP R	1.5K	J 1/16W		
R67			RK73GB1J103J	CHIP R	10K	J 1/16W		
R68			RK73GB1J471J	CHIP R	470	J 1/16W		
R69			RK73GB1J104J	CHIP R	100K	J 1/16W		
R70			RK73GB1J223J	CHIP R	22K	J 1/16W		
R71			RK73GB1J684J	CHIP R	680K	J 1/16W		
R72			RK73GB1J103J	CHIP R	10K	J 1/16W		
R73			RK73GB1J101J	CHIP R	100	J 1/16W		
R74			RK73GB1J561J	CHIP R	560	J 1/16W		
R75			RK73GB1J103J	CHIP R	10K	J 1/16W		
R76			RK73GB1J682J	CHIP R	6.8K	J 1/16W		
R77			RK73GB1J470J	CHIP R	47	J 1/16W		
R78			RK73GB1J473J	CHIP R	47K	J 1/16W		
R79			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R81			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R82			RK73GB1J471J	CHIP R	470	J 1/16W		
R83			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R84			RK73GB1J101J	CHIP R	100	J 1/16W		
R85			RK73GB1J561J	CHIP R	560	J 1/16W		
R86			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R87			RK73FB2A271J	CHIP R	270	J 1/10W		
R88			RK73FB2A2R2J	CHIP R	2.2	J 1/10W		
R89			RK73FB2A180J	CHIP R	18	J 1/10W		
R90			RK73GB1J331J	CHIP R	330	J 1/16W		
R91			RK73FB2A271J	CHIP R	270	J 1/10W		
R92			R92-0699-05	SOLID	10	1/2W		
R93			RK73FB2A102J	CHIP R	1.0K	J 1/10W		
R94			R92-0699-05	SOLID	10	1/2W		
R95			RK73BB2B471J	CHIP R	470	J 1/8W	940	
R96			RK73GB1J100J	CHIP R	10	J 1/16W		
R97			RK73FB2A220J	CHIP R	22	J 1/10W	940	
R98			RK73FB2A220J	CHIP R	22	J 1/10W	940	

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert

TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
R98			R92-0670-05	CHIP R	0 OHM		941	
R99			RK73FB2A470J	CHIP R	47	J 1/10W		
R100			RK73EB2B471J	CHIP R	470	J 1/8W	940	
R101			RK73FB2A470J	CHIP R	47	J 1/10W		
R102			RK73EB2B181J	CHIP R	180	J 1/8W		
R103			RK73EB2B151J	CHIP R	150	J 1/8W		
R104			RK73FB2A223J	CHIP R	22K	J 1/10W		
R105			RK73GB1J101J	CHIP R	100	J 1/16W		
R106			RK73FB2A154J	CHIP R	150K	J 1/10W		
R107			RK73FB2A473J	CHIP R	47K	J 1/10W		
R108-110			R92-1203-05	CHIP R	0.22	J 1/2W		
R111			RK73GB1J473J	CHIP R	47K	J 1/16W		
R112			RK73FB2A472J	CHIP R	4.7K	J 1/10W		
R113			RK73FB2A272J	CHIP R	2.7K	J 1/10W		
R114			RK73GB1J103J	CHIP R	10K	J 1/16W		
R115,116			RK73FB2A472J	CHIP R	4.7K	J 1/10W		
R117			R92-1268-05	FIXED R	4.7K	1/8W		
R118		*	R92-2538-05	FIXED R	3.9K	1/8W		
R119			R92-1261-05	FIXED R	150	1/2W		
R120			RK73GB1J333J	CHIP R	33K	J 1/16W		
R121			RK73GB1J471J	CHIP R	470	J 1/16W		
R122,123		*	R92-2540-05	FIXED R	3.9	1/4W		
R124			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R125			RK73GB1J682J	CHIP R	6.8K	J 1/16W		
R126			RK73GB1J472J	CHIP R	4.7K	J 1/16W		
R206,207			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R209			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R211,212			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R213			RK73GB1J681J	CHIP R	680	J 1/16W		
R214,215			RK73GB1J102J	CHIP R	1.0K	J 1/16W		
R216,217			RK73GB1J473J	CHIP R	47K	J 1/16W		
R219			RK73GB1J153J	CHIP R	15K	J 1/16W		
R220			RK73GB1J563J	CHIP R	56K	J 1/16W		
R221			RK73GB1J183J	CHIP R	18K	J 1/16W		
R222			RK73GB1J103J	CHIP R	10K	J 1/16W		
R223			RK73GB1J223J	CHIP R	22K	J 1/16W		
R224			RK73GB1J224J	CHIP R	220K	J 1/16W		
R225			RK73GB1J474J	CHIP R	470K	J 1/16W		
R226			RK73GB1J224J	CHIP R	220K	J 1/16W		
R227			RK73GB1J223J	CHIP R	22K	J 1/16W		
R228			RK73GB1J473J	CHIP R	47K	J 1/16W		
R229			RK73GB1J684J	CHIP R	680K	J 1/16W		
R230			RK73GB1J223J	CHIP R	22K	J 1/16W		
R231			R92-1252-05	CHIP R	0 OHM			
R232			RK73GB1J473J	CHIP R	47K	J 1/16W		
R233			RK73GB1J824J	CHIP R	820K	J 1/16W		
R234			RK73GB1J224J	CHIP R	220K	J 1/16W		
R235			RK73GB1J124J	CHIP R	120K	J 1/16W		
R236			RK73GB1J154J	CHIP R	150K	J 1/16W		
R237			RK73GB1J473J	CHIP R	47K	J 1/16W		
R238			RK73GB1J561J	CHIP R	560	J 1/16W		
R239-241			RK73GB1J473J	CHIP R	47K	J 1/16W		
R242			RK73GB1J153J	CHIP R	15K	J 1/16W		
R243			RK73GB1J273J	CHIP R	27K	J 1/16W		
R244			RK73GB1J473J	CHIP R	47K	J 1/16W		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without Parts No. are not supplied
Les articles non mentionnes dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

TX-RX UNIT (X57-4590-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R245			RK73GB1J104J	CHIP R 100K J 1/16W		
R246,247			RK73GB1J103J	CHIP R 10K J 1/16W		
R248,249			RK73GB1J473J	CHIP R 47K J 1/16W		
R250			RK73GB1J223J	CHIP R 22K J 1/16W		
R251			RK73GB1J473J	CHIP R 47K J 1/16W		
R254			RK73GB1J823J	CHIP R 82K J 1/16W		
R255,256			RK73GB1J473J	CHIP R 47K J 1/16W		
R257			RK73GB1J823J	CHIP R 82K J 1/16W		
R258-260			RK73GB1J473J	CHIP R 47K J 1/16W		
R262,263			RK73GB1J473J	CHIP R 47K J 1/16W		
R265,266			RK73GB1J473J	CHIP R 47K J 1/16W		
R267,268			RK73GB1J683J	CHIP R 68K J 1/16W		
R269			RK73GB1J223J	CHIP R 22K J 1/16W		
R270,271			RK73GB1J473J	CHIP R 47K J 1/16W		
R272			RK73GB1J103J	CHIP R 10K J 1/16W		
R273,274			RK73GB1J473J	CHIP R 47K J 1/16W		
R275			RK73GB1J103J	CHIP R 10K J 1/16W		
R277			R92-1252-05	CHIP R 0 ΩHM	941	
R278			RK73GB1J223J	CHIP R 22K J 1/16W		
R280,281			RK73GB1J473J	CHIP R 47K J 1/16W		
R283,284			RK73GB1J473J	CHIP R 47K J 1/16W		
R285			RK73FB2A100J	CHIP R 10 J 1/10W		
R286			RK73GB1J683J	CHIP R 68K J 1/16W		
R287			RK73GB1J563J	CHIP R 56K J 1/16W		
R288			RK73GB1J272J	CHIP R 2.7K J 1/16W		
R289			RK73GB1J104J	CHIP R 100K J 1/16W		
R290			RK73GB1J224J	CHIP R 220K J 1/16W		
R291			R92-0679-05	CHIP R 0 ΩHM		
VR201			R12-6423-05	TRIMMING PΩT. 10K		
D1			02CZ18(X,Y)	ZENER DIΩRD		
D2			DSA3A1	DIΩRD		
D4			1SS301	DIΩRD		
D7			DA204K	DIΩRD		
D8			02CZ15(X,Y)	ZENER DIΩRD		
D9 ,10			DA204K	DIΩRD		
D11			1SS301	DIΩRD		
D12 -15			DA204K	DIΩRD		
D16			02CZ20(Y,Z)	ZENER DIΩRD		
D17			DAN235K	DIΩDE		
D18			HSM88AS	DIΩRD		
D19			MI809	DIΩRD		
D20		*	MA4P1250	DIΩRD		
D21			MI809	DIΩRD		
D22			MA77	DIΩRD		
D201,202			DA204K	DIΩRD		
D203			1SS301	DIΩRD		
IC1			BU4013BF	IC		
IC2			NJM4558E	IC(ΩP AMP X2)		
IC3			NJM78L05UA	IC(VΩLTAGE REGULATΩR/ +5V)		
IC4			UPC7808H	IC(VΩLTAGE REGULATΩR/ +8V)		
IC5			NJM4558E	IC(ΩP AMP X2)		
IC6			M62363FP	IC(8bit D/A CΩNVERTER)		
IC7			MC3372V	IC(FM IF)		
IC8 ,9			NJM4558E	IC(ΩP MP X2)		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-4590-XX)
PLL/VCO (X58-4170-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
IC10			XRU4094BCF	IC		
IC10			BU4094BCF	IC		
IC11		*	LA4422	IC		
IC13			NJM2904M	IC(OP AMP X2)		
IC201		*	AT24C02N10SI2.7	IC(256X8bit EEPROM)		
IC202			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		
IC203			HD74HC373FP	IC(D-TYPE TRANSPARENT LATCES)		
IC204,205			NJM4558E	IC(OP AMP X2)		
IC206			S-8054ALB-LM-T1	IC(VOLTAGE DETECTOR)		
IC207		*	AT29C256-20TI	IC(32X8bit PEROM)		
IC208			TC7S32F	IC(2CH NAND GATE)		
IC209		*	78312AGF3563BE	IC(CPU)		
IC210			TC7S04F	IC(2CH NAND GATE)		
IC211			NJM4558E	IC(OP AMP X2)		
IC212			TA75S01F	IC(OP AMP)		
Q1			DTA114EU	DIGITAL TRANSISTOR		
Q2 ,3			DTC114EU	DIGITAL TRANSISTOR		
Q4			2SA1641(S,T)	TRANSISTOR		
Q5			DTA114YU	DIGITAL TRANSISTOR		
Q6 ,7			2SB1188(Q,R)	TRANSISTOR		
Q8			2SA1362(Y)	TRANSISTOR		
Q9 -13			DTC114EU	DIGITAL TRANSISTOR		
Q14			2SD1624(S)	TRANSISTOR		
Q15			2SC4116(GR)	TRANSISTOR		
Q16			2SC4215(Y)	TRANSISTOR		
Q17			DTA114TU	DIGITAL TRANSISTOR		
Q18			2SC4226(R24)	TRANSISTOR		
Q19			DTC144EU	DIGITAL TRANSISTOR		
Q20			DTC314TK	DIGITAL TRANSISTOR		
Q21			3SK241(R)	FET		
Q22			2SB1370(E,F)	TRANSISTOR		
Q23			2SC4116(GR)	TRANSISTOR		
Q24			2SC4094(R37)	TRANSISTOR		
Q25			DTA144EU	DIGITAL TRANSISTOR		
Q26			DTC144EU	DIGITAL TRANSISTOR		
Q27			DTA114YU	DIGITAL TRANSISTOR		
Q28			DTC114YU	DIGITAL TRANSISTOR		
Q29			DTC114EU	DIGITAL TRANSISTOR		
Q30			2SA1586(Y,GR)	TRANSISTOR		
Q201			DTC114EU	DIGITAL TRANSISTOR		
Q202			DTC144EU	DIGITAL TRANSISTOR		
TH201			157-302-53008	THERMISTOR(3K)		
A1		*	X58-4170-10	SUB UNIT (PLL/VCO)	940	
A1		*	X58-4170-11	SUB UNIT (PLL/VCO)	941	
PLL/VCO (X58-4170-XX) -10 : TK-940 -11 : TK-941						
C1			CC73GCH1H101J	CHIP C 100PF J		
C2			CK73GB1H102K	CHIP C 1000PF K		
C3			C92-0004-05	CHIP TAN 1.0UF 16WV		
C4 ,5			CC73GCH1H101J	CHIP C 100PF J		
C6			CK73GB1H102K	CHIP C 1000PF K		
C7			C92-0543-05	CHIP TAN 3.3UF 10WV		
C8			CK73GB1H103K	CHIP C 0.01UF K		
C9			C92-0536-05	CHIP TAN 10UF 10WV		
C10			C92-0555-05	TANTAL C		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis
Teile ohne Parts No. werden nicht geliefert

PLL/VCO (X58-4170-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C11			CC73GCH1H010C	CHIP C 1PF C		
C12			CK73GB1H102K	CHIP C 1000PF K		
C13			C92-0004-05	CHIP TAN 1.0UF 16WV		
C14			CC73GCH1H040C	CHIP C 4PF C		
C15			CC73GCH1H101J	CHIP C 100PF J		
C16			CC73GCH1H470J	CHIP C 47PF J		
C17			C92-0001-05	CHIP TAN 0.1UF 35WV		
C18 ,19			CK73GB1H102K	CHIP C 1000PF K		
C51 ,52			CK73GB1H471K	CHIP C 470PF K		
C53			CC73GCH1HR75C	CHIP C 0.75PF C		
C54			CC73GCH1H0R5C	CHIP C 0.5PF C		
C55			CC73GCH1H080D	CHIP C 8PF D	941	
C55			CC73GCH1H090D	CHIP C 9PF D	940	
C56			CC73GCH1H050C	CHIP C 5PF C	940	
C56			CC73GCH1H080D	CHIP C 8PF D	941	
C57			CC73GCH1H040C	CHIP C 4PF C		
C58			CC73GCH1H100D	CHIP C 10PF D		
C59			CC73GCH1H080D	CHIP C 8PF D	940	
C59			CC73GCH1H100D	CHIP C 10PF D	941	
C60			CC73GCH1H010C	CHIP C 1PF C		
C61			CK73GB1H102K	CHIP C 1000PF K		
C62			CC73GCH1H020C	CHIP C 2.0PF C	941	
C62			CC73GCH1H030C	CHIP C 3PF C	940	
C63			CC73GCH1H030C	CHIP C 3PF C		
C64			CC73GCH1H010C	CHIP C 1PF C	941	
C64			CC73GCH1H1R5C	CHIP C 1.5PF C	940	
C65 ,66			CK73GB1H102K	CHIP C 1000PF K		
C67			CK73GB1H102K	CHIP C 1000PF K	940	
C67			CK73GB1H471K	CHIP C 470PF K	941	
C68			CC73GCH1H470J	CHIP C 47PF J		
C69			CK73GB1H102K	CHIP C 1000PF K		
TC51			C05-0371-05	TRIM CAP 10PF		
CN1		*	E40-5699-05	PIN CONNECTOR ASSY(7P)		
CN2		*	E40-5700-05	PIN CONNECTOR ASSY(5P)		
704	-	*	F10-2127-14	SHIELDING PLATE		
L1			L40-1071-35	SMALL FIXED INDUCTOR(10NH)		
L51 ,52			L40-1095-34	SMALL FIXED INDUCTOR(1UH)		
L53			L34-2310-05	COIL	940	
L53			L34-2333-05	COIL	941	
L54 ,55			L40-1095-34	SMALL FIXED INDUCTOR(1UH)		
L56		*	L40-2771-35	SMALL FIXED INDUCTOR(27NH)		
L57			L40-3971-35	SMALL FIXED INDUCTOR(39NH)		
L58			L40-1071-35	SMALL FIXED INDUCTOR(10NH)	941	
L58			L40-1271-35	SMALL FIXED INDUCTOR(12NH)	940	
R1			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R2 -4			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R5			RK73GB1J123J	CHIP R 12K J 1/16W		
R6			RK73GB1J333J	CHIP R 33K J 1/16W		
R7			RK73GB1J101J	CHIP R 100 J 1/16W		
R8			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R9			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R10			RK73GB1J101J	CHIP R 100 J 1/16W		
R11			RK73GB1J473J	CHIP R 47K J 1/16W		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert

PLL/VCO (X58-4170-XX)
LCD ASSY (B38-0731-05)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R12 ,13			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R14			RK73GB1J101J	CHIP R 100 J 1/16W		
R15			RK73GB1J332J	CHIP R 3.3K J 1/16W		
R16			RK73GB1J223J	CHIP R 22K J 1/16W		
R17			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R18			RK73GB1J470J	CHIP R 47 J 1/16W		
R19			RK73GB1J103J	CHIP R 10K J 1/16W		
R20			RK73GB1J101J	CHIP R 100 J 1/16W		
R21 ,22			R92-1252-05	CHIP R 0 ØHM		
R51			R92-1252-05	CHIP R 0 ØHM		
R52 ,53			RK73GB1J223J	CHIP R 22K J 1/16W		
R54			RK73GB1J683J	CHIP R 68K J 1/16W		
R55			RK73GB1J470J	CHIP R 47 J 1/16W		
R56			RK73GB1J151J	CHIP R 150 J 1/16W		
R57			RK73GB1J103J	CHIP R 10K J 1/16W		
R58			RK73GB1J223J	CHIP R 22K J 1/16W		
R59			RK73GB1J270J	CHIP R 27 J 1/16W		
R60 ,61			RK73GB1J101J	CHIP R 100 J 1/16W		
R62			RK73GB1J823J	CHIP R 82K J 1/16W		
R63			RK73GB1J101J	CHIP R 100 J 1/16W		
D1			1SS301	DIØRD		
D51 ,52			1T363A	VARI CAP DIØRD		
D53			MA360	VARI CAP DIØRD		
IC1		*	SC370651F	IC		
IC1		*	MC145190F-K	IC		
Q1			DTC143EK	DIGITAL TRANSISTØR		
Q2			2SA1586(Y,GR)	TRANSISTØR		
Q3			2SC3356	TRANSISTØR		
Q51			2SK508NV(K52)	FET		
Q52 ,53			2SC3356	TRANSISTØR		
LCD ASSY (B38-0731-05)						
ED1	2A	*	B38-0722-05	LCD		
LED	2A	*	B38-0336-05	LED ASSY		
C1			CC73GCH1H101J	CHIP C 100PF J		
C2			CK73GB1H103K	CHIP C 0.01UF K		
C3 ,4			CC73GCH1H101J	CHIP C 100PF J		
C5			CK73GB1H103K	CHIP C 0.01UF K		
C6 -8			CC73GCH1H101J	CHIP C 100PF J		
C9			C92-0004-05	CHIP TAN 1.0UF 16WV		
C10 ,11			CK73GB1H103K	CHIP C 0.01UF K		
C12			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C13 -16			CK73GB1H103K	CHIP C 0.01UF K		
401	2A		E29-0494-08	INTER CØNNECTØR		
CN1		*	E40-5710-05	FLAT CABLE CØNNECTØR (9P)		
402	2A		J21-4306-08	MØUNTING HARDWARE		
X1			L78-0043-05	CRYSTAL RESØNATØR(4.194MHZ)		
R1			R92-1252-05	CHIP R 0 ØHM		
R2 -4			RK73FB2A271J	CHIP R 270 J 1/10W		
R5			RK73GB1J472J	CHIP R 4.7K J 1/10W		
R6			RK73FB2A271J	CHIP R 270 J 1/10W		
R7 ,8			RK73GB1J473J	CHIP R 47K J 1/16W		
R9			RK73GB1J103J	CHIP R 10K J 1/16W		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without Parts No. are not supplied
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert

LCD ASSY (B38-0731-05)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R10 ,11			RK73GB1J473J	CHIP R 47K J 1/16W		
R12			RK73GB1J103J	CHIP R 10K J 1/16W		
R13 -17			R92-1252-05	CHIP R 0 ΩHM		
R18 ,19			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R20			RK73GB1J223J	CHIP R 22K J 1/16W		
R21 -23			R92-1252-05	CHIP R 0 ΩHM		
IC1			NJM78L05UA	IC(VΩLTAGE REGULATΩR/ +5V)		
IC2			75308BGK740BE9	IC(CPU)		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England
Y:AAFES(Europe) **X:**Australia

⚠ indicates safety critical components.