


Exploded View (Cabinet)

This diagram illustrates the exploded view of the cabinet assembly. It shows the main cabinet body (21) with a control panel on the right side. Four mounting brackets (22) are shown being attached to the top of the cabinet using screws (23). Two additional screws (24) are shown being inserted into the top of the cabinet. A dashed arrow indicates the direction of assembly for the control panel.

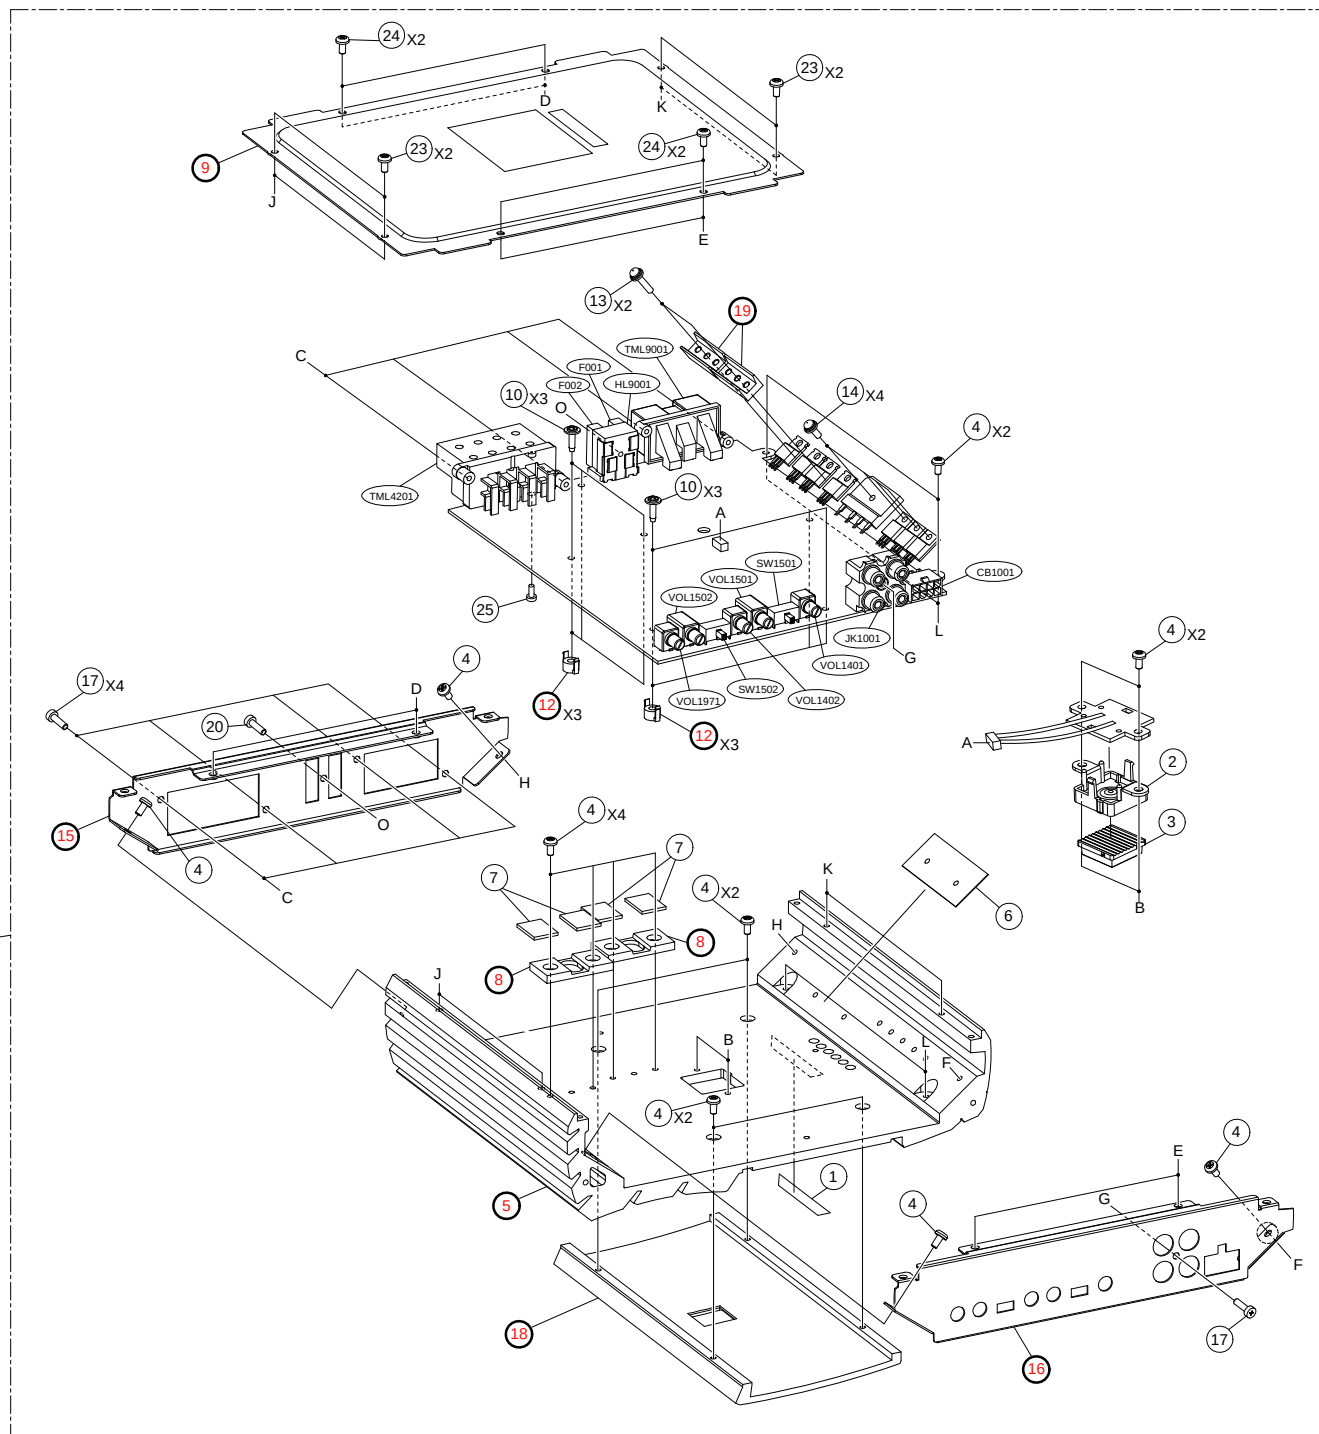

MODEL	Symbol No.	Parts No.	Description
	1	33E42163S01	PLATE,NAME
	2	34E42165S01	INDICATOR;HOLDER
	3	34E42164S01	INDICATOR,LENS
	4	03E38671S01	SCR,M3X6(B)
	5	-----	HEAT,SINK MAIN
	6	14E42151S01	INSULATOR,SILPAD-B
	7	14E42239S01	INS,GAP PAD-FET
	8	-----	HEATSINK,SUB-B
	9	-----	CHAS,BOTTOM(5CH)
	10	03E39165S01	SCR,M3X11(WP)(WHT)
	12	-----	SUPPORT;PWB;3027002M01-D
	13	03E38094S01	SCR,M3X15.5(WS)
	14	03E40789S01	SCR,M3X9 (WS)(WHT)
	15	-----	CHAS,FRONT(4CH)
	16	-----	CHAS,REAR(4CH)
	17	03E42130S01	SCR,M3X10(BLK)
	18	-----	HEAT,SINK,COVER
	19	-----	HEAT,SINK BAR
	20	03E38095S01	SCR,M3X6(P)
	21	29E42161S01	LEG,MTG-A
	22	29E42162S01	LEG,MTG-B
	23	03E40131S01	SCR,M3X6(B)(CR3BK)
	24	03E40129S01	SCR,M2.6X6(B)(BLK)
	25	03E38698S01	SCR,M3X8(P)(BLK)
	CB1001	09E42802S01	CONN,WAFER 8P
	F001	65E38096S01	FUSE,AUTO 30A
	F002	65E38096S01	FUSE,AUTO 30A
	HL9001	09E42149S01	HOLDER,FUSE
	JK1001	09E42147S01	CONN,RCA 4P
	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1502	40E40956S01	SW,SLIDE SK-23D55-G6
	TML4201	09E42146S01	CONN,TERMINAL 8P
	TML9001	09E42148S01	CONN,TERMINAL 3P
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VOL1402	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E42155S01	VOL,ROTARY 20KX4
	VOL1502	18E42155S01	VOL,ROTARY 20KX4
	VOL1971	18E42154S01	VOL,ROTARY 5KX2

Mark Model Code

#1 MRX-F65(North American) Only,


\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

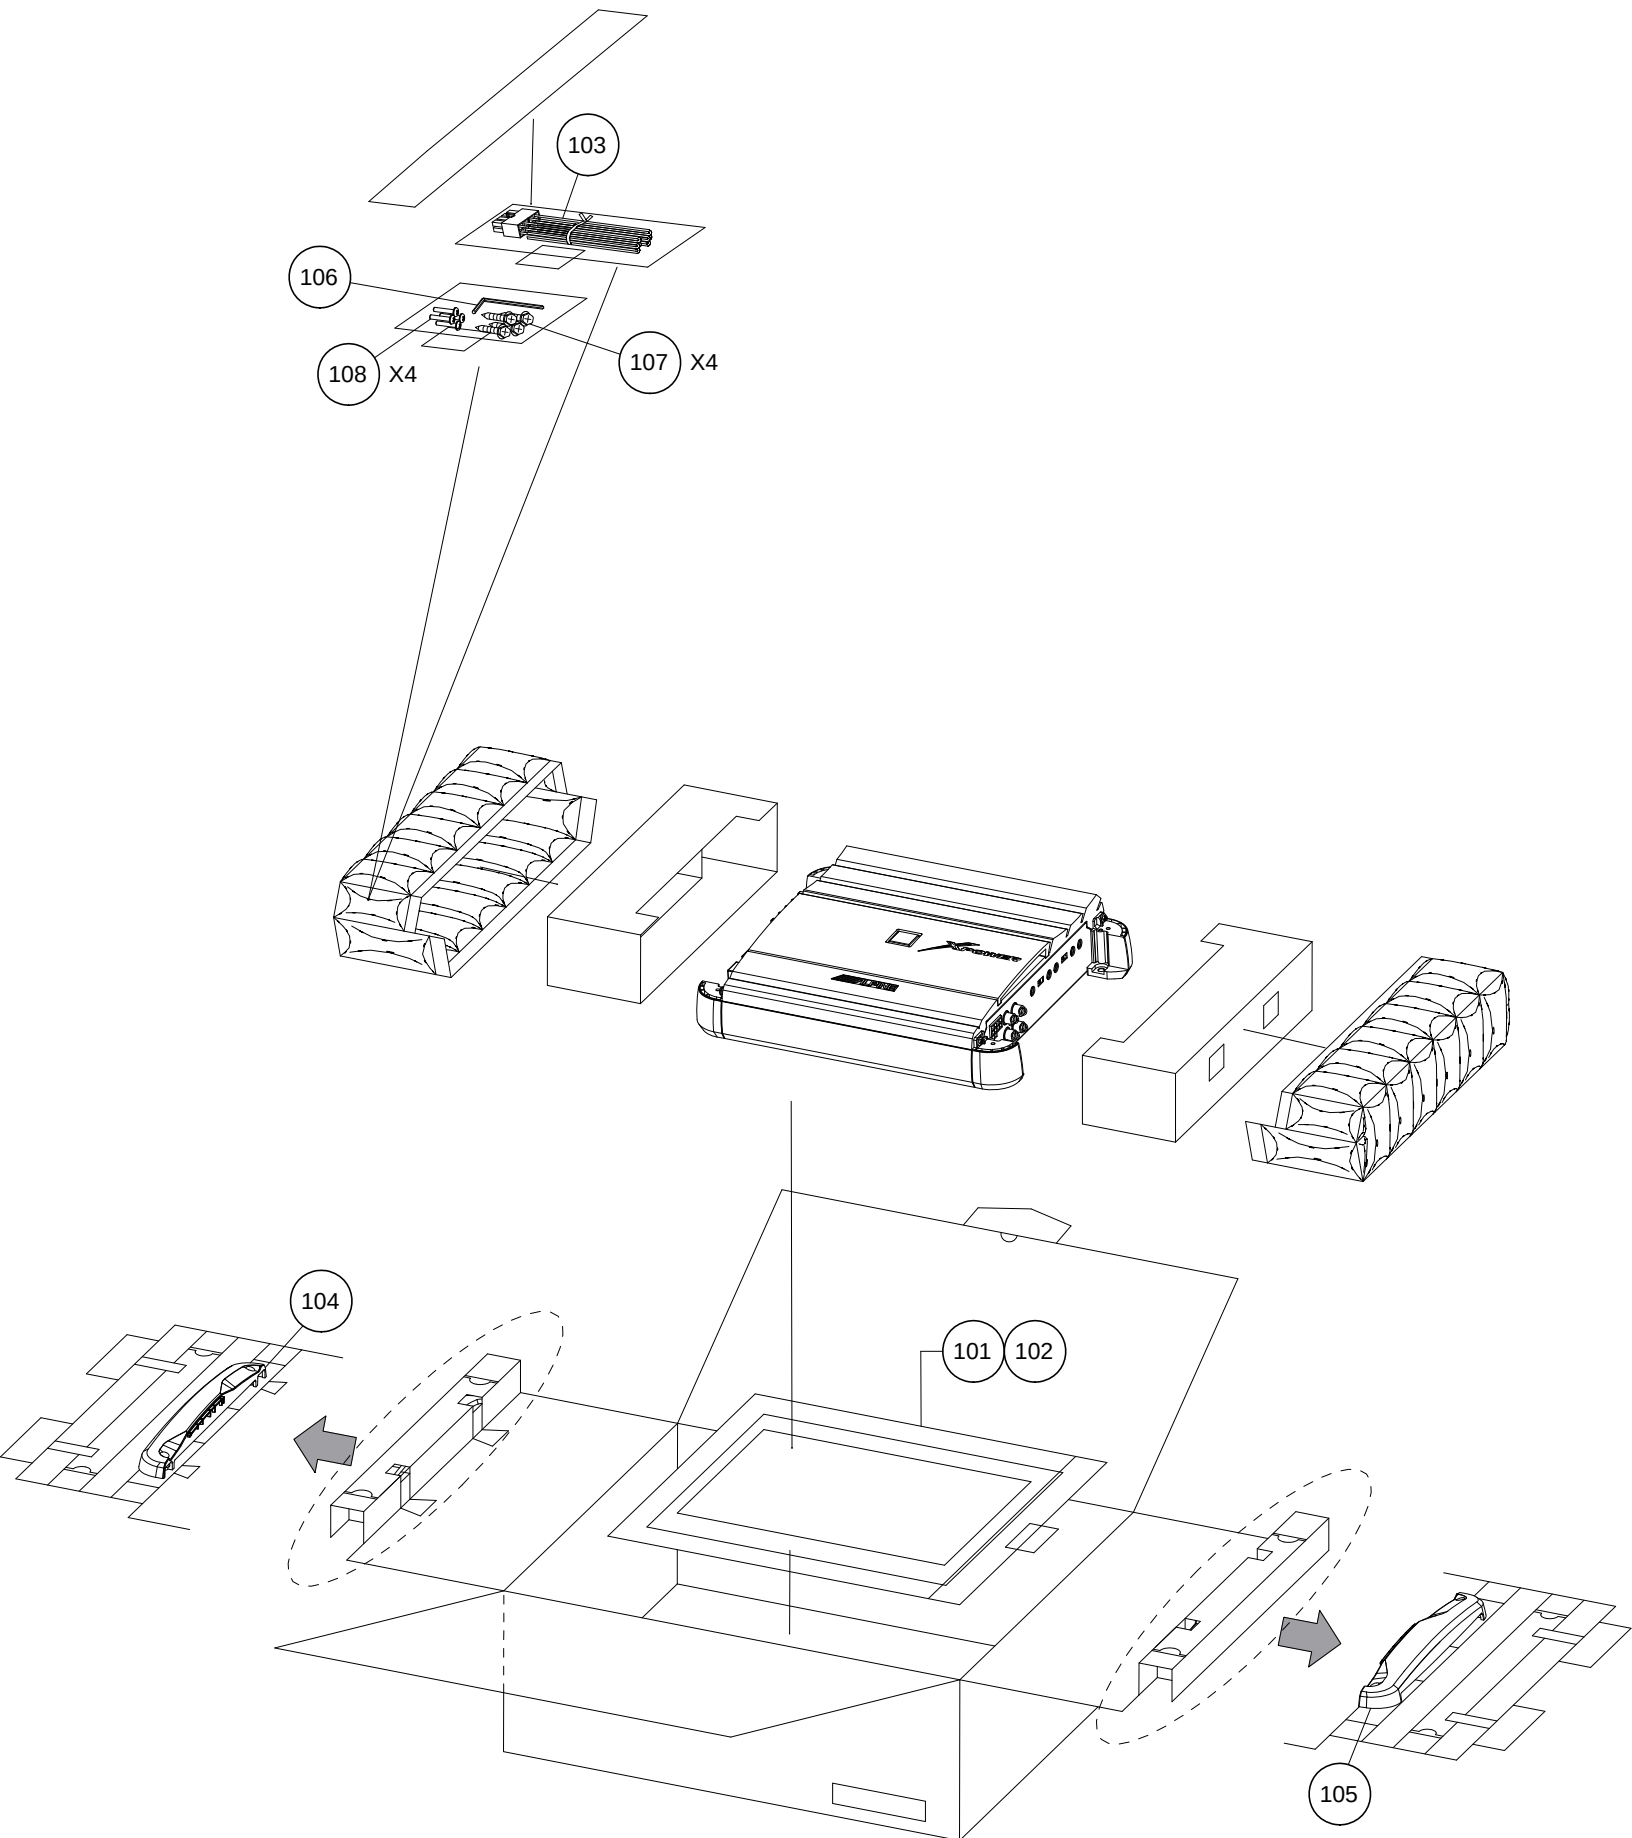

MODEL	Symbol No.	Parts No.	Description
	101	68-21057Z18	MANUAL,OWNER'S
\$1	102	68-21057Z19	MANUAL,OWNER'S (I/G/S)
	103	01E42129S01	CONN,ASSY 8P
	104	15E42152S01	COVER,TERMINAL-L
	105	15E42153S01	COVER,TERMINAL-R
	106	03E36690S01	WRENCH,2.5X2.9
	107	03E40419S01	SCR,M4X20(BLK)
	108	03E39167S01	SCR,M3X12(P)(BLK)

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1001	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1002	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1003	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1004	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1005	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1006	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1007	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1008	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1101	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1102	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1103	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1104	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1105	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1106	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1107	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1108	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1109	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1110	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1111	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1112	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1113	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1114	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1115	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1116	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1201	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1202	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1203	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1204	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1205	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1206	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1207	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1208	08E36675S01	CAP,CER. 33pF/50V
MAIN-P.W.Board			C1209	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1210	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1211	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1212	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1401	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1402	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1403	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1404	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1405	08E40234S01	CAP,CER. 10pF/50V

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1406	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1407	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1408	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1501	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1502	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1503	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1504	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1505	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1506	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1507	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1508	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1509	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1510	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1511	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1512	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1513	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1514	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1515	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1516	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1517	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1518	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1519	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1520	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1521	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1522	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1523	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1524	08E38540S01	CAP,CER. 0.15uF/16V
MAIN-P.W.Board			C1971	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C1972	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1975	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C1976	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1979	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1980	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1981	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1982	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3001	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3002	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3003	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3004	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3005	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3006	08E41389S01	CAP,CER. 3300pF/50V

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3007	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3008	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3009	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3010	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3011	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3012	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3033	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3034	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3035	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3036	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3037	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3038	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3039	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3040	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3045	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3046	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3047	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3048	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3049	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C3050	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C3051	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C3052	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C3209	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3606	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3607	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3608	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3609	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3610	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3611	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3612	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3613	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3621	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3622	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3623	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3624	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3625	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3626	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3627	08E41036S01	CAP,CER. 1uF/16V

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3628	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3629	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3701	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3702	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3703	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3704	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3713	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3714	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3715	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3716	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3717	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3718	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3719	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3720	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3721	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3722	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3723	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3724	08E42140S01	CAP,CER.680pF/100V
MAIN-P.W.Board			C3725	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3726	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3727	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3728	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3801	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C3802	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C4001	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4002	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4003	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4004	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4005	08E38476S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4006	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C4205	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4206	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4207	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4208	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4210	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4212	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4214	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4216	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4301	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4302	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4901	08E36114S01	CAP,CER. 0.22uF/16V

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4902	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4903	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4904	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5001	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5002	08E41028S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C5003	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5004	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C5005	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5006	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C5007	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5008	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5011	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5012	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5013	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5014	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5015	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5016	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5018	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5019	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5024	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5025	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5026	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C8901	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C8902	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C8903	08E31179S01	CAP,CER.181-J-CP
MAIN-P.W.Board			C9001	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C9003	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9301	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9302	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9303	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9304	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9305	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9306	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9601	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9701	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C9702	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9703	08E42194S01	CAP,CER. 0.015uF/25V
MAIN-P.W.Board			C9704	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9705	08E38476S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9901	08E41035S01	CAP,CER. 0.01uF/630V

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C9902	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C9903	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9904	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9907	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9908	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9909	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C9910	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C9911	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			CB1001	09E42802S01	CONN,WAFER 8P
MAIN-P.W.Board			CB8001	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board			CL5001	91E39901S01	RESONATOR,7.7MHz
MAIN-P.W.Board			D1101	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1102	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1103	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1104	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1105	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D1106	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D1107	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D1108	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D1701	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1702	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D3001	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3002	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3003	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3004	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3005	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3006	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3007	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3008	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3009	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3010	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3011	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3012	48E34197S01	DIODE,DAN217
MAIN-P.W.Board			D3605	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3606	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3607	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3608	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3609	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3610	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3611	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3612	48E40918S01	DIODE,KDS160

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D4301	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D4302	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D4401	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D4402	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D5001	48E40338S01	DIODE,KDR720E
MAIN-P.W.Board			D5002	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D5003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D8901	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			D9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D9201	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D9202	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D9205	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9206	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9501	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D9502	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E1101	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1102	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1103	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1104	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1105	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1106	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1107	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1108	23E39180S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1701	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E1702	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E1703	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E1704	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E1971	23E38001S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E1972	23E38001S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E3001	23E42794S01	CAP,ELY.0.1uF/50V
MAIN-P.W.Board			E3002	23E42794S01	CAP,ELY.0.1uF/50V
MAIN-P.W.Board			E3003	23E42794S01	CAP,ELY.0.1uF/50V
MAIN-P.W.Board			E3004	23E42794S01	CAP,ELY.0.1uF/50V
MAIN-P.W.Board			E3005	23E42803S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E3006	23E42803S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E3201	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E3202	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E3203	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E3204	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E3601	23E40365S01	CAP,ELY.22uF/16V

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E3602	23E40365S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3603	23E40365S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3604	23E40365S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3701	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3702	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3703	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3704	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3705	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3706	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3707	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E3708	23E42203S01	CAP,ELY. 470uF/50V
MAIN-P.W.Board			E4902	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E4903	23E40367S01	CAP,ELY.100uF/50V
MAIN-P.W.Board			E5001	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E5002	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E8901	23E40364S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8902	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E9101	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9102	23E38001S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E9201	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E9202	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E9301	23E40761S01	CAP,ELY.33uF/16V
MAIN-P.W.Board			E9302	23E40761S01	CAP,ELY.33uF/16V
MAIN-P.W.Board			E9303	23E40367S01	CAP,ELY.100uF/50V
MAIN-P.W.Board			E9304	23E40367S01	CAP,ELY.100uF/50V
MAIN-P.W.Board			E9701	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E9702	23E40766S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E9703	23E40765S01	CAP,ELY.330uF/10V
MAIN-P.W.Board			E9901	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9902	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9903	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9904	23E42156S01	CAP,ELY.2700uF/50V
MAIN-P.W.Board			E9905	23E42156S01	CAP,ELY.2700uF/50V
MAIN-P.W.Board			E9906	23E42797S01	CAP,ELY.1000uF/50V
MAIN-P.W.Board			E9907	23E42797S01	CAP,ELY.1000uF/50V
MAIN-P.W.Board			F9901	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9902	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9903	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9904	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9905	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9906	65E41480S01	FUSE,20A

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			F9907	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9908	65E41480S01	FUSE,20A
MAIN-P.W.Board			F001	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board			F002	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board			HL9001	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			IC1101	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1102	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1103	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1104	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1201	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1202	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1401	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1402	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1501	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1502	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1503	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1504	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1505	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1506	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1507	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1508	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1971	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1972	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC3001	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC3002	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC3201	51E40342S01	IC,74VHC00MTCX
MAIN-P.W.Board			IC3602	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3604	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3605	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC4301	51E40775S01	IC,BD5228G
MAIN-P.W.Board			IC5001	51E36474S01	IC,NJM78L05UA
MAIN-P.W.Board			IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5003	51E40344S01	IC,BD5240G
MAIN-P.W.Board			IC5004	51E40773S01	IC,KIC7SH04FU
MAIN-P.W.Board			IC5005	51-04615Z01	IC,TMP87C847UG -QT
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9701	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			JK1001	09E42147S01	CONN,RCA 4P
MAIN-P.W.Board			L4001	24E42799S01	COIL,IND. 15uH
MAIN-P.W.Board			L4002	24E42799S01	COIL,IND. 15uH

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			L4003	24E42799S01	COIL,IND. 15uH
MAIN-P.W.Board			L4004	24E42799S01	COIL,IND. 15uH
MAIN-P.W.Board			L9101	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			Q1701	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1702	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q1705	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q1706	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3001	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3002	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3003	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3004	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3009	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3010	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3011	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3012	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3013	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3014	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3015	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3016	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3017	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3018	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3019	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3020	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3201	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3202	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3203	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3204	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3205	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3206	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3207	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3208	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3209	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3210	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3211	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3212	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3709	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q3710	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q3711	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q3712	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q3713	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q3714	48E40771S01	FET,IRF6662Pb

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3715	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q3716	48E40771S01	FET,IRF6662Pb
MAIN-P.W.Board			Q4301	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4302	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4305	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4306	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q4307	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q4401	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4402	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4405	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4406	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q4407	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q4901	48E42171S01	TR,KTD2060
MAIN-P.W.Board			Q5001	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9102	48E39125S01	TR,KTB1241
MAIN-P.W.Board			Q9103	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9201	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9202	48E38062S01	TR,DTA114EK
MAIN-P.W.Board			Q9301	48E42170S01	TR,KTB1368
MAIN-P.W.Board			Q9302	48E42171S01	TR,KTD2060
MAIN-P.W.Board			Q9501	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9502	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9503	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9701	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9801	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q9802	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q9903	48E42798S01	FET,IRF3205Z
MAIN-P.W.Board			Q9904	48E42798S01	FET,IRF3205Z
MAIN-P.W.Board			Q9905	48E42798S01	FET,IRF3205Z
MAIN-P.W.Board			Q9906	48E42798S01	FET,IRF3205Z
MAIN-P.W.Board			R1001	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R1002	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R1003	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R1004	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R1005	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1006	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1007	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1008	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1009	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1010	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1011	06E35443S01	RES,CF. 24K-1/4W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1012	06E35443S01	RES,CF. 24K-1/4W
MAIN-P.W.Board			R1013	06E37168S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R1014	06E37168S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R1015	06E37168S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R1016	06E37168S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R1017	06E35373S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R1018	06E35373S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R1019	06E35373S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R1020	06E35373S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R1101	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1102	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1103	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1104	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1105	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1106	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1107	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1108	06E32317S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1109	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1110	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1111	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1112	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1113	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1114	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1115	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1116	06E37132S01	RES,CF. 560-1/4W
MAIN-P.W.Board			R1117	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1118	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1119	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1120	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1121	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1122	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1123	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1124	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1125	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1126	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1127	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1128	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1129	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1130	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1131	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1132	06E41486S01	RES,CF. 3.6K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1201	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1202	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1203	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1204	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1205	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1206	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1207	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1208	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1209	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1210	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1211	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1212	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1213	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1214	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1215	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1216	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1401	06E40356S01	RES,CF. 910-1/16W
MAIN-P.W.Board			R1402	06E40356S01	RES,CF. 910-1/16W
MAIN-P.W.Board			R1403	06E40356S01	RES,CF. 910-1/16W
MAIN-P.W.Board			R1404	06E40356S01	RES,CF. 910-1/16W
MAIN-P.W.Board			R1405	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1406	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1407	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1408	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1409	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1410	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1411	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1412	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1413	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1414	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1415	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1416	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1501	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1502	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1503	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1504	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1505	06E40189S01	RES,CF. 15K-1/10W
MAIN-P.W.Board			R1506	06E40189S01	RES,CF. 15K-1/10W
MAIN-P.W.Board			R1507	06E40189S01	RES,CF. 15K-1/10W
MAIN-P.W.Board			R1508	06E40189S01	RES,CF. 15K-1/10W
MAIN-P.W.Board			R1509	06E37252S01	RES,CF. 22K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1510	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1511	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1512	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1513	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1514	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1515	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1516	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1517	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1518	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1519	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1520	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1521	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1522	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1523	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1524	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1525	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1526	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1527	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1528	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1529	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1530	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1531	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1532	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1533	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1534	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1535	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1536	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1537	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1538	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1539	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1540	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1541	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1542	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1543	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1544	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1545	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R1546	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R1547	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R1548	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R1701	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1702	06E40826S01	RES,CF. 33K-1/10W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1703	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1704	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1705	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1706	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1707	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1708	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1709	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1710	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1711	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1712	06E35377S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1713	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R1714	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R1715	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R1716	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R1717	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1718	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1719	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1971	06E40330S01	RES,CF. 150K-1/16W
MAIN-P.W.Board			R1972	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1973	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1974	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1975	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1976	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1977	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1978	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1979	06E40330S01	RES,CF. 150K-1/16W
MAIN-P.W.Board			R1980	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1981	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1982	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1983	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1984	06E37225S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1985	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1986	06E37111S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R3001	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3002	06E37196S01	RES,CF. 3K-1/16W
MAIN-P.W.Board			R3003	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3004	06E37196S01	RES,CF. 3K-1/16W
MAIN-P.W.Board			R3005	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3006	06E37196S01	RES,CF. 3K-1/16W
MAIN-P.W.Board			R3007	06E37196S01	RES,CF. 3K-1/16W
MAIN-P.W.Board			R3008	06E36463S01	RES,CF. 10K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R3009	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3010	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3011	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3012	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3013	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3014	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3015	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3016	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3017	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3018	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3019	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3020	06E37226S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3021	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3022	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3023	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3024	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3025	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3026	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3027	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3028	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R3051	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3052	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3055	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3056	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3057	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3058	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3059	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3060	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3061	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3062	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3063	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3064	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3065	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3066	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3067	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3068	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3069	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3070	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3071	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3072	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3073	06E40312S01	RES,CF. 470-1/10W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3074	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R3075	06E40310S01	RES,CF. 39-1/16W
MAIN-P.W.Board			R3076	06E40310S01	RES,CF. 39-1/16W
MAIN-P.W.Board			R3077	06E34155S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3078	06E34155S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3079	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3080	06E41375S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3081	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3082	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3083	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3084	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3085	06E41000S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3088	06E41000S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3089	06E41000S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3092	06E41000S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R3093	06E37102S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R3094	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3095	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3096	06E37102S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R3097	06E37102S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R3098	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3099	06E37277S01	RES,CF. 750-1/16W
MAIN-P.W.Board			R3100	06E37102S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R3201	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3202	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3203	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3204	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3205	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3206	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3207	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3208	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3209	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3210	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3211	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3212	06E40992S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3213	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3214	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3215	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3216	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3217	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3218	06E42132S01	RES,CF. 10K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3219	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3220	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3617	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3618	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3619	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3620	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3621	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3622	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3623	06E37105S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3624	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3625	06E42131S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3626	06E42131S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3627	06E42131S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3628	06E42131S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3629	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3630	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3631	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3632	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3637	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3638	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3639	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3640	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3641	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3642	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3643	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3644	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3645	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3646	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3647	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3648	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3649	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3650	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3651	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3652	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3653	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R3654	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3655	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3656	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R3657	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R3658	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3659	06E40320S01	RES,CF. 8.2K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3660	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R3709	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3712	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3713	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3716	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3717	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3720	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3721	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3724	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3733	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3734	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3735	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3736	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3737	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3738	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3739	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3740	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3741	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3742	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3743	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3744	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3745	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3746	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3747	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3748	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3801	06E35243S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R3802	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3803	06E35243S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R3804	06E37227S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R4001	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4002	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4003	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4004	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4005	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4006	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4007	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4008	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R4009	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R4201	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4202	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4203	06E37255S01	RES,CF. 10-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4204	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4205	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4206	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4207	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4208	06E37255S01	RES,CF. 10-1/16W
MAIN-P.W.Board			R4301	06E40985S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R4302	06E40985S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R4303	06E40985S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R4304	06E40985S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R4305	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R4306	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R4307	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R4308	06E39637S01	RES,CF. 13K-1/4W
MAIN-P.W.Board			R4309	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R4310	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4311	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4312	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4313	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4314	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4315	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4401	06E35367S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R4402	06E35367S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R4403	06E35367S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R4404	06E35367S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R4405	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R4406	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4407	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R4408	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R4409	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R4410	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R4411	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4412	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4413	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4414	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4901	06E36290S01	RES,CF. 15K-1/4W
MAIN-P.W.Board			R4902	06E36290S01	RES,CF. 15K-1/4W
MAIN-P.W.Board			R4903	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R4904	06E40357S01	RES,CF. 82K-1/16W
MAIN-P.W.Board			R5001	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5002	06E37224S01	RES,CF. 2K-1/16W
MAIN-P.W.Board			R5003	06E35446S01	RES,CF. 1.1K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5004	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5005	06E37220S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board			R5006	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5007	06E40315S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R5008	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5009	06E35446S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R5010	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5011	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5013	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5014	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5015	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5016	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5017	06E40735S01	RES,CF. 620-1/16W
MAIN-P.W.Board			R5018	06E41003S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5019	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5020	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5021	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5022	06E40189S01	RES,CF. 15K-1/10W
MAIN-P.W.Board			R5023	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5024	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5025	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5026	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5027	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5028	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5029	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5030	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5031	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5032	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5033	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5034	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5035	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5036	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5037	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5038	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5039	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5040	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5041	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5042	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5043	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8001	06E35253S01	RES,CF. 2K-1/4W
MAIN-P.W.Board			R8002	06E35253S01	RES,CF. 2K-1/4W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9101	06E36581S01	RES,CF. 30K-1/4W
MAIN-P.W.Board			R9102	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board			R9103	06E41381S01	RES,CF. 24K-1/16W
MAIN-P.W.Board			R9104	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9105	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9106	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9107	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9201	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R9202	06E41003S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9203	06E40327S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R9301	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R9302	06E35133S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R9303	06E35291S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R9304	06E40329S01	RES,CF. 120K-1/16W
MAIN-P.W.Board			R9305	06E35291S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R9306	06E40329S01	RES,CF. 120K-1/16W
MAIN-P.W.Board			R9501	06E41003S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9502	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9503	06E37252S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R9504	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9505	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9506	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9507	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9508	06E41009S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9509	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9510	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9601	06E37110S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9703	06E40988S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9704	06E41381S01	RES,CF. 24K-1/16W
MAIN-P.W.Board			R9705	06E40988S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9706	06E35516S01	RES,CF. 82K-1/16W
MAIN-P.W.Board			R9707	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R9708	06E38589S01	RES,CF. 1.6K-1/16W
MAIN-P.W.Board			R9709	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9710	06E40231S01	RES,CF. 2.7K-1/10W
MAIN-P.W.Board			R9715	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9716	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R9717	06E35240S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R9718	06E41003S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9801	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9802	06E36618S01	RES,CF. 1K-1/16W

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9803	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9804	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9805	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9806	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9901	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9902	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9903	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9904	06E41011S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9911	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9912	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9913	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9914	06E37280S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9915	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9916	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9919	06E42225S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R9920	06E42225S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R9921	06E41016S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9922	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R9923	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board			SW1502	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board			T9001	24E42800S01	CHOKE TRANS,60uH
MAIN-P.W.Board			T9902	25E42801S01	TRANS POWER,4T/10T
MAIN-P.W.Board			TH3801	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3802	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH5001	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH9601	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TML4201	09E42146S01	CONN,TERMINAL 8P
MAIN-P.W.Board			TML9001	09E42148S01	CONN,TERMINAL 3P
MAIN-P.W.Board			VOL1401	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VOL1402	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VOL1501	18E42155S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			VOL1502	18E42155S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			VOL1971	18E42154S01	VOL,ROTARY 5KX2
MAIN-P.W.Board			ZD3001	48E42167S01	DIODE,ZENER UDZS4.7B
MAIN-P.W.Board			ZD3002	48E42167S01	DIODE,ZENER UDZS4.7B
MAIN-P.W.Board			ZD3003	48E42167S01	DIODE,ZENER UDZS4.7B
MAIN-P.W.Board			ZD3004	48E42167S01	DIODE,ZENER UDZS4.7B
MAIN-P.W.Board			ZD4001	48E42166S01	DIODE,ZENER KDZ15V-Y
MAIN-P.W.Board			ZD4002	48E42166S01	DIODE,ZENER KDZ15V-Y
MAIN-P.W.Board			ZD4003	48E42166S01	DIODE,ZENER KDZ15V-Y

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			ZD4004	48E42166S01	DIODE,ZENER KDZ15V-Y
MAIN-P.W.Board			ZD4901	48E39120S01	DIODE,ZENER HZK12A2L
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9301	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9302	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9501	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9502	48E39101S01	DIODE,ZENER HZK6A1L
LED-P.W.Board			C8004	08E42196S01	CAP,CER. 1000pF/50V
LED-P.W.Board			LD8004	48E39343S01	LED,BLU UB1106W
Miscellaneous			CH8001	01E41447S01	CONN,ASSY 2P

Mark Model Code

#1 MRX-F65(North American) Only,

\$1 MRX-F65(European) Only,

%1 MRX-F65(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.