


EXPLODED VIEW/PARTS LIST

Escutcheon section

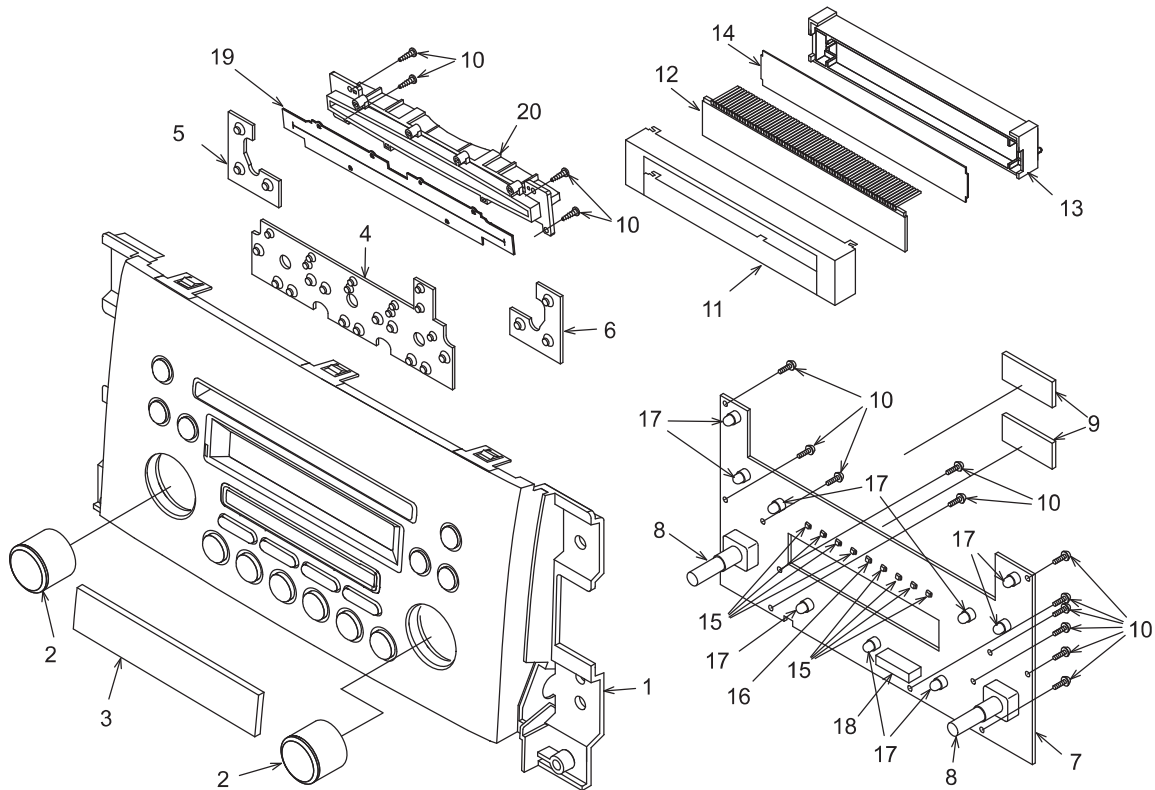


Clamping torque value of a screw is 0.2 +0.04/-0.04 Newton meter.

Note)Some parts depend on each model.The model name is specified in the description .
(6D-A;PS-2996D-A, 6D-B;PS-2996D-B,7D-A;PS-2997D-A)

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8171-20 940-8171-21	ESCUTCHEON ASSY (6D-A,7D-A) ESCUTCHEON ASSY(6D-B)	1
2	380-5610-00	KNOB	2
3	373-1047-00	DIAL COVER	1
4	345-5782-01	RUBBER SW (CENTER)	1
5	345-5783-00	RUBBER SW (LEFT)	1
6	345-5784-00	RUBBER SW (RIGHT)	1
7	-----	Switch PWB	1
8	016-0018/17	VR W/SHAFT	2
9	345-8639-01	PROTECTOR	2
10	716-0778-51	P-TITE SCREW (2x6)	15

NO.	PART NO.	DESCRIPTION	Q'TY
11	331-3883-00	LCD COVER	1
12	379-1362-51	INDICATOR (LCD)	1
13	335-7956-00	LCD HOLDER	1
14	335-7929-00	COLOR FILTER	1
15	001-7048-91	DIODE RED	8
16	001-7087-90	DIODE RED	1
17	017-0420-43	PL LAMP (14V 40mA RED)	7
18	074-3013-74	OUTLETSOCKET	1
19	346-0182-01	LATHER SHEET	1
20	335-7945-00	DISC GUIDE	1


Main section

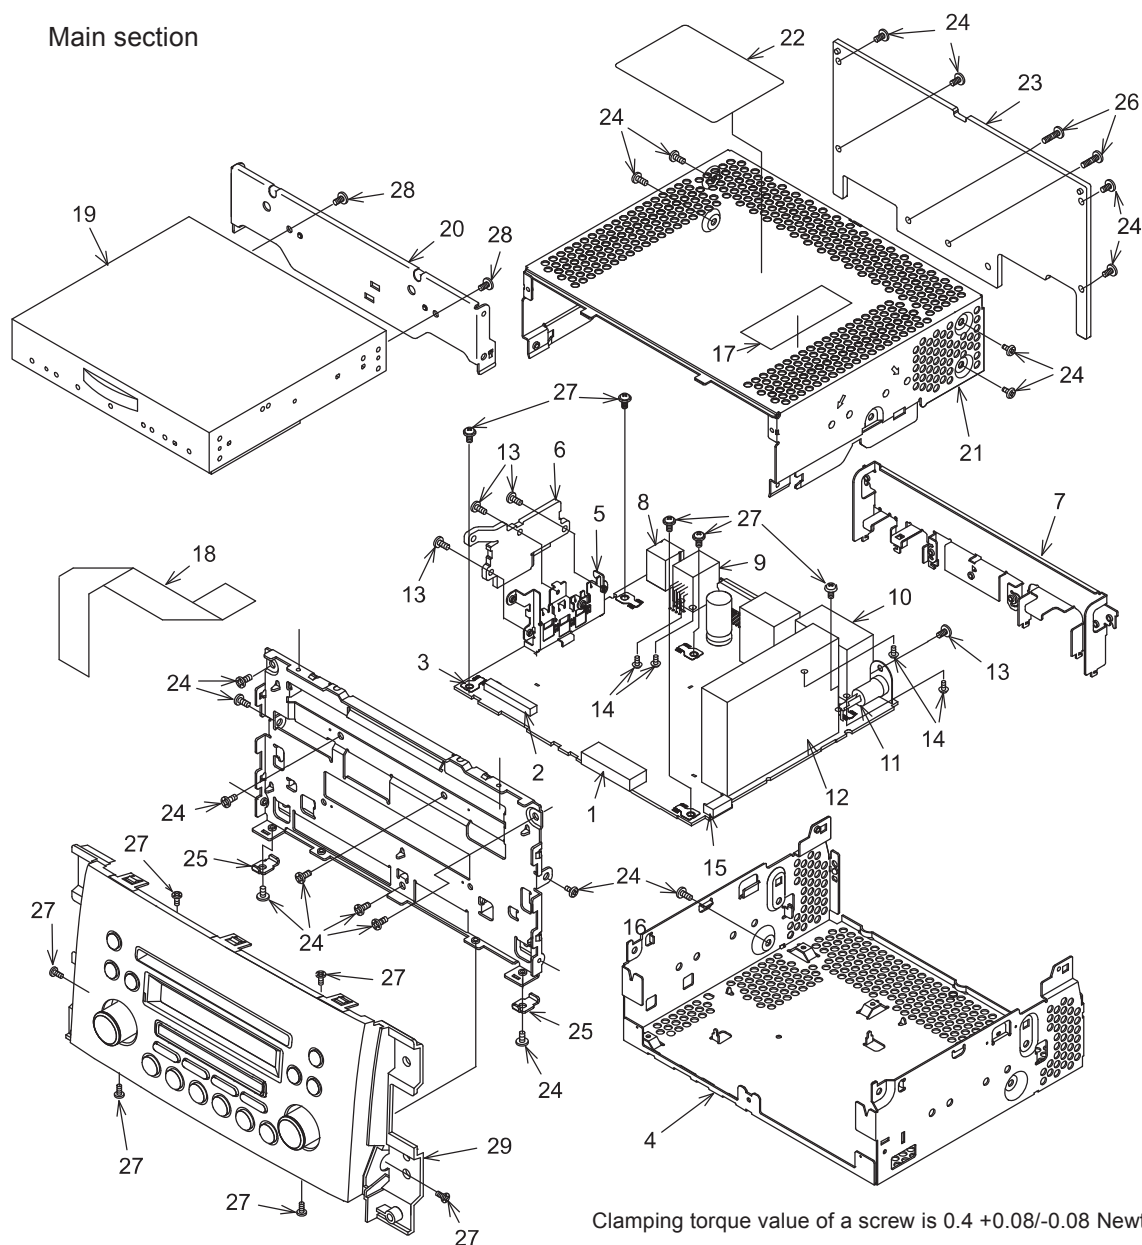

Clamping torque value of a screw is $0.4 \pm 0.08/0.08$ Newton meter.

Note) Some parts depend on each model. The model name is specified in the description.
(6D-A; PS-2996D-A, 6D-B; PS-2996D-B, 7D-A; PS-2997D-A)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	076-0662-74	PLUG(26P)	1	16	309-0836-01	ES PLATE	1
2	074-1237-70	OUTLET SOCKET	1	17	285-1960-00	GUIDE LABEL	1
3	073-0762-90	TERMINAL	5	18	816-4030-50	FLAT WIRE	1
4	311-1919-30	LOWER CASE	1	19	929-5005-80	CD-MECH-MODULE	1
5	331-4126-00	TR HOLDER	1	20	331-4123-00	CD BRKT	1
6	313-1966-00	SUB HEAT SINK	1	21	310-1826-50	UPPER CASE	1
7	331-4127-00	REAR PLATE	1	22	286-6449-47 286-6449-55 286-6449-45	SETPLATE (6D-A) SETPLATE (6D-B) SETPLATE (7D-A)	1
8	074-1194-00	OUTLET SOCKET	1	23	313-1962-00	HEAT SINK	1
9	074-1302-08	OUTLET SOCKET	1	24	714-2606-8B	MACHINE SCREW(M2.6x6)	18
10	074-4007-20	OUTLET SOCKET	1	25	331-4193-20	SU-PLATE	2
11	092-0702-00	ANT-RECEPT	1	26	714-2610-89	MACHINE SCREW(M2.6x10)	2
12	941-0221-70	TUNER PACK	2	27	716-0878-50	IT SCREW(M2.6x5)	11
13	714-2606-8B	MACHINE SCREW(M2.6x6)	4	28	714-2603-8B	MACHINE SCREW(M2.6x3)	2
14	778-3006-00	TAP-SCREW(3x6)	4	29	-----	ESCUTCHEON SECTION Refer to page 5	1
15	076-0717-09	PLUG	1				

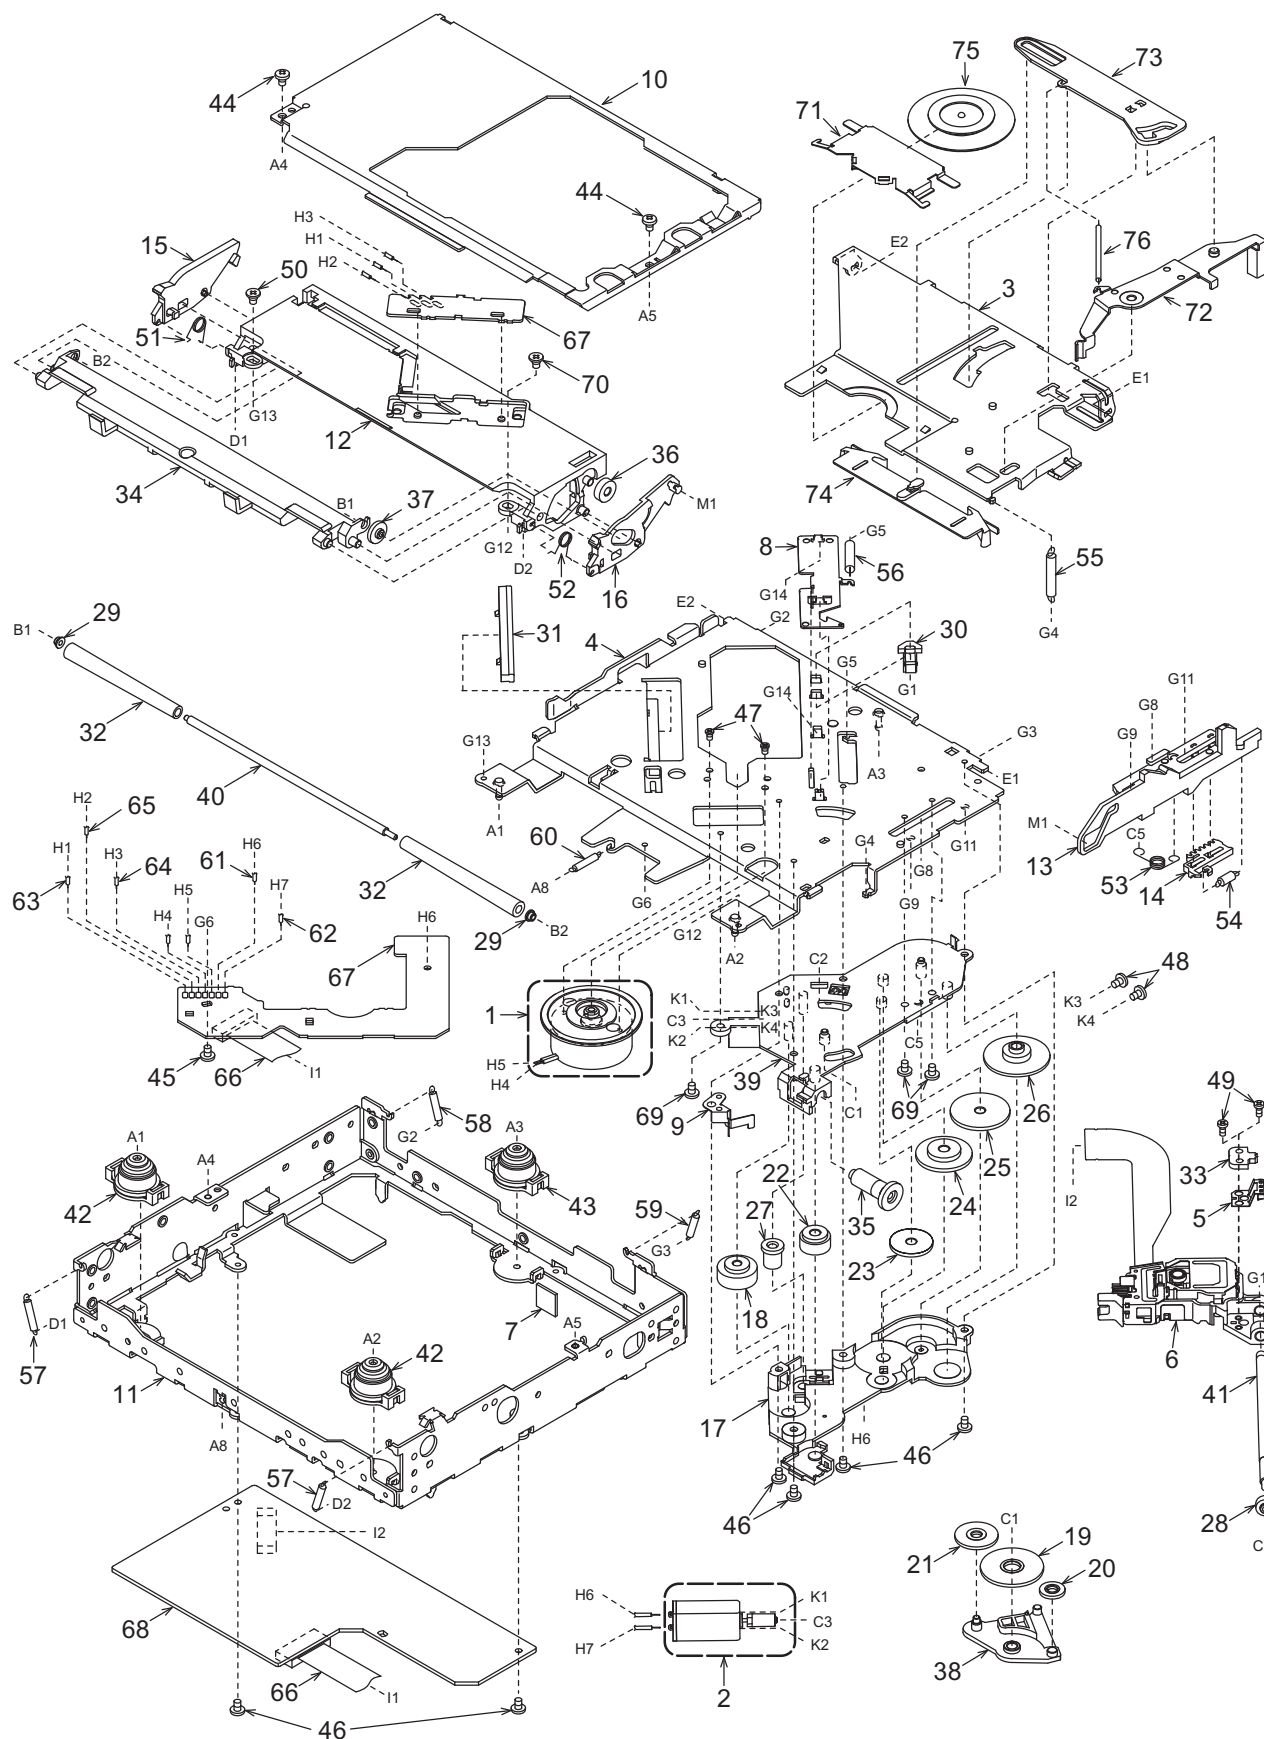

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-182-100	SPD-MOTOR-ASSY	1	39	621-1754-20	GEAR BASE	1
2	SMA-183-100	POW-MOTOR-ASSY	1	40	622-1571-21	ROLLER SHAFT	1
3	620-1596-23	CLAMPER LINK	1	41	624-0020-00	LEAD SCREW	1
4	966-1743-21	DRIVE-PLT-ASSY	1	42	629-0086-20	DAMPER F	2
5	966-1722-20	SH-RACK-ASSY	1	43	629-0087-20	DAMPER R	1
6	969-0071-30	PICKUP-ASSY	1	44	714-2003-8B	MACHIN SCREW(M2x3)	2
7	345-5476-20	CUSHION RUBBER	1	45	716-1507-01	SCREW(M2x3)	1
8	620-1753-20	ID-LOCK PLATE	1	46	716-1670-01	SCREW(M2x4)	6
9	620-1026-21	SPRING PLATE	1	47	716-1733-01	SCREW(M1.7x2.3)	2
10	620-1598-22	UPPER CHASSIS	1	48	716-3551-00	SCREW(M1.4x2.5)	2
11	620-1766-20	LOWER CHASSIS-W	1	49	716-3469-01	SCREW(phi1.7x4)	2
12	621-1742-20	UPPER GUIDE	1	50	716-3473-01	SCREW(M2x3)	1
13	621-1743-20	SHIFT LEVER	1	51	750-6797-20	ROLLER SPRING L	1
14	621-1744-20	RACK	1	52	750-6798-20	ROLLER SPRING R	1
15	621-1745-20	LOCK ARM L	1	53	750-3467-21	SHIFT SPRING	1
16	621-1746-20	LOCK ARM R	1	54	750-3468-20	RACK SPRING	1
17	621-1747-20	GEAR COVER	1	55	750-3469-20	CLAMPER SPRING	1
18	621-0608-21	SECOND GEAR	1	56	750-3470-20	ID-LOCK SPRING	1
19	621-0609-20	BASE GEAR	1	57	750-3472-21	DR-SPRING F	2
20	621-0610-20	IDLE GEAR A	1	58	750-3473-20	DR-SPRING RA	1
21	621-0611-20	IDLE GEAR B	1	59	750-3474-20	DR-SPRING RB	1
22	621-0612-21	ROLLER GEAR A	1	60	750-3475-21	DR-SPRING C	1
23	621-1748-20	POWER GEAR A	1	61	803-4906-60	VINYL-COAT-WIRE(ORG)	1
24	621-1749-20	POWER GEAR B	1	62	816-2590-00	LEAD(GRN)	1
25	621-1750-20	POWER GEAR C	1	63	816-2591-00	LEAD(YEL)	1
26	621-1751-20	POWER GEAR D	1	64	816-2592-00	LEAD(BLU)	1
27	621-0620-20	THREAD GEAR A	1	65	816-2593-00	LEAD(PUR)	1
28	621-0621-20	THREAD GEAR B	1	66	816-2624-50	FLAT WIRE	1
29	621-1726-20	ROLLER SLEEVE	2	67	-----	SENSOR PWB	1
30	621-0623-23	LS-HOLDER	1	68	-----	CD PWB	1
31	621-0624-22	GUIDE RAIL	1	69	780-2025-00	SCREW(M2.0x2.5)	3
32	621-0711-20	LOADING ROLLER	2	70	781-1730-00	SCREW(M1.7x3.0)	1
33	621-1729-20	SH-BASE	1	71	620-1023-23	CLAMPER PLATE	1
34	621-0718-21	ROLLER GUIDE	1	72	620-1752-20	SENSOR ARM	1
35	621-0719-20	ROLLER GEAR	1	73	621-0728-20	STOPPER LINK	1
36	621-0720-20	ROLLER GEAR C	1	74	621-1752-20	DISC STOPPER	1
37	621-0721-20	ROLLER GEAR D	1	75	621-1753-20	CLAMPER RING	1
38	621-1719-20	IDLE CASE	1	76	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST

Switch PWB section (B1)

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Note) Some parts depend on each model. The model name is specified in the description.

(2996D ;PS-2996D-A, -B/ 2997D ;PS-2997D-A)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF	D913	001-7087-90	RBR1112H C,D,E	R924	119-1841-15	1/10W 180k ohm
C902	168-1042-78	16V 0.1uF			RED	R925	119-4711-15	1/10W 470 ohm
C903	168-1042-78	16V 0.1uF	IC901	051-6084-00	NJU6625FG1-03	R926	119-4711-15	1/10W 470 ohm
C904	168-1042-78	16V 0.1uF	J901	074-3013-74	24P	R927	119-5611-15	1/10W 560 ohm
C905	168-1042-78	16V 0.1uF	L901	010-3406-66	22uH J	R928	119-4711-15	1/10W 470 ohm
C906	178-1052-78	1uF	PL901	017-0420-43	14V 40mA RED	R929	119-4711-15	1/10W 470 ohm
D901	001-0516-90	MA111	PL902	017-0420-43	14V 40mA RED	R930	119-5611-15	1/10W 560 ohm
D902	001-0516-90	MA111	PL903	017-0420-43	14V 40mA RED	R931	119-4711-15	1/10W 470 ohm
D903	001-0516-90	MA111	PL904	017-0420-43	14V 40mA RED	R932	119-4711-15	1/10W 470 ohm
D904	001-0516-90	MA111	PL905	017-0420-43	14V 40mA RED	R933	119-5611-15	1/10W 560 ohm
D905	001-7048-91	RFR1112H-22 C,D	PL907	017-0420-43	14V 40mA RED	R934	119-4711-15	1/10W 470 ohm
		RED	PL908	017-0420-43	14V 40mA RED	R935	119-4711-15	1/10W 470 ohm
D906	001-7048-91	RFR1112H-22 C,D	R901	119-0000-05	1/10W 0 ohm JW	R936	119-5611-15	1/10W 560 ohm
		RED	R902	119-0000-05	1/10W 0 ohm JW	R937	119-7511-15	1/10W 750 ohm
D907	001-7048-91	RFR1112H-22 C,D	R907	119-0000-05	1/10W 0 ohm JW	R938	119-8211-15	1/10W 820 ohm
		RED	R908	119-0000-05	1/10W 0 ohm JW	R939	119-8211-15	1/10W 820 ohm
D908	001-7048-91	RFR1112H-22 C,D	R909	119-0000-05	1/10W 0 ohm JW	TH902	002-0306-90	SC20-3J153
		RED	R910	119-0000-05	1/10W 0 ohm JW	VR901	016-0018-17	VR W/SHAFT
D909	001-7048-91	RFR1112H-22 C,D	R915	119-0000-05	1/10W 0 ohm JW	VR902	016-0018-17	VR W/SHAFT
		RED	R916	119-0000-05	1/10W 0 ohm JW	PWB	039-2938-00	PWB(WITHOUT COMPONENT)
D910	001-7048-91	RFR1112H-22 C,D	R918	119-4341-15	1/10W 430k ohm			
		RED	R919	119-1021-15	1/10W 1k ohm			
D911	001-7048-91	RFR1112H-22 C,D	R920	119-1021-15	1/10W 1k ohm			
		RED	R921	119-1841-15	1/10W 180k ohm			
D912	001-7048-91	RFR1112H-22 C,D	R922	119-1841-15	1/10W 180k ohm			
		RED	R923	119-1841-15	1/10W 180k ohm			

Main PWB section (B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT	C305	178-1052-78	1uF	C394	168-1042-78	16V 0.1uF
BL101	941-0221-70	TUNER PACK	C306	178-1052-78	1uF	C395	168-1032-55	0.01uF K
C103	168-2232-55	0.022uF K	C309	168-3332-55	0.033uF K	C396	163-1053-65	50V 1uF
C104	188-1073-28	10V 100uF	C310	168-3332-55	0.033uF K	C397	042-1624-00	16V 4700uF
C105	168-1042-78	16V 0.1uF	C311	188-2253-68	50V 2.2uF	C398	163-1063-35	16V 10uF
C106	168-1042-78	16V 0.1uF	C312	188-2253-68	50V 2.2uF	C399	163-1053-65	50V 1uF
C107	188-1073-28	10V 100uF	C313	188-2253-68	50V 2.2uF	C501	168-1042-78	16V 0.1uF
C108	168-1042-78	16V 0.1uF	C314	188-2253-68	50V 2.2uF	C502	188-4763-18	6.3V 47uF
C109	168-2232-55	0.022uF K	C318	168-1522-55	1500pF K	C503	168-1032-55	0.01uF K
C111	168-2732-55	0.027uF K	C319	168-1522-55	1500pF K	C504	168-1032-55	0.01uF K
C112	168-4745-79	0.47uF Z	C322	188-1063-38	16V 10uF	C505	168-1032-55	0.01uF K
C113	168-3932-78	16V 0.039uF	C323	188-1063-38	16V 10uF	C506	168-1042-78	16V 0.1uF
C114	168-3932-78	16V 0.039uF	C324	188-1073-28	10V 100uF	C507	188-1053-68	50V 1uF
C121	166-1501-50	15pF CH	C325	168-1042-78	16V 0.1uF	C509	168-1022-55	1000pF K
C122	188-4763-38	16V 47uF	C326	188-1053-68	50V 1uF	C510	168-1022-55	1000pF K
C123	168-1022-55	1000pF K	C327	188-1053-68	50V 1uF	C511	168-1042-78	16V 0.1uF
C124	042-1458-90	50V 1uF LN	C328	188-2253-68	50V 2.2uF	C512	168-1032-55	0.01uF K
C125	166-1501-50	15pF CH	C329	188-2253-68	50V 2.2uF	C513	189-1073-29	10V 100uF
C126	166-1011-50	100pF CH	C330	168-1822-55	1800pF K	C514	168-1042-78	16V 0.1uF
C127	166-1011-50	100pF CH	C331	168-1822-55	1800pF K	C515	166-1011-50	100pF CH
C128	166-1011-50	100pF CH	C332	178-3342-78	0.33uF	C516	188-1063-38	16V 10uF
C129	166-1011-50	100pF CH	C333	178-3342-78	0.33uF	C517	042-0559-00	5.5V 0.1F
C130	168-2232-55	0.022uF K	C334	166-4711-50	470pF CH	C722	168-1042-78	16V 0.1uF
C131	188-4763-38	16V 47uF	C335	166-4711-50	470pF CH	C731	172-1041-15	0.1uF
C132	166-1811-50	180pF CH	C346	188-1073-28	10V 100uF	C732	188-1053-68	50V 1uF
C133	168-1042-78	16V 0.1uF	C352	168-1042-78	16V 0.1uF	C741	043-0328-90	0.1uF
C160	168-1042-78	16V 0.1uF	C353	042-1562-15	10V 220uF	C744	188-1073-28	10V 100uF
C212	188-4763-38	16V 47uF	C354	166-2201-50	22pF CH	C761	188-1063-38	16V 10uF
C231	168-1042-78	16V 0.1uF	C355	166-2201-50	22pF CH	C762	188-1063-38	16V 10uF
C232	188-4763-18	6.3V 47uF	C356	166-1007-50	10pF CH	C771	188-1073-28	10V 100uF
C233	168-1042-78	16V 0.1uF	C357	166-1007-50	10pF CH	C772	188-1063-38	16V 10uF
C234	168-2232-55	0.022uF K	C358	188-1063-38	16V 10uF	C811	172-1041-15	0.1uF
C271	189-4773-19	6.3V 470uF	C359	188-1063-38	16V 10uF	C821	188-1063-38	16V 10uF
C273	043-0328-90	0.1uF	C360	188-1063-38	16V 10uF	CCT501	050-0140-54	1/32W 1k ohm x4J
C274	189-2273-29	10V 220uF	C361	188-1063-38	16V 10uF	CCT504	050-0140-54	1/32W 1k ohm x4J
C276	043-0328-90	0.1uF	C391	168-1042-78	16V 0.1uF	CCT505	050-0140-54	1/32W 1k ohm x4J
C301	178-1052-78	1uF	C392	168-1042-78	16V 0.1uF	D391	001-0516-90	MA111
C302	178-1052-78	1uF	C393	168-1042-78	16V 0.1uF	D505	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D506	001-2403-90	M1F60	R122	119-3321-15	1/10W 3.3k ohm	R537	119-1031-15	1/10W 10k ohm
D507	001-4301-25	HZU4.7B1	R123	119-4721-15	1/10W 4.7k ohm	R538	119-1031-15	1/10W 10k ohm
D508	001-0466-90	S5688B	R124	119-2221-15	1/10W 2.2k ohm	R539	119-1031-15	1/10W 10k ohm
D509	001-0504-36	HZS7A1L	R125	119-1021-15	1/10W 1k ohm	R540	119-4731-15	1/10W 47k ohm
D701	001-0424-31	MA4180	R127	119-5631-15	1/10W 56k ohm	R541	119-5621-15	1/10W 5.6k ohm
D702	001-0424-31	MA4180	R128	119-4731-15	1/10W 47k ohm	R542	119-2231-15	1/10W 22k ohm
D703	001-0424-31	MA4180	R130	119-2221-15	1/10W 2.2k ohm	R544	119-4731-15	1/10W 47k ohm
D711	001-0466-90	S5688B	R131	119-1031-15	1/10W 10k ohm	R545	119-6831-15	1/10W 68k ohm
D712	001-0466-90	S5688B	R132	119-1031-15	1/10W 10k ohm	R546	119-1021-15	1/10W 1k ohm
D731	001-0466-90	S5688B	R133	119-2221-15	1/10W 2.2k ohm	R547	119-1021-15	1/10W 1k ohm
D761	001-0504-39	HZS7 B2L	R134	119-2221-15	1/10W 2.2k ohm	R548	119-1031-15	1/10W 10k ohm
D771	001-0347-43	MA4082L	R135	119-1031-15	1/10W 10k ohm	R549	119-3341-15	1/10W 330k ohm
D772	001-0347-30	MA4051H	R271	119-4731-15	1/10W 47k ohm	R550	032-0140-22	1/10W 68k ohm F
D801	001-0592-00	RM4Z	R274	119-0000-05	1/10W 0 ohm JW	R551	032-0140-00	1/10W 56k ohm F
D851	001-4301-68	HZU18B1	R301	119-1021-15	1/10W 1k ohm	R552	117-6821-15	1/8W 6.8k ohm
IC121	051-6201-90	LC72146M	R302	119-1021-15	1/10W 1k ohm	R553	119-4731-15	1/10W 47k ohm
IC271	051-3333-00	NJM2396F05	R305	119-1021-15	1/10W 1k ohm	R554	119-4731-15	1/10W 47k ohm
IC272	051-3366-00	NJM2396F08	R306	119-1021-15	1/10W 1k ohm	R555	119-5621-15	1/10W 5.6k ohm
IC301	051-5042-91	CL7639V11	R309	119-1021-15	1/10W 1k ohm	R556	119-1021-15	1/10W 1k ohm
IC351	051-3034-90	NJM4558V	R310	119-1021-15	1/10W 1k ohm	R557	119-2231-15	1/10W 22k ohm
IC391	051-2040-00	TA8276H	R311	119-5631-15	1/10W 56k ohm	R558	119-2231-15	1/10W 22k ohm
IC501	052-3211-30	M30622MGP-D97GP	R312	119-5631-15	1/10W 56k ohm	R559	119-1021-15	1/10W 1k ohm
IC502	051-0869-58	NJM2103M	R313	119-5631-15	1/10W 56k ohm	R560	119-1021-15	1/10W 1k ohm
IC503	051-9400-29	BR93L46F-W	R314	119-5631-15	1/10W 56k ohm	R561	119-1021-15	1/10W 1k ohm
IC504	051-6600-58	HA12187FP	R319	119-1031-15	1/10W 10k ohm	R562	119-1021-15	1/10W 1k ohm
IC741	051-3369-00	NJM2388F84	R320	119-6811-15	1/10W 680 ohm	R563	119-0000-05	1/10W 0 ohm JW
J231	074-1237-70	20P	R321	119-1031-15	1/10W 10k ohm	R564	119-1021-15	1/10W 1k ohm
J701	074-1194-00	13P CE-NET	R322	119-6811-15	1/10W 680 ohm	R566	119-1021-15	1/10W 1k ohm
J721	074-1302-08	8P	R323	119-0000-05	1/10W 0 ohm JW	R568	119-4731-15	1/10W 47k ohm
J801	074-4007-20	SOCKET(20P)	R324	119-0000-05	1/10W 0 ohm JW	R570	119-4731-15	1/10W 47k ohm
L101	010-2003-04	30uH	R325	119-0000-05	1/10W 0 ohm JW	R572	119-4731-15	1/10W 47k ohm
L102	010-6009-76	22uH J	R326	119-0000-05	1/10W 0 ohm JW	R573	119-4731-15	1/10W 47k ohm
L103	010-6009-76	22uH J	R351	119-8211-15	1/10W 820 ohm			(2997D)
L121	010-6009-76	22uH J	R352	119-1021-15	1/10W 1k ohm	R574	119-4731-15	1/10W 47k ohm
L231	010-6009-76	22uH J	R353	032-0140-50	1/10W 10k ohm F			(2996D)
L501	010-6009-76	22uH J	R354	032-0140-50	1/10W 10k ohm F	R701	116-1211-15	1/4W 120 ohm
L502	010-6009-76	22uH J	R355	032-0140-50	1/10W 10k ohm F	R702	116-6801-15	1/4W 68 ohm
L801	010-8026-00	210uH	R356	032-0140-50	1/10W 10k ohm F	R703	119-2231-15	1/10W 22k ohm
P501	076-0662-74	24P	R357	032-0140-50	1/10W 10k ohm F	R704	119-2231-15	1/10W 22k ohm
P503	076-0717-09	9P	R358	032-0140-50	1/10W 10k ohm F	R711	116-2221-15	1/4W 2.2k ohm
Q121	190-1298-00	2SA1298	R359	032-0140-50	1/10W 10k ohm F	R712	117-1031-15	1/8W 10k ohm
Q122	190-1298-00	2SA1298	R360	032-0140-50	1/10W 10k ohm F	R713	116-2221-15	1/4W 2.2k ohm
Q123	190-1298-00	2SA1298	R391	119-5631-15	1/10W 56k ohm	R714	119-1031-15	1/10W 10k ohm
Q391	125-2027-91	DTC114EUA	R392	119-1221-15	1/10W 1.2k ohm	R715	119-3321-15	1/10W 3.3k ohm
Q392	192-4116-00	2SC4116	R393	119-2221-15	1/10W 2.2k ohm	R726	119-1021-15	1/10W 1k ohm
Q502	190-1736-00	2SA1736	R394	119-2221-15	1/10W 2.2k ohm	R731	116-5621-15	1/4W 5.6k ohm
Q503	192-4116-00	2SC4116	R395	119-2221-15	1/10W 2.2k ohm	R732	116-4721-15	1/4W 4.7k ohm
Q504	192-4116-00	2SC4116	R396	119-2221-15	1/10W 2.2k ohm	R761	032-0092-56	1/8W 22k ohm F
Q505	192-4116-00	2SC4116	R397	119-1031-15	1/10W 10k ohm	R762	119-1541-15	1/10W 150k ohm
Q506	193-2118-50	2SD2118F5 R,S	R398	119-4731-15	1/10W 47k ohm	R763	032-0092-51	1/8W 1k ohm F
Q701	192-4116-00	2SC4116	R399	119-4731-15	1/10W 47k ohm	R764	119-1221-15	1/10W 1.2k ohm
Q711	190-1736-00	2SA1736	R400	119-1031-15	1/10W 10k ohm	R771	119-0000-05	1/10W 0 ohm JW
Q712	192-4116-00	2SC4116	R502	119-4721-15	1/10W 4.7k ohm	R772	119-2231-15	1/10W 22k ohm
Q761	193-1664-00	2SD1664 P,Q,R	R504	119-4721-15	1/10W 4.7k ohm	R773	116-1021-15	1/4W 1k ohm
Q762	125-0021-91	DTA114EUA	R510	119-4721-15	1/10W 4.7k ohm	R774	119-2231-15	1/10W 22k ohm
Q763	125-2027-91	DTC114EUA	R511	119-4721-15	1/10W 4.7k ohm	R779	116-1821-15	1/4W 1.8k ohm
Q771	193-2118-00	2SD2118F5 Q,R,S	R512	119-4721-15	1/10W 4.7k ohm	R780	117-1821-15	1/8W 1.8k ohm
Q773	192-4116-00	2SC4116	R513	119-4721-15	1/10W 4.7k ohm	R781	119-0000-05	1/10W 0 ohm JW
Q775	192-4116-00	2SC4116	R514	119-1021-15	1/10W 1k ohm	R793	119-0000-05	1/10W 0 ohm JW
Q776	125-0021-91	DTA114EUA	R515	119-1041-15	1/10W 100k ohm	R801	119-0000-05	1/10W 0 ohm JW
Q777	125-2027-91	DTC114EUA	R516	119-1041-15	1/10W 100k ohm	R802	119-0000-05	1/10W 0 ohm JW
Q821	190-1736-00	2SA1736	R517	116-1001-15	1/4W 10 ohm	R821	116-1031-15	1/4W 10k ohm
Q822	192-4116-00	2SC4116	R520	119-4731-15	1/10W 47k ohm	R822	119-1031-15	1/10W 10k ohm
R101	119-0000-05	1/10W 0 ohm JW	R522	119-4731-15	1/10W 47k ohm	R823	119-1031-15	1/10W 10k ohm
R102	119-0000-05	1/10W 0 ohm JW	R527	119-4721-15	1/10W 4.7k ohm	R824	116-2221-15	1/4W 2.2k ohm
R103	119-1041-15	1/10W 100k ohm	R528	032-0140-66	1/10W 220 ohm F	R825	116-2221-15	1/4W 2.2k ohm
R104	119-2221-15	1/10W 2.2k ohm	R529	119-1031-15	1/10W 10k ohm	R902	119-0000-05	1/10W 0 ohm JW
R105	119-3911-15	1/10W 390 ohm	R530	119-1041-15	1/10W 100k ohm			(2996D)
R106	119-2221-15	1/10W 2.2k ohm	R531	119-1031-15	1/10W 10k ohm	R903	119-0000-05	1/10W 0 ohm JW
R107	116-1001-15	1/4W 10 ohm	R532	119-4721-15	1/10W 4.7k ohm			(2997D)
R108	119-2231-15	1/10W 22k ohm	R533	119-4721-15	1/10W 4.7k ohm	R905	119-0000-05	1/10W 0 ohm JW
R109	119-5121-15	1/10W 5.1k ohm	R534	119-1021-15	1/10W 1k ohm	SUP101	060-0122-20	DSP-141N-SO0B
R111	119-0000-05	1/10W 0 ohm JW	R535	119-1031-15	1/10W 10k ohm	TH711	002-0318-01	1206L035YRT
R121	119-0000-05	1/10W 0 ohm JW	R536	119-2221-15	1/10W 2.2k ohm	TM101	073-0762-90	TERMINAL

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
TM501	073-0762-90	TERMINAL	TM802	073-0762-90	TERMINAL	PWB	039-2765-02	PWB(WITHOUT COMPONENT)
TM502	073-0762-90	TERMINAL	X121	061-1066-00	702MHz			
TM801	073-0762-90	TERMINAL	X501	060-1533-90	CSTCE10M0G52-RO			

CD PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C134	168-1042-78	16V 0.1uF	R7	033-4731-15	1/10W 47k ohm
C4	168-1042-78	16V 0.1uF	C135	045-6801-50	50V 68pF	R8	033-1051-15	1/10W 1M ohm
C5	046-1032-78	0.01uF	C136	178-1052-78	1uF	R9	033-3311-15	1/10W 330 ohm
C9	046-4722-58	4700pF	C138	168-1042-78	16V 0.1uF	R12	033-4731-15	1/10W 47k ohm
C10	045-1011-50	100pF	C139	168-1042-78	16V 0.1uF	R13	033-1041-15	1/10W 100k ohm
C13	168-1042-78	16V 0.1uF	C140	046-6812-58	680pF	R14	033-4721-15	1/10W 4.7k ohm
C16	168-1042-78	16V 0.1uF	C142	178-1052-78	1uF	R15	033-4721-15	1/10W 4.7k ohm
C17	046-1032-78	0.01uF	C144	042-0560-85	6.3V 100uF	R16	033-1021-15	1/10W 1k ohm
C18	178-1052-78	1uF	C145	168-1042-78	16V 0.1uF	R17	033-1021-15	1/10W 1k ohm
C19	046-1032-78	0.01uF	C146	168-1042-78	16V 0.1uF	R19	033-4731-15	1/10W 47k ohm
C20	168-1042-78	16V 0.1uF	C147	178-1052-78	1uF	R20	033-4731-15	1/10W 47k ohm
C21	042-0595-53	4V220uF	C148	042-0595-53	4V220uF	R23	033-2211-15	1/10W 220 ohm
C22	168-1042-78	16V 0.1uF	C149	163-1073-35	16V100uF	R24	033-4731-15	1/10W 47k ohm
C23	168-1042-78	16V 0.1uF	C150	168-1042-78	16V 0.1uF	R28	033-6841-15	1/10W 680k ohm
C24	046-1032-78	0.01uF	C151	178-1052-78	1uF	R29	033-6841-15	1/10W 680k ohm
C25	045-8097-50	8pF	C200	178-1052-78	1uF	R30	033-1041-15	1/10W 100k ohm
C26	045-8097-50	8pF	CCT1	050-0145-54	1/16W 47k ohm x4	R31	033-1031-15	1/10W 10k ohm
C27	042-0416-52	10V10uF TAN	CCT2	050-0145-58	2.2k ohm x 4	R32	033-1031-15	1/10W 10k ohm
C28	046-1032-78	0.01uF	CCT3	050-0140-63	1/32W 47k ohm x4J	R33	033-1031-15	1/10W 10k ohm
C29	168-1042-78	16V 0.1uF	CCT101	050-0140-68	1/32W 3.3k ohm x4J	R34	033-6831-15	1/10W 68k ohm
C30	045-1201-50	12pF	D1	001-2610-90	RB480KTL	R35	033-6831-15	1/10W 68k ohm
C31	168-1042-78	16V 0.1uF	D2	001-2610-90	RB480KTL	R36	033-3311-15	1/10W 330 ohm
C32	046-1032-78	0.01uF	D3	001-2610-90	RB480KTL	R43	033-4731-15	1/10W 47k ohm
C33	046-1032-78	0.01uF	D4	001-2610-90	RB480KTL	R44	033-4731-15	1/10W 47k ohm
C34	046-1032-78	0.01uF	D5	001-2610-90	RB480KTL	R45	033-4731-15	1/10W 47k ohm
C35	046-1022-58	1000pF	D6	001-2610-90	RB480KTL	R101	033-1231-15	1/10W 12k ohm
C102	163-1073-35	16V100uF	D101	001-0367-91	1SS226	R102	033-3321-15	1/10W 3.3k ohm
C103	046-4722-58	4700pF	IC1	051-7518-18	SN74LVC139APWR	R103	033-3331-15	1/10W 33k ohm
C104	046-1032-78	0.01uF	IC2	051-3315-90	TPS76316DBVR	R104	033-4731-15	1/10W 47k ohm
C105	168-1042-78	16V 0.1uF	IC3	051-7239-38	SN74AHCT08PWR	R105	033-4731-15	1/10W 47k ohm
C106	168-1042-78	16V 0.1uF	IC5	051-5441-08	BD4828G-TR	R106	033-2211-15	1/10W 220 ohm
C107	042-0416-52	10V10uF TAN	IC6	051-6700-00	TMS320DA140	R107	033-2211-15	1/10W 220 ohm
C108	168-1042-78	16V 0.1uF	IC10	052-5055-34	MBM29DL800BA-90PFTN	R108	033-1021-15	1/10W 1k ohm
C109	168-1042-78	16V 0.1uF	IC11	051-6919-08	NJU6391PE	R109	033-1021-15	1/10W 1k ohm
C110	168-1042-78	16V 0.1uF	IC12	051-7221-58	SN74AHC1G04HDC	R110	033-4731-15	1/10W 47k ohm
C111	168-1042-78	16V 0.1uF			KR	R115	033-0000-05	1/10W 0 ohm
C112	168-4732-78	0.047uF	IC13	051-7280-38	TC7SU04FU-TE85L	R116	033-5621-15	1/10W 5.6k ohm
C113	168-4732-78	0.047uF	IC14	051-7280-38	TC7SU04FU-TE85L	R117	033-4731-15	1/10W 47k ohm
C114	168-1042-78	16V 0.1uF	IC101	051-6069-08	FAN8047G3	R118	033-3341-15	1/10W 330k ohm
C115	045-4701-50	47pF	IC102	051-6399-00	TC94A15F	R119	033-2231-15	1/10W 22k ohm
C116	046-4712-58	470pF	J1	074-1138-65	15P	R120	033-2231-15	1/10W 22k ohm
C117	046-4712-58	470pF	J2	074-1138-60	10P	R121	117-1001-15	1/10W 10 ohm
C118	168-1042-78	16V 0.1uF	J3	074-1237-70	20P	R122	033-2211-15	1/10W 220 ohm
C119	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188PQR	R123	117-6811-15	1/10W 680 ohm
C120	046-1532-78	0.015uF	Q2	125-2004-92	RN1402	R124	032-0162-50	1/10W 0.51 ohm
C121	046-6822-58	6800pF	Q101	131-1188-50	2SB1188PQR	R126	033-1021-15	1/10W 1k ohm
C122	168-1042-78	16V 0.1uF	Q102	131-1188-50	2SB1188PQR	R127	033-1021-15	1/10W 1k ohm
C123	046-1032-78	0.01uF	R1	033-4721-15	1/10W 4.7k ohm	R130	033-1051-15	1/10W 1M ohm
C126	046-3332-78	0.033uF	R2	033-1041-15	1/10W 100k ohm	TM101	073-0768-90	TERMINAL
C127	046-4722-58	4700pF	R3	033-1041-15	1/10W 100k ohm	X1	061-3534-90	16.92MHz
C130	168-1042-78	16V 0.1uF	R4	033-1031-15	1/10W 10k ohm	PWB	039-2429-21	PWB(WITHOUT COMPONENTS)
C131	046-1522-58	1500pF	R5	033-2231-15	1/10W 22k ohm			
C132	168-1042-78	16V 0.1uF	R6	033-3911-15	1/10W 390 ohm			
C133	046-1532-78	0.015uF						

Sensor PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D11	001-7058-90	AN1105W-RR	Q11	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
D12	001-7058-90	AN1105W-RR	Q12	060-4015-90	PS1192H	PWB	039-2675-00	PWB(WITHOUT COMPONENTS)
J4	074-1138-60	10P	S1	013-7414-50	CHUCKING			