


Exploded view of general assembly and parts list

Block No.M1MM

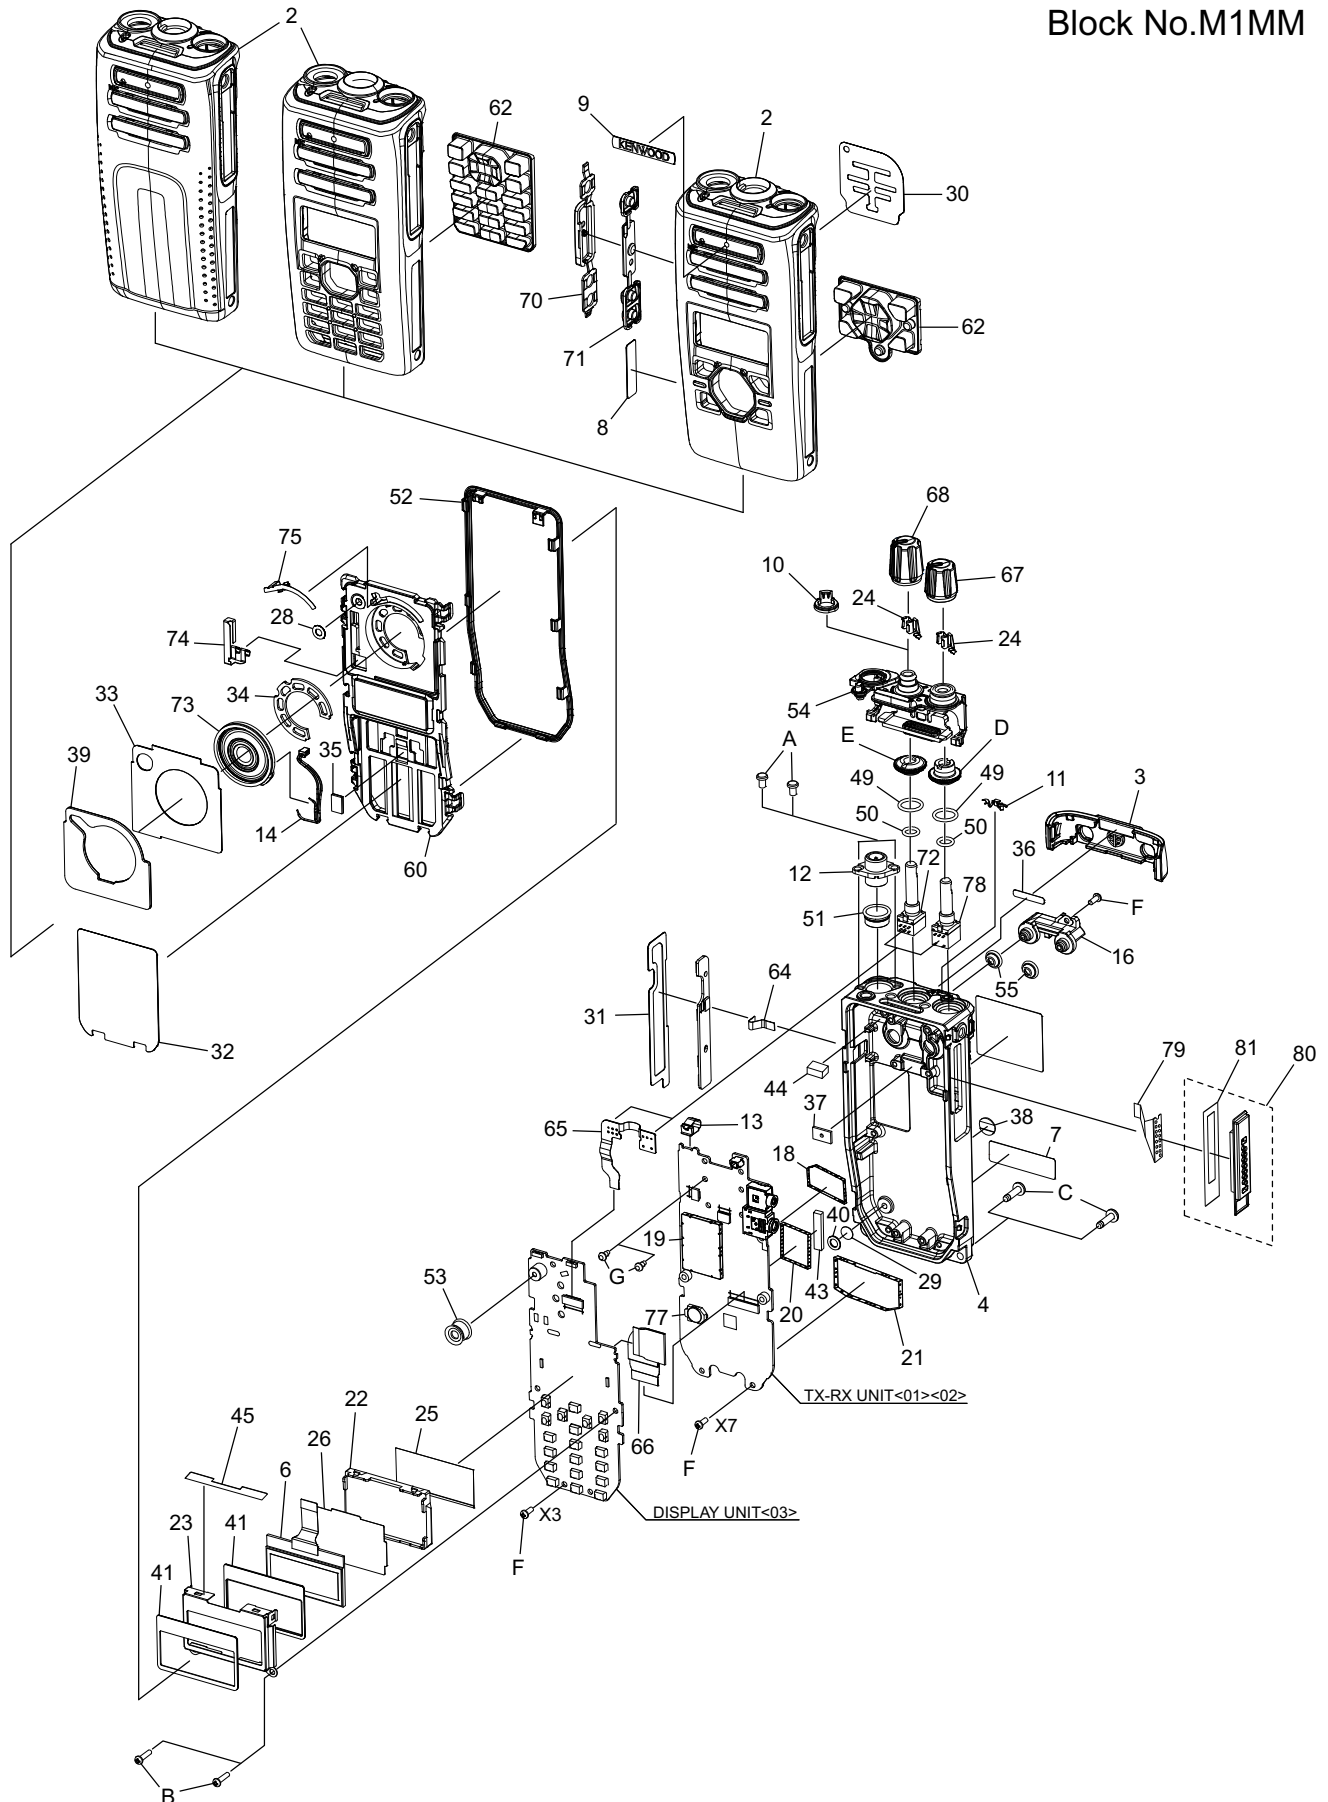

General assembly


Block No. [M][1][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
2	A0C-0174-00	P.CABINET ASSY	BASIC UNIV	3200K,3200E3,3300K,3300E3
2	A0C-0175-00	P.CABINET ASSY	STD UNIV	3200K2,3200E2,3300K2,3300E2
2	A0C-0176-00	P.CABINET ASSY	FULL UNIV	3200K3,3200E,3300K3,3300E
3	A8A-0050-00	REAR PANEL		
4	A1A-0106-00	CHASSIS	UNIV	
6	B3H-0062-00	LCD ASSY		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
7	B4B-0006-00	CAUTION STICKER	FCC	3200K,3200K2,3200K3,3300K,3300K2,3300K3
7	B4C-0545-10	STANDARD LABEL	ADDRESS	3200E,3200E2,3200E3,3300E,3300E2,3300E3
8	B42-7417-04	STICKER	NEXEDGE	
9	B4D-0044-00	KENWOOD BADGE		
10	D32-0454-04	STOPPER	CH KNOB	3200K,3200E3,3300K,3300E3
11	D3C-0003-00	STOPPER	NUT	
12	E04-0467-15	C.RECEPTACLE-SM	SMA	
13	E2D-0083-00	TERMINAL	ANT	
14	E3K-0275-00	LEAD.WIRE W.C.	SP	
16	E7C-0018-00	TERMINAL BLOCK	BATT	
18	F10-3227-05	SHIELDING COVER	BLS/GPS	
19	F1B-0084-00	SHIELDING COVER	BLS/AK2401	
20	F1B-0086-00	SHIELDING COVER		
21	F1B-0088-00	SHIELDING COVER		
22	B1B-0105-00	ILL.GUIDE	LCD	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
23	J2B-0350-20	MOUNTING	LCD	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
24	G0K-0012-00	KNOB SPRING	(x2)	
25	B1B-0110-00	REF.SHEET	LCD	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
26	B1B-0138-00	FILTER	LCD	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
28	G1A-0057-00	FIBROUS SHEET	ECM	
29	G1A-0063-00	FIBROUS SHEET	AIR LEAK GORE	
30	G1A-0053-00	FIBROUS SHEET	SP	
31	G1G-0075-00	SHEET	PTT	
32	G1G-0076-00	SHEET	KEY	
33	G1G-0077-00	SHEET	SP/BT/GPS	
34	G1B-0266-00	RUBBER SHEET	SP	
35	G1G-0080-00	SHEET	KEY 4DIRECTIONS	3200K2,3200E2,3300K2,3300E2
36	G1B-0240-00	SEAL	VOID	
37	G11-4090-14	SHEET	FINAL	
38	G11-4440-04	SHEET	LEAK COVER	
39	G1D-0203-00	CUSHION	SP/ECM	
40	G1D-0204-00	CUSHION	AIR LEAK	
41	G1D-0205-00	CUSHION	LCD(x2)	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
43	G13-2102-34	CONDUCT CUSHION	BLS	3300K,3300K2,3300K3,3300E,3300E2,3300E3
44	G13-2220-04	CUSHION	ANT	
45	G1B-0300-00	SHEET	LIGHT LEAKAGE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
49	G53-1792-04	PACKING	O RING-NUT(x2)	
50	G53-2211-04	O RING	VOL/CH(x2)	
51	G5D-0133-00	PACKING	ANT	
52	G5D-0121-00	PACKING	HOLDER	
53	G5D-0122-00	PACKING	ECM	
54	G5D-0120-00	PACKING	TOP	
55	G5D-0128-00	PACKING	TER.BLOCK/RING(x2)	
60	J1K-0493-00	HOLDER	SP/LCD/KEY	
62	K2K-0247-00	KEY TOP	STD	3200K2,3200E2,3300K2,3300E2
62	K2K-0248-00	KEY TOP	FULL	3200K3,3200E,3300K3,3300E
64	J87-0027-15	FPC(LEAD FREE)	PTT	
65	J8C-0020-00	FLEX P.BOARD	VOL/ROSW	
66	J8C-0022-00	FLEX P.BOARD	KEY-MAIN	
67	K2K-0249-00	KNOB	VOL	
68	K2K-0250-00	KNOB	ROSW	
70	K2K-0251-00	KNOB	PTT	
71	K2K-0252-00	BUTTON KNOB	PTT	
72	S6A-0004-00	ROTARY SWITCH		
73	T0H-0025-10	SPEAKER	D28	
74	T9A-0058-00	ANTENNA ELEMENT	GPS	
75	T9A-0059-00	ANTENNA ELEMENT	BT	
77	W09-0971-05	LITHIUM CELL		
78	R31-0692-15	V RESISTOR		
79	J8C-0021-00	FLEX P.BOARD	UNIV	
80	E58-0532-15	R.RECEPTACLE	UNIV	
81	J99-0715-08	ADHESIVE SHEET	SA*UNIV	3200K,3200K2,3200K3,3200E,3200E2,3200E3
A	N09-6554-05	PAN HEAD SCREW	SMA(x2)	
B	N79-2080-43	P.HEAD T.SCREW	LCD(x2)	
C	N09-6646-05	SPECIAL SCREW	CASE(x2)	
D	N14-1011-00	CIRCULAR NUT	VOL	
E	N14-1012-00	CIRCULAR NUT	ROSW	
F	N83-2005-48	P.HEAD T.SCREW	UNIT(x11)	
G	N84-2004-43	P.HEAD T.SCREW	TER.BLOCK (+,-)(x2)	
-	XCA-031K-00	TX-RX UNIT	SERVICE UNIT	3200K,3200K2,3200K3
-	XCA-031E-01	TX-RX UNIT	SERVICE UNIT	3200E,3200E2,3200E3
-	XCA-032K-00	TX-RX UNIT	SERVICE UNIT	3300K,3300K2,3300K3
-	XCA-032E-01	TX-RX UNIT	SERVICE UNIT	3300E,3300E2,3300E3

△ Symbol No.	Part No.	Part Name	Description	Local
-	XC1-209K-00	DISPLAY UNIT	BASIC	3200K,3200E3,3300K,3300E3
-	XC1-209K-01	DISPLAY UNIT	STD	3200K2,3200E2,3300K2,3300E2
-	XC1-209K-02	DISPLAY UNIT	FULL	3200K3,3200E,3300K3,3300E

Packing materials and accessories parts list

Block No.M2MM

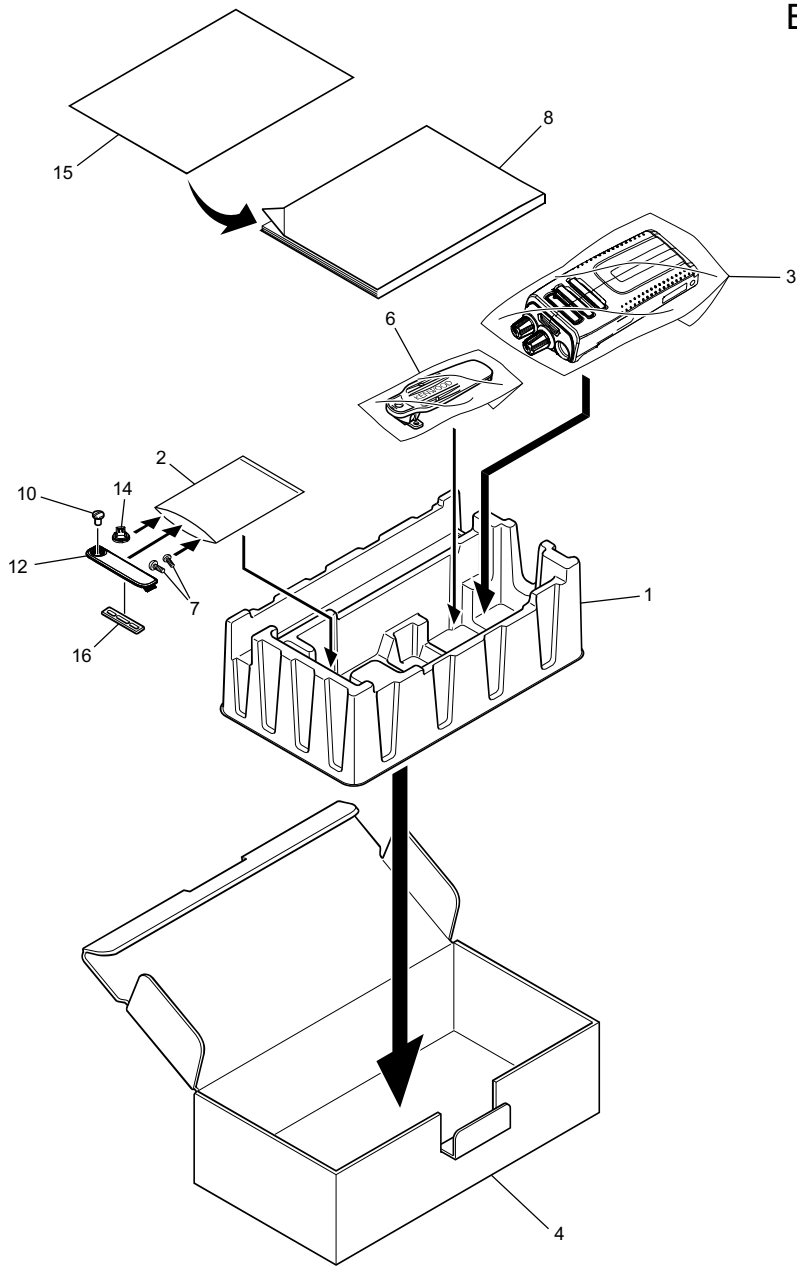

Packing and accessories

Block No. [M][2][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	H1C-0175-00	PACKING FIXTURE		
2	-----	PROTECTION BAG	ACC/CAP	
3	-----	PROTECTION BAG	RADIO	
4	H5A-1304-00	ITEM CARTON		
6	J29-0730-05	HOOK	ACC-KBH-11	
7	N09-6585-15	SPECIAL SCREW	ACC-HOOK(x2)	
8	B5A-2071-00	INST.MANUAL	ACC-3 LANG	3200K,3200K2,3200K3,3300K,3300K2,3300K3
8	B5A-2072-00	INST.MANUAL	ACC-9 LANG	3200E,3200E2,3200E3,3300E,3300E2,3300E3
10	N08-0571-04	DRESSED SCREW	ACC-UNIV CAP	
12	B0K-0076-00	CAP	ACC-UNIV	
14	D32-0454-04	STOPPER	ACC-CH KNOB	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
15	-----	PAMPHLET	ACC-DOC	3200E,3200E2,3200E3,3300E,3300E2,3300E3
16	G5D-0027-00	PACKING	ACC-UNIV CAP	

Electrical parts list

TX-RX UNIT

**XC1-179K-00 (NX-3200K,NX-3200K2,
NX-3200K3,NX-3200E,NX-3200E2,NX-3200E3)**

***Note : This part cannot be replaced. Therefore,
this part is not supplied as a service part.**

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	XC61CC5602N-G	IC		
IC2	LXDC2XQ12A-252	IC		
IC3	TPS62140RGT	IC		
IC4	LXDC2HN18F163	IC		
IC5	-----	IC	*Note	
IC6	XC6209B502D-G	IC		
IC7	-----	IC	*Note	
IC8	BU18TD2WNVX	IC		
IC9	XC6209B312D-G	IC		
IC10	XC6215B122N-G	IC		
IC11	NJM2878F4-32	IC		
IC12	XC8102AA07-G	IC		
IC13	TPS61041DRVR	IC		
IC14	-----	IC	*Note	
IC15	XC6209B502D-G	IC		
IC17	XC6209B502D-G	IC		
IC18	BU7442NUX	IC		
IC101	OPA170AIDRLR	IC		
IC102	BU7295HFV	IC		
IC201	XC8102AA07-G	IC		
IC202	BGU6104	IC		
IC203	BA3472FVM	IC		
IC303	-----	IC	*Note	
IC351	-----	IC	*Note	
IC352	74AVC4TD245GU	IC		
IC353	74AVC4TD245GU	IC		
IC401	-----	IC	*Note	
IC402	-----	IC	*Note	
IC403	S-80135ANPF-G	IC		
IC404	-----	IC	*Note	
IC405	TC7SZ08FE	IC		
IC406	KXCJ9-1008	IC		
IC409	ADS7961SRHB	IC		
IC410	DAC124S085CIS	IC		
IC601	-----	IC	*Note	
IC602	NJW4107U2-05A	IC		
IC603	TC7W53FKFT	IC		
IC604	TC7SPB9306TUF	IC		
IC605	BD11600NUX	IC		
IC606	TC7WT126FU-F	IC		
IC607	TC7SZ08FE	IC		
Q1	EMD12	TRANSISTOR		
Q2	SSM6N15AFEM	DUAL FET		
Q3	SSM6N15AFEM	DUAL FET		
Q4	VT6M1	FET		
Q5	VT6M1	FET		
Q6	LTC014EEBFS8	DIGI TRANSISTOR		
Q7	2SB1132(Q,R)	TRANSISTOR		
Q102	EM6M2	FET		
Q103	VT6M1	FET		
Q113	2SD2654/W/	TRANSISTOR		
Q114	VT6M1	FET		
Q131	MCH3914-H/8/	FET		
Q151	2SC5108F/Y/	TRANSISTOR		
Q181	2SC5108F/Y/	TRANSISTOR		
Q201	RD01MUS2BT513	FET		
Q202	RD07MUS2BT514	FET		
Q203	LSCR523EBFS8	TRANSISTOR		
Q204	LTC044EEBFS8	DIGI TRANSISTOR		
Q205	SSM3K15AMFVF	FET		
Q206	SSM3K15AMFVF	FET		
Q207	EMD12	TRANSISTOR		
Q351	SSM3K15AMFVF	FET		
Q401	2SC4617/S/	TRANSISTOR		
Q402	LTC044EEBFS8	DIGI TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
D1	RR1LAM4S	DIODE		
D8	DAN222	DIODE ARRAY		
D9	RB520SM-30	DIODE		
D10	RB561VM-40	SCHOTTKY DIODE		
D102	EDZV8.2B	ZENER DIODE		
D111	1SS400SM	DIODE		
D131	SMV1251-079LF	VARI CAP DIODE		
D132	SMV1801-079LF	VARI CAP DIODE		
D133	SMV1801-079LF	VARI CAP DIODE		
D134	SMV1801-079LF	VARI CAP DIODE		
D135	SMV1801-079LF	VARI CAP DIODE		
D136	SMV1130-079LF	VARI CAP DIODE		
D201	RN142S	DIODE		
D202	RN142S	DIODE		
D203	RN142S	DIODE		
D204	EDZV5.6B	ZENER DIODE		
D205	RN142S	DIODE		
D301	1SS400SM	DIODE		
D302	1SS400SM	DIODE		
D303	1SS390	DIODE		
D304	1SS390	DIODE		
D401	RB521CM-30	DIODE		
D402	RB521CM-30	DIODE		
D403	1SS400SM	DIODE		
D404	1SS400SM	DIODE		
D405	1SS400SM	DIODE		
D406	1SS400SM	DIODE		
D407	1SS400SM	DIODE		
D601	RB521CM-30	DIODE		
D609	RB521CM-30	DIODE		
D620	EDZV6.8B	ZENER DIODE		
D621	EDZV6.8B	ZENER DIODE		
D622	RBE05SM20A	DIODE		
D623	RBE05SM20A	DIODE		
D624	RB521CM-30	DIODE		
D625	RB521CM-30	DIODE		
D626	RB521CM-30	DIODE		
D627	RB521CM-30	DIODE		
D628	RB521CM-30	DIODE		
D629	EMZT6.8E	ZENER DIODE		
D630	EMZT6.8E	ZENER DIODE		
D632	EMZT6.8E	ZENER DIODE		
D633	RSB12Z	ZENER DIODE		
D634	RSB12Z	ZENER DIODE		
C1	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C2	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C3	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C4	C93-1967-05	C CAPACITOR	470pF 50V	
C5	C93-1967-05	C CAPACITOR	470pF 50V	
C6	C93-1967-05	C CAPACITOR	470pF 50V	
C7	C93-1967-05	C CAPACITOR	470pF 50V	
C8	C93-1967-05	C CAPACITOR	470pF 50V	
C9	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C10	C93-1967-05	C CAPACITOR	470pF 50V	
C14	C93-1967-05	C CAPACITOR	470pF 50V	
C15	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C16	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C17	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C18	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C19	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C20	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C21	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C22	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C23	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C24	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C25	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C26	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C27	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C28	C93-1967-05	C CAPACITOR	470pF 50V	
C29	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C30	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C31	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C32	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C33	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C34	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C35	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C36	C93-1967-05	C CAPACITOR	470pF 50V	
C37	C93-1967-05	C CAPACITOR	470pF 50V	
C38	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C39	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C40	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C41	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C42	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C43	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C44	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C46	CK73GXR1E475K	C CAPACITOR	4.7uF 25V K	
C47	CK73GB1A335K	C CAPACITOR	3.3uF 10V K	
C48	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C49	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C50	CK730JM1H684K	C CAPACITOR	0.68uF 50V K	
C51	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C52	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C53	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C54	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C55	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C56	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C60	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C62	C93-1959-05	C CAPACITOR	0.1uF 16V	
C63	C93-1959-05	C CAPACITOR	0.1uF 16V	
C64	C93-1959-05	C CAPACITOR	0.1uF 16V	
C65	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C66	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C67	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C68	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C69	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C70	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C102	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C103	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C104	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C105	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C106	C93-1959-05	C CAPACITOR	0.1uF 16V	
C107	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C108	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
C111	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C112	CS77BP1A4R7M	TA E CAPACITOR	4.7uF 10V M	
C121	CK73FBB1H154K	C CAPACITOR	0.15uF 50V K	
C122	CS77ABE1D100M	TA E CAPACITOR	10uF 20V M	
C123	CK73FB1H473K	C CAPACITOR	0.047uF 50V K	
C132	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C133	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C134	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C135	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C137	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C138	CC73HCH1HR75B	C CAPACITOR	0.75pF 50V B	
C139	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C140	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C141	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C142	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C144	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C145	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C146	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C147	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C181	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C182	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C183	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C191	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C192	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C193	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C194	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C195	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C197	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C198	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C202	CC73GCH1H120G	C CAPACITOR	12pF 50V G	
C203	CC73GCH1H020B	C CAPACITOR	2pF 50V B	
C204	CC73GCH1H090B	C CAPACITOR	9pF 50V B	
C205	CC73GCH1H150G	C CAPACITOR	15pF 50V G	
C206	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C207	CC73GCH1H220G	C CAPACITOR	22pF 50V G	
C209	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C211	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C212	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C213	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C214	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C218	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C220	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C221	CK73HB1E473K	C CAPACITOR	0.047uF 25V K	
C222	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C223	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C224	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C225	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C226	CC73GCH1H100B	C CAPACITOR	10pF 50V B	
C227	CC73GCH1H391J	C CAPACITOR	390pF 50V J	
C228	CC73GCH1H060B	C CAPACITOR	6pF 50V B	
C233	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C234	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C235	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C237	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C238	CC73GCH1H151J	C CAPACITOR	150pF 50V J	
C239	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C240	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C241	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C246	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	
C247	CC73GCH1H180G	C CAPACITOR	18pF 50V G	
C248	CC73GCH1H090B	C CAPACITOR	9pF 50V B	
C249	CC73GCH1H150G	C CAPACITOR	15pF 50V G	
C250	CC73GCH1H040B	C CAPACITOR	4pF 50V B	
C251	CC73GCH1H080B	C CAPACITOR	8pF 50V B	
C252	CC73HCH1H270G	C CAPACITOR	27pF 50V G	
C253	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
C255	CC73GCH1H030B	C CAPACITOR	3pF 50V B	
C257	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C258	C93-1969-05	C CAPACITOR	1000pF 50V	
C259	C93-1969-05	C CAPACITOR	1000pF 50V	
C260	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C261	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C262	CK73GB1C563K	C CAPACITOR	0.056uF 16V K	
C263	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C264	CK73HB1H822K	C CAPACITOR	8200pF 50V K	
C265	CK73HB1H822K	C CAPACITOR	8200pF 50V K	
C266	C93-1969-05	C CAPACITOR	1000pF 50V	
C269	CC73GCH1H180G	C CAPACITOR	18pF 50V G	
C301	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	
C302	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C303	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C304	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C305	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C306	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C307	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C308	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C309	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C310	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C311	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C312	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C313	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C314	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C315	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C316	CK730BS0J106M	C CAPACITOR	10uF 6.3V M	
C317	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C319	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C320	CC73HCH1H390G	C CAPACITOR	39pF 50V G	
C321	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C322	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C323	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C324	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C325	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C326	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C327	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C328	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C329	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C330	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C331	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C332	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C333	CK730BS0J106M	C CAPACITOR	10uF 6.3V M	
C334	CC73HCH1H390G	C CAPACITOR	39pF 50V G	
C338	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C341	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C342	CK730BS0J106M	C CAPACITOR	10uF 6.3V M	
C343	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C344	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C345	CK73HB1A105K	C CAPACITOR	1uF 10V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C346	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C453	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C354	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C454	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C356	C93-1953-05	C CAPACITOR	0.01uF 25V		C455	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C357	CK73HB1A105K	C CAPACITOR	1uF 10V K		C456	C93-1967-05	C CAPACITOR	470pF 50V	
C358	C93-1959-05	C CAPACITOR	0.1uF 16V		C457	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C359	C93-1959-05	C CAPACITOR	0.1uF 16V		C458	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C360	C93-1959-05	C CAPACITOR	0.1uF 16V		C459	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C361	C93-1959-05	C CAPACITOR	0.1uF 16V		C469	C93-1967-05	C CAPACITOR	470pF 50V	
C363	CC73HCH1H180G	C CAPACITOR	18pF 50V G		C470	C93-1967-05	C CAPACITOR	470pF 50V	
C364	CK73HB1A105K	C CAPACITOR	1uF 10V K		C471	C93-1967-05	C CAPACITOR	470pF 50V	
C365	CK73HB1A105K	C CAPACITOR	1uF 10V K		C472	C93-1967-05	C CAPACITOR	470pF 50V	
C366	C93-1959-05	C CAPACITOR	0.1uF 16V		C473	C93-1967-05	C CAPACITOR	470pF 50V	
C367	C93-1959-05	C CAPACITOR	0.1uF 16V		C474	C93-1967-05	C CAPACITOR	470pF 50V	
C368	C93-1959-05	C CAPACITOR	0.1uF 16V		C475	C93-1967-05	C CAPACITOR	470pF 50V	
C369	CC73HCH1H220G	C CAPACITOR	22pF 50V G		C476	C93-1967-05	C CAPACITOR	470pF 50V	
C370	CK73HB1A105K	C CAPACITOR	1uF 10V K		C477	C93-1967-05	C CAPACITOR	470pF 50V	
C371	C93-1959-05	C CAPACITOR	0.1uF 16V		C480	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C372	C93-1959-05	C CAPACITOR	0.1uF 16V		C481	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C373	C93-1959-05	C CAPACITOR	0.1uF 16V		C482	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C374	C93-1959-05	C CAPACITOR	0.1uF 16V		C483	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C375	C93-1959-05	C CAPACITOR	0.1uF 16V		C484	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C376	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C485	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C377	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C486	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C378	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C487	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C379	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C488	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C380	C93-1959-05	C CAPACITOR	0.1uF 16V		C489	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C381	C93-1959-05	C CAPACITOR	0.1uF 16V		C496	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C382	CC73HCH1H470J	C CAPACITOR	47pF 50V J		C497	C93-1959-05	C CAPACITOR	0.1uF 16V	
C383	C93-1959-05	C CAPACITOR	0.1uF 16V		C498	C93-1959-05	C CAPACITOR	0.1uF 16V	
C384	C93-1959-05	C CAPACITOR	0.1uF 16V		C499	C93-1959-05	C CAPACITOR	0.1uF 16V	
C385	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C500	C93-1959-05	C CAPACITOR	0.1uF 16V	
C386	C93-1959-05	C CAPACITOR	0.1uF 16V		C501	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C387	C93-1959-05	C CAPACITOR	0.1uF 16V		C502	C93-1959-05	C CAPACITOR	0.1uF 16V	
C388	CK73HB1A105K	C CAPACITOR	1uF 10V K		C510	C93-1967-05	C CAPACITOR	470pF 50V	
C389	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C515	C93-1967-05	C CAPACITOR	470pF 50V	
C391	CC73HCH1H121J	C CAPACITOR	120pF 50V J		C516	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C392	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C517	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C395	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B		C518	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C401	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C601	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C402	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C602	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C403	C93-1953-05	C CAPACITOR	0.01uF 25V		C603	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C404	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C604	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C405	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C606	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C406	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C607	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C407	C93-1953-05	C CAPACITOR	0.01uF 25V		C608	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C408	CC73HCH1H050B	C CAPACITOR	5pF 50V B		C609	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C421	C93-1959-05	C CAPACITOR	0.1uF 16V		C610	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C422	CC73HCH1H180G	C CAPACITOR	18pF 50V G		C612	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C423	CC73HCH1H150G	C CAPACITOR	15pF 50V G		C614	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C424	CK73HB1A224K	C CAPACITOR	0.22uF 10V K		C615	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C425	C93-1959-05	C CAPACITOR	0.1uF 16V		C617	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C426	C93-1959-05	C CAPACITOR	0.1uF 16V		C618	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C427	C93-1959-05	C CAPACITOR	0.1uF 16V		C620	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C428	C93-1959-05	C CAPACITOR	0.1uF 16V		C621	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C429	CK73FB1C106K	C CAPACITOR	10uF 16V K		C622	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C430	CK73FB1C106K	C CAPACITOR	10uF 16V K		C625	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C431	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K		C626	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C432	CK73FB1C106K	C CAPACITOR	10uF 16V K		C627	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C433	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K		C657	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C434	C93-1959-05	C CAPACITOR	0.1uF 16V		C658	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C435	C93-1959-05	C CAPACITOR	0.1uF 16V		C659	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C436	CK73FB1C106K	C CAPACITOR	10uF 16V K		C660	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C437	C93-1959-05	C CAPACITOR	0.1uF 16V		C663	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C438	C93-1959-05	C CAPACITOR	0.1uF 16V		C672	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C439	C93-1959-05	C CAPACITOR	0.1uF 16V		C674	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C440	C93-1959-05	C CAPACITOR	0.1uF 16V		C676	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C441	C93-1959-05	C CAPACITOR	0.1uF 16V		C681	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C442	C93-1959-05	C CAPACITOR	0.1uF 16V		C682	C93-1953-05	C CAPACITOR	0.01uF 25V	
C443	C93-1959-05	C CAPACITOR	0.1uF 16V		C683	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C444	C93-1959-05	C CAPACITOR	0.1uF 16V		C685	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C445	CK73HB1A105K	C CAPACITOR	1uF 10V K		C686	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C446	C93-1959-05	C CAPACITOR	0.1uF 16V		C687	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C447	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C688	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C448	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C689	C93-1953-05	C CAPACITOR	0.01uF 25V	
C449	C93-1953-05	C CAPACITOR	0.01uF 25V		C690	C93-1953-05	C CAPACITOR	0.01uF 25V	
C450	C93-1959-05	C CAPACITOR	0.1uF 16V		C691	C93-1953-05	C CAPACITOR	0.01uF 25V	
C451	C93-1959-05	C CAPACITOR	0.1uF 16V		C692	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C452	CK73HB1A105K	C CAPACITOR	1uF 10V K		C693	C93-1953-05	C CAPACITOR	0.01uF 25V	

△ Symbol No.	Part No.	Part Name	Description	Local
C694	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C695	C93-1953-05	C CAPACITOR	0.01uF 25V	
C696	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C697	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C698	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C699	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C700	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C701	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C702	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C703	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C704	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C705	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C706	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C707	C93-1953-05	C CAPACITOR	0.01uF 25V	
C708	C93-1967-05	C CAPACITOR	470pF 50V	
C709	C93-1953-05	C CAPACITOR	0.01uF 25V	
C710	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C711	C93-1967-05	C CAPACITOR	470pF 50V	
C712	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
R7	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R8	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R9	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R10	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	
R11	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R12	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R13	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R14	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R15	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R16	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R17	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R18	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R19	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R20	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R21	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R22	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	
R23	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	
R24	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R25	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R26	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R27	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R28	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R29	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R30	RK73HH1J274D	MG RESISTOR	270kΩ 1/16W D	
R31	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R32	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R33	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R34	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R35	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R36	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R37	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R38	RZ73G0BK2R7J	RESISTOR	2.7Ω 0.25W J	
R39	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R40	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R41	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R42	R92-3774-05	MG RESISTOR	27Ω 0.25W	
R43	R92-3774-05	MG RESISTOR	27Ω 0.25W	
R44	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R45	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R46	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R47	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R48	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R49	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R50	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R51	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R52	RK73FB2B1R0J	MG RESISTOR	1Ω 1/8W J	
R56	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R57	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	
R58	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R59	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R60	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R65	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	
R66	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	
R67	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	
R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R103	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R104	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R105	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R106	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R107	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R108	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R109	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R110	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R111	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R112	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R113	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R116	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R120	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R121	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R122	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R123	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R124	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R125	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R126	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R127	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R128	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D	
R129	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R130	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R131	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R132	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R133	RN73HH1J151D	MG RESISTOR	150Ω 0.063W D	
R134	RN73HH1J100D	MF RESISTOR	10Ω 0.063W D	
R135	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R136	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R137	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R139	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R140	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R141	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R142	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R143	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	
R145	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R181	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R182	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	
R183	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R184	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R192	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R193	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R194	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	
R195	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R201	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R202	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R204	R92-3785-05	MG RESISTOR	120Ω 0.25W	
R205	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R206	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R207	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J	
R208	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R209	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	
R210	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R211	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R212	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R213	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	
R214	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R215	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R216	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R218	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R219	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R220	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R222	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R223	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	
R227	RK73GB2A823J	MG RESISTOR	82kΩ 1/10W J	
R228	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R230	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R233	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
R234	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R237	RK73HB1H102J	MG RESISTOR	1kΩ 1/20W J	
R244	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R245	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R246	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R247	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R248	R92-3756-05	MG RESISTOR	0.22Ω 1/3W	
R249	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R250	R92-3756-05	MG RESISTOR	0.22Ω 1/3W	
R251	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	
R252	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	
R253	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	
R255	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R256	RK73HH1J682D	MG RESISTOR	6.8kΩ 1/16W D		R434	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R257	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R435	RK73JB1H105J	MG RESISTOR	1mΩ 1/20W J	
R258	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		R436	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R259	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R437	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R260	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R438	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R264	RK73HH1J682D	MG RESISTOR	6.8kΩ 1/16W D		R439	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	
R265	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D		R440	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	
R267	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R442	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R268	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R443	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R269	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R444	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R270	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R445	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R271	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R446	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R272	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R447	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R273	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R448	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R301	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R449	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R450	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R303	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		R451	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R304	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		R452	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R310	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R453	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R312	RK73HB1J5R6J	MG RESISTOR	5.6Ω 1/16W J		R461	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R313	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R462	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R314	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R463	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
R315	RK73HB1J180J	MG RESISTOR	18Ω 1/16W J		R464	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R316	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R466	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R325	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D		R467	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R330	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D		R468	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R331	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R469	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R332	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R470	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R333	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R479	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R335	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J		R480	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R336	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J		R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R351	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J		R602	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R352	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J		R603	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R353	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J		R604	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R354	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		R605	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R355	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J		R606	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R356	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		R607	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R357	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R608	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R358	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R609	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R359	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R610	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R360	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R611	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R361	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J		R612	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	
R362	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R635	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R363	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R636	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R364	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R637	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R365	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R638	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R366	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R639	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R367	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R650	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	
R369	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R652	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R401	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R654	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R402	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R656	RK73PB2H1R2J	MG RESISTOR	1.2Ω 1/2W J	
R403	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R659	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R404	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R660	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R405	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R661	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R406	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R662	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R407	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R663	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R408	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J		R664	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R410	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R665	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R411	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R666	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R412	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R667	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R413	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R668	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R414	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R669	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R415	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J		R670	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R419	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R671	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R420	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R672	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R421	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R673	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R422	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R674	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R423	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R675	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R424	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R676	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R425	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		R677	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R426	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		L1	LB73F0AW-002	CHIP FERRITE		
R427	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		L3	LB73G0AM-004	CHIP FERRITE		
R428	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		L4	LR73Z0AY2R2M	CHIP INDUCTOR		
R429	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		L5	LB73G0AM-004	CHIP FERRITE		
R430	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L7	LB73G0AM-004	CHIP FERRITE		
R431	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		L8	LB73G0AM-004	CHIP FERRITE		
R432	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		L9	LB73H0AV-002	CHIP FERRITE		
R433	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J						

△ Symbol No.	Part No.	Part Name	Description	Local
L10	LB73H0AV-002	CHIP FERRITE		
L11	LB73H0AV-002	CHIP FERRITE		
L12	L41-1502-70	CHIP INDUCTOR		
L13	LB73H0AV-002	CHIP FERRITE		
L112	LB73H0AY-004	CHIP FERRITE		
L121	LB73H0AY-004	CHIP FERRITE		
L131	L41-2785-53	CHIP INDUCTOR		
L132	L41-2785-53	CHIP INDUCTOR		
L135	L41-2785-53	CHIP INDUCTOR		
L136	LB73H0AY-004	CHIP FERRITE		
L137	L41-2785-53	CHIP INDUCTOR		
L138	L41-3378-08	CHIP INDUCTOR		
L139	L41-2785-53	CHIP INDUCTOR		
L140	L41-2785-53	CHIP INDUCTOR		
L141	LB73H0AY-004	CHIP FERRITE		
L142	L41-2785-53	CHIP INDUCTOR		
L143	LK73H0AM47NJ	M.CHIP INDUCTOR	47nH	
L181	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L191	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L192	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L201	LR79Z0DC45N5J	CHIP INDUCTOR	45.5nH	
L203	LR73Z0AE2R2J	CHIP INDUCTOR	2.2uH	
L206	LK73H0AMR27J	M.CHIP INDUCTOR		
L209	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L210	LR79Z0DC22NJ	CHIP INDUCTOR	22nH	
L211	LB73F0AW-002	CHIP FERRITE		
L213	LR79Z0DC27N9J	CHIP INDUCTOR	27.9nH	
L214	LB73F0AW-002	CHIP FERRITE		
L215	LR79Z0DD43N6J	CHIP INDUCTOR	43.6nH	
L216	LR79Z0DD43N6J	CHIP INDUCTOR	43.6nH	
L217	LR79Z0DD43N6J	CHIP INDUCTOR	43.6nH	
L218	LR79Z0CA68NJ	CHIP INDUCTOR		
L219	LR79Z0DC16N7J	CHIP INDUCTOR	16.7nH	
L220	LR79Z0DD12N2J	CHIP INDUCTOR	12.2nH	
L221	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L222	L41-8265-53	CHIP INDUCTOR		
L223	L41-6865-53	CHIP INDUCTOR		
L301	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L302	LR79G0CQ47NG	CHIP INDUCTOR		
L303	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L304	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L305	LR79G0CQR18G	CHIP INDUCTOR		
L307	LR79G0CQ56NG	CHIP INDUCTOR		
L308	LR79G0CQ47NG	CHIP INDUCTOR		
L309	LR79G0CQ82NG	CHIP INDUCTOR		
L310	LR79G0CQ8N2C	CHIP INDUCTOR		
L311	LR79G0CQR22G	CHIP INDUCTOR		
L312	LR79G0CQR15G	CHIP INDUCTOR		
L313	LR79G0CQ82NG	CHIP INDUCTOR		
L314	LR79G0CQ82NG	CHIP INDUCTOR		
L315	LR79G0CQR33G	CHIP INDUCTOR		
L351	L92-0487-05	CHIP FERRITE		
L352	L92-0487-05	CHIP FERRITE		
L353	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	
L354	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L358	L92-0487-05	CHIP FERRITE		
L359	L7K-0059-00	FILTER		
L361	L79-1987-05	FILTER		
L365	L92-0487-05	CHIP FERRITE		
L366	L92-0487-05	CHIP FERRITE		
L401	LB73H0AV-002	CHIP FERRITE		
L402	LK73G0AQ4R7K	M.CHIP INDUCTOR	4.7uH	
L404	LB73G0AM-004	CHIP FERRITE		
L405	L92-1101-05	CHIP FERRITE		
L406	L92-1101-05	CHIP FERRITE		
L407	LB73G0AM-004	CHIP FERRITE		
L408	LB73G0AM-004	CHIP FERRITE		
L409	LB73G0AM-004	CHIP FERRITE		
L410	LB73G0AM-004	CHIP FERRITE		
L411	L79-1946-05	FILTER		
L412	L79-1946-05	FILTER		
L413	L79-1946-05	FILTER		
L414	L79-1946-05	FILTER		
L415	L79-1946-05	FILTER		
L416	L79-1946-05	FILTER		
L417	LB73H0AV-002	CHIP FERRITE		
L427	LB73H0AV-002	CHIP FERRITE		
L428	LB73H0AV-002	CHIP FERRITE		

△ Symbol No.	Part No.	Part Name	Description	Local
L429	LB73H0AV-002	CHIP FERRITE		
L430	LB73H0AV-002	CHIP FERRITE		
L431	LB73H0AV-002	CHIP FERRITE		
L601	LB73G0AM-004	CHIP FERRITE		
L604	LB73G0AM-004	CHIP FERRITE		
L605	LB73G0AM-004	CHIP FERRITE		
L608	LR73Z0AY100M	CHIP INDUCTOR		
L609	LR73Z0AY100M	CHIP INDUCTOR		
L610	LB73G0AM-004	CHIP FERRITE		
L612	LB73G0AM-004	CHIP FERRITE		
L613	LB73G0AM-004	CHIP FERRITE		
L622	LB73G0AM-004	CHIP FERRITE		
L623	LB73G0AM-004	CHIP FERRITE		
L624	LB73G0AM-004	CHIP FERRITE		
L625	LB73G0AM-004	CHIP FERRITE		
L626	LR73Z0AY100M	CHIP INDUCTOR		
L627	LR73Z0AY100M	CHIP INDUCTOR		
L628	LB73G0AM-004	CHIP FERRITE		
L629	LB73G0AM-004	CHIP FERRITE		
L630	LB73H0AV-002	CHIP FERRITE		
L631	LB73H0AV-002	CHIP FERRITE		
L632	LB73G0AM-004	CHIP FERRITE		
L633	LB73H0AV-002	CHIP FERRITE		
L634	LB73G0AM-004	CHIP FERRITE		
CN1	EC720CQ-0313A	FFC FPC CONNE		
CN2	J19-5386-05	HOLDER		
CN7	E40-6883-05	F.C.CONNECTOR		
CN8	-----	TERMINAL	*Note	
CN10	-----	TERMINAL	*Note	
CN201	E2D-0058-00	TERMINAL		
CN202	E2D-0058-00	TERMINAL		
CN203	E2D-0022-00	TERMINAL		
CN353	G0B-0005-00	EARTH SPRING		
CN354	G0B-0005-00	EARTH SPRING		
CN356	G0B-0005-00	EARTH SPRING		
CN357	G0B-0005-00	EARTH SPRING		
CN402	EC720BP-0341A	FFC FPC CONNE		
CN602	E41-1476-05	PIN ASSY		
CN625	E41-3167-05	F.C.CONNECTOR		
CP1	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP2	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP301	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP302	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP303	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP351	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP352	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP401	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP402	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP403	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP404	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP405	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP406	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP408	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP409	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP410	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP411	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP412	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP413	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP414	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP601	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
E101	-----	SHIELDING CASE	*Note	
E301	-----	SHIELDING CASE	*Note	
E351	F10-3228-15	SHIELDING CASE		
E401	-----	SHIELDING CASE	*Note	
E601	-----	SHIELDING CASE	*Note	
F1	FZA10BQ-3R15	FUSE (CC)		
F2	FZA10BH-R50	FUSE (CC)	0.5A	
TH201	NCU15WF104F6S	N THERMISTOR		
TH401	NCU15WF104F6S	N THERMISTOR		
X351	L77-3121-05	QUARTZ CRYSTAL		
X401	L7H-0076-00	TCXO		
X402	L77-1802-05	QUARTZ CRYSTAL		

TX-RX UNIT

**XC1-181K-00 (NX-3300K,NX-3300K2,
NX-3300K3,NX-3300E,NX-3300E2,NX-3300E3)**

***Note : This part cannot be replaced.Therefore,
this part is not supplied as a service part.**

Block No. [0][2]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	XC61CC5602N-G	IC		
IC2	LXDC2XQ12A-252	IC		
IC3	TPS62140RGT	IC		
IC4	LXDC2HN18F163	IC		
IC5	-----	IC	*Note	
IC6	XC6209B502D-G	IC		
IC7	-----	IC	*Note	
IC8	BU18TD2WNVX	IC		
IC9	XC6209B312D-G	IC		
IC10	XC6215B122N-G	IC		
IC11	NJM2878F4-32	IC		
IC12	XC8102AA07-G	IC		
IC13	TPS61041DRVR	IC		
IC14	BU32TD2WNVX	IC		
IC15	XC6209B502D-G	IC		
IC17	XC6209B502D-G	IC		
IC18	BU7442NUX	IC		
IC101	OPA170AIDRLR	IC		
IC102	BU7295HFV	IC		
IC201	XC8102AA07-G	IC		
IC202	BGU6104	IC		
IC203	BA3472FVM	IC		
IC303	-----	IC	*Note	
IC351	-----	IC	*Note	
IC352	74AVC4TD245GU	IC		
IC353	74AVC4TD245GU	IC		
IC401	-----	IC	*Note	
IC402	-----	IC	*Note	
IC403	S-80135ANPF-G	IC		
IC404	-----	IC	*Note	
IC405	TC7SZ08FE	IC		
IC406	KXCJ9-1008	IC		
IC409	ADS7961SRHB	IC		
IC410	DAC124S085CIS	IC		
IC601	-----	IC	*Note	
IC602	NJW4107U2-05A	IC		
IC603	TC7W53FKFT	IC		
IC604	TC7SPB9306TUF	IC		
IC605	BD11600NUX	IC		
IC606	TC7WT126FU-F	IC		
IC607	TC7SZ08FE	IC		
Q1	EMD12	TRANSISTOR		
Q2	SSM6N15AFEM	DUAL FET		
Q3	SSM6N15AFEM	DUAL FET		
Q4	VT6M1	FET		
Q5	VT6M1	FET		
Q6	LTC014EEBFS8	DIGI TRANSISTOR		
Q7	2SB1132(Q,R)	TRANSISTOR		
Q102	EM6M2	FET		
Q103	VT6M1	FET		
Q111	RE1E002SP	FET		
Q112	VT6M1	FET		
Q113	2SD2654/W/	TRANSISTOR		
Q114	VT6M1	FET		
Q116	SSM3K15AMFVF	FET		
Q131	BFU660F	TRANSISTOR		
Q151	BFU660F	TRANSISTOR		
Q181	2SC5108F/Y/	TRANSISTOR		
Q201	RD01MUS2BT513	FET		
Q202	RD08MUS2T514	FET		
Q203	LSCR523EBFS8	TRANSISTOR		
Q204	LTC044EEBFS8	DIGI TRANSISTOR		
Q205	SSM3K15AMFVF	FET		
Q206	SSM3K15AMFVF	FET		
Q207	EMD12	TRANSISTOR		
Q351	SSM3K15AMFVF	FET		

△ Symbol No.	Part No.	Part Name	Description	Local
Q401	2SC4617/S/	TRANSISTOR		
Q402	LTC044EEBFS8	DIGI TRANSISTOR		
D1	RR1LAM4S	DIODE		
D8	DAN222	DIODE ARRAY		
D9	RB520SM-30	DIODE		
D10	RB561VM-40	SCHOTTKY DIODE		
D102	EDZV8.2B	ZENER DIODE		
D111	1SS400SM	DIODE		
D131	BBY58-02V	VARI CAP DIODE		
D132	BB555-02VH	VARI CAP DIODE		
D133	BB555-02VH	VARI CAP DIODE		
D134	BB555-02VH	VARI CAP DIODE		
D135	BB555-02VH	VARI CAP DIODE		
D151	BBY58-02V	VARI CAP DIODE		
D152	SMV1130-079LF	VARI CAP DIODE		
D153	SMV1130-079LF	VARI CAP DIODE		
D154	BB555-02VH	VARI CAP DIODE		
D155	BB664-02V	VARI CAP DIODE		
D201	L5208F	DIODE		
D202	RN142S	DIODE		
D203	RN142S	DIODE		
D204	EDZV5.6B	ZENER DIODE		
D206	SPC10501A01	VARISTOR		
D301	1SS400SM	DIODE		
D302	1SS400SM	DIODE		
D303	1SS390	DIODE		
D304	1SS390	DIODE		
D401	RB521CM-30	DIODE		
D402	RB521CM-30	DIODE		
D403	1SS400SM	DIODE		
D404	1SS400SM	DIODE		
D405	1SS400SM	DIODE		
D406	1SS400SM	DIODE		
D407	1SS400SM	DIODE		
D601	RB521CM-30	DIODE		
D609	RB521CM-30	DIODE		
D620	EDZV6.8B	ZENER DIODE		
D621	EDZV6.8B	ZENER DIODE		
D622	RBE05SM20A	DIODE		
D623	RBE05SM20A	DIODE		
D624	RB521CM-30	DIODE		
D625	RB521CM-30	DIODE		
D626	RB521CM-30	DIODE		
D627	RB521CM-30	DIODE		
D628	RB521CM-30	DIODE		
D629	EMZT6.8E	ZENER DIODE		
D630	EMZT6.8E	ZENER DIODE		
D632	EMZT6.8E	ZENER DIODE		
D633	RSB12Z	ZENER DIODE		
D634	RSB12Z	ZENER DIODE		
C1	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C2	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C3	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C4	C93-1967-05	C CAPACITOR	470pF 50V	
C5	C93-1967-05	C CAPACITOR	470pF 50V	
C6	C93-1967-05	C CAPACITOR	470pF 50V	
C7	C93-1967-05	C CAPACITOR	470pF 50V	
C8	C93-1967-05	C CAPACITOR	470pF 50V	
C9	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	
C10	C93-1967-05	C CAPACITOR	470pF 50V	
C14	C93-1967-05	C CAPACITOR	470pF 50V	
C15	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C16	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C17	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C18	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C19	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C20	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C21	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C22	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C23	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C24	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C25	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C26	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C27	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C28	C93-1967-05	C CAPACITOR	470pF 50V	
C29	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C30	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C31	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C32	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C33	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C34	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C35	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C36	C93-1967-05	C CAPACITOR	470pF 50V	
C37	C93-1967-05	C CAPACITOR	470pF 50V	
C38	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C39	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C40	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C41	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C42	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C43	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C44	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C46	CK73GXR1E475K	C CAPACITOR	4.7uF 25V K	
C47	CK73GB1A335K	C CAPACITOR	3.3uF 10V K	
C48	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C49	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C50	CK730JM1H684K	C CAPACITOR	0.68uF 50V K	
C51	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C52	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C54	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C55	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C56	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C60	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C62	C93-1959-05	C CAPACITOR	0.1uF 16V	
C63	C93-1959-05	C CAPACITOR	0.1uF 16V	
C64	C93-1959-05	C CAPACITOR	0.1uF 16V	
C65	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C66	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C67	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C68	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C69	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C70	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C102	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C103	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C104	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C105	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C106	C93-1959-05	C CAPACITOR	0.1uF 16V	
C107	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C108	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
C109	CC73HCH1H130G	C CAPACITOR	13pF 50V G	
C110	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C111	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C112	CS77BP1A4R7M	TA E CAPACITOR	4.7uF 10V M	
C113	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C115	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C116	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C117	CC73HCH1HR75B	C CAPACITOR	0.75pF 50V B	
C121	CK73FBB1H154K	C CAPACITOR	0.15uF 50V K	
C122	CS77ABE1D100M	TA E CAPACITOR	10uF 20V M	
C123	CK73FB1H473K	C CAPACITOR	0.047uF 50V K	
C131	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C132	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C133	CC73HCH1H130G	C CAPACITOR	13pF 50V G	
C134	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C135	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C136	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C138	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C139	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C140	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C141	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C142	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C143	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C144	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C145	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C148	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C150	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C151	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C152	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C153	CC73HCH1H130G	C CAPACITOR	13pF 50V G	
C154	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C156	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C157	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C158	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C159	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C160	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C161	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C162	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C163	CC73HCH1H3R5B	C CAPACITOR	3.5pF 50V B	
C164	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C165	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C166	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C167	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C181	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C182	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C183	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C191	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C192	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C193	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C194	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C195	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C197	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C198	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C203	C93-0871-05	C CAPACITOR	1.0pF 100V	
C208	CC73GCH1H030B	C CAPACITOR	3pF 50V B	
C209	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C211	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C212	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C213	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C214	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C215	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C216	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C217	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C218	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C219	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C220	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C221	CK73HB1E473K	C CAPACITOR	0.047uF 25V K	
C222	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C223	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C224	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C225	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C226	CC730AP1H330G	C CAPACITOR	33pF 50V G	
C227	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C228	CC73GCH1H010B	C CAPACITOR	1pF 50V B	
C229	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C230	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C231	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C232	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C233	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C234	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C235	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C236	C93-0979-05	C CAPACITOR	4.7pF 50V	
C237	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C239	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C240	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C241	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C243	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C244	C93-0941-05	C CAPACITOR	18pF 50V	
C245	C93-0941-05	C CAPACITOR	18pF 50V	
C246	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C247	CC73GCH1H070B	C CAPACITOR	7pF 50V B	
C248	CC73GCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C249	CC73GCH1H070B	C CAPACITOR	7pF 50V B	
C250	CC73GCH1H010B	C CAPACITOR	1pF 50V B	
C251	CC73GCH1H040B	C CAPACITOR	4pF 50V B	
C252	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C253	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C255	C93-0935-05	C CAPACITOR	10pF 50V	
C257	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C258	C93-1967-05	C CAPACITOR	470pF 50V	
C259	C93-1967-05	C CAPACITOR	470pF 50V	
C261	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C262	CK73GB1C563K	C CAPACITOR	0.056uF 16V K	
C263	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C264	CK73HB1H822K	C CAPACITOR	8200pF 50V K	
C265	CK73HB1H822K	C CAPACITOR	8200pF 50V K	
C266	C93-1967-05	C CAPACITOR	470pF 50V	
C267	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C268	CC73HCH1H390G	C CAPACITOR	39pF 50V G	
C270	CC73GCH1H030B	C CAPACITOR	3pF 50V B	
C301	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	
C302	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C303	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C304	CK73HB1A105K	C CAPACITOR	1uF 10V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C305	CC73HCH1H020B	C CAPACITOR	2pF 50V B		C407	C93-1953-05	C CAPACITOR	0.01uF 25V	
C306	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C408	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C308	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C421	C93-1959-05	C CAPACITOR	0.1uF 16V	
C309	CC73HCH1H050B	C CAPACITOR	5pF 50V B		C422	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C310	CC73HCH1H050B	C CAPACITOR	5pF 50V B		C423	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C311	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C424	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C312	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C425	C93-1959-05	C CAPACITOR	0.1uF 16V	
C313	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C426	C93-1959-05	C CAPACITOR	0.1uF 16V	
C314	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C427	C93-1959-05	C CAPACITOR	0.1uF 16V	
C315	CK73HB1A105K	C CAPACITOR	1uF 10V K		C428	C93-1959-05	C CAPACITOR	0.1uF 16V	
C316	CK730BS0J106M	C CAPACITOR	10uF 6.3V M		C429	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C317	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B		C430	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C319	CC73HCH1H060B	C CAPACITOR	6pF 50V B		C431	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C320	CC73HCH1H150G	C CAPACITOR	15pF 50V G		C432	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C321	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C433	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C322	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C434	C93-1959-05	C CAPACITOR	0.1uF 16V	
C323	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C435	C93-1959-05	C CAPACITOR	0.1uF 16V	
C324	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C436	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C325	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C437	C93-1959-05	C CAPACITOR	0.1uF 16V	
C326	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C438	C93-1959-05	C CAPACITOR	0.1uF 16V	
C327	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C439	C93-1959-05	C CAPACITOR	0.1uF 16V	
C328	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C440	C93-1959-05	C CAPACITOR	0.1uF 16V	
C329	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C441	C93-1959-05	C CAPACITOR	0.1uF 16V	
C330	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C442	C93-1959-05	C CAPACITOR	0.1uF 16V	
C331	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C443	C93-1959-05	C CAPACITOR	0.1uF 16V	
C332	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C444	C93-1959-05	C CAPACITOR	0.1uF 16V	
C333	CK730BS0J106M	C CAPACITOR	10uF 6.3V M		C445	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C334	CC73HCH1H080B	C CAPACITOR	8pF 50V B		C446	C93-1959-05	C CAPACITOR	0.1uF 16V	
C338	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C447	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C341	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C448	CK73HB1H103K	C CAPACITOR	1000pF 50V K	
C342	CK730BS0J106M	C CAPACITOR	10uF 6.3V M		C449	C93-1953-05	C CAPACITOR	0.01uF 25V	
C343	CK73HB1A474K	C CAPACITOR	0.47uF 10V K		C450	C93-1959-05	C CAPACITOR	0.1uF 16V	
C344	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C451	C93-1959-05	C CAPACITOR	0.1uF 16V	
C345	CK73HB1A105K	C CAPACITOR	1uF 10V K		C452	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C346	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C453	CK73HB1H103K	C CAPACITOR	1000pF 50V K	
C354	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C454	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C356	C93-1953-05	C CAPACITOR	0.01uF 25V		C455	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C357	CK73HB1A105K	C CAPACITOR	1uF 10V K		C456	C93-1967-05	C CAPACITOR	470pF 50V	
C358	C93-1959-05	C CAPACITOR	0.1uF 16V		C457	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C359	C93-1959-05	C CAPACITOR	0.1uF 16V		C458	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C360	C93-1959-05	C CAPACITOR	0.1uF 16V		C459	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C361	C93-1959-05	C CAPACITOR	0.1uF 16V		C469	C93-1967-05	C CAPACITOR	470pF 50V	
C363	CC73HCH1H180G	C CAPACITOR	18pF 50V G		C470	C93-1967-05	C CAPACITOR	470pF 50V	
C364	CK73HB1A105K	C CAPACITOR	1uF 10V K		C471	C93-1967-05	C CAPACITOR	470pF 50V	
C365	CK73HB1A105K	C CAPACITOR	1uF 10V K		C472	C93-1967-05	C CAPACITOR	470pF 50V	
C366	C93-1959-05	C CAPACITOR	0.1uF 16V		C473	C93-1967-05	C CAPACITOR	470pF 50V	
C367	C93-1959-05	C CAPACITOR	0.1uF 16V		C474	C93-1967-05	C CAPACITOR	470pF 50V	
C368	C93-1959-05	C CAPACITOR	0.1uF 16V		C475	C93-1967-05	C CAPACITOR	470pF 50V	
C369	CC73HCH1H220G	C CAPACITOR	22pF 50V G		C476	C93-1967-05	C CAPACITOR	470pF 50V	
C370	CK73HB1A105K	C CAPACITOR	1uF 10V K		C477	C93-1967-05	C CAPACITOR	470pF 50V	
C371	C93-1959-05	C CAPACITOR	0.1uF 16V		C480	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C372	C93-1959-05	C CAPACITOR	0.1uF 16V		C481	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C373	C93-1959-05	C CAPACITOR	0.1uF 16V		C482	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C374	C93-1959-05	C CAPACITOR	0.1uF 16V		C483	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C375	C93-1959-05	C CAPACITOR	0.1uF 16V		C484	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C376	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C485	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C377	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C486	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C378	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C487	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C379	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C488	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C380	C93-1959-05	C CAPACITOR	0.1uF 16V		C489	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C381	C93-1959-05	C CAPACITOR	0.1uF 16V		C496	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C382	CC73HCH1H470G	C CAPACITOR	47pF 50V G		C497	C93-1959-05	C CAPACITOR	0.1uF 16V	
C383	C93-1959-05	C CAPACITOR	0.1uF 16V		C498	C93-1959-05	C CAPACITOR	0.1uF 16V	
C384	C93-1959-05	C CAPACITOR	0.1uF 16V		C499	C93-1959-05	C CAPACITOR	0.1uF 16V	
C385	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C500	C93-1959-05	C CAPACITOR	0.1uF 16V	
C386	C93-1959-05	C CAPACITOR	0.1uF 16V		C501	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C387	C93-1959-05	C CAPACITOR	0.1uF 16V		C502	C93-1959-05	C CAPACITOR	0.1uF 16V	
C388	CK73HB1A105K	C CAPACITOR	1uF 10V K		C510	C93-1967-05	C CAPACITOR	470pF 50V	
C389	CC73HCH1H100B	C CAPACITOR	10pF 50V B		C515	C93-1967-05	C CAPACITOR	470pF 50V	
C391	CC73HCH1H121J	C CAPACITOR	120pF 50V J		C516	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C392	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C517	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C395	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B		C518	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C401	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C601	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C402	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C602	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C403	C93-1953-05	C CAPACITOR	0.01uF 25V		C603	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C404	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C604	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C405	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C606	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C406	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C607	CK73HB1A105K	C CAPACITOR	1uF 10V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C608	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C609	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C610	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C612	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C614	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C615	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C617	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C618	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C620	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C621	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C622	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C625	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C626	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C627	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C657	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C658	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C659	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C660	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C663	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	
C666	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C672	CK73GB1E104K	C CAPACITOR	0.1uF 25V K	
C674	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C676	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C681	CK73GB1E474K	C CAPACITOR	0.47uF 25V K	
C682	C93-1953-05	C CAPACITOR	0.01uF 25V	
C683	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C685	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C686	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C687	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C688	CK73HB1A334K	C CAPACITOR	0.33uF 10V K	
C689	C93-1953-05	C CAPACITOR	0.01uF 25V	
C690	C93-1953-05	C CAPACITOR	0.01uF 25V	
C691	C93-1953-05	C CAPACITOR	0.01uF 25V	
C692	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C693	C93-1953-05	C CAPACITOR	0.01uF 25V	
C694	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C695	C93-1953-05	C CAPACITOR	0.01uF 25V	
C696	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C697	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C698	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C699	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C700	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C701	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C702	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C703	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C704	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C705	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C706	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C707	C93-1953-05	C CAPACITOR	0.01uF 25V	
C708	C93-1967-05	C CAPACITOR	470pF 50V	
C709	C93-1953-05	C CAPACITOR	0.01uF 25V	
C710	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C711	C93-1967-05	C CAPACITOR	470pF 50V	
C712	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
R7	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R8	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R9	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R10	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	
R11	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R12	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R13	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R14	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R15	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R16	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R17	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R18	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R19	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R20	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R21	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R22	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	
R23	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	
R24	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R25	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R26	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R27	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R28	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R29	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R30	RK73HH1J274D	MG RESISTOR	270kΩ 1/16W D	
R31	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R32	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R33	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R34	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R35	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R36	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R37	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R38	RZ73G0BK2R7J	RESISTOR	2.7Ω 0.25W J	
R39	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R40	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R41	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R42	R92-3774-05	MG RESISTOR	27Ω 0.25W	
R43	R92-3774-05	MG RESISTOR	27Ω 0.25W	
R44	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R45	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R46	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	
R47	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R48	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R49	RK73JB1H474J	MG RESISTOR	470kΩ 1/20W J	
R50	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R51	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R52	RK73FB2B1R0J	MG RESISTOR	1Ω 1/8W J	
R56	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R57	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	
R58	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R59	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R60	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R65	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	
R66	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	
R67	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	
R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R103	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R104	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R105	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R106	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R107	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R108	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R109	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R110	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R111	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R112	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R114	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R115	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R116	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R117	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R118	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R119	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R120	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R121	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R122	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	
R123	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R124	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R125	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R126	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R127	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R128	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D	
R129	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R130	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R131	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R132	RN73HH1J103D	MF RESISTOR	10kΩ 0.063W D	
R133	RN73H0AJ562D	MF RESISTOR	5.6kΩ D	
R134	RN73H0AJ121D	MF RESISTOR	120Ω D	
R135	RK73HB1J8R2J	MG RESISTOR	8.2Ω 1/16W J	
R136	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R137	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R139	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R140	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R141	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R142	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R143	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R151	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R152	RN73H0AJ562D	MF RESISTOR	5.6kΩ D	
R153	RN73HH1J103D	MF RESISTOR	10kΩ 0.063W D	
R154	RN73HH1J151D	MG RESISTOR	150Ω 0.063W D	
R155	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	
R156	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R181	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R182	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R358	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R183	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J		R359	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R184	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R360	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R194	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R361	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
R195	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R362	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R204	R92-3785-05	MG RESISTOR	120Ω 0.25W		R363	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R205	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R364	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R206	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J		R365	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R207	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J		R366	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R208	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J		R367	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R209	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J		R369	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R210	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R401	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R211	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R402	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R212	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R403	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R213	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J		R404	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R214	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R405	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R215	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		R406	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R216	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R407	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R218	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J		R408	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R219	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		R410	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R221	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R411	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R222	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		R412	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R223	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R413	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R224	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R414	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R225	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R415	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R227	RK73GB2A823J	MG RESISTOR	82kΩ 1/10W J		R419	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R228	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R420	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R230	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R421	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R233	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R422	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R234	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R423	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R237	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		R424	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R244	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J		R425	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R245	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R426	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R246	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R427	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R247	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R428	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R248	R92-3756-05	MG RESISTOR	0.22Ω 1/3W		R429	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R249	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R430	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R250	R92-3756-05	MG RESISTOR	0.22Ω 1/3W		R431	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R251	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J		R432	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R252	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D		R433	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R253	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D		R434	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R255	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D		R435	RK73JB1H105J	MG RESISTOR	1mΩ 1/20W J	
R256	RK73HH1J682D	MG RESISTOR	6.8kΩ 1/16W D		R436	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R257	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R437	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R258	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J		R438	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R259	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R439	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	
R260	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R440	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	
R264	RK73HH1J682D	MG RESISTOR	6.8kΩ 1/16W D		R442	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R265	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D		R443	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R266	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R444	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R267	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R445	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R268	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R446	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R269	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R447	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R270	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		R448	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J	
R301	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R449	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R450	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R303	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		R451	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R304	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J		R452	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R310	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J		R453	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R312	RK73HB1J5R6J	MG RESISTOR	5.6Ω 1/16W J		R461	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R313	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R462	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R314	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		R463	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
R315	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J		R464	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R316	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		R466	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R325	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D		R467	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R330	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D		R468	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R331	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R469	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R332	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R470	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J	
R333	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R479	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R335	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J		R480	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R336	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J		R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R351	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J		R602	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R352	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J		R603	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R353	RK73JB1H101J	MG RESISTOR	100Ω 1/20W J		R604	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R354	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		R605	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R355	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J		R606	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R356	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		R607	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R357	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R608	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R609	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		L213	LR79Z0DC45N5J	CHIP INDUCTOR	45.5nH	
R610	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		L214	LB73F0AW-002	CHIP FERRITE		
R611	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		L215	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
R612	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		L216	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
R635	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		L217	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
R636	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L218	LR79Z0CA39NG	CHIP INDUCTOR	39nH	
R637	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		L301	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
R638	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L302	LR79G0CQ10NG	CHIP INDUCTOR		
R639	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L303	LK73H0AMR27J	M.CHIP INDUCTOR		
R650	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J		L304	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
R652	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L307	LR79G0CQ12NG	CHIP INDUCTOR		
R654	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J		L308	LR79G0CQ7N5C	CHIP INDUCTOR		
R656	RK73PB2H1R2J	MG RESISTOR	1.2Ω 1/2W J		L309	LR79G0CQ22NG	CHIP INDUCTOR	22nH	
R659	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J		L310	LR79G0CQ3N9C	CHIP INDUCTOR		
R660	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		L311	LR79G0CQ39NG	CHIP INDUCTOR		
R661	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J		L312	LR79G0CQ39NG	CHIP INDUCTOR		
R662	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		L313	LR79G0CQ39NG	CHIP INDUCTOR		
R663	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		L314	LR79G0CQ22NG	CHIP INDUCTOR	22nH	
R664	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		L315	LR79G0CQR22G	CHIP INDUCTOR		
R665	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		L351	L92-0487-05	CHIP FERRITE		
R666	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L352	L92-0487-05	CHIP FERRITE		
R667	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L353	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	
R668	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L354	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
R669	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		L358	L92-0487-05	CHIP FERRITE		
R670	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J		L359	L7K-0059-00	FILTER		
R671	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L361	L79-1987-05	FILTER		
R672	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J		L365	L92-0487-05	CHIP FERRITE		
R673	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L366	L92-0487-05	CHIP FERRITE		
R674	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L401	LB73H0AV-002	CHIP FERRITE		
R675	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J		L402	LK73G0AQ4R7K	M.CHIP INDUCTOR	4.7uH	
R676	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		L404	LB73G0AM-004	CHIP FERRITE		
R677	RK73JB1H222J	MG RESISTOR	2.2kΩ 1/20W J		L405	L92-1101-05	CHIP FERRITE		
L1	LB73F0AW-002	CHIP FERRITE			L406	L92-1101-05	CHIP FERRITE		
L3	LB73G0AM-004	CHIP FERRITE			L407	LB73G0AM-004	CHIP FERRITE		
L4	LR73Z0AY2R2M	CHIP INDUCTOR			L408	LB73G0AM-004	CHIP FERRITE		
L5	LB73G0AM-004	CHIP FERRITE			L409	LB73G0AM-004	CHIP FERRITE		
L7	LB73G0AM-004	CHIP FERRITE			L410	LB73G0AM-004	CHIP FERRITE		
L8	LB73G0AM-004	CHIP FERRITE			L411	L79-1946-05	FILTER		
L9	LB73H0AV-002	CHIP FERRITE			L412	L79-1946-05	FILTER		
L10	LB73H0AV-002	CHIP FERRITE			L413	L79-1946-05	FILTER		
L11	LB73H0AV-002	CHIP FERRITE			L414	L79-1946-05	FILTER		
L12	L41-1502-70	CHIP INDUCTOR			L415	L79-1946-05	FILTER		
L13	LB73H0AV-002	CHIP FERRITE			L416	L79-1946-05	FILTER		
L111	LB73H0AY-004	CHIP FERRITE			L417	LB73H0AV-002	CHIP FERRITE		
L112	LB73H0AY-004	CHIP FERRITE			L427	LB73H0AV-002	CHIP FERRITE		
L121	LB73H0AY-004	CHIP FERRITE			L428	LB73H0AV-002	CHIP FERRITE		
L131	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH		L429	LB73H0AV-002	CHIP FERRITE		
L132	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH		L430	LB73H0AV-002	CHIP FERRITE		
L133	LR79Z0GJ4N7G	CHIP INDUCTOR			L431	LB73H0AV-002	CHIP FERRITE		
L134	L3C-0002-00	OSC-COIL			L601	LB73G0AM-004	CHIP FERRITE		
L135	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH		L604	LB73G0AM-004	CHIP FERRITE		
L136	L41-1085-53	CHIP INDUCTOR			L605	LB73G0AM-004	CHIP FERRITE		
L137	L41-1085-53	CHIP INDUCTOR			L608	LR73Z0AY100M	CHIP INDUCTOR		
L138	L41-1085-53	CHIP INDUCTOR			L609	LR73Z0AY100M	CHIP INDUCTOR		
L151	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH		L610	LB73G0AM-004	CHIP FERRITE		
L152	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH		L612	LB73G0AM-004	CHIP FERRITE		
L153	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH		L613	LB73G0AM-004	CHIP FERRITE		
L154	LR79Z0GJ5N1G	CHIP INDUCTOR			L622	LB73G0AM-004	CHIP FERRITE		
L155	L3C-0001-00	OSC-COIL			L623	LB73G0AM-004	CHIP FERRITE		
L156	L41-1585-53	CHIP INDUCTOR			L624	LB73G0AM-004	CHIP FERRITE		
L157	L41-1585-53	CHIP INDUCTOR			L625	LB73G0AM-004	CHIP FERRITE		
L158	L41-1585-53	CHIP INDUCTOR			L626	LR73Z0AY100M	CHIP INDUCTOR		
L181	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH		L627	LR73Z0AY100M	CHIP INDUCTOR		
L191	LK73H0AM5N6S	M.CHIP INDUCTOR	5.6nH		L628	LB73G0AM-004	CHIP FERRITE		
L192	LK73H0AM4N7S	M.CHIP INDUCTOR	4.7nH		L629	LB73G0AM-004	CHIP FERRITE		
L201	LR79Z0DD21N9J	CHIP INDUCTOR	21.9nH		L630	LB73H0AV-002	CHIP FERRITE		
L202	LR79G0CQ3N9C	CHIP INDUCTOR			L631	LB73H0AV-002	CHIP FERRITE		
L203	LR79Z0CAR22J	CHIP INDUCTOR	0.22uH		L632	LB73G0AM-004	CHIP FERRITE		
L204	LR79G0GKR12G	CHIP INDUCTOR			L633	LB73H0AV-002	CHIP FERRITE		
L205	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH		L634	LB73G0AM-004	CHIP FERRITE		
L206	LK73H0AMR12J	M.CHIP INDUCTOR	0.12uH		CN1	EC720CQ-0313A	FFC FPC CONNE		
L207	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH		CN2	J19-5386-05	HOLDER		
L208	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH		CN7	E40-6883-05	F.C.CONNECTOR		
L209	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH		CN8	-----	TERMINAL	*Note	
L210	LR79G0GK9N1C	CHIP INDUCTOR			CN10	-----	TERMINAL	*Note	
L211	LB73G0AM-004	CHIP FERRITE			CN201	E2D-0058-00	TERMINAL		
L212	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH		CN202	E2D-0058-00	TERMINAL		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
CN353	G0B-0005-00	EARTH SPRING			D111	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CN354	G0B-0005-00	EARTH SPRING			D112	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CN356	G0B-0005-00	EARTH SPRING			D113	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CN357	G0B-0005-00	EARTH SPRING			D114	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CN402	EC720BP-0341A	FFC FPC CONNE			D115	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CN602	E41-1476-05	PIN ASSY			D116	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CN625	E41-3167-05	F.C.CONNECTOR			D117	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP1	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D118	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP2	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D119	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP301	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D120	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP302	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D132	B30-2365-05	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP303	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D141	RB521SM-30	DIODE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP351	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D142	RB521SM-30	DIODE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP352	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D143	RB521SM-30	DIODE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP401	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D144	RB521SM-30	DIODE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP402	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D180	RN262CS	DIODE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP403	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D181	RN262CS	DIODE	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP404	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D201	NSSW206C-T865	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP405	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D202	NSSW206C-T865	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP406	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		D221	NESM238B	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP408	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		D227	NESM238B	LED	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	
CP409	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		C101	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
CP410	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		C102	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
CP411	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		C141	CK73HBB1H471K	C CAPACITOR	470pF 50V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP412	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		C142	CK73HBB1H471K	C CAPACITOR	470pF 50V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP413	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		C143	CK73HBB1H471K	C CAPACITOR	470pF 50V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP414	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J		C144	CK73HBB1H471K	C CAPACITOR	470pF 50V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP601	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J		C145	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
E101	-----	SHIELDING CASE	*Note		C146	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
E301	-----	SHIELDING CASE	*Note		C147	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
E351	F10-3228-15	SHIELDING CASE			C148	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
E401	-----	SHIELDING CASE	*Note		C149	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
E601	-----	SHIELDING CASE	*Note		C158	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
F1	FZA10BQ-3R15	FUSE (CC)			C172	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
F2	FZA10BH-R50	FUSE (CC)	0.5A		C175	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
TH201	NCU15WF104F6S	N THERMISTOR			C177	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
TH401	NCU15WF104F6S	N THERMISTOR			C179	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
X351	L77-3121-05	QUARTZ CRYSTAL			C184	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
X401	L7H-0076-00	TCXO			C186	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
X402	L77-1802-05	QUARTZ CRYSTAL			C190	CC73HCH1H010B	C CAPACITOR	1pF 50V B	

DISPLAY UNIT

**XC1-209K-00 (NX-3200K,NX-3200E3,
NX-3300K,NX-3300E3)**

**XC1-209K-01 (NX-3200K2,NX-3200E2,
NX-3300K2,NX-3300E2)**

**XC1-209K-02 (NX-3200K3,NX-3200E,
NX-3300K3,NX-3300E)**

***Note : This part cannot be replaced.Therefore,
this part is not supplied as a service part.**

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
IC201	TC7SZ08FE	IC		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	C201	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q141	EMD9	TRANSISTOR		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	C202	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q201	EMD9	TRANSISTOR		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2	C203	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q221	LTC014EEBFS8	DIGI TRANSISTOR			C204	CK73HB1E334K	C CAPACITOR	0.33uF 25V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q222	LTC014EEBFS8	DIGI TRANSISTOR			C205	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q223	LTC014EEBFS8	DIGI TRANSISTOR			C206	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q227	LTC014EEBFS8	DIGI TRANSISTOR			C207	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q228	LTC014EEBFS8	DIGI TRANSISTOR			R1	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
Q229	LTC014EEBFS8	DIGI TRANSISTOR							

△ Symbol No.	Part No.	Part Name	Description	Local
R2	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3200K3,3200E,3300K3,3300E
R3	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R111	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R112	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R113	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R114	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R115	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	3200K2,3200E2,3300K2,3300E2
R115	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	3200K3,3200E,3300K3,3300E
R116	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R117	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	3200K2,3200E2,3300K2,3300E2
R117	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	3200K3,3200E,3300K3,3300E
R118	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	3200K3,3200E,3300K3,3300E
R119	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	3200K3,3200E,3300K3,3300E
R120	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	3200K3,3200E,3300K3,3300E
R121	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R122	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3200K3,3200E,3300K3,3300E
R132	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	3200K2,3200E2,3300K2,3300E2
R141	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R142	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K3,3200E,3300K3,3300E
R143	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K3,3200E,3300K3,3300E
R145	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K3,3200E,3300K3,3300E
R146	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K2,3200E2,3300K2,3300E2
R147	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K3,3200E,3300K3,3300E
R148	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R155	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R170	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R174	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R183	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R185	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R189	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R191	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R201	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R203	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R204	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R205	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R206	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R207	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R208	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
R209	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	3200K,3200E3,3300K,3300E3
R221	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R222	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R223	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R227	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R228	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R229	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R230	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R231	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R232	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
L101	LB73H0AV-002	CHIP FERRITE		
L102	LB73H0AV-002	CHIP FERRITE		
L151	LK73H0AM15NJ	M.CHIP INDUCTOR 15nH		
L152	LK73H0AM6N8J	M.CHIP INDUCTOR 6.8nH		
L153	LK73H0AM12NJ	M.CHIP INDUCTOR 12nH		
L156	LK73H0AM1N2S	M.CHIP INDUCTOR		
L173	LK73H0AM4N7S	M.CHIP INDUCTOR 4.7nH		
L176	LK73H0BJ3N9S	M.CHIP INDUCTOR		
L178	LK73H0BJ3N9S	M.CHIP INDUCTOR		
L187	LK73H0AM10NJ	M.CHIP INDUCTOR 10nH		
L194	LK73H0AM27NJ	M.CHIP INDUCTOR 27nH		
L201	LB73H0AV-002	CHIP FERRITE		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2

△ Symbol No.	Part No.	Part Name	Description	Local
L202	LB73H0AV-002	CHIP FERRITE		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
A151	-----	CIRCUIT MODULE	*Note	
CN201	EC720BP-0325A	FFC FPC CONNE		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CN202	EC720BP-0341A	FFC FPC CONNE		
CN301	E40-6883-05	F.C.CONNECTOR		
CP141	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP201	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP202	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
CP203	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
MIC101	T9B-0004-00	MIC ELEMENT		
S111	S70-0901-05	TACTILE PUSH SW		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
S112	S70-0901-05	TACTILE PUSH SW		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
S113	S70-0901-05	TACTILE PUSH SW		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
S114	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S115	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S116	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S117	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S118	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S119	S70-0901-05	TACTILE PUSH SW		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
S120	S70-0901-05	TACTILE PUSH SW		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
S121	S70-0901-05	TACTILE PUSH SW		3200K2,3200K3,3200E,3200E2,3300K2,3300K3,3300E,3300E2
S122	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S123	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S124	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S125	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S126	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S127	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S128	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S129	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S130	S70-0901-05	TACTILE PUSH SW		3200K3,3200E,3300K3,3300E
S131	S70-0901-05	TACTILE PUSH SW		3200K2,3200E2,3300K2,3300E2
S132	S70-0901-05	TACTILE PUSH SW		3200K2,3200E2,3300K2,3300E2
S301	S70-0516-05	TACTILE PUSH SW		
S302	S70-0516-05	TACTILE PUSH SW		
S303	S70-0516-05	TACTILE PUSH SW		
S304	S70-0516-05	TACTILE PUSH SW		