


9. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 • The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 • Screw adjacent to ∇ mark on the product are used for disassembly.
 • For the applying amount of lubricants or glue, follow the instructions in this manual.
 (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

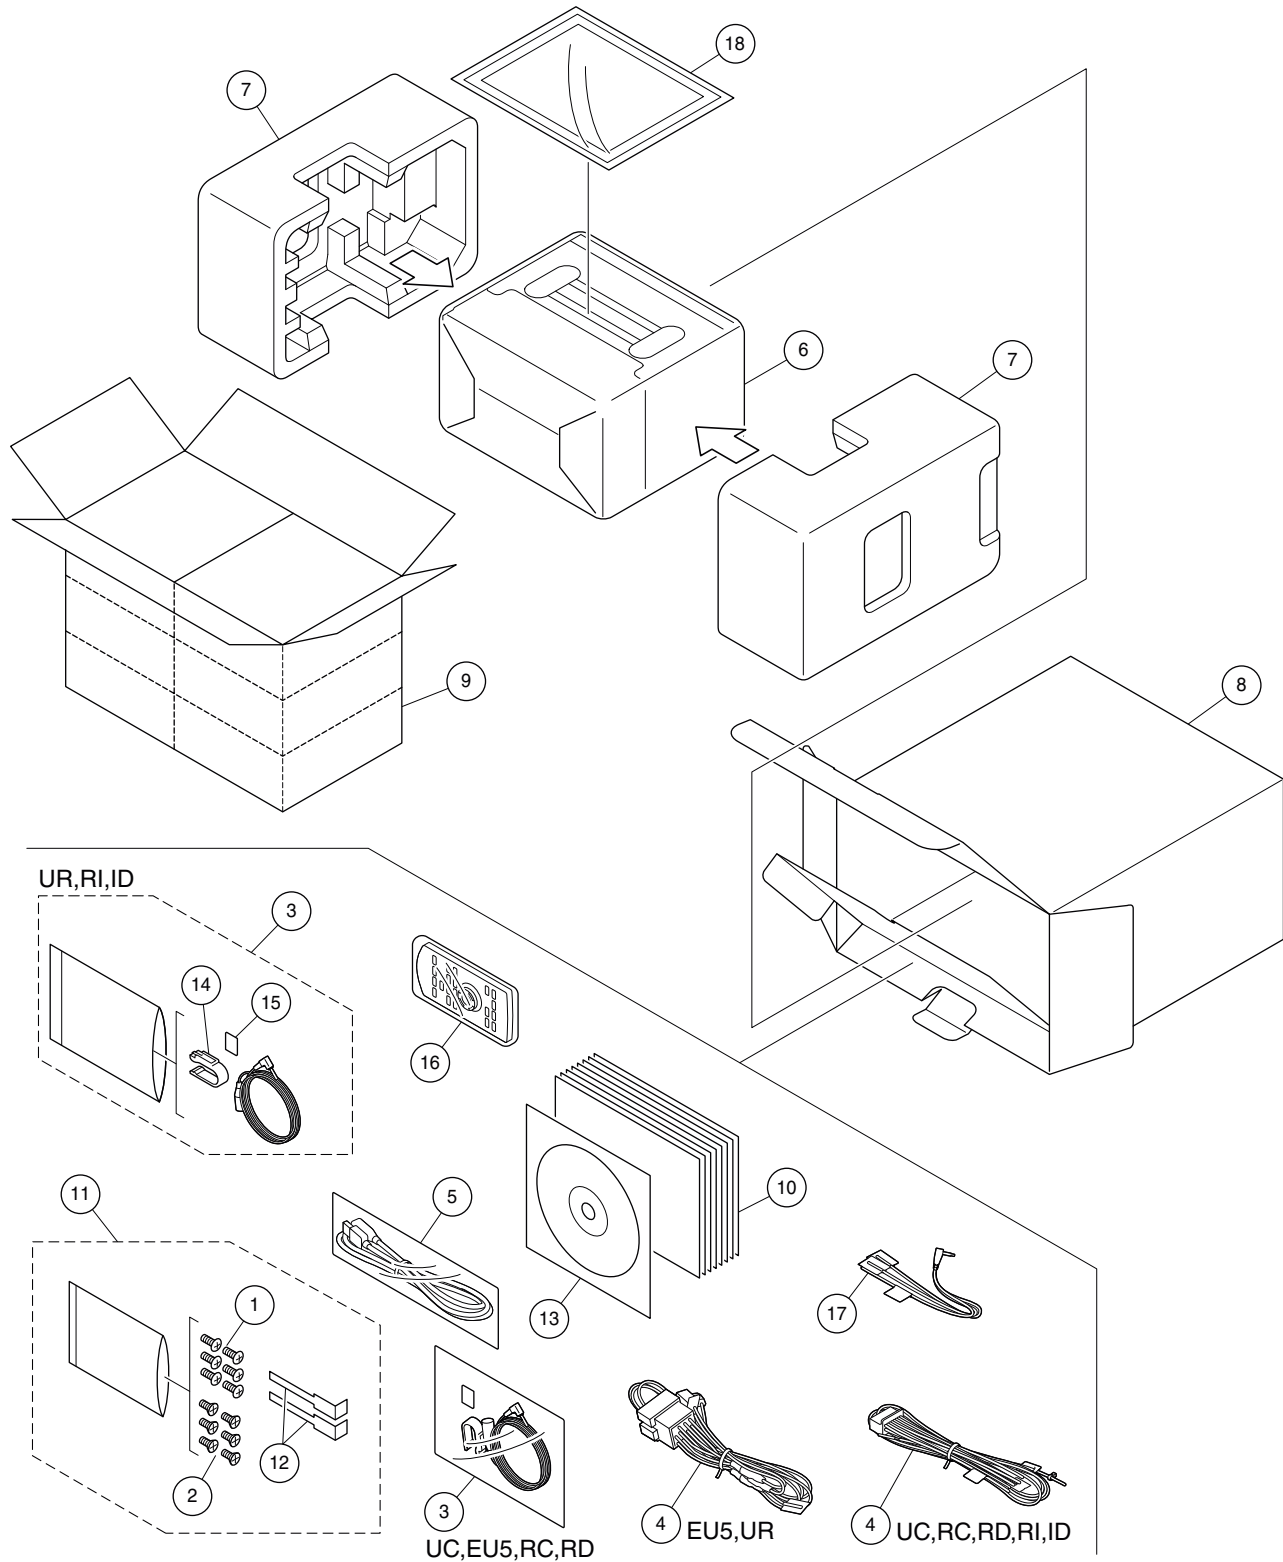

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Screw (M5 x 9)	CBA2384	10-4	Installation Manual	See Contrast table (2)
2	Screw (M5 x 9)	See Contrast table (2)	* 10-5	Caution Card	See Contrast table (2)
3	Microphone Assy (3 m)	See Contrast table (2)	* 10-6	Caution Card	See Contrast table (2)
4	Cord Assy	See Contrast table (2)			
5	Cord Assy	CDP1838	11	Accessory Assy	See Contrast table (2)
			12	Handle	See Contrast table (2)
6	Cover	See Contrast table (2)	13	IM CD-ROM	See Contrast table (2)
7	Protector	See Contrast table (2)	14	Holder	See Contrast table (2)
8	Unit Box	See Contrast table (2)	15	Cushion	See Contrast table (2)
9	Contain Box	See Contrast table (2)			
10-1	Owner's Manual	See Contrast table (2)	16	Card Remote Control Unit	See Contrast table (2)
			17	Cord Assy	See Contrast table (2)
* 10-2	Warranty Card	See Contrast table (2)	18	Panel	See Contrast table (2)
10-3	Quick Start Guide	See Contrast table (2)			

(2) CONTRAST TABLE

AVH-200EX/XNUC, AVH-201EX/XNUC, AVH-A200BT/XEVEU5, AVH-A200BT/XNUR, AVH-A205BT/XNRC, AVH-A205BT/XNRD, AVH-A205BT/XNRI and AVH-A209BT/XNID are constructed the same except for the following:

<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>AVH-200EX/ XNUC</u>	<u>AVH-201EX/ XNUC</u>	<u>AVH-A200BT/ XEVEU5</u>	<u>AVH-A200BT/ XNUR</u>
	2	Screw (M5 x 9)	CBA2383	CBA2383	CBA2383	Not used
	3	Microphone Assy (3 m)	CPM1111	CPM1111	CPM1111	CPM1109
	4	Cord Assy	CDP1837	CDP1837	CDP1697	CDP1697
	6	Cover	CEG1359	CEG1359	CEG1356	CEG1356
	7	Protector	CHP5517	CHP5517	CHP5547	CHP5547
	8	Unit Box	CHG9501	CHG9502	CHG9491	CHG9492
	9	Contain Box	CHL9501	CHL9502	CHL9491	CHL9492
	10-1	Owner's Manual	See Contents of Web IM (3)	See Contents of Web IM (3)	Not used	CRB5051
*	10-2	Warranty Card	QRY3001	QRY3001	CRY1376	CRY1376
	10-3	Quick Start Guide	CRD5059	CRD5059	CRD5021	Not used
	10-4	Installation Manual	CRD5060	CRD5060	CRD5022	Not used
*	10-5	Caution Card	Not used	Not used	CRP1441	Not used
*	10-6	Caution Card	Not used	Not used	CRP1531	CRP1530
	11	Accessory Assy	* CEC7756	* CEC7756	CEW3026	CEW3027
	12	Handle	Not used	Not used	CND7909	CND7909
	13	IM CD-ROM	Not used	Not used	CRI1023	Not used
	14	Holder	Not used	Not used	Not used	CZN7192
	15	Cushion	Not used	Not used	Not used	CZN7193
	16	Card Remote Control Unit	Not used	CXE5116	Not used	Not used
	17	Cord Assy	Not used	Not used	Not used	Not used
	18	Panel	Not used	Not used	Not used	Not used

A

Mark	No.	Description	AVH-A205BT/ XNRC	AVH-A205BT/ XNRD	AVH-A205BT/ XNRI	AVH-A209BT/ XNID
	2	Screw (M5 x 9)	Not used	Not used	Not used	Not used
	3	Microphone Assy (3 m)	CPM1111	CPM1111	CPM1109	CPM1109
	4	Cord Assy	CDP1837	CDP1837	CDP1837	CDP1837
	6	Cover	CEG1356	CEG1356	CEG1356	CEG1356
	7	Protector	CHP5517	CHP5517	CHP5547	CHP5517
	8	Unit Box	CHG9503	CHG9504	CHG9493	CHG9505
	9	Contain Box	CHL9503	CHL9504	CHL9493	CHL9505
	10-1	Owner's Manual	CRD5024	CRD5025	CRD5026	CRB5052
	10-2	Warranty Card	Not used	Not used	Not used	CRY1304
	10-3	Quick Start Guide	Not used	Not used	Not used	Not used
	10-4	Installation Manual	Not used	Not used	Not used	Not used
	10-5	Cautin Card	Not used	Not used	Not used	Not used
	10-6	Cautin Card	CRP1531	CRP1531	CRP1531	CRP1530
	11	Accessory Assy	* CEC7757	* CEC7757	CEW3027	* CEC7757
	12	Handle	Not used	Not used	CND7909	Not used
	13	IM CD-ROM	Not used	Not used	Not used	Not used
	14	Holder	Not used	Not used	CZN7192	CZN7192
	15	Cushion	Not used	Not used	CZN7193	CZN7193
	16	Card Remote Control Unit	CXE5116	Not used	CXE5116	CXE5116
	17	Cord Assy	Not used	CDP1805	CDP1805	Not used
	18	Panel	Not used	Not used	Not used	CNS9475

C

Owner's Manual, Quick Start Guide, Installation Manual

Part No.	Language
CRB5051	Russian
CRB5052	English
CRD5021	English, French, Italian, Spanish (Espanol), German, Dutch
CRD5022	English, French, Italian, Spanish (Espanol), German, Dutch
CRD5024	English, Traditional Chinese, Thai, Indonesian
CRD5025	English, Spanish (Espanol), Portuguese (B)
CRD5026	English, Arabic, Persian

D

E

F

CONTENTS OF CD-ROM (Operation Manual), CRI1023

Part No.	Language
*CRB5038	English
*CRB5039	French
*CRB5040	Italian
*CRB5041	Spanish (Espanol)
*CRB5042	German
*CRB5043	Dutch
*CRB5044	Swedish
*CRB5045	Norwegian
*CRB5046	Finnish
*CRB5047	Danish
*CRB5048	Portuguese
*CRB5049	Greek
*CRB5050	Turkish


Above operation manuals are supplied in PDF files by the CD-ROM.
Regarding the availability of paper manual, contact Pioneer Service representative in your region.

(3) CONTENTS OF Web IM

Part No.	Language
*CRI1049	English
*CRI1050	French
*CRI1051	Spanish (Espanol)

Above operation manuals are supplied in PDF files by the WEB.
Regarding the availability of paper manual, contact Pioneer Service representative in your region.

9.2 EXTERIOR (1)

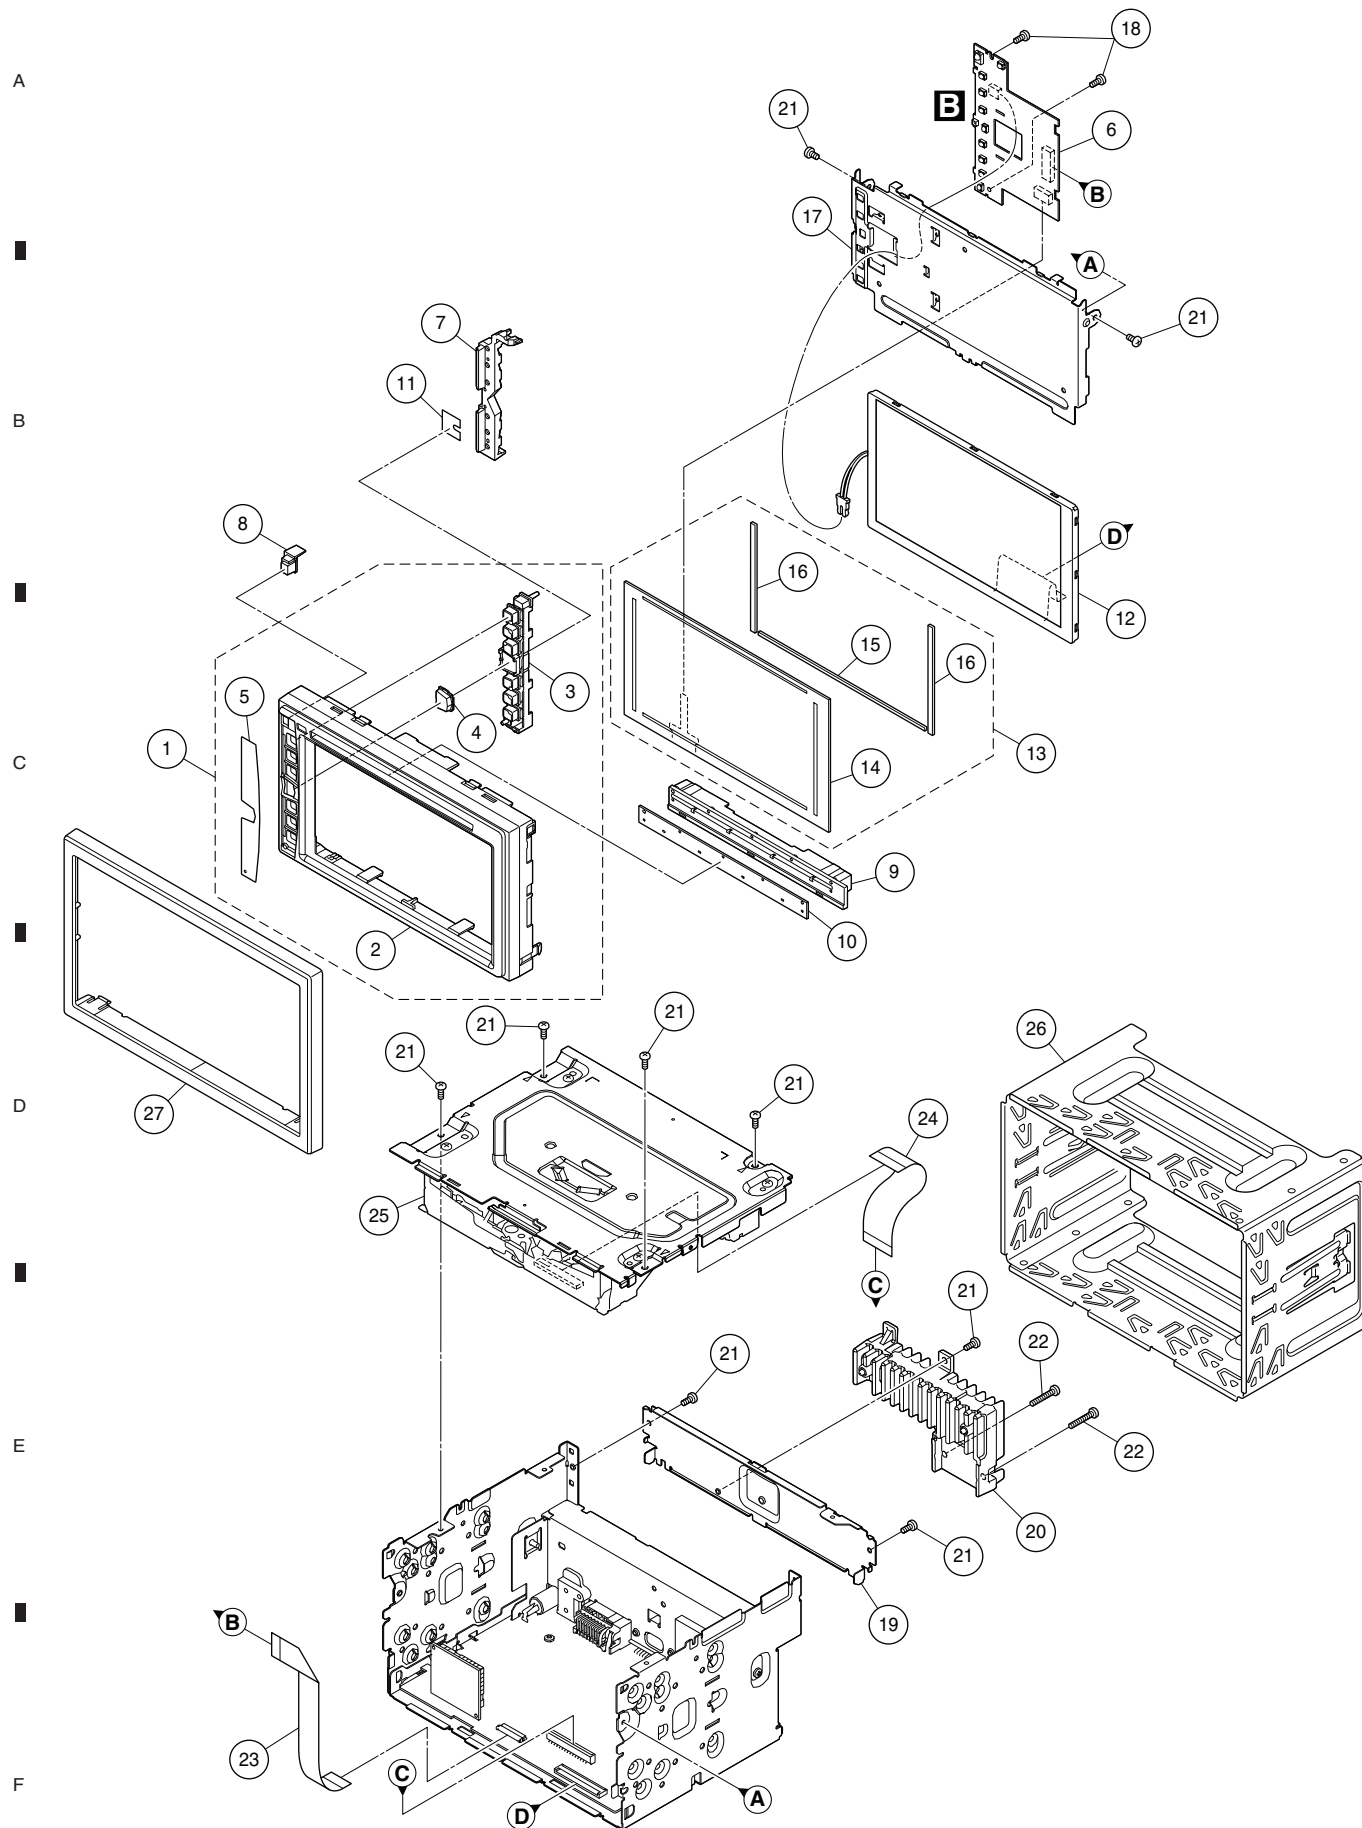

(1) EXTERIOR (1) SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Grille Assy	See Contrast table (2)	15	Cushion		CNN4273
*	2	Grille	See Contrast table (2)				
*	3	Button (VOL)	CAI4932	16	Cushion		CNN4964
*	4	Button (POWER)	CAI4933	17	Holder		CND7858
*	5	Plate	CNN5506	18	Screw		BPZ20P080FTC
				19	Holder		See Contrast table (2)
	6	Monitor Key Unit	CWF2546	20	Heat Sink		CNR2212
	7	Lighting Conductor	CNW3935				
	8	Lighting Conductor	CNW3936	21	Screw		BSZ26P060FTC
	9	Holder	CNW3806	22	Screw		BSZ26P120FTC
	10	Cover	CNN4865	23	FFC		CDD1250
				24	FFC		CDD1251
	11	Sheet	CNN5527	25	DVD Mechanism Module (LS2.5)	See Contrast table (2)	
	12	Inspected TFT LCD Unit	CWX4937				
	13	Touch Panel Unit	CXE8371	26	Holder		See Contrast table (2)
	14	Touch Panel	CSX1273	27	Panel		See Contrast table (2)

(2) CONTRAST TABLE

AVH-200EX/XNUC, AVH-201EX/XNUC, AVH-A200BT/XEVEU5, AVH-A200BT/XNUR, AVH-A205BT/XNRC, AVH-A205BT/XNRD, AVH-A205BT/XNRI and AVH-A209BT/XNID are constructed the same except for the following:


Mark	No.	Description	AVH-200EX/ XNUC	AVH-201EX/ XNUC	AVH-A200BT/ XEVEU5	AVH-A200BT/ XNUR
*	1	Grille Assy	CXF1500	CXF1501	CXF1502	CXF1502
	2	Grille	CNU3978	CNU3979	CNU3980	CNU3980
	19	Holder	CND7863	CND7863	CND7862	CND7862
	25	DVD Mechanism Module (LS2.5)	CXK8200	CXK8200	CXK8210	CXK8200
	26	Holder	Not used	Not used	CND7859	CND7859
	27	Panel	Not used	Not used	CNU2645	CNU2645

Mark	No.	Description	AVH-A205BT/ XNRC	AVH-A205BT/ XNRD	AVH-A205BT/ XNRI	AVH-A209BT/ XNID
*	1	Grille Assy	CXF1503	CXF1503	CXF1503	CXF1505
	2	Grille	CNU3981	CNU3981	CNU3981	CNU3983
	19	Holder	CND7862	CND7862	CND7862	CND7863
	25	DVD Mechanism Module (LS2.5)	CXK8200	CXK8200	CXK8200	CXK8200
	26	Holder	Not used	Not used	CND7859	Not used
	27	Panel	Not used	Not used	CNU2645	Not used

1 2 3 4

9.3 EXTERIOR (2)

A

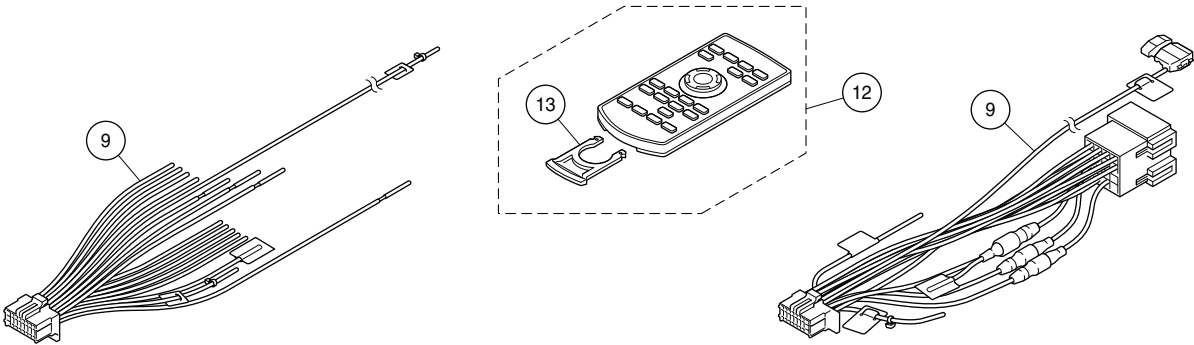

B

UC, RC, RD, RI, ID


EU5,UR

C

D

E

F

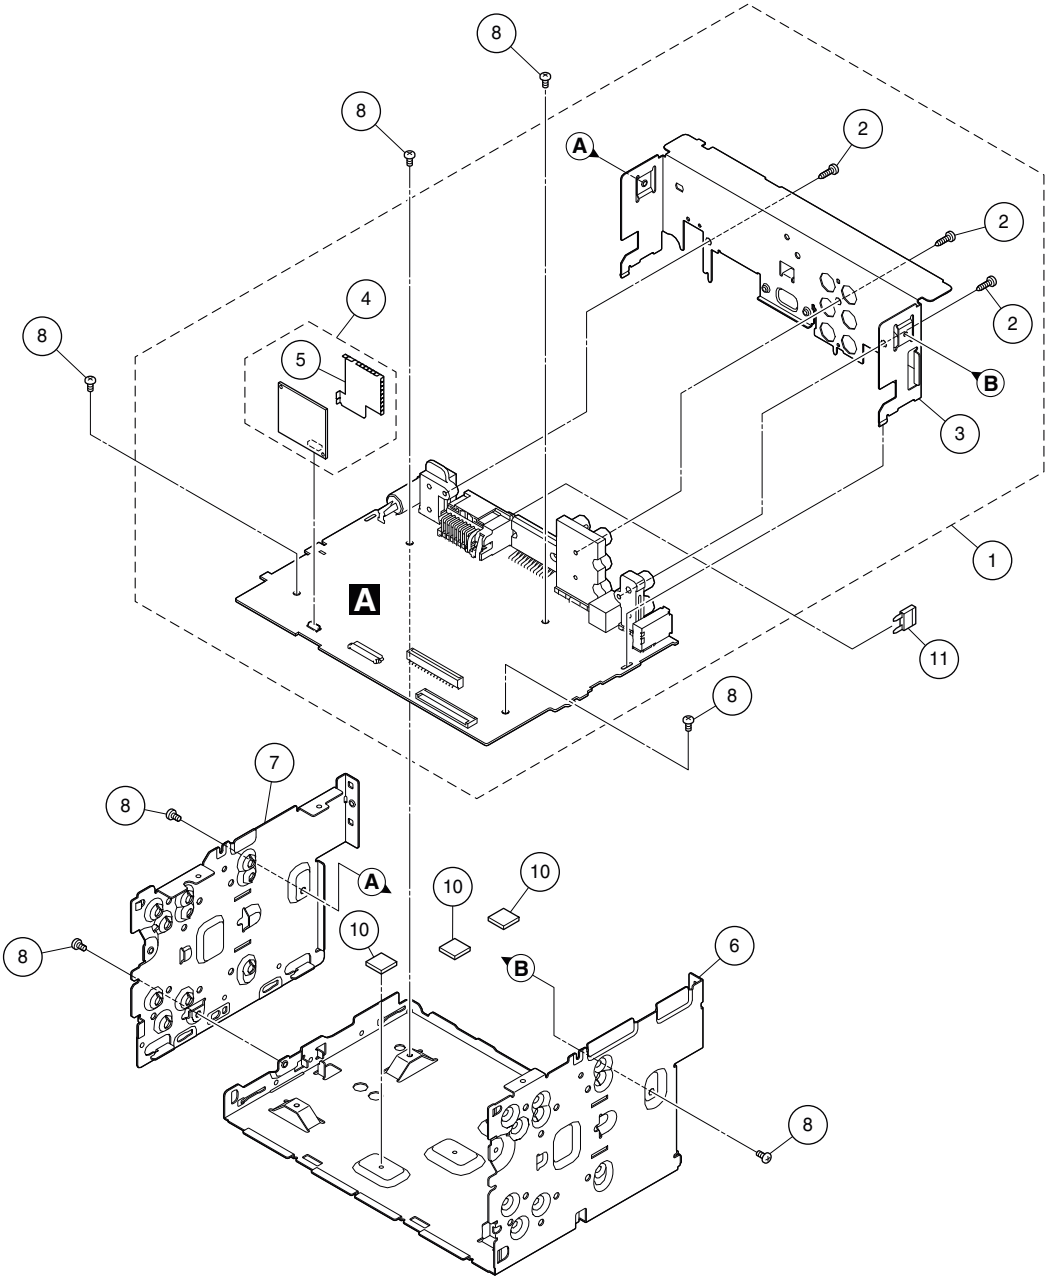

	5		6		7		8	
(1) EXTERIOR (2) SECTION PARTS LIST								
Mark	No.	Description	Part No.		Mark	No.	Description	Part No.
	1	Mother Unit	See Contrast table (2)		8	Screw	BSZ26P060FTC	
	2	Screw	BPZ26P080FTC		9	Cord Assy	See Contrast table (2)	A
	3	Holder	CND7860		10	Heat Conduction Sheet	CNN5528	
	4	BT Module	CWX4774					
	5	Shield Case	YNC5123		⚠	11	Fuse (10 A)	YEK5001
					12	Card Remote Control Unit	See Contrast table (2)	
	6	Chassis	CNA3420		13	Battery Cover	See Contrast table (2)	
	7	Bracket	CND7900					


(2) CONTRAST TABLE

AVH-200EX/XNUC, AVH-201EX/XNUC, AVH-A200BT/XEVEU5, AVH-A200BT/XNUR, AVH-A205BT/XNRC, AVH-A205BT/XNRD, AVH-A205BT/XNRI and AVH-A209BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-200EX/ XNUC	AVH-201EX/ XNUC	AVH-A200BT/ XEVEU5	AVH-A200BT/ XNUR	
	1	Mother Unit	CWF2508	CWF2509	CWF2510	CWF2511	B
	9	Cord Assy	CDP1837	CDP1837	CDP1697	CDP1697	
	12	Card Remote Control Unit	Not used	CXE5116	Not used	Not used	
	13	Battery Cover	Not used	CNU1624	Not used	Not used	

Mark	No.	Description	AVH-A205BT/ XNRC	AVH-A205BT/ XNRD	AVH-A205BT/ XNRI	AVH-A209BT/ XNID	
	1	Mother Unit	CWF2512	CWF2513	CWF2514	CWF2516	
	9	Cord Assy	CDP1837	CDP1837	CDP1837	CDP1837	
	12	Card Remote Control Unit	CXE5116	Not used	CXE5116	CXE5116	C
	13	Battery Cover	CNU1624	Not used	CNU1624	CNU1624	

9.4 DVD MECHANISM MODULE (1)

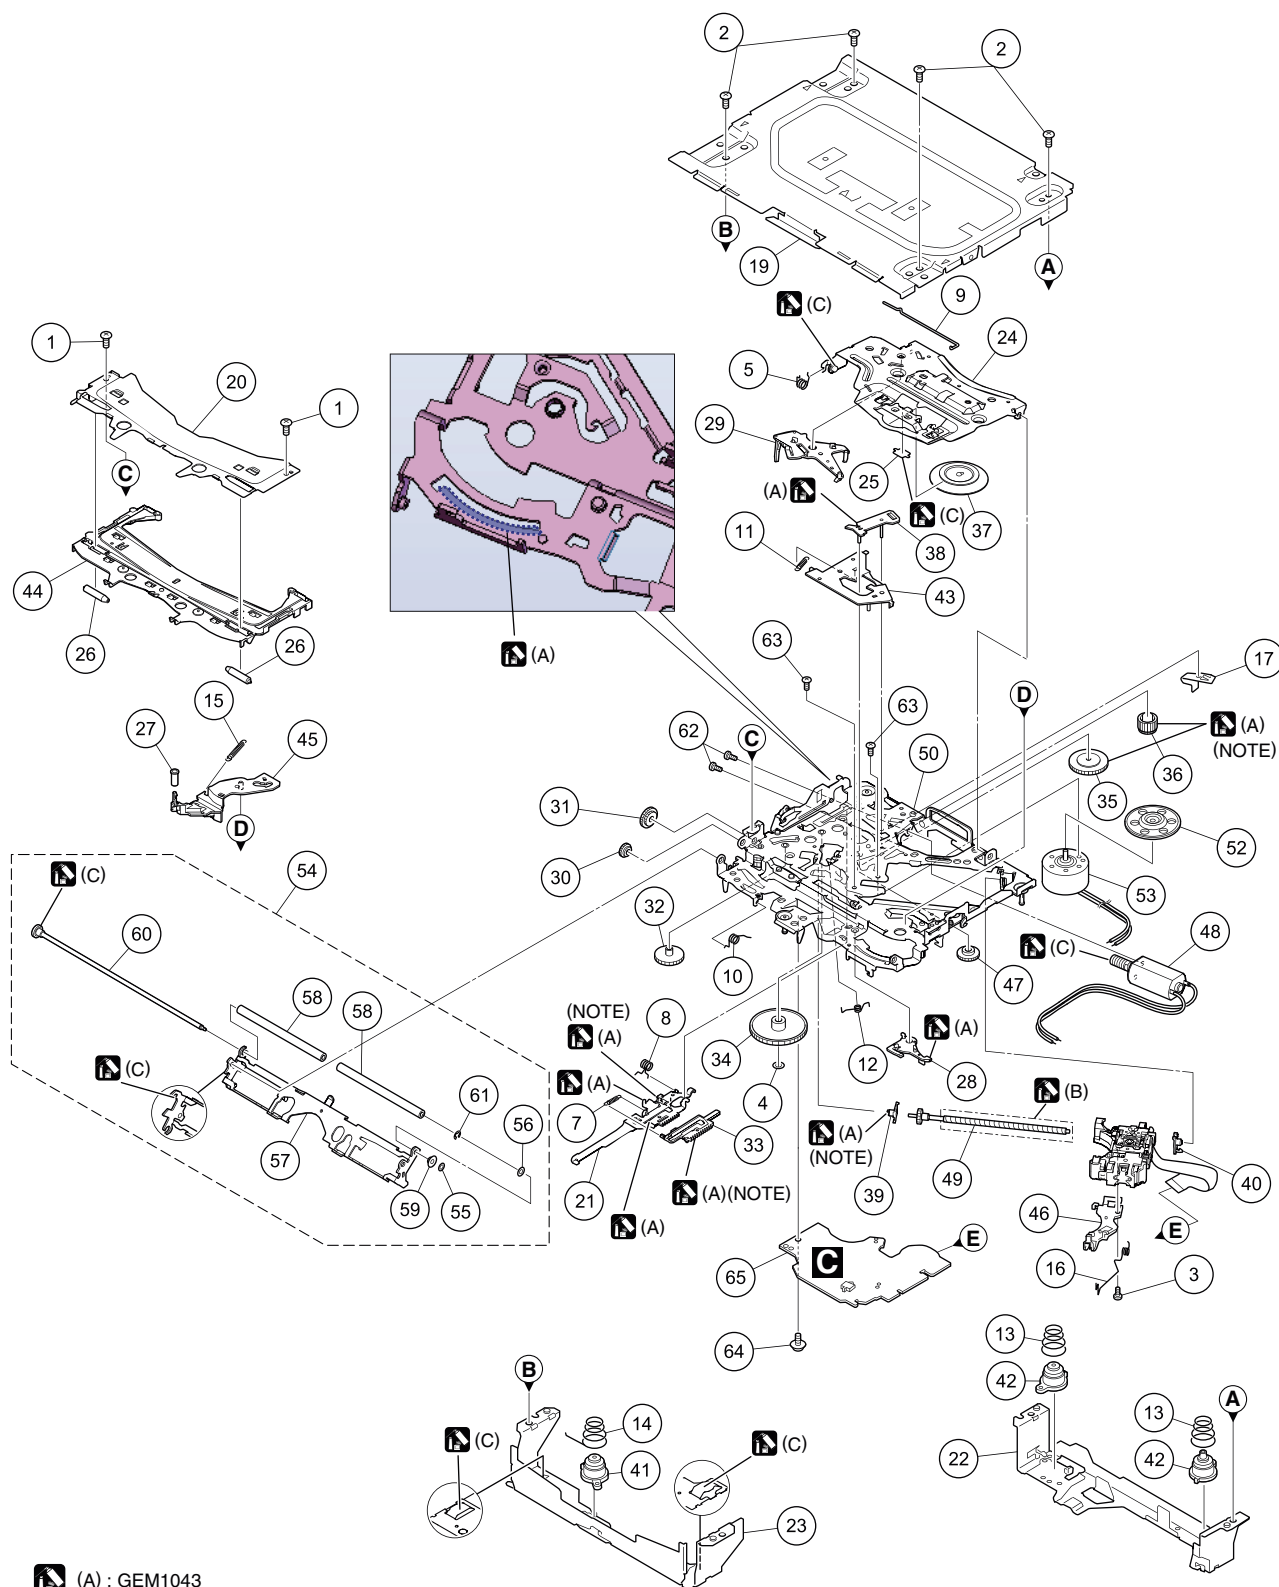

DVD MECHANISM MODULE (1) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Screw	BSZ20P040FTC	50	Chassis Unit	CXE9532	
2	Screw	BSZ26P060FTC				
3	Screw (M2 x 4)	CBA1835	51	*****		A
4	Washer	CBF1038	*	52 Support Wheel	CNW2052	
5	Spring	CBH2855	*	53 Spindle Motor	EXM2007	
				54 Arm Assy	CXE9036	
6	*****			55 Washer	CBF1037	
7	Spring	CBH3010				
8	Spring	CBH3011	56	Washer	CBF1038	
9	Spring	CBH3014	57	Arm	CND6779	
10	Spring	CBH3015	58	Roller	CNW2500	
			59	Collar	CNW2444	
11	Spring	CBH3016	60	Gear Unit	CXE8952	B
12	Spring	CBH3017				
13	Spring	CBH3019	61	E Ring	YE15FTC	
14	Spring	CBH3086	62	Screw	JFZ20P025FTC	
15	Coil Spring	CBH3095	63	Screw	JGZ17P020FTC	
			64	Screw (M2 x 5)	EBA1028	
16	Torsion Spring	CBH3096	*	65 Relay Unit	CWX4693	
17	Leaf Spring	CBL1824				
18	*****					
19	Case	CNB3928				
20	Bracket	CND4553				
21	Lever	CND7225				
22	Bracket	CND5710				
23	Bracket	CND6127				
24	Arm	CND7224				
25	Sheet	CNN3678				
26	Roller	CNW1172				
27	Roller	CNW1175				
28	Arm	CNW1177				
29	Arm	CNW1178				
30	Gear	CNW1180				D
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				
36	Gear	CNW1187				
37	Clamper	CNW1190				
38	Arm	CNW1192				E
39	Holder	CNW1193				
40	Holder	CNW1194				
41	Damper	CNW2439				
42	Damper	CNW2440				
43	Arm	CNW1726				
44	Guide	CNW3489				
45	Arm	CNW2241				
46	Rack	CNW2265				
47	Gear	CNW2287				F
48	Motor Unit	CXC4026				
49	Screw Unit	CXC8894				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A: AVH-200EX/XNUC	
B: AVH-201EX/XNUC	
C: AVH-A200BT/XEVEU5	
D: AVH-A200BT/XNUR	
E: AVH-A205BT/XNRC	
F: AVH-A205BT/XNRD	
G: AVH-A205BT/XNRI	
H: AVH-A209BT/XNID	
Unit Number : CWF2508 (A)	
Unit Number : CWF2509 (B)	
Unit Number : CWF2510 (C)	
Unit Number : CWF2511 (D)	
Unit Number : CWF2512 (E)	
Unit Number : CWF2513 (F)	
Unit Number : CWF2514 (G)	
Unit Number : CWF2516 (H)	
Unit Name : Mother Unit	
Unit Number : CWF2546	
Unit Name : Monitor Key Unit	
Unit Number : NSP	
Unit Name : Relay Unit	

A

Unit Number : CWF2508 (A)
Unit Number : CWF2509 (B)
Unit Number : CWF2510 (C)
Unit Number : CWF2511 (D)
Unit Number : CWF2512 (E)
Unit Number : CWF2513 (F)
Unit Number : CWF2514 (G)
Unit Number : CWF2516 (H)

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
Unit Name : Mother Unit	

MISCELLANEOUS

IC 111	Logic IC	TC7SH32FUS2
IC 201	DC/DC CONV IC	KBD9876EFJ
IC 301	DC/DC CONV IC	KBD9876EFJ
IC 401	DC/DC CONV IC	MM3630BR
IC 501	Regulator IC	NJW4181U3-33B
IC 511	Regulator IC	MM1856A58N
IC 521	Regulator IC	NJM2872BF05
IC 531	Regulator IC	S-19243E50H-V5
IC 541	Regulator IC	MM3479A33P
IC 551	Regulator IC	MM3479A13P
IC 561	Regulator IC	MM3479A33P
IC 571	Regulator IC	S-1333B33-M5
IC 581	Regulator IC	S-1333B33-M5
IC 591	Regulator IC	MM3479A18P
IC 601	Regulator IC	S-1333B33-M5
IC 611	Regulator IC	S-1333B33-M5
IC 701	Flash Blank UC IC	MN103LFA5RXW
IC 702	Serial Flash Memory	MX25L1606EM2I-12G
IC 1001	IC(A,B,C,E,F,G)	337S3959
IC 1011	Flash ROM Unit	CVQ1112
IC 1041	Disc PRO SYS LSI	SPHE8288TQ-HLEK8
IC 1151	RAM IC	W9825G6KH-6
IC 1301	IC	BA5839FP
IC 1431	IC	NJW1351RB1
IC 1432	IC	CA0023AN
IC 1701	DC/DC CONV IC	R1294L103A
IC 1901	OP AMP IC(D,G)	NJM8065RB1
IC 1902	OP AMP IC(D,G)	NJM8065RB1
IC 8401	Tuner IC	TEF6686AHN
IC 9001	E-VOL SYS LSI	PM9015A
IC 9201	Power AMP IC	TCB501HQ
Q 21	Bipolar TR	HN1C01FUS1
Q 31	Resistor Built-IN TR	LTC014EEB
Q 41	Bipolar TR	LSCR523UB
Q 51	Bipolar TR	LSAR523UB
Q 111	Resistor Built-IN TR	LTC043ZEB
Q 112	Resistor Built-IN TR	RN4987S1
Q 701	Dual Chip Transistor	HN1C03FU
Q 702	Transistor	UMF5N
Q 703	Transistor	UMF5N

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	Q 1001 Bipolar TR(A,B,C,E,F,G)	LSAR523UB	L 301 SMD SPL Inductor	CTH1584
	Q 1201 Transistor	2SAR293PGZE	L 401 SMD SPL Inductor	CTH1584
	Q 1202 Bipolar TR	LSCR523UB	L 1002 Chip Beads	VTL1126
	Q 1203 Bipolar TR	LSCR523UB	L 1003 Chip Beads	VTL1126
	Q 1251 Transistor	2SAR293PGZE	L 1004 Chip Beads	VTL1126
	Q 1252 Bipolar TR	LSCR523UB	L 1008 Chip Beads	VTL1126
	Q 1253 Bipolar TR	LSCR523UB	L 1009 Chip Beads	VTL1126
	Q 1401 Transistor	EMH53	L 1010 Chip Beads	VTL1126
	Q 1402 Transistor	EMH53	L 1012 Chip Beads	VTL1126
	Q 1403 Transistor	EMH53	L 1013 Chip Beads	VTL1126
B	Q 1601 Resistor Built-IN TR(E,F,G,H)	RN4982S1	L 1014 Chip Beads	VTL1126
	Q 1602 Resistor Built-IN TR(E,F,G,H)	RN4982S1	L 1015 Chip Beads	VTL1126
	Q 1603 Resistor Built-IN TR(E,F,G,H)	RN4982S1	L 1016 Chip Beads	VTL1126
	Q 1604 Resistor Built-IN TR(E,F,G,H)	RN4982S1	L 1017 Chip Beads	VTL1126
	Q 1701 Resistor Built-IN TR	LTC024EEB	L 1018 Chip Beads	VTL1126
	Q 1702 Bipolar TR	LSAR523UB	L 1019 Chip Beads	VTL1126
	Q 1801 Bipolar TR	LSAR523UB	L 1020 Chip Beads	VTL1126
	Q 1802 Bipolar TR	LSCR523UB	L 1021 Inductor	CTF1786
	Q 1901 Resistor Built-IN TR(D,G)	LTC023EEB	L 1022 Chip Beads	VTL1126
	Q 1902 Bipolar TR(D,G)	LSCR523UB	L 1023 Chip Beads	VTL1126
	Q 1903 Bipolar TR(D,G)	HN1A01FUS1	L 1024 Chip Beads	VTL1126
	Q 1905 Resistor Built-IN TR(D,G)	LTC023EEB	L 1025 Chip Beads	VTL1126
	Q 1906 Resistor Built-IN TR(D,G)	LTC023EEB	L 1026 Inductor	CTF1786
	D 1 Diode	S1JP	L 1027 Chip Beads	VTL1133
	D 2 Diode	S1JP	L 1041 Inductor	LCTC4R7K1608
C	D 11 Diode	RB080L-30	L 1151 Inductor	CTF1786
	D 21 Zener Diode	UDZV6R2(B)	L 1401 Chip Beads	VTL1126
	D 22 Zener Diode	UDZV6R8(B)	L 1402 Chip Beads	VTL1126
	D 31 Switching Diode	1SS355VM	L 1403 Chip Beads	VTL1126
	D 51 Switching Diode	1SS355VM	L 1404 Chip Beads	VTL1126
	D 111 Switching Diode	1SS355VM	L 1405 Chip Beads	VTL1126
	D 201 Diode	RB056L-40	L 1406 Chip Beads	VTL1126
	D 301 Schottky Diode	DB2J41100	L 1431 Chip Beads	VTL1126
	D 401 Diode	RB080L-30	L 1433 SMD SPL Inductor	LCYA100J2016
	D 501 Diode	RB080L-30	L 1434 Chip Beads	VTL1126
D	D 514 Diode	S1JP	L 1435 Chip Beads	VTL1126
	D 551 Diode	S1JP	L 1436 Chip Beads	VTL1126
	D 552 Diode	S1JP	L 1437 Chip Beads	VTL1126
	D 701 Switching Diode	1SS355VM	L 1438 Chip Beads	VTL1126
	D 1431 Diode	RSB18V	L 1464 Chip Beads	VTL1126
	D 1432 Diode	RSB18V	L 1465 Chip Beads	VTL1126
	D 1434 Diode	RSB18V	L 1471 Choke Coil	CTH1648
	D 1435 Diode	RSB18V	L 1610 Chip Beads	VTL1126
	D 1436 Diode	RSB18V	L 1611 Chip Beads	VTL1126
	D 1461 Diode	RSB18V	L 1701 SMD SPL Inductor	CTH1650
E	D 1462 Diode	RSB18V	L 1801 Inductor	CTF1765
	D 1471 Diode	EZAEG2A50AX	L 1901 Ferrite Bead(D,G)	CTF1528
	D 1472 Diode	EZAEG2A50AX	L 8401 SMD Ferrite Beads	CTF1893
	D 1601 Schottky Diode	RB751SM-40	L 8403 Inductor	LCTC150K2125
	D 1602 Schottky Diode	RB751SM-40	L 8405 Inductor	LCMAR27J1608
	D 1603 Diode	RSB18V	L 8409 Inductor	CTF1389
	D 1604 Diode	RSB18V	X 701 Crystal Resonator 12.500 MHz	CSS1839
	D 1701 Schottky Diode	RB551VM-30	X 1041 Crystal Oscillator	ASS7123
	D 1702 Diode	RB548W	X 8401 Crystal Resonator 9.216 MHz	CSS1888
	D 1703 Diode	RB548W	⚠ P301 Fuse 3.0 A	CEK1404
F	D 1704 Diode	RB548W	⚠ P1401 Poly Switch	FSMD075-24R
	D 8435 Diode	EZAEG2A50AX	⚠ P1431 Poly Switch	FSMD075-24R
	D 8436 Diode	EZAEG2A50AX	⚠ P1601 Poly Switch	FSMD075-24R
	L 2 Choke Coil	CTH1636	P 8435 Surge Absorber	IMSA-6803-01Y900
	L 201 Inductor	CTH1625	F 9001 EMI Filter	CCG1142

5			6		7			8	
Circuit Symbol and No.			Part No.		Circuit Symbol and No.			Part No.	
F	9201	EMI Filter	CCG1142		R	409		RS1/16SS471J	
F	9202	EMI Filter	CCG1142		R	411		RS1/4SA331J	
VL	8401	Variable Coil	CTC1215		R	413		RS1/16SS0R0J	
CN	901	B To B Connector	CKS6346		R	541		RS1/10SR0R0J	
CN	1351	Connector	CKS3871		R	543		RS1/10SR0R0J	
					R	544		RS1/10SR0R0J	
CN	1481	FFC/FPC Connector	CKS6643		R	545		RS1/10SR0R0J	
CN	1801	FFC/FPC Connector	CKS6807		R	546		RS1/10SR0R0J	
JA	1	Connector	CKM1613						
JA	1401	RCA Jack	CKB1113		R	702		RS1/16SS104J	
JA	1431	RCA Jack	CKB1117		R	703		RS1/16SS221J	
					R	704		RS1/16SS221J	
JA	1432	3.5 DIA Jack	CKN1106		R	705		RS1/16SS221J	
JA	1461	Jack	CKN1103		R	706		RS1/16SS473J	
JA	1471	USB Jack	CKN1118						
JA	8435	Antenna Jack	CKX1104		R	707		RS1/16SS101J	
U	901	BT Module	CWX4774		R	708		RS1/16SS101J	
					R	709		RS1/16SS473J	
					R	710		RS1/16SS104J	
					R	711		RS1/16SS1002D	
RESISTORS									
R	21		RS1/16SS103J						
R	22		RS1/16SS473J		R	712		RS1/16SS221J	
R	23		RS1/16SS472J		R	713		RS1/16SS471J	
R	24		RS1/16SS104J		R	714		RS1/16SS471J	
R	25		RS1/16SS473J		R	715		RS1/16SS472J	
					R	716		RS1/16SS472J	
R	26	1 kohm	CCN1326						
R	31		RS1/16SS103J		R	722		RS1/16SS102J	
R	32		RS1/16SS472J		R	724		RS1/16SS473J	
R	33	1 kohm	CCN1326		R	726		RS1/16SS102J	
R	41		RS1/16SS102J		R	727		RS1/16SS473J	
					R	728		RS1/16SS104J	
R	44		RS1/16SS561J						
R	45	3.9 kohm	CCN1352		R	729		RS1/16SS101J	
R	51		RS1/16SS102J		R	730		RS1/16SS473J	
R	52		RS1/16SS473J		R	731		RS1/16SS473J	
R	53		RS1/16SS223J		R	732		RS1/16SS102J	
					R	734		RS1/16SS473J	
R	54		RS1/16SS103J						
R	102		RS1/16SS103J		R	735		RS1/16SS101J	
R	113		RS1/16SS473J		R	736		RS1/16SS101J	
R	114		RS1/16SS104J		R	737		RS1/16SS101J	
R	115		RS1/16SS221J		R	738		RS1/16SS561J	
					R	739		RS1/16SS473J	
R	116		RS1/16SS0R0J						
R	117		RS1/10SR102J		R	740		RS1/16SS473J	
R	201		RS1/16SS3601D		R	741		RS1/16SS473J	
R	202		RS1/16SS3602D		R	742		RS1/16SS101J	
R	203		RS1/16SS1202D		R	743		RS1/16SS101J	
					R	745		RS1/16SS471J	
R	204		RS1/16SS822J						
R	208		RS1/8SQ331J		R	746		RS1/16SS101J	
R	301		RS1/16SS3301D		R	747		RS1/16SS822J	
R	302		RS1/16SS8202D		R	748		RS1/16SS473J	
R	303		RS1/16SS1202D		R	749		RS1/16SS473J	
					R	750		RS1/16SS473J	
R	304		RS1/16SS153J						
R	308		RS1/4S561J		R	753		RS1/16SS473J	
R	310		RS1/16SS0R0J		R	755		RS1/16SS473J	
R	311		RS1/16SS0R0J		R	756	(E,F)	RS1/16SS104J	
R	312		RS1/16SS0R0J		R	757	(C,D,G,H)	RS1/16SS104J	
					R	758	(D,F,H)	RS1/16SS104J	
R	401		RS1/16SS622J						
R	402		RS1/16SS3001D		R	759	(C,E,G)	RS1/16SS104J	
R	403		RS1/16SS1602D		R	760		RS1/16SS104J	
R	405		RS1/16SS2701D		R	762	(B,G,H)	RS1/16SS104J	
R	406		RS1/16SS473J		R	763	(A,C,D,E,F)	RS1/16SS104J	
					R	764		RS1/16SS473J	
R	407		RS1/16SS304J						
R	408	0.16 ohm	CCN1431		R	765		RS1/16SS473J	
					R	766		RS1/16SS101J	

	1		2		3		4
	Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.
A	R	767	RS1/16SS473J	R	1059	RS1/16SS101J	
	R	768	RS1/16SS473J	R	1060	RS1/16SS101J	
	R	769	RS1/16SS473J	R	1061	RS1/16SS473J	
	R	770	RS1/16SS102J	R	1062	RS1/16SS913J	
	R	771	RS1/16SS102J	R	1063	RS1/16SS471J	
	R	772	RS1/16SS222J	R	1064	RS1/16SS221J	
	R	773	RS1/16SS222J	R	1065	RS1/16SS473J	
	R	774	RS1/16SS103J	R	1066	RS1/16SS101J	
	R	775	RS1/16SS103J	R	1067	RS1/16SS473J	
	R	776	RS1/16SS103J	R	1068	RS1/16SS101J	
B	R	777	RS1/16SS103J	R	1069	RS1/16SS102J	
	R	778	RS1/16SS105J	R	1070	RS1/16SS101J	
	R	779	RS1/16SS105J	R	1072	RS1/16SS221J	
	R	780	RS1/16SS473J	R	1073	RS1/16SS473J	
	R	782	RS1/16SS473J	R	1074	RS1/16SS0R0J	
	R	784	RS1/16SS104J	R	1075	RS1/16SS750J	
	R	791	RS1/16SS101J	R	1076	RS1/16SS0R0J	
	R	792	RS1/16SS101J	R	1078	RS1/16SS103J	
	R	901	RS1/16SS473J	R	1081	RS1/16SS221J	
	R	904	RS1/16SS102J	R	1083	RS1/16SS101J	
C	R	907	RS1/16SS101J	R	1085	RS1/16SS101J	
	R	910	RS1/16SS101J	R	1087	RS1/16SS101J	
	R	911	RS1/16SS222J	R	1089	RS1/16SS101J	
	R	912	RS1/16SS101J	R	1091	RS1/16SS101J	
	R	913	RS1/16SS101J	R	1093	RS1/16SS101J	
	R	915	RS1/16SS222J	R	1095	RS1/16SS101J	
	R	1001 (A,B,C,E,F,G)	RS1/16SS473J	R	1097	RS1/16SS101J	
	R	1002 (A,B,C,E,F,G)	RS1/16SS472J	R	1099	RS1/16SS101J	
	R	1003 (A,B,C,E,F,G)	RS1/16SS222J	R	1101	RS1/16SS101J	
	R	1004 (A,B,C,E,F,G)	RS1/16SS222J	R	1103	RS1/16SS101J	
	R	1005 (A,B,C,E,F,G)	RS1/16SS183J	R	1105	RS1/16SS101J	
	R	1006 (A,B,C,E,F,G)	RS1/16SS101J	R	1107	RS1/16SS101J	
	R	1007 (A,B,C,E,F,G)	RS1/16SS101J	R	1109	RS1/16SS101J	
	R	1008 (A,B,C,E,F,G)	RS1/16SS473J	R	1111	RS1/16SS101J	
	R	1011	RS1/16SS101J	R	1114	RS1/16SS101J	
D	R	1012	RS1/16SS101J	R	1124	RS1/16SS0R0J	
	R	1013	RS1/16SS473J	R	1125	RS1/16SS0R0J	
	R	1014	RS1/16SS473J	R	1126	RS1/16SS0R0J	
	R	1015	RS1/16SS473J	R	1127	RS1/16SS0R0J	
	R	1016	RS1/16SS221J	R	1128	RS1/16SS0R0J	
	R	1017	RS1/16SS101J	R	1129	RS1/16SS0R0J	
	R	1033	RS1/16SS105J	R	1130	RS1/16SS0R0J	
	R	1034	RS1/16SS105J	R	1131	RS1/16SS0R0J	
	R	1035	RS1/16SS223J	R	1149	RS1/16SS473J	
	R	1036	RS1/16SS223J	R	1151	RS1/16SS181J	
E	R	1037	RS1/16SS222J	R	1152	RS1/16SS181J	
	R	1038	RS1/16SS222J	R	1153	RS1/16SS181J	
	R	1039	RS1/16SS103J	R	1154	RS1/16SS181J	
	R	1040	RS1/16SS332J	R	1155	RS1/16SS181J	
	R	1041	RS1/16SS301J	R	1156	RS1/16SS181J	
	R	1047 91 ohm	CCN1424	R	1157	RS1/16SS181J	
	R	1048 91 ohm	CCN1424	R	1158	RS1/16SS181J	
	R	1049 91 ohm	CCN1424	R	1159	RS1/16SS391J	
	R	1050	RS1/16SS103J	R	1160	RS1/16SS0R0J	
	R	1051	RS1/16SS101J	R	1161	RS1/16SS301J	
F	R	1052	RS1/16SS103J	R	1162	RS1/16SS301J	
	R	1053	RS1/16SS101J	R	1163	RS1/16SS301J	
	R	1054	RS1/16SS101J	R	1164	RS1/16SS301J	
	R	1055	RS1/16SS105J	R	1165	RS1/16SS301J	
	R	1058	RS1/16SS101J	R	1166	RS1/16SS301J	

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R	1167		RS1/16SS301J	R	1322		RS1/16SS0R0J	
R	1168		RS1/16SS301J	R	1323		RS1/16SS0R0J	
R	1169		RS1/16SS181J	R	1351		RS1/16SS561J	
R	1170		RS1/16SS181J	R	1352		RS1/16SS681J	A
R	1171		RS1/16SS181J	R	1408		RS1/16SS223J	
R	1172		RS1/16SS181J	R	1409		RS1/16SS223J	
R	1173		RS1/16SS181J	R	1410		RS1/16SS223J	
R	1174		RS1/16SS181J	R	1411		RS1/16SS223J	
R	1175		RS1/16SS181J	R	1412		RS1/16SS223J	
R	1176		RS1/16SS181J	R	1413		RS1/16SS223J	
R	1177		RS1/16SS391J	R	1420		RS1/16SS821J	
R	1178		RS1/16SS391J	R	1421		RS1/16SS821J	
R	1179		RS1/16SS391J	R	1422		RS1/16SS821J	
R	1180		RS1/16SS391J	R	1423		RS1/16SS821J	B
R	1181		RS1/16SS391J	R	1424		RS1/16SS821J	
R	1182		RS1/16SS391J	R	1425		RS1/16SS821J	
R	1183		RS1/16SS301J	R	1431		RS1/16SS75R0D	
R	1184		RS1/16SS301J	R	1432		RS1/16SS75R0D	
R	1185		RS1/16SS301J	R	1433		RS1/16SS301J	
R	1186		RS1/16SS301J	R	1438		RS1/16SS223J	
R	1187		RS1/16SS301J	R	1439		RS1/16SS223J	
R	1201		RS1/16SS4300F	R	1440		RS1/16SS75R0D	
R	1202		RS1/16SS3R3J	R	1442		RS1/16SS101J	
R	1203		RS1/10SR3R3J	R	1443		RS1/16SS101J	
R	1204		RS1/10SR2R2J	R	1444		RS1/10SR101J	C
R	1205		RS1/10SR2R2J	R	1445		RS1/10SR101J	
R	1206		RS1/10SR3R3J	R	1601 (E,F,G,H)		RS1/16SS8201D	
R	1207		RS1/16SS104J	R	1602 (E,F,G,H)		RS1/16SS6800D	
R	1209		RS1/16SS5600F	R	1603 (E,F,G,H)		RS1/16SS8201D	
R	1210		RS1/16SS470J	R	1605 (E,F,G,H)		RS1/16SS6800D	
R	1211		RS1/16SS101J	R	1606 (A,B,C,D)		RS1/16SS102J	
R	1212		RS1/16SS104J	R	1606 (E,F,G,H)		RS1/16SS1001D	
R	1213		RS1/16SS103J	R	1607 (A,B,C,D)		RS1/16SS102J	
R	1251		RS1/16SS4300F	R	1607 (E,F,G,H)		RS1/16SS1001D	
R	1252		RS1/16SS3R3J	R	1608		RS1/16SS103J	
R	1253		RS1/10SR3R3J	R	1609		RS1/16SS103J	D
R	1254		RS1/10SR1R8J	R	1701		RS1/16SS1002D	
R	1255		RS1/10SR1R8J	R	1702		RS1/16SS1002D	
R	1256		RS1/10SR3R3J	R	1703		RS1/16SS8201D	
R	1258		RS1/16SS104J	R	1706		RS1/10SR9102D	
R	1259		RS1/16SS470J	R	1707		RS1/10SR1802D	
R	1260		RS1/16SS5100F	R	1708		RS1/16SS203J	
R	1261		RS1/16SS121J	R	1709		RS1/16SS104J	
R	1262		RS1/16SS104J	R	1710		RS1/16SS103J	
R	1263		RS1/16SS103J	R	1711		RS1/16SS472J	
R	1301		RS1/16SS163J	R	1712		RS1/16SS1003D	
R	1302		RS1/16SS183J	R	1713		RS1/16SS9101D	E
R	1303		RS1/16SS822J	R	1714		RS1/10SR2R2J	
R	1304		RS1/16SS752J	R	1716		RS1/16SS1203D	
R	1305		RS1/16SS221J	R	1717		RS1/16SS302J	
R	1306		RS1/16SS5102D	R	1718		RS1/16SS1502D	
R	1307		RS1/16SS5102D	R	1719		RS1/16SS472J	
R	1308		RS1/8SQ1R0J	R	1720		RS1/16SS103J	
R	1313		RS1/16SS473J	R	1721		RS1/16SS332J	
R	1314		RS1/16SS113J	R	1802		RS1/16SS473J	
R	1315		RS1/16SS473J	R	1803		RS1/16SS473J	
R	1316		RS1/16SS113J	R	1805		RS1/16SS473J	F
R	1317		RS1/16SS221J	R	1806		RS1/16SS473J	
R	1318		RS1/16SS3902D	R	1807		RS1/16SS473J	
R	1319		RS1/16SS3902D	R	1808		RS1/16SS473J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**R 1813
R 1815
R 1817RS1/16SS153J
RS1/16SS105J
RS1/16SS153JC 82
C 83
C 84
C 87CKSSYB104K16
CKSSYB102K50
CKSSYB102K50
CKSSYB102K50

A

R 1818
R 1819
R 1820
R 1821
R 1831RS1/16SS472J
RS1/16SS101J
RS1/16SS273J
RS1/16SS474J
RS1/16SS3R9JC 88
C 90
C 111
C 112
C 113CKSRYX106M6R3
CKSSYB102K50
CKSSYB104K10
CKSQYX475K10
CEVW101M16R 1832
R 1833
R 1834
R 1835
R 1837RS1/16SS270J
RS1/16SS221J
RS1/16SS750J
RS1/16SS560J
RS1/16SS510JC 201
C 202
C 203
C 206
C 207CKSYX476M10
CKSSYB103K16
CKSQYX106K10
CKSSYB103K25
CKSSYB103K16

B

R 1839
R 1840
R 1841
R 1842
R 1843RS1/16SS151J
RS1/16SS270J
RS1/16SS131J
RS1/16SS131J
RS1/16SS151JC 208
C 209
C 301
C 302
C 303

47 uF

CKSYX106K35
CKSRYB103K50
CCG1256
CKSSYB103K16
CKSQYX106K16R 1844
R 1845
R 1846
R 1847
R 1848RS1/16SS240J
RS1/16SS330J
RS1/16SS270J
RS1/16SS510J
RS1/16SS220JC 306
C 307
C 308
C 309
C 401CKSSYB682K25
CKSSYB103K16
CKSYX106K35
CKSRYB103K50
CKSSYB153K16

C

R 1849
R 1850
R 1851
R 1852
R 1901 (D,G)RS1/16SS151J
RS1/16SS151J
RS1/16SS330J
RS1/16SS1R0J
RS1/16SS332JC 402
C 404
C 405
C 406
C 407CKSSYB223K16
CKSSYB331K50
CKSSYX105K10
CKSRYX104K50
CKSYX226M16R 1902 (D,G)
R 1903 (D,G)
R 1904 (D,G)
R 1907 (D,G)
R 1908 (D,G)RS1/16SS512J
RS1/16SS102J
RS1/16SS161J
RS1/16SS102J
RS1/16SS273JC 408
C 409
C 410
C 411
C 412CKSRYX225K10
CEVW101M16
CKSRYB224K16
CEVW470M16
CKSYX106K35

D

R 1909 (D,G)
R 1910 (D,G)
R 1911 (D,G)
R 1912 (D,G)
R 1913 (D,G)RS1/16SS224J
RS1/16SS103J
RS1/16SS134J
RS1/16SS824J
RS1/16SS103JC 413
C 501
C 502
C 503
C 504CKSSYB102K50
CEAT471M16
CKSRYX104K50
CKSSYB104K10
CKSYX476M6R3R 1914 (D,G)
R 1915 (D,G)
R 8404
R 8406
R 8407RS1/16SS473J
RS1/16SS473J
RS1/16SS103J
RS1/16SS103J
RS1/16SS472JC 512
C 513
C 521
C 522
C 523CKSRYX105K16
CKSRYX105K16
CKSSYB104K16
CKSRYX475K10
CKSSYB104K10

E

R 8408
R 8409
R 8410
R 8412
R 8413RS1/16SS472J
RS1/16SS101J
RS1/16SS101J
RS1/16SS391J
RS1/16SS105JC 524
C 531
C 532
C 533
C 549CKSSYB103K16
CKSRYX225K16
CKSRYX225K10
CCSSCH681J50
CKSRYX106M6R3R 8414
R 8435
R 9010 (D,G)RS1/16SS105J
RS1/16SS0R0J
RS1/16SS821JC 550
C 551
C 552
C 553
C 554CKSSYB473K16
CKSSYX105K10
CKSSYX105K10
CKSSYB473K16
CKSSYX105K10**CAPACITORS**C 11
C 12
C 31
C 41
C 80CKSRYX104K50
CEAT472M16
CKSSYX105K16
CKSSYB103K50
CKSSYB102K50C 555
C 561
C 562
C 563
C 571CKSSYX105K10
CKSSYX105K10
CKSSYX105K10
CKSSYB104K10
CKSSYX105K10

C 81

CKSSYB102K50

C 572

CKSSYX105K10

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C	581	CKSSYX105K10		C	1053	CKSRYB224K16	
C	582	CKSSYX105K10		C	1054	CKSRYB224K16	
C	591	CKSSYX105K10		C	1058	CKSSYB104K10	
C	592	CKSSYX105K10		C	1059	CKSSYB104K10	A
C	593	CKSSYB104K10		C	1060	CKSSYB102K50	
C	601	CKSSYX105K10		C	1061	CKSSYB104K10	
C	602	CKSSYX105K10		C	1062	CKSSYB104K10	
C	611	CKSSYX105K10		C	1063	CKSSYB104K10	
C	612	CKSSYX105K10		C	1064	CKSSYB104K10	
C	701	CKSSYB104K10		C	1065	CKSSYB104K10	
C	702	CKSSYB103K16		C	1066	CKSSYB104K10	
C	703	CKSSYB104K10		C	1067	CKSSYB103K16	
C	704	CKSSYB104K10		C	1068	CKSSYB103K16	
C	706	CKSSYB102K50		C	1069	CKSSYB104K10	
C	707	CKSSYB104K10		C	1070	CCSSCH6R0D50	B
C	709	CKSSYB104K10		C	1071	CCSSCH6R0D50	
C	711	CKSSYB104K10		C	1073	CKSSYB104K10	
C	712	CKSSYB104K10		C	1074	CKSSYX105K10	
C	713	CCSSCH8R0D50		C	1075	CKSSYB104K10	
C	714	CCSSCH100D50		C	1076	CKSRYX475K6R3	
C	715	CKSSYB104K10		C	1077	CKSSYB104K10	
C	719	CKSSYB103K50		C	1078	CKSSYB104K10	
C	720	CKSSYB104K10		C	1079	CKSSYB104K10	
C	723	CKSSYB104K10		C	1080	CKSSYB104K10	
C	724	CKSSYB473K16		C	1081	CKSSYB104K10	C
C	725	CKSSYB104K10		C	1082	CKSSYB103K16	
C	726	CKSSYB102K50		C	1083	CKSSYB103K16	
C	727	CKSSYB102K50		C	1084	CKSSYB103K16	
C	728	CKSSYB473K16		C	1085	CKSSYB104K10	
C	729	CKSSYB103K16		C	1086	CKSSYB104K10	
C	732	CKSSYB103K16		C	1087	CKSSYB104K10	
C	733	CKSSYB103K16		C	1088	CKSSYB104K10	
C	901	CKSSYB104K10		C	1089	CKSSYB104K10	
C	902	CKSQYX475K10		C	1090	CKSSYB104K10	
C	903	CKSSYB104K10		C	1091	CCSSCH270J50	
C	904	CKSQYX475K10		C	1092	CKSSYB104K10	D
C	905	CEVW101M16		C	1093	CKSSYB104K10	
C	907	CKSSYX105K16		C	1094	CKSSYB104K10	
C	908	CCSSCH390J50		C	1095	CKSSYB104K10	
C	909	CCSSCH330J50		C	1096	CKSSYB104K10	
C	911	CCSSCH330J50		C	1098	CCSSCH560J50	
C	912	CKSSYB104K10		C	1099	CCSSCH560J50	
C	1001 (A,B,C,E,F,G)	CKSSYB104K10		C	1100	CCSSCH560J50	
C	1002 (A,B,C,E,F,G)	CKSSYB102K50		C	1101	CCSSCH560J50	
C	1003	CKSSYB104K10		C	1102	CCSSCH560J50	
C	1004	CKSSYB102K50		C	1103	CCSSCH560J50	E
C	1005	CKSSYB102K50		C	1104	CCSSCH560J50	
C	1006	CKSSYB104K10		C	1105	CCSSCH560J50	
C	1007	CKSSYB104K10		C	1106	CCSSCH560J50	
C	1011	CKSSYB104K10		C	1107	CCSSCH560J50	
C	1038	CKSSYB102K50		C	1108	CCSSCH560J50	
C	1039	CKSSYB102K50		C	1109	CCSSCH560J50	
C	1041	CKSQYX106K10		C	1110	CCSSCH560J50	
C	1042	CKSSYB104K10		C	1111	CCSSCH560J50	
C	1043	CKSQYX106K10		C	1112	CCSSCH560J50	
C	1044	CKSSYB104K10		C	1113	CCSSCH560J50	
C	1045	CKSQYX106K10		C	1114	CCSSCH560J50	F
C	1046	CCSSCH220J50		C	1115	CCSSCH560J50	
C	1047	CCSSCH220J50		C	1119	CKSRYX475K10	
C	1048	CCSSCH220J50		C	1151	CKSSYB104K10	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	C 1152	CKSSYB104K10	C 1603	CKSSYB102K50
	C 1153	CKSSYB104K10	C 1604	CKSSYB102K50
	C 1154	CKSSYB104K10	C 1701	CKSSYX224K6R3
	C 1155	CKSSYB104K10	C 1703	CKSSYX105K10
	C 1156	CKSSYB104K10	C 1704	CKSSYX224K6R3
	C 1157	CKSSYB104K10	C 1705	CKSRYB224K16
	C 1201	CKSQYX106K10	C 1706	CKSSYB222K50
	C 1202	CKSQYX226M6R3	C 1707	CKSSYB102K50
	C 1203	CKSSYB104K16	C 1708	CKSSYX105K16
	C 1251	CKSQYX226M6R3	C 1709	CKSSYX105K10
	C 1252	CKSSYB104K16	C 1710	CKSRYX105K25
	C 1301	CEVW101M16	C 1712	CKSRYX105K25
	C 1302	CKSQYX475K25	C 1713	CKSSYX104K50
	C 1303	CKSYX106K35	C 1714	CKSSYX104K50
	C 1304	CKSSYB104K16	C 1715	CKSSYX104K50
B	C 1305	CKSSYB473K16	C 1717	CKSQYX475K25
	C 1306	CKSSYX224K6R3	C 1718	CKSSYB682K25
	C 1307	CKSSYB104K16	C 1719	CKSRYX475K6R3
	C 1308	CKSSYB104K16	C 1720	CCSSCH101J50
	C 1309	CKSSYB104K16	C 1721	CKSSYB561K50
	C 1310	CKSSYB104K16	C 1722	CKSQYX475K25
	C 1311	CKSSYB104K16	C 1724	CKSSYB102K50
	C 1351	CKSSYB103K16	C 1801	CKSSYB104K16
	C 1352	CKSSYB103K16	C 1802	CKSSYB102K50
	C 1353	CKSRYB224K16	C 1803	CKSSYB102K50
C	C 1354	CKSRYB224K16	C 1804	CKSSYX105K16
	C 1409	CKSQYX475K10	C 1805	CKSSYB102K50
	C 1410	CKSQYX475K10	C 1806	CKSSYB104K16
	C 1411	CKSQYX475K10	C 1808	CKSYX106K35
	C 1412	CKSQYX475K10	C 1809	CKSSYB102K50
	C 1413	CKSQYX475K10	C 1811	CKSSYB102K50
	C 1414	CKSQYX475K10	C 1812	CKSSYB102K50
	C 1420	CKSSYB102K50	C 1813	CKSSYB104K10
	C 1421	CKSSYB102K50	C 1814	CKSQYX106K10
	C 1435	CKSSYX105K10	C 1817	CKSSYX104K50
D	C 1436	CKSSYX105K10	C 1818	CKSQYB334K50
	C 1437	CKSQYX106K10	C 1819	CKSSYB103K50
	C 1438	CKSSYB104K10	C 1821	CKSSYB104K16
	C 1439	CKSSYX105K10	C 1822	CKSQYX475K25
	C 1440	CKSRYX475K10	C 1823	CKSRYX225K16
	C 1441	CKSSYB102K50	C 1825	CKSSYB104K10
	C 1442	CKSSYB102K50	C 1826	CKSYX106K35
	C 1444	CKSRYX105K16	C 1831	CKSSYB104K16
	C 1445	CKSRYX105K16	C 1832	CKSQYX475K25
	C 1446	CKSRYX105K16	C 1839	CKSSYB102K50
E	C 1447	CKSRYX105K16	C 1840	CKSSYB104K16
	C 1448	CKSSYB104K10	C 1841	CKSSYB102K50
	C 1449	CKSQYX106K10	C 1842	CKSSYB104K10
	C 1450	CKSSYB102K50	C 1849	CKSSYB102K50
	C 1451	CKSSYX104K50	C 1850	CKSSYB104K10
	C 1452	CKSSYX104K50	C 1901 (D,G)	CKSSYB104K10
	C 1461	CKSSYB102K50	C 1903 (D,G)	CKSSYX105K10
	C 1462	CKSSYB102K50	C 1904 (D,G)	CKSRYX106M6R3
	C 1463	CKSSYX104K50	C 1905 (D,G)	CKSSYX224K10
	C 1464	CKSSYX104K50	C 1906 (D,G)	CKSSYX105K10
F	C 1473	CKSSYX104K50	C 1907 (D,G)	CCSSCH680J50
	C 1475	CKSSYX104K50	C 1908 (D,G)	CKSSYB104K10
	C 1477	CKSQYX106K10	C 1909 (D,G)	CKSSYB104K10
	C 1601	CKSSYB104K10	C 1910 (D,G)	CKSSYX105K10
	C 1602	CKSSYB104K10	C 1911 (D,G)	CCSSCH6R0D50

5			6			7			8																																																																																																																																																		
Circuit Symbol and No.			Part No.			Circuit Symbol and No.			Part No.																																																																																																																																																		
C	1912	(D,G)	CCSSCH220J50			C	9216		CKSSYB102K50																																																																																																																																																		
C	8401		CKSSYB104K16			C	9217		CKSSYB102K50																																																																																																																																																		
C	8402		CKSSYB104K16			C	9218		CKSSYB102K50																																																																																																																																																		
C	8403		CKSQYX106K10			C	9219		CKSSYB102K50		A																																																																																																																																																
C	8404		CKSQYX106K10			C	9220		CKSSYB102K50																																																																																																																																																		
C	8405		CKSSYB104K16			B Unit Number : CWF2546 Unit Name : Monitor Key Unit MISCELLANEOUS <table><tr><td>IC</td><td>2101</td><td>Display IC</td><td>OZ5271LN</td><td></td><td></td></tr><tr><td>IC</td><td>2201</td><td>IR RC REC Module</td><td>PNJ4833M</td><td></td><td>B</td></tr><tr><td>Q</td><td>2001</td><td>Bipolar TR</td><td>HN1C01FUS1</td><td></td><td></td></tr><tr><td>Q</td><td>2002</td><td>Bipolar TR</td><td>LSCR523UB</td><td></td><td></td></tr><tr><td>D</td><td>2101</td><td>Schottky Diode</td><td>RB162M-40</td><td></td><td></td></tr><tr><td>D</td><td>2102</td><td>Diode</td><td>CRG03</td><td></td><td></td></tr><tr><td>D</td><td>2201</td><td>LED</td><td>NESM026D-A21690</td><td></td><td></td></tr><tr><td>L</td><td>2101</td><td>SMD SPL Inductor</td><td>CTH1651</td><td></td><td></td></tr><tr><td>TH</td><td>2001</td><td>SMD Thermistor</td><td>ERTJ0ER104F</td><td></td><td></td></tr><tr><td>S</td><td>2201</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2202</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2203</td><td>Push Switch</td><td>CSG1155</td><td></td><td>C</td></tr><tr><td>S</td><td>2204</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2205</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2206</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2207</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2208</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>S</td><td>2209</td><td>Push Switch</td><td>CSG1155</td><td></td><td></td></tr><tr><td>CN</td><td>2001</td><td>FFC/FPC Connector</td><td>CKS6643</td><td></td><td></td></tr><tr><td>CN</td><td>2002</td><td>Connector</td><td>CKS4428</td><td></td><td></td></tr><tr><td>CN</td><td>2003</td><td>FFC/FPC Connector</td><td>CKS5285</td><td></td><td></td></tr></table>						IC	2101	Display IC	OZ5271LN			IC	2201	IR RC REC Module	PNJ4833M		B	Q	2001	Bipolar TR	HN1C01FUS1			Q	2002	Bipolar TR	LSCR523UB			D	2101	Schottky Diode	RB162M-40			D	2102	Diode	CRG03			D	2201	LED	NESM026D-A21690			L	2101	SMD SPL Inductor	CTH1651			TH	2001	SMD Thermistor	ERTJ0ER104F			S	2201	Push Switch	CSG1155			S	2202	Push Switch	CSG1155			S	2203	Push Switch	CSG1155		C	S	2204	Push Switch	CSG1155			S	2205	Push Switch	CSG1155			S	2206	Push Switch	CSG1155			S	2207	Push Switch	CSG1155			S	2208	Push Switch	CSG1155			S	2209	Push Switch	CSG1155			CN	2001	FFC/FPC Connector	CKS6643			CN	2002	Connector	CKS4428			CN	2003	FFC/FPC Connector	CKS5285																				
IC	2101	Display IC	OZ5271LN																																																																																																																																																								
IC	2201	IR RC REC Module	PNJ4833M		B																																																																																																																																																						
Q	2001	Bipolar TR	HN1C01FUS1																																																																																																																																																								
Q	2002	Bipolar TR	LSCR523UB																																																																																																																																																								
D	2101	Schottky Diode	RB162M-40																																																																																																																																																								
D	2102	Diode	CRG03																																																																																																																																																								
D	2201	LED	NESM026D-A21690																																																																																																																																																								
L	2101	SMD SPL Inductor	CTH1651																																																																																																																																																								
TH	2001	SMD Thermistor	ERTJ0ER104F																																																																																																																																																								
S	2201	Push Switch	CSG1155																																																																																																																																																								
S	2202	Push Switch	CSG1155																																																																																																																																																								
S	2203	Push Switch	CSG1155		C																																																																																																																																																						
S	2204	Push Switch	CSG1155																																																																																																																																																								
S	2205	Push Switch	CSG1155																																																																																																																																																								
S	2206	Push Switch	CSG1155																																																																																																																																																								
S	2207	Push Switch	CSG1155																																																																																																																																																								
S	2208	Push Switch	CSG1155																																																																																																																																																								
S	2209	Push Switch	CSG1155																																																																																																																																																								
CN	2001	FFC/FPC Connector	CKS6643																																																																																																																																																								
CN	2002	Connector	CKS4428																																																																																																																																																								
CN	2003	FFC/FPC Connector	CKS5285																																																																																																																																																								
C	8407		CKSSYX224K6R3			RESISTORS <table><tr><td>R</td><td>2001</td><td></td><td>XRS1/16SS680J</td><td></td><td></td></tr><tr><td>R</td><td>2002</td><td></td><td>XRS1/16SS820J</td><td></td><td></td></tr><tr><td>R</td><td>2004</td><td></td><td>XRS1/16SS680J</td><td></td><td></td></tr><tr><td>R</td><td>2005</td><td></td><td>XRS1/16SS680J</td><td></td><td></td></tr><tr><td>R</td><td>2007</td><td></td><td>XRS1/16SS680J</td><td></td><td></td></tr><tr><td>R</td><td>2008</td><td></td><td>XRS1/16SS680J</td><td></td><td></td></tr><tr><td>R</td><td>2010</td><td></td><td>XRS1/16SS332J</td><td></td><td></td></tr><tr><td>R</td><td>2011</td><td></td><td>XRS1/16SS272J</td><td></td><td></td></tr><tr><td>R</td><td>2012</td><td></td><td>XRS1/16SS332J</td><td></td><td></td></tr><tr><td>R</td><td>2017</td><td></td><td>XRS1/16SS183J</td><td></td><td>E</td></tr><tr><td>R</td><td>2101</td><td></td><td>RS1/4SA2R2J</td><td></td><td></td></tr><tr><td>R</td><td>2103</td><td></td><td>XRS1/16SS105J</td><td></td><td></td></tr><tr><td>R</td><td>2105</td><td></td><td>XRS1/16SS154J</td><td></td><td></td></tr><tr><td>R</td><td>2109</td><td></td><td>XRS1/16SS102J</td><td></td><td></td></tr><tr><td>R</td><td>2110</td><td></td><td>XRS1/16SS102J</td><td></td><td></td></tr><tr><td>R</td><td>2111</td><td></td><td>XRS1/16SS3302D</td><td></td><td></td></tr><tr><td>R</td><td>2112</td><td></td><td>XRS1/16SS3301D</td><td></td><td></td></tr><tr><td>R</td><td>2113</td><td></td><td>XRS1/16SS104J</td><td></td><td></td></tr><tr><td>R</td><td>2114</td><td></td><td>XRS1/16SS104J</td><td></td><td></td></tr><tr><td>R</td><td>2115</td><td></td><td>XRS1/16SS223J</td><td></td><td></td></tr><tr><td>R</td><td>2117</td><td></td><td>XRS1/16SS563J</td><td></td><td>F</td></tr><tr><td>R</td><td>2118</td><td></td><td>XRS1/16SS104J</td><td></td><td></td></tr><tr><td>R</td><td>2201</td><td></td><td>XRS1/16SS470J</td><td></td><td></td></tr><tr><td>R</td><td>2202</td><td></td><td>XRS1/16SS392J</td><td></td><td></td></tr></table>						R	2001		XRS1/16SS680J			R	2002		XRS1/16SS820J			R	2004		XRS1/16SS680J			R	2005		XRS1/16SS680J			R	2007		XRS1/16SS680J			R	2008		XRS1/16SS680J			R	2010		XRS1/16SS332J			R	2011		XRS1/16SS272J			R	2012		XRS1/16SS332J			R	2017		XRS1/16SS183J		E	R	2101		RS1/4SA2R2J			R	2103		XRS1/16SS105J			R	2105		XRS1/16SS154J			R	2109		XRS1/16SS102J			R	2110		XRS1/16SS102J			R	2111		XRS1/16SS3302D			R	2112		XRS1/16SS3301D			R	2113		XRS1/16SS104J			R	2114		XRS1/16SS104J			R	2115		XRS1/16SS223J			R	2117		XRS1/16SS563J		F	R	2118		XRS1/16SS104J			R	2201		XRS1/16SS470J			R	2202		XRS1/16SS392J		
R	2001		XRS1/16SS680J																																																																																																																																																								
R	2002		XRS1/16SS820J																																																																																																																																																								
R	2004		XRS1/16SS680J																																																																																																																																																								
R	2005		XRS1/16SS680J																																																																																																																																																								
R	2007		XRS1/16SS680J																																																																																																																																																								
R	2008		XRS1/16SS680J																																																																																																																																																								
R	2010		XRS1/16SS332J																																																																																																																																																								
R	2011		XRS1/16SS272J																																																																																																																																																								
R	2012		XRS1/16SS332J																																																																																																																																																								
R	2017		XRS1/16SS183J		E																																																																																																																																																						
R	2101		RS1/4SA2R2J																																																																																																																																																								
R	2103		XRS1/16SS105J																																																																																																																																																								
R	2105		XRS1/16SS154J																																																																																																																																																								
R	2109		XRS1/16SS102J																																																																																																																																																								
R	2110		XRS1/16SS102J																																																																																																																																																								
R	2111		XRS1/16SS3302D																																																																																																																																																								
R	2112		XRS1/16SS3301D																																																																																																																																																								
R	2113		XRS1/16SS104J																																																																																																																																																								
R	2114		XRS1/16SS104J																																																																																																																																																								
R	2115		XRS1/16SS223J																																																																																																																																																								
R	2117		XRS1/16SS563J		F																																																																																																																																																						
R	2118		XRS1/16SS104J																																																																																																																																																								
R	2201		XRS1/16SS470J																																																																																																																																																								
R	2202		XRS1/16SS392J																																																																																																																																																								
C	8408		CKSSYB102K50																																																																																																																																																								
C	8409		CKSSYB104K16																																																																																																																																																								
C	8411		CCSSCH220J50																																																																																																																																																								
C	8412		CCSSCH331J50																																																																																																																																																								
C	8415		CKSSYB104K16																																																																																																																																																								
C	8418		CCSSCH102J50																																																																																																																																																								
C	8419		CCSSCH471J50																																																																																																																																																								
C	8423		CKSSYB152K50																																																																																																																																																								
C	8427		CCSSCH100D50																																																																																																																																																								
C	9004		CKSRYX105K16																																																																																																																																																								
C	9005		CKSRYX105K16																																																																																																																																																								
C	9008		CKSRYX105K16																																																																																																																																																								
C	9009		CKSRYX105K16																																																																																																																																																								
C	9010	(D,G)	CKSRYX105K16																																																																																																																																																								
C	9011	(D,G)	CKSRYX105K16																																																																																																																																																								
C	9012		CKSRYX105K16																																																																																																																																																								
C	9013		CKSRYX105K16																																																																																																																																																								
C	9016		CKSRYX105K16																																																																																																																																																								
C	9017		CKSRYX105K16																																																																																																																																																								
C	9018		CKSYX476M10																																																																																																																																																								
C	9019		CKSYX476M10																																																																																																																																																								
C	9020		CKSSYB104K10																																																																																																																																																								
C	9021	100 uF	CCH1962																																																																																																																																																								
C	9022		CKSSYB104K10																																																																																																																																																								
C	9023		CEVW470M16																																																																																																																																																								
C	9024		CEVW470M16																																																																																																																																																								
C	9025		CKSSYB104K10																																																																																																																																																								
C	9026	10 uF	CCG1332																																																																																																																																																								
C	9027		CKSSYB104K10																																																																																																																																																								
C	9028		CKSSYX105K10																																																																																																																																																								
C	9029		CEVW470M16																																																																																																																																																								
C	9030		CKSSYB102K50																																																																																																																																																								
C	9032		CKSSYB104K10																																																																																																																																																								
C	9033		CKSSYB104K10																																																																																																																																																								
C	9034		CKSSYB472K50																																																																																																																																																								
C	9035		CKSSYB103K16																																																																																																																																																								
C	9036		CKSSYB103K16																																																																																																																																																								
C	9037		CCSSCH151J50																																																																																																																																																								
C	9038		CCSSCH151J50																																																																																																																																																								
C	9039	(D,G)	CKSSYX104K50																																																																																																																																																								
C	9201	0.68 uF	CCE1064																																																																																																																																																								
C	9202		CKSRYB684K10																																																																																																																																																								
C	9203		CKSRYB684K10																																																																																																																																																								
C	9204	0.68 uF	CCE1064																																																																																																																																																								
C	9206	10 uF/25 V	CCH2108																																																																																																																																																								
C	9207		CKSRYB474K16																																																																																																																																																								
C	9208	2.2 uF	CCG1322																																																																																																																																																								
C	9209		CEHAT332M16																																																																																																																																																								
C	9210	0.1 uF	CCG1321																																																																																																																																																								
C	9212		CKSRYX104K50																																																																																																																																																								
C	9213		CKSSYB102K50																																																																																																																																																								
C	9214		CKSSYB102K50																																																																																																																																																								
C	9215		CKSSYB102K50																																																																																																																																																								

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>		
	R 2203	XRS1/16SS472J		
	R 2204	XRS1/16SS123J		
A	R 2205	XRS1/16SS182J		
	R 2206	XRS1/16SS222J		
	R 2207	XRS1/16SS472J		

CAPACITORS

	C 2001	CKSSYB104K10
	C 2006	CKSSYB104K10
	C 2101	CKSSYB472K50
	C 2103	CEVW101M16
	C 2105	CKSYX106K35
	C 2106	CKSRYX104K50
B	C 2108	CKSYX106K35
	C 2111	CKSSYX105K16
	C 2112	CKSRYB224K16
	C 2113	CKSSYX105K16
	C 2114	CKSSYX105K10
	C 2115	CCSSCH101J50
	C 2205	CKSQYX106K10

C

Unit Number : NSP
Unit Name : Relay Unit

MISCELLANEOUS

	S 101	Spring SW (HOME)	CSN1080
	S 102	Spring SW (12 cm)	CSN1081
	VR 101	SMD Semi-fixed VR	CCP1587
	VR 102	SMD Semi-fixed VR	CCP1589
	CN 101	FFC/FPC Connector	CKS6776
	CN 102	Connector	CKS4926

RESISTORS

	R 101	RS1/10SR822J
	R 102	RS1/10SR0R0J

I

E

I

F