System Connections

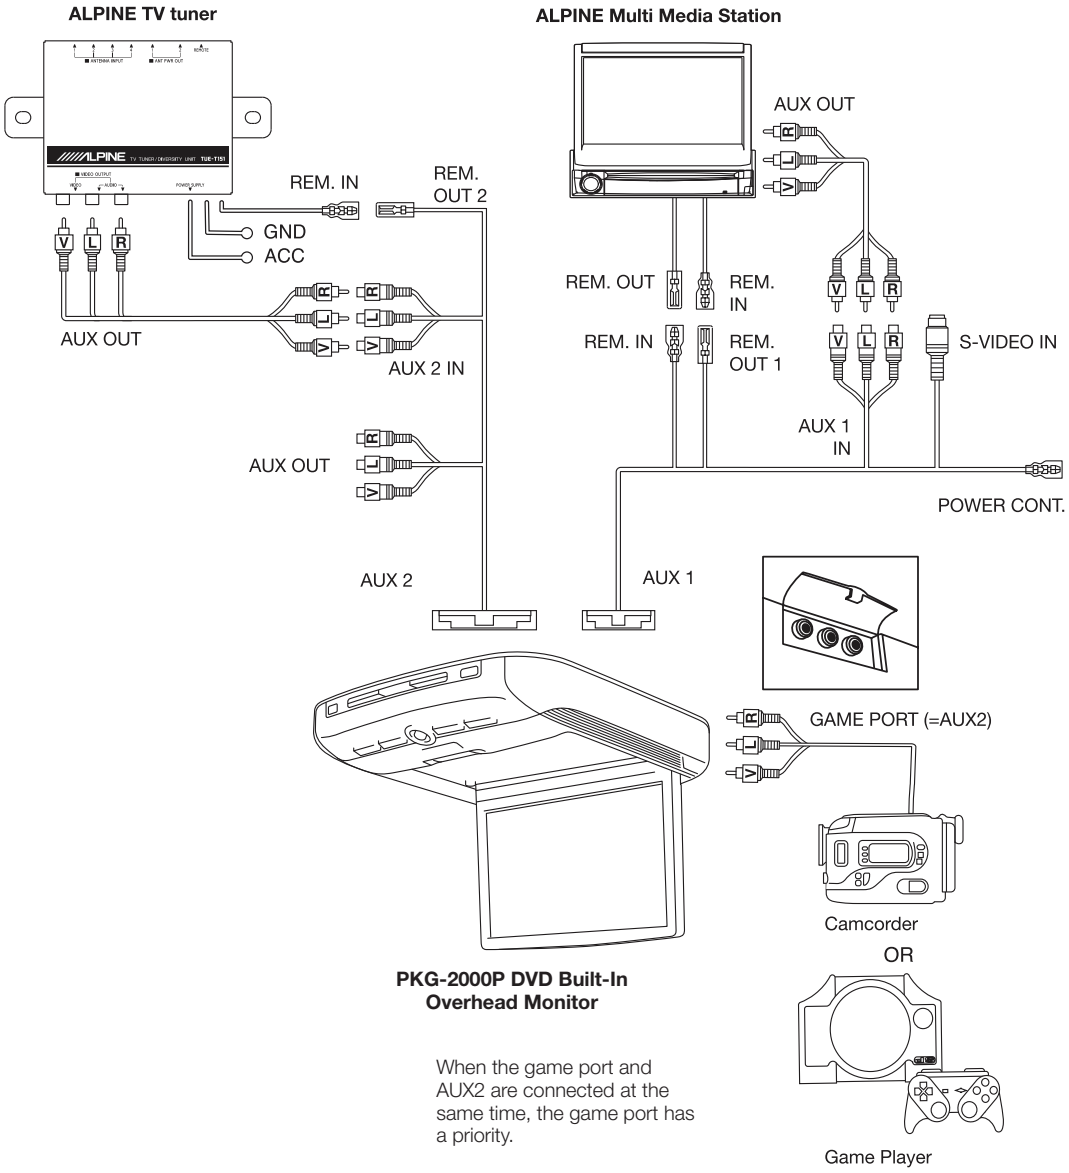

When the game port and AUX2 are connected at the same time, the game port has a priority.

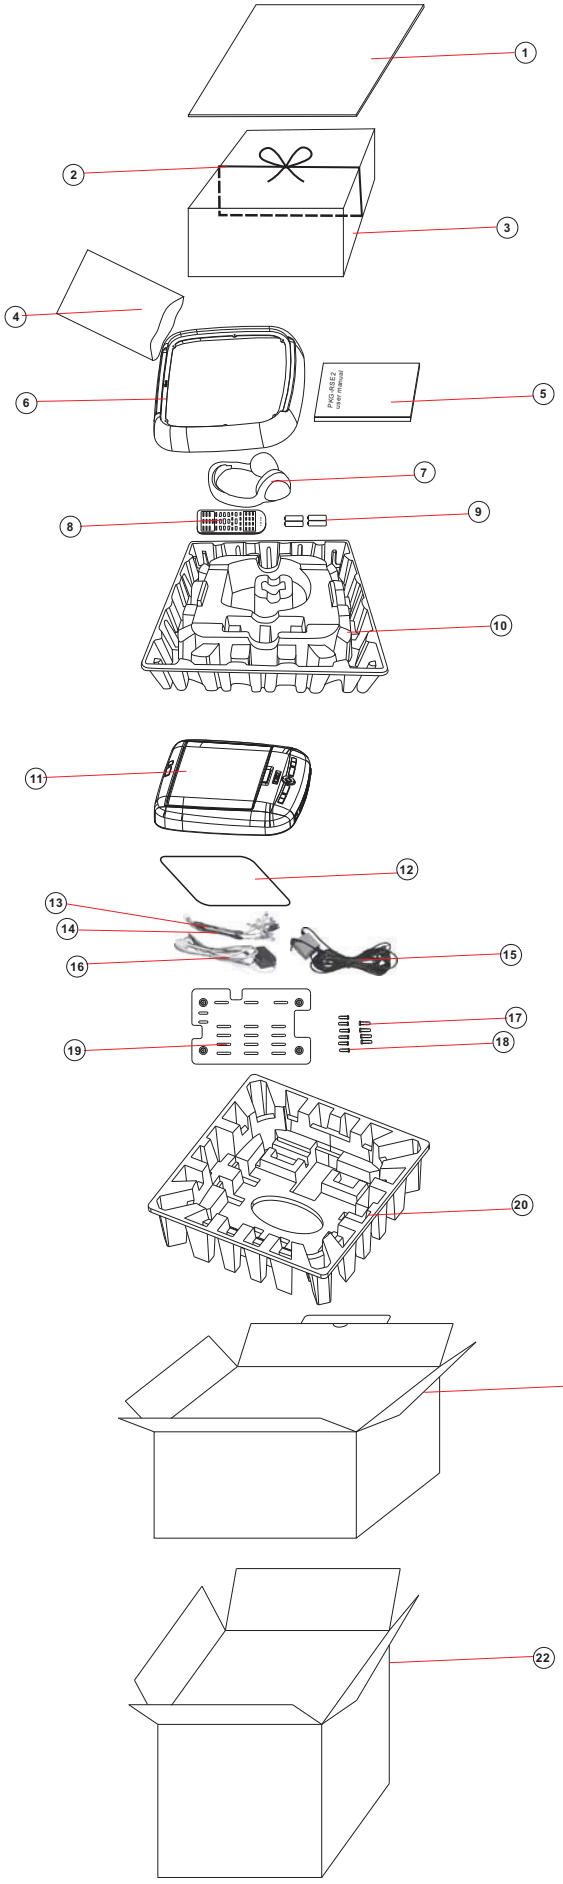

NO.	PART NUMBER	DESCRIPTION
1	BZK411408000	Protection Card Board
2	BA-50001-000	Strip
3	Ch4114082042	Gift Box with Strip
4	BZA47036525Z	PO Bag
5	LP-A001-R200	Owner's Manual
6	WK-0001-0528	Trim Ring
7		Headphone
8	33ZY-R200-00	Remote Control
9		AAA Battery
10	BZG40540585A	Egg Shelf Insert-Top
11		TMX-R2000 Main Unit
12	BZJ29329308A	Pearl Foam Sheet
13	2101-0001-11	Aux2 Cable
14	2101-0002-09	AUX1 Cable
15	2100-0006-02 2100-0019-01	FM cable to OHM FM cable to car
16	2105-0014-04	Power Cable
17	LS1BM0400801	CM 4x8 Screw
18	LS1CB0300801	TB 3x8 Screw
19	GD-100200801	Mounting Metal Plate
20	BZG405405111	Egg Shelf Insert-Bottom
21	Ch4114082042	Gift Box
22	Wx4224184292	Master Carton

TMX-R2000 Explodded of Cabinet Drawing

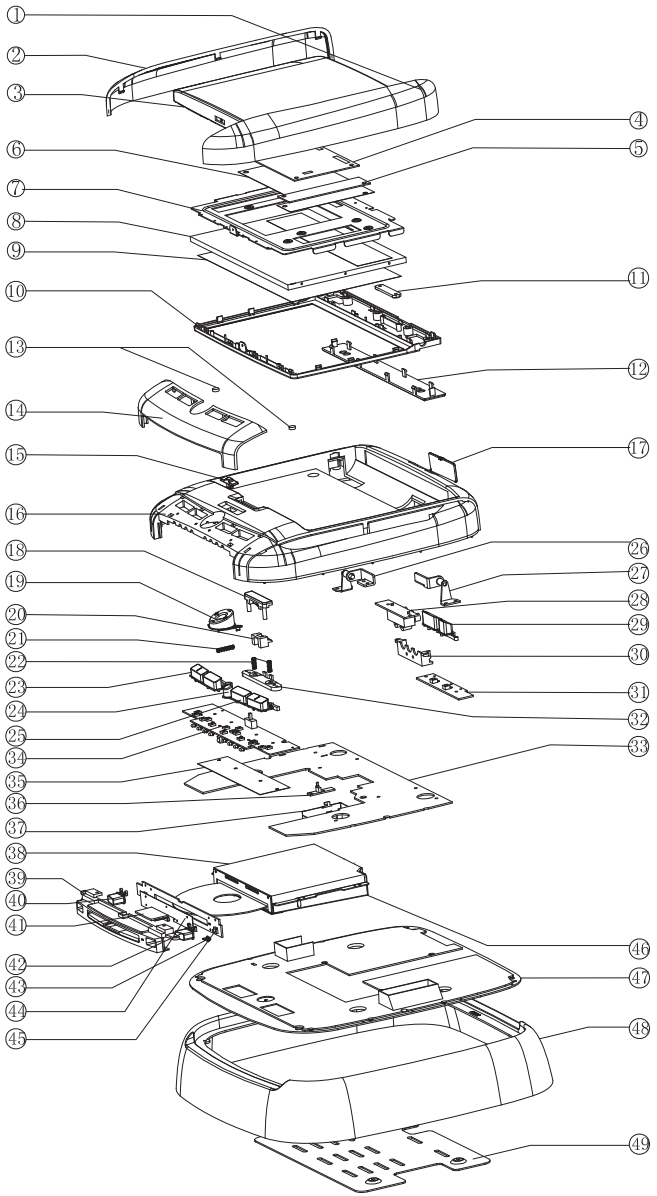

No.	Part Number	Description
①	CP-C00021802	Lamp Lens-R
②	CP-C00011802	Lamp Lens-L
③	MB-0088-0000	TFT B-Cab.
④	88TF-R200-03	TFT Driver PCB
⑤	88IN-R200-01	Inverver
⑥	JY110417203X	Ins.Plate1
⑦	ZA-G00010801	TFT Panel Chassis
⑧	02A1-A102-01	TFT
⑨	FH-C00050000	Protect Film
⑩	ZG-0001-4008	TFT F-Cabinet
⑪	BA-40028-000	FPC Clip
⑫	GD-600011800	TFT F-Lens
⑬	JD-D00050115	Spong Pad
⑭	CP-B00071803	IR Lens
⑮	AJ-A00014002	Lamp Switch
⑯	DG-0038-0000	Base
⑰	GD-400014002	RCA Jack Cover
⑱	AJ-A00014008	Open Knob
⑲	AJ-A00011802	Button2
⑳	KG-100030200	Latch
㉑	TH-200024-21	Spring2
㉒	TH-200023-21	Spring1
㉓	AJ-A00141811	Button4
㉔	AJ-A00121811	Button1
㉕	AJ-A00131811	Button3
㉖	ZJ-0050-0000	Hinge-L
㉗	ZJ-0051-0000	Hinge-R
㉘	88AU-R200-03	RCA Jack PCB
㉙	AJ-A00013711	Button5

No.	Part No.	Description
㉚	GD-400014002	RCA Jack Chassis
㉛	77PK-R200-03	F-Passenger Key PCB
㉜	GD-400030200	Latch Chassis
㉝	88MA-R200-03	Main PCB
㉞	88FK-R200-03	Key PCB
㉟	JY315037A03X	Shield Plate
㊱	77SW-R102-01	BackLight SW
㊲	GD-300370100	FM Shield Plate
㊳	25VD-0001-08	DVD Mechanism
㊴	ZA-A00014008	Slot Cabinet
㊵	AJ-A00023711	Button6
㊶	CP-D00031400	Indicator Lens
㊷	AJ-A00033711	Button7
㊸	ZA-A00020000	Disc In Lens
㊹	PL-C0015-150	Slot Silk Cloth
㊺	77EK-R200-03	PWR/Eject PCB
㊻	ZA-G00020801	DVD Chassis
㊼	XG-0001-4002	Back Cover
㊽	WK-0001-0528	Trim Ring
㊾	GD-100200801	Bracket

Exploded Drawing 1-2

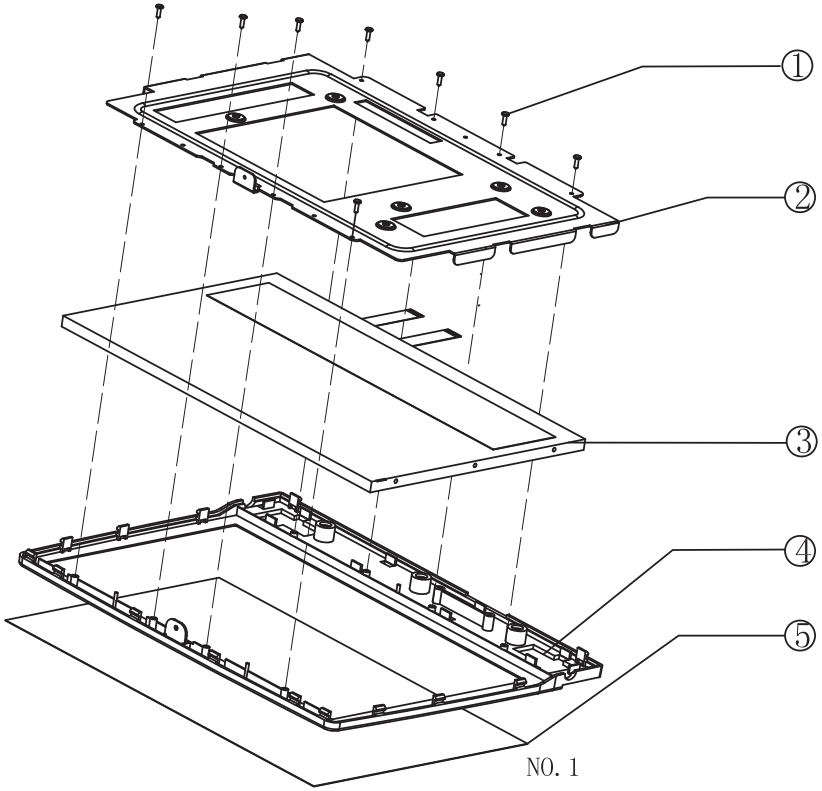

NO. 1

No.	Part No.	Description
①	LS1AA0170603	Screw PA1.7*6
②	ZA-G00010801	TFT Panel chassis
③	02A1-A102-01	TFT
④	ZG-0001-4008	TFT F-Cabinet
⑤	FH-C00050000	Protect Film

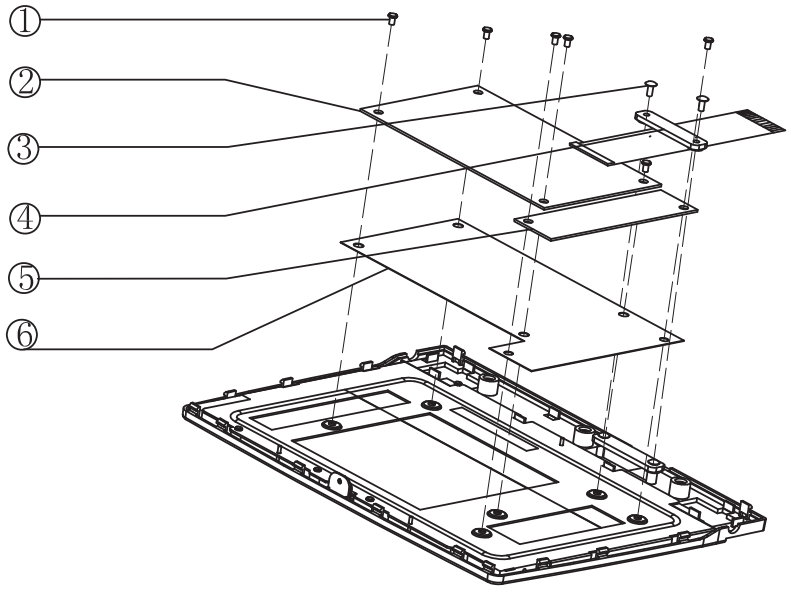

NO. 2

No.	Part No.	Description
①	LS1AM0260403	Screw PM2.6*4
②	88TF-R200-03	TFT Driver PCB
③	LS1CB0260603	Screw TB2.6*6
④	BA-40028-000	FPC Clip
⑤	88IN-R200-01	Inverter
⑥	JY110417203X	Ins.Platel

Exploded Drawing 3-6

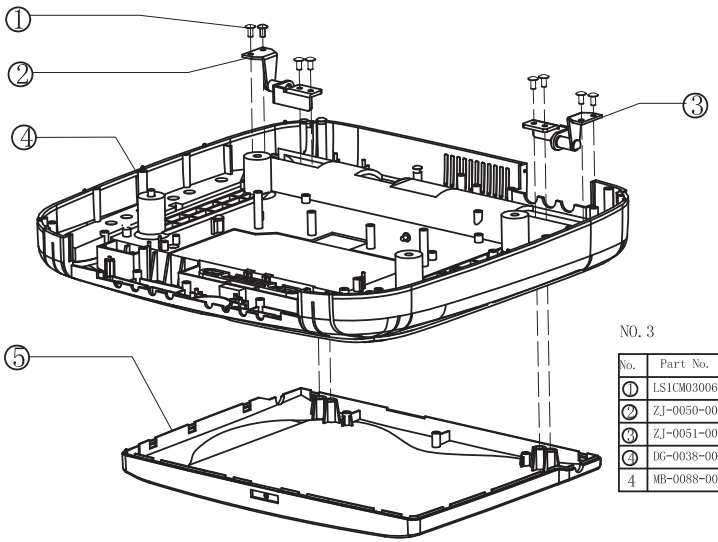

NO. 3

No.	Part No.	Description
①	LS1CM0300603	Screw TM3*6
②	ZJ-0050-0000	Hinge-L
③	ZJ-0051-0000	Hinge-R
④	DG-0038-0000	Base
4	MB-0088-0000	TFT B-Cab.

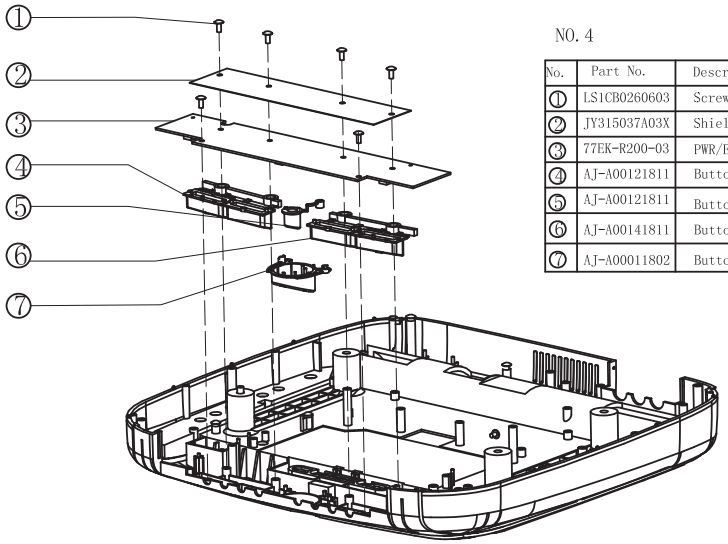

NO. 4

No.	Part No.	Description
①	LS1CB0260603	Screw TB2.6*6
②	JY315037A03X	Shield Plate
③	77EK-R200-03	PWR/Eject PCB
④	AJ-A00121811	Button3
⑤	AJ-A00121811	Button1
⑥	AJ-A00141811	Button4
⑦	AJ-A00011802	Button2

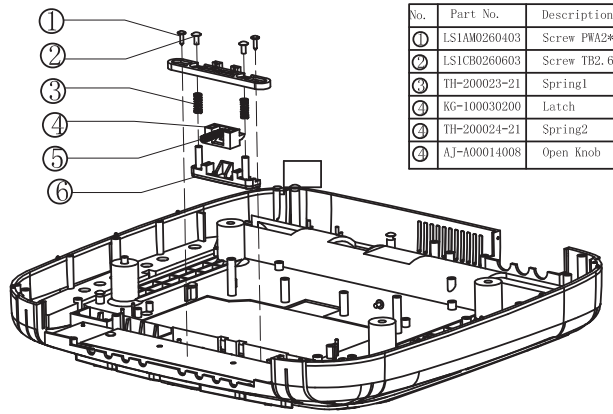

NO. 5

No.	Part No.	Description
①	LS1AM0260403	Screw PWA2*8
②	LS1CB0260603	Screw TB2.6*6
③	TH-200023-21	Spring1
④	KG-100030200	Latch
④	TH-200024-21	Spring2
④	AJ-A00014008	Open Knob

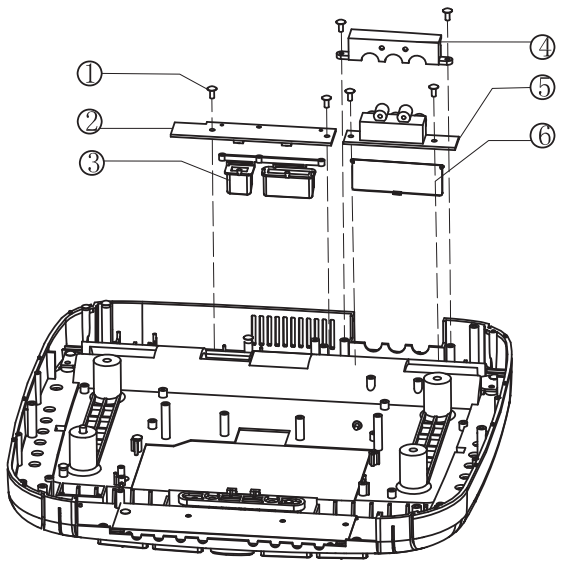

NO. 6

No.	Part No.	Description
①	LS1CB0260603	Screw TB2.6*6
②	77PK-R200-03	F-Passenger Key PCB
③	AJ-A00013711	Button5
④	GD-400014002	RCA Jack Chassis
⑤	GD-500014002	RCA Jack PCB
⑥	GD-500014002	RCA Jack Cover

Exploded Drawing 7-9

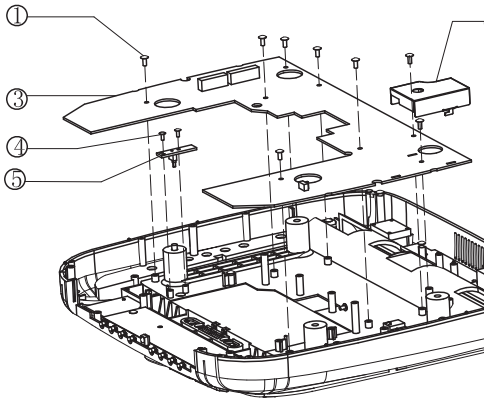

NO. 7

No.	Part No.	Description
①	LS1CB0260603	Screw TB2.6*6
②	GD-300370100	FM Shield Plate
③	88MA-R200-03	Main PCB
④	LS1CB0200501	Screw TB2*5
⑤	77SW-R102-01	BackLight SW

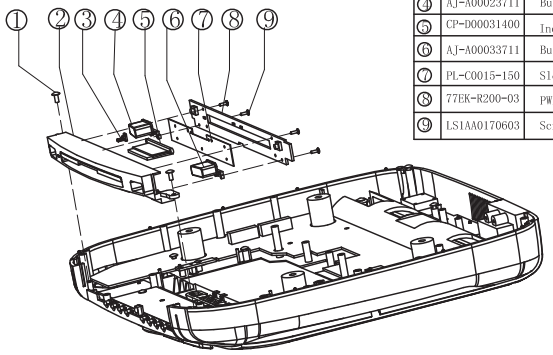

NO. 8

No.	Part No.	Description
①	LS1CB0260603	Screw TB2.6*6
②	ZA-A00014008	Slot Cabinet
③	ZA-A00020000	Disc In Lens
④	AJ-A00023711	Button6
⑤	CP-D00031400	Indicator Lens
⑥	AJ-A00033711	Button7
⑦	PL-C0015-150	Slot Silk Cloth
⑧	77EK-R200-03	PWR/Eject PCB
⑨	LS1AA0170603	Screw PA1.7*6

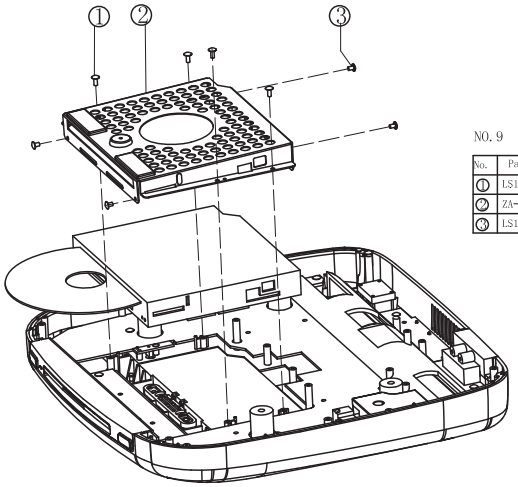

NO. 9

No.	Part No.	Description
①	LS1CB0260603	Screw TB2.6*6
②	ZA-G00020801	DVD Chassis
③	LS1CM0260403	Screw TM2.6*4

Exploded Drawing10-12

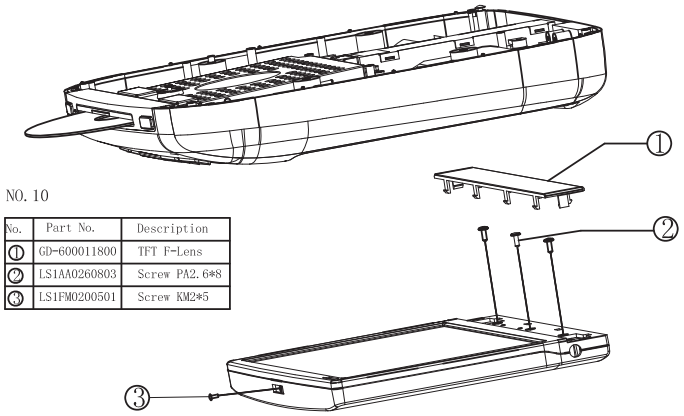

NO. 10

No.	Part No.	Description
①	GD-600011800	TFT F-Lens
②	LS1AA0260803	Screw PA2.6*8
③	LS1FM0200501	Screw KM2*5

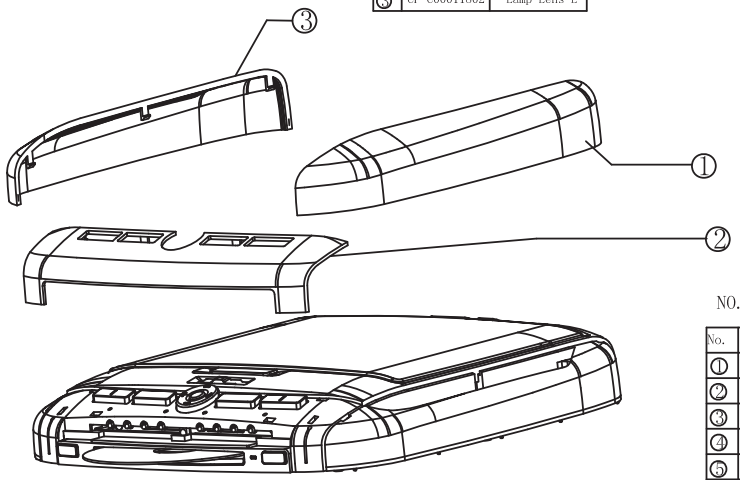

NO. 11

No.	Part No.	Description
①	CP-C00021802	Lamp Lens-R
②	CP-B00071803	IR Lens
③	CP-C00011802	Lamp Lens-L

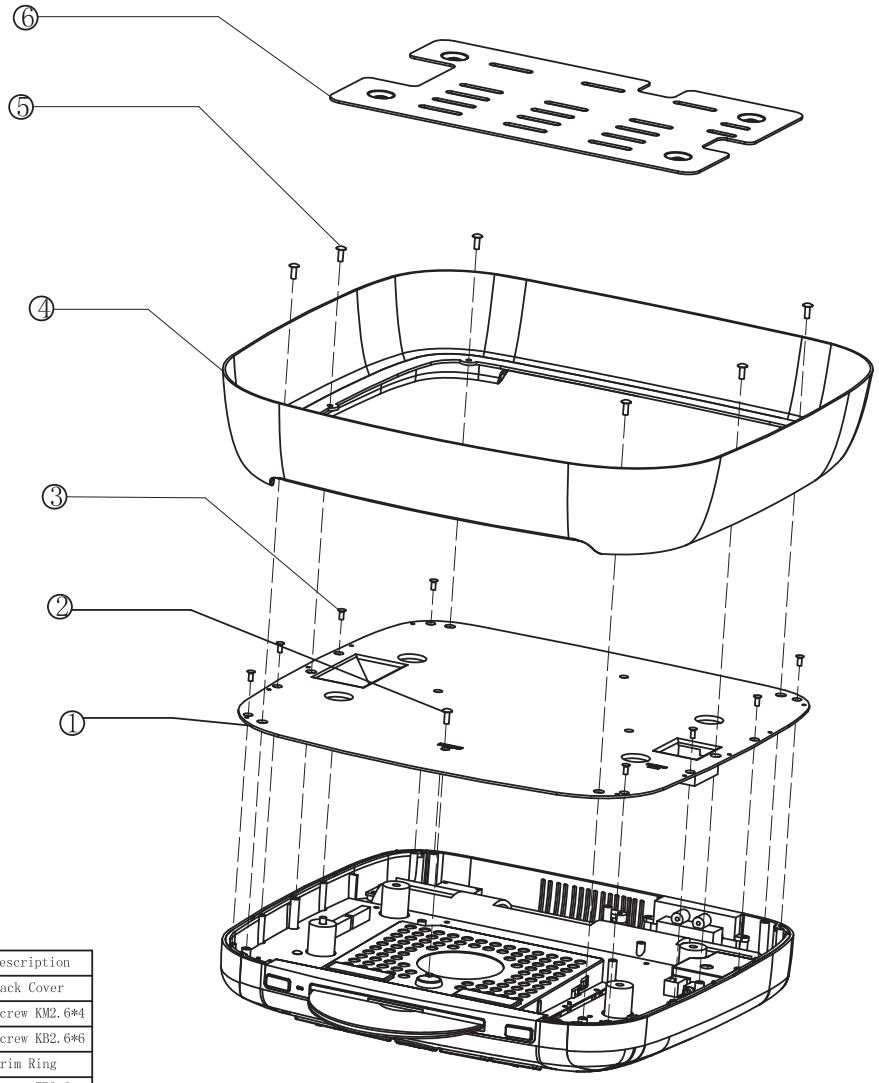

NO. 12

No.	Part No.	Description
①	XG-0001-4002	Back Cover
②	LS1FM0260401	Screw KM2.6*4
③	LS1FB0260601	Screw KB2.6*6
④	WK-0001-0528	Trim Ring
⑤	LS1CB0300803	Screw TB3*8
⑥	GD-100200801	Bracket

Electronic Parts List -MainBoard		
Parts Number	Description	Location
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C1
06S314706000	SMD 47pF/50V 0603 NPO ±5%	C3
06S314706000	SMD 47pF/50V 0603 NPO ±6%	C5
06S314706000	SMD 47pF/50V 0603 NPO ±7%	C6
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C7
06S311216000	SMD 120pF/50V 0603 NPO ±5%	C8
06S113326000	SMD 3300pF/50V 0603 X7R ±10%	C9
06S312706000	SMD 27pF/50V 0603 NPO ±5%	C10
06S312706000	SMD 27pF/50V 0603 NPO ±5%	C11
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C13
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C14
06S311206000	SMD 12pF/50V 0603 NPO ±5%	C15
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C16
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C17
06S313306000	SMD 33pF/50V 0603 NPO ±5%	C18
06S318206000	SMD 82pF/50V 0603 NPO ±5%	C19
06S312706000	SMD 27pF/50V 0603 NPO ±5%	C20
06S113326000	SMD 3300pF/50V 0603 X7R ±10%	C22
06S311216000	SMD 120pF/50V 0603 NPO ±5%	C23
06S313316000	SMD 330pF/50V 0603 NPO ±5%	C24
06S114736000	SMD 0.047uF/50V 0603 X7R ±10%	C25
06S111026000	SMD 1nF/50V 0603 X7R ±10%	C26
06S312226000	SMD 2200pF/50V 0603 NPO ±5%	C27
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C28
06S314716000	SMD 470pF/50V 0603 NPO ±5%	C29
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C30
06S113326000	SMD 3300pF/50V 0603 X7R ±10%	C31
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C32
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C33
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C34
06S314716000	SMD 470pF/50V 0603 NPO ±5%	C35
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C36
06S113326000	SMD 3300pF/50V 0603 X7R ±10%	C37
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C38
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C39
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C40
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C41
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C42
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C43
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C45
06S314706000	SMD 47pF/50V 0603 NPO ±8%	C46
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C48
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C53
06S314706000	SMD 47pF/50V 0603 NPO ±9%	C54
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C55
06S314706000	SMD 47pF/50V 0603 NPO ±10%	C56
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C57
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C58
06S314706000	SMD 47pF/50V 0603 NPO ±11%	C59
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C60
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C61
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C62
06S314706000	SMD 47pF/50V 0603 NPO ±12%	C63
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C64
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C65
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C66

Electronic Parts List -MainBoard		
Parts Number	Description	Location
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C67
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C68
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C70
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C71
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C72
06S312206000	SMD 22pF/50V 0603 NPO ±5%	C73
06S312206000	SMD 22pF/50V 0603 NPO ±5%	C74
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C75
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C76
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C77
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C78
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C79
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C80
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C81
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C82
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C83
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C84
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C85
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C86
06S313306000	SMD 33pF/50V 0603 NPO ±5%	C87
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C88
06S114736000	SMD 0.047uF/50V 0603 X7R ±10%	C89
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C94
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C95
06S111026000	SMD 1nF/50V 0603 X7R ±10%	C96
06S114736000	SMD 0.047uF/50V 0603 X7R ±10%	C99
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C100
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C103
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C104
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C105
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C106
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C107
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C108
06S318216000	SMD 820pF/50V 0603 NPO ±5%	C109
06S113326000	SMD 3300pF/50V 0603 X7R ±10%	C110
06S318216000	SMD 820pF/50V 0603 NPO ±5%	C111
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C112
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C113
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C114
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C115
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C116
06S318216000	SMD 820pF/50V 0603 NPO ±5%	C117
06S318216000	SMD 820pF/50V 0603 NPO ±5%	C118
06S311516000	SMD 150pF/50V 0603 NPO ±5%	C119
06S311516000	SMD 150pF/50V 0603 NPO ±5%	C120
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C121
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C122
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C124
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C125
06S111226002	SMD 1.2nF/50V 0603 X7R ±10%	C126
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C127
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C128
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C129
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C132
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C133
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C134

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C135	0701-1333-02	SMD 33KΩ 1/10W ±5% 0603	R24
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C136	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R25
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C137	0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R26
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C138	0701-1242-02	SMD 2.4KΩ 1/10W ±5% 0603	R27
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C141	0701-1150-02	SMD 15Ω 1/10W ±5% 0603	R31
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C142	0701-1333-02	SMD 33KΩ 1/10W ±5% 0603	R32
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C143	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R33
06S314706000	SMD 47pF/50V 0603 NPO ±13%	C144	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R34
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C145	0701-1203-02	SMD 20KΩ 1/10W ±5% 0603	R35
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C146	0701-1682-02	SMD 6.8KΩ 1/10W ±5% 0603	R36
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C147	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R37
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C148	0701-1332-02	SMD 3.3KΩ 1/10W ±5% 0603	R38
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C149	0701-1332-02	SMD 3.3KΩ 1/10W ±5% 0603	R39
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C150	0701-1562-02	SMD 5.6KΩ 1/10W ±5% 0603	R40
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C151	0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R41
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C152	0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R42
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C153	0701-1204-02	SMD 200KΩ 1/10W ±5% 0603	R43
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C154	0701-1912-02	SMD 9.1KΩ 1/10W ±5% 0603	R47
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C155	0701-1152-02	SMD 1.5KΩ 1/10W ±5% 0603	R48
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C156	0701-1564-02	SMD 560KΩ 1/10W ±5% 0603	R49
06S314706000	SMD 47pF/50V 0603 NPO ±14%	C157	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	R50
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	BC1	0701-1912-02	SMD 9.1KΩ 1/10W ±5% 0603	R51
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	EC6	0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R52
06S111054000	SMD 1uF/25V 0603 X5R ±10%	EC11	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	R53
06S111054000	SMD 1uF/25V 0603 X5R ±10%	EC12	0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R54
06S111054000	SMD 1uF/25V 0603 X5R ±10%	EC22	0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R55
06S111054000	SMD 1uF/25V 0603 X5R ±10%	EC23	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	R56
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	EC33	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	R57
06S111054000	SMD 1uF/25V 0603 X5R ±10%	EC83	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R59
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R1	0701-1100-02	SMD 10Ω 1/10W ±5% 0603	R60
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R2	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R62
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R3	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R63
0701-1681-02	SMD 680Ω 1/10W ±5% 0603	R4	0701-1912-02	SMD 9.1KΩ 1/10W ±5% 0603	R65
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R5	0701-1152-02	SMD 1.5KΩ 1/10W ±5% 0603	R66
0701-3101-02	SMD 100Ω 1/4W ±5% 1206	R6	0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R67
0701-3101-02	SMD 100Ω 1/4W ±5% 1206	R7	0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R68
0701-3101-02	SMD 100Ω 1/4W ±5% 1206	R8	0701-1912-02	SMD 9.1KΩ 1/10W ±5% 0603	R69
0701-1473-02	SMD 47KΩ 1/10W ±5% 0603	R9	0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R70
0701-1202-03	SMD 2KΩ 1/10W ±1% 0603	R10	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R71
0701-1331-03	SMD 330Ω 1/10W ±1% 0603	R11	0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R72
0701-1473-02	SMD 47KΩ 1/10W ±5% 0603	R12	0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R73
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R13	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R74
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R14	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R75
0701-1472-03	SMD 4.7KΩ 1/10W ±1% 0603	R15	0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R76
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R16	0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R77
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R17	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R78
0701-1474-02	SMD 470KΩ 1/10W ±5% 0603	R18	0701-1272-02	SMD 2.7KΩ 1/10W ±5% 0603	R79
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R19	0701-1272-02	SMD 2.7KΩ 1/10W ±5% 0603	R80
0701-1512-02	SMD 5.1KΩ 1/10W ±5% 0603	R20	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R81
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R21	0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R83
0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R22	0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R84
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R23	0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R85

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R87	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R149
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R88	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R150
0701-1223-02	SMD 22KΩ 1/10W ±5% 0603	R89	0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R151
0701-1223-02	SMD 22KΩ 1/10W ±5% 0603	R90	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R152
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R91	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R153
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R94	0701-1203-02	SMD 20KΩ 1/10W ±5% 0603	R154
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R95	0701-1302-02	SMD 3KΩ 1/10W ±5% 0603	R155
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R96	0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R156
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R97	0701-1182-02	SMD 1.8KΩ 1/10W ±5% 0603	R157
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R98	0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R158
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R99	07011487XK03	SMD 4.87KΩ 1/10W ±1% 0603	R159
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R100	0701-1102-03	SMD 1KΩ 1/10W ±1% 0603	R160
0701-1473-02	SMD 47KΩ 1/10W ±5% 0603	R101	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R161
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R102	0701-1682-03	SMD 6.8KΩ 1/10W ±1% 0603	R162
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R103	0701-1332-03	SMD 3.3KΩ 1/10W ±1% 0603	R163
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R104	0701-1470-02	SMD 47Ω 1/10W ±5% 0603	R164
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R105	0701-1470-02	SMD 47Ω 1/10W ±5% 0603	R165
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R106	0701-1333-02	SMD 33KΩ 1/10W ±5% 0603	R166
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R107	0701-1152-02	SMD 1.5KΩ 1/10W ±5% 0603	R167
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R108	0701-1392-02	SMD 3.9KΩ 1/10W ±5% 0603	R168
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R109	0701-1392-02	SMD 3.9KΩ 1/10W ±5% 0603	R169
0701-1100-02	SMD 10Ω 1/10W ±5% 0603	R110	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R170
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R111	0701-1333-02	SMD 33KΩ 1/10W ±5% 0603	R171
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R112	0701-1474-02	SMD 470KΩ 1/10W ±5% 0603	R172
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R113	0701-1474-02	SMD 470KΩ 1/10W ±5% 0603	R173
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R114	0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R174
0701-1100-02	SMD 10Ω 1/10W ±5% 0603	R115	0701-1683-02	SMD 68KΩ 1/10W ±5% 0603	R175
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R116	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R176
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R117	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R177
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R118	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R178
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R121	0701-1152-02	SMD 1.5KΩ 1/10W ±5% 0603	R179
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R122	0701-1470-02	SMD 47Ω 1/10W ±5% 0603	R180
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R124	0701-3331-02	SMD 330Ω 1/4W ±5% 1206	R181
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R125	0701-3331-02	SMD 330Ω 1/4W ±5% 1206	R182
0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R126	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R183
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R127	0701-3331-02	SMD 330Ω 1/4W ±5% 1206	R184
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R128	0701-3331-02	SMD 330Ω 1/4W ±5% 1206	R185
1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	R129	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R186
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R130	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R187
0701-1153-02	SMD 15KΩ 1/10W ±5% 0603	R131	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R188
0701-1153-02	SMD 15KΩ 1/10W ±5% 0603	R132	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R189
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R135	0701-1512-02	SMD 5.1KΩ 1/10W ±5% 0603	R190
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R136	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R191
0701-1223-02	SMD 22KΩ 1/10W ±5% 0603	R137	0701-1512-02	SMD 5.1KΩ 1/10W ±5% 0603	R192
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R138	0701-1100-02	SMD 10Ω 1/10W ±5% 0603	R194
0701-1681-02	SMD 680Ω 1/10W ±5% 0603	R139	0701-1750-02	SMD 75Ω 1/10W ±5% 0603	R196
0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R141	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R197
1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	R142	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R198
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R143	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R199
0701-1680-02	SMD 68Ω 1/10W ±5% 0603	R144	0701-1470-02	SMD 47Ω 1/10W ±5% 0603	R200
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R145	0701-1333-02	SMD 33KΩ 1/10W ±5% 0603	R201
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R146	0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R202
0701-1470-02	SMD 47Ω 1/10W ±5% 0603	R147	0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R204
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R148	0701-1223-02	SMD 22KΩ 1/10W ±5% 0603	R205

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R206	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC25
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R207	06N211073101	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC26
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R208	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC27
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R209	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC28
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R210	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC29
0701-1240-02	SMD 24Ω 1/10W ±5% 0603	R211	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC30
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R212	06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC31
1202-1031-01	SMD TC0320 10KΩ	VR1	06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC32
1202-1031-01	SMD TC0320 10KΩ	VR2	06N211073102	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC34
06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC1	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC35
06N211074100	DIP 100uF/25V ±20% 6.3*11/2.5 105℃ NICHICON	EC2	06N211073103	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC36
06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC3	06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC37
06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC4	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC38
06N214774100	DIP 470uF/25V ±20% 10*12.5/2.5 105℃ NICHICON	EC5	06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC39
06N212271100	DIP 220UF/6.3V ±20% 5*11/2.0 105℃ NICHICON	EC7	06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC40
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC8	06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC41
06N212271100	DIP 220UF/6.3V ±20% 5*11/2.0 105℃ NICHICON	EC9	06N214774100	DIP 470uF/25V ±20% 10*12.5/2.5 105℃ NICHICON	EC42
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC10	06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC43
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC13	06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC45
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC14	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC46
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC15	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC47
06N213363100	DIP 33uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC16	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC49
06N213363100	DIP 33uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC17	06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC50
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC18	06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC55
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC19	06N214774100	DIP 470uF/25V ±20% 10*12.5/2.5 105℃ NICHICON	EC56
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC20	06N212273100	DIP 220uF/16V ±20% 6.3*11/2.5 105℃ NICHICON	EC57
06N211073100	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC21	06N212273100	DIP 220uF/16V ±20% 6.3*11/2.5 105℃ NICHICON	EC58
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC24	06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC59

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC60	04ZL-5822-06	DIP 1N5822 DO-201AD	D1
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC61	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D2
06N211063100	DIP 10uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC62	04ZL-4001-03	DIP 1N4001 DO-41	D3
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC64	04ZL-4001-03	DIP 1N4001 DO-41	D4
06N214774100	DIP 470uF/25V ±20% 10*12.5/2.5 105℃ NICHICON	EC66	04ZL-4001-03	DIP 1N4001 DO-41	D5
06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC67	04WY-33AV201	SMD 3.3V DO-213AA 1/2W	D6
06N212273100	DIP 220uF/16V ±20% 6.3*11/2.5 105℃ NICHICON	EC68	04XT-SK34-02	SMD SK34 DO-214AC	D8
06N214774100	DIP 470uF/25V ±20% 10*12.5/2.5 105℃ NICHICON	EC69	04XT-SK34-02	SMD SK34 DO-214AC	D9
06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC70	04BR-1471-05	SMD KV1471E URD	D10
06N212273100	DIP 220uF/16V ±20% 6.3*11/2.5 105℃ NICHICON	EC71	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D13
06N214774100	DIP 470uF/25V ±20% 10*12.5/2.5 105℃ NICHICON	EC72	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D14
06N214772100	DIP 470uF/10V ±20% 6.3*11/2.5 105℃ NICHICON	EC73	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D15
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC74	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D16
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC75	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D17
06N211073104	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC76	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D18
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC77	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D19
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC78	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D20
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC79	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D21
06N211073105	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC80	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D22
06N212273100	DIP 220uF/16V ±20% 6.3*11/2.5 105℃ NICHICON	EC81	04PT-4148-01	SMD 1N4148 DO-213AA	D24
06N214763100	DIP 47uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC82	04XT-SK34-02	SMD SK34 DO-214AC	D27
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC84	04XT-SK34-02	SMD SK34 DO-214AC	D28
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC86	04XT-SK34-02	SMD SK34 DO-214AC	D29
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC87	04PT-4148-01	SMD 1N4148 DO-213AA	D30
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC88	04PT-4148-01	SMD 1N4148 DO-213AA	D31
06N211073106	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC89	04PT-4148-01	SMD 1N4148 DO-213AA	D32
06N212263100	DIP 22uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC90	04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D33
06N212282100	DIP 2200uF/10V ±20% 10*20 105℃ NICHICON	EC91	04PT-4148-01	SMD 1N4148 DO-213AA	D34

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
04PT-4148-01	SMD 1N4148 DO-213AA	D35	01AN-1718-22	SMD AP1117E18L SOT-223 ANACHIP	U6
04PT-4148-01	SMD 1N4148 DO-213AA	D36	01RH-1415-08	SMD BH1415F SOP-22	U7
04PT-4148-01	SMD 1N4148 DO-213AA	D37	01CS-4340-09	SMD CS4340 SO-16	U8
04PT-4148-01	SMD 1N4148 DO-213AA	D38	01AP-2308-08	SMD APA2308KI SOP8	U9
04PT-4148-01	SMD 1N4148 DO-213AA	D39	01TS-S850-00	SMD TPS850 TOSHIBA	U10
04PT-4148-01	SMD 1N4148 DO-213AA	D40	01PH-4052-08	SMD HEF4052B SOP-16	U12
04PT-4148-01	SMD 1N4148 DO-213AA	D41	01RH-3121-08	SMD BA3121F SOP-8	U13
04PT-4148-01	SMD 1N4148 DO-213AA	D42	01RH-3121-08	SMD BA3121F SOP-8	U14
04PT-4148-01	SMD 1N4148 DO-213AA	D43	01FA-6143-08	SMD FMS6143 SOP8	U16
04PT-4148-01	SMD 1N4148 DO-213AA	D44	01RH-7664-10	SMD BA7664FV SSOP-B8	U17
2005-0005-00	&5mm LED (WHITE)	DL0	01SS-8051-11	SMD C8051F045 QFP64	U18
2005-0005-00	&5mm LED (WHITE)	DL1	01AT-2402-08	SMD AT24C02N SOP-8	U19
2005-0005-00	&5mm LED (WHITE)	DL3	01AW-AP15-16	AP1506-ADJ TO-263-5	U20
2005-0005-00	&5mm LED (WHITE)	DL4	01RH-BA33-08	SMD BA3308F SOP14	U21
2005-0005-00	&5mm LED (WHITE)	DL5	01TI-4069-08	SMD CD4069 SOP-14 TI	U22
2005-0005-00	&5mm LED (WHITE)	DL6	01JR-2234-12	SMD NJM2234M DMP8	U23
2005-0005-00	&5mm LED (WHITE)	DL7	01JR-2234-12	SMD NJM2234M DMP8	U24
2005-0005-00	&5mm LED (WHITE)	DL8	1004-2010-08	SMD 200Ω 0805	EMI1
2005-0005-00	&5mm LED (WHITE)	DL9	1004-2010-08	SMD 200Ω 0805	EMI2
2005-0005-00	&5mm LED (WHITE)	DL10	1004-2010-08	SMD 200Ω 0805	EMI3
2005-0005-00	&5mm LED (WHITE)	DL11	1004-2010-08	SMD 200Ω 0805	EMI4
2005-0005-00	&5mm LED (WHITE)	DL12	1004-2010-08	SMD 200Ω 0805	EMI5
03T1-9024-06	SMD IRFR9024 TO-252	Q1	1004-2010-08	SMD 200Ω 0805	EMI6
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q2	1004-2010-08	SMD 200Ω 0805	EMI7
03C1-2301-04	SMD APM2301AAC SOT-23 P-MOS FET	Q3	1004-2010-08	SMD 200Ω 0805	EMI8
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q4	1004-2010-08	SMD 200Ω 0805	EMI9
03N1-2142-04	SMD 2SD2142K NPN SOT-23	Q5	1001-1511-07	SMD 150uH/0.8A CD73	L1
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q6	1001-1511-07	SMD 150uH/0.8A CD73	L2
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q8	1001-2220-10	2.2mH/1.2A	L3
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q9	1001-1511-07	SMD 150uH/0.8A CD73	L4
03P1-3906-04	SMD 2N3906 PNP SOT-23	Q10	1004-2010-08	SMD 200Ω 0805	L5
03N1-2412-04	SMD 2SC2412K NPN SOT-23	Q11	1001-1010-07	SMD 100UH/0.2A CD73	L6
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q12	0901-S5LN-01	SMD FM OSC Coil Sumida CS-5LN	L7
03N1-2412-04	SMD 2SC2412K NPN SOT-23	Q14	1004-2010-08	SMD 200Ω 0805	L8
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q17	1004-2010-08	SMD 200Ω 0805	L9
03C1-2301-04	SMD APM2301AAC SOT-23 P-MOS FET	Q19	1004-2010-08	SMD 200Ω 0805	L10
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q20	1004-2010-08	SMD 200Ω 0805	L11
03P1-3906-04	SMD 2N3906 PNP SOT-23	Q21	1001-1511-07	SMD 150uH/0.8A CD73	L12
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q22	1001-4700-07	SMD 47UH/0.5A CD73	L13
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q23	1004-2010-08	SMD 200Ω 0805	L14
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q24	1004-2010-08	SMD 200Ω 0805	L15
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q25	1004-2010-08	SMD 200Ω 0805	L16
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q27	1001-8000-10	SMD 80UH/1A CDH104R	L17
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q28	1001-1511-07	SMD 150uH/0.8A CD73	L18
03P1-3906-04	SMD 2N3906 PNP SOT-23	Q30	1001-1511-07	SMD 150uH/0.8A CD73	L19
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q31	1004-2010-08	SMD 200Ω 0805	L20
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q32	1004-2010-08	SMD 200Ω 0805	L21
03N1-3904-04	SMD 2N3904 NPN SOT-23	Q33	1004-2010-08	SMD 200Ω 0805	L22
03P1-3906-04	SMD 2N3906 PNP SOT-23	Q34	1004-2010-08	SMD 200Ω 0805	L23
03P1-3906-04	SMD 2N3906 PNP SOT-23	Q35	1004-2010-08	SMD 200Ω 0805	L24
03P1-3906-04	SMD 2N3906 PNP SOT-23	Q36	1004-2010-08	SMD 200Ω 0805	L25
01AW-1520-08	SMD AP1520 SOP-8 AWACHIP	U1	1001-1511-07	SMD 150uH/0.8A CD73	L26
01AN-1733-22	SMD AP1117E33L SOT-223 ANACHIP	U2	1004-2010-08	SMD 200Ω 0805	L27
01TH-7805-07	SMD MC7805 TO-252	U3	1004-2010-08	SMD 200Ω 0805	L28
01NS-7650-16	SMD LM2576HV-ADJ TO-263	U4	1004-2010-08	SMD 200Ω 0805	L29
01TH-7805-07	SMD MC7805 TO-252	U5	1001-1010-07	SMD 100UH/0.2A CD73	L30

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
1004-6012-08	SMD FBM-11-201209-601 0805 600R	L31	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL23
1004-6012-08	SMD FBM-11-201209-601 0805 600R	L32	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL24
1004-1022-08	SMD FBM-10-201209-102 0805 1000R	L33	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL25
18S1-0401-00	SMD 7.6MHz XTAL49US	Y1	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL26
18S4-0601-00	SMD 27MHZ XTAL49US 15PPM 22PF	Y3	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL27
1506-0408-00	DIP Pitch 4.2MM 4PIN	J1	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL28
1400-0002-06	DIP CKX-3.5-06	J2	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL29
1501-0604-00	DIP Pitch 2.0MM 6PIN	J3	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EL30
1504-0603-00	SMD Pitch 1.25MM 6PIN	J4	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EM10
1501-0604-00	DIP Pitch 2.0MM 6PIN	J5	1004-1020-07	SMD 1K 0603 FBM-11-160808-102	EM11
1504-4501-B0	SMD Pitch 0.5MM 45PIN	J6	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL1
1504-2401-B0	SMD 24PIN Pitch 0.5MM	J7	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL2
1504-3002-B0	SMD 30PIN PITCH 1.0MM	J8	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL3
1501-0904-01	DIP 9PIN PITCH 2.0MM	J9	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL4
1501-1104-01	DIP 11PIN PITCH 2.0MM	J10	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL5
1504-0803-00	SMD Pitch 1.25MM 8PIN	J11	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL6
1504-2003-00	SMD 20Pin 1.25MM	J12	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL7
1503-0703-00	SMD 7PIN PITCH 1.25MM	J13	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL8
1504-0703-00	SMD Pitch 1.25MM 7PIN	J14	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL9
1505-1009-00	DIP Pitch 2.54MM 10PIN	J15	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL10
1501-0209-00	DIP Pitch 2.54MM 2PIN	J18	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL11
1504-0203-00	SMD Pitch 1.25MM 2PIN	J19	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL12
1602-162F-00	SMD F1 1.6A 5X7 35V	F1	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL13
1602-501F-00	SMD 0.5A 30V 1812	F2	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL14
0902-GFWB-01	DIP GFWB3	SF1	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL15
1332-0604-00	SSV-12DH-GX	SW1	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL16
3700-0070-02	MAIN 290.6*193.5*1.6 FR4 REV:00 Two Layer		1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL17
2100-0029-01	Φ3.2 L=22MM		1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL18

Electronic Parts List -MainBoard			Electronic Parts List -MainBoard		
Parts Number	Description	Location	Parts Number	Description	Location
1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL19	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL21
1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL20	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	EL22

Electronic Parts List -TFTBoard			Electronic Parts List -TFTBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C1	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C301
06S331026000	SMD 1000pF/50V 0603 NPO ±5%	C2	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C302
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C3	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C303
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C5	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C304
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C6	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C305
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C7	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C306
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C11	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C307
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C12	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C308
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C19	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C309
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C20	06S111054000	SMD 1uF/25V 0603 X5R ±10%	C310
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C21	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C311
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C22	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C312
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C26	06S312206000	SMD 22pF/50V 0603 NPO ±5%	C313
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C30	06S312206000	SMD 22pF/50V 0603 NPO ±5%	C314
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C32	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C315
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C33	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C316
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C34	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C317
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C35	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C318
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C36	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C319
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C55	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C320
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C56	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C321
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C57	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C322
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C58	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C323
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C59	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C324
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C60	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C325
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C61	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C326
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C62	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C327
06S331026000	SMD 1000pF/50V 0603 NPO ±5%	C63	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C328
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C64	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C329
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C65	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C330
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C66	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C331
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C67	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C332
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C70	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C333
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C71	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C334
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C72	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C400
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C73	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C403
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C74	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C406
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C300	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C409

Electronic Parts List -TFTBoard			Electronic Parts List -TFTBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C410	06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C441
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C411	06P251072065	SMD 100uF/10V 6.3*5.4 ±20% 105℃ PANASONIC	EC2
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C412	06P251072065	SMD 100uF/10V 6.3*5.4 ±20% 105℃ PANASONIC	EC3
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C413	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC5
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C414	06P251063045	SMD 10uF/16V 4*5.4 ±20% 105℃ PANASONIC	EC6
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C415	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC7
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C416	06P254764065	SMD 47uF/25V 6.3*5.4 ±20% 105℃ PANASONIC	EC8
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C417	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC9
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C418	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC10
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C419	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC11
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C420	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC12
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C421	06S251073004	SMD 100UF/16V ±20% 105℃ (6.3*5.4) NICHICON	EC13
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C422	06S2422714CE	SMD 220UF/6.3V CASE-E ±20%	EC15
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C423	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC16
06S312206000	SMD 22pF/50V 0603 NPO ±5%	C424	06S2422714CE	SMD 220UF/6.3V CASE-E ±20%	EC17
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C425	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC19
06S312206000	SMD 22pF/50V 0603 NPO ±5%	C426	06P251063045	SMD 10uF/16V 4*5.4 ±20% 105℃ PANASONIC	EC20
06S311006000	SMD 10pF/50V 0603 NPO ±5%	C427	06P251074086	SMD 100uF/25V 8*6.3 ±20% 105℃ PANASONIC	EC21
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C428	06P251074086	SMD 100uF/25V 8*6.3 ±20% 105℃ PANASONIC	EC22
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C429	06P251074086	SMD 100uF/25V 8*6.3 ±20% 105℃ PANASONIC	EC23
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C430	06P251074086	SMD 100uF/25V 8*6.3 ±20% 105℃ PANASONIC	EC24
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C431	06P251074086	SMD 100uF/25V 8*6.3 ±20% 105℃ PANASONIC	EC25
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C432	06P251074086	SMD 100uF/25V 8*6.3 ±20% 105℃ PANASONIC	EC26
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C433	0701-1220-02	SMD 22Ω 1/10W ±5% 0603	R2
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C434	0701-1240-03	SMD 24Ω 1/10W ±1% 0603	R3
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C435	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	R4
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C436	0701-1360-03	SMD 36Ω 1/10W ±1% 0603	R5
06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	C440	0701-1270-03	SMD 27Ω 1/10W ±1% 0603	R6

Electronic Parts List -TFTBoard			Electronic Parts List -TFTBoard		
Parts Number	Description	Location	Parts Number	Description	Location
0701-1680-03	SMD 68Ω 1/10W ±1% 0603	R7	0701-1100-02	SMD 10Ω 1/10W ±5% 0603	R306
1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	R8	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R307
0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R9	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R308
0701-12R2-03	SMD 2.2Ω 1/10W ±1% 0603	R11	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R309
0701-1430-03	SMD 43Ω 1/10W ±1% 0603	R12	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R310
0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R14	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R311
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R16	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R312
0701-1510-03	SMD 51Ω 1/10W ±1% 0603	R18	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R313
0701-19R1-02	SMD 9.1Ω 1/10W ±5% 0603	R19	0701-1105-02	SMD 1MΩ 1/10W ±5% 0603	R314
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R20	0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R315
0701-1510-03	SMD 51Ω 1/10W ±1% 0603	R21	0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R403
0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R22	0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R405
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R26	0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R406
0701-19R1-02	SMD 9.1Ω 1/10W ±5% 0603	R30	0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R407
0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R34	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R408
0701-1680-03	SMD 68Ω 1/10W ±1% 0603	R39	0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R409
0701-1430-03	SMD 43Ω 1/10W ±1% 0603	R40	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R410
0701-12R2-03	SMD 2.2Ω 1/10W ±1% 0603	R42	0701-1105-02	SMD 1MΩ 1/10W ±5% 0603	R411
0701-1220-02	SMD 22Ω 1/10W ±5% 0603	R43	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	R412
0701-1240-03	SMD 24Ω 1/10W ±1% 0603	R44	0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R414
0701-1270-03	SMD 27Ω 1/10W ±1% 0603	R45	0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R415
0701-1360-03	SMD 36Ω 1/10W ±1% 0603	R46	0701-1750-03	SMD 75Ω 1/10W ±1% 0603	R417
0701-19R1-02	SMD 9.1Ω 1/10W ±5% 0603	R47	0701-1750-03	SMD 75Ω 1/10W ±1% 0603	R418
0701-1620-03	SMD 62Ω 1/10W ±1% 0603	R51	0701-1750-03	SMD 75Ω 1/10W ±1% 0603	R419
0701-11R8-03	SMD 1.8Ω 1/10W ±1% 0603	R52	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN300
0701-1820-03	SMD 82Ω 1/10W ±1% 0603	R56	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN301
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R58	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN302
0701-1330-02	SMD 33Ω 1/10W ±5% 0603	R60	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN303
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R62	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN304
0701-1222-02	SMD 2.2KΩ 1/10W ±5% 0603	R63	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN400
0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R64	0701-4330-02	SMD 33Ω*4 1/10W ±5% 0603	RN401
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R65	04XT-T54S-15	SMD BAT54S SOT-23	D1
0701-1182-03	SMD 1.8KΩ 1/10W ±1% 0603	R66	04XT-T54S-15	SMD BAT54S SOT-23	D2
0701-1223-03	SMD 22KΩ 1/10W ±1% 0603	R67	04XT-T54S-15	SMD BAT54S SOT-23	D3
0701-2000-02	SMD 0Ω 1/8W ±5% 0805	R68	04XT-SS14-02	SMD SS14 DO-214AC	D4
0701-1392-03	SMD 3.9KΩ 1/10W ±1% 0603	R69	04XT-SK34-02	SMD SK34 DO-214AC	D5
0701-1104-02	SMD 100KΩ 1/10W ±5% 0603	R71	04WY-75AV101	SMD 7.5V DO-213AA 0.5W	ZD1
0701-1302-02	SMD 3KΩ 1/10W ±5% 0603	R72	04WY-15BV101	SMD 15V DO-213AA 0.5W	ZD2
0701-1342-03	SMD 3.4KΩ 1/10W ±1% 0603	R73	04PT-4148-01	SMD 1N4148 DO-213AA	ZD300
0701-1102-03	SMD 1KΩ 1/10W ±1% 0603	R74	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q2
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R75	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q3
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R76	01AW-1522-05	SMD AP1522 SOT23-5L AWACHIP	U2
0701-1221-03	SMD 220Ω 1/10W ±1% 0603	R77	01AW-1520-08	SMD AP1520 SOP-8 AWACHIP	U3
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R78	0100-501V-11	SMD MST501V-PQFP128 SMART-CORE	U300
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R79	01TI-3801-30	SMD TPS3801K33DCK SOT323 TI	U301
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R80	0100-TW99-11	SMD TW9906-BATA3-GR-TQFP80 SMART-CORE	U400
0701-1391-03	SMD 390Ω 1/10W ±1% 0603	R300	01AM-8810-05	AME8810DEGTZ SOT-223	U401
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R301	01AM-8810-05	AME8810DEGTZ SOT-223	U402
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R302	18S1-1301-00	SMD 14.31818MHZ 15PPM 20P XTAL49US	X300
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R304	18S4-0601-00	SMD 27MHZ XTAL49US 15PPM 22PF	X400
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R305	1504-3002-B0	SMD 30PIN PITCH 1.0MM	J1

Electronic Parts List -TFTBoard			Electronic Parts List -TFTBoard		
Parts Number	Description	Location	Parts Number	Description	Location
1504-0603-00	SMD Pitch 1.25MM 6PIN	J2	1003-1000-08	SMD 10uH CPL-0805 ±10%	L300
1504-3001-T0	SMD Pitch 0.5MM 30PIN	CN1	0701-2000-02	SMD 0Ω 1/8W ±5% 0805	L301
1504-3001-T0	SMD Pitch 0.5MM 30PIN	CN2	1003-1000-08	SMD 10uH CPL-0805 ±10%	L302
1004-2010-08	SMD 200Ω 0805	L1	1003-1000-08	SMD 10uH CPL-0805 ±10%	L303
1004-2010-08	SMD 200Ω 0805	L6	1003-1000-08	SMD 10uH CPL-0805 ±10%	L304
1003-2200-16	SMD 22UH SDRH5D28-220N SUMIDA	L7	1003-1000-08	SMD 10uH CPL-0805 ±10%	L400
1001-1010-16	SMD 100uH CDRH5D28-101NC(Sumida)	L8	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	L401
1003-1000-08	SMD 10uH CPL-0805 ±10%	L9	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	L402
1003-1000-08	SMD 10uH CPL-0805 ±10%	L11	1004-2211-07	SMD 220Ω 0603 FBM-11-160808-221	L403
1001-1010-16	SMD 100uH CDRH5D28-101NC(Sumida)	L12	1003-1000-08	SMD 10uH CPL-0805 ±10%	L404
1001-1013-07	SMD 100UH/0.5A CD73	L13	1003-1000-08	SMD 10uH CPL-0805 ±10%	L405
1001-1512-07	SMD 150UH/0.6A CD73	L14	0701-2000-02	SMD 0Ω 1/8W ±5% 0805	L406
1001-1011-07	SMD 100UH/1A CD73	L15	3700-0058-02	TFT 140*80*1.2MM FR4 REV:00 Two Layer	PCB

Electronic Parts List -FrontKeyBoard			Electronic Parts List -FrontKeyBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C1	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC1
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C2	06S251073004	SMD 100UF/16V ±20% 105℃ (6.3*5.4) NICHICON	EC2
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C3	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC3
06S312216000	SMD 220pF/50V 0603 NPO ±5%	C4	06P251063045	SMD 10uF/16V 4*5.4 ±20% 105℃ PANASONIC	EC4
06S312216000	SMD 220pF/50V 0603 NPO ±5%	C5	06P254763065	SMD 47uF/16V 6.3*5.4 ±20% 105℃ PANASONIC	EC5
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C6	06P251063045	SMD 10uF/16V 4*5.4 ±20% 105℃ PANASONIC	EC6
06S111026000	SMD 1nF/50V 0603 X7R ±10%	C7	0701-3000-02	SMD 0Ω 1/4W ±5% 1206	R
06S312226000	SMD 2200pF/50V 0603 NPO ±5%	C8	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R1
06S116816000	SMD 680pF/50V 0603 X7R ±10%	C9	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R2
06S116816000	SMD 680pF/50V 0603 X7R ±10%	C10	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R3
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C11	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R4
06S116816000	SMD 680pF/50V 0603 X7R ±10%	C12	0701-1153-02	SMD 15KΩ 1/10W ±5% 0603	R5
06S313316000	SMD 330pF/50V 0603 NPO ±5%	C13	0701-3470-02	SMD 47Ω 1/4W ±5% 1206	R6
06S312226000	SMD 2200pF/50V 0603 NPO ±5%	C14	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R7
06S116816000	SMD 680pF/50V 0603 X7R ±10%	C15	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R8
06S312216000	SMD 220pF/50V 0603 NPO ±5%	C16	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R9
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C17	0701-13R3-02	SMD 3.3Ω 1/10W ±5% 0603	R10
06S313316000	SMD 330pF/50V 0603 NPO ±5%	C18	0701-1563-02	SMD 56KΩ 1/10W ±5% 0603	R11
06S111054000	SMD 1uF/25V 0603 X5R ±10%	C19	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R12
06S111026000	SMD 1nF/50V 0603 X7R ±10%	C20	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R13
06S312216000	SMD 220pF/50V 0603 NPO ±5%	C21	0701-13R3-02	SMD 3.3Ω 1/10W ±5% 0603	R15
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C22	0701-1100-02	SMD 10Ω 1/10W ±5% 0603	R16
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C23	0701-1394-02	SMD 390KΩ 1/10W ±5% 0603	R17
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C24	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R18
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C33	0701-1153-02	SMD 15KΩ 1/10W ±5% 0603	R19
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C34	0701-1563-02	SMD 56KΩ 1/10W ±5% 0603	R20
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C35	0701-1681-02	SMD 680Ω 1/10W ±5% 0603	R21
0701-1100-02	SMD 10Ω 1/10W ±5% 0603	C36	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R22

Electronic Parts List -FrontKeyBoard			Electronic Parts List -FrontKeyBoard		
Parts Number	Description	Location	Parts Number	Description	Location
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R23	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D2
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R24	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D3
0701-1822-02	SMD 8.2KΩ 1/10W ±5% 0603	R25	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D4
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R26	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D5
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R27	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D6
0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R28	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D7
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R29	2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D8
0701-1391-03	SMD 390Ω 1/10W ±1% 0603	R30	2004-0001-00	SMD BLUE 0603	D10
0701-11R1-03	SMD 1.1K 1/10W ±1% 0603	R31	2004-0001-00	SMD BLUE 0603	D11
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R32	2004-0001-00	SMD BLUE 0603	D12
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R33	2004-0001-00	SMD BLUE 0603	D13
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R34	2004-0001-00	SMD BLUE 0603	D14
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R35	2004-0001-00	SMD BLUE 0603	D15
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R36	2004-0001-00	SMD BLUE 0603	D16
0701-1330-03	SMD 33Ω 1/10W ±1% 0603	R38	2004-0001-00	SMD BLUE 0603	D17
0701-1241-03	SMD 240Ω 1/10W ±1% 0603	R39	2004-0001-00	SMD BLUE 0603	D18
0701-1471-03	SMD 470Ω 1/10W ±1% 0603	R40	04WY-12BV101	SMD 12V DO-213AA 0.5W	D21
0701-1182-03	SMD 1.8KΩ 1/10W ±1% 0603	R41	03T1-1758-09	SMD 2SD1758 SC-63	Q1
0701-1470-03	SMD 47Ω 1/10W ±1% 0603	R42	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q2
0701-1750-03	SMD 75Ω 1/10W ±1% 0603	R43	03P1-3906-04	SMD 2N3906 PNP SOT-23	Q3
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R44	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q4
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R45	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q5
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R46	03N1-4672-05	SMD 2SC4672 NPN SOT-89	Q6
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R47	03N1-5344-04	SMD C5344SFY NPN SOT-23	Q7
0701-1183-02	SMD 18KΩ 1/10W ±5% 0603	R48	03P1-3906-04	SMD 2N3906 PNP SOT-23	Q8
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R49	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q9
0701-1621-03	SMD 620Ω 1/10W ±1% 0603	R50	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q10
0701-1272-03	SMD 2.7KΩ 1/10W ±1% 0603	R51	03P1-3906-04	SMD 2N3906 PNP SOT-23	Q11
0701-15R1-03	SMD 5.1Ω 1/10W ±1% 0603	R52	1004-2010-08	SMD 200Ω 0805	L1
0701-1151-03	SMD 150Ω 1/10W ±1% 0603	R53	1003-8000-16	SMD 80UH SDRH5D28-800N	L2
0701-1681-03	SMD 680Ω 1/10W ±1% 0603	R54	1004-2010-08	SMD 200Ω 0805	L3
0701-1432-03	SMD 4.3KΩ 1/10W ±1% 0603	R55	1004-2010-08	SMD 200Ω 0805	L4
0701-1101-03	SMD 100Ω 1/10W ±1% 0603	R56	1004-1022-08	SMD FBM-10-201209-102 0805 1000R	L5
0701-1391-03	SMD 390Ω 1/10W ±1% 0603	R57	1504-0603-00	SMD Pitch 1.25MM 6PIN	J1
0701-1102-03	SMD 1KΩ 1/10W ±1% 0603	R58	1504-2003-00	SMD 20Pin 1.25MM	J2
0701-1150-03	SMD 15Ω 1/10W ±1% 0603	R59	01HS-K219-09	SMD HS-2K219 SO-14	U1
0701-1251-03	SMD 250Ω 1/10W ±1% 0603	R60	05YK-0001-02	DIP λ=940MM RIM-B138-SS	U2
0701-1912-03	SMD 9.1KΩ1/10W ±1% 0603	R61	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW1
0701-1223-02	SMD 22KΩ 1/10W ±5% 0603	R63	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW2
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R64	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW3
0701-1471-02	SMD 470Ω 1/10W ±5% 0603	R65	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW4
1202-1031-01	SMD TC0320 10KΩ	VR1	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW5
1202-1031-01	SMD TC0320 10KΩ	VR2	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW6
1202-1031-01	SMD TC0320 10KΩ	VR3	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW7
1202-1031-01	SMD TC0320 10KΩ	VR4	1333-1203-00	DIP SS-23D03-G7	SW8
2015-0001-00	DIP Φ3MM HSIR-723CP λ=850nm	D1	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW9

Electronic Parts List -FrontKeyBoard			Electronic Parts List -FrontKeyBoard		
Parts Number	Description	Location	Parts Number	Description	Location
1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW10	1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW12
1360-0502-00	SMD 6*6*2.5（5PIN）250GF±20%	SW11	3700-0073-02	FRPMTLEU 210*46.5*1.2MM FR4 REV:00 Two Layer	

Electronic Parts List -EjectKeyBoard			Electronic Parts List -EjectKeyBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C1	0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R14
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C2	0701-3000-02	SMD 0Ω 1/4W ±5% 1206	R15
0701-1512-02	SMD 5.1KΩ 1/10W ±5% 0603	R2	2004-0001-00	SMD BLUE 0603	D1
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R4	2004-0001-00	SMD BLUE 0603	D2
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R5	2000-0002-00	SMD RED 0603	D3
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R6	2004-0001-00	SMD BLUE 0603	D4
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R7	2004-0001-00	SMD BLUE 0603	D5
0701-1681-02	SMD 680Ω 1/10W ±5% 0603	R8	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q1
0701-1101-02	SMD 100Ω 1/10W ±5% 0603	R9	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q2
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R10	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q3
0701-1332-02	SMD 3.3KΩ 1/10W ±5% 0603	R11	1504-0703-00	SMD Pitch 1.25MM 7PIN	J1
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R12	1360-0403-00	SMD 6*6*H4.3MM	SW1
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R13	1360-0403-00	SMD 6*6*H4.3MM	SW2
3700-0074-02	EJECTKEY 192*19.5*1.2MM FR4 REV:00 Two Layer	PCB			

Electronic Parts List -FrontPassengerKeyBoard			Electronic Parts List -FrontPassengerKeyBoard		
Parts Number	Description	Location	Parts Number	Description	Location
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C1	0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R14
06S111046000	SMD 0.1uF/50V 0603 X7R ±10%	C2	0701-3000-02	SMD 0Ω 1/4W ±5% 1206	R20
06P251063045	SMD 10uF/16V 4*5.4 ±20% 105℃ PANASONIC	EC1	2004-0001-00	SMD BLUE 0603	D1
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R1	2002-0002-00	SMD LED-R 0603	D2
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R2	2004-0001-00	SMD BLUE 0603	D3
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R3	2002-0002-00	SMD LED-R 0603	D4
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R4	2004-0001-00	SMD BLUE 0603	D5
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R5	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q1
0701-1000-02	SMD 0Ω 1/10W ±5% 0603	R6	03P1-3906-04	SMD 2N3906 PNP SOT-23	Q2
0701-1102-02	SMD 1KΩ 1/10W ±5% 0603	R8	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q3
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R9	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q4
0701-1331-02	SMD 330Ω 1/10W ±5% 0603	R10	1004-2010-08	SMD 200Ω 0805	L1
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R11	1504-0703-00	SMD Pitch 1.25MM 7PIN	J1
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R12	1360-0403-00	SMD 6*6*H4.3MM	SW1
0701-1103-02	SMD 10KΩ 1/10W ±5% 0603	R13	1360-0403-00	SMD 6*6*H4.3MM	SW2
3700-0072-02	FRONTPASSENGERKEY 102*21*1.6MM FR4 REV:00 Two Layer	PCB			

Electronic Parts List -FMSwitchBoard			Electronic Parts List -FMSwitchBoard		
Parts Number	Description	Location	Parts Number	Description	Location
0701-1472-02	SMD 4.7KΩ 1/10W ±5% 0603	R1	1402-0002-01	DIP JAS-005-1	J1
0701-1272-02	SMD 2.7KΩ 1/10W ±5% 0603	R2	1501-0204-00	DIP Pitch 2.0MM 2PIN	J2
06S111036000	SMD 0.01uF/50V 0603 X7R ±10%	C1	1501-0204-00	DIP Pitch 2.0MM 2PIN	J3
04PT-4148-01	SMD 1N4148 DO-213AA	D1	1001-1010-16	SMD 100uH CDRH5D28101NC(Sumida)	L1

06N211073100	DIP 100uF/16V ±20% 5*11/2.5 105℃ NICHICON	EC1	03N1-3904-04	SMD 2N3904 NPN SOT-23	Q1
2901-A5WK-00	RELAY DPDT (NA5W-K)	K1	3700-0076-02	FMSWITCH 35*35*1.6MM FR4 REV:00 Two Layer	PCB

Electronic Parts List -AUX3Board

Parts Number	Description	Location
06S311016000	SMD 100pF/50V 0603 NPO ±5%	C1
06S111026000	SMD 1nF/50V 0603 X7R ±10%	C2
06S111026000	SMD 1nF/50V 0603 X7R ±10%	C3
0701-2000-02	SMD 0Ω 1/8W ±5% 0805	EC1
04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D1
04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D2
04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D3
3700-0075-02	AUX3 71*16.5*1.2MM FR4 REV:00 Two Layer	PCB

Electronic Parts List -AUX3Board

Parts Number	Description	Location
04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D4
04WY-51AV101	SMD 5.1V DO-213AA 0.5W	D5
1004-2010-08	SMD 200Ω 0805	EMI1
1004-2010-08	SMD 200Ω 0805	EMI2
1004-2010-08	SMD 200Ω 0805	EMI3
1404-0005-03	RCA JACK RCA3-12-3K	J1
1504-0803-00	SMD Pitch 1.25MM 8PIN	J2

Electronic Parts List -SW_ML_Board

Parts Number	Description	Location
1503-0203-00	SMD Pitch 1.25MM 2PIN	J1
3700-0039-02	TMX-R102 SW PCB REV: 00 Two Layer	PCB

Electronic Parts List -SW_ML_Board

Parts Number	Description	Location
1360-0414-00	DIP DS-1120P-105	S1

Electronic Parts List

Parts Number	Description	Name
LP-J001-T70G	8Ohm 1W T-12 EVR	Speaker
25VD-0001-08	APLINE50V150	DVD Mechanism
88IN-R200-01	Inverter PCB ASS'Y	PCB Assembly
02A1-102T-08	10.2″ TFT LCD PANNEL INNOLUX GP AT102TN01 V.1	TFT
2102-0002-20	PITCH 1.25MM 20PIN L=50MM AWG28 MAINTOFRONTKEY	Wire
2102-0013-07	PITCH 1.25MM 7PIN L=210MM AWG28 MAINTOFRONTPASSENGERKEY	Wire
2100-0011-08	PITCH 1.25MM 8PIN L=300MM Coaxial	AUX3 Wire
2102-0046-06	PITCH 1.25MM 6PIN L=55MM AWG28 INVERTER	Wire
2102-0014-07	PITCH 1.25MM 7PIN L=70MM AWG28 MAINTOFRONTKEY-DOOR1	Wire
2102-0047-06	PITCH 1.25MM 6PIN L=100MM AWG28 MAINTOFRONTKEY-DOOR2	Wire
2102-0107-02	PITCH 2.54MM 2PIN L=215MM AWG26 SPEAKER	Wire
2102-0108-02	PITCH 1.25MM 2PIN L=50MM AWG28 PANELSW	Wire
2105-0018-04	MOLEX 4PIN POWER	Power Cable
2101-0003-09	9PIN 2.0MM L=360MM+70MM AV1RCA	AV1 Cable
2101-0002-11	11PIN 2.0MM L=270MM+70MM AV2IN/OUTRCA	AV2 Cable
2103-0003-45	PITCH 0.5MM 45PIN L=160MM	FFC
2103-0009-24	PITCH 0.5MM 24PIN L=170MM	FFC
2103-0009-30	PITCH 1.0MM 30PIN L=200MM FPC	FFC
2105-0004-06	PITCH 2.54MM 6PIN L=410MM	Wire
2100-0019-01	OHM to FM Switch Box	FM Cable
2100-0006-02	FM Switch Box to Car	FM Cable
33ZY-R200-00	TMX-R2000	Remote Control
2100-0027-01	Φ2.5MM 1007#22 L=70MM	Wire
3501-0011-00	K5ARP 25*5*12MM	Core
3501-0010-00	K5ARP 40*6.5*18MM	Core

Mechanical Parts List

Parts Number	Name	Description
JD-A00820515	EVA Washer	369*10*2MM
MB-0088-0000	TFT B-Cab.	ABS-777D Printing “ALPINE”
DG-0038-0000	Base	ABS-777D
ZG-0002-0508	TFT F-Cabinet	ABS-777D
XG-0001-0801	FM Switch Box Bottom	SECC T=0.8MM
SG-0002-0807	FM Switch Box Top	SECC T=0.6MM
AJ-A00840511	Button1	PC Clear
AJ-A00250502	Button2	PC
AJ-A00850511	Button3	PC Clear
AJ-A00860511	Button4	PC Clear
AJ-A00013711	Button5	PC Clear
AJ-A00023711	Button6	PC Clear
AJ-A00033711	Button7	PC Clear
CP-B00071803	IR Lens	PC Clear
CP-C00011802	Lamp Lens-L	PC Clear
CP-C00021802	Lamp Lens-R	PC Clear
AJ-A00014002	Lamp Switch	ABS-777D
AJ-A00014008	Open Knob	ABS-777D
GD-400014002	RCA Jack Chassis	ABS-777D
DB-500014002	RCA Jack Cover	ABS-777D
WK-0001-0528	Trim Ring	ABS-777D
ZA-A00014008	Slot Cabinet	PC
BA-40028-000	FPC Clip	ABS-777D
KG-100030200	Latch	ABS-777D
GD-400030200	Latch Chassis	ABS-777D
CP-D00031400	Indicator Lens	PMMA Clear
ZA-A00020000	Disc In Lens	PMMA Clear
GD-600011800	TFT F-Lens	PC
XG-0001-4002	Back Cover	ABS-777D
GD-100200801	Bracket	SECC T=1.4MM
ZA-G00010801	TFT Panel Chasis	SECC T=0.8MM
ZA-G00020801	DVD Mechanism Chasis	SECC T=0.8MM
MP-R200-3001	Model Plate	22.4*3.25*0.95MM
ZJ-0050-0000	Hinge-L	
ZJ-0051-0000	Hinge -R	
TH-200023-21	Spring1	SUS303 Φ0.4*Φ5.3*H12.6*T7.0MM
TH-200024-21	Spring2	SUS303 Φ0.4*Φ4*H20*T8.0MM
JD-D00020515	Spong Pad	PORON-H48-1.5T Φ7*1.5MM
PL-C0015-150	Slot Silk Cloth	
JY110417203X	Insulation Plate1	104*172.2*0.3MM PVC
JY160A11A02X	Insulation Plate2	60*11*0.2MM
JY147A37A01X	Insulation Plate3	47.9*37.5*0.1MM
JY315037A03X	Shield Plate	150*37*0.3MM
FH-C00050000	TFT Protect film	PE 226*135.2*0.05MM
LS1AA0170603	Screw	PA1.7*6 SWC
LS1CB0200501	Screw	TB2*5 SWC
LS1AM0260303	Screw	PM2.6*3 SWC
LS1BM0400801	Screw	CM4*8 SWC
LS1AA0260803	Screw	PA2.6*8
LS1CM0300603	Screw	TM3*6 SWC

LS1CB0260603	Screw	TB2.6*6 SWC
LS1HA0200803	Screw	PWA2*8 SWC
LS1CB0300801	Screw	TB3*8 SWC
LS1FB0260601	Screw	KB2.6*6 SWC
LS1CM0260403	Screw	TM2.6*4SWC
LS1FM0260401	Screw	KM2.6*4MM SWC
ZL-10005A-11	Metal Boss1	∅5.0*14
ZL-10006A-11	Metal Boss2	∅5.0*17
ZL-20054A-11	Metal Boss	Φ5*10MM
LS1FM0200501	Screw	KM2*5 Φ3 SWC
JY738A38A03X	FM Insulation Plate	38*38*0.3MM PP
GD-300370100	FM Shield Plate	T=0.5MM
JD-D00130115	Spong	PORON Φ31*Φ27.4*0.5MM
PL-D0003-150	Plate	30*10*0.2MM
PL-C0022-150	Sticker	25*15MM
ZL-10028A-15	LED Supporter	LED-3 NYLON 66 UL94V-2
LS1BM0200201	Screw	CM2*2 SWC
LS1AM0260403	Screw	PM2.6*4 SWC
LS1AB0160507	Screw	PB1.6*5MM SWC (Φ3.0mm T=0.8)
DQ8069032084	Washer	Φ6.9*Φ3.2*0.8MM
LS1CB0260803	Screw	TB2.6*8MM SWC

Connecting Table			
Parts Number	From	To	Description
2102-0002-20	J12 (MainBoard)	J2 (FrontKeyBoard)	20Pin/Pitch 1.25mm/Length 50mm/Wire28#
2102-0013-07	J14 (MainBoard)	J1 (FrontPassengerBoard)	7Pin/Pitch 1.25mm/Length 210mm/Wire 28#
2100-0011-08	J11 (MainBoard)	J2 (AUX3 Board)	8Pin/Pitch 1.25mm/Length 55mm/Wire 28#
2102-0046-06	J2 (TFT Board)	Inverter Board	7Pin/Pitch 1.25mm/Length 70mm/Wire 28#
2102-0014-07	J13 (MainBoard)	J1 (EjectKeyBoard)	7Pin/Pitch 1.25mm/Length 70mm/Wire 28#
2102-0047-06	J4 (MainBoard)	J1 (FrontKeyBoard)	6Pin/Pitch 1.25mm/Length 100mm/Wire 28#
2102-0107-02	J18 (MainBoard)	Speaker	2Pin/Pitch 2.54mm/Length 215mm/Wire 26#
2101-0002-09	J9 (MainBoard)		9Pin/Pitch 2.0mm/Length 360mm+70mm
2101-0001-11	J10 (MainBoard)		11Pin/Pitch 2.0mm/Length 270mm +70mm
2103-0003-45	J6 (MainBoard)	DVD	45Pin/Pitch 0.5mm/Length 160mm
2103-0009-24	J7 (MainBoard)	DVD	24Pin/Pitch 0.5mm/Length 170mm
2103-0009-30	CN1,CN2 (TFT Board)	Panel	30Pin/Pitch 0.5mm/Length 200mm

Electrical Parts List

=======DV-MAIN P.W.Board

C501	08T81833F13	CAP,CER 106K-B1C -CP
C502	08T81833F13	CAP,CER 106K-B1C -CP
C503	08T81833F13	CAP,CER 106K-B1C -CP
C504	08S45232Y05	CAP,CER 102K-B1H -CP
C505	08T81833F13	CAP,CER 106K-B1C -CP
C506	08T81833F13	CAP,CER 106K-B1C -CP
C507	08T81833F13	CAP,CER 106K-B1C -CP
C508	08S45232Y05	CAP,CER 102K-B1H -CP
C509	08S45232Y05	CAP,CER 102K-B1H -CP
C510	08S45232Y05	CAP,CER 102K-B1H -CP
C511	08S45232Y11	CAP,CER 103K-B1C -CP
C512	08S45232Y05	CAP,CER 102K-B1H -CP
C513	08S45232Y05	CAP,CER 102K-B1H -CP
C514	08S45232Y11	CAP,CER 103K-B1C -CP
C516	08S65667Y05	CAP,CER 105KX5R1A-CP
C601	08S45232Y05	CAP,CER 102K-B1H -CP
C602	08S45232Y05	CAP,CER 102K-B1H -CP
C603	08S45232Y05	CAP,CER 102K-B1H -CP
C604	08S45232Y05	CAP,CER 102K-B1H -CP
C605	08S45232Y05	CAP,CER 102K-B1H -CP
C606	08S45232Y05	CAP,CER 102K-B1H -CP
C607	08S45232Y05	CAP,CER 102K-B1H -CP
C608	08S45232Y05	CAP,CER 102K-B1H -CP
C609	08S45232Y05	CAP,CER 102K-B1H -CP
C610	08S45232Y05	CAP,CER 102K-B1H -CP
C611	08S45232Y05	CAP,CER 102K-B1H -CP
C612	08S45232Y05	CAP,CER 102K-B1H -CP
C613	08S45232Y05	CAP,CER 102K-B1H -CP
C614	08S45676W87	CAP,CER 333K-B1E -CP
C615	08S45232Y17	CAP,CER 104K-B0J -CP
C616	08S45232Y17	CAP,CER 104K-B0J -CP
C617	08S45232Y17	CAP,CER 104K-B0J -CP
C618	08S45676W70	CAP,CER 562K-B1H -CP
C619	08S45676W79	CAP,CER 183K-B1E -CP
C620	08S45232Y17	CAP,CER 104K-B0J -CP
C621	08S45232Y17	CAP,CER 104K-B0J -CP
C622	08S45232Y17	CAP,CER 104K-B0J -CP
C623	08S45232Y17	CAP,CER 104K-B0J -CP
C624	08S45232Y05	CAP,CER 102K-B1H -CP
C625	08S45232Y17	CAP,CER 104K-B0J -CP
C626	08S45232Y17	CAP,CER 104K-B0J -CP
C627	08S45232Y17	CAP,CER 104K-B0J -CP
C631	08S35374W12	CAP,CER 106K-B0J -CP
C632	08S45232Y05	CAP,CER 102K-B1H -CP
C633	08S45232Y05	CAP,CER 102K-B1H -CP
C634	08S45232Y05	CAP,CER 102K-B1H -CP
C635	08S45232Y05	CAP,CER 102K-B1H -CP
C636	08S45232Y05	CAP,CER 102K-B1H -CP
C637	08S45232Y05	CAP,CER 102K-B1H -CP

C638	08S45232Y05	CAP,CER 102K-B1H -CP
C639	08S45232Y05	CAP,CER 102K-B1H -CP
C640	08S45232Y05	CAP,CER 102K-B1H -CP
C641	08S45232Y05	CAP,CER 102K-B1H -CP
C642	08S45232Y05	CAP,CER 102K-B1H -CP
C643	08S45232Y05	CAP,CER 102K-B1H -CP
C644	08S45232Y05	CAP,CER 102K-B1H -CP
C645	08S45232Y05	CAP,CER 102K-B1H -CP
C646	08S45232Y05	CAP,CER 102K-B1H -CP
C647	08S45232Y05	CAP,CER 102K-B1H -CP
C648	08S45232Y05	CAP,CER 102K-B1H -CP
C651	08S65670Y01	CAP,CER 106KX5R1C-CP
C652	08S65670Y01	CAP,CER 106KX5R1C-CP
C653	08S45232Y05	CAP,CER 102K-B1H -CP
C654	08S45232Y05	CAP,CER 102K-B1H -CP
C655	08S45232Y17	CAP,CER 104K-B0J -CP
C658	08S35374W12	CAP,CER 106K-B0J -CP
C671	08S45232Y11	CAP,CER 103K-B1C -CP
C672	08S45232Y17	CAP,CER 104K-B0J -CP
C673	08S45232Y17	CAP,CER 104K-B0J -CP
C674	08S45232Y17	CAP,CER 104K-B0J -CP
C675	08S45232Y17	CAP,CER 104K-B0J -CP
C676	08S45232Y17	CAP,CER 104K-B0J -CP
C677	08S45232Y17	CAP,CER 104K-B0J -CP
C678	08S45232Y17	CAP,CER 104K-B0J -CP
C679	08S45232Y17	CAP,CER 104K-B0J -CP
C680	08S35349Y16	CAP,CER 105K-B1A -CP
C681	08S35349Y16	CAP,CER 105K-B1A -CP
C682	08S45232Y17	CAP,CER 104K-B0J -CP
C683	08S45232Y17	CAP,CER 104K-B0J -CP
C684	08S45232Y17	CAP,CER 104K-B0J -CP
C685	08S45232Y17	CAP,CER 104K-B0J -CP
C688	08S45232Y07	CAP,CER 222K-B1H -CP
C689	08S45232Y07	CAP,CER 222K-B1H -CP
C690	08S45232Y11	CAP,CER 103K-B1C -CP
C691	08S45231Y23	CAP,CER 68RJ-CH1H-CP
C701	08S65670Y01	CAP,CER 106KX5R1C-CP
C702	08S65670Y01	CAP,CER 106KX5R1C-CP
C711	08S45232Y05	CAP,CER 102K-B1H -CP
C712	08S45232Y05	CAP,CER 102K-B1H -CP
C713	08S45232Y05	CAP,CER 102K-B1H -CP
C721	08S45232Y05	CAP,CER 102K-B1H -CP
C725	08S45232Y05	CAP,CER 102K-B1H -CP
C731	08S45232Y17	CAP,CER 104K-B0J -CP
C732	08S45232Y05	CAP,CER 102K-B1H -CP
C733	08S45232Y05	CAP,CER 102K-B1H -CP
C734	08S45232Y17	CAP,CER 104K-B0J -CP
C735	08S45232Y17	CAP,CER 104K-B0J -CP
C736	08S45232Y05	CAP,CER 102K-B1H -CP
C737	08S45232Y05	CAP,CER 102K-B1H -CP
C738	08S45232Y17	CAP,CER 104K-B0J -CP
C739	08S45232Y05	CAP,CER 102K-B1H -CP

C740	08S45232Y05	CAP,CER 102K-B1H -CP
C741	08S45232Y05	CAP,CER 102K-B1H -CP
C742	08S45232Y05	CAP,CER 102K-B1H -CP
C801	08T65555Y01	CAP,CER 226K-BJ0J-CP
C802	08T65555Y01	CAP,CER 226K-BJ0J-CP
C803	08S35349Y12	CAP,CER 105K-B0J -CP
C804	08S45676W80	CAP,CER 223K-B1E -CP
C811	08T65555Y01	CAP,CER 226K-BJ0J-CP
C812	08T65555Y01	CAP,CER 226K-BJ0J-CP
C813	08S35349Y12	CAP,CER 105K-B0J -CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C821	08S45232Y13	CAP,CER 223K-B1C -CP
C831	08S45232Y13	CAP,CER 223K-B1C -CP
C841	08S45232Y17	CAP,CER 104K-B0J -CP
C842	08T65555Y01	CAP,CER 226K-BJ0J-CP
C843	08S45232Y17	CAP,CER 104K-B0J -CP
C844	08T65555Y01	CAP,CER 226K-BJ0J-CP
C845	08S45232Y17	CAP,CER 104K-B0J -CP
C846	08S45232Y17	CAP,CER 104K-B0J -CP
C850	08S45232Y08	CAP,CER 332K-B1H -CP
C851	08S45232Y08	CAP,CER 332K-B1H -CP
C854	08S45232Y11	CAP,CER 103K-B1C -CP
C855	08S45232Y08	CAP,CER 332K-B1H -CP
C860	08T81833F13	CAP,CER 106K-B1C -CP
C861	08S45232Y17	CAP,CER 104K-B0J -CP
C862	08T81833F13	CAP,CER 106K-B1C -CP
C865	08S65668Y04	CAP,CER 104KX5R1A-CP
C866	08T81833F13	CAP,CER 106K-B1C -CP
C867	08T81833F13	CAP,CER 106K-B1C -CP
C868	08S35374W10	CAP,CER 225K-B1A -CP
C869	08S35374W10	CAP,CER 225K-B1A -CP
C870	08S65668Y04	CAP,CER 104KX5R1A-CP
C871	08S45232Y11	CAP,CER 103K-B1C -CP
C872	08S45232Y17	CAP,CER 104K-B0J -CP
C874	08S45232Y17	CAP,CER 104K-B0J -CP
C875	08S45232Y17	CAP,CER 104K-B0J -CP
C876	08S45232Y11	CAP,CER 103K-B1C -CP
C878	08S45232Y08	CAP,CER 332K-B1H -CP
C880	08T81833F13	CAP,CER 106K-B1C -CP
C881	08S45231Y25	CAP,CER 101J-CH1H-CP
C882	08S45677W40	CAP,CER.151J-CH1H-CP
C883	08S45677W40	CAP,CER.151J-CH1H-CP
C884	08S45231Y25	CAP,CER 101J-CH1H-CP
C885	08S45677W40	CAP,CER.151J-CH1H-CP
C886	08S45677W40	CAP,CER.151J-CH1H-CP
C901	08S65667Y05	CAP,CER 105KX5R1A-CP
C902	08S45232Y05	CAP,CER 102K-B1H -CP
C903	08S65667Y05	CAP,CER 105KX5R1A-CP
C904	08S45232Y17	CAP,CER 104K-B0J -CP
C908	08S45232Y05	CAP,CER 102K-B1H -CP
C909	08T81833F12	CAP,CER 106K-B1A -CP
C913	08S45232Y05	CAP,CER 102K-B1H -CP

C914	08S35349Y16	CAP,CER 105K-B1A -CP
C923	08S45232Y05	CAP,CER 102K-B1H -CP
C924	08S35349Y16	CAP,CER 105K-B1A -CP
C925	08S35374W12	CAP,CER 106K-B0J -CP
C926	08S65667Y05	CAP,CER 105KX5R1A-CP
CB501	09T45442Y45	FFC,54104-4592 -EQ
CB502	09T15107Y24	FFC,52435-2491 -ED
CB504	09T15107Y10	FFC,52745-1090 -E9
CB801	09T15107Y28	FFC,52435-2891 -ED
CB861	09T15107Y24	FFC,52435-2491 -ED
D601	48T25665Y01	DIO,1SS355-TE17 -CP
IC511	51T15185Y01	TC7SH08FU-TE85L -CP
IC512	51T35123Y01	TC7W14FK-TE85L -CP
IC601	51-00740Z02	MN35207UB -QT
IC711	51T75359Y01	TC74VHC573FT-EL -SE5
IC712	51T75359Y01	TC74VHC573FT-EL -SE5
IC713	51T15185Y01	TC7SH08FU-TE85L -CP
IC721	53-04487Z08	OFL,V1.0012DV37M050
IC725	51-00726Z01	MB85R256PFTN -ST
IC731	51-04096Z01	EDS6432AFTA-75TI -ST
IC861	51T55021Y02	BD7905BFS-E2 -SEE
L501	24T65689Y01	FBI,FBMJ2125HS420-CP
L502	24T65689Y01	FBI,FBMJ2125HS420-CP
L503	24T65689Y01	FBI,FBMJ2125HS420-CP
L601	24T95456W27	FBI,BLM18PG181SH1-CP
L604	24T95456W27	FBI,BLM18PG181SH1-CP
L605	24T95456W27	FBI,BLM18PG181SH1-CP
L841	24T25164Y25	IND,FSLM2520 10RJ-CP
L901	24T95456W27	FBI,BLM18PG181SH1-CP
L911	24T95456W12	FBI,BLM18AG102SH1-CP
L912	24T65331Y07	IND,LEMF2520 10RK-CP
L921	24T95456W12	FBI,BLM18AG102SH1-CP
L922	24T65331Y07	IND,LEMF2520 10RK-CP
Q801	48T75011W01	TR,2SD1782K-PQR-6-CP
Q802	48T55462Y01	TR,2SB1132-QR-100-E2
Q810	48T75366Y06	TR,FMC2-T148 -CP
Q811	48T75011W01	TR,2SD1782K-PQR-6-CP
Q812	48T55462Y01	TR,2SB1132-QR-100-E2
Q831	48T25137Y02	TR,UN9212J-TX -CP
Q832	48T25137Y06	TR,UN9216J-TX -CP
Q833	48T25137Y06	TR,UN9216J-TX -CP
Q911	48T63420F03	TR,2SA1037AK-R146-CP
Q921	48T63420F03	TR,2SA1037AK-R146-CP
R501	06S15615Y81	RES,RK 223J 1/16 -CP
R502	06S15615Y81	RES,RK 223J 1/16 -CP
R503	06S15615Y81	RES,RK 223J 1/16 -CP
R504	06S15615Y81	RES,RK 223J 1/16 -CP
R505	06S15615Y81	RES,RK 223J 1/16 -CP
R506	06S15615Y81	RES,RK 223J 1/16 -CP
R507	06S15615Y81	RES,RK 223J 1/16 -CP
R511	06S15615Y81	RES,RK 223J 1/16 -CP
R512	06S15615Y81	RES,RK 223J 1/16 -CP

R513	06S15615Y81	RES,RK 223J 1/16 -CP
R514	06S15615Y81	RES,RK 223J 1/16 -CP
R516	06S15615Y81	RES,RK 223J 1/16 -CP
R517	06S15615Y81	RES,RK 223J 1/16 -CP
R518	06S15615Y25	RES,RK 101J 1/16 -CP
R519	06S15615Y25	RES,RK 101J 1/16 -CP
R520	06S15615Y25	RES,RK 101J 1/16 -CP
R521	06S15615Y25	RES,RK 101J 1/16 -CP
R551	06S15615Y49	RES,RK 102J 1/16 -CP
R552	06S15615Y81	RES,RK 223J 1/16 -CP
R553	06S15615Y49	RES,RK 102J 1/16 -CP
R554	06S15615Y25	RES,RK 101J 1/16 -CP
R555	06S15615Y13	RES,RK 33RJ 1/16 -CP
R556	06S15615Y13	RES,RK 33RJ 1/16 -CP
R557	06S15615Y13	RES,RK 33RJ 1/16 -CP
R558	06S15615Y13	RES,RK 33RJ 1/16 -CP
R559	06S15615Y13	RES,RK 33RJ 1/16 -CP
R560	06S15615Y13	RES,RK 33RJ 1/16 -CP
R561	06S15615Y13	RES,RK 33RJ 1/16 -CP
R562	06S15615Y13	RES,RK 33RJ 1/16 -CP
R563	06S15615Y13	RES,RK 33RJ 1/16 -CP
R564	06S15615Y13	RES,RK 33RJ 1/16 -CP
R565	06S15615Y13	RES,RK 33RJ 1/16 -CP
R566	06S15615Y13	RES,RK 33RJ 1/16 -CP
R567	06S15615Y13	RES,RK 33RJ 1/16 -CP
R568	06S15615Y25	RES,RK 101J 1/16 -CP
R569	06S15615Y17	RES,RK 47RJ 1/16 -CP
R570	06S15615Y17	RES,RK 47RJ 1/16 -CP
R571	06S15615Y17	RES,RK 47RJ 1/16 -CP
R572	06S15615Y17	RES,RK 47RJ 1/16 -CP
R573	06S15615Y17	RES,RK 47RJ 1/16 -CP
R574	06S15615Y17	RES,RK 47RJ 1/16 -CP
R575	06S15615Y17	RES,RK 47RJ 1/16 -CP
R576	06S15615Y25	RES,RK 101J 1/16 -CP
R601	06S15615Y81	RES,RK 223J 1/16 -CP
R602	06S15615Y91	RES,RK 563J 1/16 -CP
R603	06S15615Y29	RES,RK 151J 1/16 -CP
R604	06S15615Y81	RES,RK 223J 1/16 -CP
R611	06S15615Y81	RES,RK 223J 1/16 -CP
R612	06S15616Y23	RES,RK JUMPER1/16-CP
R613	06S15615Y65	RES,RK 472J 1/16 -CP
R614	06S15615Y81	RES,RK 223J 1/16 -CP
R617	06S15593Y53	RES,RK 152F 1/10 -CP
R618	06S15593Y97	RES,RK 104F 1/10 -CP
R619	06S15593Y59	RES,RK 272F 1/10 -CP
R620	06S15594Y02	RES,RK 154F 1/10 -CP
R625	06S15615Y81	RES,RK 223J 1/16 -CP
R626	06S15616Y23	RES,RK JUMPER1/16-CP
R627	06S15615Y13	RES,RK 33RJ 1/16 -CP
R628	06S15615Y13	RES,RK 33RJ 1/16 -CP
R629	06S15615Y13	RES,RK 33RJ 1/16 -CP
R630	06S15615Y81	RES,RK 223J 1/16 -CP

R634	06S15615Y81	RES,RK 223J 1/16 -CP
R635	06S15615Y81	RES,RK 223J 1/16 -CP
R636	06S15615Y81	RES,RK 223J 1/16 -CP
R637	06S15615Y81	RES,RK 223J 1/16 -CP
R638	06S15615Y81	RES,RK 223J 1/16 -CP
R639	06S15615Y81	RES,RK 223J 1/16 -CP
R641	06S15615Y21	RES,RK 68RJ 1/16 -CP
R642	06S15615Y25	RES,RK 101J 1/16 -CP
R643	06S15615Y21	RES,RK 68RJ 1/16 -CP
R644	06S15615Y25	RES,RK 101J 1/16 -CP
R645	06S15615Y21	RES,RK 68RJ 1/16 -CP
R646	06S15615Y25	RES,RK 101J 1/16 -CP
R647	06S15615Y21	RES,RK 68RJ 1/16 -CP
R648	06S15615Y25	RES,RK 101J 1/16 -CP
R649	06S15615Y21	RES,RK 68RJ 1/16 -CP
R650	06S15615Y25	RES,RK 101J 1/16 -CP
R651	06S15615Y21	RES,RK 68RJ 1/16 -CP
R652	06S15615Y25	RES,RK 101J 1/16 -CP
R653	06S15615Y21	RES,RK 68RJ 1/16 -CP
R654	06S15615Y25	RES,RK 101J 1/16 -CP
R655	06S15615Y21	RES,RK 68RJ 1/16 -CP
R656	06S15615Y25	RES,RK 101J 1/16 -CP
R657	06S15615Y21	RES,RK 68RJ 1/16 -CP
R658	06S15615Y21	RES,RK 68RJ 1/16 -CP
R659	06S15615Y21	RES,RK 68RJ 1/16 -CP
R660	06S15615Y21	RES,RK 68RJ 1/16 -CP
R661	06S15615Y21	RES,RK 68RJ 1/16 -CP
R662	06S15615Y21	RES,RK 68RJ 1/16 -CP
R663	06S15615Y21	RES,RK 68RJ 1/16 -CP
R664	06S15615Y21	RES,RK 68RJ 1/16 -CP
R665	06S15615Y21	RES,RK 68RJ 1/16 -CP
R666	06S15615Y21	RES,RK 68RJ 1/16 -CP
R667	06S15615Y21	RES,RK 68RJ 1/16 -CP
R668	06S15615Y21	RES,RK 68RJ 1/16 -CP
R669	06S15615Y21	RES,RK 68RJ 1/16 -CP
R670	06S15615Y21	RES,RK 68RJ 1/16 -CP
R671	06S15615Y21	RES,RK 68RJ 1/16 -CP
R672	06S15615Y21	RES,RK 68RJ 1/16 -CP
R673	06S15615Y21	RES,RK 68RJ 1/16 -CP
R674	06S15615Y01	RES,RK 10RJ 1/16 -CP
R675	06S15615Y09	RES,RK 22RJ 1/16 -CP
R676	06S15615Y21	RES,RK 68RJ 1/16 -CP
R677	06S15615Y21	RES,RK 68RJ 1/16 -CP
R678	06S15615Y21	RES,RK 68RJ 1/16 -CP
R679	06S15615Y21	RES,RK 68RJ 1/16 -CP
R680	06S15615Y21	RES,RK 68RJ 1/16 -CP
R681	06S15615Y25	RES,RK 101J 1/16 -CP
R682	06S15615Y21	RES,RK 68RJ 1/16 -CP
R683	06S15615Y25	RES,RK 101J 1/16 -CP
R684	06S15615Y25	RES,RK 101J 1/16 -CP
R685	06S15615Y25	RES,RK 101J 1/16 -CP
R686	06S15615Y25	RES,RK 101J 1/16 -CP

R687	06S15615Y25	RES,RK 101J 1/16 -CP
R688	06S15615Y25	RES,RK 101J 1/16 -CP
R689	06S15615Y25	RES,RK 101J 1/16 -CP
R690	06S15615Y25	RES,RK 101J 1/16 -CP
R691	06S15615Y25	RES,RK 101J 1/16 -CP
R692	06S15615Y25	RES,RK 101J 1/16 -CP
R693	06S15615Y25	RES,RK 101J 1/16 -CP
R694	06S15615Y25	RES,RK 101J 1/16 -CP
R695	06S15615Y25	RES,RK 101J 1/16 -CP
R696	06S15615Y25	RES,RK 101J 1/16 -CP
R697	06S15615Y81	RES,RK 223J 1/16 -CP
R698	06S15615Y81	RES,RK 223J 1/16 -CP
R699	06S45675W43	RES,RK JUMPER1/10-CP
R701	06S15616Y23	RES,RK JUMPER1/16-CP
R702	06S15616Y23	RES,RK JUMPER1/16-CP
R703	06S15615Y17	RES,RK 47RJ 1/16 -CP
R704	06S15616Y23	RES,RK JUMPER1/16-CP
R705	06S15616Y23	RES,RK JUMPER1/16-CP
R706	06S15615Y81	RES,RK 223J 1/16 -CP
R707	06S15615Y81	RES,RK 223J 1/16 -CP
R708	06S15615Y81	RES,RK 223J 1/16 -CP
R711	06S15616Y23	RES,RK JUMPER1/16-CP
R712	06S15615Y81	RES,RK 223J 1/16 -CP
R721	06S15615Y81	RES,RK 223J 1/16 -CP
R732	06S15615Y81	RES,RK 223J 1/16 -CP
R751	06S15615Y17	RES,RK 47RJ 1/16 -CP
R752	06S15615Y17	RES,RK 47RJ 1/16 -CP
R753	06S15615Y17	RES,RK 47RJ 1/16 -CP
R754	06S15615Y17	RES,RK 47RJ 1/16 -CP
R755	06S15615Y17	RES,RK 47RJ 1/16 -CP
R756	06S15615Y17	RES,RK 47RJ 1/16 -CP
R757	06S15615Y17	RES,RK 47RJ 1/16 -CP
R758	06S15615Y17	RES,RK 47RJ 1/16 -CP
R759	06S15615Y17	RES,RK 47RJ 1/16 -CP
R760	06S15615Y17	RES,RK 47RJ 1/16 -CP
R761	06S15615Y17	RES,RK 47RJ 1/16 -CP
R762	06S15615Y17	RES,RK 47RJ 1/16 -CP
R763	06S15615Y17	RES,RK 47RJ 1/16 -CP
R764	06S15615Y17	RES,RK 47RJ 1/16 -CP
R765	06S15615Y17	RES,RK 47RJ 1/16 -CP
R767	06S15615Y17	RES,RK 47RJ 1/16 -CP
R771	06S15615Y81	RES,RK 223J 1/16 -CP
R772	06S15615Y81	RES,RK 223J 1/16 -CP
R773	06S15615Y81	RES,RK 223J 1/16 -CP
R774	06S15615Y81	RES,RK 223J 1/16 -CP
R775	06S15615Y81	RES,RK 223J 1/16 -CP
R776	06S15615Y81	RES,RK 223J 1/16 -CP
R777	06S15615Y81	RES,RK 223J 1/16 -CP
R778	06S15615Y81	RES,RK 223J 1/16 -CP
R779	06S15615Y81	RES,RK 223J 1/16 -CP
R780	06S15615Y81	RES,RK 223J 1/16 -CP
R781	06S15615Y81	RES,RK 223J 1/16 -CP

R782	06S15615Y81	RES,RK 223J 1/16 -CP
R783	06S15615Y81	RES,RK 223J 1/16 -CP
R784	06S15615Y81	RES,RK 223J 1/16 -CP
R785	06S15615Y81	RES,RK 223J 1/16 -CP
R786	06S15615Y81	RES,RK 223J 1/16 -CP
R801	06S15615Y41	RES,RK 471J 1/16 -CP
R802	06S15615Y41	RES,RK 471J 1/16 -CP
R803	06S15615Y09	RES,RK 22RJ 1/16 -CP
R804	06S45675W43	RES,RK JUMPER1/10-CP
R805	06S65522Y17	RES,RK 2R2F 1/4 -CP
R806	06S45675W06	RES,RK 104J 1/10 -CP
R811	06S15615Y41	RES,RK 471J 1/16 -CP
R812	06S15615Y41	RES,RK 471J 1/16 -CP
R813	06S15615Y09	RES,RK 22RJ 1/16 -CP
R814	06S45675W43	RES,RK JUMPER1/10-CP
R815	06S65522Y17	RES,RK 2R2F 1/4 -CP
R816	06S45675W06	RES,RK 104J 1/10 -CP
R821	06S35083Y01	RES,RK 10RF 1/4 -CP
R822	06S35083Y01	RES,RK 10RF 1/4 -CP
R825	06S15616Y23	RES,RK JUMPER1/16-CP
R826	06S15616Y23	RES,RK JUMPER1/16-CP
R827	06S15616Y23	RES,RK JUMPER1/16-CP
R830	06S15615Y25	RES,RK 101J 1/16 -CP
R831	06S15615Y49	RES,RK 102J 1/16 -CP
R832	06S15615Y23	RES,RK 82RJ 1/16 -CP
R833	06S15615Y23	RES,RK 82RJ 1/16 -CP
R835	06S15615Y25	RES,RK 101J 1/16 -CP
R844	06S15616Y23	RES,RK JUMPER1/16-CP
R849	06S15616Y23	RES,RK JUMPER1/16-CP
R850	06S15616Y23	RES,RK JUMPER1/16-CP
R851	06S15616Y23	RES,RK JUMPER1/16-CP
R852	06S15616Y23	RES,RK JUMPER1/16-CP
R853	06S15616Y23	RES,RK JUMPER1/16-CP
R854	06S15616Y23	RES,RK JUMPER1/16-CP
R855	06S15615Y25	RES,RK 101J 1/16 -CP
R856	06S15615Y73	RES,RK 103J 1/16 -CP
R857	06S15615Y73	RES,RK 103J 1/16 -CP
R858	06S15615Y25	RES,RK 101J 1/16 -CP
R859	06S15615Y25	RES,RK 101J 1/16 -CP
R860	06S15615Y73	RES,RK 103J 1/16 -CP
R861	06S45674W02	RES,RK 2R7J 1/10 -CP
R862	06S45674W02	RES,RK 2R7J 1/10 -CP
R863	06S45674W02	RES,RK 2R7J 1/10 -CP
R864	06S45674W02	RES,RK 2R7J 1/10 -CP
R865	06S45674W02	RES,RK 2R7J 1/10 -CP
R866	06S45674W02	RES,RK 2R7J 1/10 -CP
R867	06S45674W02	RES,RK 2R7J 1/10 -CP
R868	06S45674W02	RES,RK 2R7J 1/10 -CP
R869	06S45674W02	RES,RK 2R7J 1/10 -CP
R870	06S45674W02	RES,RK 2R7J 1/10 -CP
R872	06S45675W45	RES,RK 1R0J 1/10 -CP
R873	06S45675W45	RES,RK 1R0J 1/10 -CP

R874	06S45675W45	RES,RK 1R0J 1/10 -CP
R875	06S45675W45	RES,RK 1R0J 1/10 -CP
R876	06S15615Y33	RES,RK 221J 1/16 -CP
R877	06S15615Y27	RES,RK 121J 1/16 -CP
R878	06S15615Y73	RES,RK 103J 1/16 -CP
R880	06S15616Y23	RES,RK JUMPER1/16-CP
R881	06S15615Y73	RES,RK 103J 1/16 -CP
R882	06S15615Y81	RES,RK 223J 1/16 -CP
R883	06S15615Y25	RES,RK 101J 1/16 -CP
R884	06S15615Y73	RES,RK 103J 1/16 -CP
R885	06S15615Y81	RES,RK 223J 1/16 -CP
R886	06S15615Y25	RES,RK 101J 1/16 -CP
R889	06S15615Y25	RES,RK 101J 1/16 -CP
R890	06S15615Y81	RES,RK 223J 1/16 -CP
R891	06S15616Y23	RES,RK JUMPER1/16-CP
R896	06S15615Y73	RES,RK 103J 1/16 -CP
R897	06S15615Y73	RES,RK 103J 1/16 -CP
R901	06S15616Y32	RES,RK 6R8J 1/16 -CP
R902	06-02713Z03	RES,RK 223D 1/16 -CP
R903	06-02713Z01	RES,RK 33RD 1/16 -CP
R904	06-02712Z01	RES,RK 121D 1/16 -CP
R905	06-02712Z04	RES,RK 471D 1/16 -CP
R906	06S15616Y23	RES,RK JUMPER1/16-CP
R907	06S15616Y23	RES,RK JUMPER1/16-CP
R911	06-02741Z01	RES,RK 331D 1/16 -CP
R912	06-02741Z01	RES,RK 331D 1/16 -CP
R913	06S15615Y09	RES,RK 22RJ 1/16 -CP
R914	06S45674W45	RES,RK 331J 1/10 -CP
R915	06S45674W45	RES,RK 331J 1/10 -CP
R921	06S15593Y37	RES,RK 331F 1/10 -CP
R922	06S15593Y37	RES,RK 331F 1/10 -CP
R923	06S15615Y09	RES,RK 22RJ 1/16 -CP
R924	06S45674W45	RES,RK 331J 1/10 -CP
R925	06S45674W45	RES,RK 331J 1/10 -CP
R926	06S15615Y31	RES,RK 181J 1/16 -CP
R927	06S45675W43	RES,RK JUMPER1/10-CP
SD801	48T75104Y01	DIO,SHT RB521G-30-CP
SD802	48T75104Y01	DIO,SHT RB521G-30-CP
TH601	48T75201Y03	TMT,NCP15XH103F0S-CP
TH602	48T75201Y03	TMT,NCP15XH103F0S-CP
XL601	91T75115Y01	XTL,FXO-64FL2 27M-E2
Z571	91T75196Y03	EMI,BK1005LL100 -CP
Z572	91T75196Y03	EMI,BK1005LL100 -CP
Z573	91T75196Y03	EMI,BK1005LL100 -CP
Z574	91T75196Y03	EMI,BK1005LL100 -CP
Z575	91T75196Y15	EMI,BK1005HM121 -CP
Z576	91T75196Y15	EMI,BK1005HM121 -CP
Z577	91T75196Y15	EMI,BK1005HM121 -CP
Z578	91T75196Y15	EMI,BK1005HM121 -CP
Z579	91T75196Y15	EMI,BK1005HM121 -CP
Z580	91T75196Y15	EMI,BK1005HM121 -CP
Z581	91T75196Y24	EMI,BK1005LL241 -CP

Z582	91T75196Y03	EMI,BK1005LL100 -CP
Z583	91T75196Y03	EMI,BK1005LL100 -CP
Z584	91T75196Y03	EMI,BK1005LL100 -CP
Z585	91T75196Y03	EMI,BK1005LL100 -CP
Z586	91T75196Y03	EMI,BK1005LL100 -CP
Z840	91T75196Y13	EMI,BK1005HS241 -CP
Z841	91T75196Y13	EMI,BK1005HS241 -CP
Z842	91T75196Y13	EMI,BK1005HS241 -CP
Z843	91T75196Y13	EMI,BK1005HS241 -CP
Z845	91T75196Y13	EMI,BK1005HS241 -CP
Z846	91T75196Y13	EMI,BK1005HS241 -CP
Z847	91T75196Y13	EMI,BK1005HS241 -CP
Z848	91T75196Y13	EMI,BK1005HS241 -CP
ZD901	48T55269Y01	DIO,ZEN LM4041CIM3CP

=======Miscellaneous

ET102	01T04219K02	ASSY,RCA WIRE5207
ET801	01T04220K01	ASSY,WIRE PWR RV5210
JK501	09T75358W02	JAC,HSJ1102-01-520DB
SW401	40T65353Y01	SW,TACT SKRPACE010E2
SW402	40T65353Y01	SW,TACT SKRPACE010E2

=======DV37M150

HD101	EP-00830Z01	ED21A51L
M101	59-01510Z01	MOTOR,M1N10FB95G
M102	59-02071Z01	MOTOR,24C0303020
M103	59T65142Y01	MOTOR,MSDV020L01
SW406	40T15494Y12	SW,DETCT SPVG2303-E6
SW801	40T55230Y01	SW,DETCT ESE13V01CE5
SW802	40T55230Y01	SW,DETCT ESE13V01CE5
SW803	40T55043Y02	SW,DETCT SPVL12 -E5
SW804	40T15494Y12	SW,DETCT SPVG2303-E6
SW805	40T55230Y01	SW,DETCT ESE13V01CE5

DVD Deck Mechanism Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

2	01A51490Y23	ASSY,RIV GUIDE TOP
3	- - - - - - - - - - -	CHASSIS,TOP
4	41A60338Y01	SPRING,DRIVE F-L
5	41A60339Y01	SPRING,DRIVE F-R
6	41A60340Y01	SPRING,DRIVE R
7	41A60344Y01	SPRING,LEV ROLL-L
8	03S94385F19	SCR,NYLOK M2X2.5
9	43-01050Z02	ROLLER,DISC PIN
12	14-01064Z01	INSULATOR,PWB L2
13	- - - - - - - - - - -	ASSY,RIV CHAS BASE
14	45C51003Y10	LEVER,TRIGER MAIN
15	41A51395Y01	SPRING,LEV TRG MAIN
16	45A50833Y11	LEVER,LINK SLDR(R)
17	45B51221Y11	SLIDER,LOCK(R2)
18	41A51396Y01	SPRING,SLD LOCK(R2)
19	45C51237Y10	SLIDER,LOCK(R1)
20	44-02002Z02	GEAR,LOAD (E2)
21	45-01051Z02	SLIDER,DISC SW(L)
22	45-01052Z02	SLIDER,DISC SW(R)
23	45B50838Y11	LEVER,LOCK(RC)
24	41A60343Y01	SPRING,LEV LOCK-RC
26	41-02948Z01	SPRING,LEV DISC
27	04B41345P14	WASH,L. 2.1X4X0.25
28	75C60456Y03	DAMPER,DV-TM
29	75C60456Y02	DAMPER,DV-TM
30	14A51712Y01	INSULATOR,FPC
31	03S94385F07	SCR,NYLOK M2X2
32	45D51236Y10	SLIDER,LOCK(L)
33	01A51491Y11	ASSY,RIV LEV ASST
34	44-02001Z03	ASSY,SLIDER TRIGER 2
35	41A60348Y01	SPRING,SLD TRIGER
36	04B41345P15	WASH,1.2X3.5X0.35
37	49A51397Y03	ROLLER,DV-TM
38	43A51228Y11	BUSH,ARM GUIDE
39	45-02722Z02	LEVER,ROLLER(L)2
40	45-02723Z02	LEVER,ROLLER(R)2
41	41A60360Y01	SPRING,ARM GUIDE
42	45-01385Z02	ARM,DISC GUIDE
43	45B60959Y11	ARM,DISC GUIDE-L
44	45B60960Y11	ARM,DISC GUIDE-R
45	04S40075G09	WASH,2.6X4.7X0.25
46	14A61435Y01	INSULATOR,ARM DISC
47	47A51349Y01	SHAFT,ROLLER
48	44-01531Z02	GEAR,ROLLER-2
49	04B41345P02	WASH,1.7X3.5X0.25
50	07-01606Z02	ASSY,RIV BKT LD-F-3
51	47-01479Z01	SHAFT,LOAD
52	44A50827Y11	GEAR,LOAD(C)
53	44-01532Z02	GEAR,LOAD(F)-2
54	84-01207Z01	FPC,LOAD
55	07-01177Z02	ASSY,RIV BKT LOAD(R)
56	01A51487Y11	ASSY,RIV BKT LD-R2

57	44A50825Y11	GEAR,LOAD(A)
58	44A50826Y11	GEAR,LOAD(B)
59	07B51226Y11	BKT,SHAFT LOAD
60	03S30688Y17	SCR,MCH M1.4X2
61	04B41345P11	WASH,1.2X2.5X0.25
62	45B51235Y10	SLIDER,ARM LIFT(R)
63	41A60336Y01	SPRING,CLAMP-R
64	41A60335Y01	SPRING,CLAMP-L
65	41A60337Y01	SPRING,CLAMP-RTL
66	- - - - - - - - - - -	ASSY,RIV ARM CLAMP
67	43-01054Z02	STOPPER,CLAMP
68	43-01049Z02	TABLE,CLAMPER
69	- - - - - - - - - - -	ASSY,RIV CHAS PICKUP
70	07-01053Z02	BKT,SPINDLE ADJUST
72	07A50823Y11	BKT,SHAFT PICKUP
73	47A51347Y01	SHAFT,PICKUP MAIN
74	47-01057Z01	SHAFT,PICKUP SUB
75	41B50836Y11	SPRING,NUT
76	15A51210Y11	COVER,MAIN
77	03S94385F09	SCR,NYLOK M2X3 P2
78	45C51234Y02	SLIDER,8CM
79	01B61577Y10	ASSY,RIV LEVER-8L
80	45A51231Y10	LEVER,TRIGER 8CM
81	45-02638Z02	LEVER,TRIGER SUB2
82	41A51394Y01	SPRING,LEV 8CM(L)
83	41A60346Y01	SPRING,LEV TRG-SUB
84	41A60347Y01	SPRING,SLD 8CM
86	07A60069Y11	BKT,SLIDER 8CM
87	15B61279Y11	SPACER,DAMPER
88	03S94385F98	SCR,NYLOK M2X2.5
89	14-01063Z01	INSULATOR,PWB R2

(DV37M150)

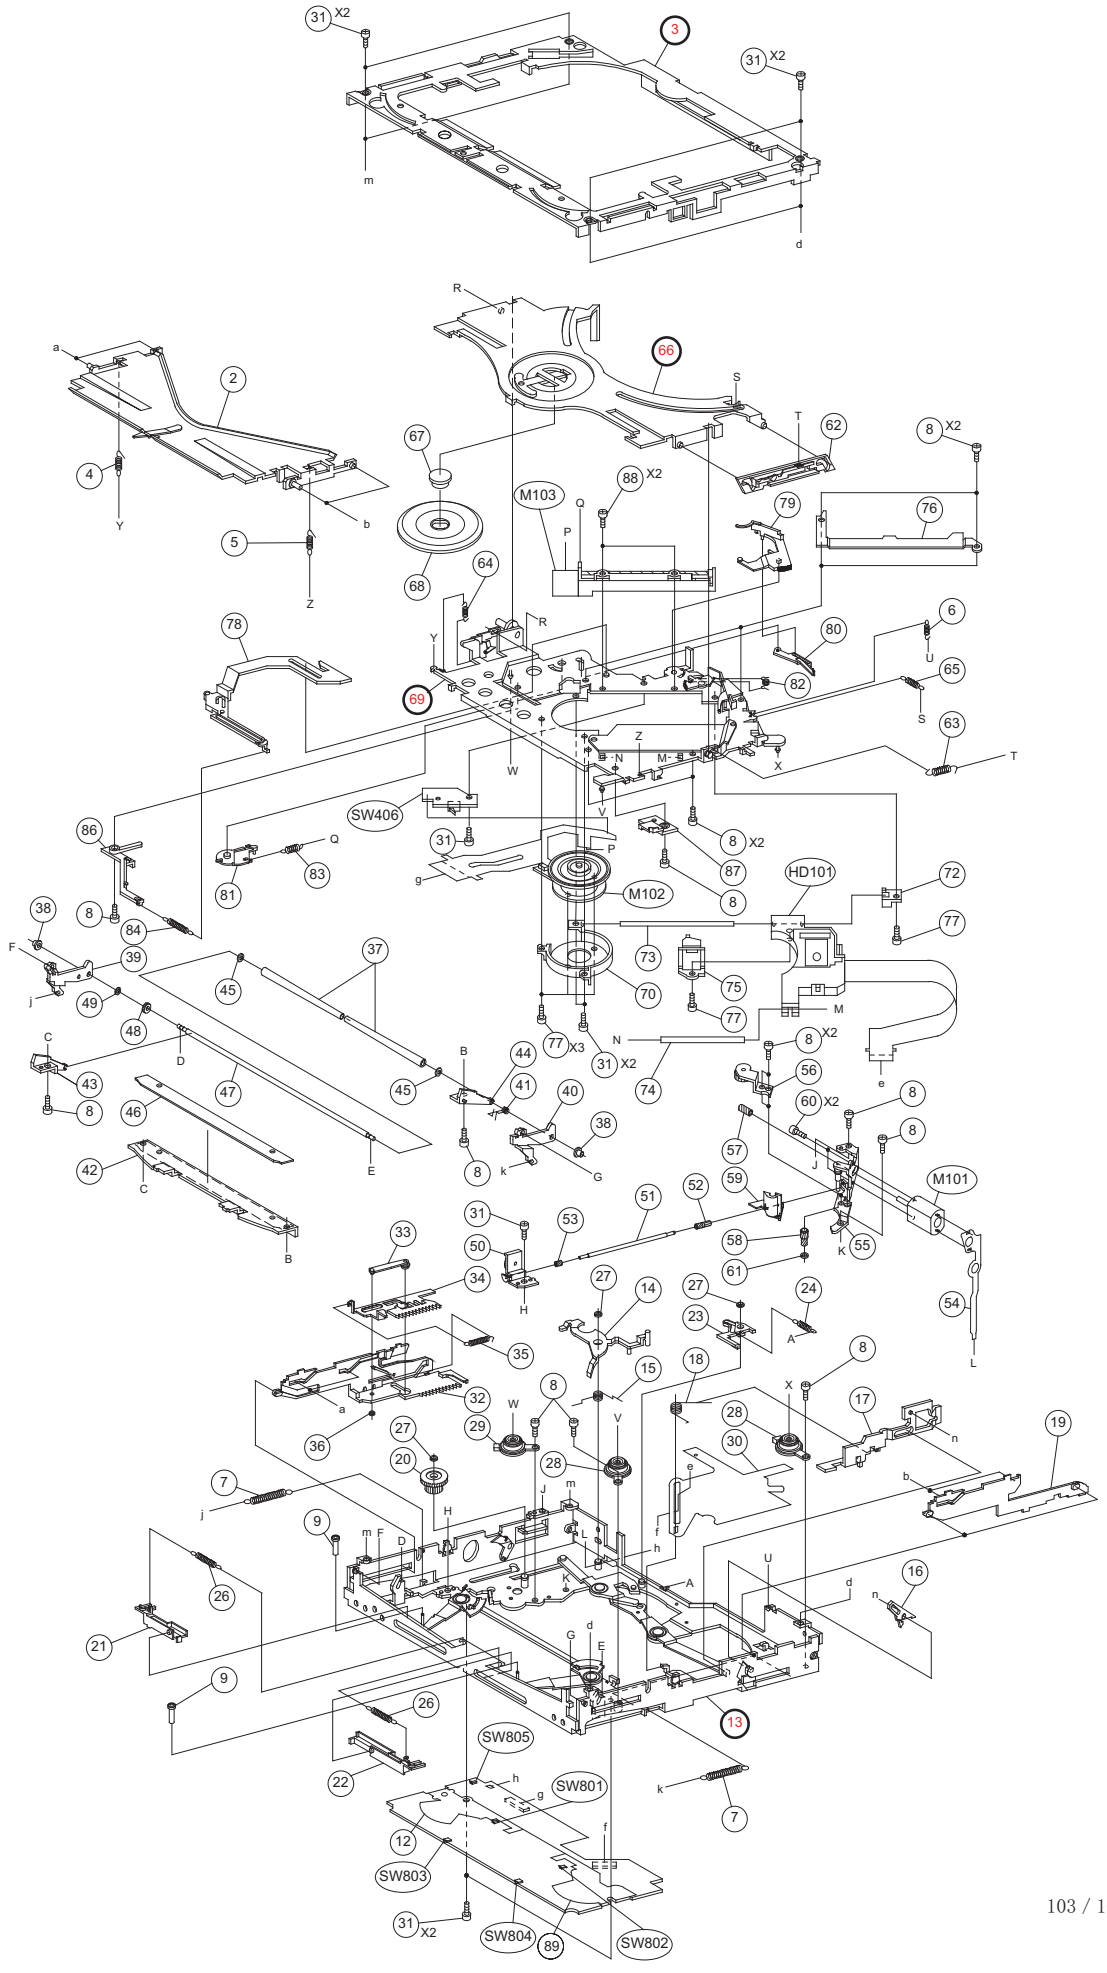

31 X2
3
31 X2
m
d
R
66
S
T
62
8 X2
a
2
67
4
Y
b
5
Z
68
M103
88 X2
Q
P
79
76
64
78
Y
R
80
6
U
65
69
82
S
63
T
Z
N
M
X
W
SW406
V
86
31
8 X2
87
Q
83
81
g
P
M102
8
HD101
72
38
8
84
77
F
39
37
73
75
j
49
45
70
77
M
48
C
D
77 X3
N
31 X2
8 X2
B
44
74
56
43
47
45
41
40
60 X2
8
8
46
38
57
8
42
C
E
8
k
G
J
M101
B
51
52
59
31
53
33
50
58
K
55
34
H
61
27
14
27
24
54
23
A
L
35
15
18
8
a
32
W
8
X
17
36
29
V
28
30
n
19
27
20
28
e
b
7
j
H
J
m
9
m
F
D
L
f
h
26
K
A
U
16
d
n
21
G
d
E
9
26
13
SW805
22
h
g
SW801
k
7
12
f
SW803
31 X2
SW804
89
SW802