


EXPLODED VIEW / PARTS LIST


Escutcheon section

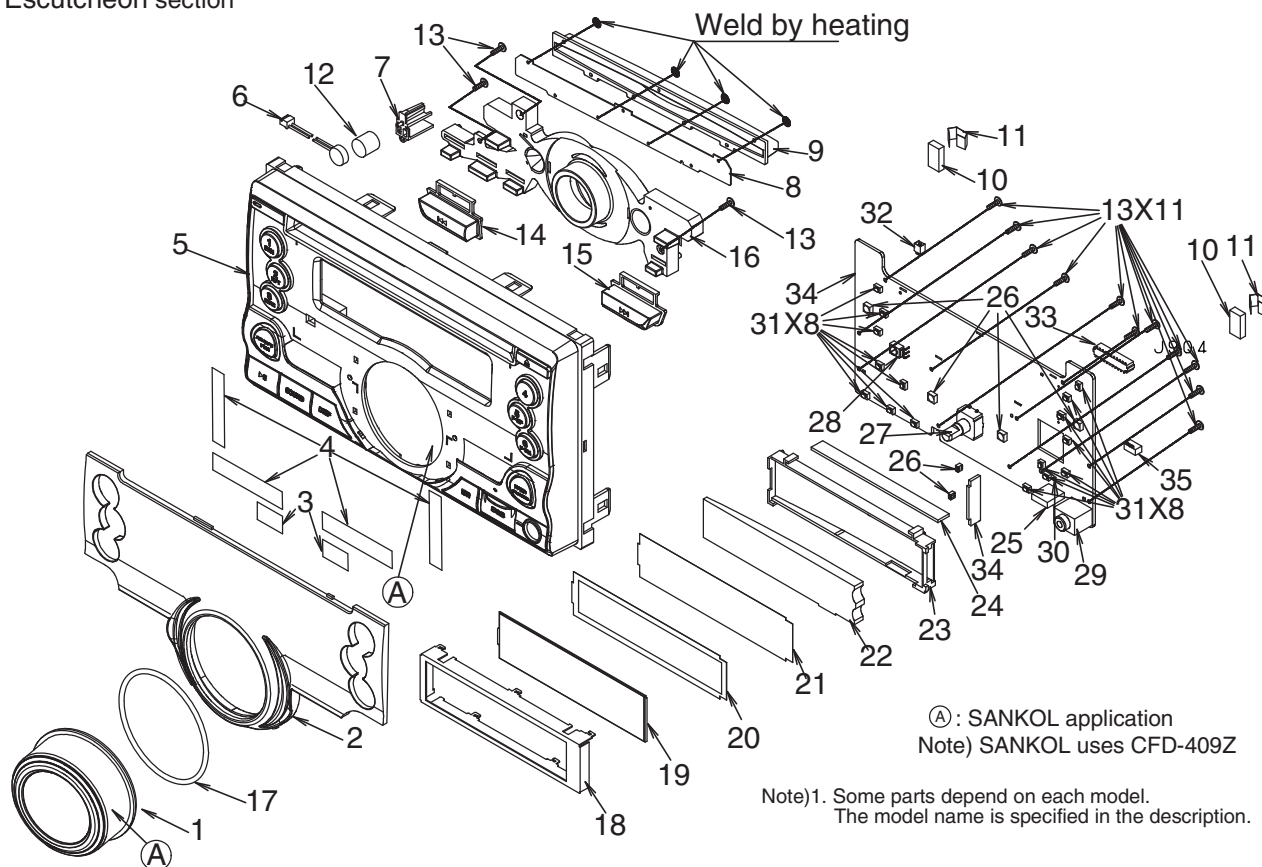

NO.	PART NO.	DESCRIPTION	Q'TY
1	947-0785-00	KNOB ASSY	1
2	947-0784-00	DIAL ASSY	1
3	347-8918-00	DOUBLE FACE	2
4	347-8298-00	DOUBLE FACE	4
5	940-8602-00	ES ASSY(PE-3402B-A)	1
	940-8602-08	ES ASSY(PE-3402B-B)	1
	940-8602-02	ES ASSY(PE-3402K-A)	1
	940-8602-07	ES ASSY(PE-3402K-B)	1
6	081-0040-00	MICRIPHONE	1
7	382-9582-00	BUTTON(RESET)	1
8	346-0209-00	LEATHER SHEET	1
9	371-3827-03	TRIM PLATE	1
10	345-5312-00	CUSHION	2
11	347-7321-00	E-SHEET	2
12	345-6422-00	SPONGE	1
13	716-0872-51	SPECIAL SCREW(M1.7x5)	14
14	382-9580-00	BUTTON(FW)	1
15	382-9579-00	BUTTON(FF)	1
16	335-9044-00	ILLUMI(MID)	1
17	347-8968-00	FILM	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	331-5080-00	LCD COVER	1
19	379-1457-51	INDICATOR(LCD)	1
20	347-8922-00	BLACK FILM	1
21	347-8921-00	WHITE FILM	1
22	335-9037-00	LCD ILLUMI	1
23	335-9038-00	LCD HOLDER	1
24	345-6526-00	RUBBER PART	1
25	074-4036-50	USB JACK(PE-3402B-A/K-B)	1
26	001-7088-92	DIODE	6
27	016-9900-94	VR W/SHAFT	1
28	060-4021-00	IR-RECEIVER	1
29	075-9021-50	AUX JACK	1
30	001-7062-90	DIODE	1
31	013-6312-50	TACT SWITCH	16
32	076-0478-52	PLUG(2P)	1
33	074-3014-72	OUTLET SOCKET(22P)	1
34	-----	SWITCH PWB1	1
	-----	SWITCH PWB2	1
35	076-0502-55	PLUG(5P)(PE-3402B-A/K-B)	1

Main section

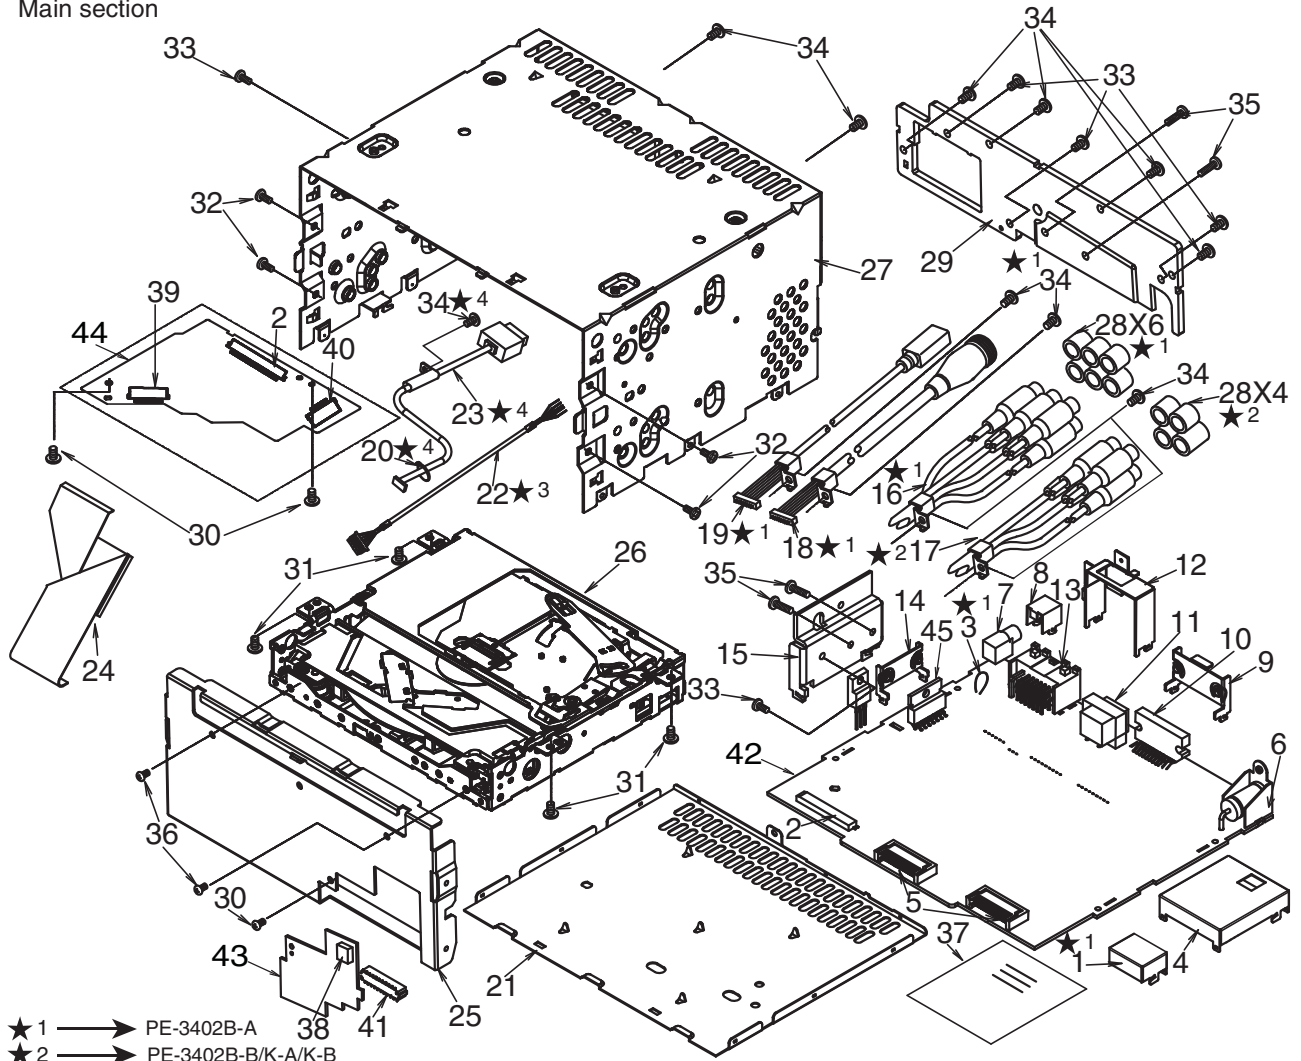

- ★ 1 → PE-3402B-A
★ 2 → PE-3402B-B/K-A/K-B
★ 3 → PE-3402B-A/K-B ★ 4 → PE-3402B-B/K-A

NO.	PART NO.	DESCRIPTION	Q'TY
1	331-2869-00	SHIELD CASE ★ 1	1
2	074-2226-90	OUTLET SOCKET(40P)	2
3	321-0969-00	CLAMP ★ 1	1
4	331-4794-00	TUNER BRKT	1
5	076-0648-22	PLUG(22P)	2
6	092-4000-51	ANT-RECEPT	1
7	075-0393-50	JACK	1
8	331-4533-00	JACK HOLDER	1
9	331-3459-00	IC HOLDER	1
10	051-2074-00	IC	1
11	009-9006-60	CHOKE	1
12	331-4749-01	CONNECTOR HOLDER	1
13	074-1214-50	OUTLET SOCKET(16P)	1
14	331-5081-00	IC HOLDER	1
15	313-2039-03	HEAT SINK	1
16	855-5562-51	RCA PIN CORD(6CH) ★ 1	1
17	855-5585-50	RCA PIN CORD(4CH) ★ 2	1
18	855-2508-50	SSP MINI DIN CORD ★ 1	1
19	855-2507-50	HD MINI DIN CORD ★ 1	1
20	335-0833-01	LEAD HOLDER ★ 4	1
21	311-1859-08	LOWER CASE	1
22	854-4620-50	USB LEAD ★ 3	1
23	855-0642-50	USB CABLE ★ 4	1
24	816-3063-55	FLAT WIRE	1
25	331-4537-02	ES PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
26	929-5110-80	CD-MECH-MODULE	1
27	310-1973-00	UPPER CASE	1
28	345-3799-20	RUBBER PART ★ 1	6
	345-3799-20	RUBBER PART ★ 2	4
29	313-2006-14	HEAT SINK	1
30	716-1670-01	SCREW(M2X4)	3
31	714-2603-8B	MACHINE SCREW(M2.6x3)	4
32	714-2606-8B	MACHINE SCREW(M2.6x6)	4
33	714-3006-8B	MACHINE SCREW(M3x6)	5
34	731-3008-89	TAPTIGHT(M3X8)	9
35	714-2610-8B	MACHINE SCREW(M2.6x10)	4
36	731-2604-8H	TAPTIGHT(M2.6X4)	2
37	276-0793-00	SETPLATE(PE-3402B-A)	1
	276-0861-00	SETPLATE(PE-3402B-B)	1
	276-0832-00	SETPLATE(PE-3402K-A)	1
	276-0860-00	SETPLATE(PE-3402K-B)	1
38	060-8105-50	ANT RECEPT	1
39	074-2215-65	OUTLET SOCKET(15P)	1
40	074-2215-60	OUTLET SOCKET(10P)	1
41	074-3014-72	OUTLET SOCKET(22P)	1
42	-----	MAIN PWB	1
43	-----	BT PWB	1
44	-----	MECH PWB	1
45	051-3730-00	IC	1

ELECTRICAL PARTS LIST

Note)1. Some parts depend on each model.
The model name is specified in the description.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT201	092-4000-51	ANTENNA RECEPT	C214	168-1052-78	16V 1uF	C420	187-2263-35	16V 22uF
C101	187-1073-35	16V 100uF	C215	168-1032-55	0.01uF K	C421	043-1735-90	100pF CH
C102	187-1073-35	16V 100uF	C216	168-1032-55	0.01uF K	C422	043-1735-90	100pF CH
C103	043-1735-90	100pF CH	C217	168-1042-78	16V 0.1uF	C423	043-1735-90	100pF CH
C104	043-1835-90	3900pF	C218	168-2242-58	0.22uF B	C424	043-1735-90	100pF CH
C105	043-1619-90	0.068uF	C219	168-2232-55	0.022uF K	C425	178-4742-78	0.47uF
C106	168-1022-55	1000pF K	C220	177-1062-78	10pF	C426	187-1053-65	50V 1uF
C107	043-1735-90	100pF CH	C221	168-1042-78	16V 0.1uF	C427	172-1041-11	0.1uF
C108	189-1083-32	16V 1000uF	C222	168-1042-78	16V 0.1uF	C428	042-1447-00	16V 2200uF
C109	043-1719-90	22pF CH	C223	166-1201-50	12pF CH	D100	001-4301-41	HZU 7.5B2
C110	043-1802-90	0.01uF	C247	166-1201-50	12pF CH	D101	001-1323-90	L1SS355T1G
C111	043-1719-90	22pF CH	C249	168-1042-78	16V 0.1uF	D106	001-1310-00	KDS160-RTK
C112	042-1577-00	6.3V 100uF	C301	043-1838-90	4700pF	D107	001-4301-26	HZU4.7B2
C113	168-1042-78	16V 0.1uF	C302	043-1841-90	0.047uF	D109	001-0466-61	1A4
C114	168-3332-78	0.033uF K	C303	043-1838-90	4700pF	D110	001-4301-26	HZU4.7B2
C115	168-1042-78	16V 0.1uF	C304	187-1063-35	16V 10uF	D111	001-0466-61	1A4
C116	187-1073-35	16V 100uF	C305	187-1063-35	16V 10uF	D112	001-1310-00	KDS160-RTK
C117	043-1802-90	0.01uF	C308	187-1053-65	50V 1uF	D113	001-1310-00	KDS160-RTK
C118	043-1802-90	0.01uF	C309	187-1053-65	50V 1uF	D121	001-0466-61	1A4
C119	043-1800-90	1000pF	C310	187-1053-65	50V 1uF	D160	001-1310-00	KDS160-RTK
C120	168-1032-55	0.01uF K	C311	187-1053-65	50V 1uF	D203	001-2630-90	1SS420-TPL3,F
C121	187-2253-65	50V 2.2uF	C314	187-1063-35	16V 10uF	D303	001-4316-17	LM3Z4V3T1G
C123	043-1804-90	0.1uF	C315	187-1063-35	16V 10uF	D401	001-4316-24	LM3Z8V2T1G
C124	187-2273-15	6.3V 220uF	C316	187-1063-35	16V 10uF	D403	001-1310-00	KDS160-RTK
C125	043-1735-90	100pF CH	C317	187-1063-35	16V 10uF	D404	001-1310-00	KDS160-RTK
C126	187-1063-35	16V 10uF	C318	187-1063-35	16V 10uF	D405	001-1310-00	KDS160-RTK
C127	187-2253-65	50V 2.2uF	C319	187-1063-35	16V 10uF	D406	001-0592-61	1N5404
C128	187-1063-35	16V 10uF	C320	043-1804-90	0.1uF	D601	001-0529-20	MA8039-L
C129	187-1053-65	50V 1uF	C321	043-1804-90	0.1uF	IC101	-----	LC88F40HOPAU-QIP (Software should be written on production) (034900-052)
C130	043-1735-90	100pF CH	C322	187-4763-15	6.3V 47uF	IC102	051-3218-90	TA76431F
C131	043-1841-90	0.047uF	C324	043-1723-90	33pF CH	IC103	-----	24LC256I-SN (E2PROM Data should be written on production) (942990-051)
C132	043-1804-90	0.1uF	C325	043-1804-90	0.1uF	IC104	051-5438-08	S-80830CN
C133	187-1073-35	16V 100uF	C326	043-1804-90	0.1uF	IC105	051-5437-58	R3111N211A
C134	187-1073-35	16V 100uF	C327	043-1804-90	0.1uF	IC106	051-3535-90	MM3144ANRE
C135	187-3363-45	25V 33uF	C328	043-1804-90	0.1uF	IC107	051-3730-00	LV5680P
C136	187-1063-35	16V 10uF	C329	187-1063-35	16V 10uF	IC108	051-3577-90	S-1206B33-U3TIG
C138	187-1063-35	16V 10uF	C330	043-1804-90	0.1uF	IC201	051-4028-90	TEF6606
C139	187-1063-35	16V 10uF	C331	043-1800-90	1000pF	IC301	051-3060-90	AZ4558M
C140	168-2242-58	0.22uF B	C333	187-1063-35	16V 10uF	IC302	051-5048-90	NJW1222
C141	043-1804-90	0.1uF	C334	187-1063-35	16V 10uF	IC303	051-3060-90	AZ4558M
C145	043-1802-90	0.01uF	C335	187-1063-35	16V 10uF	IC307	051-3059-90	NJM2120M
C147	187-1053-65	50V 1uF	C336	043-1804-90	0.1uF	IC402	051-2074-00	LV47017P
C148	043-1804-90	0.1uF	C337	043-1804-90	0.1uF	J100	075-0393-50	3P
C149	043-1804-90	0.1uF	C338	187-4763-35	16V 47uF	J102	076-0648-22	22P
C150	043-1804-90	0.1uF	C339	043-1735-90	100pF CH	J105	074-2226-90	40P
C151	165-1063-35	16V 10uF	C340	043-1735-90	100pF CH	J301	076-0648-22	22P
C152	043-1804-90	0.1uF	C341	187-1053-65	50V 1uF	J401	074-1214-50	16P
C153	168-2242-58	0.22uF B	C342	187-1053-65	50V 1uF	L102	010-3100-66	2.2uH
C154	187-1063-35	16V 10uF	C343	043-1735-90	100pF CH	L103	010-3100-66	2.2uH
C156	168-2242-58	0.22uF B	C344	043-1735-90	100pF CH	L104	010-3100-66	2.2uH
C157	187-1063-35	16V 10uF	C345	043-1735-90	100pF CH	L105	010-3407-59	5.6uH J
C158	168-2242-58	0.22uF B	C346	043-1735-90	100pF CH	L106	010-3105-67	1.5k ohm/100kHz
C159	168-2242-58	0.22uF B	C360	043-1819-90	2200pF	L201	010-2003-04	30uH
C160	187-1063-35	16V 10uF	C361	043-1819-90	2200pF	L202	010-3406-50	1uH J
C161	168-2242-58	0.22uF B	C364	043-1806-90	1pF	L203	010-3406-53	1.8uH J
C162	165-1063-35	16V 10uF	C365	043-1806-90	1pF	L204	010-3406-43	0.27uH J
C201	166-2096-50	2pF CK	C366	043-1715-90	15pF CH	L205	010-3062-54	LQH31HNR2
C202	166-2201-50	22pF CH	C367	043-1806-90	1pF	L206	010-4054-00	#886ANS-0904QH
C203	168-1022-55	1000pF K	C370	187-4763-15	6.3V 47uF	L207	010-3072-90	560uH
C204	168-1022-55	1000pF K	C371	187-1073-35	16V 100uF	L208	010-3072-90	560uH
C205	166-1201-50	12pF CH	C372	187-2273-15	6.3V 220uF	L209	010-3105-62	1k ohm/100MHz
C206	168-1032-55	0.01uF K	C409	178-4742-78	0.47uF			
C207	168-1032-55	0.01uF K	C410	178-4742-78	0.47uF			
C208	168-1052-78	16V 1uF	C411	178-4742-78	0.47uF			
C209	168-2242-58	0.22uF B	C412	178-4742-78	0.47uF			
C210	166-1501-50	15pF CH	C415	187-1063-35	16V 10uF			
C211	166-3901-50	39pF CH	C417	187-1063-35	16V 10uF			
C212	168-2242-58	0.22uF B	C418	187-1063-35	16V 10uF			
C213	168-1042-78	16V 0.1uF	C419	187-1063-35	16V 10uF			

CX501/CX501B/CX501A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
L210	010-3105-62	1k ohm/100MHz	R131	119-1031-15	1/10W 10k ohm	R311	032-0140-89	1/10W 47k ohm F
L213	010-3407-58	4.7uH J	R132	119-3321-15	1/10W 3.3k ohm	R312	032-0140-89	1/10W 47k ohm F
L214	010-2198-87	82NH	R133	032-0140-56	1/10W 12k ohm F	R313	119-1021-15	1/10W 1k ohm
L302	010-3105-62	1k ohm/100MHz	R134	119-2241-15	1/10W 220k ohm	R314	119-1021-15	1/10W 1k ohm
L303	010-3104-54	600 ohm/100MHz	R135	032-0215-59	1/10W 3.9k ohm(F)	R315	119-0000-05	1/10W 0 ohm JW
Q101	125-9017-92	UMD3N-TR	R136	119-1031-15	1/10W 10k ohm	R316	032-0140-89	1/10W 47k ohm F
Q102	103-2394-00	2SD2394	R137	119-1041-15	1/10W 100k ohm	R317	032-0140-89	1/10W 47k ohm F
Q104	190-1576-00	2SA1576A	R138	119-2241-15	1/10W 220k ohm	R318	119-1031-15	1/10W 10k ohm
Q105	125-2027-92	DTC124EUA	R139	119-5621-15	1/10W 5.6k ohm	R319	119-1031-15	1/10W 10k ohm
Q106	125-3015-90	3CG1298	R14	119-1541-15	1/10W 150k ohm	R320	119-1031-15	1/10W 10k ohm
Q109	125-2027-91	DTC114EUA	R140	119-2231-15	1/10W 22k ohm	R321	119-1031-15	1/10W 10k ohm
Q110	125-0021-92	DTA124EUA	R141	032-0140-52	1/10W 33k ohm F	R322	032-0140-89	1/10W 47k ohm F
Q111	125-4024-90	3DG3875	R142	032-0215-58	1/10W 24k ohm(F)	R323	119-5631-15	1/10W 56k ohm
Q112	125-2041-93	RT1N241M	R143	032-0140-80	1/10W 18k ohm F	R324	119-5631-15	1/10W 56k ohm
Q113	125-4024-90	3DG3875	R144	119-4731-15	1/10W 47k ohm	R325	032-0140-89	1/10W 47k ohm F
Q114	190-1576-00	2SA1576A	R145	116-1521-15	1/4W 1.5k ohm	R326	119-3311-15	1/10W 330 ohm
Q115	131-1260-00	2SB1260	R146	119-4731-15	1/10W 47k ohm	R327	119-5631-15	1/10W 56k ohm
Q116	125-2027-92	DTC124EUA	R147	119-4731-15	1/10W 47k ohm	R328	119-5631-15	1/10W 56k ohm
Q117	125-0021-95	DTA143ZUA-T106	R148	116-1521-15	1/4W 1.5k ohm	R329	119-1011-15	1/10W 100 ohm
Q118	125-2027-92	DTC124EUA	R149	116-4721-15	1/4W 4.7k ohm	R330	119-1011-15	1/10W 100 ohm
Q119	125-0021-95	DTA143ZUA-T106	R150	119-1031-15	1/10W 10k ohm	R331	119-1011-15	1/10W 100 ohm
Q120	190-1576-00	2SA1576A	R151	119-6831-15	1/10W 68k ohm	R332	119-1011-15	1/10W 100 ohm
Q122	125-2027-92	DTC124EUA	R152	119-4721-15	1/10W 4.7k ohm	R333	119-1011-15	1/10W 100 ohm
Q123	131-1260-00	2SB1260	R153	119-1031-15	1/10W 10k ohm	R334	119-1011-15	1/10W 100 ohm
Q124	125-2041-93	RT1N241M	R171	119-6831-15	1/10W 68k ohm	R337	119-0000-05	1/10W 0 ohm JW
Q401	198-3018-00	2SK3018	R172	119-4731-15	1/10W 47k ohm	R338	119-0000-05	1/10W 0 ohm JW
Q403	192-4081-00	2SC4081	R174	119-1021-15	1/10W 1k ohm	R358	119-3311-15	1/10W 330 ohm
Q404	125-2027-95	DTC143ZU	R181	119-0000-05	1/10W 0 ohm JW	R359	119-3311-15	1/10W 330 ohm
Q405	125-0021-95	DTA143ZUA-T106	R184	119-0000-05	1/10W 0 ohm JW	R363	119-1011-15	1/10W 100 ohm
Q406	125-2198-90	KRC110S	R187	116-1521-15	1/4W 1.5k ohm	R364	119-1021-15	1/10W 1k ohm
Q409	125-4012-90	KTD1304	R188	119-1031-15	1/10W 10k ohm	R365	119-1021-15	1/10W 1k ohm
Q410	125-4012-90	KTD1304	R193	119-4721-15	1/10W 4.7k ohm	R369	119-1031-15	1/10W 10k ohm
Q411	125-4012-90	KTD1304	R194	119-0000-05	1/10W 0 ohm JW	R370	119-1031-15	1/10W 10k ohm
Q412	125-4012-90	KTD1304	R195	119-0000-05	1/10W 0 ohm JW	R371	119-4731-15	1/10W 47k ohm
Q413	125-2027-95	DTC143ZU	R196	119-4721-15	1/10W 4.7k ohm	R375	119-2221-15	1/10W 2.2k ohm
Q417	192-4081-00	2SC4081	R197	119-1041-15	1/10W 100k ohm	R378	119-1031-15	1/10W 10k ohm
R101	116-6811-15	1/4W 680 ohm	R199	119-1031-15	1/10W 10k ohm	R379	119-1031-15	1/10W 10k ohm
R102	116-6811-15	1/4W 680 ohm	R200	119-1041-15	1/10W 100k ohm	R404	119-4721-15	1/10W 4.7k ohm
R103	119-0000-05	1/10W 0 ohm JW	R201	119-4741-15	1/10W 470k ohm	R406	119-1021-15	1/10W 1k ohm
R104	119-1031-15	1/10W 10k ohm	R202	119-4741-15	1/10W 470k ohm	R407	119-8221-15	1/10W 8.2k ohm
R105	119-1041-15	1/10W 100k ohm	R203	119-1011-15	1/10W 100 ohm	R408	119-1021-15	1/10W 1k ohm
R106	119-1031-15	1/10W 10k ohm	R204	119-0000-05	1/10W 0 ohm JW	R409	119-2231-15	1/10W 22k ohm
R107	119-1811-15	1/10W 180 ohm	R206	119-0000-05	1/10W 0 ohm JW	R411	119-4711-15	1/10W 470 ohm
R108	119-4721-15	1/10W 4.7k ohm	R207	119-0000-05	1/10W 0 ohm JW	R412	119-1031-15	1/10W 10k ohm
R109	119-1811-15	1/10W 180 ohm	R208	119-4721-15	1/10W 4.7k ohm	R415	119-2231-15	1/10W 22k ohm
R110	119-1031-15	1/10W 10k ohm	R209	116-2201-15	1/4W 22 ohm	R416	119-2231-15	1/10W 22k ohm
R111	119-1031-15	1/10W 10k ohm	R210	119-1011-15	1/10W 100 ohm	R417	119-2231-15	1/10W 22k ohm
R112	119-2221-15	1/10W 2.2k ohm	R211	119-1011-15	1/10W 100 ohm	R418	119-2231-15	1/10W 22k ohm
R113	032-0140-54	1/10W 22k ohm F	R229	119-0000-05	1/10W 0 ohm JW	R420	119-3311-15	1/10W 330 ohm
R114	119-1031-15	1/10W 10k ohm	R235	119-0000-05	1/10W 0 ohm JW	R421	119-3311-15	1/10W 330 ohm
R115	032-0140-54	1/10W 22k ohm F	R272	119-0000-05	1/10W 0 ohm JW	R422	119-3311-15	1/10W 330 ohm
R116	119-5641-15	1/10W 560k ohm	R274	119-0000-05	1/10W 0 ohm JW	R424	119-3311-15	1/10W 330 ohm
R118	119-4721-15	1/10W 4.7k ohm	R275	119-0000-05	1/10W 0 ohm JW	R426	119-1021-15	1/10W 1k ohm
R12	033-0000-05	1/10W 0 ohm	R276	119-0000-05	1/10W 0 ohm JW	R427	119-1021-15	1/10W 1k ohm
R120	119-4731-15	1/10W 47k ohm	R277	119-0000-05	1/10W 0 ohm JW	R428	119-1031-15	1/10W 10k ohm
R121	119-1031-15	1/10W 10k ohm	R3	032-0140-70	1/10W 1.8k ohm F	R429	116-4721-15	1/4W 4.7k ohm
R122	119-1031-15	1/10W 10k ohm	R301	119-1041-15	1/10W 100k ohm	R430	119-6831-15	1/10W 68k ohm
R123	119-1811-15	1/10W 180 ohm	R302	119-1041-15	1/10W 100k ohm	R431	119-1041-15	1/10W 100k ohm
R124	119-1031-15	1/10W 10k ohm	R303	119-4721-15	1/10W 4.7k ohm	R445	119-4731-15	1/10W 47k ohm
R126	119-2221-15	1/10W 2.2k ohm	R304	119-4721-15	1/10W 4.7k ohm	SUP202	060-0122-20	DSP-141N-S00B
R127	119-1031-15	1/10W 10k ohm	R305	119-1021-15	1/10W 1k ohm	T401	009-9006-60	CHOKE 0.23mH
R128	119-2231-15	1/10W 22k ohm	R306	119-1021-15	1/10W 1k ohm	X101	061-1056-00	32.768kHz
R129	119-1031-15	1/10W 10k ohm	R307	119-1021-15	1/10W 1k ohm	X202	061-3031-00	4.00MHz
R13	119-5631-15	1/10W 56k ohm	R308	032-0140-89	1/10W 47k ohm F	PWB	039-3740-00	PWB(WITHOUT COMPONENT)
R130	119-1031-15	1/10W 10k ohm	R309	032-0140-89	1/10W 47k ohm F			

The parts for PE-3402B-B/PE-3402K-A/B

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C248	187-1073-35	16V 100uF	R176	119-0000-05	1/10W 0 ohm JW	R185	119-1031-15	1/10W 10k ohm
R173	119-1031-15	1/10W 10k ohm	R177	119-0000-05	1/10W 0 ohm JW	R186	119-1031-15	1/10W 10k ohm
R175	119-0000-05	1/10W 0 ohm JW	R178	119-0000-05	1/10W 0 ohm JW	R279	119-0000-05	1/10W 0 ohm JW

The parts for PE-3402B-A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C233	043-1608-90	0.1uF	IC204	051-7538-90	SN74LVC3G17DCTR	R252	032-0140-63	1/10W 27k ohm F
C234	043-1841-90	0.047uF	IC205	051-3060-90	AZ4558M	R253	032-0140-63	1/10W 27k ohm F
C235	043-1841-90	0.047uF	IC206	051-3060-90	AZ4558M	R254	032-0140-89	1/10W 47k ohm F
C236	187-1063-35	16V 10uF	IC304	051-3060-90	AZ4558M	R255	032-0140-89	1/10W 47k ohm F
C237	187-1063-35	16V 10uF	IC305	051-3060-90	AZ4558M	R256	032-0140-63	1/10W 27k ohm F
C238	187-1063-35	16V 10uF	IC306	051-3060-90	AZ4558M	R257	032-0140-63	1/10W 27k ohm F
C239	187-1063-35	16V 10uF	IC401	051-3605-90	NJM2360AM	R258	119-1011-15	1/10W 100 ohm
C240	187-1063-35	16V 10uF	L401	010-2285-56	2.25k ohm/100MHz	R259	119-1011-15	1/10W 100 ohm
C241	187-1063-35	16V 10uF	L402	010-2285-56	2.25k ohm/100MHz	R261	119-4731-15	1/10W 47k ohm
C242	187-1063-35	16V 10uF	L403	010-6003-03	270uH	R262	119-1031-15	1/10W 10k ohm
C243	187-1063-35	16V 10uF	L404	010-3406-66	22uH J	R263	119-0000-05	1/10W 0 ohm JW
C244	189-1083-32	16V 1000uF	Q201	125-2027-95	DTC143ZU	R264	119-1031-15	1/10W 10k ohm
C245	165-1073-35	16V 100uF	Q202	191-1197-50	2SB1197K Q,R	R265	119-1031-15	1/10W 10k ohm
C306	187-1053-65	50V 1uF	Q203	125-4024-90	3DG3875	R266	119-4721-15	1/10W 4.7k ohm
C307	187-1053-65	50V 1uF	Q204	125-4024-90	3DG3875	R267	119-1531-15	1/10W 15k ohm
C312	187-1053-65	50V 1uF	Q205	125-2027-92	DTC124EUA	R268	119-1021-15	1/10W 1k ohm
C313	187-1053-65	50V 1uF	Q206	125-3005-90	KTA1273	R270	116-1521-15	1/4W 1.5k ohm
C348	043-0540-00	6.3V 10uF	Q407	125-4012-90	KTD1304	R271	116-1521-15	1/4W 1.5k ohm
C349	043-0540-00	6.3V 10uF	Q408	125-4012-90	KTD1304	R281	119-1031-15	1/10W 10k ohm
C350	043-0540-00	6.3V 10uF	R218	119-3321-15	1/10W 3.3k ohm	R340	033-1041-15	1/10W 100k ohm
C351	043-0540-00	6.3V 10uF	R219	119-1031-15	1/10W 10k ohm	R341	033-1041-15	1/10W 100k ohm
C352	043-0540-00	6.3V 10uF	R220	119-1821-15	1/10W 1.8k ohm	R342	033-1041-15	1/10W 100k ohm
C353	043-0540-00	6.3V 10uF	R221	119-4731-15	1/10W 47k ohm	R343	033-1041-15	1/10W 100k ohm
C354	045-1011-50	100pF CH	R224	119-1011-15	1/10W 100 ohm	R344	033-1041-15	1/10W 100k ohm
C355	045-1011-50	100pF CH	R225	119-1021-15	1/10W 1k ohm	R345	033-1041-15	1/10W 100k ohm
C356	045-1011-50	100pF CH	R226	119-1021-15	1/10W 1k ohm	R346	033-1031-15	1/10W 10k ohm
C357	045-1011-50	100pF CH	R227	119-1031-15	1/10W 10k ohm	R347	033-1031-15	1/10W 10k ohm
C358	045-1011-50	100pF CH	R228	119-1031-15	1/10W 10k ohm	R348	033-1031-15	1/10W 10k ohm
C359	045-1011-50	100pF CH	R230	119-0000-05	1/10W 0 ohm JW	R349	033-1031-15	1/10W 10k ohm
C401	042-1631-50	10V 100uF	R231	119-0000-05	1/10W 0 ohm JW	R350	033-1031-15	1/10W 10k ohm
C402	168-1042-78	16V 0.1uF	R234	119-6831-15	1/10W 68k ohm	R351	033-1031-15	1/10W 10k ohm
C403	166-2211-50	220pF CH	R236	119-1041-15	1/10W 100k ohm	R352	033-1031-15	1/10W 10k ohm
C404	168-2232-55	0.022uF K	R237	119-1041-15	1/10W 100k ohm	R353	033-1031-15	1/10W 10k ohm
C405	187-1063-35	16V 10uF	R238	119-1021-15	1/10W 1k ohm	R354	033-1031-15	1/10W 10k ohm
C406	042-1452-81	10V 220uF	R239	119-1041-15	1/10W 100k ohm	R355	033-1031-15	1/10W 10k ohm
C407	168-1042-78	16V 0.1uF	R240	119-1021-15	1/10W 1k ohm	R356	033-1031-15	1/10W 10k ohm
C408	042-1631-50	10V 100uF	R241	119-1041-15	1/10W 100k ohm	R357	033-1031-15	1/10W 10k ohm
C414	187-1063-35	16V 10uF	R242	032-0140-89	1/10W 47k ohm F	R401	119-2291-15	1/10W 2.2 ohm
C416	187-1063-35	16V 10uF	R243	032-0140-89	1/10W 47k ohm F	R402	119-2291-15	1/10W 2.2 ohm
D200	001-4301-29	HZU 5.1B2	R244	032-0140-89	1/10W 47k ohm F	R403	119-1531-15	1/10W 15k ohm
D201	001-4301-29	HZU 5.1B2	R245	032-0140-89	1/10W 47k ohm F	R405	119-2721-15	1/10W 2.7k ohm
D202	001-1310-00	KDS160-RTK	R246	032-0140-89	1/10W 47k ohm F	R410	116-3911-15	1/4W 390 ohm
D301	001-4301-29	HZU 5.1B2	R247	032-0140-89	1/10W 47k ohm F	R413	119-2231-15	1/10W 22k ohm
D304	001-4301-29	HZU 5.1B2	R248	032-0140-89	1/10W 47k ohm F	R414	119-2231-15	1/10W 22k ohm
D402	001-2606-90	M1FS4	R249	032-0140-89	1/10W 47k ohm F	R419	119-3311-15	1/10W 330 ohm
F301	060-0108-90	1/6ZP 0 ohm JW	R250	032-0140-89	1/10W 47k ohm F	R423	119-3311-15	1/10W 330 ohm
F302	060-8056-93	CCP2E20HTTE	R251	032-0140-89	1/10W 47k ohm F	R425	119-1021-15	1/10W 1k ohm

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	043-1802-90	0.01uF	D914	001-7088-92	HSMF-A355-G33J1	Q904	125-2027-95	DTC143ZU
C902	043-1804-90	0.1uF	D915	001-7088-92	HSMF-A355-G33J1	Q905	193-1781-50	2SC3440
C903	043-1804-90	0.1uF	D916	001-7088-92	HSMF-A355-G33J1	Q906	193-1781-50	2SC3440
C904	043-1804-90	0.1uF	D918	001-2601-90	MA728	R903	119-4711-15	1/10W 470 ohm
C905	043-1804-90	0.1uF	D919	001-1323-90	L1SS355T1G	R904	119-2211-15	1/10W 220 ohm
C906	043-1804-90	0.1uF	D931	001-0584-21	MA8062	R905	119-1241-15	1/10W 120k ohm
C907	043-1804-90	0.1uF	D934	001-7062-90	RBR1111C	R906	119-4721-15	1/10W 4.7k ohm
C908	043-0603-90	16V 10uF	IC901	051-6089-00	NJU6539	R907	119-1021-15	1/10W 1k ohm
C909	043-0603-90	16V 10uF	IR901	060-4021-00	GPIUX51	R908	119-2711-15	1/10W 270 ohm
C910	043-0603-90	16V 10uF	J702	075-9021-50	YW1310E431	R910	119-1021-15	1/10W 1k ohm
C911	043-1808-90	1200pF	J901	074-3014-72	22P	R911	119-1041-15	1/10W 100k ohm
C912	043-1808-90	1200pF	J904	074-4036-50	4P(PE-3402B-A /PE-3402K-B)	R912	119-1031-15	1/10W 10k ohm
C914	043-1804-90	0.1uF	LCD901	379-1457-51	(INDICATOR LCD)	R913	119-1031-15	1/10W 10k ohm
D909	001-4301-43	HZU8.2B1	P903	076-0478-52	2P	R914	119-3921-15	1/10W 3.9k ohm
D910	001-4301-29	HZU5.1B2	P904	076-0502-55	5P(PE-3402B-A /PE-3402K-B)	R915	119-1011-15	1/10W 100 ohm
D911	001-7088-92	HSMF-A355-G33J1	Q903	193-1781-50	2SC3440	R924	119-3311-15	1/10W 330 ohm
D912	001-7088-92	HSMF-A355-G33J1				R925	119-1031-15	1/10W 10k ohm
D913	001-7088-92	HSMF-A355-G33J1				R926	119-3311-15	1/10W 330 ohm
						R927	119-1031-15	1/10W 10k ohm
						R928	119-3311-15	1/10W 330 ohm
						R929	119-1031-15	1/10W 10k ohm

CX501/CX501B/CX501A

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R936	119-1221-15	1/10W 1.2k ohm	R954	119-1221-15	1/10W 1.2k ohm	S902	013-6312-50	SWTICH
R937	119-1521-15	1/10W 1.5k ohm	R955	119-1521-15	1/10W 1.5k ohm	S903	013-6312-50	SWTICH
R938	119-1221-15	1/10W 1.2k ohm	R956	119-1221-15	1/10W 1.2k ohm	S920	013-6312-50	SWTICH
R939	119-1021-15	1/10W 1k ohm	R957	119-1521-15	1/10W 1.5k ohm	S922	013-6312-50	SWTICH
R940	119-1821-15	1/10W 1.8k ohm	R958	119-1221-15	1/10W 1.2k ohm	S923	013-6312-50	SWTICH
R941	119-1521-15	1/10W 1.5k ohm	R959	119-1021-15	1/10W 1k ohm	S924	013-6312-50	SWTICH
R942	119-1221-15	1/10W 1.2k ohm	R960	119-1821-15	1/10W 1.8k ohm	S926	013-6312-50	SWTICH
R943	119-1521-15	1/10W 1.5k ohm	R961	119-1521-15	1/10W 1.5k ohm	S927	013-6312-50	SWTICH
R944	119-1221-15	1/10W 1.2k ohm	R962	119-1221-15	1/10W 1.2k ohm	S928	013-6312-50	SWTICH
R945	119-1021-15	1/10W 1k ohm	R963	119-1021-15	1/10W 1k ohm	S930	013-6312-50	SWTICH
R946	119-1821-15	1/10W 1.8k ohm	R964	119-1821-15	1/10W 1.8k ohm	S931	013-6312-50	SWTICH
R947	119-1521-15	1/10W 1.5k ohm	R965	119-1521-15	1/10W 1.5k ohm	S932	013-6312-50	SWTICH
R948	119-1221-15	1/10W 1.2k ohm	R966	119-1221-15	1/10W 1.2k ohm	S936	013-6312-50	SWTICH
R949	119-1521-15	1/10W 1.5k ohm	R967	119-1521-15	1/10W 1.5k ohm	S938	013-6312-50	SWTICH
R950	119-1221-15	1/10W 1.2k ohm	R968	119-1221-15	1/10W 1.2k ohm	S939	013-6312-50	SWTICH
R951	119-1021-15	1/10W 1k ohm	R969	119-1021-15	1/10W 1k ohm	VR901	016-9900-94	VR W/SHAFT
R952	119-1821-15	1/10W 1.8k ohm	R976	119-1821-15	1/10W 1.8k ohm	PWB	039-3739-00	PWB(WITHOUT COMPONENT)
R953	119-1521-15	1/10W 1.5k ohm	R977	119-1521-15	1/10W 1.5k ohm			
			S901	013-6312-50	SWTICH			

BT PWB (B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT601	060-8105-50	ANT-RECEPT	C623	178-1052-78	1uF	L606	010-3104-54	MPZ1608S601AT
C605	043-1735-90	100pF	C625	043-0603-90	10uF	R618	119-1011-15	1/10W 100 ohm
C616	043-1804-90	0.1uF	IC600	051-3577-90	S1206B33U-3T1G	R619	119-1011-15	1/10W 100 ohm
C619	043-1715-90	15pF	IC601	060-8123-90	GTBM501	PWB	039-3738-00	PWB(WITHOUT COMPONENT)
C620	043-1715-90	15pF	J600	074-3014-72	22P			
C621	178-1052-78	1uF	L604	010-3104-54	MPZ1608S601AT			
C622	043-1804-90	0.1uF						

CD PWB (B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C501	043-1608-90	0.1uF	C540	043-1608-90	0.1uF	R506	033-8231-15	1/10W 82k ohm
C502	165-1073-35	16V 100uF	C541	043-1606-90	1000pF	R507	033-0000-05	1/10W 0 ohm
C503	043-1608-90	0.1uF	C542	043-1606-90	1000pF	R508	033-1031-15	1/10W 10k ohm
C504	043-1608-90	0.1uF	C543	043-0552-90	6.3V 47uF M	R510	033-1031-15	1/10W 10k ohm
C505	042-0560-85	6.3V 100uF	C544	043-1608-90	0.1uF	R511	033-1031-15	1/10W 10k ohm
C506	043-1608-90	0.1uF	C545	042-0560-85	6.3V 100uF	R512	033-1031-15	1/10W 10k ohm
C507	043-1608-90	0.1uF	C546	042-0560-85	6.3V 100uF	R513	033-471-15	1/10W 47k ohm
C508	043-1625-90	0.022uF	C547	043-1706-90	5pF	R514	033-6831-15	1/10W 68k ohm
C509	043-1824-90	0.22uF	C548	043-1706-90	5pF	R515	033-2231-15	1/10W 22k ohm
C510	043-1608-90	0.1uF	C549	043-1608-90	0.1uF	R516	033-6811-15	1/10W 68k ohm
C511	043-1806-90	1pF	C550	043-1608-90	0.1uF	R517	033-4731-15	1/10W 47k ohm
C512	043-1605-90	68pF	C551	043-1608-90	0.1uF	R518	033-6811-15	1/10W 68k ohm
C513	042-2273-25	10V 220uF M	C552	043-1606-90	1000pF	R519	116-3391-15	1/4W 3.3 ohm
C514	043-1606-90	1000pF	C553	043-1608-90	0.1uF	R520	033-4731-15	1/10W 47k ohm
C515	043-1608-90	0.1uF	C554	165-4763-15	6.3V 47uF	R521	033-1021-15	1/10W 1k ohm
C516	043-1608-90	0.1uF	C555	043-1608-90	0.1uF	R522	033-0000-05	1/10W 0 ohm
C517	042-0560-85	6.3V 100uF	C556	043-1608-90	0.1uF	R523	033-0000-05	1/10W 0 ohm
C518	043-1605-90	68pF	C557	043-1608-90	0.1uF	R524	033-1011-15	1/10W 10k ohm
C519	043-1607-90	0.01uF	C558	042-0560-85	6.3V 100uF	R525	033-2211-15	1/10W 22k ohm
C520	043-1608-90	0.1uF	C560	043-1615-90	0.047uF	R526	033-1011-15	1/10W 10k ohm
C521	042-0560-85	6.3V 100uF	C561	043-1615-90	0.047uF	R527	033-1041-15	1/10W 100k ohm
C522	043-1608-90	0.1uF	C562	043-1614-90	470pF	R530	033-1031-15	1/10W 10k ohm
C523	043-1607-90	0.01uF	C563	043-1614-90	470pF	R531	033-1031-15	1/10W 10k ohm
C525	043-1608-90	0.1uF	D501	001-4326-50	RSB27F2T106	R532	033-6831-15	1/10W 68k ohm
C526	043-1615-90	0.047uF	IC501	051-6101-90	BD8226EFV	R533	033-1811-15	1/10W 18k ohm
C527	043-1607-90	0.01uF	IC502	051-6934-90	MF1341S2313	R534	033-1011-15	1/10W 10k ohm
C528	043-1620-90	470pF	IC503	051-6754-00	LC78960E-6AXX-L	R535	033-1811-15	1/10W 18k ohm
C529	043-1608-90	0.1uF	IC505	051-6926-90	BD2051AFJ-TR	R536	033-0000-05	1/10W 0 ohm
C530	043-1615-90	0.047uF	J501	074-2215-60	10P	R537	033-0000-05	1/10W 0 ohm
C531	043-1625-90	0.022uF	J502	074-2215-65	15P	R538	033-0000-05	1/10W 0 ohm
C532	042-0560-85	6.3V 100uF	J503	074-2226-90	40P	R539	033-1231-15	1/10W 12k ohm
C533	043-0603-90	16V 10uF	L501	010-3112-90	1k ohm/100MHz	R540	033-0000-05	1/10W 0 ohm
C534	042-0560-85	6.3V 100uF	L502	010-3112-90	1k ohm/100MHz	R541	033-3321-15	1/10W 3.3k ohm
C535	043-0603-90	16V 10uF	Q501	190-2060-00	2SA2060	R542	033-0000-05	1/10W 0 ohm
C536	043-1607-90	0.01uF	R501	117-1821-15	1/8W 1.8k ohm	R543	033-3311-15	1/10W 33k ohm
C537	043-1713-90	12pF	R503	033-2731-15	1/10W 27k ohm	R544	116-1501-15	1/4W 15 ohm
C538	043-1713-90	12pF	R504	033-8231-15	1/10W 82k ohm	R545	116-1501-15	1/4W 15 ohm
C539	043-1608-90	0.1uF	R505	033-1241-15	1/10W 12k ohm	R546	033-4701-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R547	033-4731-15	1/10W 47k ohm	R554	033-6801-15	1/16W 68 ohm	R562	033-1531-15	1/10W 15k ohm
R548	033-0000-05	1/10W 0 ohm	R555	033-6801-15	1/16W 68 ohm	R563	033-1531-15	1/10W 15k ohm
R549	033-0000-05	1/10W 0 ohm	R556	033-1041-15	1/10W 100k ohm	R564	033-0000-05	1/10W 0 ohm
R550	033-0000-05	1/10W 0 ohm	R557	033-1041-15	1/10W 100k ohm	X501	060-1535-90	16.934MHz
R551	033-1031-15	1/10W 10k ohm	R559	033-1031-15	1/10W 10k ohm	X502	061-3580-90	12MHz
R552	033-1031-15	1/10W 10k ohm	R560	033-1041-15	1/10W 100k ohm	PWB	039-3737-00	PWB(WITHOUT COMPONENT)
R553	033-4791-15	1/16W 4.7 ohm	R561	033-1041-15	1/10W 100k ohm			